


EXHIBIT L – AC Mains Conducted Emissions


FCC ID# PEL640-0001

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: 700-0002 Wireless Lan Card	Serial Number: 1A0	Job Number: NEXC0006	Date: 01/10/01
Manufacturer: NextComm, Inc.	Test Engineer: James Tilley	Job Site: SU01	
Customer Reference Number:	Software:	Power: 120 V, 60 Hz	
Comments: Mid channel, antenna 0. Laptop, monitor, keyboard, parallel and serial printers.			
		Temperature (°C): 21	% Humidity: 32
Run #07			

FCC Part 15 Class B Conducted Emissions Limits - Low Line

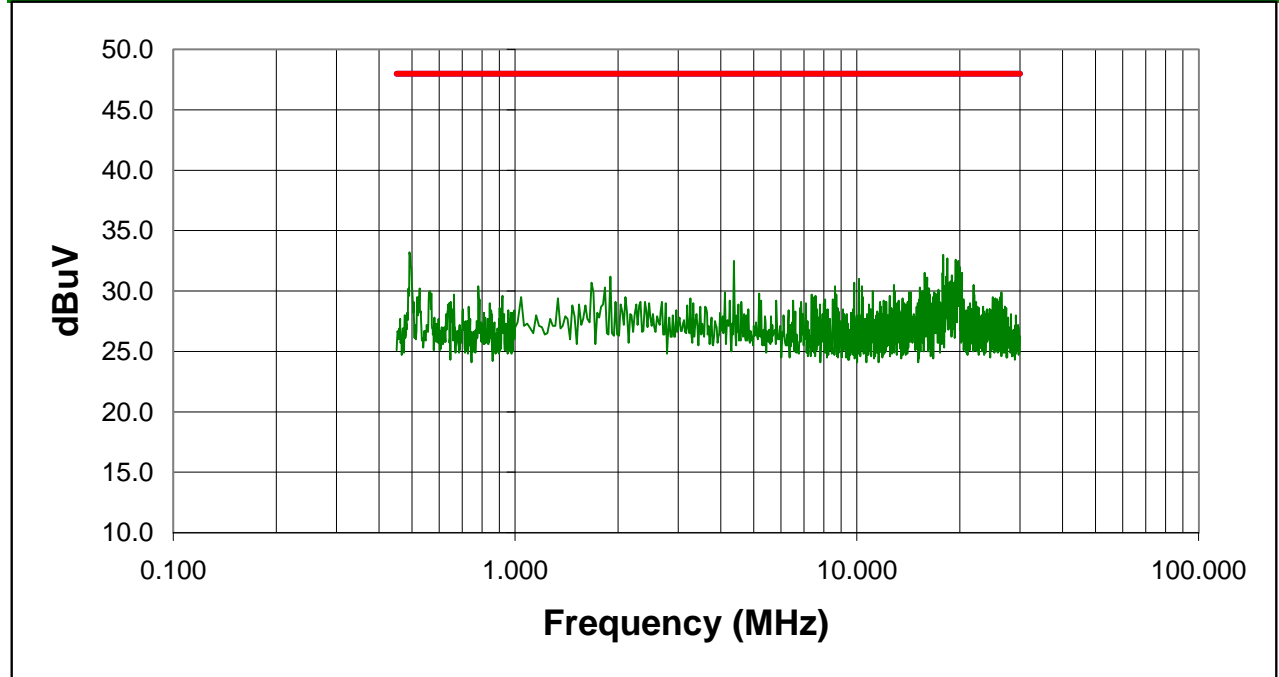


Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
0.491	13.2	Peak	20.0	33.2	48.0	-14.8
17.915	12.1	Peak	20.9	33.0	48.0	-15.0
18.392	11.8	Peak	20.9	32.7	48.0	-15.3
19.472	11.7	Peak	20.9	32.6	48.0	-15.4
19.824	11.6	Peak	20.9	32.5	48.0	-15.5
4.366	11.8	Peak	20.7	32.5	48.0	-15.5
20.001	11.1	Peak	20.9	32.0	48.0	-16.0
19.698	10.9	Peak	20.9	31.8	48.0	-16.2
20.305	10.6	Peak	20.9	31.5	48.0	-16.5
17.839	10.6	Peak	20.9	31.5	48.0	-16.5
15.804	10.6	Peak	20.9	31.5	48.0	-16.5
18.970	10.4	Peak	20.9	31.3	48.0	-16.7
18.241	10.3	Peak	20.9	31.2	48.0	-16.8
1.900	10.7	Peak	20.5	31.2	48.0	-16.8
16.055	10.2	Peak	20.9	31.1	48.0	-16.9
10.151	10.2	Peak	20.8	31.0	48.0	-17.0
18.819	9.9	Peak	20.9	30.8	48.0	-17.2
18.492	9.8	Peak	20.9	30.7	48.0	-17.3
1.674	10.2	Peak	20.5	30.7	48.0	-17.3
19.296	9.8	Peak	20.9	30.7	48.0	-17.3

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: 700-0002 Wireless Lan Card	Serial Number: 1A0	Job Number: NEXC0006	Date: 01/10/01
Manufacturer: NextComm, Inc.	Test Engineer: James Tilley	Job Site: SU01	
Customer Reference Number:	Software:	Power: 120 V, 60 Hz	
Comments: Mid channel, antenna 0. Laptop, monitor, keyboard, parallel and serial printers.			
<i>J. Tilley</i>		Temperature (°C): 21	% Humidity: 32
Run #08			


FCC Part 15 Class B Conducted Emissions Limits - High Line

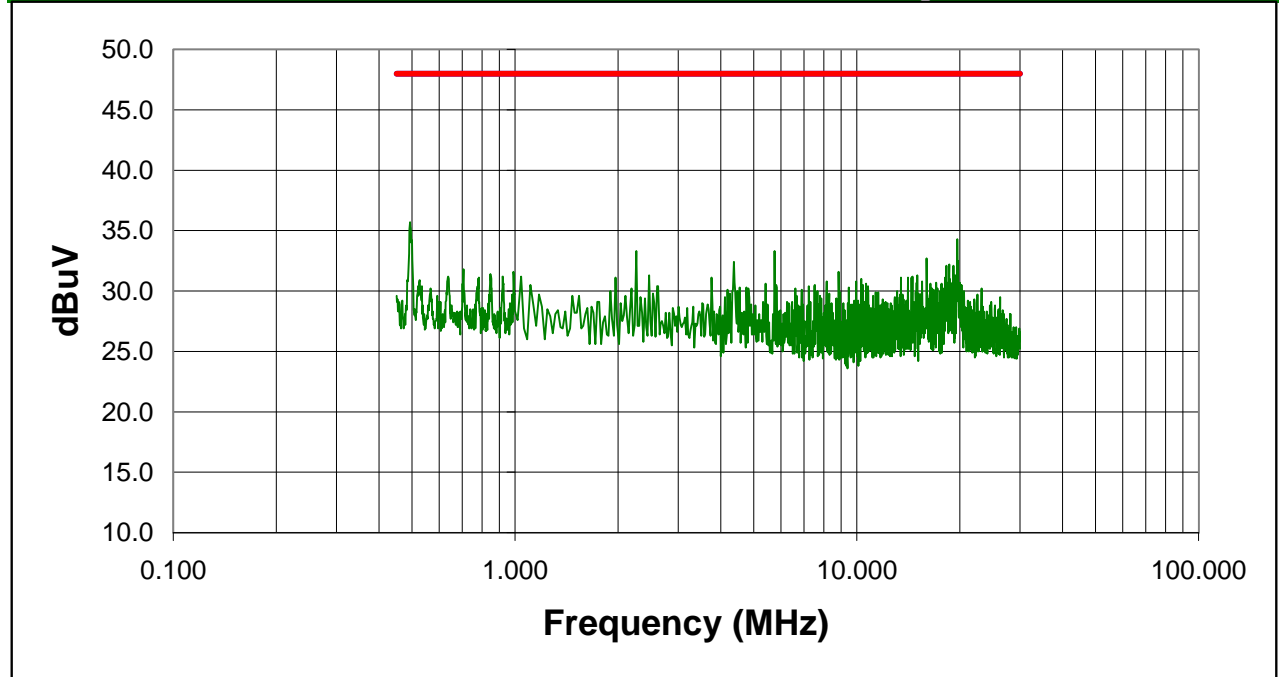


Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
0.493	15.7	Peak	20.0	35.7	48.0	-12.3
19.698	13.4	Peak	20.9	34.3	48.0	-13.7
0.499	14.2	Peak	20.0	34.2	48.0	-13.8
5.746	12.6	Peak	20.7	33.3	48.0	-14.7
2.262	12.8	Peak	20.5	33.3	48.0	-14.7
16.005	11.8	Peak	20.9	32.7	48.0	-15.3
19.774	11.6	Peak	20.9	32.5	48.0	-15.5
4.366	11.7	Peak	20.7	32.4	48.0	-15.6
18.643	11.3	Peak	20.9	32.2	48.0	-15.8
18.291	11.2	Peak	20.9	32.1	48.0	-15.9
19.196	11.2	Peak	20.9	32.1	48.0	-15.9
0.706	11.8	Peak	20.0	31.8	48.0	-16.2
0.990	11.6	Peak	20.0	31.6	48.0	-16.4
8.846	10.8	Peak	20.8	31.6	48.0	-16.4
0.847	11.4	Peak	20.0	31.4	48.0	-16.6
2.466	10.7	Peak	20.6	31.3	48.0	-16.7
15.025	10.4	Peak	20.9	31.3	48.0	-16.7
19.422	10.4	Peak	20.9	31.3	48.0	-16.7
0.850	11.2	Peak	20.0	31.2	48.0	-16.8
0.637	11.2	Peak	20.0	31.2	48.0	-16.8

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: 700-0002 Wireless Lan Card	Serial Number: 1A0	Job Number: NEXC0006	Date: 01/10/01
Manufacturer: NextComm, Inc.	Test Engineer: James Tilley	Job Site: SU01	
Customer Reference Number:	Software:	Power: 120 V, 60 Hz	
Comments: Low channel, antenna 0. Laptop, monitor, keyboard, parallel and serial printers.			
		Temperature (°C): 21	% Humidity: 32
Run #09			

FCC Part 15 Class B Conducted Emissions Limits - High Line

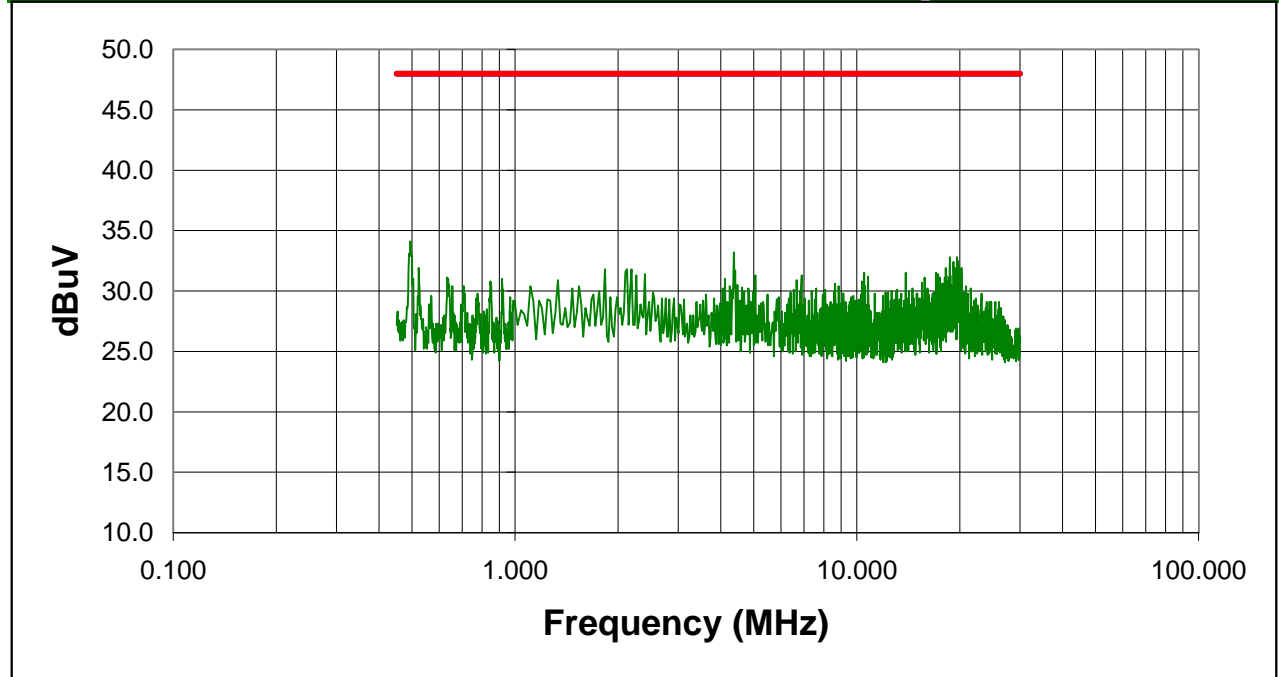

Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
0.494	14.1	Peak	20.0	34.1	48.0	-13.9
4.366	12.5	Peak	20.7	33.2	48.0	-14.8
0.490	13.1	Peak	20.0	33.1	48.0	-14.9
18.719	11.9	Peak	20.9	32.8	48.0	-15.2
19.648	11.9	Peak	20.9	32.8	48.0	-15.2
19.774	11.6	Peak	20.9	32.5	48.0	-15.5
19.196	11.5	Peak	20.9	32.4	48.0	-15.6
19.397	11.0	Peak	20.9	31.9	48.0	-16.1
0.523	11.9	Peak	20.0	31.9	48.0	-16.1
20.255	11.0	Peak	20.9	31.9	48.0	-16.1
18.216	11.0	Peak	20.9	31.9	48.0	-16.1
2.126	11.3	Peak	20.5	31.8	48.0	-16.2
2.194	11.3	Peak	20.5	31.8	48.0	-16.2
1.832	11.3	Peak	20.5	31.8	48.0	-16.2
19.347	10.7	Peak	20.9	31.6	48.0	-16.4
13.895	10.6	Peak	20.9	31.5	48.0	-16.5
17.085	10.6	Peak	20.9	31.5	48.0	-16.5
10.503	10.7	Peak	20.8	31.5	48.0	-16.5
2.398	10.8	Peak	20.6	31.4	48.0	-16.6
17.286	10.5	Peak	20.9	31.4	48.0	-16.6

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00


EUT: 700-0002 Wireless Lan Card	Serial Number: 1A0	Job Number: NEXC0006	Date: 01/10/01
Manufacturer: NextComm, Inc.	Test Engineer: James Tilley	Job Site: SU01	
Customer Reference Number:	Software:	Power: 120 V, 60 Hz	

Comments: **Low channel, antenna 0. Laptop, monitor, keyboard, parallel and serial printers.**

J. Tilley

Temperature (°C): 21	% Humidity: 32
Run #10	


FCC Part 15 Class B Conducted Emissions Limits - Low Line

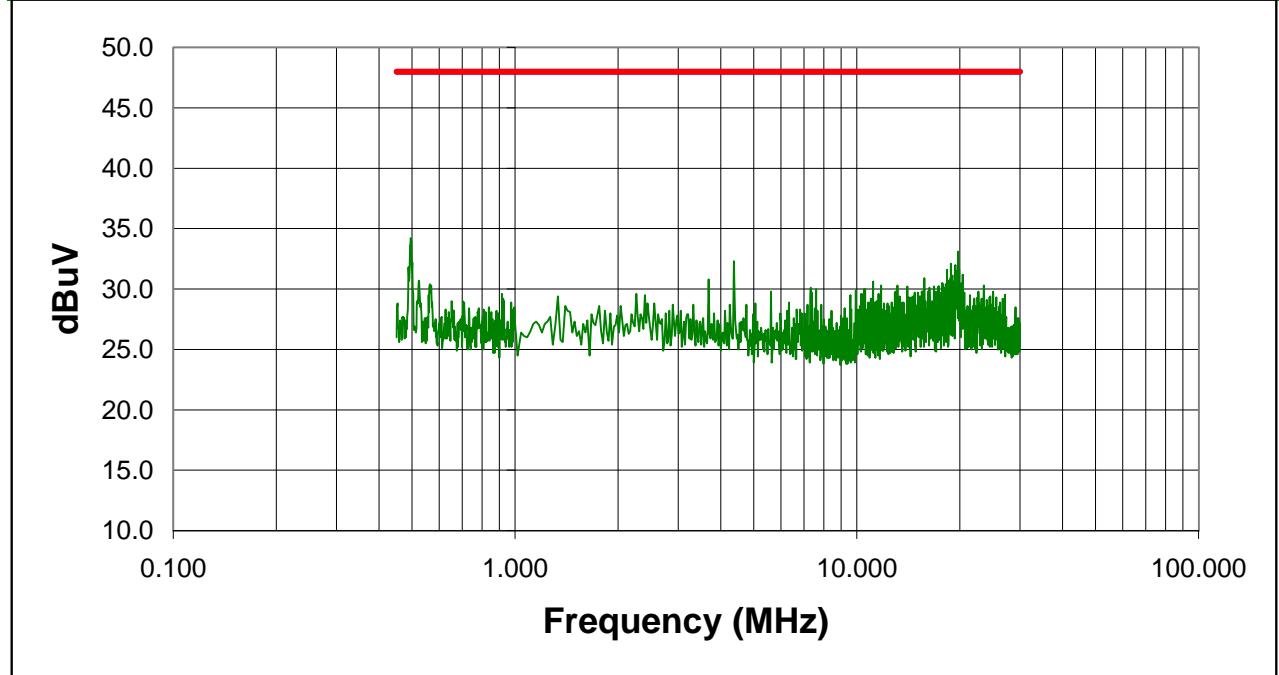


Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
0.495	14.2	Peak	20.0	34.2	48.0	-13.8
19.774	12.2	Peak	20.9	33.1	48.0	-14.9
4.366	11.6	Peak	20.7	32.3	48.0	-15.7
0.501	12.2	Peak	20.0	32.2	48.0	-15.8
18.869	11.2	Peak	20.9	32.1	48.0	-15.9
19.422	11.1	Peak	20.9	32.0	48.0	-16.0
0.488	11.8	Peak	20.0	31.8	48.0	-16.2
19.925	10.7	Peak	20.9	31.6	48.0	-16.4
18.367	10.7	Peak	20.9	31.6	48.0	-16.4
19.648	10.6	Peak	20.9	31.5	48.0	-16.5
19.347	10.3	Peak	20.9	31.2	48.0	-16.8
20.407	10.3	Peak	20.9	31.2	48.0	-16.8
18.995	10.2	Peak	20.9	31.1	48.0	-16.9
18.794	10.0	Peak	20.9	30.9	48.0	-17.1
15.754	10.0	Peak	20.9	30.9	48.0	-17.1
3.688	10.2	Peak	20.6	30.8	48.0	-17.2
0.524	10.7	Peak	20.0	30.7	48.0	-17.3
18.568	9.8	Peak	20.9	30.7	48.0	-17.3
11.156	9.8	Peak	20.8	30.6	48.0	-17.4
19.196	9.7	Peak	20.9	30.6	48.0	-17.4

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: 700-0002 Wireless Lan Card	Serial Number: 1A0	Job Number: NEXC0006	Date: 01/10/01
Manufacturer: NextComm, Inc.	Test Engineer: James Tilley	Job Site: SU01	
Customer Reference Number:	Software:	Power: 120 V, 60 Hz	
Comments: High channel, antenna 0. Laptop, monitor, keyboard, parallel and serial printers.			
		Temperature (°C): 21	% Humidity: 32
Run #11			


FCC Part 15 Class B Conducted Emissions Limits - Low Line

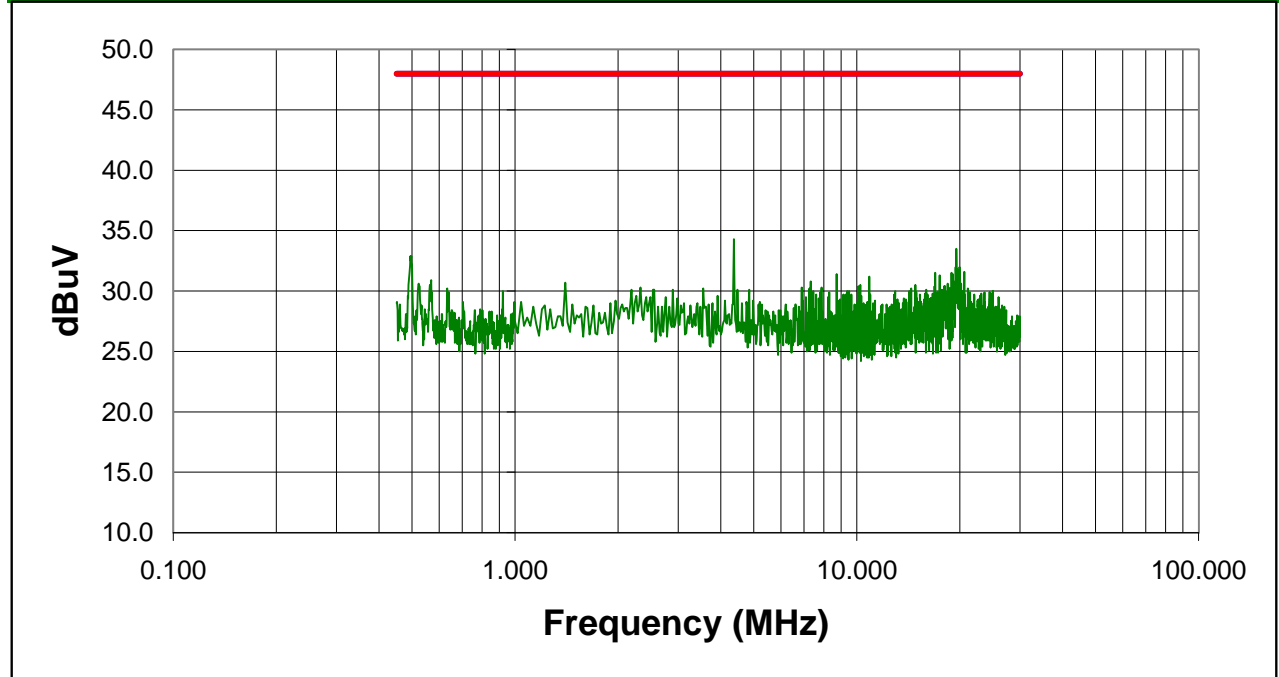


Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
4.366	13.6	Peak	20.7	34.3	48.0	-13.7
19.573	12.6	Peak	20.9	33.5	48.0	-14.5
0.494	12.9	Peak	20.0	32.9	48.0	-15.1
0.499	12.2	Peak	20.0	32.2	48.0	-15.8
19.975	11.1	Peak	20.9	32.0	48.0	-16.0
19.472	11.1	Peak	20.9	32.0	48.0	-16.0
19.698	10.9	Peak	20.9	31.8	48.0	-16.2
19.849	10.7	Peak	20.9	31.6	48.0	-16.4
20.635	10.7	Peak	20.9	31.6	48.0	-16.4
16.960	10.6	Peak	20.9	31.5	48.0	-16.5
18.945	10.6	Peak	20.9	31.5	48.0	-16.5
8.733	10.6	Peak	20.8	31.4	48.0	-16.6
19.095	10.5	Peak	20.9	31.4	48.0	-16.6
17.462	10.4	Peak	20.9	31.3	48.0	-16.7
10.880	10.4	Peak	20.8	31.2	48.0	-16.8
0.568	10.9	Peak	20.0	30.9	48.0	-17.1
7.330	10.0	Peak	20.8	30.8	48.0	-17.2
19.221	9.9	Peak	20.9	30.8	48.0	-17.2
1.403	10.2	Peak	20.5	30.7	48.0	-17.3
0.523	10.6	Peak	20.0	30.6	48.0	-17.4

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: 700-0002 Wireless Lan Card	Serial Number: 1A0	Job Number: NEXC0006	Date: 01/10/01
Manufacturer: NextComm, Inc.	Test Engineer: James Tilley	Job Site: SU01	
Customer Reference Number:	Software:	Power: 120 V, 60 Hz	
Comments: High channel, antenna 0. Laptop, monitor, keyboard, parallel and serial printers.			
		Temperature (°C): 21	% Humidity: 32
Run #12			

FCC Part 15 Class B Conducted Emissions Limits - High Line

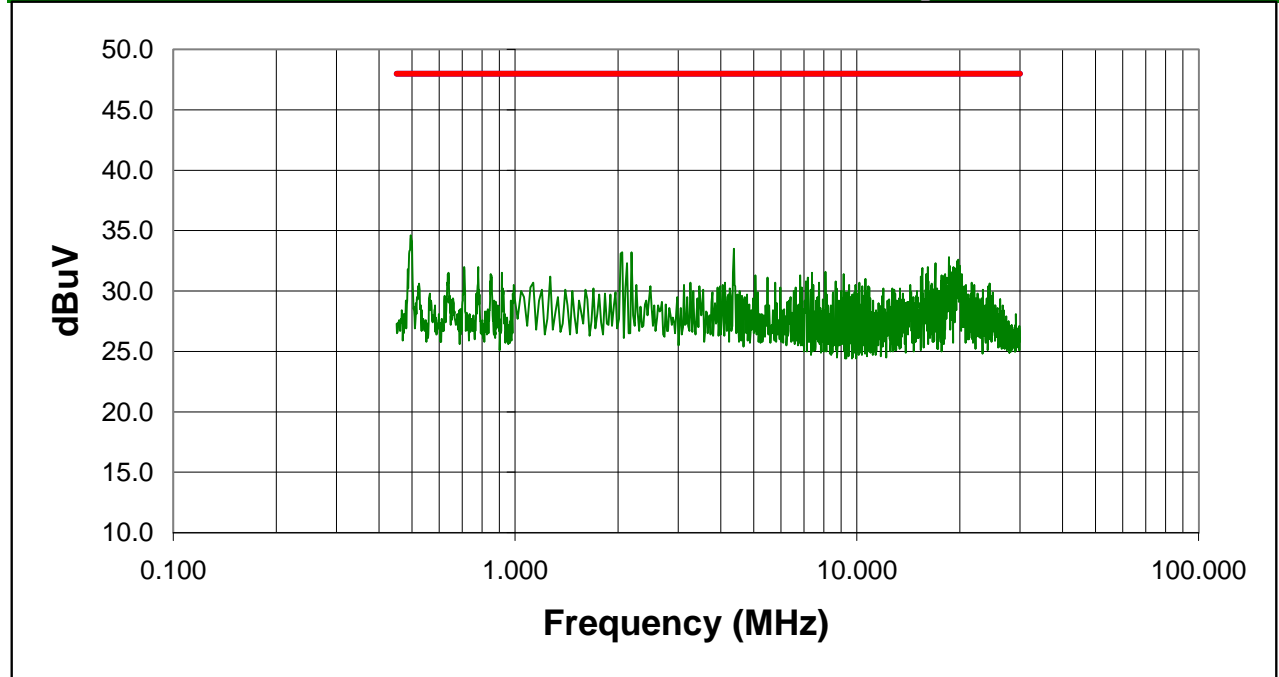

Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
0.495	14.6	Peak	20.0	34.6	48.0	-13.4
4.366	12.8	Peak	20.7	33.5	48.0	-14.5
2.194	12.7	Peak	20.5	33.2	48.0	-14.8
2.059	12.7	Peak	20.5	33.2	48.0	-14.8
18.593	11.9	Peak	20.9	32.8	48.0	-15.2
19.799	11.7	Peak	20.9	32.6	48.0	-15.4
19.673	11.6	Peak	20.9	32.5	48.0	-15.5
2.126	11.8	Peak	20.5	32.3	48.0	-15.7
16.985	11.4	Peak	20.9	32.3	48.0	-15.7
18.668	11.2	Peak	20.9	32.1	48.0	-15.9
20.026	11.2	Peak	20.9	32.1	48.0	-15.9
0.780	12.0	Peak	20.0	32.0	48.0	-16.0
19.171	11.1	Peak	20.9	32.0	48.0	-16.0
18.744	11.1	Peak	20.9	32.0	48.0	-16.0
0.710	12.0	Peak	20.0	32.0	48.0	-16.0
16.131	11.1	Peak	20.9	32.0	48.0	-16.0
19.246	11.0	Peak	20.9	31.9	48.0	-16.1
19.573	11.0	Peak	20.9	31.9	48.0	-16.1
15.553	11.0	Peak	20.9	31.9	48.0	-16.1
8.099	10.8	Peak	20.8	31.6	48.0	-16.4