

## Electromagnetic Emission

# FCC MEASUREMENT REPORT

### VERIFICATION OF COMPLIANCE


#### FCC Part 15 Certification Measurement

**PRODUCT** : Flash USB Drive  
**MODEL/TYPE NO** : FMD-WC  
**FCC ID** : PESFMD-WC  
**APPLICANT** : Jung Myung Telecom Co.,Ltd.  
5FL Silla-Technovil, 39-3, Dang-Dong, Koonpo-City, Korea  
Attn. : Hyek-Won, Kweon / Q.A Manager  
**FCC CLASSIFICATION** : Part 15 Class B Unintentional Radiators  
Computing Device Peripheral(JBP)  
**FCC RULE PART(S)** : FCC Part 15 Subpart B  
**FCC PROCEDURE** : Certification  
**TRADE NAME** : JMT  
**TEST REPORT No.** : E02.0117.FCC.032N  
**DATES OF TEST** : January 14, 2002  
**DATES OF ISSUE** : January 17, 2002  
**TEST LABORATORY** : ETL Inc ( FCC Registration Number : 95422)  
371-51, Gasan-Dong, Geumcheon-Gu, Seoul, Korea  
Tel : (031) 885-0072 Fax : (031) 885-0074

This Flash USB Drive, Model FMD-WC has been tested in accordance with the measurement procedures specified in ANSI C63.4-1992 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B : Unintentional Radiators.

I attest to the accuracy of data. All measurement herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system. Which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Name : Yo Han, Park

Title : Chief Engineer & Lab.Manager

**E-RAE Testing Laboratory Inc.**

371-51, Gasan-Dong, Geumcheon-Gu,  
Seoul, 153-023, Korea

## **Table of Contents**

### **ATTACHMENT A: COVER LETTER(S)**

#### **FCC Measurement Report**

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
  - 5.1 Summary of Test Results**
  - 5.2 Conducted Emissions Measurement**
  - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculations**
- 7. List of test Equipment used for Measurement**

- Appendix A. FCC ID Label and Location**
- Appendix B. Test Setup Photographs**
- Appendix C. External Photographs**
- Appendix D. Internal Photographs**
- Appendix E. Block Diagram**
- Appendix F. User Manual**
- Appendix G. Schematics**

## FCC MEASUREMENT REPORT

**Scope** – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

### General Information

**Applicant Name** : Jung Myung Telecom Co., Ltd.  
**Address** : 5FL Silla-Technovil, 39-3, Dang-Dong,  
Koonpo-City, Korea  
**Attention** : Hyek-Won, Kweon / Q.A Manager

- **EUT Type** : Flash USB Drive
- **Model Number** : FMD-WC
- **FCC Identifier** : PESFMD-WC
- **S/N** : N/A
- **Modulation** : N/A
- **FCC Rule Part(s)** : Part 15 Subpart B Unintentional Radiators
- **Test Procedure** : ANSI C63.4-1992
- **FCC Classification** : Part 15 Class B Unintentional Radiators  
Computing Device Peripheral(JBP)
- **Dates of Tests** : January 17, 2002
- **Place of Tests** : ETL  
EMC Testing Lab (FCC Registration Number : 95422)  
584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,  
Kyounggi-Do, Korea  
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No.** : E02.0117.FCC.032N

## 1. INTRODUCTION

---

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyoungki-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-1992 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-1992 and registered to the Federal Communications Commission(Registration Number : 95422 ).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-1992) was used in determining radiated and conducted emissions from the Jung Myung Telecom Co., Ltd. , Model : FMD-WC

## 2. PRODUCT INFORMATION

---

### 2.1 Equipment Description

The Equipment Under Test(EUT) is the Jung Myung Telecom Co., Ltd.  
Please refer to Users manual

### 2.2 General Specification

● Chassis Type	: Plastic Cover
● List of Each OSC. Or X-Tal. Freq. ( $\geq 1$ MHz)	: X-TAL – 8MHz
● Chipset Brand & Part No.	: S633B1 – SAMSUNG : K9F1208UOM-YCBO – SAMSUNG
● Number of Layers	: Main board – 4Layers, Memory Board – 1Layers
● Operating System	: Windows 98, Windows SE, Windows ME, Windows 2000, Mac OS 8.6 ~ 10.1, Linux 2.4.X
● Memory Capacity	: 16MB / 32MB / 64MB / 128MB / 256MB / 512MB / 1GB
● Interface	: USB compatible with USB 1.1 spec
● Data Retention	: up to 10 Years
● Data Access Rate	: 900KB / sec (read) : 600KB / sec (write)
● Dimensions	: 67mm w / cap x 20mm x 9mm : 60mm w/ o cap x20mm x 9mm
● Weight	: 16g
● Power Supply	: USB bus-powered (4.5V ~ 5.5V)

### 3. DESCRIPTION OF TESTS

---

#### 3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50 /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

- Procedure of Test

The line-conducted facility is located inside a shielded room 1m X 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the side wall of the shielded room. Two EMCO 3825/2 LISN are bonded to the shielded room. The EUT is powered from the EMCO LISN and the support equipment is powered from the another EMCO LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the R3261A Spectrum Analyzer to determine the frequency producing the max. emission from the EUT. The frequency producing the max level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30MHz. The bandwidth of the Spectrum Analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

### 3. DESCRIPTION OF TESTS

---

#### 3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-1992 'Measurement of Information Technology Equipment ". The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120KHz.

- Procedure of Test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determined the frequency producing the max. emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using SchwarzBeck Log-Bicon antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10-meters. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the max. emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

## 4. TEST CONDITION

---

### 4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

### 4.2 EUT operation

MP 3 File play from Flash USB Drive

### 4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

#### EUT - Flash USB Drive

FCC ID	: PESFMD-WC
Model Name	: FMD-WC
Serial No.	: N/A
Manufacturer	: Jung Myung Telecom Co., Ltd.
Power Supply Type	: Supply from USB port of PC (DC 5V)
Power Cord	: N/A
Data Cable	: 1.5 m Shielded and added ferrite core on USB Cable

#### Support Unit 1 - Personal computer (DELL)

FCC ID	: N/A (DoC)
Model Name	: MMP
Serial No.	: 2LL11S
Manufacturer	: DELL
Power Supply Type	: Switching
Power Cord	: Non-Shielded, Detachable, 1.2m
Port	: Parallel: 1, USB: 2, Keyboard: 1, Mouse: 1, RS-232: 2, Video: 1 RJ-45: 1, Audio in: 1, Audio out: 1, MIC: 1

#### Support Unit 2 - Monitor (E-RAE)

FCC ID	: OIOELM-150A
Model Name	: ELM-150A
Serial No.	: N/A
Manufacturer	: E-RAE Electronics Industry Co., Ltd.
Power Supply Type	: Switch (supply from DC Adapter DC 12V)
Power Cord	: Non-Shielded, Detachable, 1.2m
Data Cable	: Shielded detachable 15-pin D-sub and ferrite core on signal cable



Support Unit 3 - Keyboard (DELL)

FCC ID : N/A(DOC)  
Model Name : SK-8000  
Serial No. : 2965  
Manufacturer : DELL  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.2m

Support Unit 4 – USB MOUSE (LOGITECH)

FCC ID : DZL211029  
Model Name : M-S34  
Serial No. : LZC01002314  
Manufacturer : LOGITECH  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.2m

Support Unit 5 – EAR MIC (DAWA)

FCC ID : N/A  
Model Name : NCD-4JV  
Serial No. : N/A  
Manufacturer : DAWA  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Audio & MIC Cable, 1.2m

Support Unit 6 – Serial Mouse (PETRA)

FCC ID : JKGMUS5S01  
Model Name : MUS5S  
Serial No. : E183027  
Manufacturer : PETRA  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Un-Shielded, 1.2m

Support Unit 7 – Printer (H.P)

FCC ID : B94C2164X  
Model Name : C4562B  
Serial No. : TH9411434G  
Manufacturer : H.P  
Power Supply Type : DC24V From Adapter (C2182A/H.P)  
Power Cord : Non-Shielded  
Data Cable : Shielded, 1.5m

Support Unit 8 – MOUSE (DRAGONHILL)

FCC ID : DOC  
Model Name : AGM5420X  
Serial No. : 912110537  
Manufacturer : DRAGONHILL  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Un-Shielded, 1.5m

## 5. TEST RESULTS

---

### 5.1 Summary of Test Results

This equipment is Power Supply system from USB port of PC, The Conducted Test data is  
PC Power Test data  
The measurement results were obtained with the EUT tested in the conditions described in this report.  
Detailed measurement data and plots showing the maximum emission of the EUT are reported.

Test Rule Parts	Measurement Required	Result
15.107(e)	Conducted Emissions Measurement	Passed by – 12.80 dB
15.109(e)	Radiated Emissions Measurement	Passed by – 5.47 dB

The data collected shows that the Jung Myung Telecom Co., Ltd. Flash USB Drive, FMD-WC complies with technical requirements of above rules part 15.107 and 15.109 Class B Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement.  
No EMI suppression device(s) was added and/or modified during testing.

## 5. TEST RESULTS

### 5.2 Conducted Emissions Measurement

EUT	Flash USB Drive / FMD-WC (SN:N/A)
Limit apply to	15.107(e) : CISPR Pub.22(1997) Class B
Test Date	January 14, 2002
Operating Condition	Play From MP 3 File of Flash USB Drive
Environment Condition	Humidity Level : 40 %RH, Temperature : 25
Result	Passed by – 12.80 dB

### Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarization of live and neutral line.

Detector mode : CISPR Quasi-Peak mode ( 6dB Bandwidth : 9 KHz )

Frequency [MHz]	Reading [dB $\mu$ V]		Phase (*H/**N)	Limit [dB $\mu$ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Quasi-Peak	Average
0.151	50.80	-	N	66.0 ~56.0	56.0 ~46.0	15.14	-
0.182	48.95	-	N			15.44	-
0.242	40.57	-	N			21.45	-
0.485	38.52	-	N			17.73	-
0.737	39.92	-	N	56.0	46.0	16.08	-
0.981	42.35	-	N			13.65	-
1.620	43.20	30.47	N			12.80	15.53
2.780	39.62	-	H			16.38	-
23.83	38.77	-	H	60.0	50.0	21.23	-
28.14	33.67	-	H			26.33	-

#### NOTES :



- \* H : HOT Line , \*\*N : Neutral Line
- Margin value = Limit – Reading
- Measurement were performed at the HOST PC AC Power Inlet in the frequency band of 150kHz ~ 30MHz according to the CISPR 22 Class B
- The Flash USB Drive Supply from PC of USB Port
- If the Reading Quasi-Peak value is bellowrd the Average Limit, Do not test Average Mode.



Test Engineer : C. S. Kim


## 5. TEST RESULTS

### Line: HOT Line

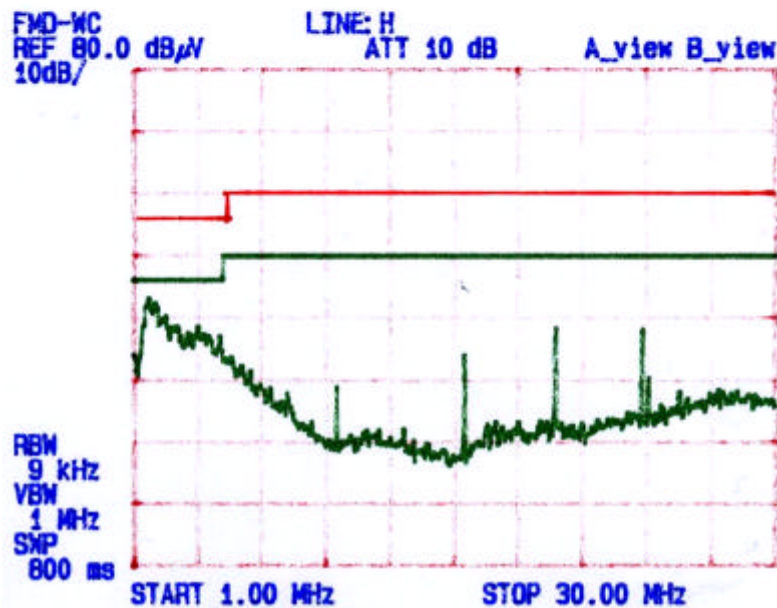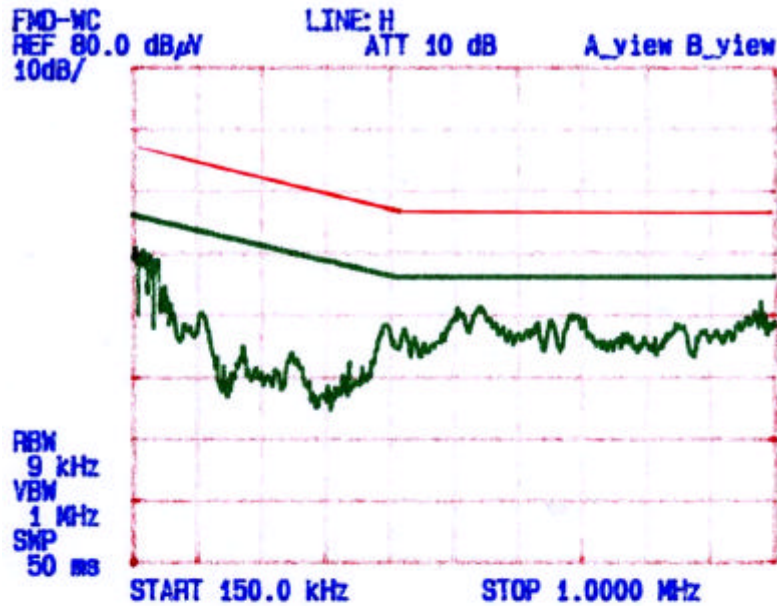

## 5.TEST RESULTS

### Line: Neutral Line

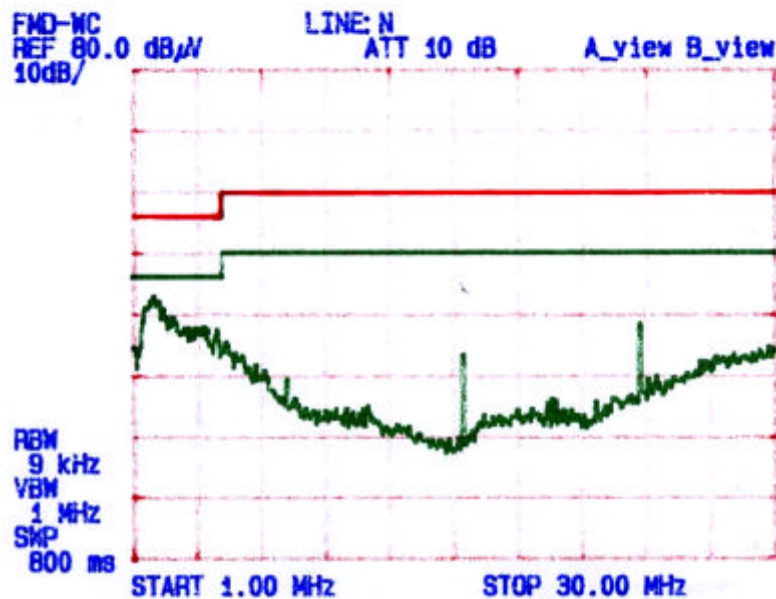

## 5. TEST RESULTS

### 5.3 Radiated Emissions Measurement

EUT	Flash USB Drive / FMD-WC (SN:N/A)
Limit apply to	15.109(e) : CISPR Pub.22(1997) Class B
Test Date	January 16, 2002
Operating Condition	Play from MP 3 File of Flash USB Drive
Environment Condition	Humidity Level : 41 %RH, Temperature : 25
Result	Passed by – 5.47dB

### Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode ( 6dB Bandwidth : 120 kHz )

Measurement Distance : 3 meters

Frequency [MHz]	Reading [dB $\mu$ V]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [Db $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
32.00	5.94	V	11.91	1.40	19.25	30.0	10.75
40.08	7.23	V	11.88	1.50	20.61	30.0	9.39
128.32	9.86	V	11.67	2.80	24.33	30.0	5.67
200.00	8.22	V	8.82	3.90	20.94	30.0	9.06
239.95	11.17	H	10.27	4.00	25.44	37.0	11.56
256.10	13.09	H	11.00	4.20	28.29	37.0	8.71
288.00	13.98	H	12.19	4.50	30.67	37.0	6.33
304.11	8.72	H	12.68	4.60	26.00	37.0	11.00
360.00	12.78	H	13.85	4.90	31.53	37.0	5.47
391.87	10.86	H	14.32	5.30	30.48	37.0	6.52

#### NOTES :

1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Emission Level = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Emission Level
4. The measurement was performed for the frequency range 30MHz ~ 1000MHz according to the CISPR 22 Class B



Test Engineer : C. S. Kim

## 6. SAMPLE CALCULATION

---

### Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$\text{dB}(\mu\text{V}/\text{m}) = 20 \log_{10} (\mu\text{V} / \text{m}) : \text{Equation 1}$$

$$\text{dB}\mu\text{V} = \text{dBm} + 107 : \text{Equation 2}$$

Example 1 : @ 1.620 MHz

Class B Limit	=	631 uV = 56.00 dBuV
Reading	=	43.20 dBuV
Convert to uV	=	144.5 uV
Margin	=	43.20 – 56.00 = -12.80
	=	-12.80 dB below Limit

Example 2 : @360.0 MHz

Class B Limit	=	70.80 uV = 37.0 dBuV/m
Reading	=	12.78 dBuV
Antenna Factor + Cable Loss	=	18.75 dB
Total	=	31.53 dBuV/m
Margin	=	31.53 – 37.0 = -5.47
	=	-9.49 dB below Limit

## 7. TEST EQUIPMENT LIST

### List of Test Equipments Used for Measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Date
<input checked="" type="checkbox"/>	Spectrum Analyzer	R3261A	Advantest	21720033	01-10-25
<input type="checkbox"/>	Spectrum Analyzer	ESA-L1500A	H.P	US37360920	01-03-12
<input checked="" type="checkbox"/>	Receiver	ESVS 10	R & S	835165/001	01-03-30
<input checked="" type="checkbox"/>	Spectrum Analyzer	R3265A	Advantest	45060321	01-02-28
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9208-1995	01-12-27
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9006-1669	01-12-27
<input checked="" type="checkbox"/>	Preamplifier	HP8447D	HP	2944A07626	02-01-10
<input type="checkbox"/>	Preamplifier	HP 8347A	HP	2834A00544	01-05-23
<input checked="" type="checkbox"/>	TriLog Antenna	VULB9160	Schwarz Beck	3082	01-06-19
<input type="checkbox"/>	LogBicon	VULB9165	Schwarz Beck	2023	01-06-01
<input checked="" type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	964	01-05-04
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	965	01-05-04
<input checked="" type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	949	01-05-04
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	950	01-05-04
<input type="checkbox"/>	Double Ridged Horn	3115	EMCO	9809-2334	01-09-20
<input type="checkbox"/>	Magnetic Loop Antenna	6502	EMCO	9810-2111	01-12-11
<input checked="" type="checkbox"/>	Turn-Table	DETT-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Antenna Master	DEAM-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Plotter	7440A	H.P	2725A 75722	N/A
<input checked="" type="checkbox"/>	Chamber	DTEC01	DAETONG	-	N/A
<input type="checkbox"/>	Impedance Matching Pad	6001.01.A	SUNNER	3252	01-09-22
<input checked="" type="checkbox"/>	Thermo Hygograph	3-3122	ISUZU	3312201	02-01-10
<input checked="" type="checkbox"/>	BaroMeter	-	Regulus	-	-