
Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : Digital Cable Receiver

MODEL/TYPE NO : DMT1761

FCC ID : PFNDMT1761

APPLICANT / ADDRESS : Digital Multimedia Technology Co., Ltd.
Doorim Bldg. 4th Fl, Poi-Dong, Kangnam-Gu, Seoul, Korea
Attn.:Ka Young, Kim / Manager

MANUFACTURER : Same as applicant

FCC CLASSIFICATION : HID : TV interface device

FCC RULE PART(S) : FCC Part 15 Subpart B

FCC PROCEDURE : Certification

TRADE NAME :

TEST REPORT No. : ETLE051229.047

DATES OF TEST : December 29, 2005 - January 10, 2006

REPORT ISSUE DATE : January 13, 2006

TEST LABORATORY : ETL Inc. (FCC Registration Number: 95422)

This Digital Cable Receiver, Model DMT1761 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL/EMC Test Laboratory and has been shown to comply with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B: TV interface device.

I attest to the accuracy of data. All measurement here in was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system, which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Hyung Seok, Lee / Chief Engineer

ETL Inc.
#584 Sangwhal-ri, Kanam-myon, Yaju-kun, Kyunggi-do, 469-885, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074

Table of Contents

ATTACHMENT A: COVER LETTER(S)

FCC Measurement Report

1. Introduction
2. Product Information
3. Description of Tests
4. Test Condition
5. Test Results
 - 5.1 Summary of Test Results
 - 5.2 Conducted Emission Test
 - 5.3 Radiated Emission Test
 - 5.4 Antenna Power Conduction Measurement
 - 5.5 Output Signal Level Measurement
 - 5.6 Output Terminal Conducted Spurious Emission Measurement
 - 5.7 Transfer Switch Measurement
6. Sample Calculation
7. List of test Equipment used for Measurements

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. Operating Manual

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name : Digital Multimedia Technology Co., Ltd.
Address : Doorim Bldg. 4th Fl, Poi-Dong, Kangnam-Gu, Seoul, Korea
Attention : Attn.:Ka Young, Kim / Manager

- **EUT Type** : Digital Cable Receiver
- **Model Number** : DMT1761
- **FCC Identifier** : PFNDMT1761
- **S/N** : N/A
- **Freq. Range** : 61.25 MHz – 71.75 MHz
- **FCC Rule Part(s)** : Part 15 Subpart B
- **Test Procedure** : ANSI C63.4-2003
- **FCC Classification** : TV Interface Device
- **RF Channels** : Ch. 3 / Ch. 4
- **Dates of Tests** : December 29, 2005 - January 10, 2006
ETL Inc.
- **Place of Tests** : 584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,
Kyeonggi-Do, Korea
Tel : 82-31- 885-0072 Fax : 82-31- 885-0074
- **Test Report No.** : ETLE051229.047

1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the shielded anechoic chamber room and open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyongki-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission(Registration Number : 95422).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the Digital Multimedia Technology Co., Ltd./ Digital Cable Receiver / Model : DMT1761

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test(EUT) is the Digital Multimedia Technology Co., Ltd./ Digital Cable Receiver / Model : DMT1761

2.2 General Specification

- Chassis Type : Metal
- List of Each OSC. Or X-Tal. Freq.(≥ 1 MHz) : 27.00 MHz, 28.224 MHz

Engineering Specifications for INS DVB-C STB

DMT1761 (Rev1.0 as of August. 24, 2005)

1. Front-End

1-1. Tuner Input

Input frequency	:	50 to 860 MHz
Digital input signal level	:	-10 to +15 dBmV
Noise figure	:	8 dB (typical)
Connector	:	IEC169-24, 2 x F-type (1 RF Input / 1 RF Loop through)
LO Phase noise at 10KHz	:	- 88 dBc/Hz (typical)

1-2. Demodulator

Demodulation type	:	demodulation and FEC decoding in accordance with ITU-T J.83 Annex-A/B/C
	:	Demodulation - 64/256-QAM
Symbol rate	:	5.5MSPS max
IF Bandwidth	:	6 MHz
Demod IC	:	STV0297J

2. Demultiplexing

In accordance with ISO 13818-1.
Simultaneous access will occur for the following :
- 1 video stream of data rate up to 15 Mbits/s
- 1 audio stereo/mono stream of data rate up to 448 Kbits/s
32 PIDs Supported

3. Decryption

Embedded descrambling support	:	Nagravision
-------------------------------	---	-------------

4. Video Processing

Decompression	:	MPEG-2 Main Profile @ Main Level With Letter Box filter
Video buffer	:	64 Mbits of SDRAM is provided
Video output	:	NTSC, PAL, PAL-M, PAL-N
Video format	:	4:3, 16:9

5. Audio Processing

Decompression	:	MPEG-1 layer I and II, Linear PCM
Outputs	:	Stereo Channel Dual Mono Joint Stereo Channel Mono Dolby 2-Channel Downmix

6. Baseband Inputs / Outputs

6-1. Baseband Video Output

Video format	:	CVBS
Output impedance	:	75Ω unbalanced
Bandwidth	:	5MHz
Connector type	:	1 x RCA

6-2. Baseband Audio Outputs

Connector type	:	2 x RCA (Left and Right)
Output impedance	:	1kΩ unbalanced
Level	:	0.6V rms±2dB into 10kΩ

6-3. Digital Audio Output

Connector type	:	1 x RCA
Output type	:	SPDIF encoded signals with AC-3
Sampling frequency rate	:	32 , 44.1 or 48khz

6-4. RF Modulator

RF Output Signal	:	NTSC M
Video Carrier Frequency	:	61.25 ± 90 kHz US 3 CH 67.25 ± 90 kHz US 4 CH IEC169-24, 2 x F-Type

6-5. S-VHS Output

Video format	:	Y,C
Output impedance	:	75Ω unbalanced
Bandwidth	:	5MHz
Connector type	:	1 x 4pin DIN

7. Microprocessor

Microprocessor	:	SGS-Thomson STi5518FVC
Clock frequency	:	81MHz
RAM memory	:	8MByte
Flash memory	:	4MByte

8. Smart Card Reader

Smart card standard	:	ISO 7816-3 compliant
Number of contact	:	8 Pin
Smart Cards for Embedded CAS	:	Nagravision

9. Remote Control Unit

Number of Keys	:	35 Keys
Operating distance	:	up to 10m
Batterys	:	2 x 1.5V (AAA type)

10. PSTN MODEM

Modulations	:	V.22 bis, V.22 & Bell 212A, V.21 & Bell 103
Data Compression	:	V.42 bis Data Compression
Error Correction Protocols	:	V.42(LAPM) / MNP 2-4 Error Correction
Functions	:	Caller ID(CID) Decoding Call Waiting Caller ID(CWCID) Type-II Decoding
Applications	:	Pay Per View / Pay TV
Dimension	:	41(L)×80(W) mm

11. Power Supply

Type	:	External Adapter (90~240V AC @ 50/60Hz , 0.3A)
Main Output voltage	:	12V DC / 1.0A
Nominal power consumption	:	10W

12. Physical Characteristics

12-1. Front Panel

Number of Keys	:	5 Keys (Standby, VOL Up/Down, CH-Up/Down)
Display	:	LED
Remote control input	:	Infra-red receiver
Smart card reader	:	ISO 7816-3 compliant

12-2. Rear Panel

Connectors	:	1 RF Input (2 F-type) 1 x Video output (RCA) 2 x Audio L/R (RCA) 1 x Digital Audio Output (RCA) 1 x RF Modulator (2 F-type) 1 x S-VHS (4 Pin DIN-type) 1 x RJ-11 Type PSTN Modem 1 x DC Power Jack (φ2.0)
------------	---	--

Note) The above specification is subject to be changed without notice in advance.

DESCRIPTION OF TESTS

3.1 AC Powerline Conducted Emissions Test

Conducted emissions measurements were made in accordance with section 11, "Measurement of information technology equipment" of ANSI C63.4-2003. The measurement were performed over the frequency range of 0.15 MHz to 30 MHz using a 50Ω/50uH LISN as the input transducer to a spectrum analyzer or a test receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8m wooden table which is placed 40 cm away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the another LISN. Power to the LISNs is filtered by a noise cut power line filters. All electrical Satellite Receivers are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. All interconnecting Satellite Receivers more than 1m were shortened by non-inductive bundling (serpentine fashion) to a 1 m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the Spectrum Analyzer and Test Receiver to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using the detector function set to the CISPR Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30 MHz. The bandwidth of the Test Receiver was set to 9 kHz. The EUT, support equipment, and interconnecting Satellite Receivers were arranged and manipulated to maximize each emission. Each emission was maximized by switching power lines, varying the mode of operation or resolution, clock or data exchange speed, if applicable Satellite Receiver, whichever determined the worst-case emission. Each emission reported was calibrated using self-calibrating mode.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup in Appendix B.

3. DESCRIPTION OF TESTS

3.2 Radiated Emissions Test

Preliminary measurements were made at indoors 3 meter semi EMC Compact Chamber using broadband antennas, broadband amplifier and spectrum analyzer to determine the emission frequencies producing the maximum EME.

Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1 000 MHz using biconilog antenna and above 1 000 MHz, linearly polarized double ridge horn antennas were used. Above 1 GHz, linearly polarized double ridge horn antennas were used. The measurements were performed with three frequencies which were selected as bottom, middle and top frequency in the operating band. Emission level from the EUT with various configurations were examined on the spectrum analyzer connected with the RF amplifier and plotted graphically.

Final measurements were made outdoors open site at 3-meter test range using biconilog antenna. The output from the antenna was connected, via a preselector or a preamplifier, to the input of the EMI Measuring Receiver or Spectrum analyzer(for above 1 GHz). The detector function was set to the quasi-peak or peak mode as appropriate. The measurement bandwidth on the Field strength receiver was set to at least 120 kHz (1 MHz for measurement above 1 GHz), with all post-detector filtering no less than 10 times the measurement bandwidth. Sufficient time for the EUT, support equipment and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during preliminary measurement was examined and investigated as the same set up and configuration which produced the maximum emission The EUT, support equipment and interconnecting Satellite Receivers were configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1m x 1.5 meter table. The turntable containing the system was rotated and the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by varying the mode of operating frequencies of the EUT. The worst case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor(20 dB/decade) as per section 15.31(f).


Photographs of the worst-case emission test setup can be seen in Appendix B.

3. DESCRIPTION OF TESTS

3.3 Antenna-Conducted Power Measurements

Power on the receive antenna terminals was to be determined by measurement of the voltage present at these terminals. Antenna-conducted power measurements is performed with the EUT antenna terminals connected directly to a spectrum analyzer, if the antenna impedance matches the impedance of the measuring instrument. Otherwise, use an impedance-matching network to connect the measuring instrument to the antenna terminals of the EUT. Losses in decibels in any impedance-matching network used is added to the measured value in dB μ V.

With the EUT tuned to one of the frequency over which device operates , measure both the frequency and voltage present at the antenna input terminals over the frequency range specified in the individual equipment requirements. Repeat this measurement with the receiver tuned to another frequency until the number of frequencies specified have been successively measured. Power on the receive antenna terminals is the ratio of V^2/R , where V is the loss-corrected voltage measured at the antenna terminals, and R is the impedance of the measuring instrument.

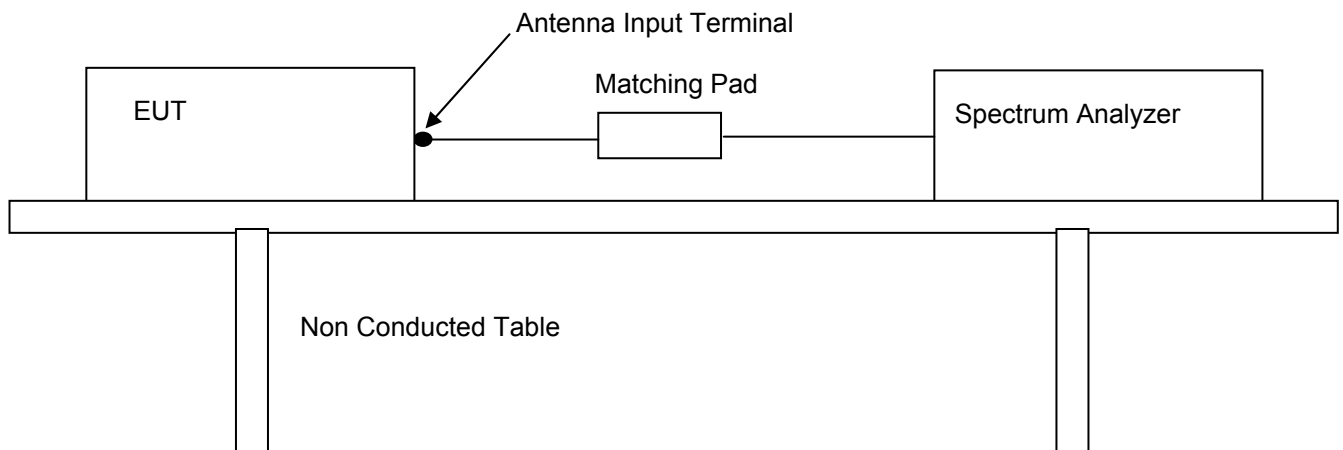

3. DESCRIPTION OF TESTS


3.4 Output Signal Conducted Level Measurement

The output signal level is the maximum voltage level present at the output terminals of the EUT on a particular frequency during normal use of the device.

The signal level was measured by direct connection to the spectrum analyzer with 50/75 ohm matching transformer between the spectrum analyzer and the TV interface device. The RF output signal level measured was the highest RF level present at the output terminals during normal use of the device. Measurements were made of the levels of both the visual (61.25 MHz) and audio (65.75 MHz) carrier for each TV channel (3 and 4) on which the device operates. The Satellite Receiver was supported between the EUT and the measuring instrument in a straight horizontal line so it had at least 75cm clearance from any conducting surface.

The EUT is provided with a typical signal consistent with normal operation. For each channel on which the EUT operates and in each mode in which the device operates, the video and audio carrier level is measured and recorded.

The voltage corresponding to the peak envelope power of the video modulated signal during maximum amplitude peaks across a resistance (R ohms) matching the rated output impedance of the device, must not exceed $692.8 R^{1/2} \mu V$ for all other TV interface device. The voltage corresponding to peak envelope power of the audio modulated signal, if provided by the TV interface device, must not exceed $155 R^{1/2} \mu V$ for Satellite Receiver system terminal device of TV interface device used with a master antenna, and $77.5 R^{1/2} \mu V$ for all other TV interface device. Losses in decibels in any impedance-matching network used is added to the measured value in dB μV . The EUT was configured in accordance with ANSI C63.4-2003 Section 12.2 as below configuration block diagram.

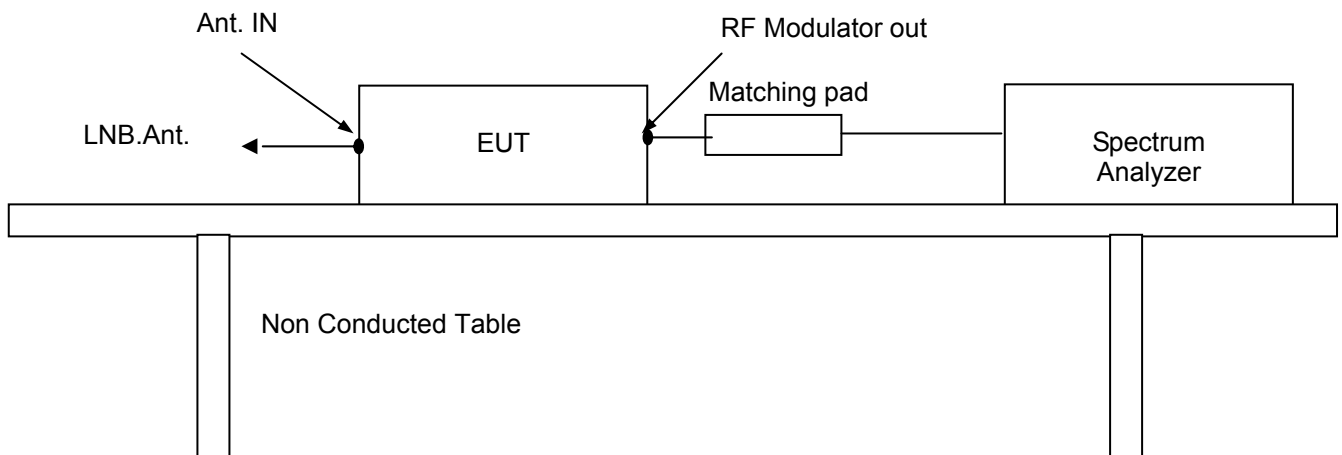


3. DESCRIPTION OF TESTS

3.5 Output Terminal Conducted Spurious Emission Measurement

The RF output signal was fed to the TV receiver via coaxial Satellite Receiver. Measurements were made by direct connection to the spectrum analyzer and TV interface device with 50/75 ohm matching transformer. The frequency range 30 to 1 000 MHz was investigated for significant emission.

The maximum RMS voltage of any emission appearing on frequencies removed by more than 4.6 MHz below and 7.4 MHz above the video carrier frequency on which the TV interface device is operated must not exceed $692.8 R^{1/2} \mu\text{V}$ for Satellite Receiver system terminal device or TV interface device used with a master antenna and $10.95 R^{1/2} \mu\text{V}$ for all other TV interface device when terminated with a resistance (R ohms) matching the rated output impedance of the TV interface device. The EUT was configured in accordance with ANSI C63.4-2003 Section 12.2 as below configuration block diagram.

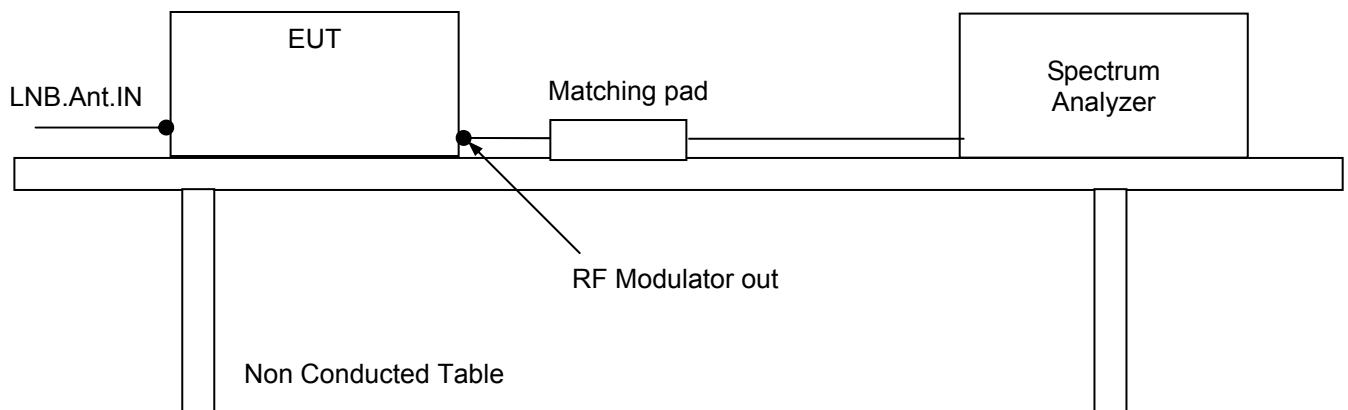

3. DESCRIPTION OF TESTS


3.6 Antenna Transfer Switch Measurement

Isolation was measured for all positions of an antenna transfer switch on all output channels of the EUT. TV interface device transfer switch isolation is the difference the levels of a signal going into one antenna input port of the switch and that of the same signal coming out of another antenna terminal of transfer switch. The isolation of an antenna transfer switch equipped with coaxial connectors is performed by measuring the maximum voltage of the visual carrier. Measurements were made of the maximum RMS voltage at the antenna input terminals of the switch for all positions of the transfer switch. The maximum voltage corresponds to the peak envelope power of the video signal during maximum amplitude peaks. In either position of the receiver transfer switch, the maximum voltage at the receiving antenna input terminals of the switch when terminated with a resistance (R ohms) matching the rated impedance of the antenna input of the switch, must not exceed $0.346 R^{1/2} \mu V$.

The maximum voltage corresponds to the peak envelope power of the video modulated signal during maximum amplitude.

The EUT was configured in accordance with ANSI C63.4-2003 Section 12.2 as below configuration block diagram. and the EUT configuration can also be seen in Appendix B. Photographs of the test setup.

The unused RF input/output terminals are terminated in a proper impedance. The antenna input terminal is connected to the the input of preamplifier through the matching transformer coaxial Satellite Receiver. And the output of preamplifier is connected to the spectrum analyzer. Then, the signal level on the antenna input terminal is measured under the EUT condition produced the maximum signal level.

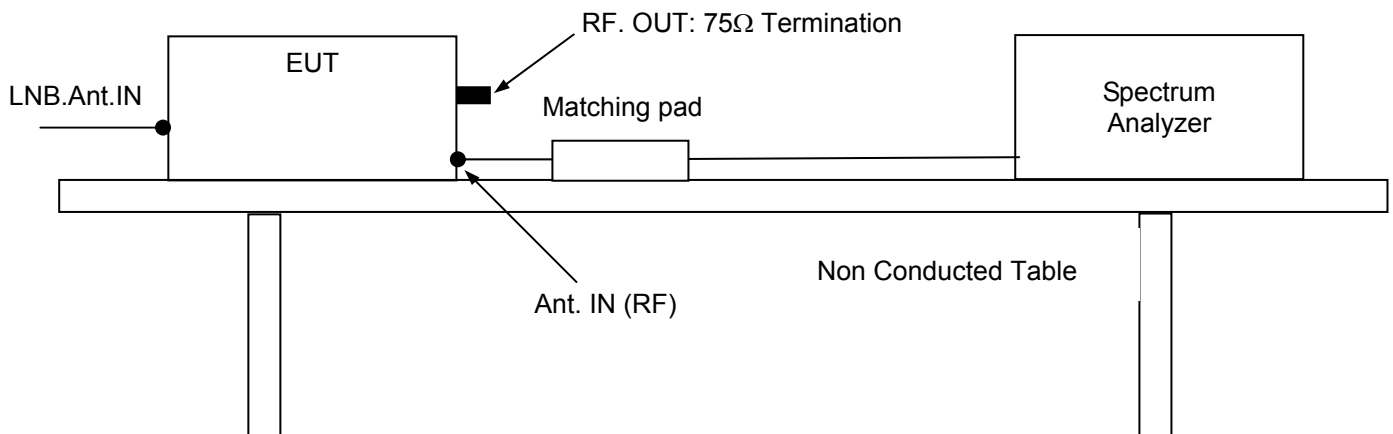

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner which tends to maximize its emission level in a typical application.

4.2 EUT operation

The EUT was set to the normal receiving mode in a TV mode during all the testing in a manner similar to a typical use. For the EUT operation, the cable live signal was fed to the EUT through the Cable input. During the preliminary testing, the worst case condition of the operating mode was ch.3

4.3 Support Equipment Used

Following peripheral devices and interface Cable Receivers were connected during the measurement:

EUT- Digital Cable Receiver

FCC ID : PFNDMT1761
Model Name : DMT1761
Serial No. : N/A
Manufacturer : Digital Multimedia Technology Co., Ltd.
Power Supply Type : External Adapter
Data Cable : 1.5 m Shielded RF Cable , 1.5m Shielded RCA Cable
1.5m Shielded S-video Cable

Support Unit - TV

FCC ID : N/A
Model Name : DM TECH TV
Serial No. : N/A
Manufacturer : DM TECH
Power Supply Type : Switching
Data Cable Receiver : refer to EUT connection

Support Unit - DVD Receiver

FCC ID : DoC
Model Name : DVDP-M100
Serial No. : N/A
Manufacturer : Alphacast
Power Supply Type : External Adapter
Data Cable Receiver : refer to EUT connection

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

FCC Rule Parts	Measurement Required	Result
15.107	Conducted Emission	Passed by 9.70 dB
15.109	Radiated Emission	Passed by 3.60 dB
15.111	Antenna Power Conduction Measurement	Passed by 5.19 dB
15.115(b)(1)(ii)	Output Signal Level Measurement	Passed by 2.01 dB
15.115(b)(2)(ii)	Output Terminal Conducted Spurious Emission Measurement	Passed by 18.58 dB
15.115(c)(1)(ii)	Transfer Switch Measurement	Passed

The data collected shows that the **Digital Multimedia Technology Co., Ltd./ Digital Cable Receiver / DMT1761** complies with Part 15 Subpart B Unintentional radiators and the TV Interface Device section(15.115) of the FCC Rules.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5. TEST RESULTS

5.2 Conducted Emission Test

EUT	Digital Cable Receiver/ DMT1761 (SN:N/A)
Limit apply to	FCC Part 15 Subpart B Section 15.107
Test Date	January 4, 2006
Operating Condition	TV Mode (Channel 3)
Environment Condition	Humidity Level : 33 %R.H., Temperature : 17 °C
Result	Passed by 9.70 dB

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 9 kHz)

Frequency [MHz]	Result [dB μ V]		Phase (*L/**N)	Limit [dB μ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Q.Peak	Average
0.265	43.4	36.1	H	61.3	51.3	17.9	15.2
2.373	43.6	33.4	H	56.0	46.0	12.4	12.6
9.020	47.3	40.3	H	60.0	50.0	12.7	9.70
9.061	47.3	40.2	N			12.7	9.80
9.497	45.7	34.9	H			14.3	15.1
9.594	46.2	35.0	N			13.8	15.0

NOTES :

- * H : Live Line , **N :Neutral Line
- Margin value = Result – Limit.
- Channel 3 was the worst case operation mode



Kug Kyoung Yoon
Test Engineer

5. TEST RESULTS

5.3 Radiated Emission Test

EUT	Digital Cable Receiver / DMT1761 (SN:N/A)
Limit apply to	FCC Part 15 Subpart B Section 15.109
Test Date	January 3, 2006
Operating Condition	TV Mode (Channel 3)
Environment Condition	Humidity Level : 31 %R.H., Temperature : 8 °C
Result	Passed by 3.60 dB

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 120 kHz)

Measurement Distance : 3 meters

Frequency [MHz]	Reading [dB μ V]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
121.51	21.48	V	11.00	3.12	35.60	43.5	7.90
134.99	21.58	H	11.49	3.32	36.40	43.5	7.10
364.53	21.37	H	13.88	6.25	41.50	46.0	4.50
486.01	18.19	H	16.72	7.49	42.40	46.0	3.60
539.87	15.62	H	17.84	8.24	41.70	46.0	4.30
608.07	12.16	V	18.77	8.96	39.90	46.0	6.10
702.81	11.64	H	20.42	9.64	41.70	46.0	4.30

NOTES :

- * H : Horizontal polarization , ** V : Vertical polarization
- Result = Reading + Antenna factor + Cable loss
- Margin value = Limit - Result
- Channel 3 was the worst case operation mode.



Kug Kyoung Yoon
Test Engineer

5. TEST RESULTS

5.4 Antenna Power Conduction Measurement

EUT	Digital Cable Receiver / DMT1761 (SN:N/A)
Limit apply to	FCC Part 15 Subpart B Section 15.111
Test Date	January 6, 2006
Operating Condition	Cable Tuner
Environment Condition	Humidity Level : 35 %R.H., Temperature : 18 °C
Result	Passed by 5.19 dB

Antenna Power Conduction Test Data

Tuned Frequency [MHz]	Meter Reading [dB μ V]	Correction Factor [dB]	Result [dB μ V]	Limit [dB μ V]	Margin [dB]
2467.0	19.05	8.0	27.05	50.0	22.95
3288.0	35.91	8.9	44.81		5.19

NOTES :

1. $Result = Meter\ Reading + Correction\ Factor(Matching\ Loss + Cable\ loss)$
 $Margin\ value = Limit - Result$
2. Measurements using the CISPR Quasi-peak mode in the the frequency range 30 to 1 000 MHz and measurements using the CISPR peak mode in the the frequency range 1 000 to 5 000 MHz .
3. The limits is 2.0 nanowatts in the frequency range 30 to 5 000 MHz.



Kug Kyoung Yoon
Test Engineer

5. TEST RESULTS

5.5 Output Signal Level Measurement

EUT	Digital Cable Receiver / DMT1761 (SN:N/A)
Limit apply to	FCC Part15 Subpart B Section 15.115(b)(1)
Test Date	January 6, 2006
Operating Condition	TV Mode (Channel3, 4)
Environment Condition	Humidity Level : 35 %R.H., Temperature : 18 °C
Result	Passed by 2.01 dB

Output Signal Test Data

Test Channel	Emission Frequency [MHz]	Meter Reading [dB μ V]	Correction Factor [dB]	Signal Level [dB μ V]	Limit [dB μ V]	Margin [dB]
3	61.25	59.99	7.5	67.49	69.5	2.01
	65.75	44.24	7.5	51.74	56.5	4.76
4	67.25	59.89	7.5	67.39	69.5	2.11
	71.75	44.25	7.5	51.75	56.5	4.75

NOTES :

1. The correction factor consist of the insertion loss of the impedance matching transformer and the coaxial Satellite Receiver used for the test.
2. The spectrum was checked in each test mode and operation mode, and the maximum measured data were reported.
3. Signal Level = Meter Reading + Correction Factor(Matching Loss + Cable loss)
Margin value = Limit - Signal Level



Kug Kyoung Yoon
Test Engineer

5. TEST RESULTS

5.6 Output Terminal Conducted Spurious Emission Measurement

EUT	Digital Cable Receiver / DMT1761 (SN:N/A)
Limit apply to	FCC Part15 Subpart B Section 15.115(b)(2)
Test Date	January 6, 2006
Operating Condition	TV Mode (Channel 3, 4)
Environment Condition	Humidity Level : 35 %R.H., Temperature : 18 °C
Result	Passed by 18.58 dB

Output Terminal Conducted Spurious Test Data

Test Channel	Emission Frequency [MHz]	Meter Reading [dB μ V]	Correction Factor [dB]	Result [dB μ V]	Limit [dB μ V]	Margin [dB]
3	49.20	11.78	7.5	19.28	39.5	20.22
	122.80	13.42	7.5	20.92	39.5	18.58
	811.00	9.10	7.5	16.60	39.5	22.90
4	49.20	11.99	7.5	16.53	39.5	22.97
	134.40	11.22	7.5	18.62	39.5	20.88
	811.00	9.03	7.5	19.49	39.5	20.01

NOTES :

1. The correction factor consist of the insertion loss of the impedance matching transformer, the coaxial Satellite Receiver used for the test.
2. The spectrum was checked in each test mode and operation mode, and the maximum measured data were reported.
3. Result = Meter Reading + Correction (Matching Loss+ Cable loss)
Margin value = Limit - Signal Level



Kug Kyoun Yoon
Test Engineer

5. TEST RESULTS

5.7 Antenna Transfer Switch Measurement

EUT	Digital Cable Receiver / DMT1761 (SN:N/A)
Limit apply to	FCC Part15 Subpart B Section 15.115(c)(1)
Test Date	January 6, 2006
Operating Condition	TV Mode (Channel 3, 4)
Environment Condition	Humidity Level : 35 %R.H., Temperature : 18 °C
Result	Passed

Antenna Transfer Switch Test Data

Test Channel	Emission Frequency [MHz]	Meter Reading [dB μ V]	Correction Factor [dB]	Result [dB μ V]	Limit [dB μ V]	Margin [dB]
3	61.25	During this test, no signal			9.5	-
4	67.25			9.5	-

NOTES :

- No emission was observed during the test. The spectrum was checked in each test mode and operation mode. Transfer switch isolation measurements were made on the Channel 3 or 4 video output frequency of 61.25 or 67.25MHz and both positions of the transfer switch were checked for compliance.
- To clarify the emissions emanated from ANT. input terminal on the EUT, RF pre-amplifier was used. The gain of pre-amplifier at each frequency measured from the EUT was obtained after sufficient warm-up for stabilization of gain. The correction factor consist of the insertion loss of the impedance matching transformer, the coaxial Satellite Receiver used for the test and the gain of pre-amplifier.
- Result = Meter Reading + Correction Factor(Matching Loss + Cable loss)
Margin value = Limit - Result
- Spectrum analyzer setting : Frequency Span 1MHz, Resolution bandwidth 100 kHz, Video bandwidth 300 kHz, Detector function Peak mode.



Kug Kyoung Yoon
Test Engineer

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Satellite Receiver Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength
RA = Receiver Amplitude
AF = Antenna Factor
CF = Cable Loss

$$\text{dB}(\mu\text{V}/\text{m}) = 20 \log_{10} (\mu\text{V} / \text{m}) : \text{Equation 1}$$

$$\text{dB}\mu\text{V} = \text{dBm} + 107 : \text{Equation 2}$$

Example : @486.01 MHz

Class B Limit	=	46.00 dBuV/m
Reading	=	18.19 dBuV
Antenna Factor + Cable Loss	=	24.21 dB/m
Total	=	42.40 dBuV/m
Margin	=	46.00 – 42.40 = 3.60
	=	3.60 dB below Limit

7. List of Test Equipments used for Measurements

	Test Equipment	Model	Mfg.	Serial No.	Cal. Due Date
<input checked="" type="checkbox"/>	Spectrum Analyzer	7401A	H.P	US38440057	06.04.07
<input checked="" type="checkbox"/>	Spectrum Analyzer	R3261A	Advantest	21720033	06.10.26
<input checked="" type="checkbox"/>	Receiver	ESVS 10	R & S	835165/001	06.04.07
<input checked="" type="checkbox"/>	Spectrum Analyzer	7405A	H.P	US41160290	06.10.18
<input checked="" type="checkbox"/>	TEST Receiver	ESPI	Rohde & Schwarz	100478	06.10.18
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9006-1669	06.04.06
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9208-1995	06.04.07
<input type="checkbox"/>	LogBicon Antenna	VULB9160	Schwarz Beck	3082	06.07.19
<input checked="" type="checkbox"/>	LogBicon Antenna	VULB9165	Schwarz Beck	2023	06.07.05
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	964	06.06.24
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	965	06.07.05
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	949	06.06.24
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	950	06.07.05
<input type="checkbox"/>	Horn Antenna	BBHA 9120D	Schwarz Beck	227	06.04.04
<input checked="" type="checkbox"/>	Turn-Table	DETT-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Antenna Master	DEAM-03	Daeil EMC	-	N/A
<input type="checkbox"/>	Plotter	7440A	H.P	2725A 75722	N/A
<input checked="" type="checkbox"/>	Chamber	DTEC01	DAETONG	-	N/A
<input checked="" type="checkbox"/>	RAM	Rohde & Schwarz	Matching Pad	836964 / 009	06.10.18

End of test Report