

# Emissions Test Report

**EUT Name:** Wireless Video Access Point  
**Model No.:** 405  
CFR 47 Part 15.407 2012 and RSS 210: 2010

*Prepared for:*

Mark Rieger  
Pace Americas  
310 Providence Mine Road, Ste. 200  
Nevada City, CA 95959  
Tel: (530) 274 5440  
Fax: (530) 273 6340

*Prepared by:*

TUV Rheinland of North America, Inc.  
1279 Quarry Lane  
Pleasanton, CA 94566  
Tel: (925) 249-9123  
Fax: (925) 249-9124  
<http://www.tuv.com/>

*Report/Issue Date:* 30 May 2013  
*Job #* 110737  
*Report Number:* 31360999.003

## Revisions

| <b>Revision No.</b> | <b>Date<br/>MM/DD/YYYY</b> | <b>Reason for Change</b> | <b>Author</b> |
|---------------------|----------------------------|--------------------------|---------------|
| 0                   | 06/07/2013                 | Original Document        | N/A           |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |
|                     |                            |                          |               |

Note: Latest revision report will replace all previous reports.

# Statement of Compliance

*Manufacturer:* Pace Americas  
310 Providence Mine Road, Ste. 200  
Nevada City, CA 95959  
(530) 274 5440

*Requester / Applicant:* Mark Rieger

*Name of Equipment:* Wireless Video Access Point

*Model No.* 405

*Type of Equipment:* Intentional Radiator

*Application of Regulations:* CFR 47 Part 15.407 2012 and RSS 210: 2010

*Test Dates:* April 29, 2013 to May 30, 2013

*Guidance Documents:*


Emissions: ANSI C63.10-2009, KDB 789033 D01 General UNII Test Procedure v01r03

*Test Methods:*

Emissions: ANSI C63.10-2009, KDB 789033 D01 General UNII Test Procedure v01r03

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.



Jeremy Luong 06/07/2013

Conan Boyle 06/07/2013

Test Engineer

Date

A2LA Signatory

Date



Testing Cert #3331.02

US5254

2932M-1

Table of Contents

|          |                                                     |           |
|----------|-----------------------------------------------------|-----------|
| <b>1</b> | <b>Executive Summary</b>                            | <b>7</b>  |
| 1.1      | Scope                                               | 7         |
| 1.2      | Purpose                                             | 7         |
| 1.3      | Summary of Test Results                             | 8         |
| 1.4      | Special Accessories                                 | 8         |
| 1.5      | Equipment Modifications                             | 8         |
| <b>2</b> | <b>Laboratory Information</b>                       | <b>9</b>  |
| 2.1      | Accreditations & Endorsements                       | 9         |
| 2.1.1    | US Federal Communications Commission                | 9         |
| 2.1.2    | NIST / A2LA                                         | 9         |
| 2.1.3    | Canada – Industry Canada                            | 9         |
| 2.1.4    | Japan – VCCI                                        | 9         |
| 2.1.5    | Acceptance by Mutual Recognition Arrangement        | 10        |
| 2.2      | Test Facilities                                     | 10        |
| 2.2.1    | Emission Test Facility                              | 10        |
| 2.2.2    | Immunity Test Facility                              | 10        |
| 2.3      | Measurement Uncertainty                             | 10        |
| 2.3.1    | Sample Calculation – radiated & conducted emissions | 11        |
| 2.3.2    | Measurement Uncertainty                             | 11        |
| 2.4      | Calibration Traceability                            | 12        |
| <b>3</b> | <b>Product Information</b>                          | <b>13</b> |
| 3.1      | Product Description                                 | 13        |
| 3.2      | Equipment Configuration                             | 13        |
| 3.3      | Operating Mode                                      | 13        |
| 3.4      | Unique Antenna Connector                            | 14        |
| 3.4.1    | Results                                             | 14        |
| <b>4</b> | <b>Emissions</b>                                    | <b>15</b> |
| 4.1      | Output Power Requirements                           | 15        |
| 4.1.1    | Test Method                                         | 15        |
| 4.1.2    | Results                                             | 16        |
| 4.2      | Occupied Bandwidth                                  | 28        |
| 4.2.1    | Test Method                                         | 28        |
| 4.2.2    | Results                                             | 29        |
| 4.3      | Peak Excursion                                      | 40        |
| 4.3.1    | Test Method                                         | 40        |
| 4.3.2    | Results                                             | 41        |
| 4.4      | Power Spectral Density                              | 52        |
| 4.4.1    | Test Method                                         | 52        |
| 4.4.2    | Results                                             | 53        |

Table of Contents

|            |                                       |            |
|------------|---------------------------------------|------------|
| <b>4.5</b> | <b>Transmitter Spurious Emissions</b> | <b>69</b>  |
| 4.5.1      | Test Methodology                      | 69         |
| 4.5.2      | Transmitter Spurious Emission Limit   | 70         |
| 4.5.3      | Test Results                          | 70         |
| 4.5.4      | Sample Calculation                    | 102        |
| <b>4.6</b> | <b>AC Conducted Emissions</b>         | <b>103</b> |
| 4.6.1      | Test Methodology                      | 103        |
| 4.6.2      | Test Results                          | 103        |
| <b>4.7</b> | <b>Frequency Stability</b>            | <b>108</b> |
| 4.7.1      | Test Methodology                      | 108        |
| 4.7.2      | Manufacturer Declaration              | 108        |
| 4.7.3      | Limit                                 | 109        |
| 4.7.4      | Test results                          | 109        |
| <b>4.8</b> | <b>Voltage Variation</b>              | <b>111</b> |
| 4.8.1      | Test Methodology                      | 111        |
| 4.8.2      | Test results                          | 111        |
| <b>4.9</b> | <b>Maximum Permissible Exposure</b>   | <b>113</b> |
| 4.9.1      | Test Methodology                      | 113        |
| 4.9.2      | RF Exposure Limit                     | 113        |
| 4.9.3      | EUT Operating Condition               | 114        |
| 4.9.4      | Classification                        | 114        |
| 4.9.5      | Test Results                          | 114        |
| 4.9.6      | Sample Calculation                    | 114        |
| <b>6</b>   | <b>Test Equipment Use List</b>        | <b>115</b> |
| <b>6.1</b> | <b>Equipment List</b>                 | <b>115</b> |
| <b>7</b>   | <b>EMC Test Plan</b>                  | <b>116</b> |
| <b>7.1</b> | <b>Introduction</b>                   | <b>116</b> |
| <b>7.2</b> | <b>Customer</b>                       | <b>116</b> |
| <b>7.3</b> | <b>Equipment Under Test (EUT)</b>     | <b>117</b> |
| <b>7.4</b> | <b>Test Specifications</b>            | <b>122</b> |

Index of Tables

**Table 1:** Summary of Test Results ..... 8

**Table 2:** RF Output Power at the Antenna Port – Test Results ..... 16

**Table 3:** Average Output Power at the Antenna Port – Reference Only ..... 17

**Table 4:** Occupied Bandwidth – Test Results ..... 29

**Table 5:** Peak Excursion – Test Results ..... 41

**Table 6:** Power Spectral Density – Test Results ..... 53

**Table 7:** Transmit Spurious Emission at Band-Edge Requirements ..... 71

**Table 8:** AC Conducted Emissions – Test Results ..... 103

**Table 9:** Frequency Stability – Test Results ..... 109

**Table 10:** Voltage Variation – Test Results ..... 111

**Table 11:** Customer Information ..... 116

**Table 12:** Technical Contact Information ..... 116

**Table 13:** EUT Specifications ..... 117

**Table 14:** EUT Channel Power Specifications ..... 119

**Table 15:** Interface Specifications ..... 119

**Table 16:** Supported Equipment ..... 120

**Table 17:** Description of Sample used for Testing ..... 120

**Table 18:** Description of Test Configuration used for Radiated Measurement. .... 120

**Table 19:** Final Test Mode for 5250 - 5350 Bands ..... 120

**Table 20:** Test Specifications ..... 122

# 1 Executive Summary

## 1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.407 2012 and RSS 210: 2010 based on the results of testing performed on April 29, 2013 to May 30, 2013 on the Wireless Video Access Point Model 405 manufactured by Pace Americas. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

## 1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

This report will document the result for operating frequency band 5250 MHz to 5350 MHz.

### 1.3 Summary of Test Results

**Table 1:** Summary of Test Results

| Test                                  | Test Method<br>ANSI C63.10                                                   | Test Parameters<br>(from Standard) | Result   |
|---------------------------------------|------------------------------------------------------------------------------|------------------------------------|----------|
| Spurious Emission in Transmitted Mode | CFR47 15.209, CFR47 15.407 (b)<br>RSS-GEN Sect.7.2.3, RSS 210 Sect.<br>A.9.2 | Class B                            | Complied |
| Restricted Bands of Operation         | CFR47 15.205, RSS 210 Sect.2.6                                               | Class B                            | Complied |
| AC Power Conducted Emission           | CFR47 15.207, RSS-GEN Sect.7.2.2                                             | Class B                            | Complied |
| Occupied Bandwidth                    | CFR47 15.407 (a), RSS GEN Sect.4.4.1                                         | Na                                 | N/A      |
| Maximum Output Power                  | CFR47 15.407 (a), RSS 210 Sect. A.9.2                                        | Band 2: 23.97 dBm                  | Complied |
| Peak Power Spectral Density           | CFR47 15.407 (a),<br>RSS 210 Sect. A.9.2                                     | Band 2: 11 dBm/MHz                 | Complied |
| Peak Excursion Ratio                  | CFR47 15.407 (a)(6)                                                          | < 13 dB                            | Complied |
| Conducted Emission – Antenna Port     | CFR47 15.407 (b), RSS 210 Sect.6.2.2                                         | 30 MHz -40 GHz < 27<br>dBm/MHz     | Complied |
| Frequency Stability                   | CFR47 15.407 (g), RSS GEN Sect. 4.7.                                         | ±20 ppm                            | Complied |
| RF Exposure                           | CFR47 15.247 (i), 2.1091                                                     | General Population                 | Complied |

Note: This report will cover only band 5250 MHz to 5350 MHz.

### 1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

### 1.5 Equipment Modifications

None



## 2 Laboratory Information

### 2.1 Accreditations & Endorsements

#### 2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US5254). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

#### 2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2005 and ISO 9002 (Lab Code Testing Cert #3331.02). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

#### 2.1.3 Canada – Industry Canada



TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M-1). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

#### 2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0031

VCCI Registration No. for Santa Clara: A-0032

### 2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

## 2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA. The 2305 Mission College, Santa Clara, 95054, USA location is considered a Pleasanton annex.

### 2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Lab Code Testing Cert #3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

### 2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of  $10^9$  Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

## 2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1<sup>st</sup> Edition, 1995.

The *Combined Standard Uncertainty* is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

### 2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

#### Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

### 2.3.2 Measurement Uncertainty

| Per CISPR 16-4-2                               | U <sub>lab</sub> | U <sub>cispr</sub> |
|------------------------------------------------|------------------|--------------------|
| <b>Radiated Disturbance @ 10 meters</b>        |                  |                    |
| 30 – 1,000 MHz                                 | 2.25 dB          | 4.51 dB            |
| <b>Radiated Disturbance @ 3 meters</b>         |                  |                    |
| 30 – 1,000 MHz                                 | 2.26 dB          | 4.52 dB            |
| 1 – 6 GHz                                      | 2.12 dB          | 4.25 dB            |
| 6 – 18 GHz                                     | 2.47 dB          | 4.93 dB            |
| <b>Conducted Disturbance @ Mains Terminals</b> |                  |                    |
| 150 kHz – 30 MHz                               | 1.09 dB          | 2.18 dB            |
| <b>Disturbance Power</b>                       |                  |                    |
| 30 MHz – 300 MHz                               | 3.92 dB          | 4.3 dB             |

### 2.3.1 Measurement Uncertainty Immunity

|                                                                                                           |                   |
|-----------------------------------------------------------------------------------------------------------|-------------------|
| The estimated combined standard uncertainty for ESD immunity measurements is $\pm 8.2\%$ .                | Per IEC 61000-4-2 |
| The estimated combined standard uncertainty for radiated immunity measurements is $\pm 4.10$ dB.          | Per IEC 61000-4-3 |
| The estimated combined standard uncertainty for conducted immunity measurements with CDN is $\pm 3.66$ dB | Per IEC 61000-4-6 |
| The estimated combined standard uncertainty for power frequency magnetic field immunity is $\pm 2.9\%$ .  | Per IEC 61000-4-8 |

#### Thermo KeyTek EMC Pro

|                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------|
| The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 2.6\%$ .         |
| The estimated combined standard uncertainty for surge immunity measurements is $\pm 2.6\%$ .                      |
| The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 1.74\%$ . |

#### Measurement Uncertainty – Radio Testing

|                                                                                                              |
|--------------------------------------------------------------------------------------------------------------|
| The estimated combined standard uncertainty for frequency error measurements is $\pm 3.88$ Hz                |
| The estimated combined standard uncertainty for carrier power measurements is $\pm 1.59$ dB.                 |
| The estimated combined standard uncertainty for adjacent channel power measurements is $\pm 1.47$ dB.        |
| The estimated combined standard uncertainty for modulation frequency response measurements is $\pm 0.46$ dB. |
| The estimated combined standard uncertainty for transmitter conducted emission measurements is $\pm 4.01$ dB |

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

## 2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

---

## 3 Product Information

### 3.1 Product Description

The Pace 405 wireless video access point allows service providers to securely deliver high quality HD video to any location in a subscriber home. Using state of the art wireless technology including digital beam forming, customers retain traditional “wired” levels of service and quality while service providers enjoy the benefits of shortened installation times and more flexibility in how they deploy their IPTV or OTT services

Key Feature:

- 5GHz 802.11n wireless access point
- 4x4 MIMO (up to 600Mbps phy rate)
- High-Power Transmit For Maximum Coverage
- Gigabit Ethernet port
- Robust quality of service (QoS) and traffic management features
- Simple, push-button wireless setup for wireless set-tops
- TR-069 Management Client
- LEDs: Power, Wireless Signal Quality, Operational Mode (AP/STA), Ethernet Link, Wireless Pairing Indicator

### 3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

### 3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

### **3.4 Unique Antenna Connector**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

#### **3.4.1 Results**

The Wireless Video Access Point has 4 internal fixed antennas, 3 onboard PCB dipole antennas and 1 stamped metal loop antenna. Each antenna has the maximum gain of 2dBi. The total directional gain is 8dBi. All antennas are integrated on the PCB. There is no external antenna connection available.

## 4 Emissions

Testing was performed in accordance with CFR 47 Part 15.407: 2012 and RSS 210 Annex 9: 2010. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

### 4.1 Output Power Requirements

*The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.*

*The maximum output power and harmonics shall not exceed CFR47 Part 15.407 (a):2012 and RSS 210 A9.2: 2010.*

*The maximum transmitted powers are*

*Band 5150-5250 MHz: 50 mW or 4 dBm + 10Log B.*


*Band 5250-5350 MHz, 5470-5725 MHz: 250 mW or 11 dBm + 10Log B.*

*Band 5725-5825 MHz: 1 W or 17 dBm + 10Log B. Where B is 26 dB Bandwidth.*

#### 4.1.1 Test Method

The ANSI C63.10-2009 Section 6.10.3.1 conducted method was used to measure the channel power output. The preliminary investigation was performed at different data rate/ chain to determine the highest power output for each mode. The worst findings were conducted on 3 channels in each mode on the sample, S/N 09130M000104, per CFR47 Part 15.407(a): 2012 and RSS 210 A.9.2; 5250 MHz to 5350 MHz. The worst mode results indicated below.

Test Setup:

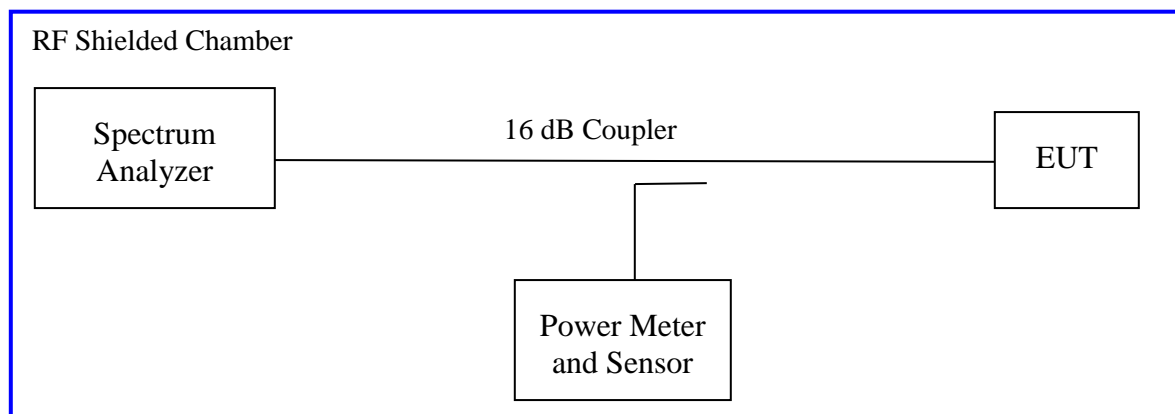

*Method SA-1 of "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices" applies since the EUT continuously transmit; where duty cycle is greater than 98%. Sample detector was used.*

Each chain was measured individually and applied the measure-and-sum approach per KDB66291.

#### 4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 2: RF Output Power at the Antenna Port – Test Results**

| <b>Test Conditions:</b> Conducted Measurement, Normal Temperature                                                                                                                                                                                                                                                                                                                                                             |             |           |           |                                         |           |                   |             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------|-----------|-----------------------------------------|-----------|-------------------|-------------|
| <b>Antenna Type:</b> Integrated                                                                                                                                                                                                                                                                                                                                                                                               |             |           |           | <b>Power Setting:</b> See test plan     |           |                   |             |
| <b>Max. Directional Gain:</b> + 8 dBi                                                                                                                                                                                                                                                                                                                                                                                         |             |           |           | <b>Signal State:</b> Modulated at 100%. |           |                   |             |
| <b>Ambient Temp.:</b> 22 °C                                                                                                                                                                                                                                                                                                                                                                                                   |             |           |           | <b>Relative Humidity:</b> 28%           |           |                   |             |
| <b>802.11n (HT20) Mode, 4x4</b>                                                                                                                                                                                                                                                                                                                                                                                               |             |           |           |                                         |           |                   |             |
| Operating Channel                                                                                                                                                                                                                                                                                                                                                                                                             | Limit [dBm] | Ch0 [dBm] | Ch1 [dBm] | Ch2 [dBm]                               | Ch3 [dBm] | Total Power [dBm] | Margin [dB] |
| 5260                                                                                                                                                                                                                                                                                                                                                                                                                          | 21.97       | 14.15     | 14.63     | 13.58                                   | 14.54     | 20.27             | -1.64       |
| 5300                                                                                                                                                                                                                                                                                                                                                                                                                          | 21.97       | 13.86     | 14.11     | 13.55                                   | 14.05     | 19.92             | -1.99       |
| 5320                                                                                                                                                                                                                                                                                                                                                                                                                          | 21.97       | 13.14     | 13.56     | 12.90                                   | 13.26     | 19.24             | -2.67       |
| <p><b>Note:</b> 1.The highest output power was observed at HT20 6.5 Mbps, 4 Data Streams.<br/>                 2. All chains will be on at all time and beam performing. RF output powers were summed per KDB 662911.<br/>                 3. The total directional gain would be 8dBi; 2dBi +10*Log(4). Per CFR47 Part 15.407 (a), the limit is reduced for every dBi gain exceeding 6dBi. The limit would be 21.97 dBm.</p> |             |           |           |                                         |           |                   |             |
| <b>802.11n (HT40) Mode, 4x4</b>                                                                                                                                                                                                                                                                                                                                                                                               |             |           |           |                                         |           |                   |             |
| Operating Channel                                                                                                                                                                                                                                                                                                                                                                                                             | Limit [dBm] | Ch0 [dBm] | Ch1 [dBm] | Ch2 [dBm]                               | Ch3 [dBm] | Total Power [dBm] | Margin [dB] |
| 5270                                                                                                                                                                                                                                                                                                                                                                                                                          | 21.97       | 14.64     | 15.05     | 14.57                                   | 14.81     | 20.79             | -1.12       |
| 5310                                                                                                                                                                                                                                                                                                                                                                                                                          | 21.97       | 11.67     | 12.69     | 12.04                                   | 12.43     | 18.25             | -5.72       |
| <p><b>Note:</b> 1.The highest output power was observed at HT40 13.5 Mbps, 4 Data Streams.<br/>                 2. All chains will be on at all time and beam performing. RF output powers were summed per KDB 662911.<br/>                 3. The total directional gain would be 8dBi; 2dBi +10*Log(4). Per CFR47 Part 15.407 (a), the limit is reduced for every dBi gain exceeding 6dBi. The limit would be 21.97 dBm</p> |             |           |           |                                         |           |                   |             |



**Table 3: Average Output Power at the Antenna Port – Reference Only**

| <b>Test Conditions:</b> Conducted Measurement, Normal Temperature                     |             |           |           |                                         |           |                   |             |
|---------------------------------------------------------------------------------------|-------------|-----------|-----------|-----------------------------------------|-----------|-------------------|-------------|
| <b>Antenna Type:</b> Integrated                                                       |             |           |           | <b>Power Setting:</b> See test plan     |           |                   |             |
| <b>Max. Directional Gain:</b> + 8 dBi                                                 |             |           |           | <b>Signal State:</b> Modulated at 100%. |           |                   |             |
| <b>Ambient Temp.:</b> 22 °C                                                           |             |           |           | <b>Relative Humidity:</b> 28%           |           |                   |             |
| <b>802.11n (HT20) Mode, 4x4</b>                                                       |             |           |           |                                         |           |                   |             |
| Operating Channel                                                                     | Limit [dBm] | Ch0 [dBm] | Ch1 [dBm] | Ch2 [dBm]                               | Ch3 [dBm] | Total Power [dBm] | Margin [dB] |
| 5260                                                                                  |             | 14.34     | 14.71     | 13.70                                   | 14.60     | 20.37             |             |
| 5300                                                                                  |             | 13.90     | 14.13     | 13.60                                   | 14.09     | 19.96             |             |
| 5320                                                                                  |             | 13.14     | 13.52     | 13.41                                   | 14.00     | 19.55             |             |
| <b>Note:</b> The highest output power was observed at HT20 6.5 Mbps, 4 Data Streams.  |             |           |           |                                         |           |                   |             |
| <b>802.11n (HT40) Mode, 4x4</b>                                                       |             |           |           |                                         |           |                   |             |
| Operating Channel                                                                     | Limit [dBm] | Ch0 [dBm] | Ch1 [dBm] | Ch2 [dBm]                               | Ch3 [dBm] | Total Power [dBm] | Margin [dB] |
| 5270                                                                                  |             | 15.27     | 15.82     | 15.32                                   | 15.55     | 21.52             |             |
| 5310                                                                                  |             | 11.99     | 13.01     | 12.34                                   | 12.73     | 18.56             |             |
| <b>Note:</b> The highest output power was observed at HT40 13.5 Mbps, 4 Data Streams. |             |           |           |                                         |           |                   |             |

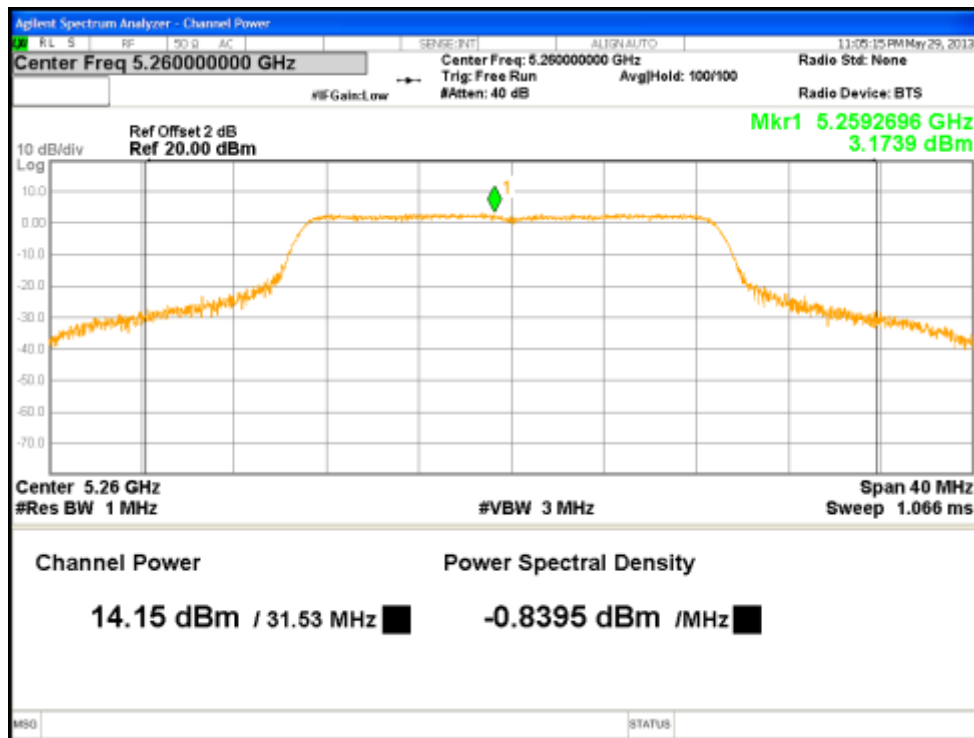


Figure 1: Maximum Transmitted Power, 5260 MHz at HT20, Chain 0

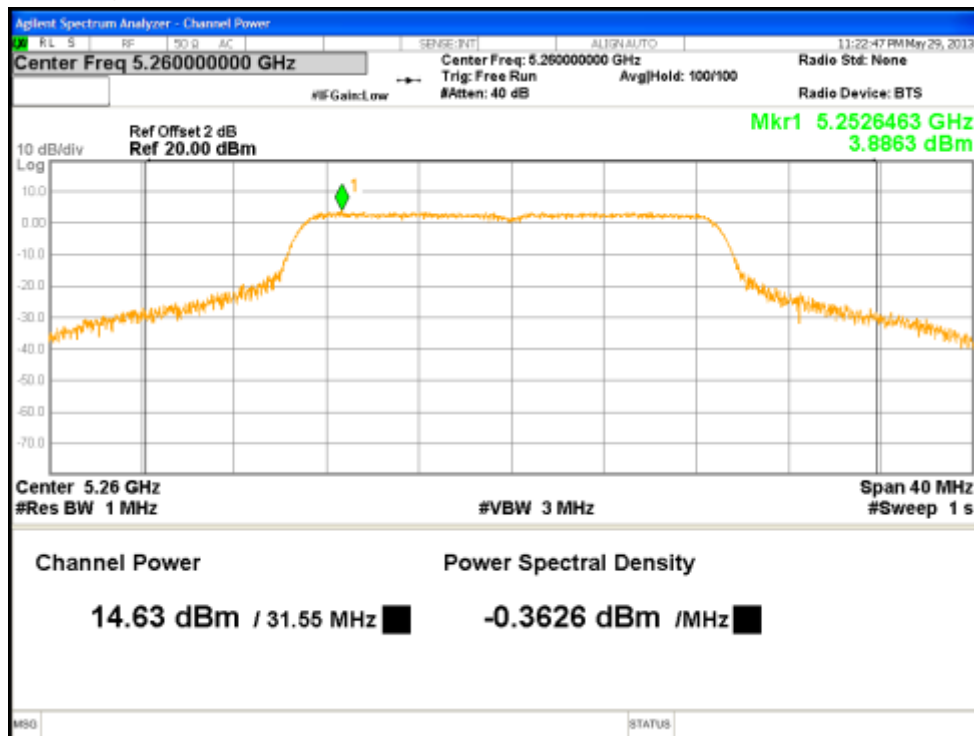


Figure 2: Maximum Transmitted Power, 5260 MHz at HT20, Chain 1

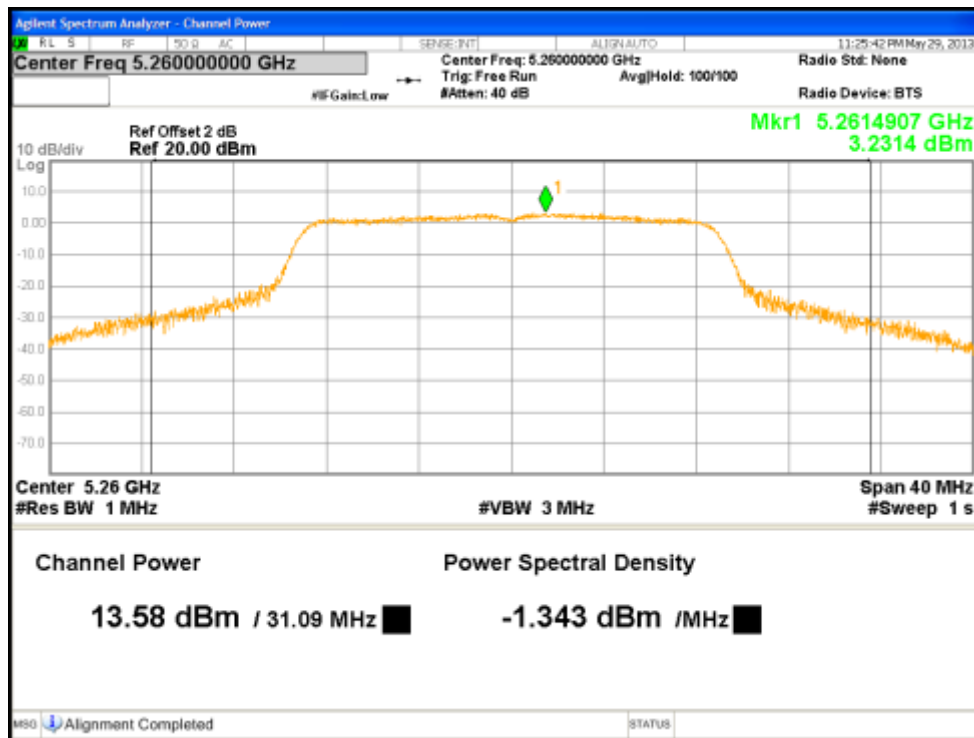


Figure 3: Maximum Transmitted Power, 5260 MHz at HT20, Chain 2

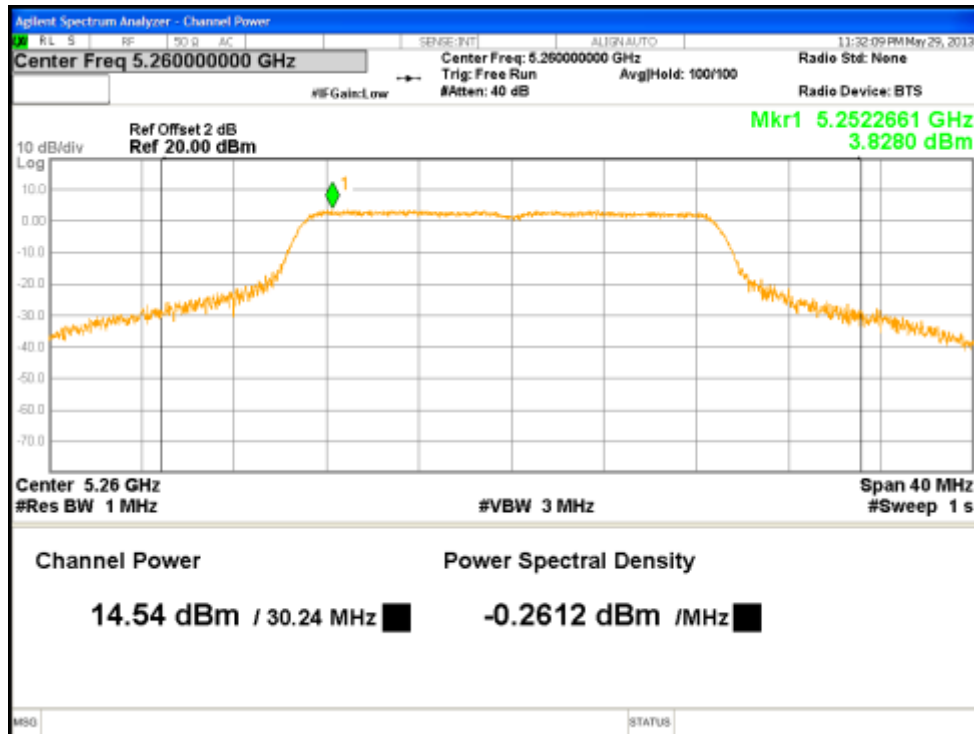


Figure 4: Maximum Transmitted Power, 5260 MHz at HT20, Chain 3

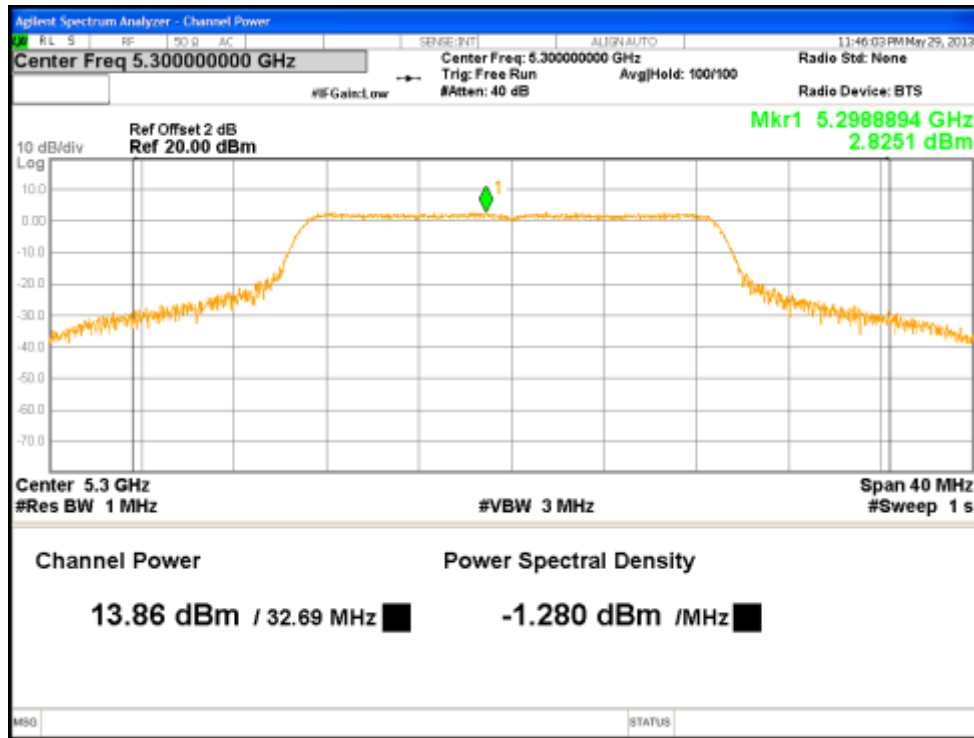


Figure 5: Maximum Transmitted Power, 5300MHz at HT20, Chain 0

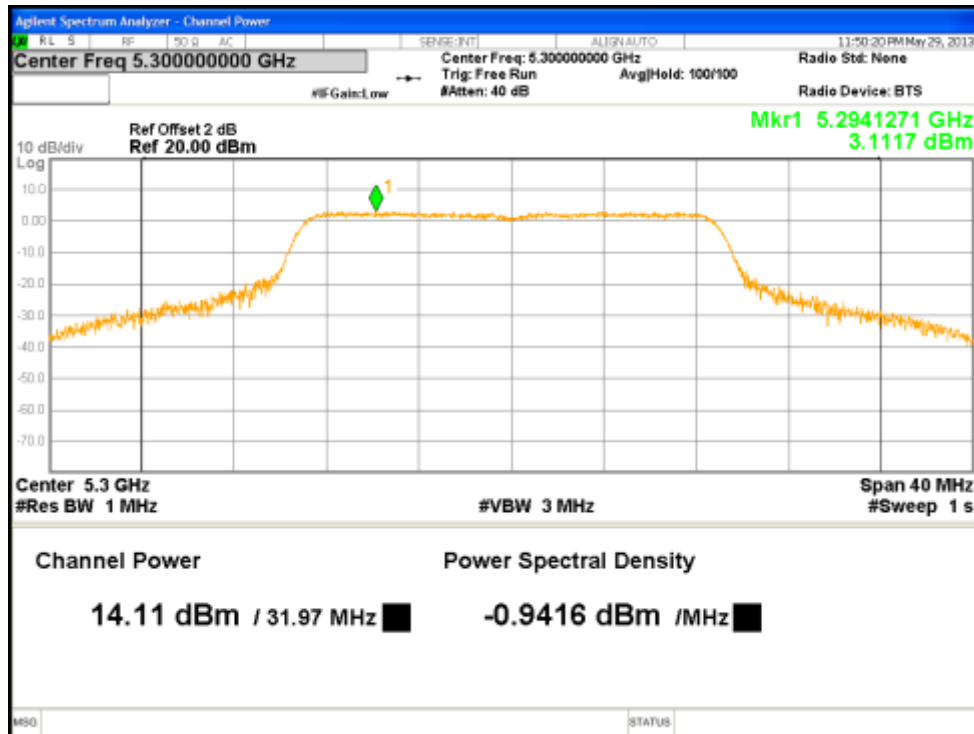


Figure 6: Maximum Transmitted Power, 5300MHz at HT20, Chain 1

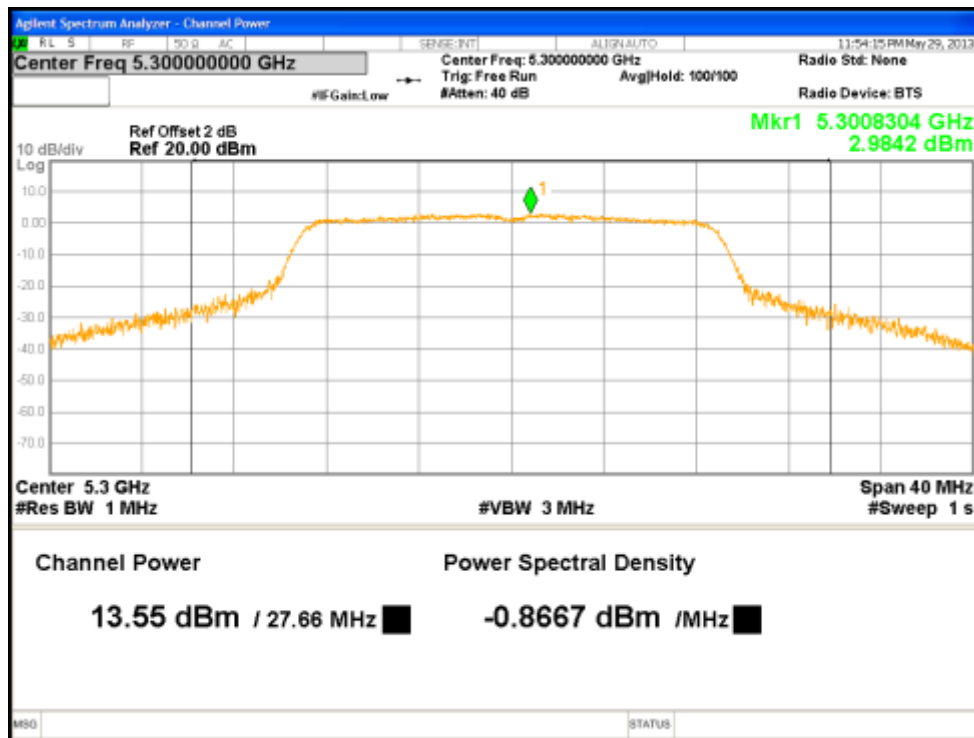


Figure 7: Maximum Transmitted Power, 5300MHz at HT20, Chain 2

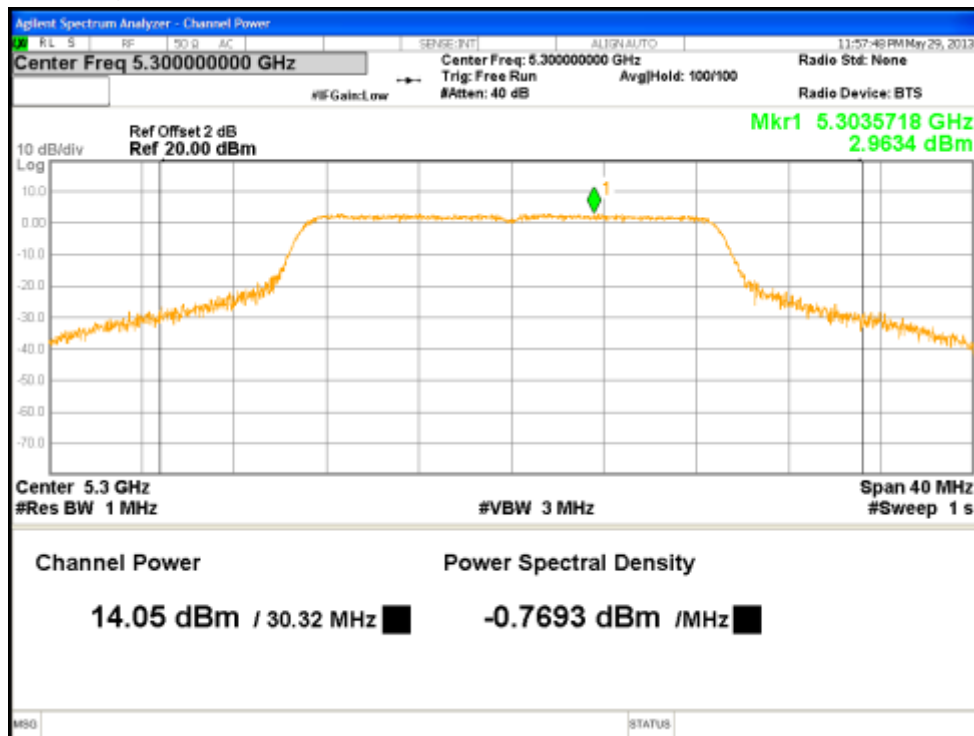


Figure 8: Maximum Transmitted Power, 5300MHz at HT20, Chain 3

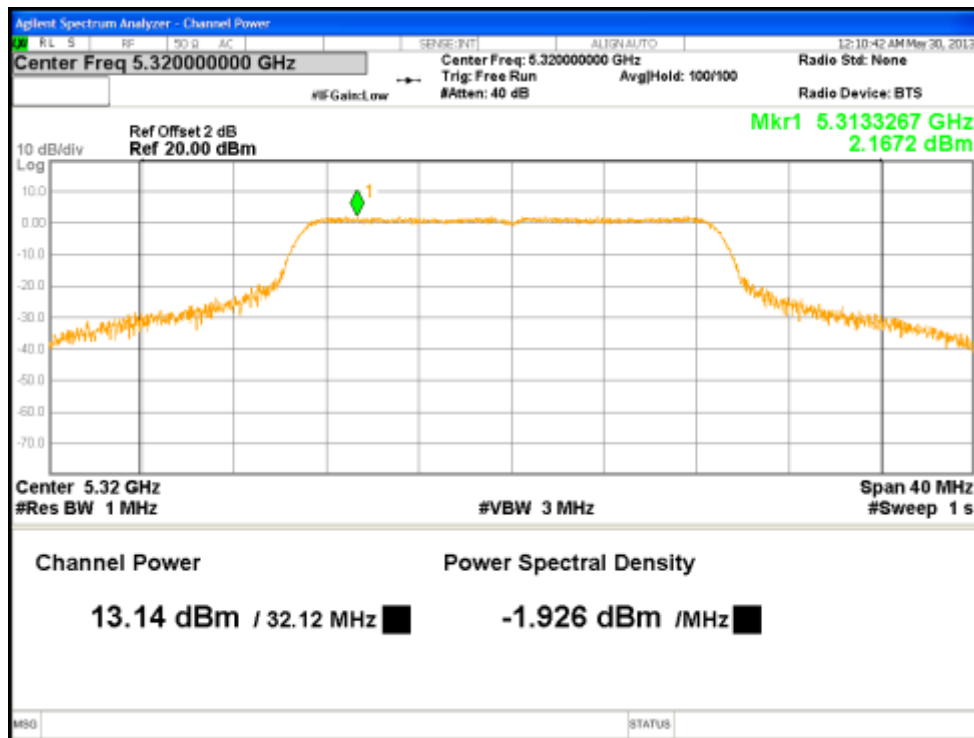


Figure 9: Maximum Transmitted Power, 5320MHz at HT20, Chain 0

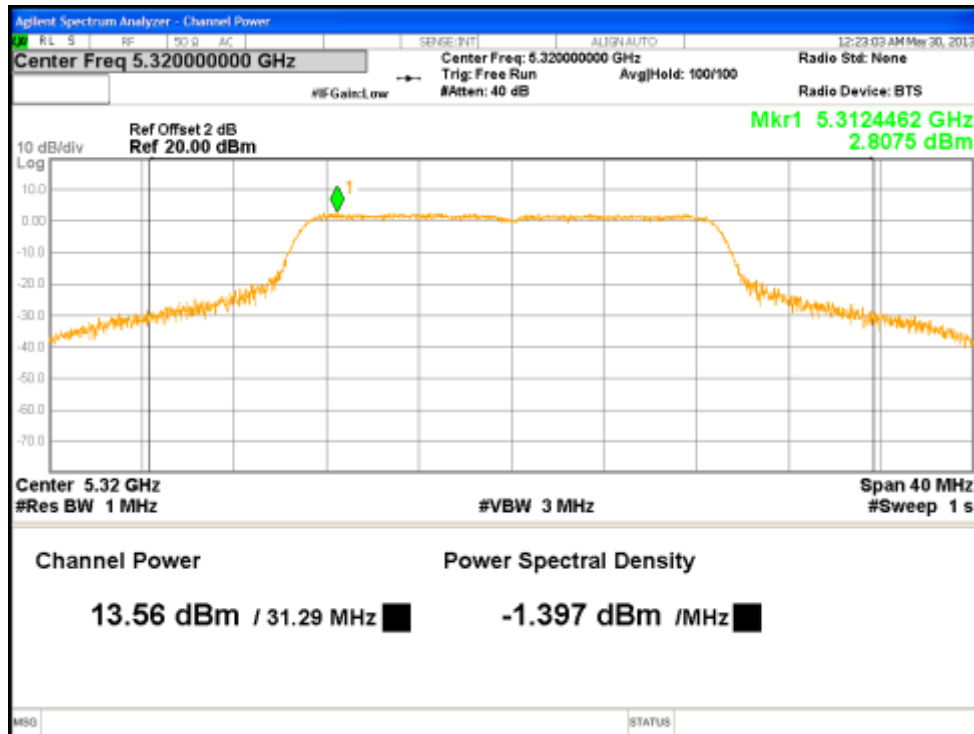


Figure 10: Maximum Transmitted Power, 5320MHz at HT20, Chain 1

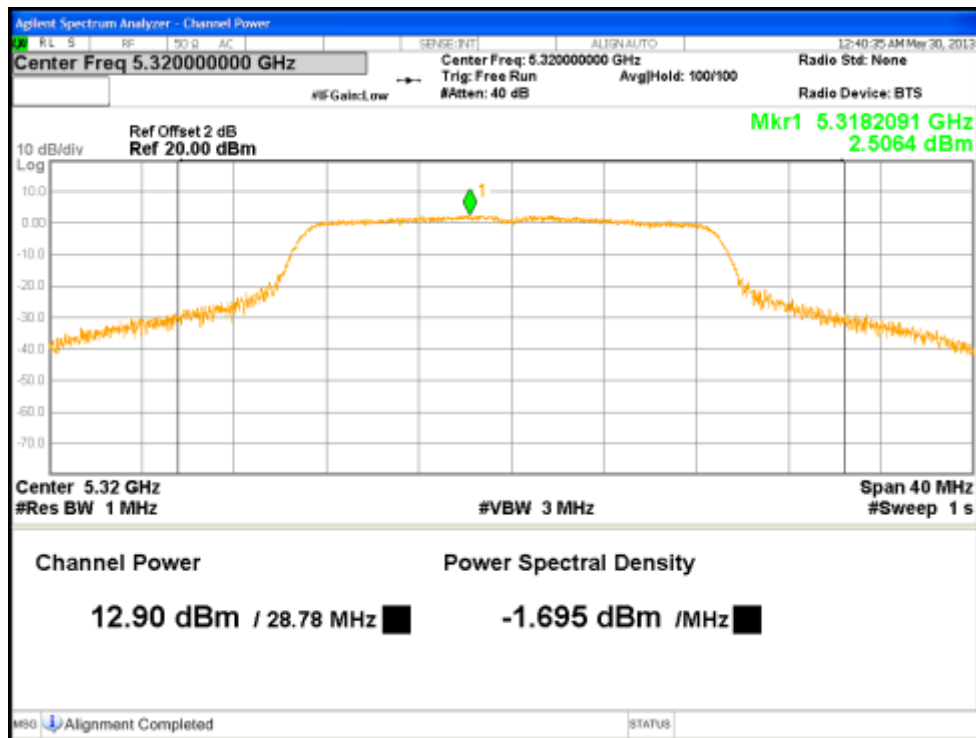
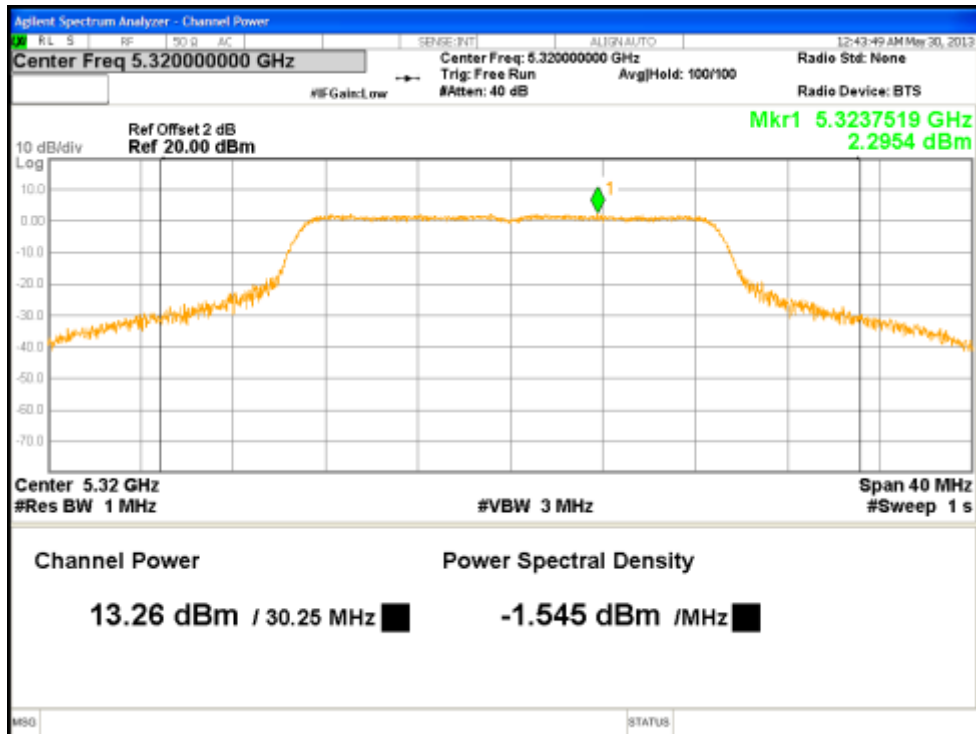


Figure 11: Maximum Transmitted Power, 5320MHz at HT20, Chain 2



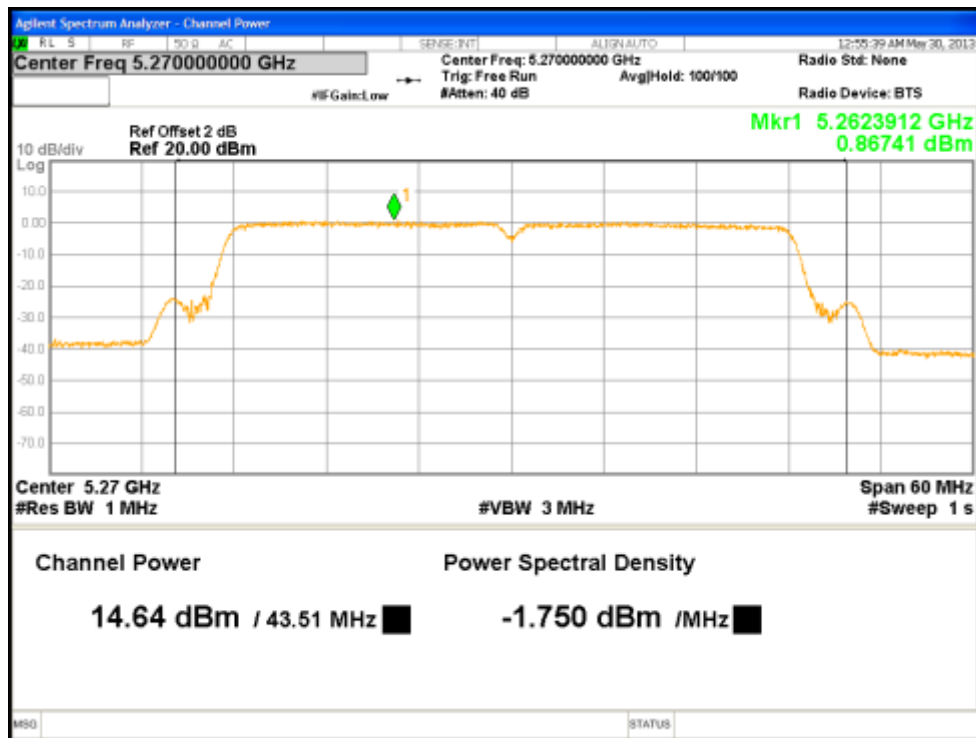


Figure 13: Maximum Transmitted Power, 5270MHz at HT40, Chain 0

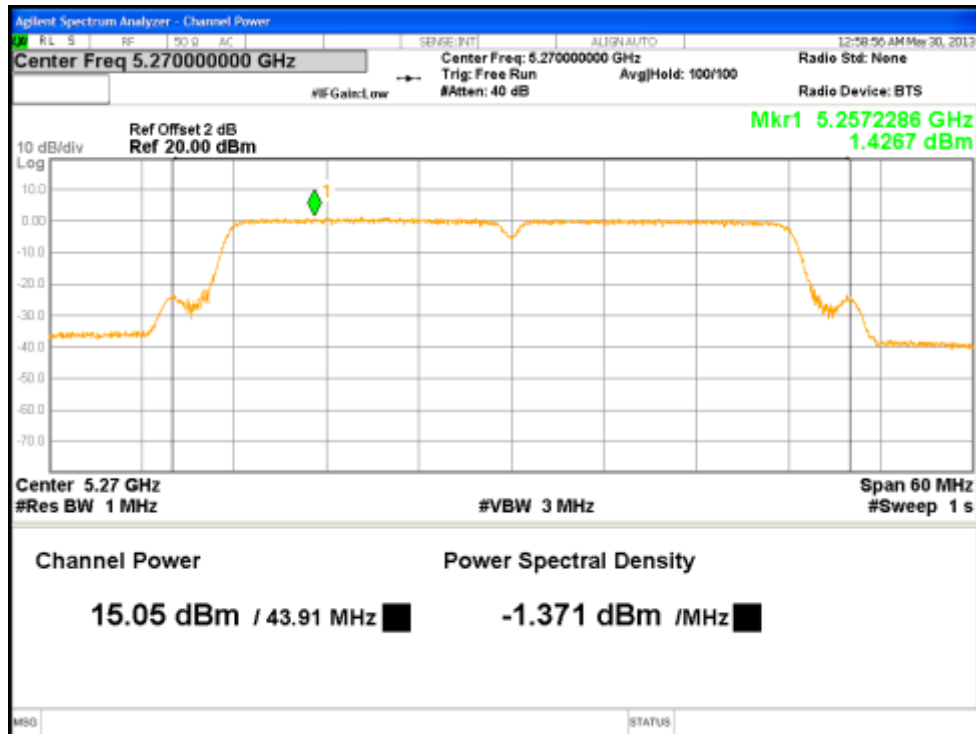


Figure 14: Maximum Transmitted Power, 5270MHz at HT40, Chain 1



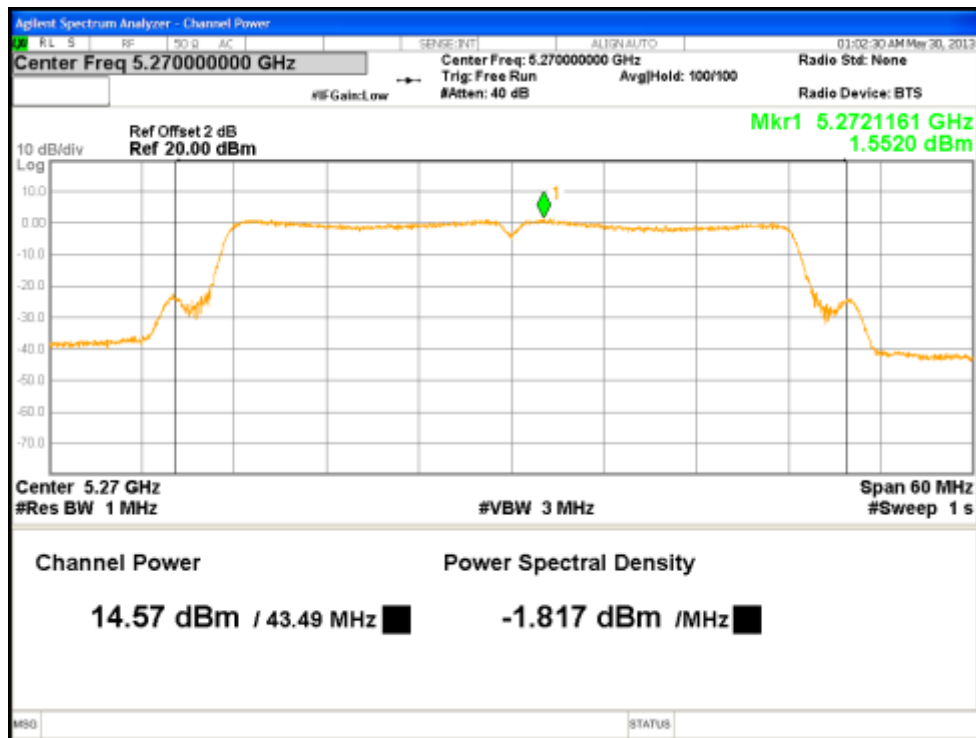


Figure 15: Maximum Transmitted Power, 5270MHz at HT40, Chain 2

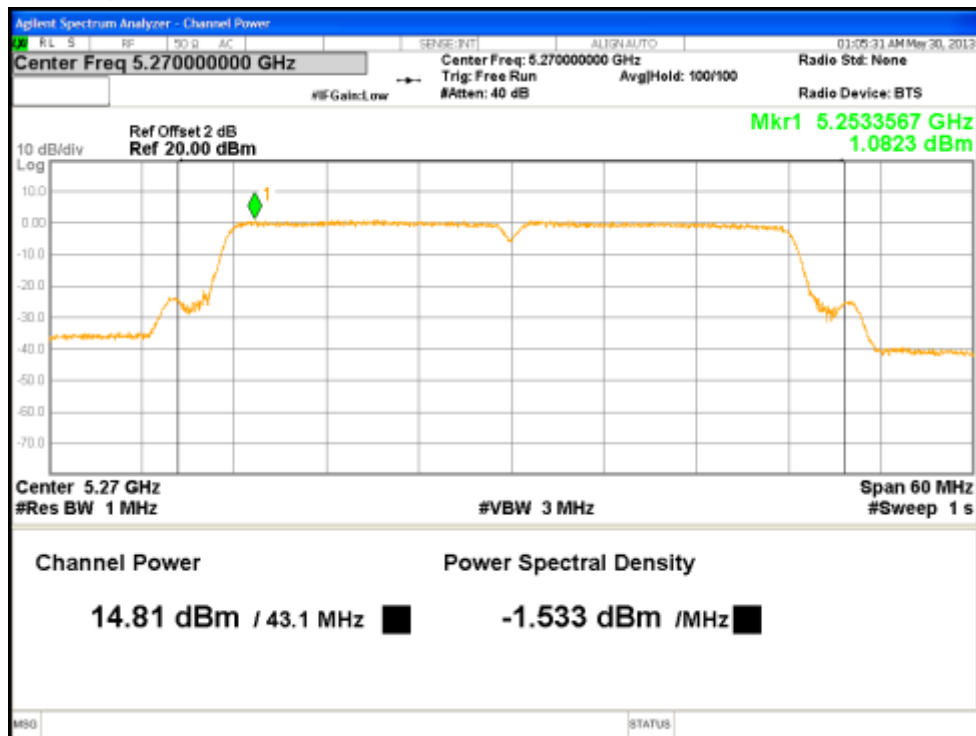


Figure 16: Maximum Transmitted Power, 5270MHz at HT40, Chain 3

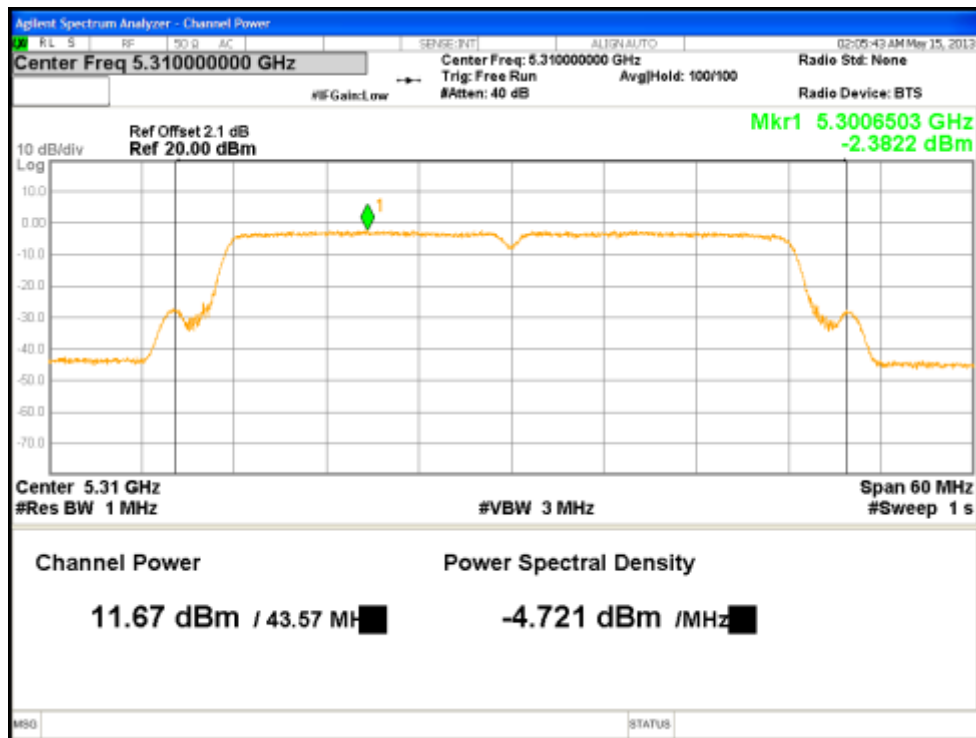


Figure 17: Maximum Transmitted Power, 5310MHz at HT40, Chain 0

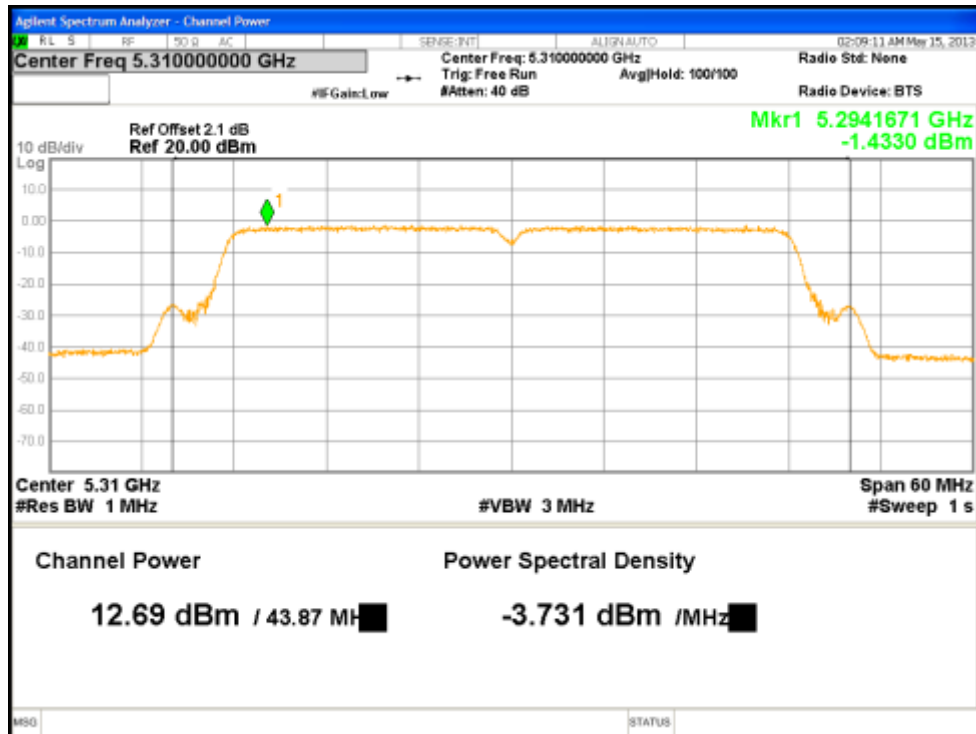


Figure 18: Maximum Transmitted Power, 5310MHz at HT40, Chain 1

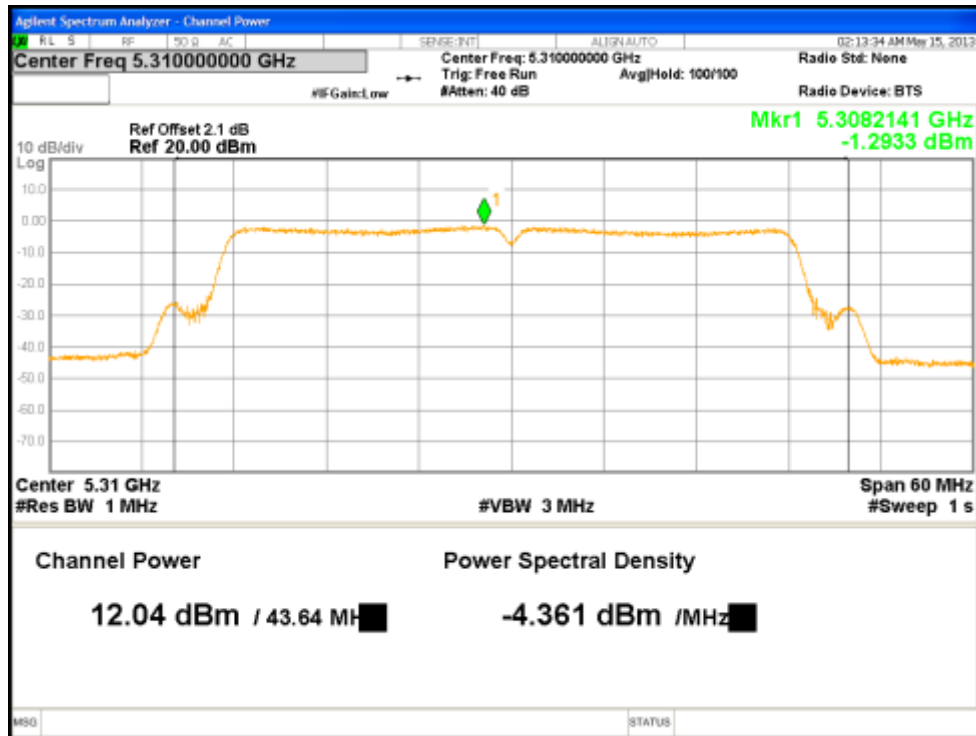


Figure 19: Maximum Transmitted Power, 5310MHz at HT40, Chain 2

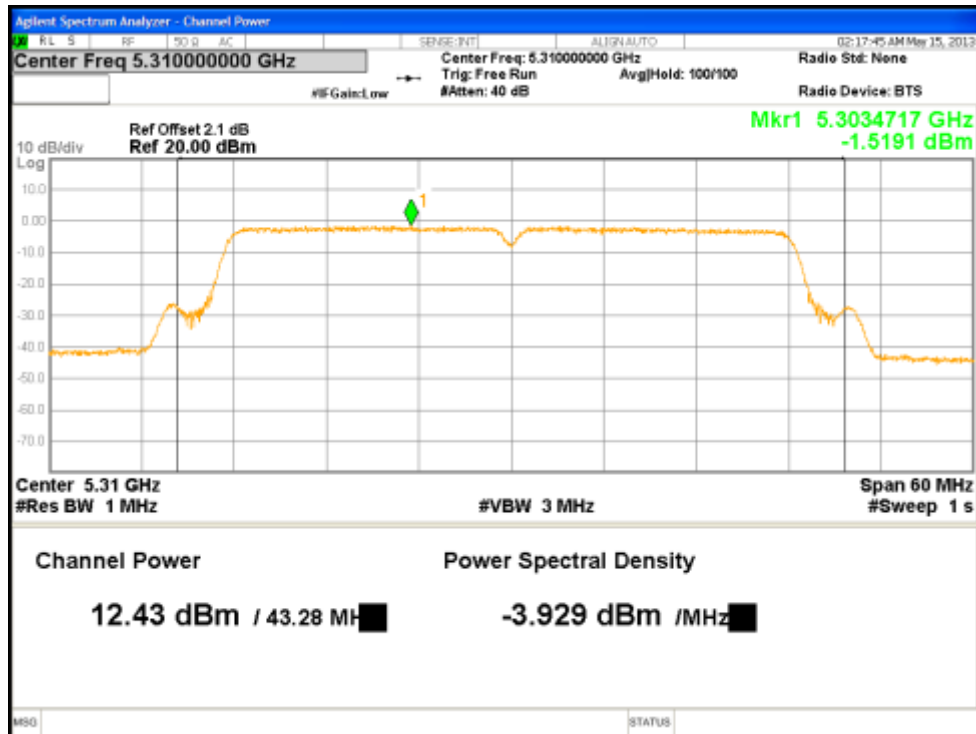


Figure 20: Maximum Transmitted Power, 5310MHz at HT40, Chain 3

## 4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.

The 26 dB bandwidth is defined the bandwidth of 26 dB from highest transmitted level of the fundamental frequency.


There is no restriction limits for the bandwidth. The 26 dB bandwidth was used to determine the limit for maximum conducted output power per CFR47 Part 15.407(a).

To obtain the tighter limit,

### 4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth. The measurement was performed with modulation per CFR47 15.407(a) 2012 and RSS Gen Sect. 4.4.1:2010. The preliminary investigation was performed to find the narrowest 26 dB bandwidth for each operational mode at different data rates. This worst finding was performed on 3 channels in each operating frequency range; 5250 MHz to 5350 MHz on the sample, S/N 09130M000104. The results indicated below.

Test Setup:

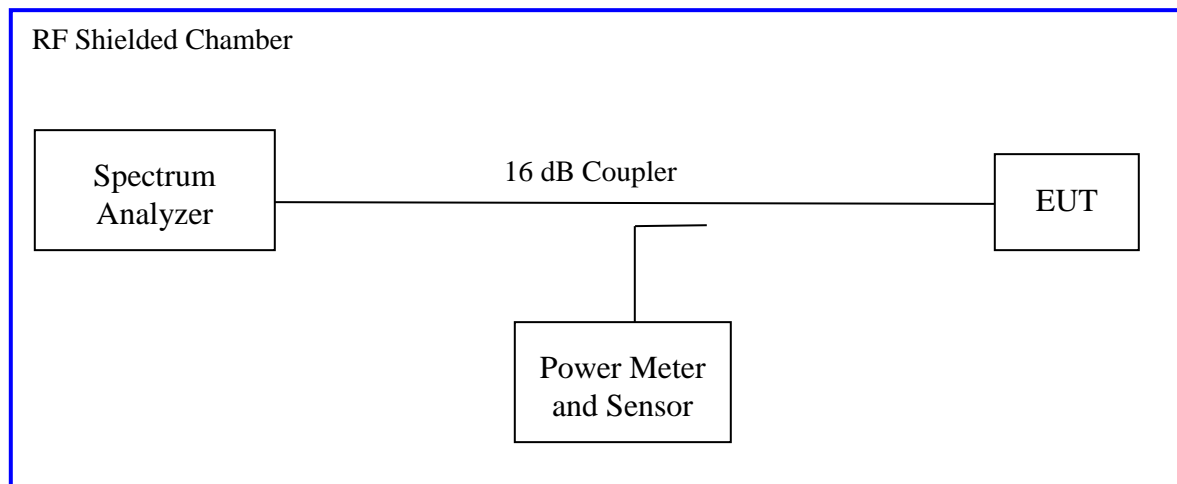

## 4.2.2 Results

These occupied bandwidth measurements were taken for references only.

**Table 4:** Occupied Bandwidth – Test Results

| <b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only |                      |        |        |        |                                         |        |        |        |
|------------------------------------------------------------------------------------|----------------------|--------|--------|--------|-----------------------------------------|--------|--------|--------|
| <b>Antenna Type:</b> Integrated                                                    |                      |        |        |        | <b>Power Setting:</b> See Test Plan     |        |        |        |
| <b>Max. Directional Gain:</b> + 8 dBi                                              |                      |        |        |        | <b>Signal State:</b> Modulated at 100%. |        |        |        |
| <b>Ambient Temp.:</b> 23 °C                                                        |                      |        |        |        | <b>Relative Humidity:</b> 27%           |        |        |        |
| Bandwidth (MHz) for 802.11n HT20                                                   |                      |        |        |        |                                         |        |        |        |
| Freq. (MHz)                                                                        | 26dB Bandwidth (MHz) |        |        |        | 99% Bandwidth (MHz)                     |        |        |        |
|                                                                                    | Ch0                  | Ch1    | Ch2    | Ch3    | Ch0                                     | Ch1    | Ch2    | Ch3    |
| 5260                                                                               | 27.037               | 28.612 | 24.412 | 26.082 | 18.207                                  | 18.398 | 17.941 | 18.129 |
| 5300                                                                               | 27.411               | 27.952 | 24.429 | 26.115 | 18.215                                  | 18.392 | 17.974 | 18.128 |
| 5320                                                                               | 27.397               | 28.125 | 24.872 | 25.980 | 18.216                                  | 18.387 | 18.012 | 18.133 |
| <b>Note:</b> The bandwidth was measured at 6.5Mbps for 802.11n HT20 mode.          |                      |        |        |        |                                         |        |        |        |
| Bandwidth (MHz) for 802.11n HT40                                                   |                      |        |        |        |                                         |        |        |        |
| Freq. (MHz)                                                                        | 26dB Bandwidth (MHz) |        |        |        | 99% Bandwidth (MHz)                     |        |        |        |
|                                                                                    | Ch0                  | Ch1    | Ch2    | Ch3    | Ch0                                     | Ch1    | Ch2    | Ch3    |
| 5270                                                                               | 43.912               | 44.630 | 44.117 | 43.589 | 36.395                                  | 36.673 | 36.647 | 36.243 |
| 5310                                                                               | 44.016               | 44.590 | 43.998 | 43.591 | 36.380                                  | 36.674 | 36.638 | 36.242 |
| <b>Note:</b> The bandwidth was measured at 13Mbps for 802.11n HT40 mode.           |                      |        |        |        |                                         |        |        |        |

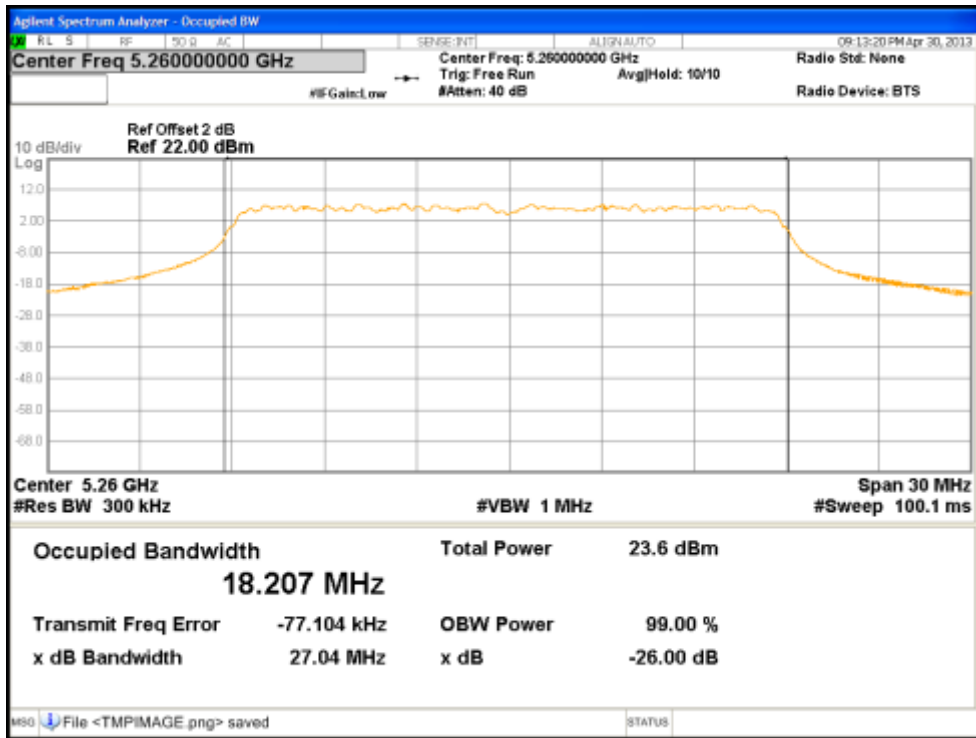


Figure 21: 99% Bandwidth at 5260 MHz, Chain 0

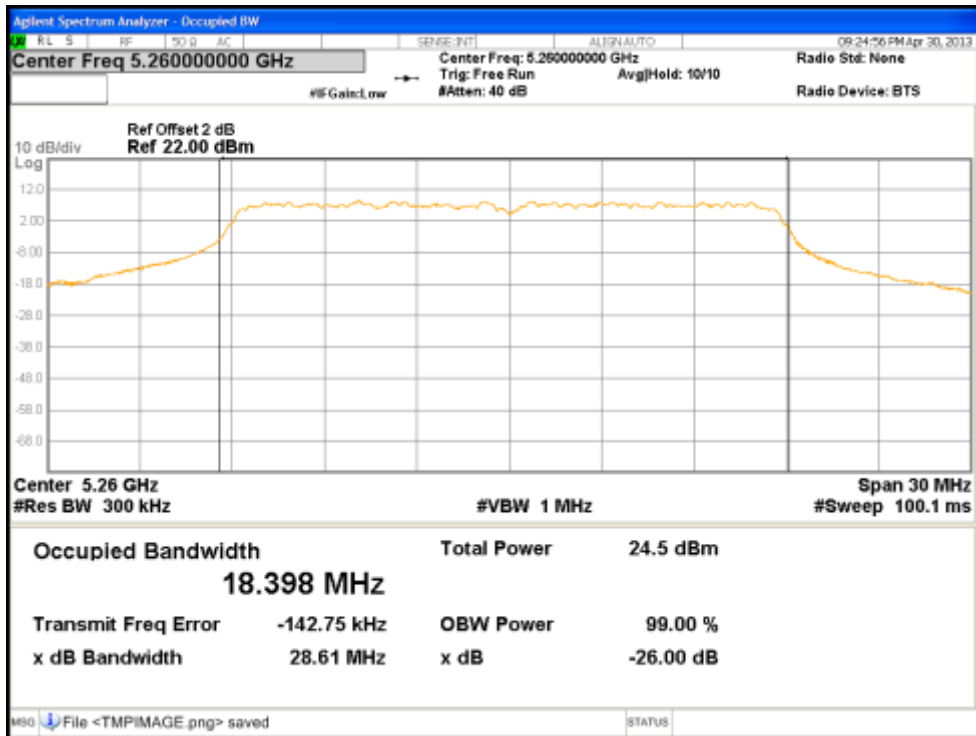


Figure 22: 99% Bandwidth at 5260 MHz, Chain 1

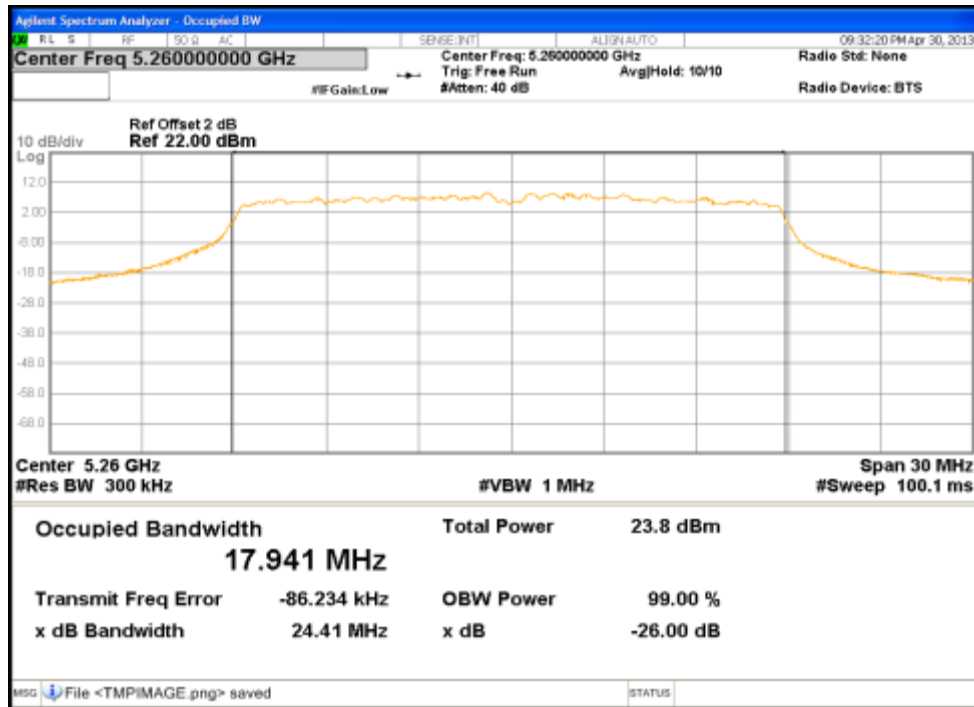


Figure 23: 99% Bandwidth at 5260 MHz, Chain 2

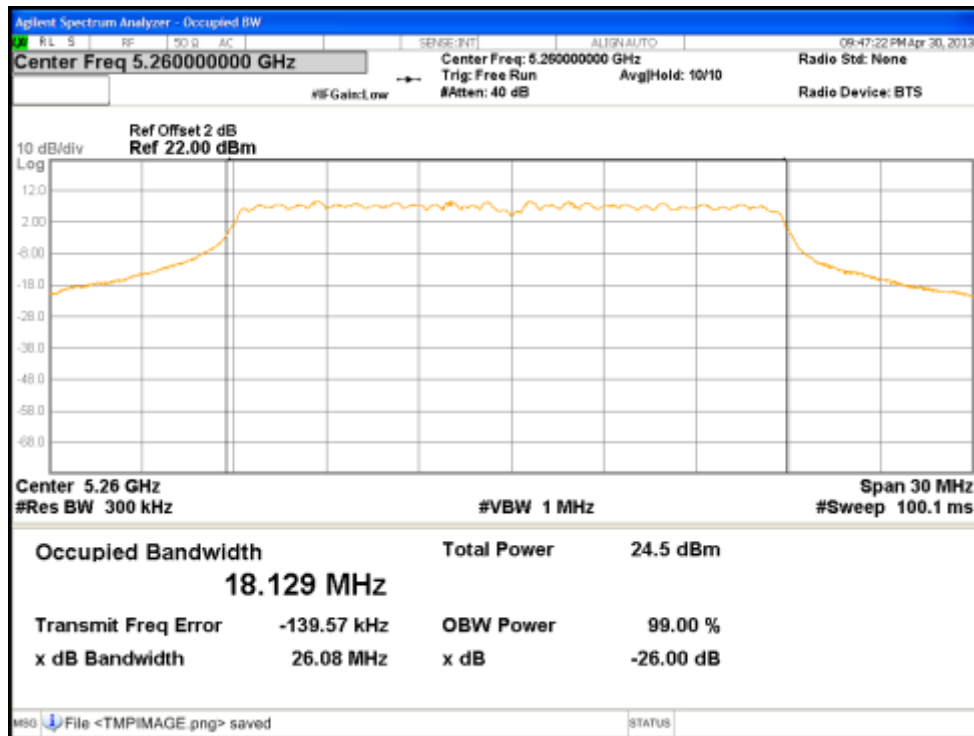


Figure 24: 99% Bandwidth at 5260 MHz, Chain 3

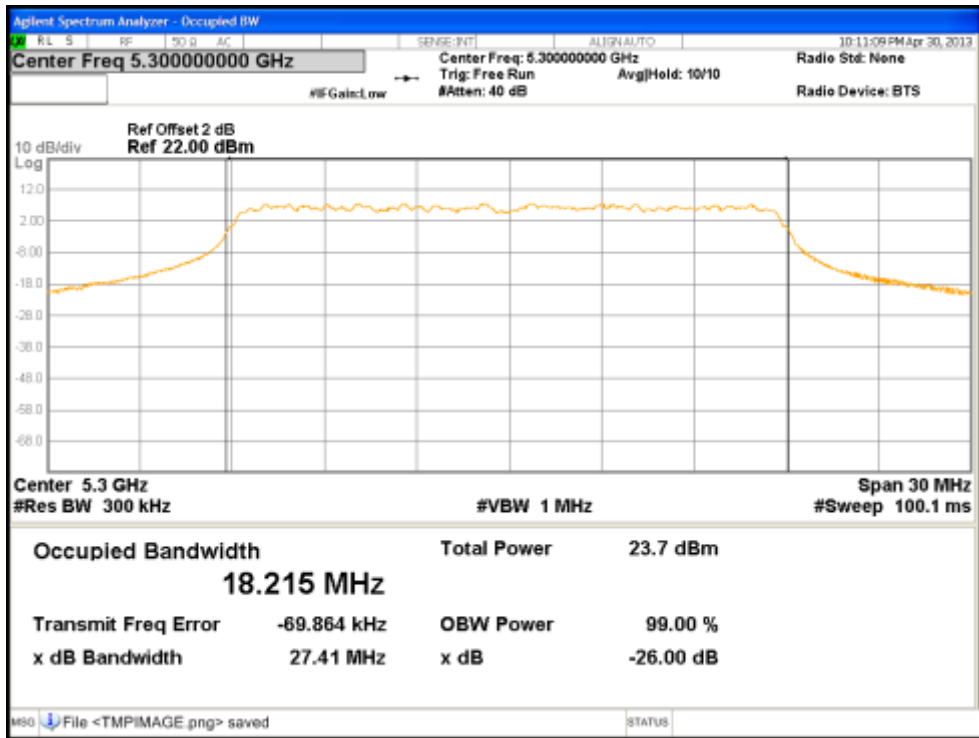


Figure 25: 99% Bandwidth at 5300 MHz, Chain 0

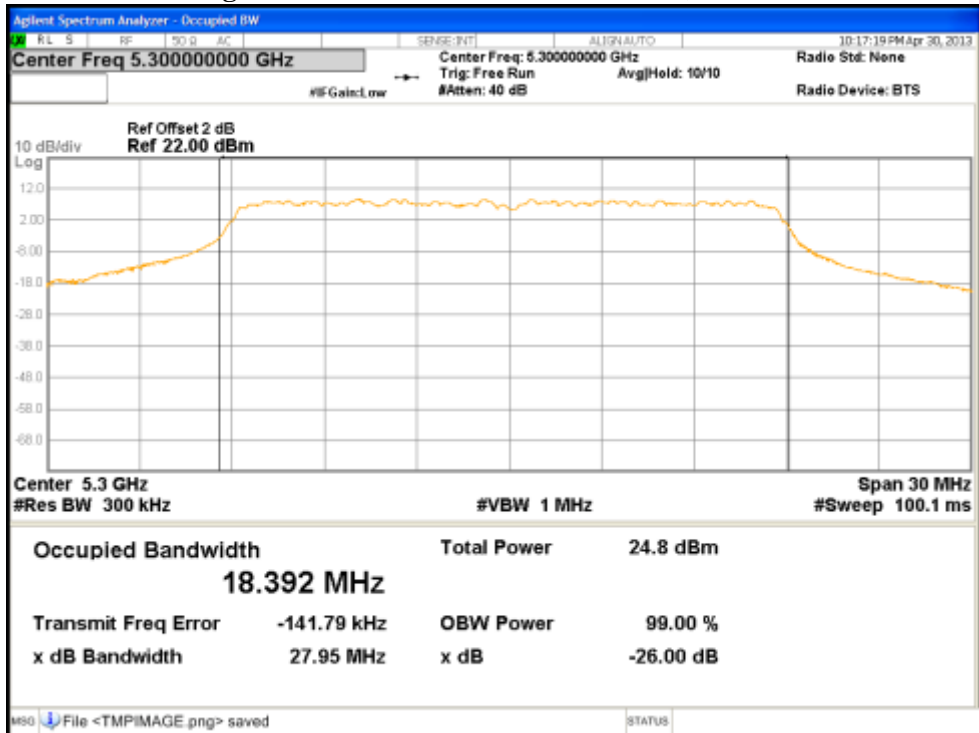


Figure 26: 99% Bandwidth at 5300 MHz, Chain 1



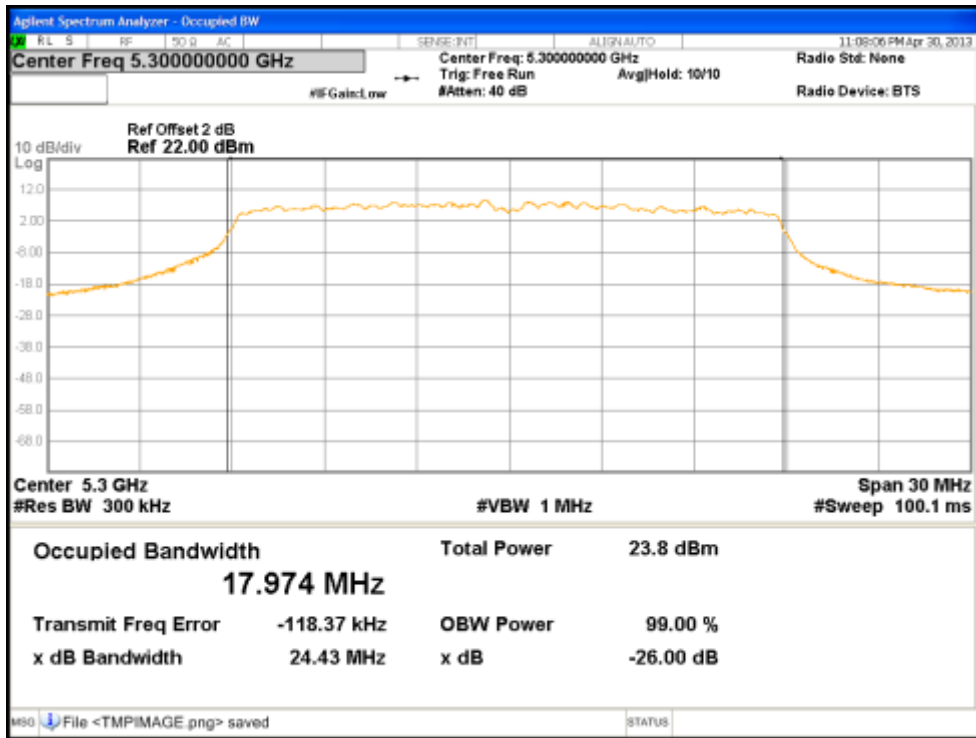


Figure 27: 99% Bandwidth at 5300 MHz, Chain 2

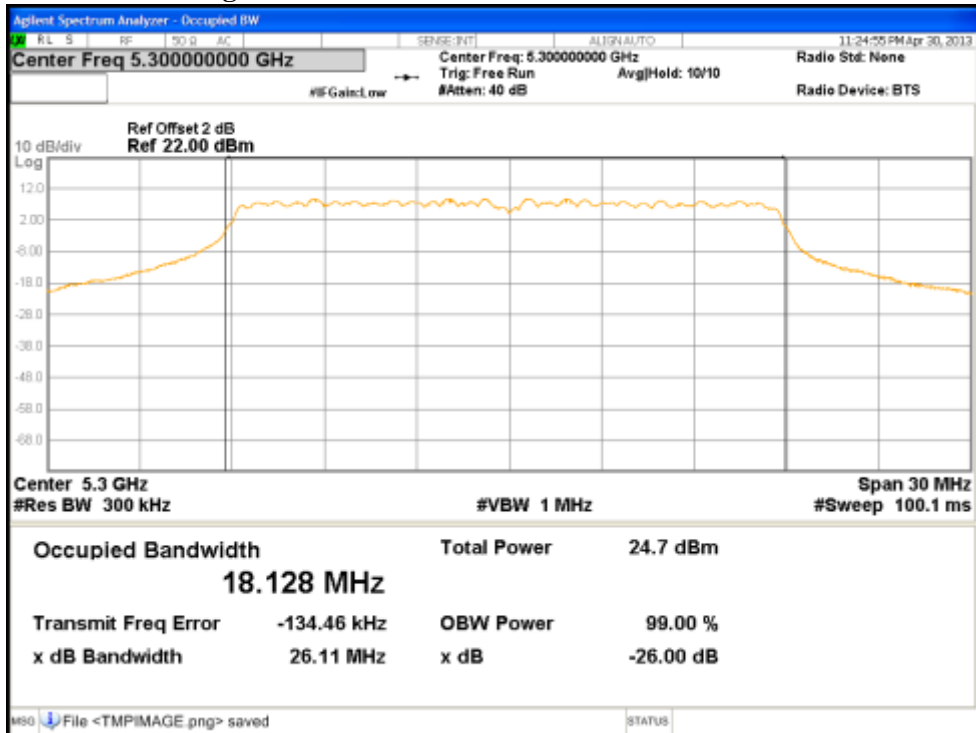


Figure 28: 99% Bandwidth at 5300 MHz, Chain 3

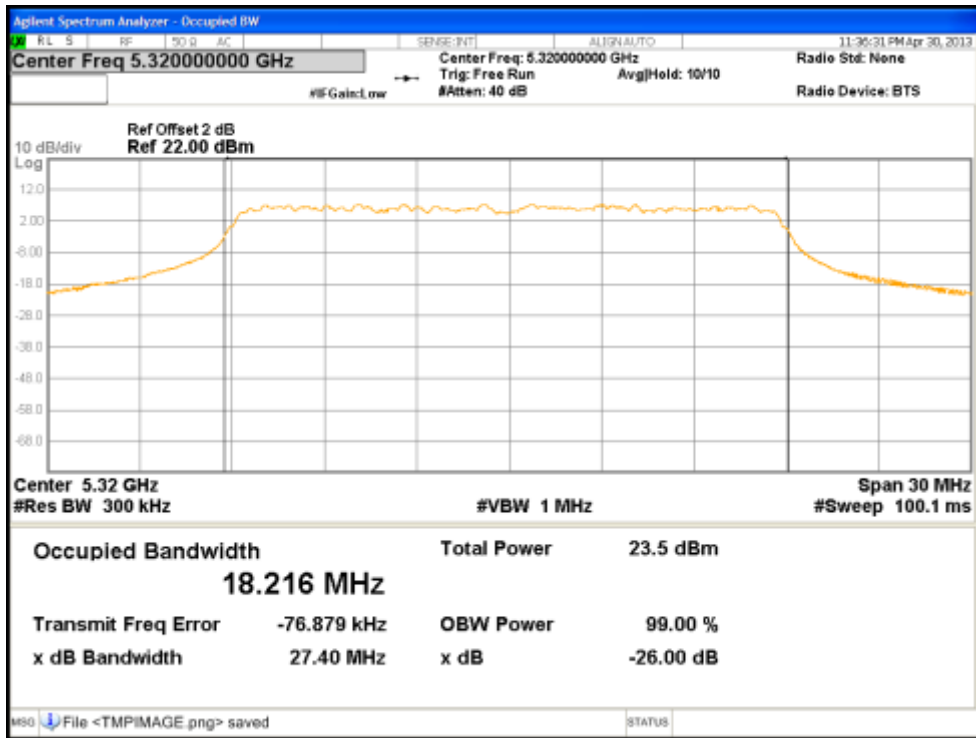


Figure 29: 99% Bandwidth at 5320 MHz, Chain 0

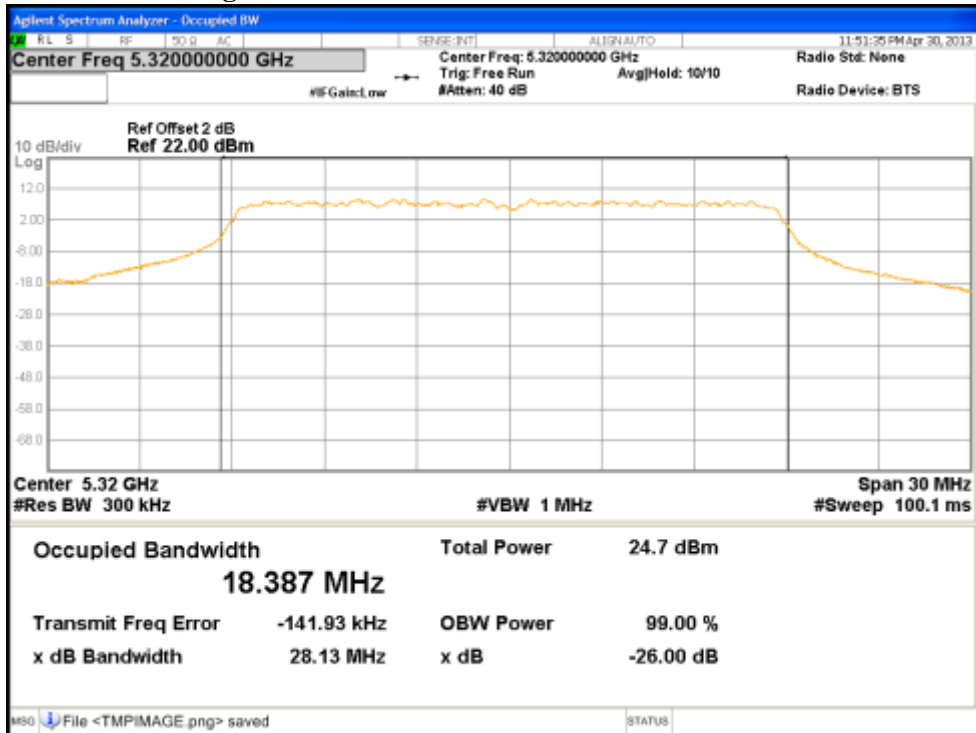


Figure 30: 99% Bandwidth at 5320 MHz, Chain 1

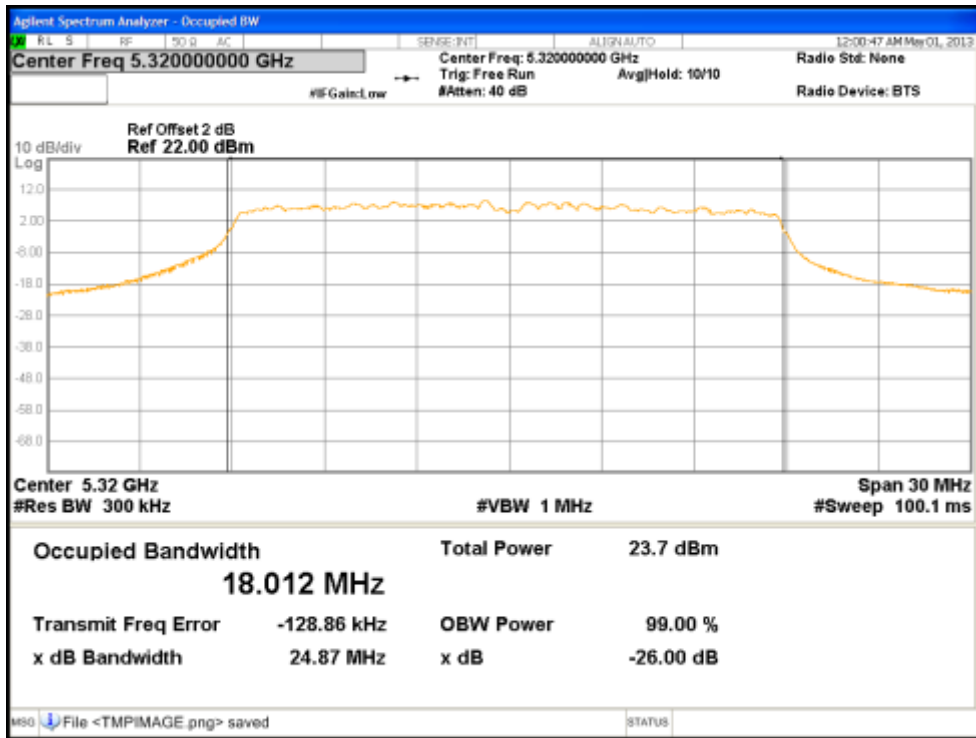


Figure 31: 99% Bandwidth at 5320 MHz, Chain 2

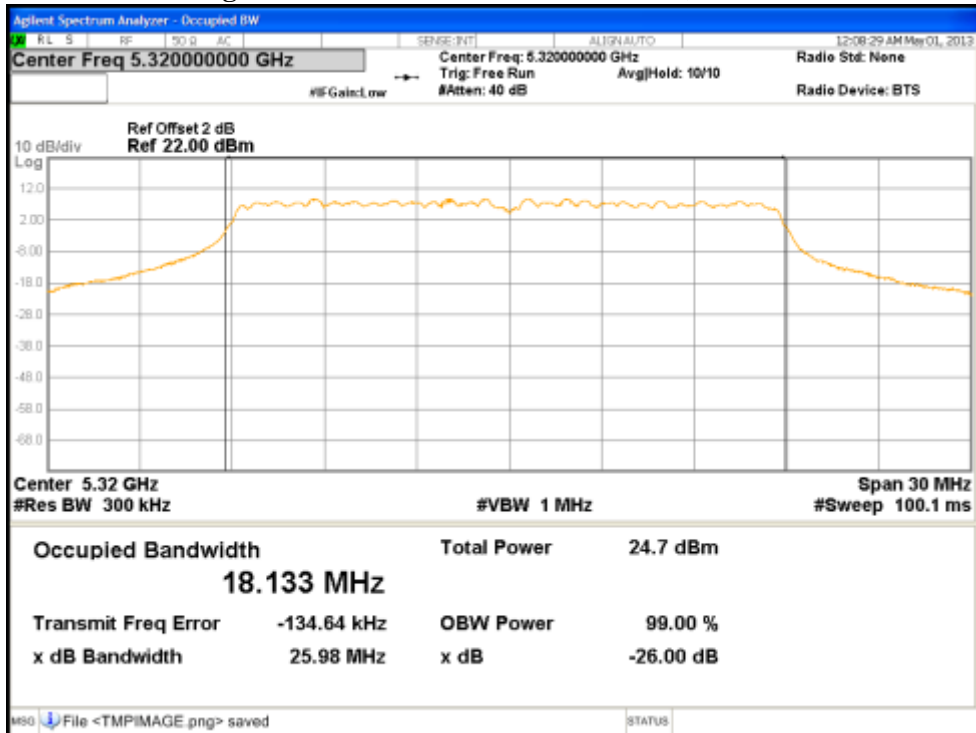


Figure 32: 99% Bandwidth at 5320 MHz, Chain 3

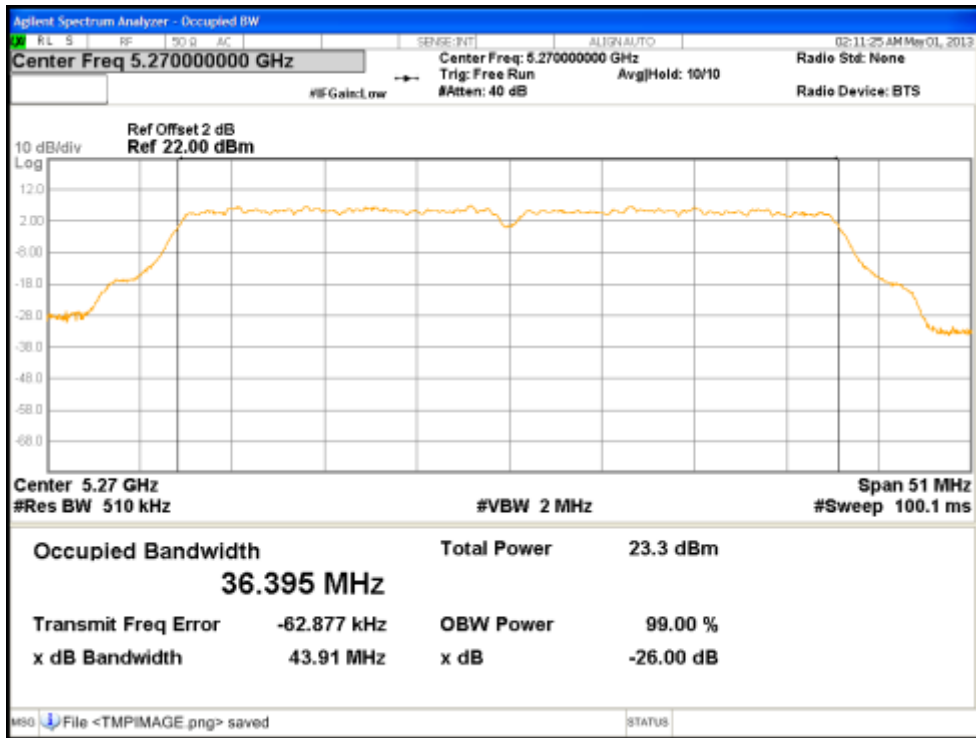


Figure 33: 99% Bandwidth at 5270 MHz, Chain 0

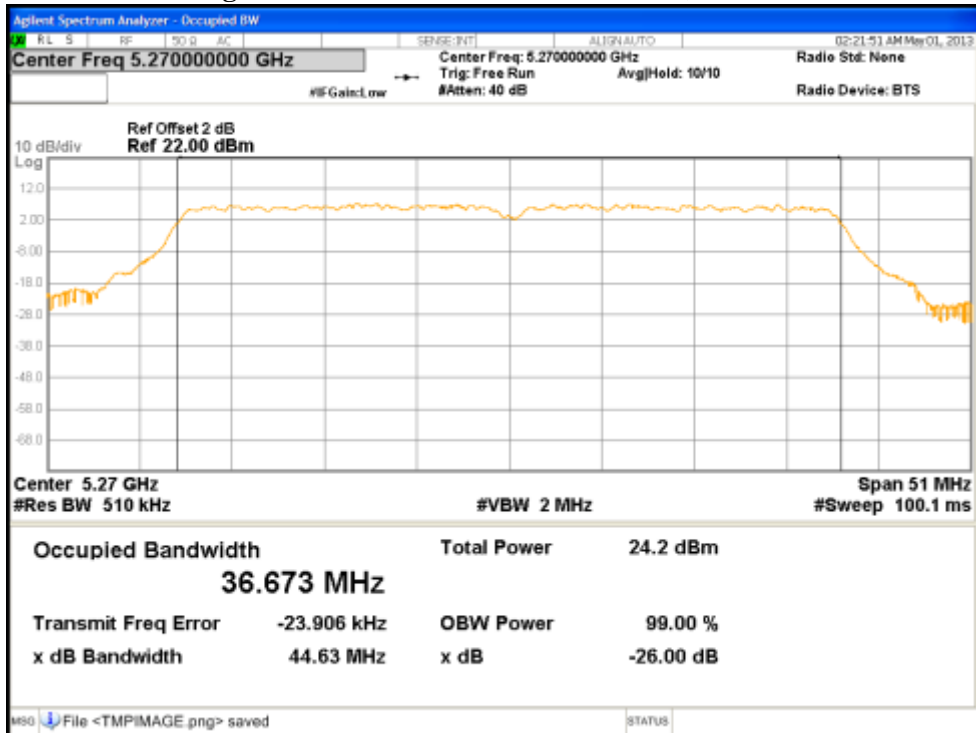


Figure 34: 99% Bandwidth at 5270 MHz, Chain 1

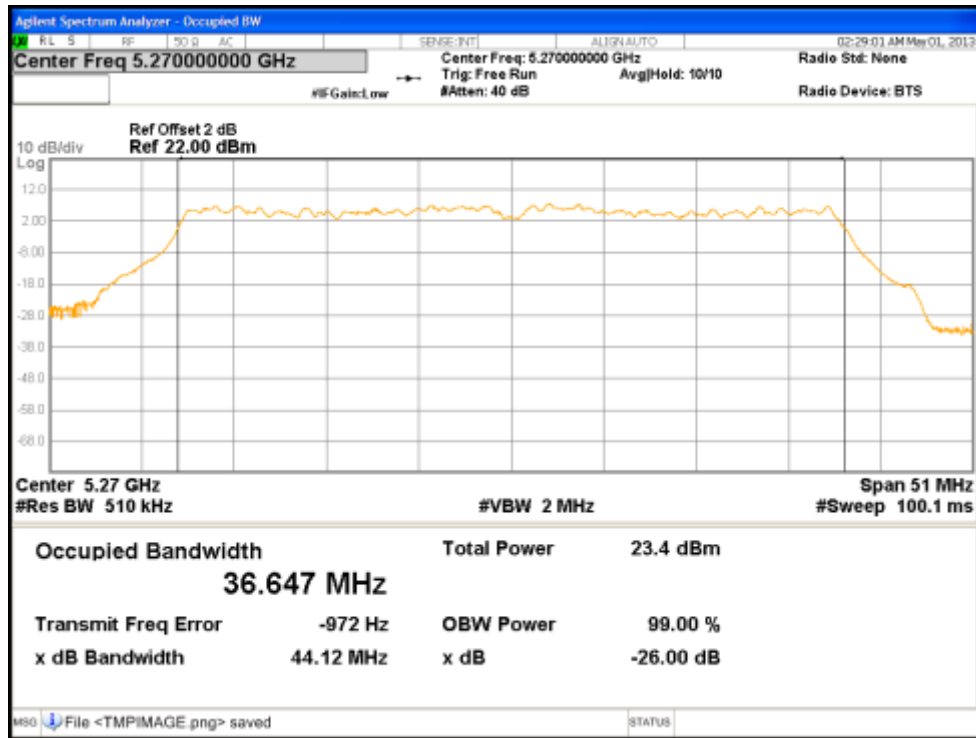


Figure 35: 99% Bandwidth at 5270 MHz, Chain 2

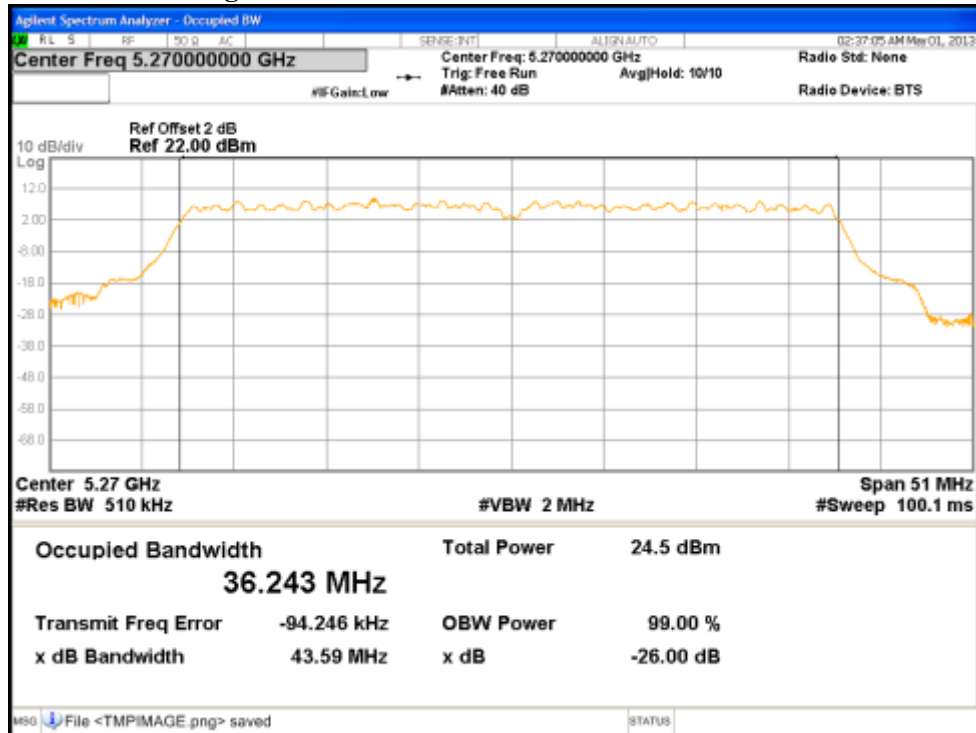


Figure 36: 99% Bandwidth at 5270 MHz, Chain 3

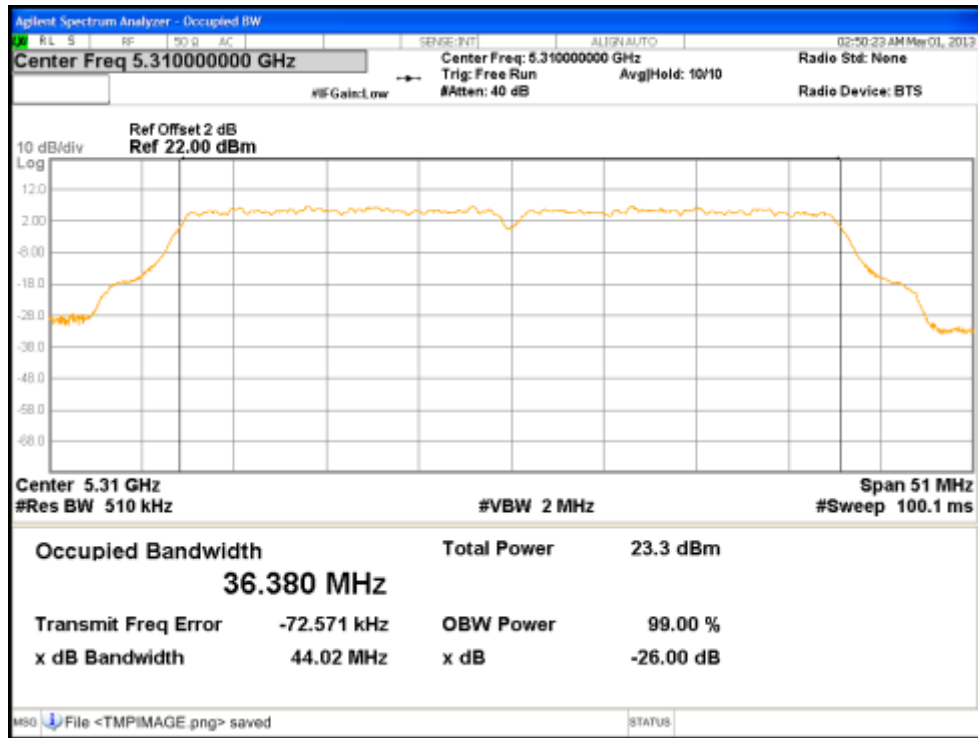


Figure 37: 99% Bandwidth at 5310 MHz, Chain 0

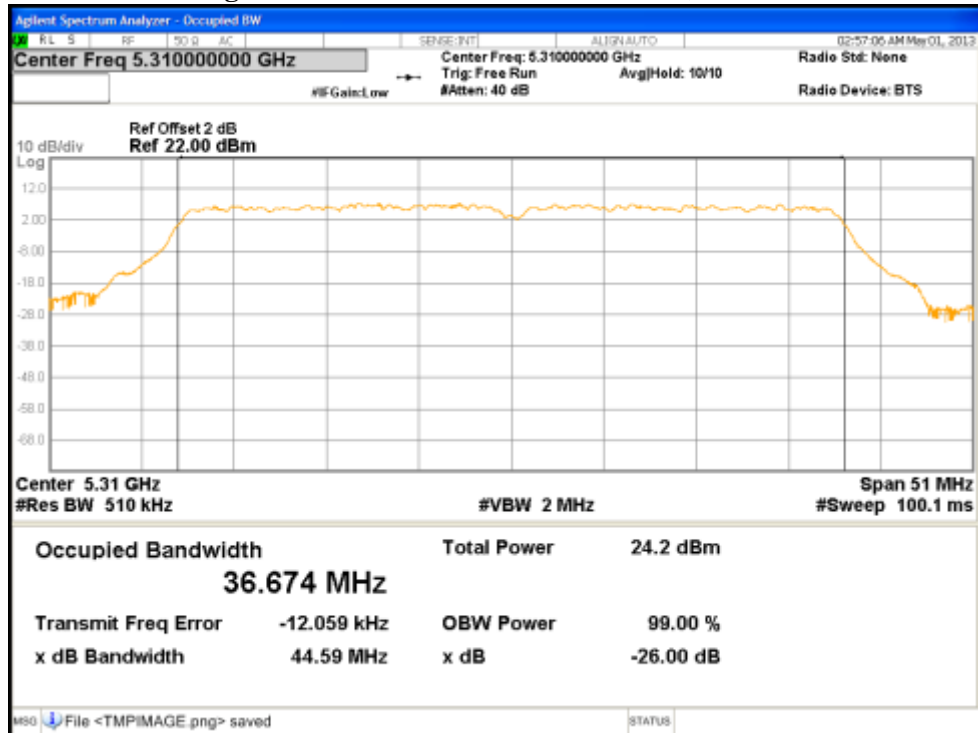


Figure 38: 99% Bandwidth at 5310 MHz, Chain 1

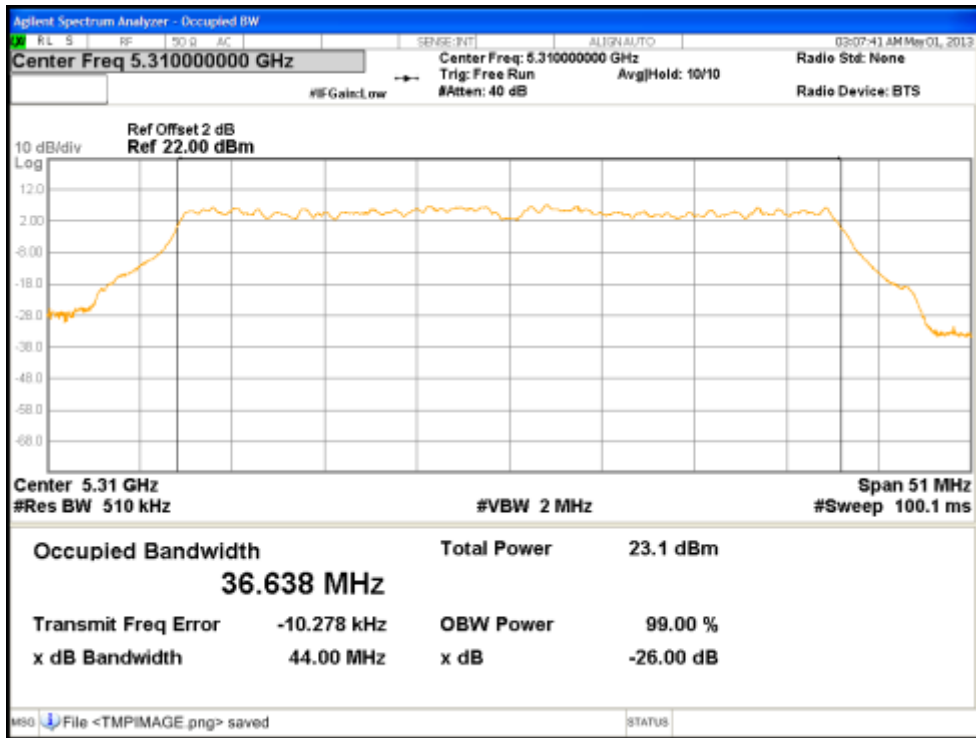


Figure 39: 99% Bandwidth at 5310 MHz, Chain 2

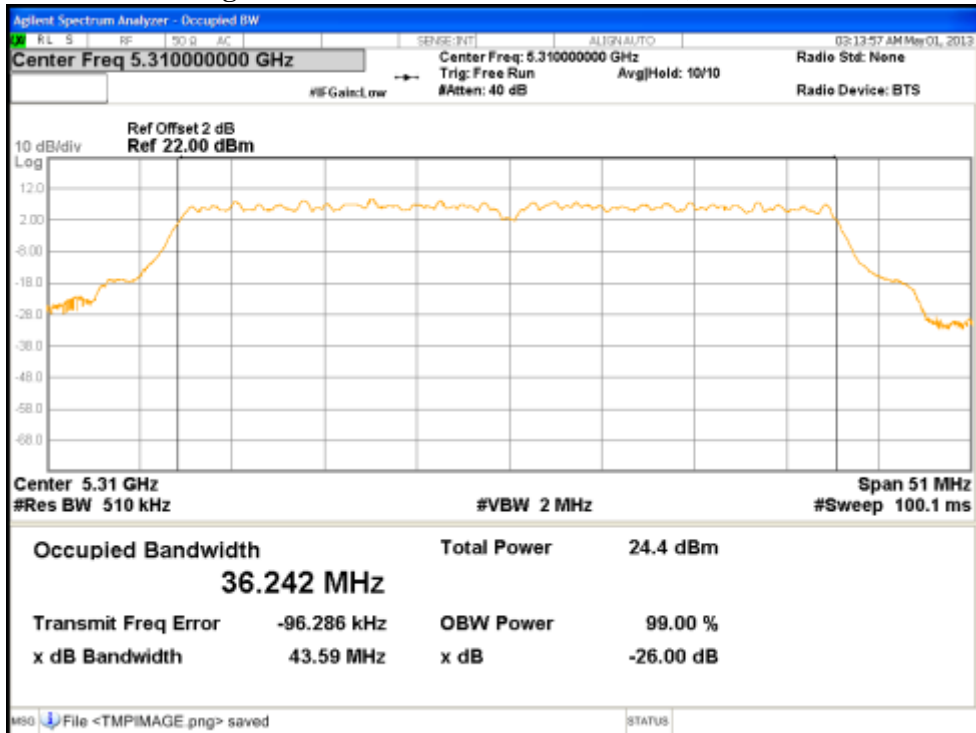


Figure 40: 99% Bandwidth at 5310 MHz, Chain 3

### 4.3 Peak Excursion


According to the CFR47 Part 15.407 (a)(6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

#### 4.3.1 Test Method

The ANSI C63.10-2009 Section 6.10.4 conducted method was used to measure the peak excursion.

The measurement was performed with modulation per CFR47 Part 15.407 (a) (6). This test was conducted on 3 channels in each operating mode in frequency range 5250 MHz to 5350 MHz on the test sample, S/N 09130M000104. The worst sample result indicated below.

Test Setup:

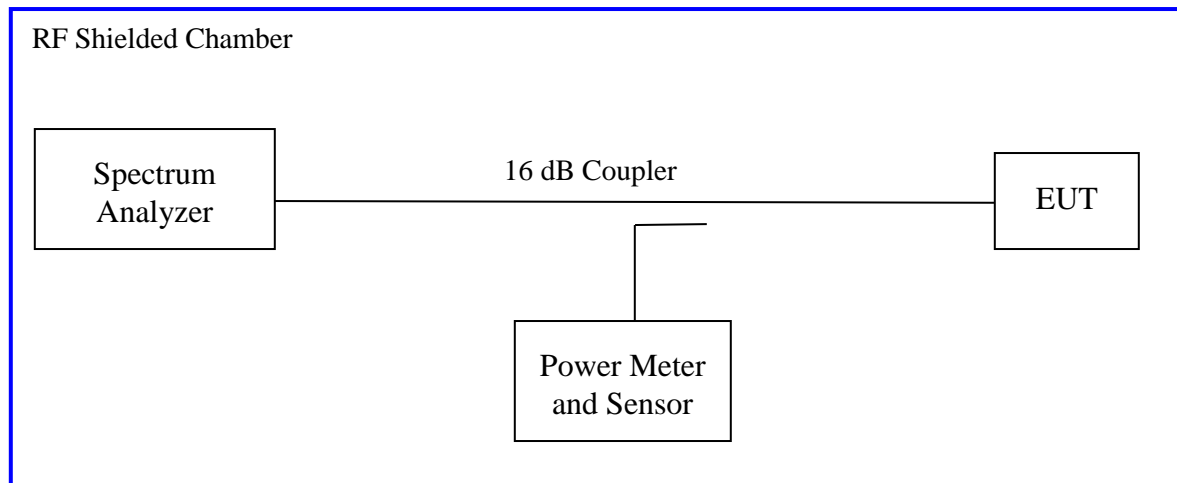



### 4.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 5: Peak Excursion – Test Results**

| <b>Test Conditions:</b> Conducted Measurement, Normal Temperature              |            |          |                                         |          |          |             |
|--------------------------------------------------------------------------------|------------|----------|-----------------------------------------|----------|----------|-------------|
| <b>Antenna Type:</b> Integrated                                                |            |          | <b>Power Setting:</b> see test plan     |          |          |             |
| <b>Max. Directional Gain:</b> + 8 dBi                                          |            |          | <b>Signal State:</b> Modulated at 100%. |          |          |             |
| <b>Ambient Temp.:</b> 23 °C                                                    |            |          | <b>Relative Humidity:</b> 32%           |          |          |             |
| <b>802.11n (HT20) Mode</b>                                                     |            |          |                                         |          |          |             |
| Operating Channel                                                              | Limit [dB] | Ch0 [dB] | Ch1 [dB]                                | Ch2 [dB] | Ch3 [dB] | Margin [dB] |
| 5260                                                                           | 13.0       | -7.68    | -7.72                                   | -7.93    | -8.31    | -5.32       |
| 5300                                                                           | 13.0       | -7.36    | -7.64                                   | -7.92    | -8.07    | -5.64       |
| 5320                                                                           | 13.0       | -6.91    | -7.64                                   | -7.91    | -8.37    | -6.09       |
| <b>Note:</b> The peak excursion was observed at HT20 6.5 Mbps per Data Stream. |            |          |                                         |          |          |             |
| <b>802.11n (HT40) Mode</b>                                                     |            |          |                                         |          |          |             |
| Operating Channel                                                              | Limit [dB] | Ch0 [dB] | Ch1 [dB]                                | Ch2 [dB] | Ch3 [dB] | Margin [dB] |
| 5270                                                                           | 13.0       | -7.48    | -6.73                                   | -7.05    | -8.50    | -6.27       |
| 5310                                                                           | 13.0       | -7.44    | -7.07                                   | -7.14    | -8.02    | -5.93       |
| <b>Note:</b> The peak excursion was observed at HT40 13.5 Mbps per Data Stream |            |          |                                         |          |          |             |

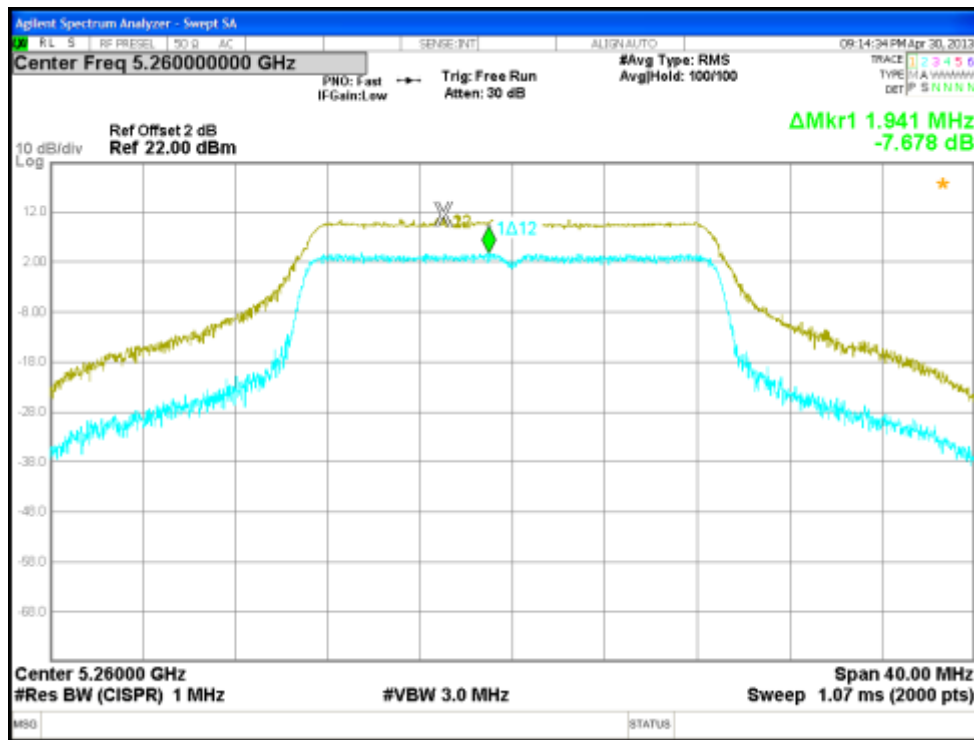


Figure 41: Peak Excursion, 5260 MHz at 802.11n, Chain 0 – 6.5Mbps

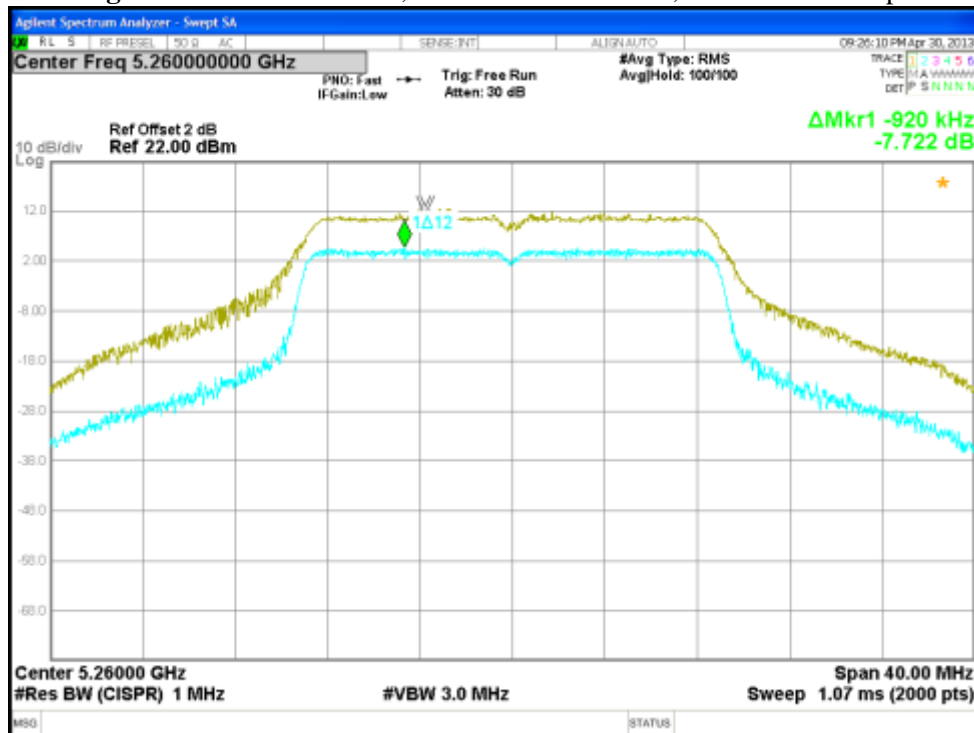


Figure 42: Peak Excursion, 5260 MHz at 802.11n, Chain 1 – 6.5Mbps

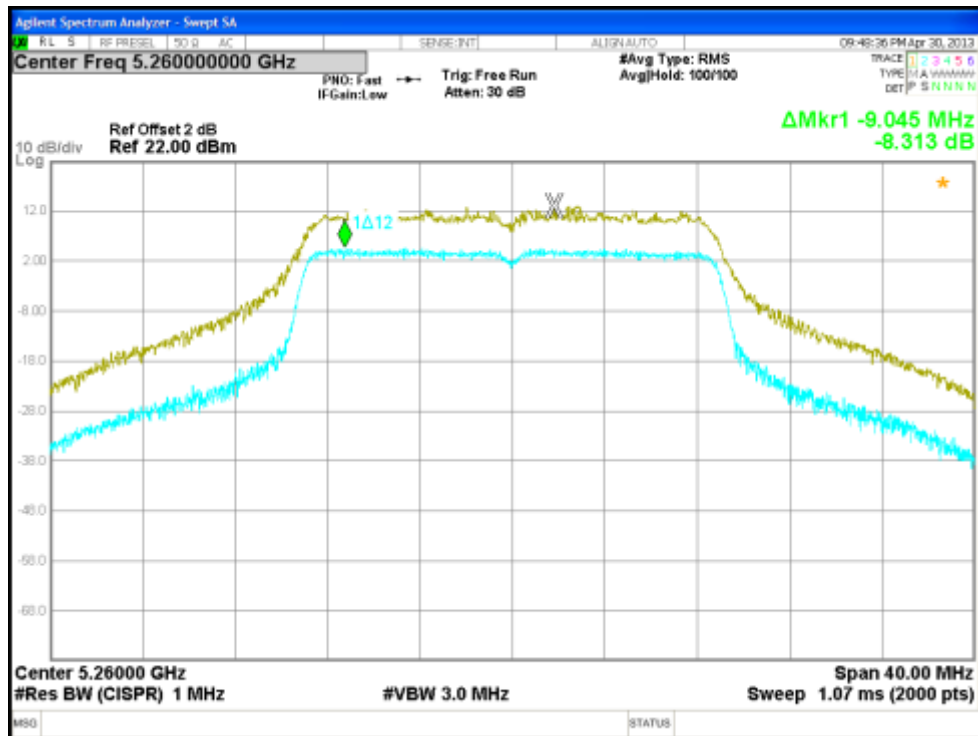
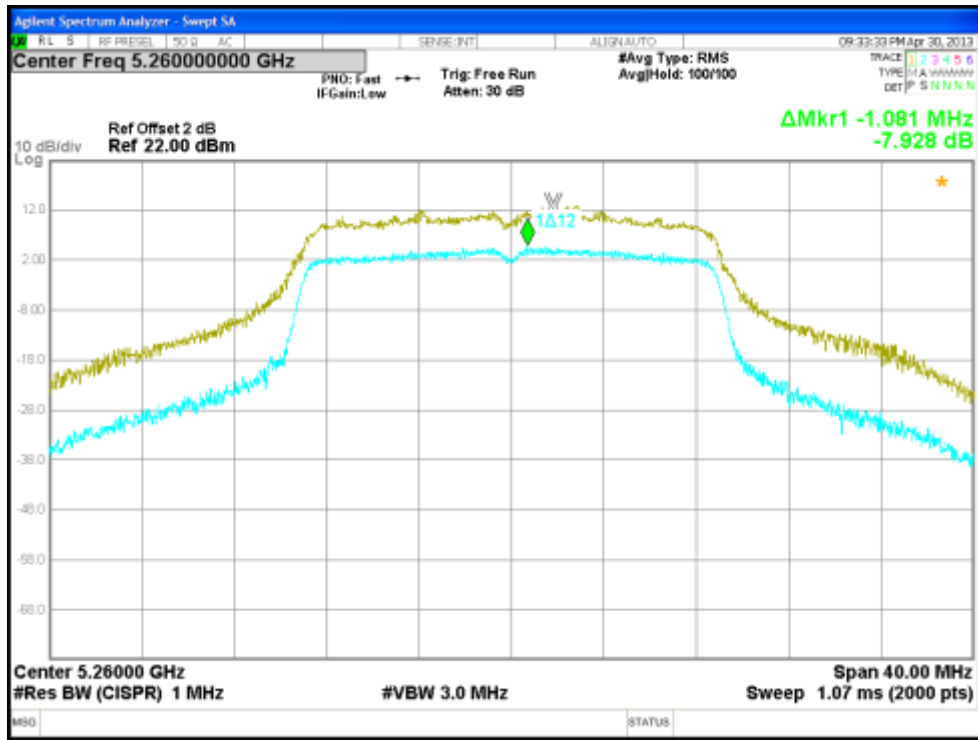


Figure 44: Peak Excursion, 5260 MHz at 802.11n, Chain 3 – 6.5Mbps

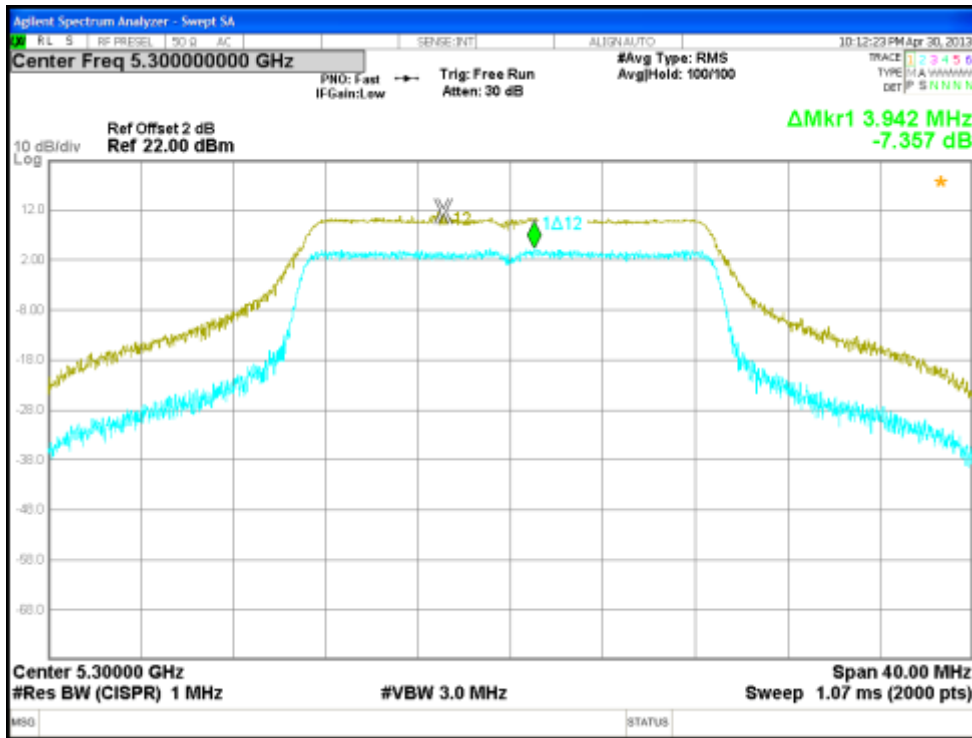


Figure 45: Peak Excursion, 5300 MHz at 802.11n, Chain 0 – 6.5Mbps

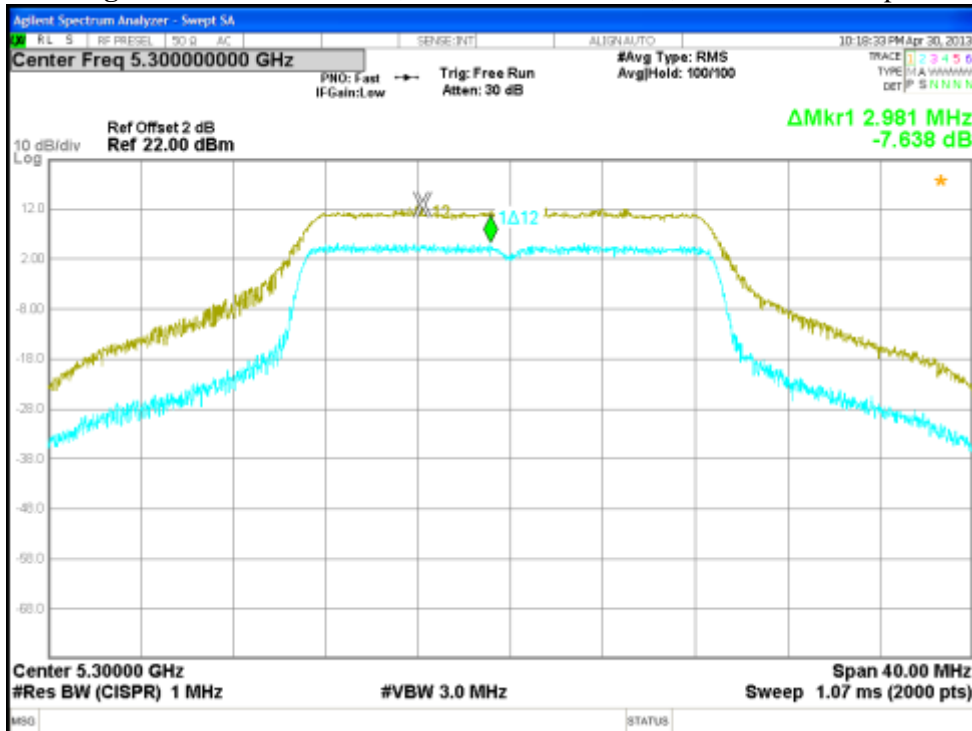


Figure 46: Peak Excursion, 5300 MHz at 802.11n, Chain 1 – 6.5Mbps

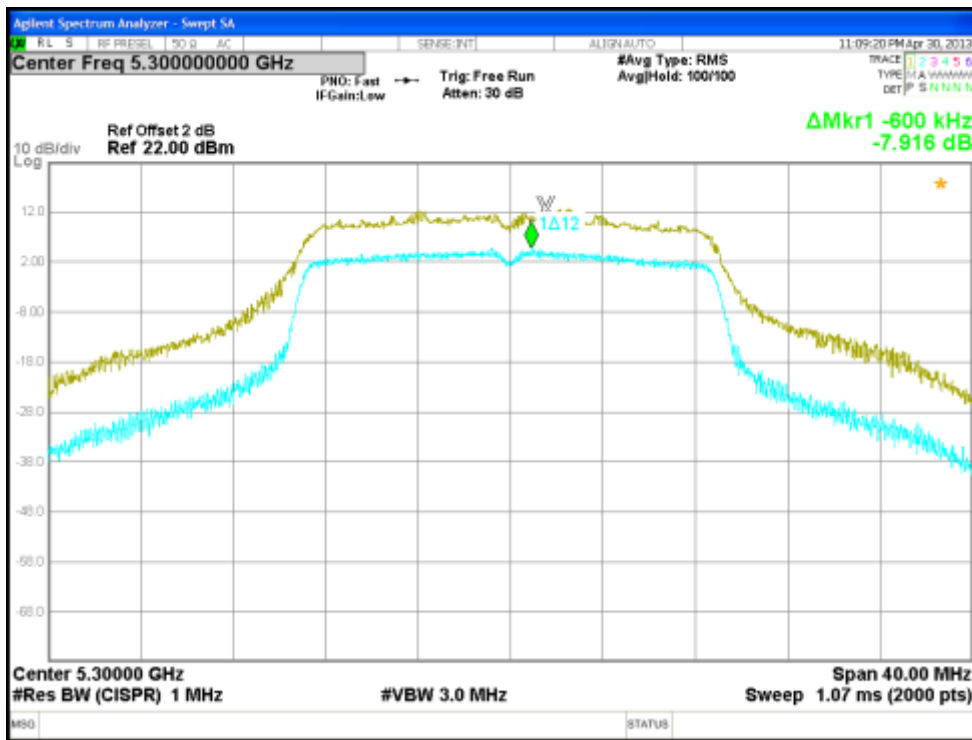


Figure 47: Peak Excursion, 5300 MHz at 802.11n, Chain 2 – 6.5Mbps

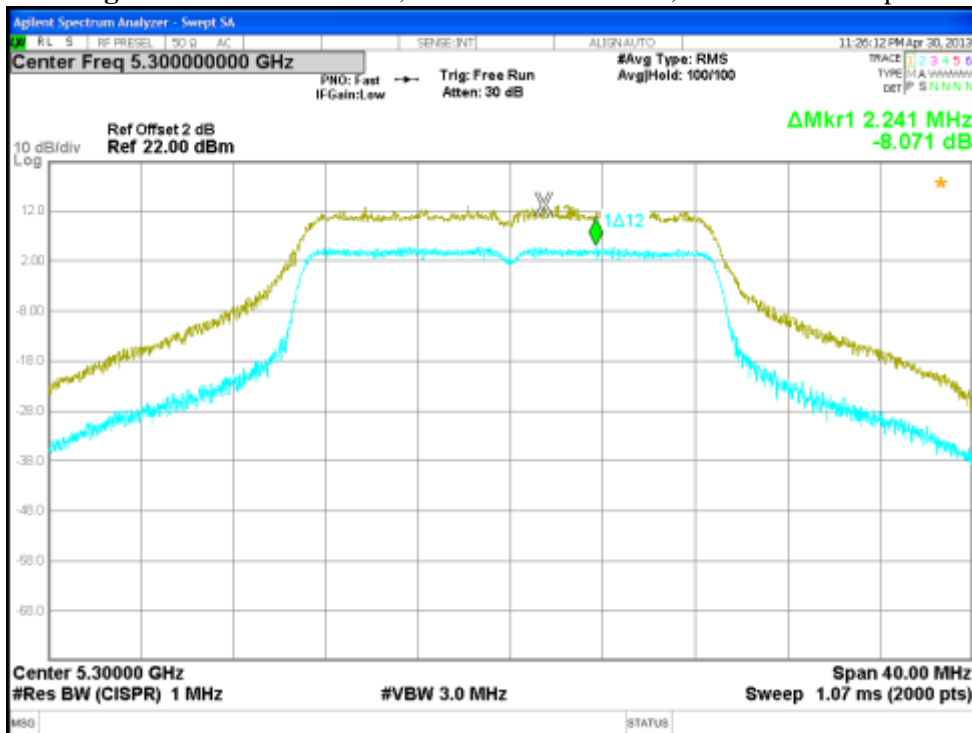


Figure 48: Peak Excursion, 5300 MHz at 802.11n, Chain 3 – 6.5Mbps

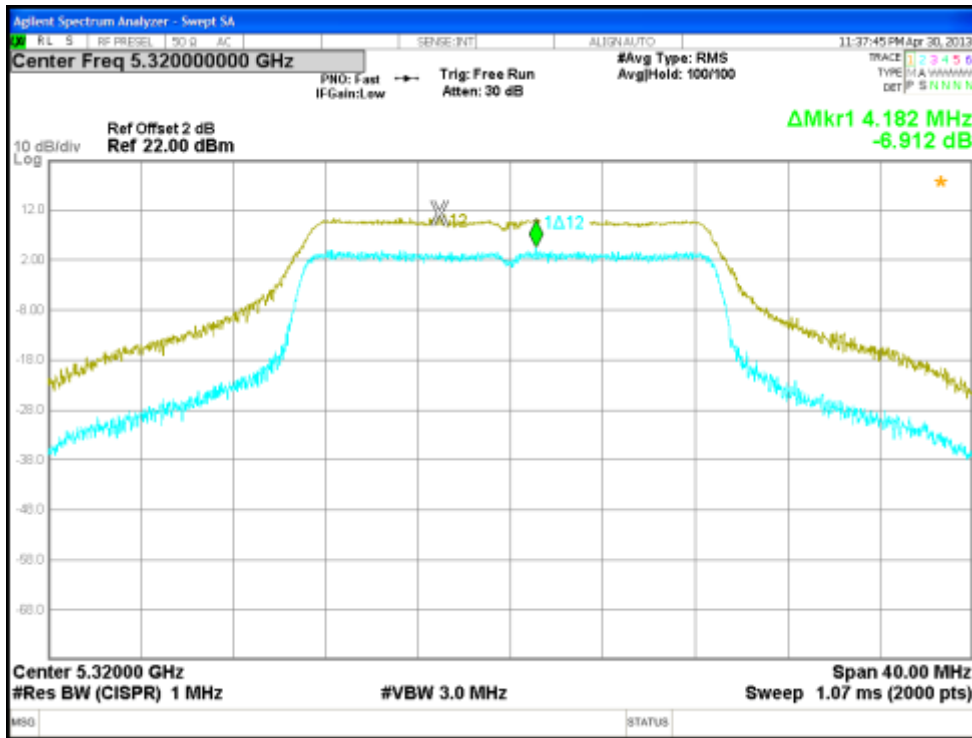


Figure 49: Peak Excursion, 5320 MHz at 802.11n, Chain 0 – 6.5Mbps

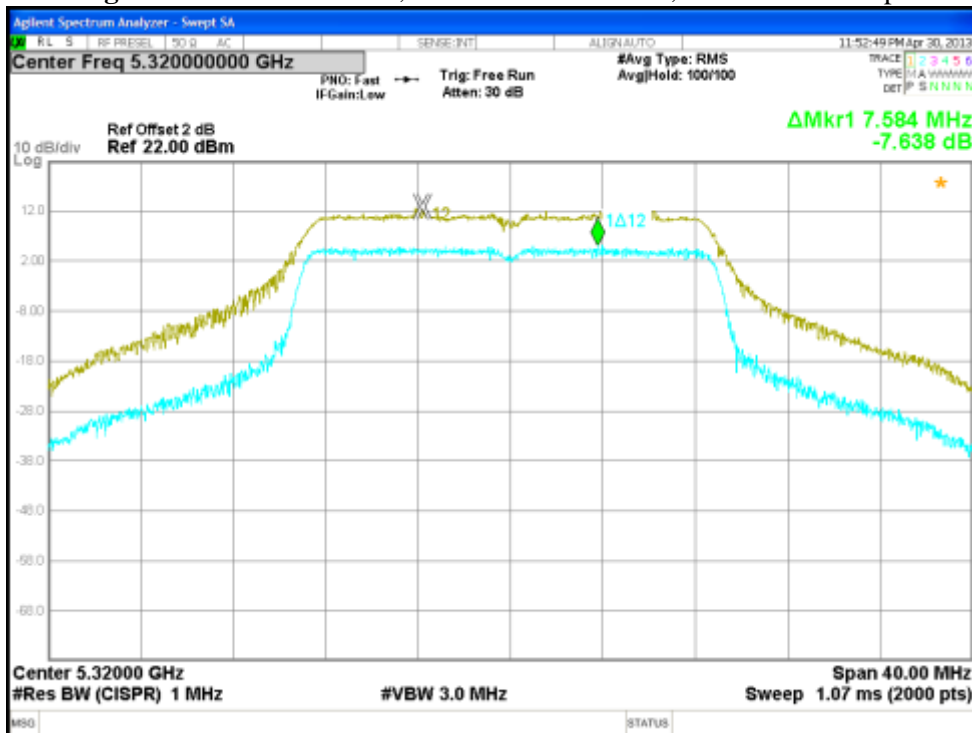


Figure 50: Peak Excursion, 5320 MHz at 802.11n, Chain 1 – 6.5Mbps

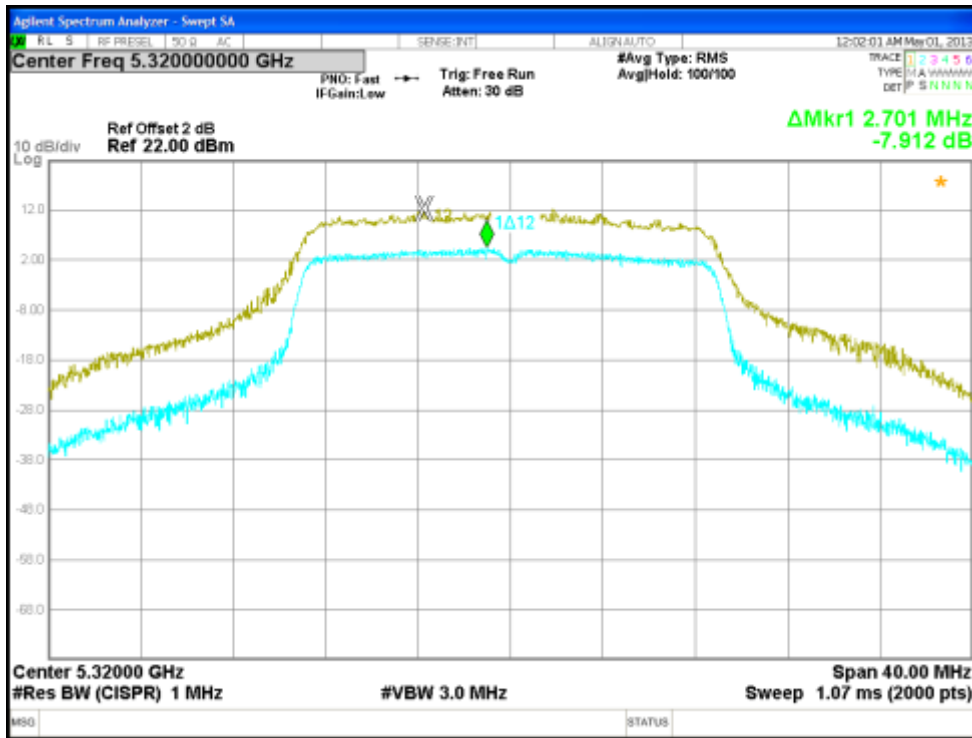


Figure 51: Peak Excursion, 5320 MHz at 802.11n, Chain 2 – 6.5Mbps

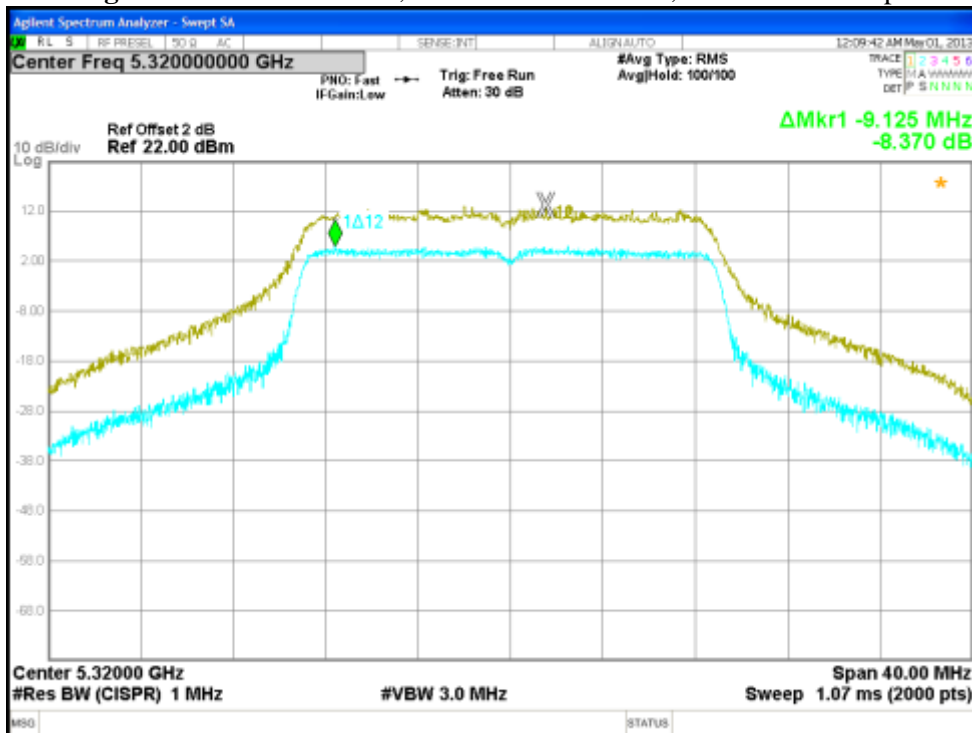


Figure 52: Peak Excursion, 5320 MHz at 802.11n, Chain 3 – 6.5Mbps

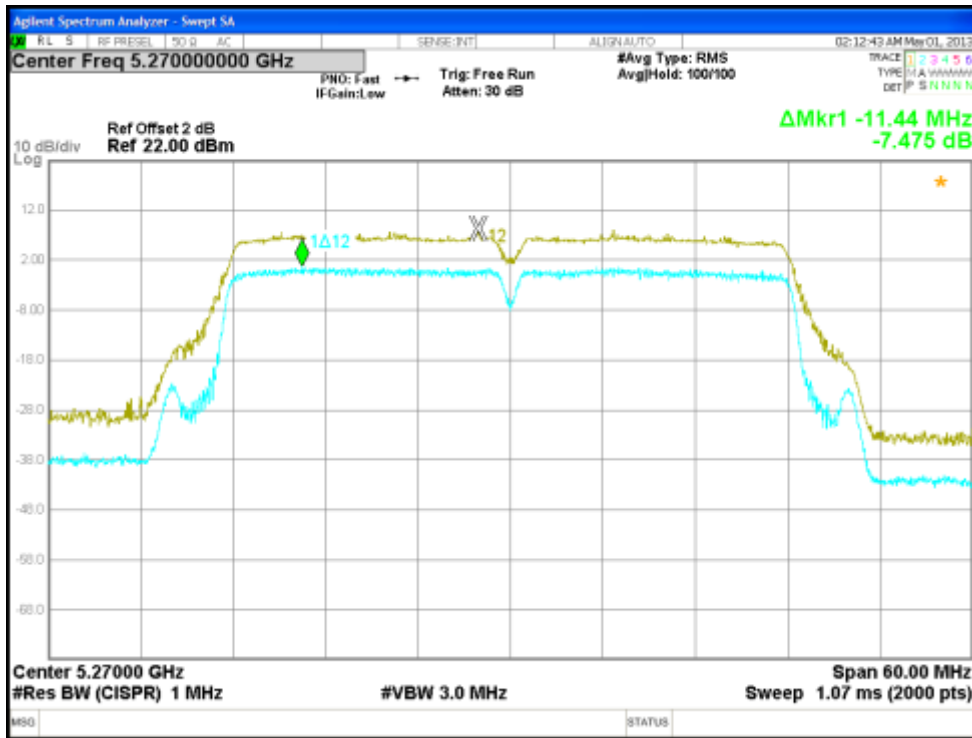


Figure 53: Peak Excursion, 5270 MHz at 802.11n, Chain 0 – 13.5Mbps

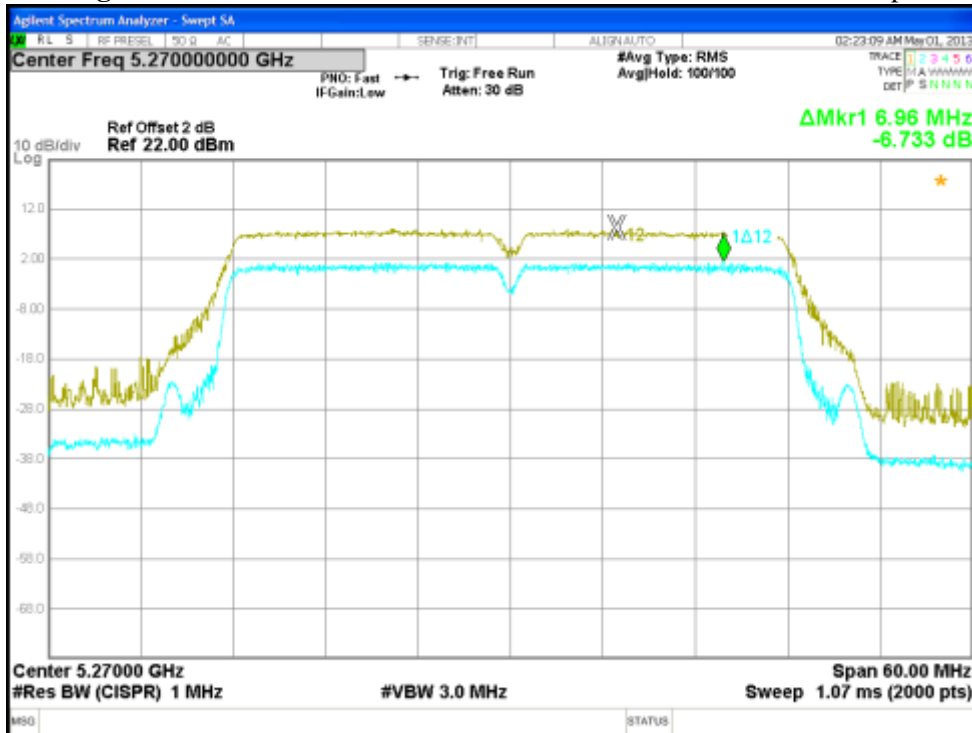


Figure 54: Peak Excursion, 5270 MHz at 802.11n, Chain 1 – 13.5Mbps



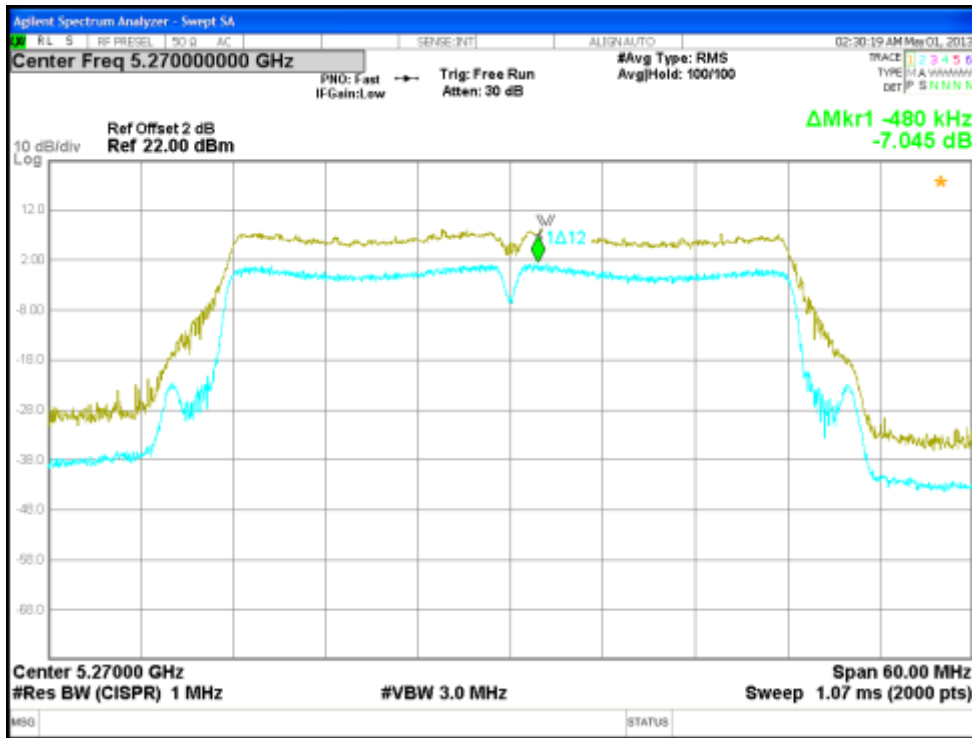


Figure 55: Peak Excursion, 5270 MHz at 802.11n, Chain 2 – 13.5Mbps

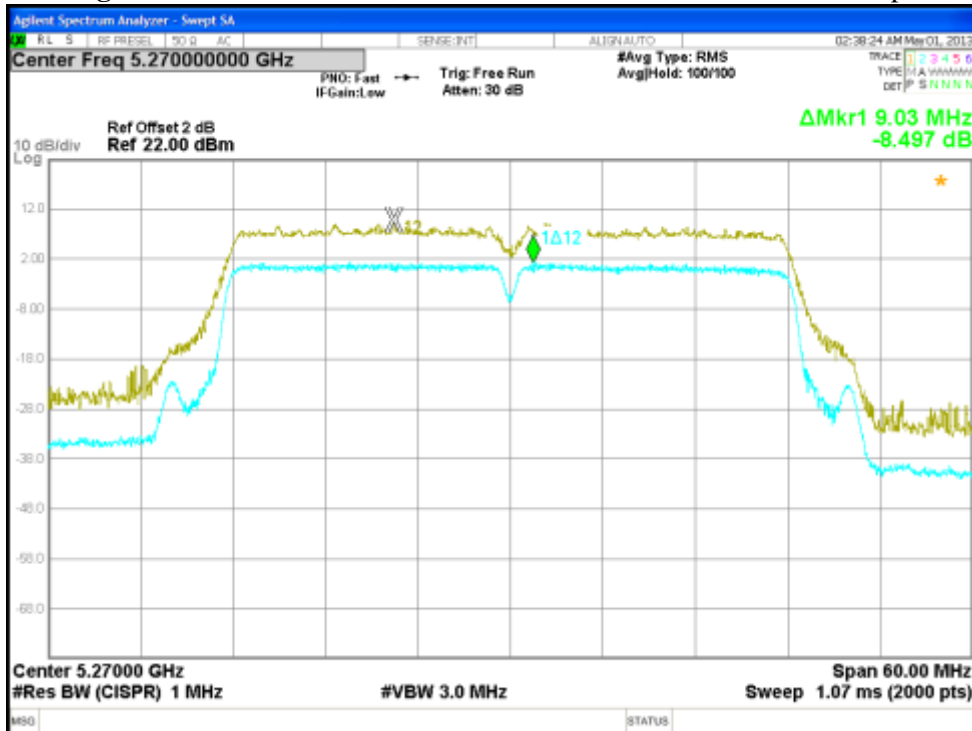


Figure 56: Peak Excursion, 5270 MHz at 802.11n, Chain 3 – 13.5Mbps

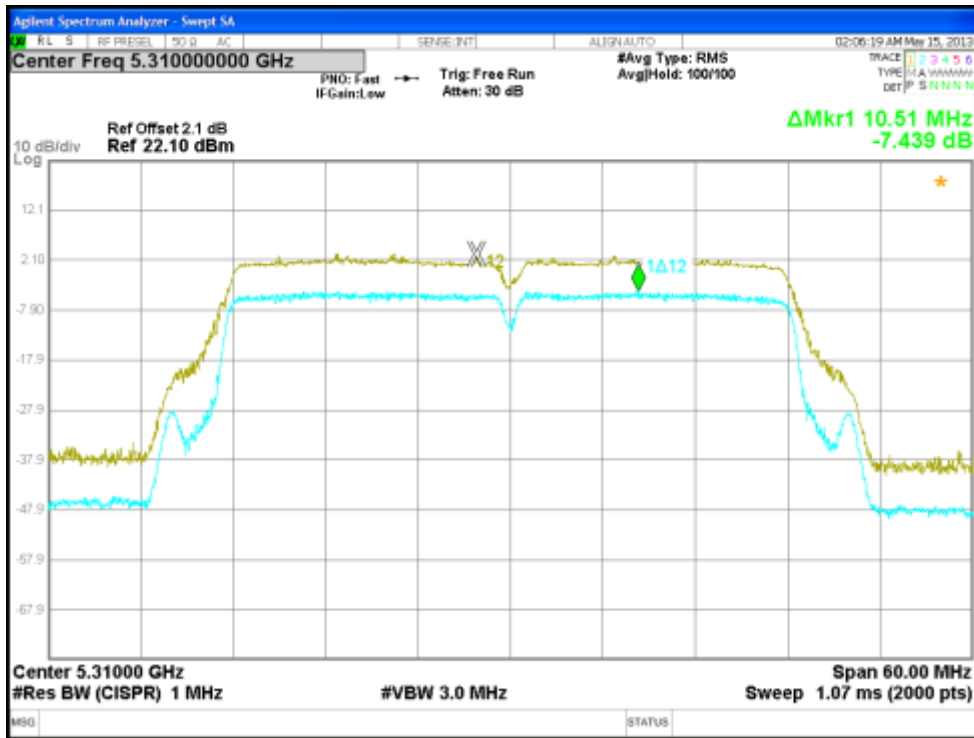


Figure 57: Peak Excursion, 5310 MHz at 802.11n, Chain 0 – 13.5Mbps

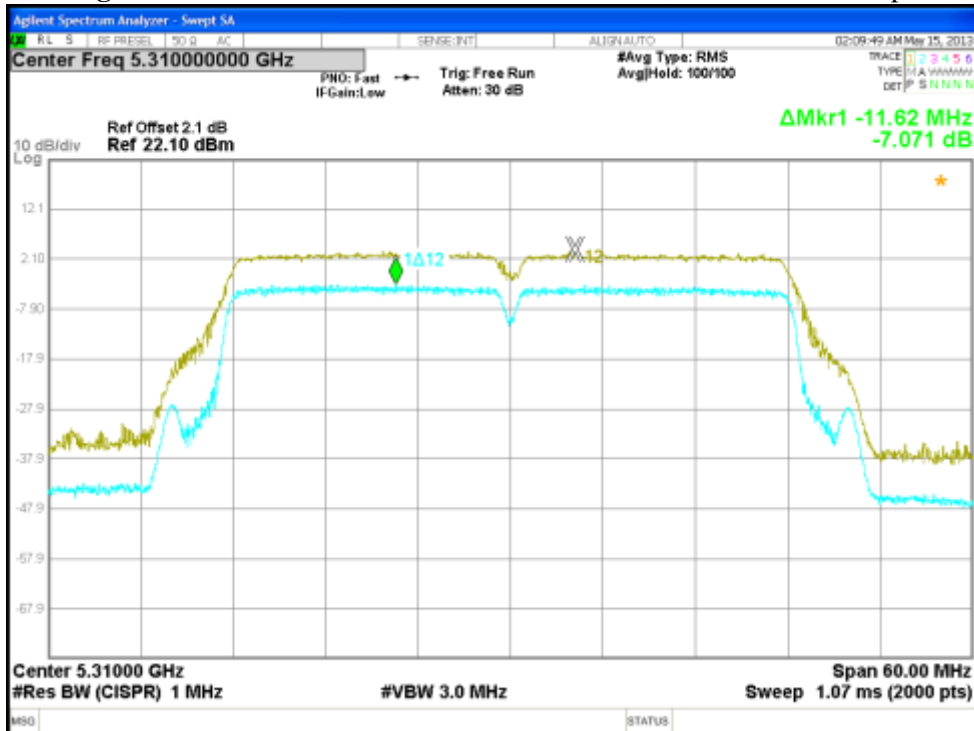


Figure 58: Peak Excursion, 5310 MHz at 802.11n, Chain 1 – 13.5Mbps

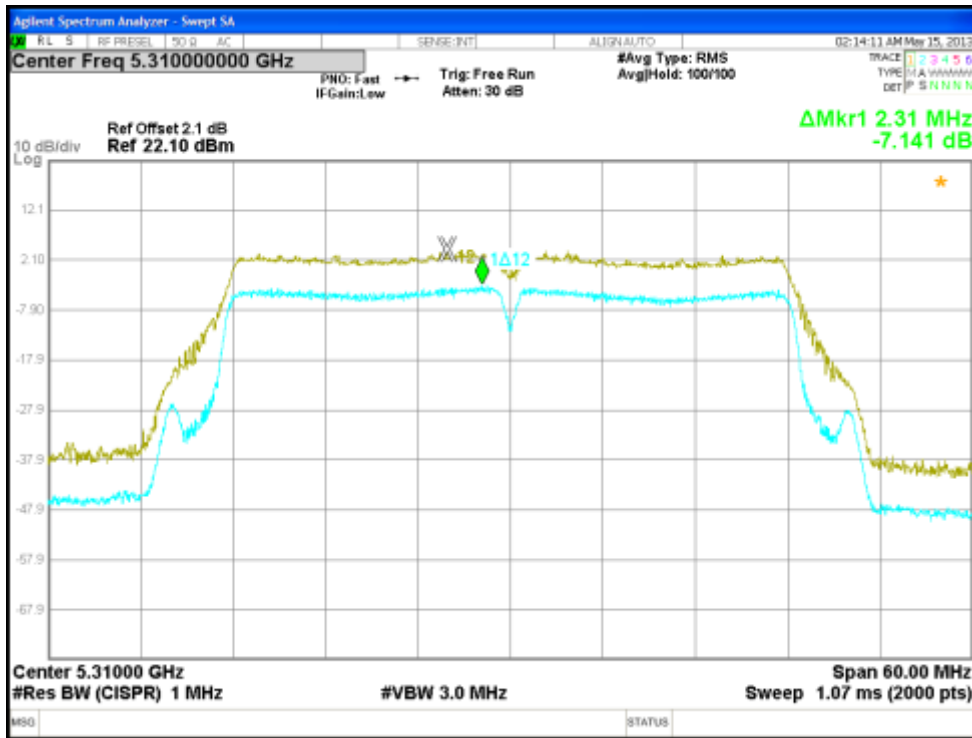


Figure 59: Peak Excursion, 5310 MHz at 802.11n, Chain 2 – 13.5Mbps

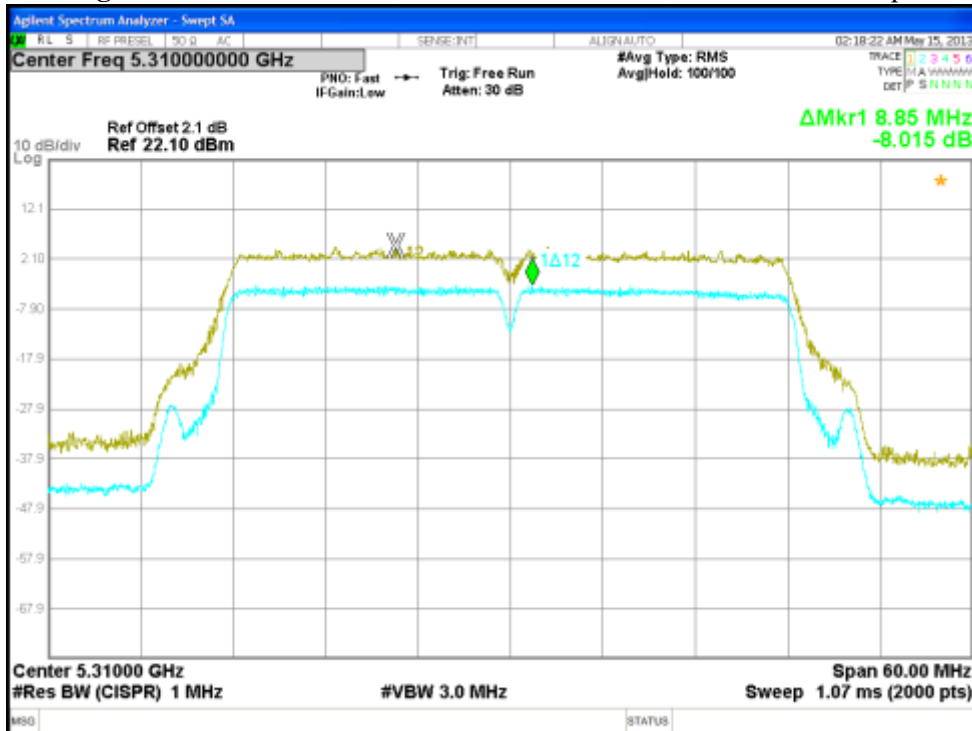


Figure 60: Peak Excursion, 5310 MHz at 802.11n, Chain 3 – 13.5Mbps


#### 4.4 Power Spectral Density

According to the CFR47 Part 15.407 (a) and RSS 210 (A9.2), the spectral power density output of the antenna port shall be less than 11 dBm in any 1 MHz band during any time interval of continuous transmission.

##### 4.4.1 Test Method

The conducted method was used to measure the power spectral density per ANSI C63.10-2009 Section 6.11.2. The measurement was performed with modulation per CFR47 Part 15.407 (a) and RSS 210 (A9.2). The pre-evaluation was performed to find the worst modes. The worst findings were conducted on 3 channels in frequency range of 5250 MHz to 5350 MHz for the test sample, S/N 09130M000104. The result indicated below.

Test Setup:

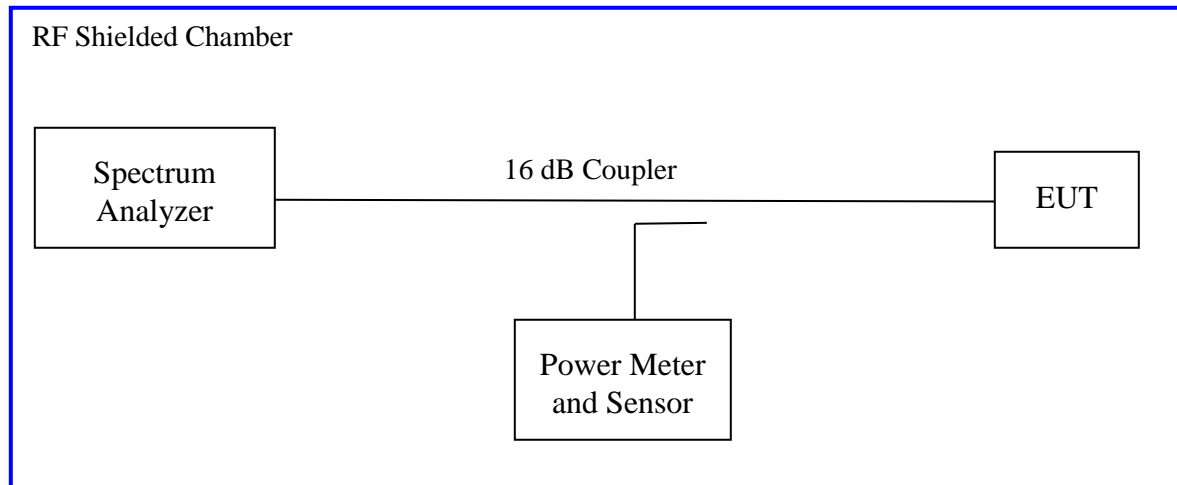

#### 4.4.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 6:** Power Spectral Density – Test Results

| <b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only                                                                                                                                                                                                                                                                         |                    |                                         |                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------|----------------|
| <b>Antenna Type:</b> Integrated                                                                                                                                                                                                                                                                                                                            |                    | <b>Power Setting:</b> See Test plan     |                |
| <b>Max. Directional Gain:</b> + 8 dBi                                                                                                                                                                                                                                                                                                                      |                    | <b>Signal State:</b> Modulated at 100%. |                |
| <b>Ambient Temp.:</b> 23 °C                                                                                                                                                                                                                                                                                                                                |                    | <b>Relative Humidity:</b> 30%           |                |
| <b>Power Spectral Density</b>                                                                                                                                                                                                                                                                                                                              |                    |                                         |                |
| <b>802.11n (HT20) Mode</b>                                                                                                                                                                                                                                                                                                                                 |                    |                                         |                |
| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                                                                             | Total PSD<br>[dBm] | Limit<br>[dBm]                          | Margin<br>[dB] |
| 5260                                                                                                                                                                                                                                                                                                                                                       | 8.753              | 9.00                                    | -0.25          |
| 5300                                                                                                                                                                                                                                                                                                                                                       | 8.297              | 9.00                                    | -0.70          |
| 5320                                                                                                                                                                                                                                                                                                                                                       | 7.861              | 9.00                                    | -1.14          |
| <b>Note:</b> 1. The highest peak output power was observed at HT20 6.5 Mbps per data stream.<br>2. According KDB 662911, amplitude bins of all chains were sum together.<br>3. The total directional gain would be 8dBi; 2dBi +10*Log(4). Per CFR47 Part 15.407 (a), the limit is reduced for every dBi gain exceeding 6dBi. The limit would be 9.00 dBm.  |                    |                                         |                |
| <b>802.11n (HT40) Mode</b>                                                                                                                                                                                                                                                                                                                                 |                    |                                         |                |
| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                                                                             | Total PSD<br>[dBm] | Limit<br>[dBm]                          | Margin<br>[dB] |
| 5270                                                                                                                                                                                                                                                                                                                                                       | 6.349              | 9.00                                    | -2.65          |
| 5310                                                                                                                                                                                                                                                                                                                                                       | 3.7301             | 9.00                                    | -7.27          |
| <b>Note:</b> 1. The highest peak output power was observed at HT40 13.5 Mbps per data stream.<br>2. According KDB 662911, amplitude bins of all chains were sum together.<br>3. The total directional gain would be 8dBi; 2dBi +10*Log(4). Per CFR47 Part 15.407 (a), the limit is reduced for every dBi gain exceeding 6dBi. The limit would be 9.00 dBm. |                    |                                         |                |

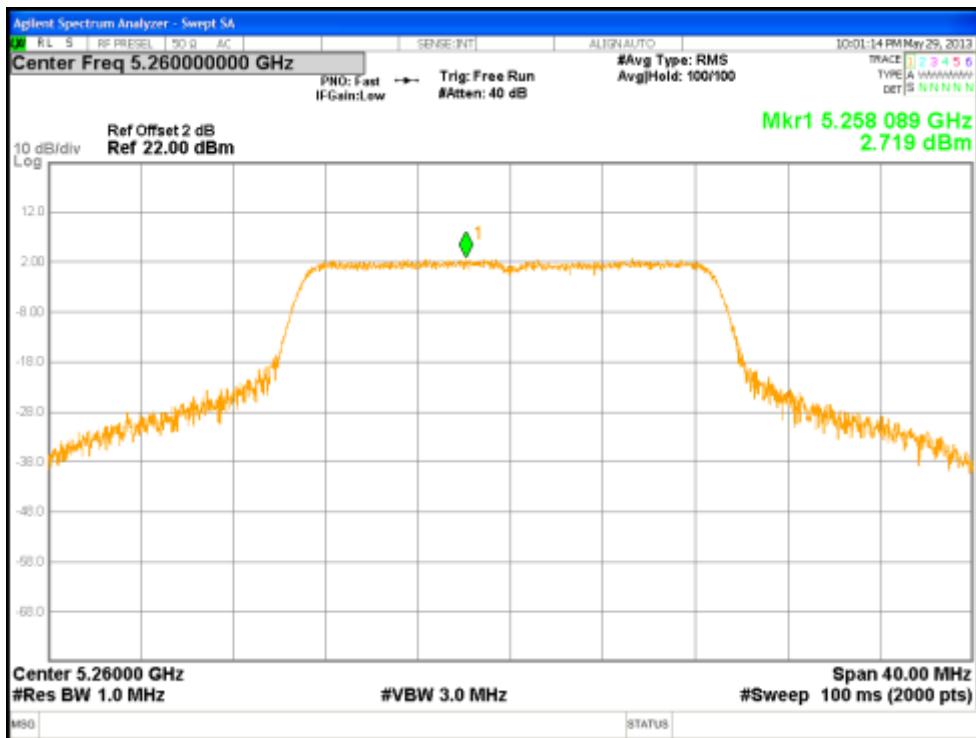


Figure 61: Power Spectral Density, 5260 MHz at 802.11n, Chain 0 – 6.5Mbps

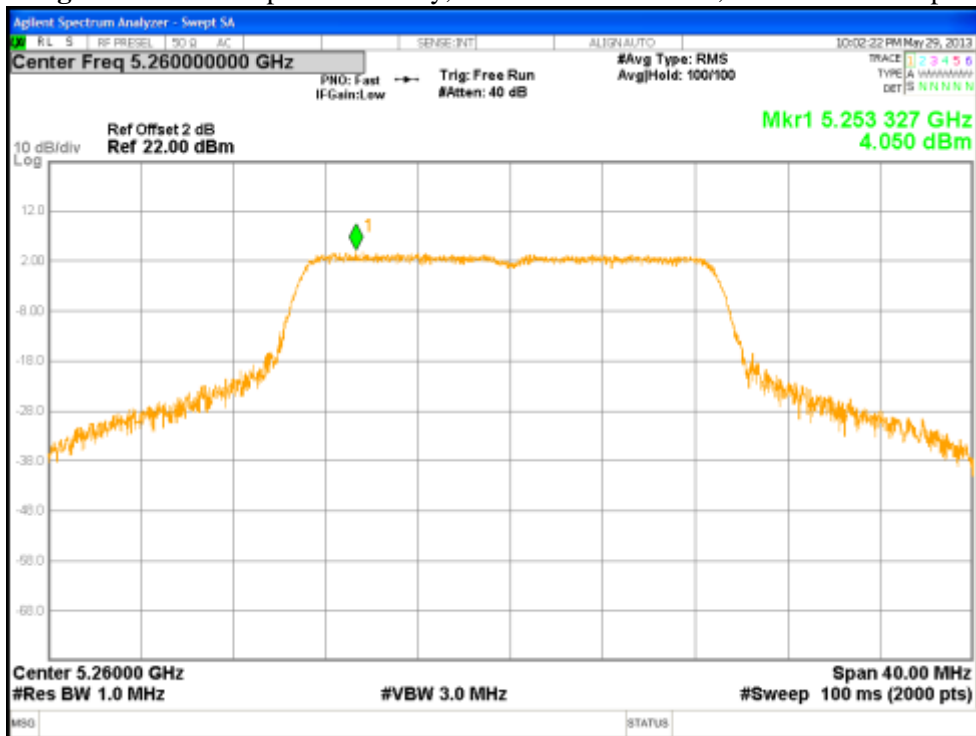


Figure 62: Power Spectral Density, 5260 MHz at 802.11n, Chain 1 – 6.5Mbps

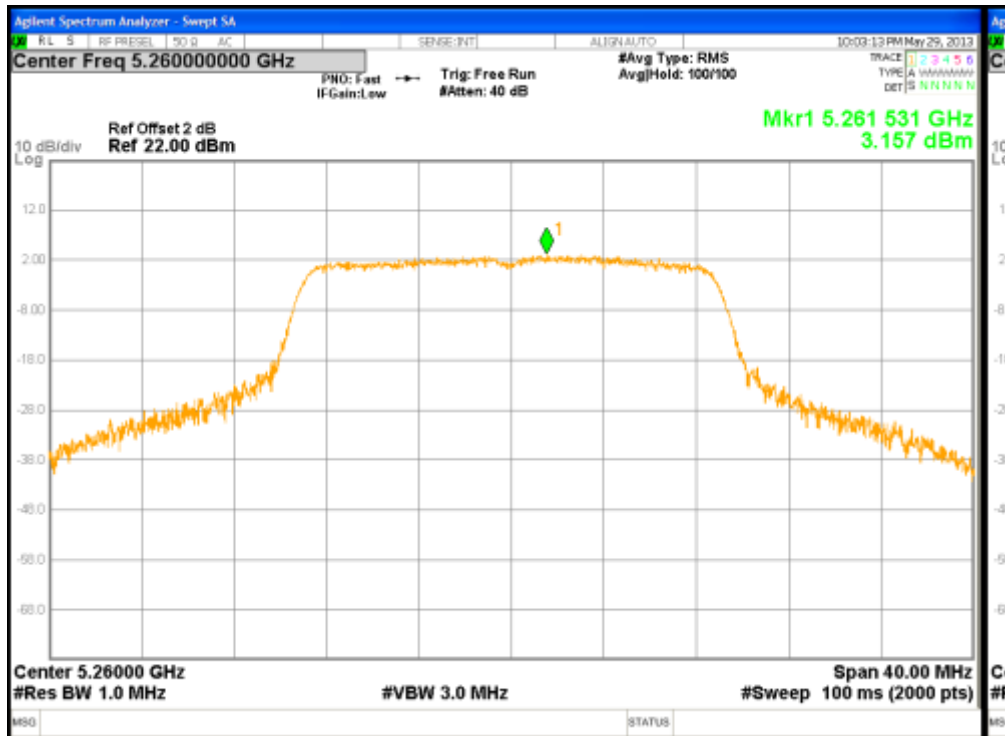


Figure 63: Power Spectral Density, 5260 MHz at 802.11n, Chain 2 – 6.5Mbps

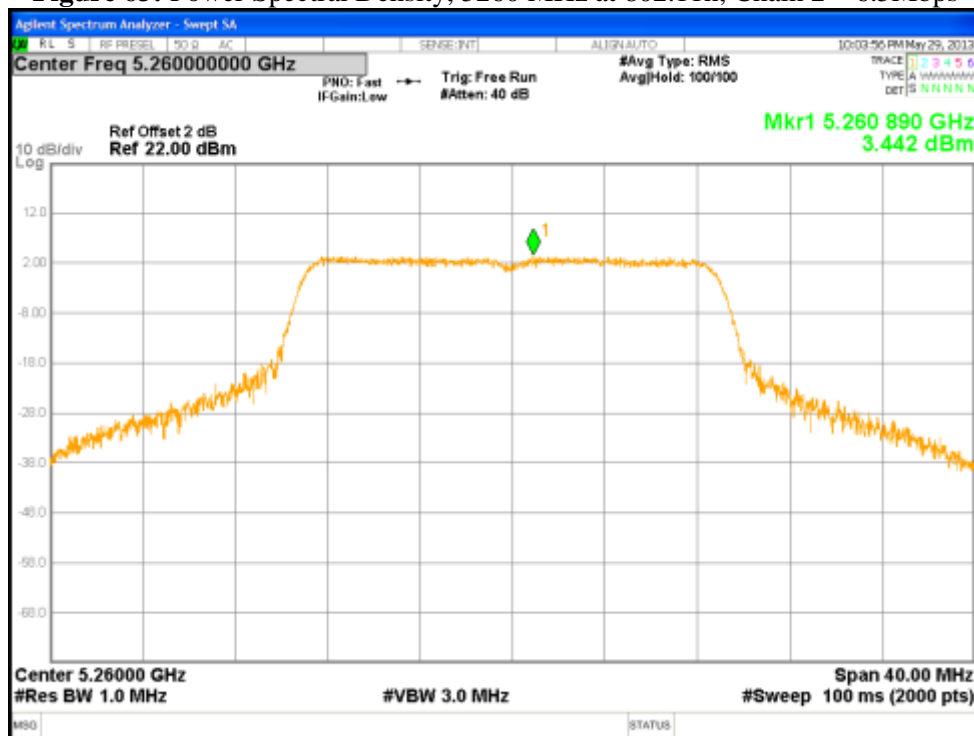
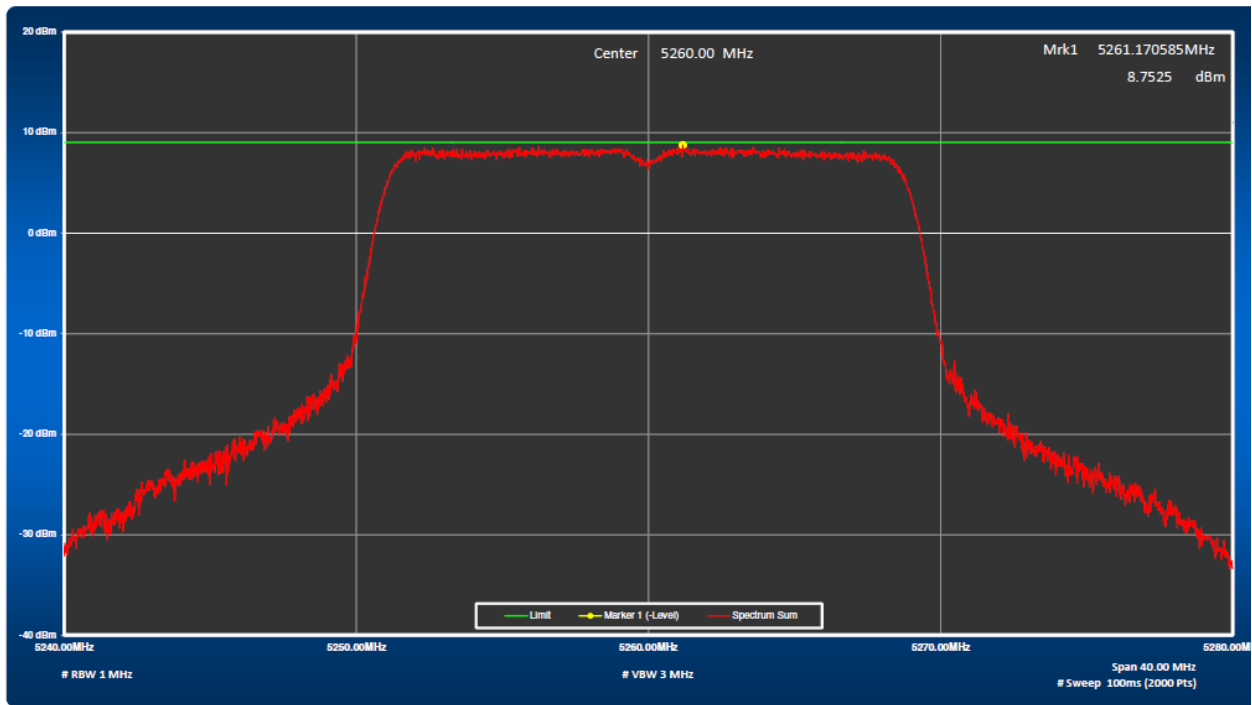


Figure 64: Power Spectral Density, 5260 MHz at 802.11n, Chain 3 – 6.5Mbps



**Figure 65:** Total Sum of Power Spectral Density, 5260 MHz at 802.11n, 6.5Mbps



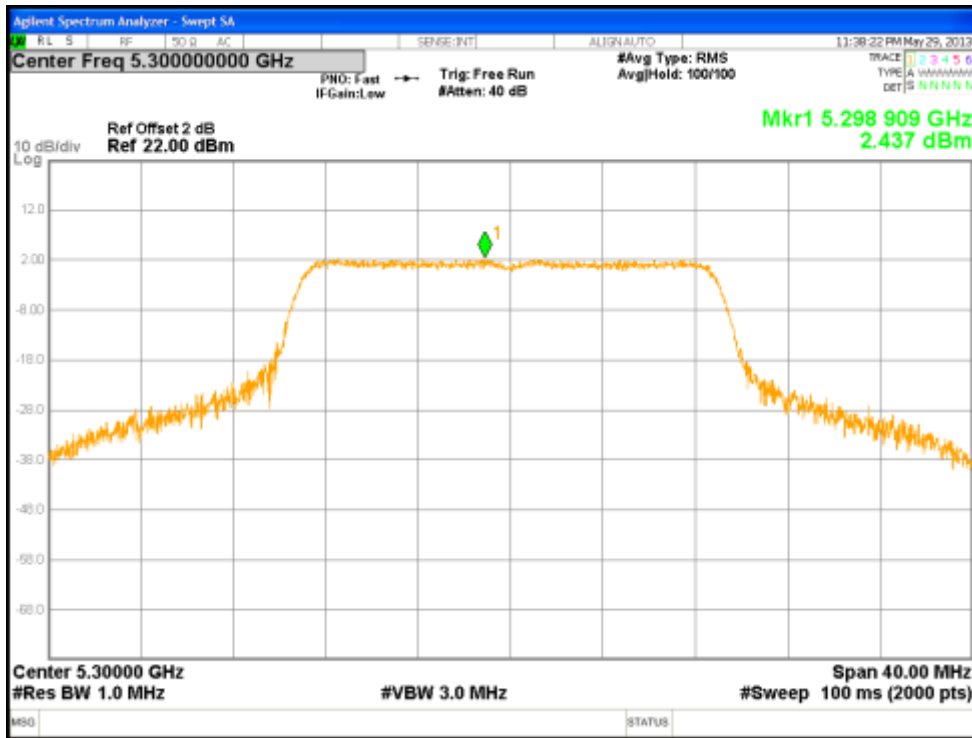


Figure 66: Power Spectral Density, 5300 MHz at 802.11n, Chain 0 – 6.5Mbps

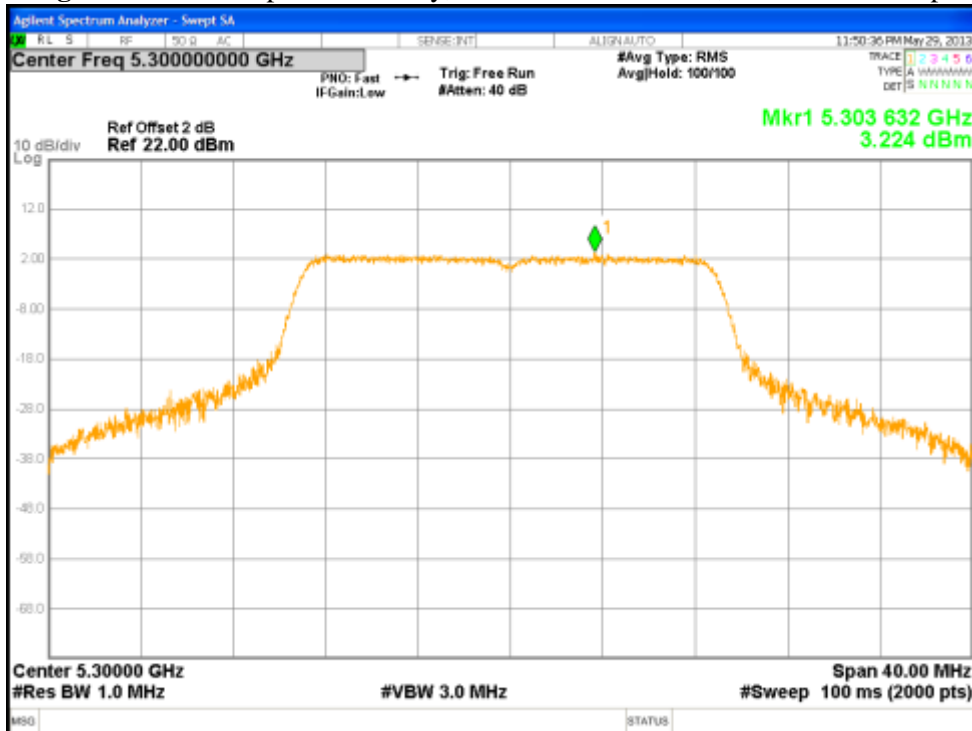


Figure 67: Power Spectral Density, 5300 MHz at 802.11n, Chain 1 – 6.5Mbps

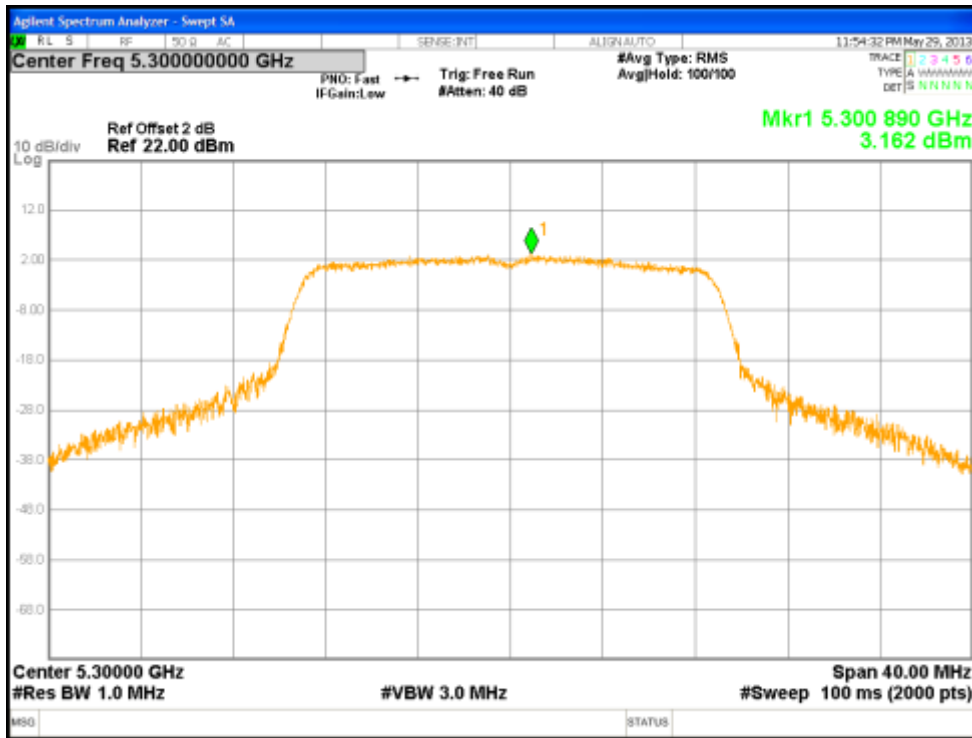


Figure 68: Power Spectral Density, 5300 MHz at 802.11n, Chain 2 – 6.5Mbps

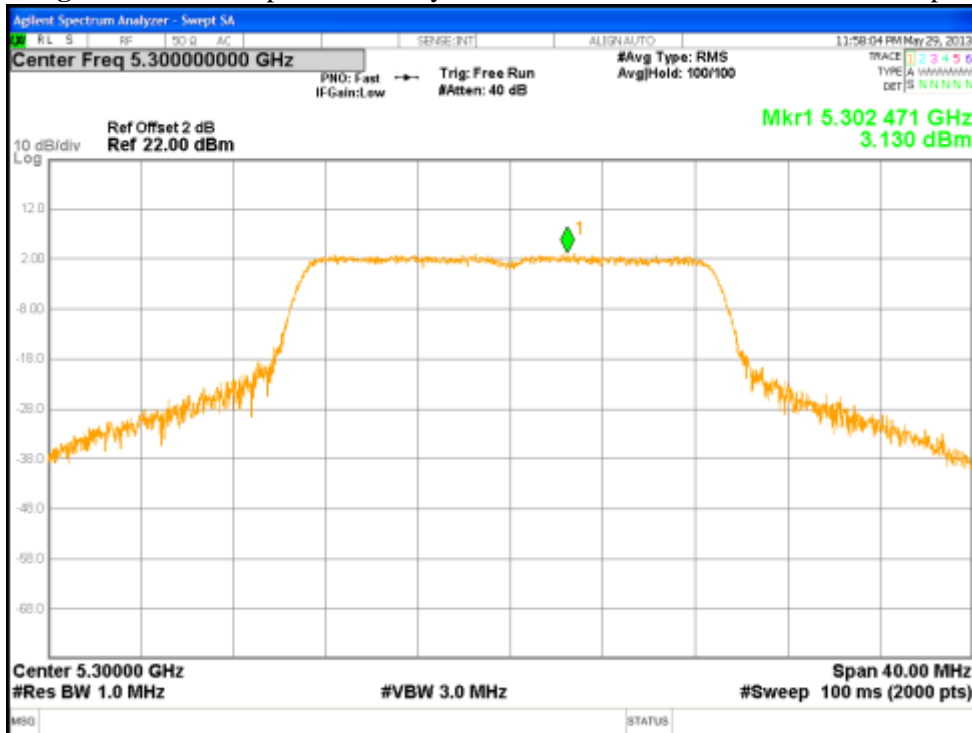


Figure 69: Power Spectral Density, 5300 MHz at 802.11n, Chain 3 – 6.5Mbps

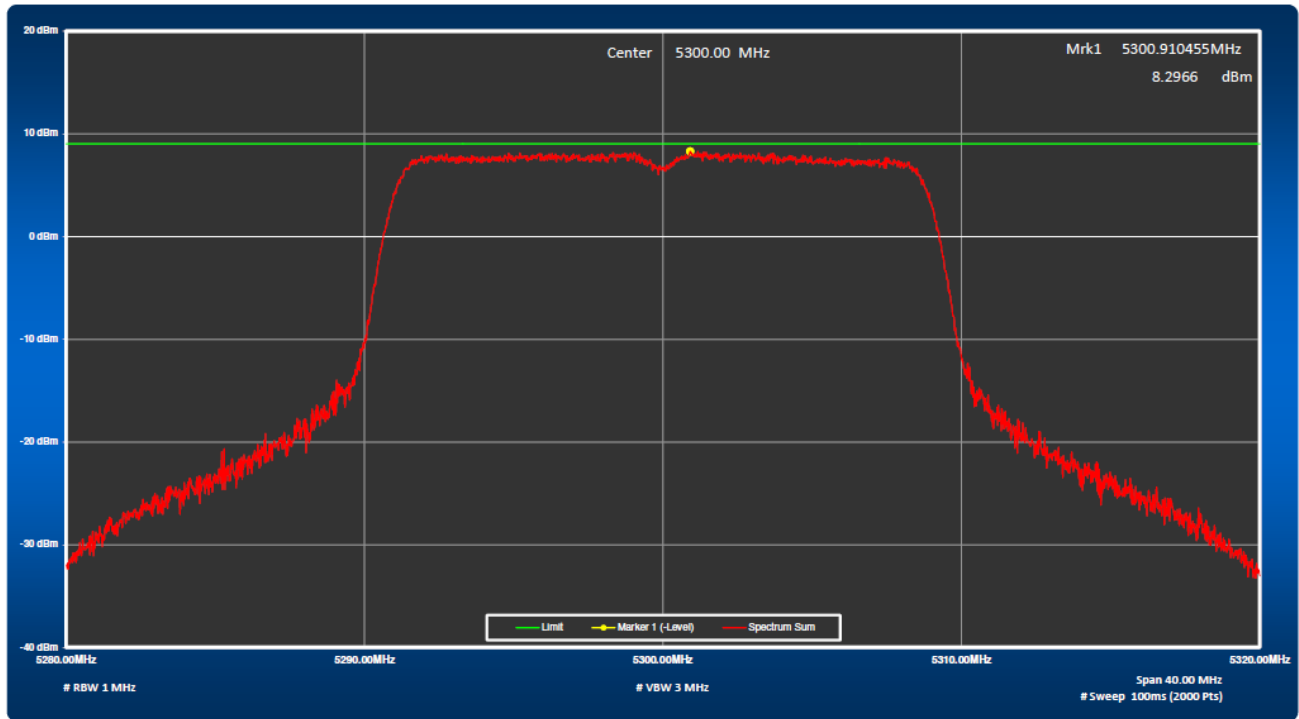


Figure 70: Total Sum of Power Spectral Density, 5300 MHz at 802.11n, 6.5Mbps

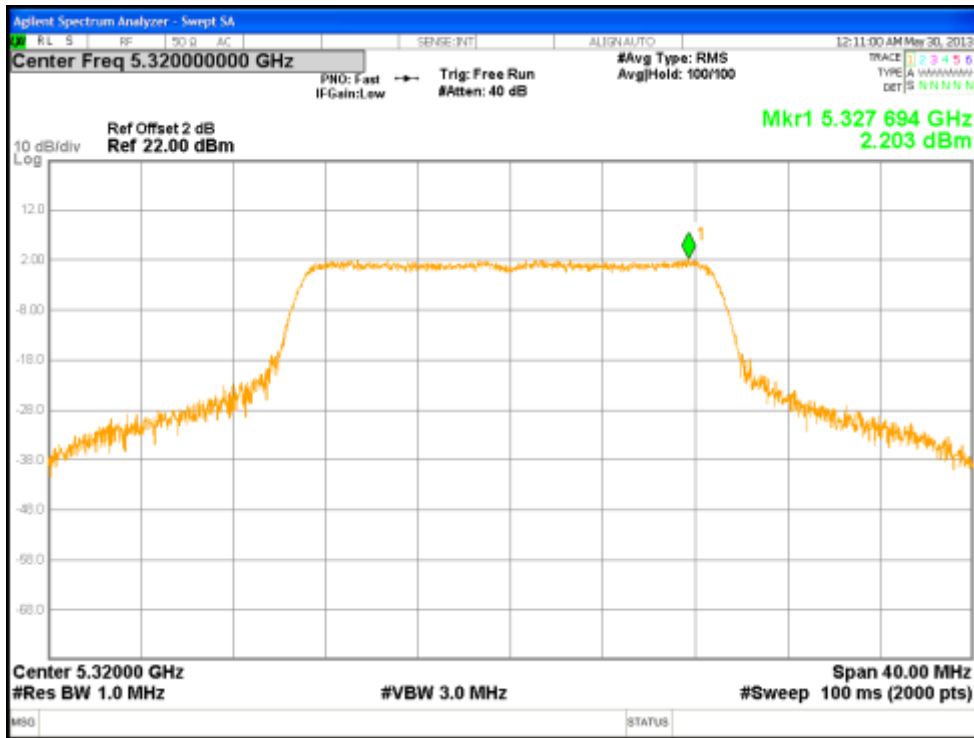


Figure 71: Power Spectral Density, 5320 MHz at 802.11n, Chain 0 – 6.5Mbps

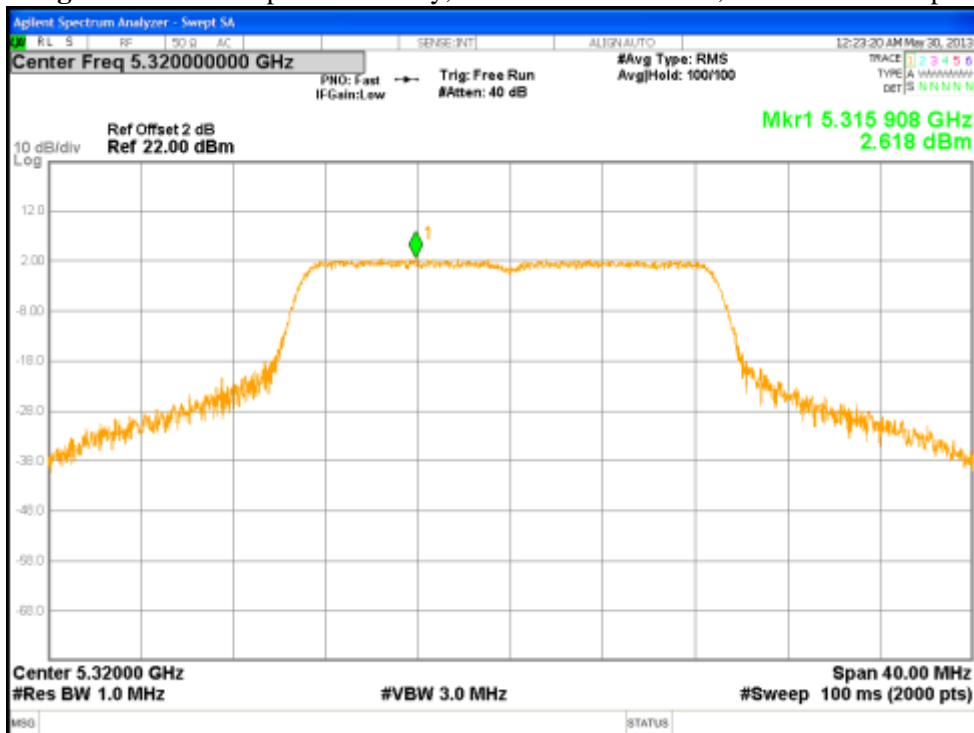


Figure 72: Power Spectral Density, 5320 MHz at 802.11n, Chain 1 – 6.5Mbps

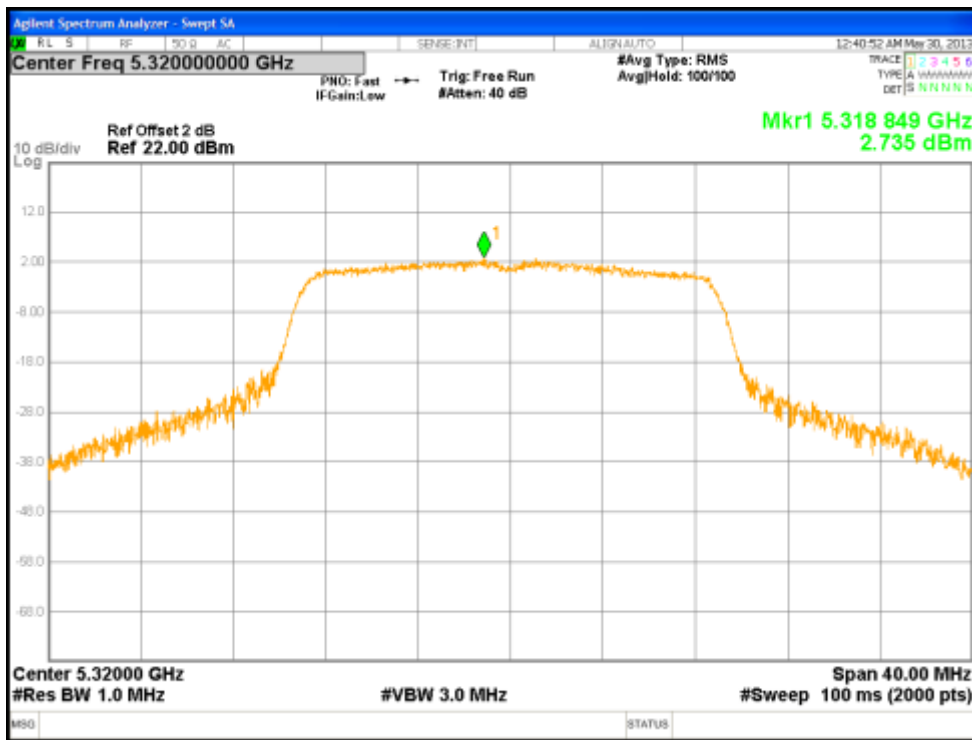


Figure 73: Power Spectral Density, 5320 MHz at 802.11n, Chain 2 – 6.5Mbps

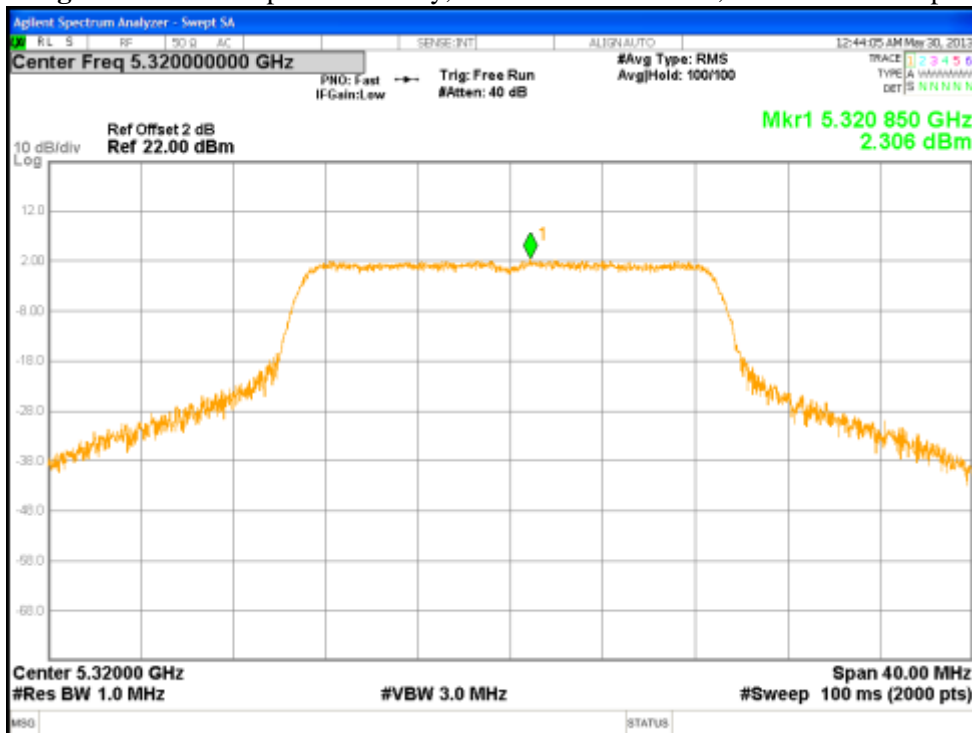
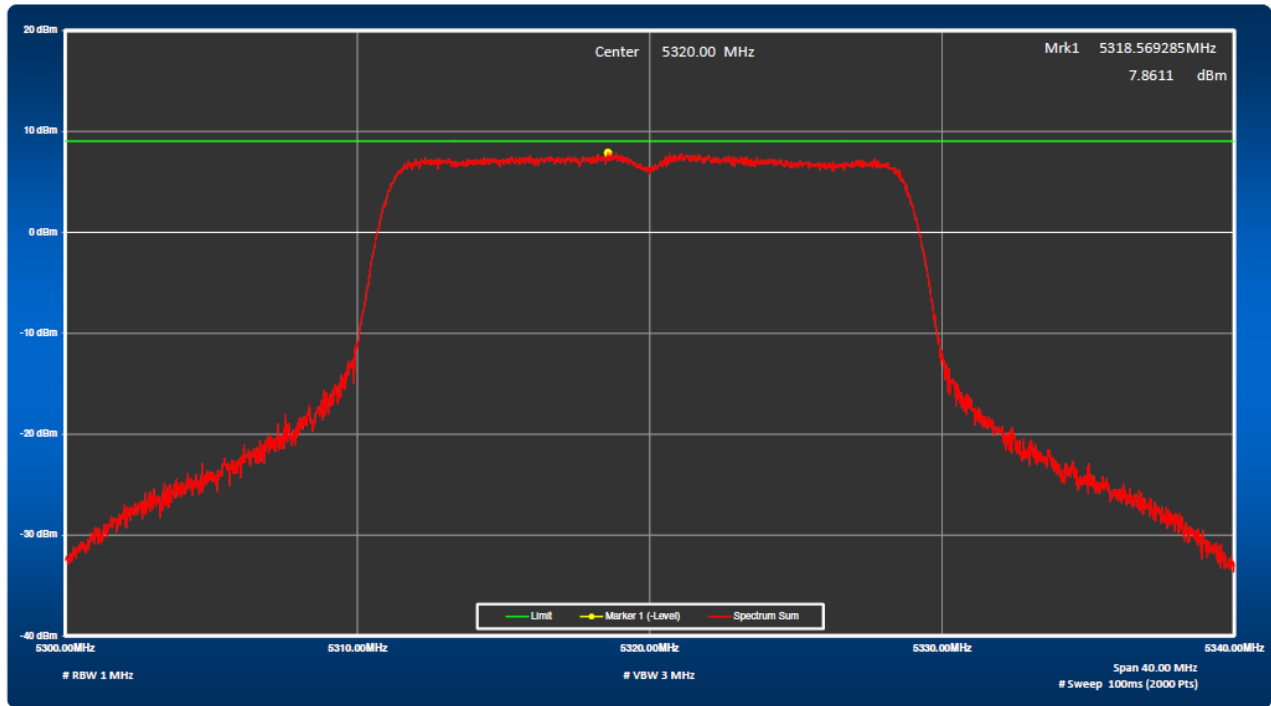


Figure 74: Power Spectral Density, 5320 MHz at 802.11n, Chain 3 – 6.5Mbps



**Figure 75:** Total Sum of Power Spectral Density, 5320 MHz at 802.11n, 6.5Mbps

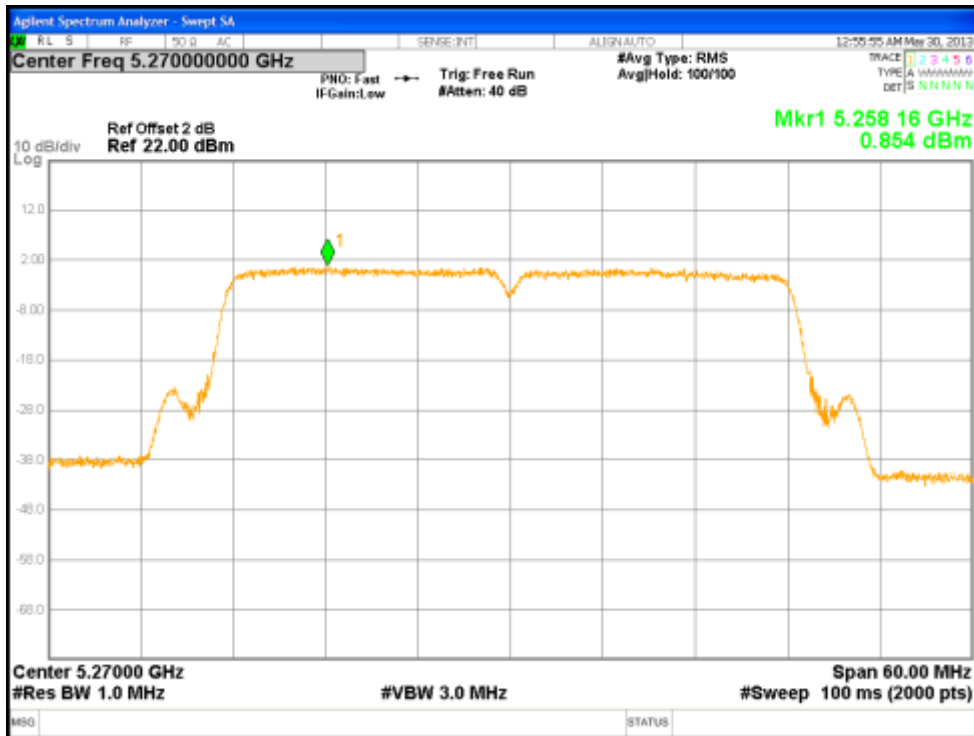


Figure 76: Power Spectral Density, 5270 MHz at 802.11n, Chain 0 – 13.5Mbps

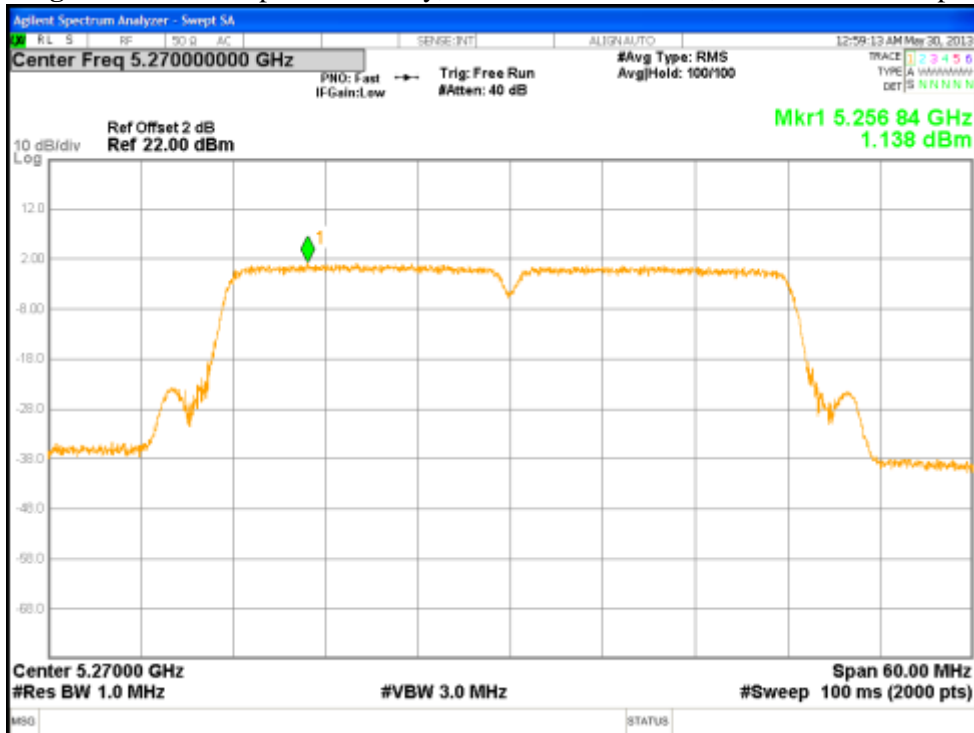


Figure 77: Power Spectral Density, 5270 MHz at 802.11n, Chain 1 – 13.5Mbps

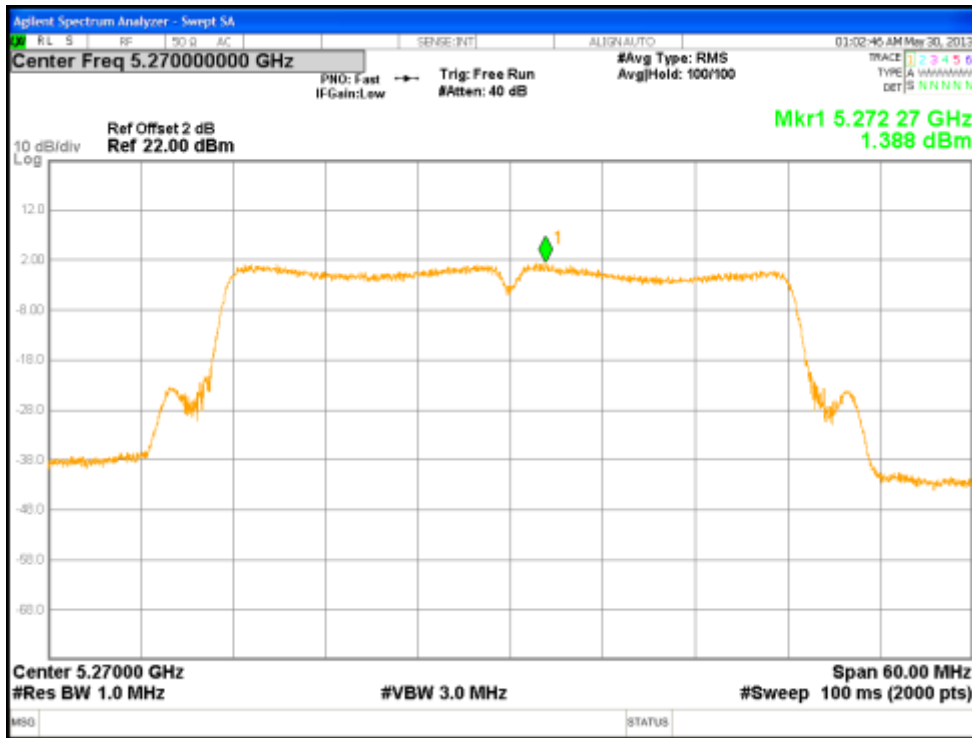


Figure 78: Power Spectral Density, 5270 MHz at 802.11n, Chain 2 – 13.5Mbps

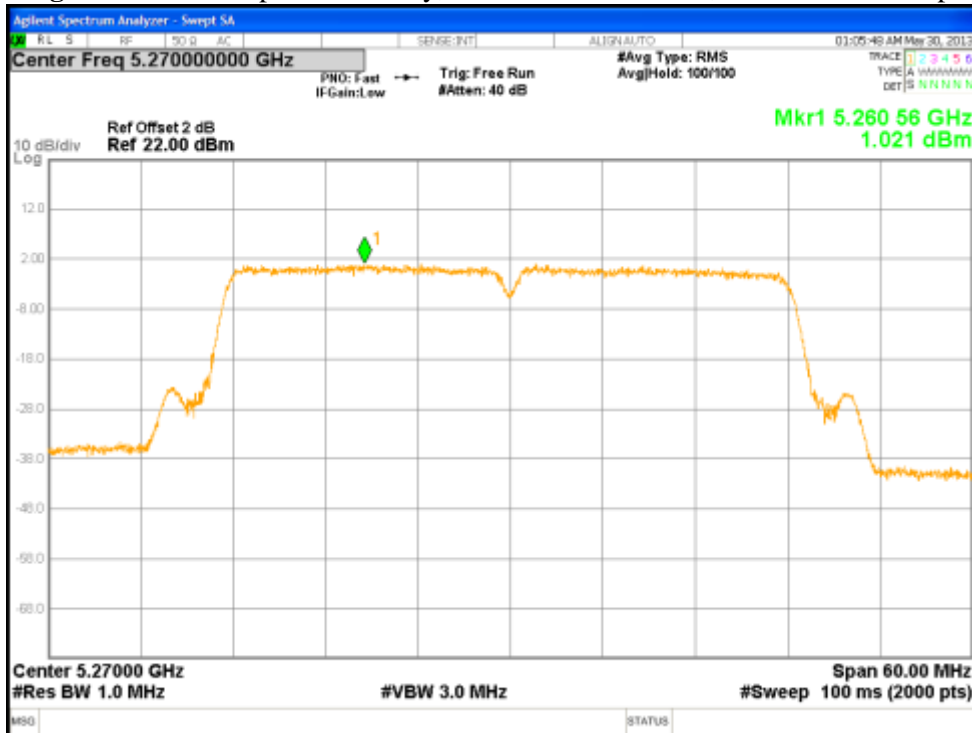
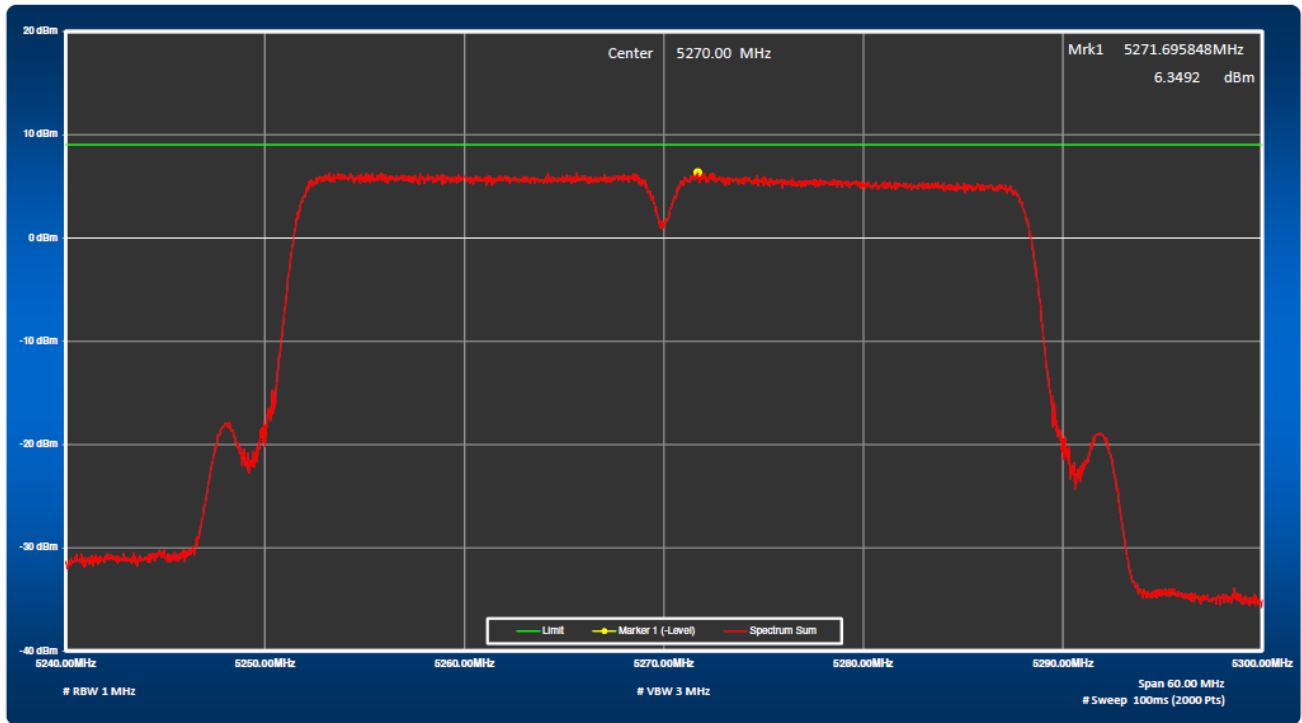


Figure 79: Power Spectral Density, 5270 MHz at 802.11n, Chain 3 – 13.5Mbps





**Figure 80:** Total Sum of Power Spectral Density, 5270 MHz at 802.11n, 13.5Mbps

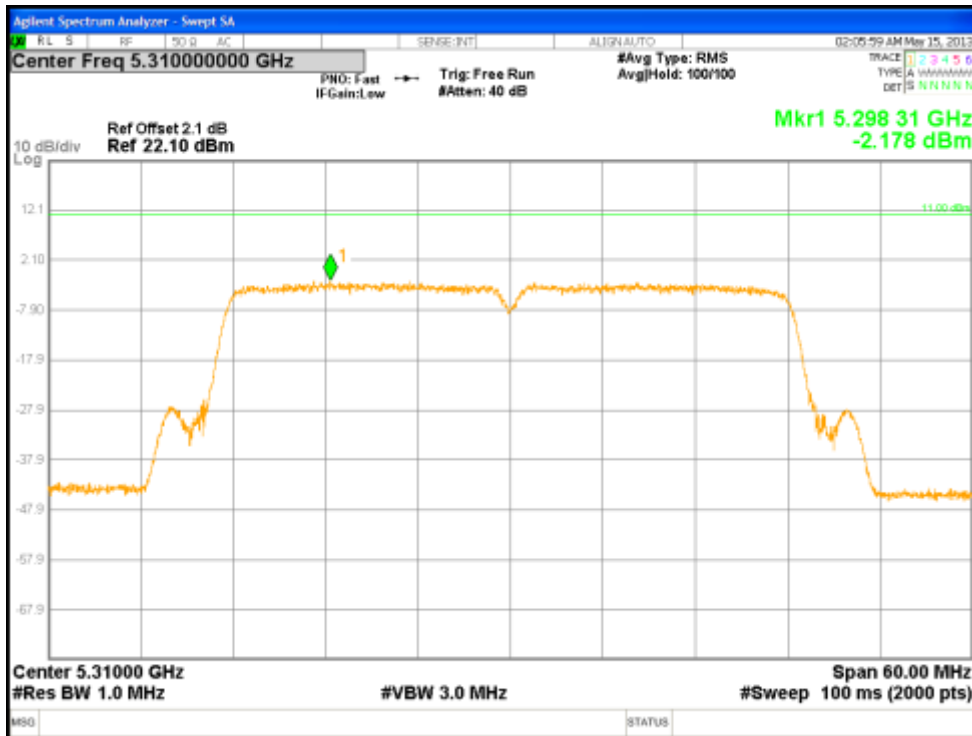


Figure 81: Power Spectral Density, 5310 MHz at 802.11n, Chain 0 – 13.5Mbps

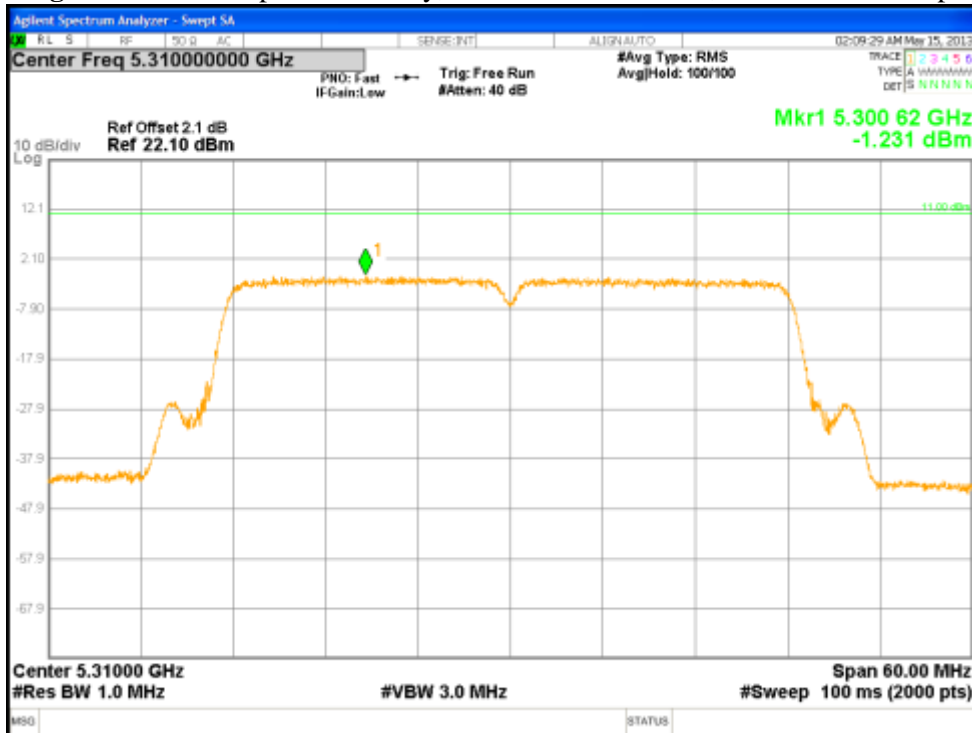


Figure 82: Power Spectral Density, 5310 MHz at 802.11n, Chain 1 – 13.5Mbps

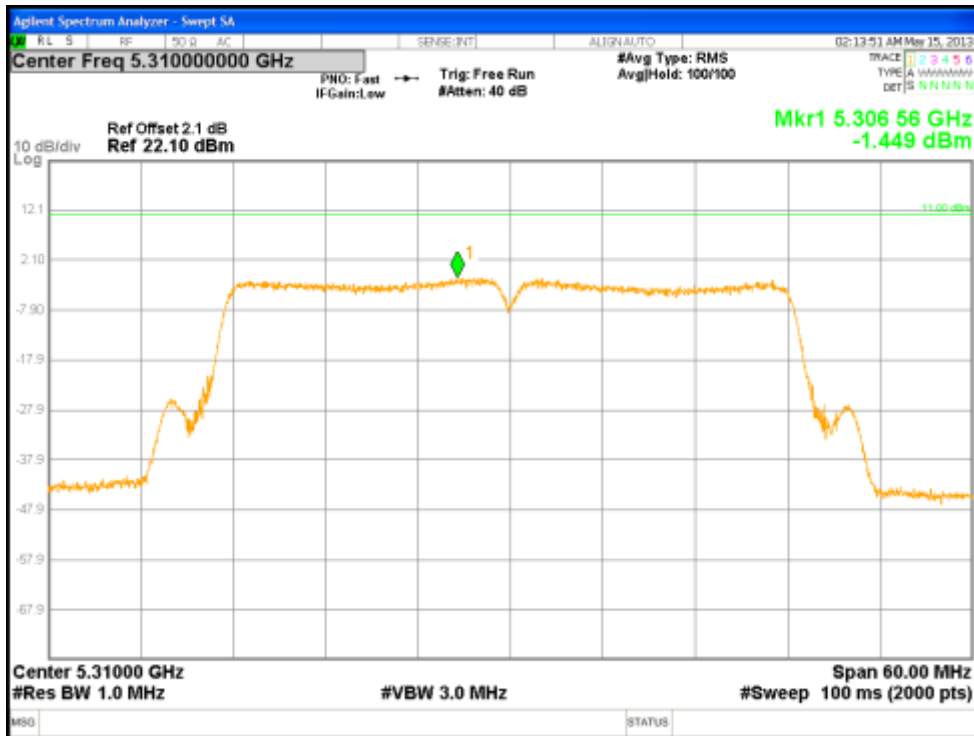


Figure 83: Power Spectral Density, 5310 MHz at 802.11n, Chain 2 – 13.5Mbps

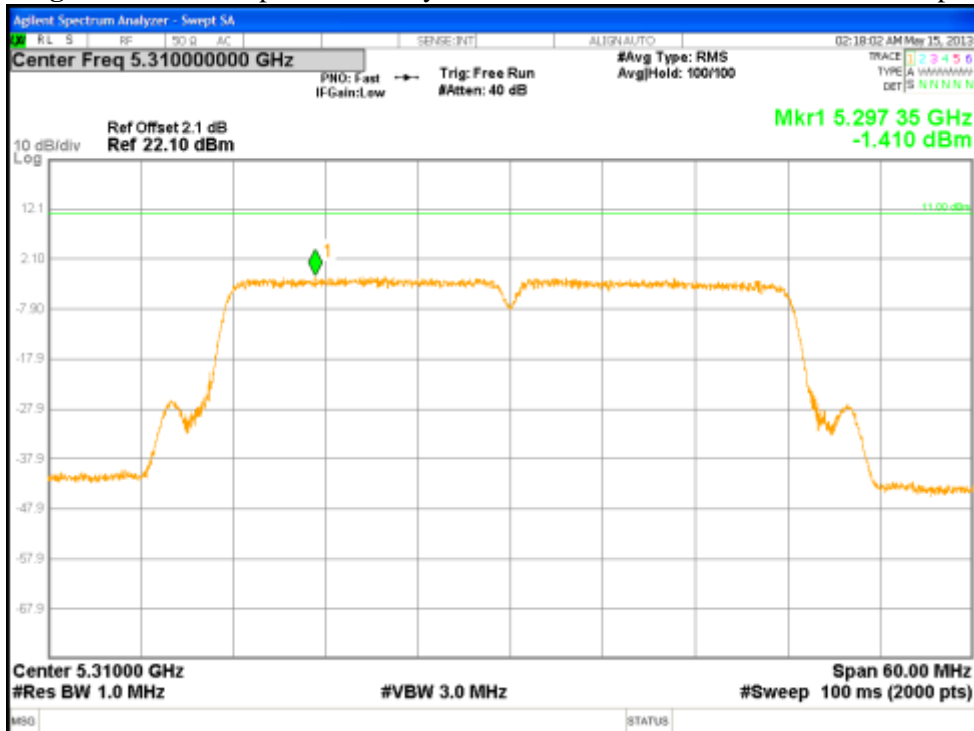


Figure 84: Power Spectral Density, 5310 MHz at 802.11n, Chain 3 – 13.5Mbps

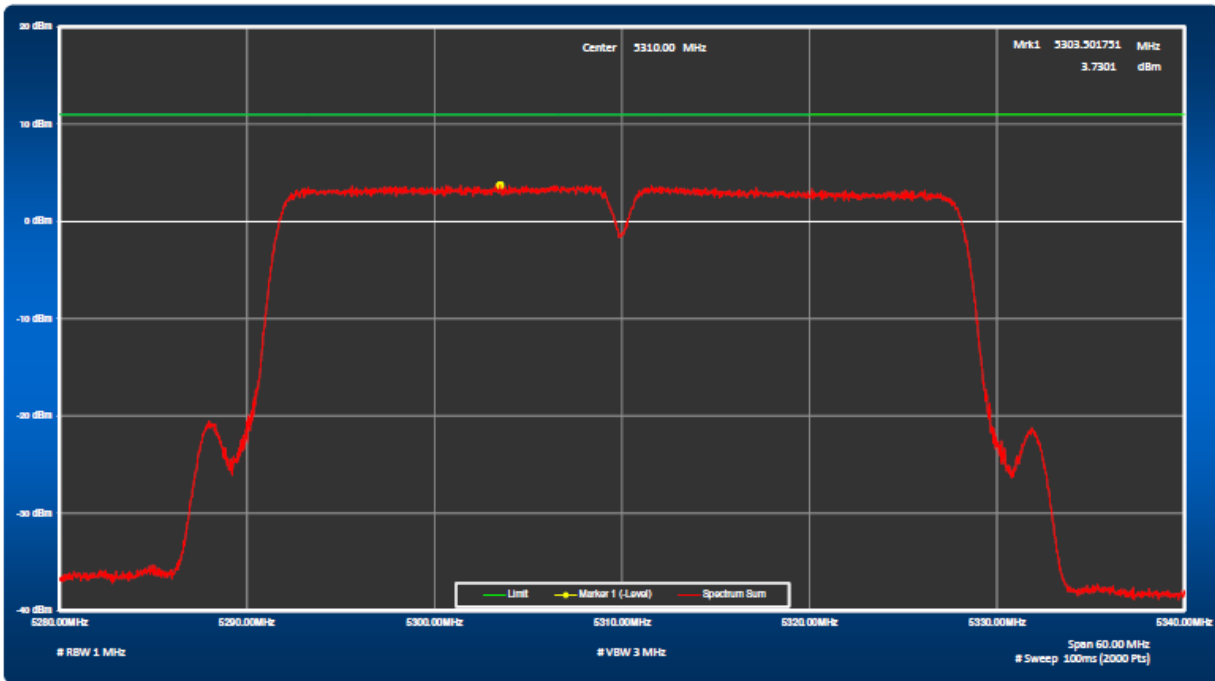


Figure 85: Total Sum of Power Spectral Density, 5310 MHz at 802.11n, 13.5Mbps

## 4.5 Transmitter Spurious Emissions

*Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.407(b), RSS 210 Sect. A.9.2*

### 4.5.1 Test Methodology

#### 4.5.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Pres-scans were performed to determine the worst axis, data rate/ chains.

#### 4.5.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

The final scans performed on the worst axis, Y-Axis, for three operating channels;

6.5 Mbit/s for 802.11n HT20 Mode: 5260 MHz, 5300 MHz, 5320 MHz

13.5 Mbit/s for 802.11n HT40 Mode: 5270 MHz, 5310 MHz

#### 4.5.1.3 Deviations

None.

#### 4.5.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2012 and RSS 210 A1.1.2 2010.

| Frequency (MHz) | Field strength<br>(microvolts/meter) | Measurement<br>distance<br>(meters) |
|-----------------|--------------------------------------|-------------------------------------|
| 0.009-0.490     | 2400/F (kHz)                         | 300                                 |
| 0.490-1.705     | 24000/F (kHz)                        | 30                                  |
| 1.705-30.0      | 30                                   | 30                                  |
| 30-88           | 100 **                               | 3                                   |
| 88-216          | 150 **                               | 3                                   |
| 216-960         | 200 **                               | 3                                   |
| Above 960       | 500                                  | 3                                   |

According to CFR47 15.407 (b), all harmonics and spurious emissions which are outside the 5150 MHz - 5250 MHz, 5250 MHz – 5350 MHz, or 5470 MHz – 5725MHz shall not exceed -27 dBm/MHz. This is equivalent to 68.2 dBuV/m at 3 meter distance.


#### 4.5.3 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 7: Transmit Spurious Emission at Band-Edge Requirements**


| <b>Test Conditions:</b> Radiated Measurement, Normal Temperature and Voltage only                                                                                                                                                                                                                                                                                                                                         |                |                |                |                                         |      |            |            |                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|----------------|-----------------------------------------|------|------------|------------|-----------------------|
| <b>Antenna Type:</b> Integrated                                                                                                                                                                                                                                                                                                                                                                                           |                |                |                | <b>Power Setting:</b> See test plan     |      |            |            |                       |
| <b>Max. Directional Gain:</b> + 8 dBi                                                                                                                                                                                                                                                                                                                                                                                     |                |                |                | <b>Signal State:</b> Modulated at 100%. |      |            |            |                       |
| <b>Ambient Temp.:</b> 23 °C                                                                                                                                                                                                                                                                                                                                                                                               |                |                |                | <b>Relative Humidity:</b> 29%           |      |            |            |                       |
| <b>Band-Edge Results</b>                                                                                                                                                                                                                                                                                                                                                                                                  |                |                |                |                                         |      |            |            |                       |
| Freq. (MHz)                                                                                                                                                                                                                                                                                                                                                                                                               | Level (dBuV/m) | Polarity (H/V) | Limit (dBuV/m) | Margin (dB)                             | Det. | Table Deg. | Tower (cm) | Note                  |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 63.02          | H              | 74.00          | -10.98                                  | Pk   | 264        | 318        | HT20-5260MHz at 18dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 44.02          | H              | 54.00          | -9.98                                   | Ave  | 264        | 318        | HT20-5260MHz at 18dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 63.96          | V              | 74.00          | -10.04                                  | Pk   | 85         | 142        | HT20-5260MHz at 18dBm |
| 5150                                                                                                                                                                                                                                                                                                                                                                                                                      | 45.40          | V              | 54.00          | -8.60                                   | Ave  | 85         | 142        | HT20-5260MHz at 18dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 63.80          | H              | 74.00          | -10.20                                  | Pk   | 266        | 309        | HT20-5320MHz at 18dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 49.84          | H              | 54.00          | -4.16                                   | Ave  | 266        | 309        | HT20-5320MHz at 18dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 66.23          | V              | 74.00          | -7.77                                   | Pk   | 101        | 169        | HT20-5320MHz at 18dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 49.81          | V              | 54.00          | -4.19                                   | Ave  | 101        | 169        | HT20-5320MHz at 18dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 65.22          | H              | 74.00          | -8.78                                   | Pk   | 261        | 221        | HT40-5270MHz at 18dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 45.83          | H              | 54.00          | -8.17                                   | Ave  | 261        | 221        | HT40-5270MHz at 18dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 64.05          | V              | 74.00          | -9.95                                   | Pk   | 120        | 180        | HT40-5270MHz at 18dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 45.02          | V              | 54.00          | -8.98                                   | Ave  | 120        | 180        | HT40-5270MHz at 18dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 68.45          | H              | 74.00          | -5.55                                   | Pk   | 259        | 241        | HT40-5310MHz at 14dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 53.32          | H              | 54.00          | -0.68                                   | Ave  | 259        | 241        | HT40-5310MHz at 14dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 65.92          | V              | 74.00          | -8.08                                   | Pk   | 295        | 164        | HT40-5310MHz at 14dBm |
| 5350                                                                                                                                                                                                                                                                                                                                                                                                                      | 48.95          | V              | 54.00          | -5.05                                   | Ave  | 295        | 164        | HT40-5310MHz at 14dBm |
| <p><b>Note:</b></p> <ol style="list-style-type: none"> <li>1. Band-edge frequencies were taken at 5350MHz since the band edge at 5250 MHz is not a restricted band.</li> <li>2. All the band-edge measurements met the restricted band requirements of CFR47 15.205.</li> <li>3. It is also complied with the -27 dBm/MHz (68.2dBuV/m at 3m) requirements as stated in CFR47 15.407 (b) (1) to 15.407 (b) (3).</li> </ol> |                |                |                |                                         |      |            |            |                       |

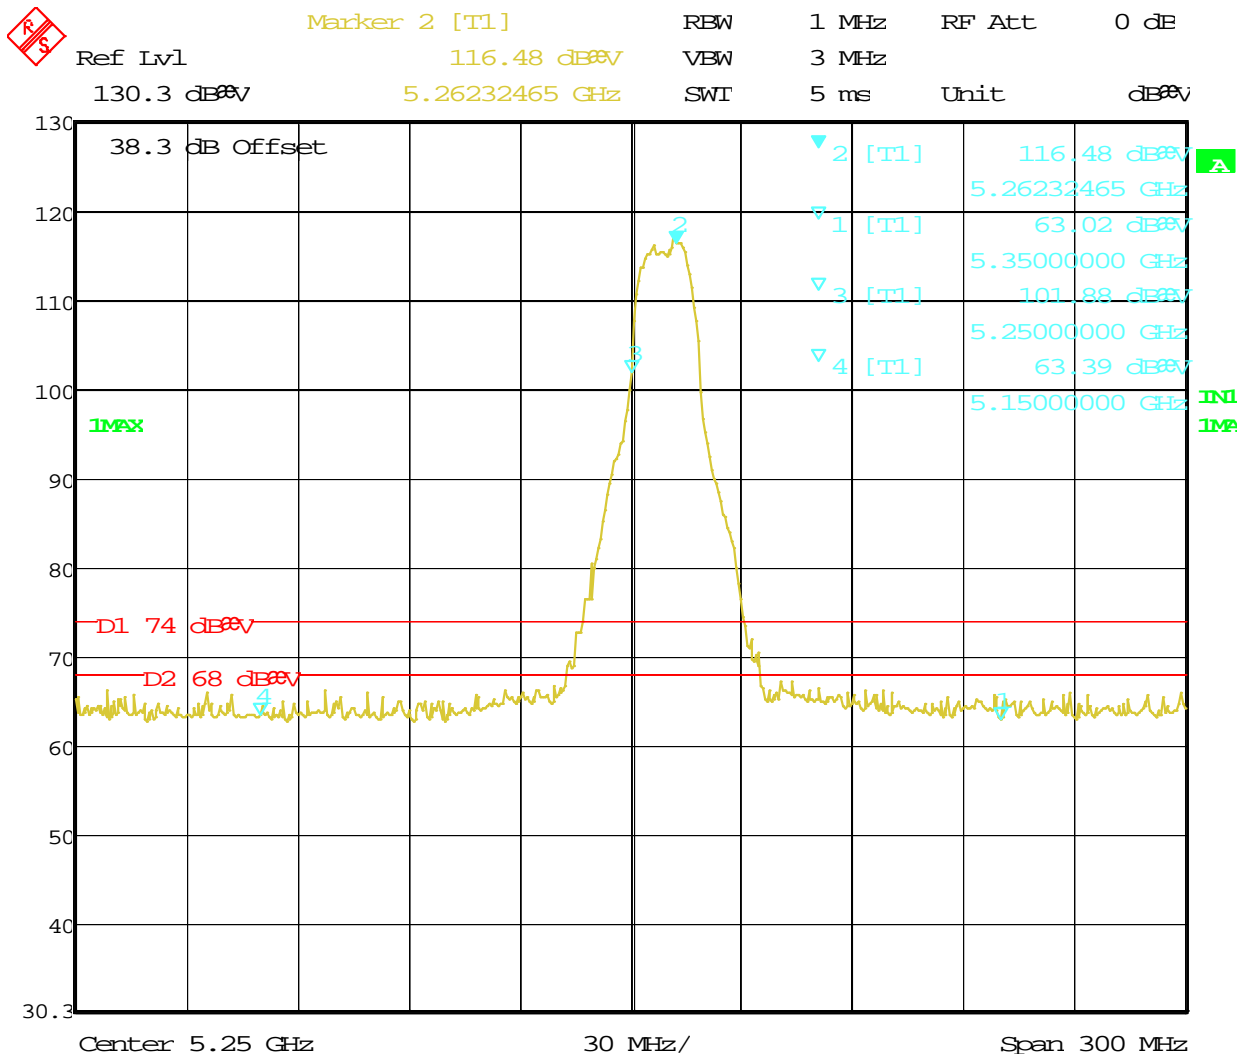

Date: 14.MAY.2013 12:54:00


**Figure 86:** Radiated Emission at the Edge for Channel 5260 MHz at 6.5Mbps – Horz. (Peak)



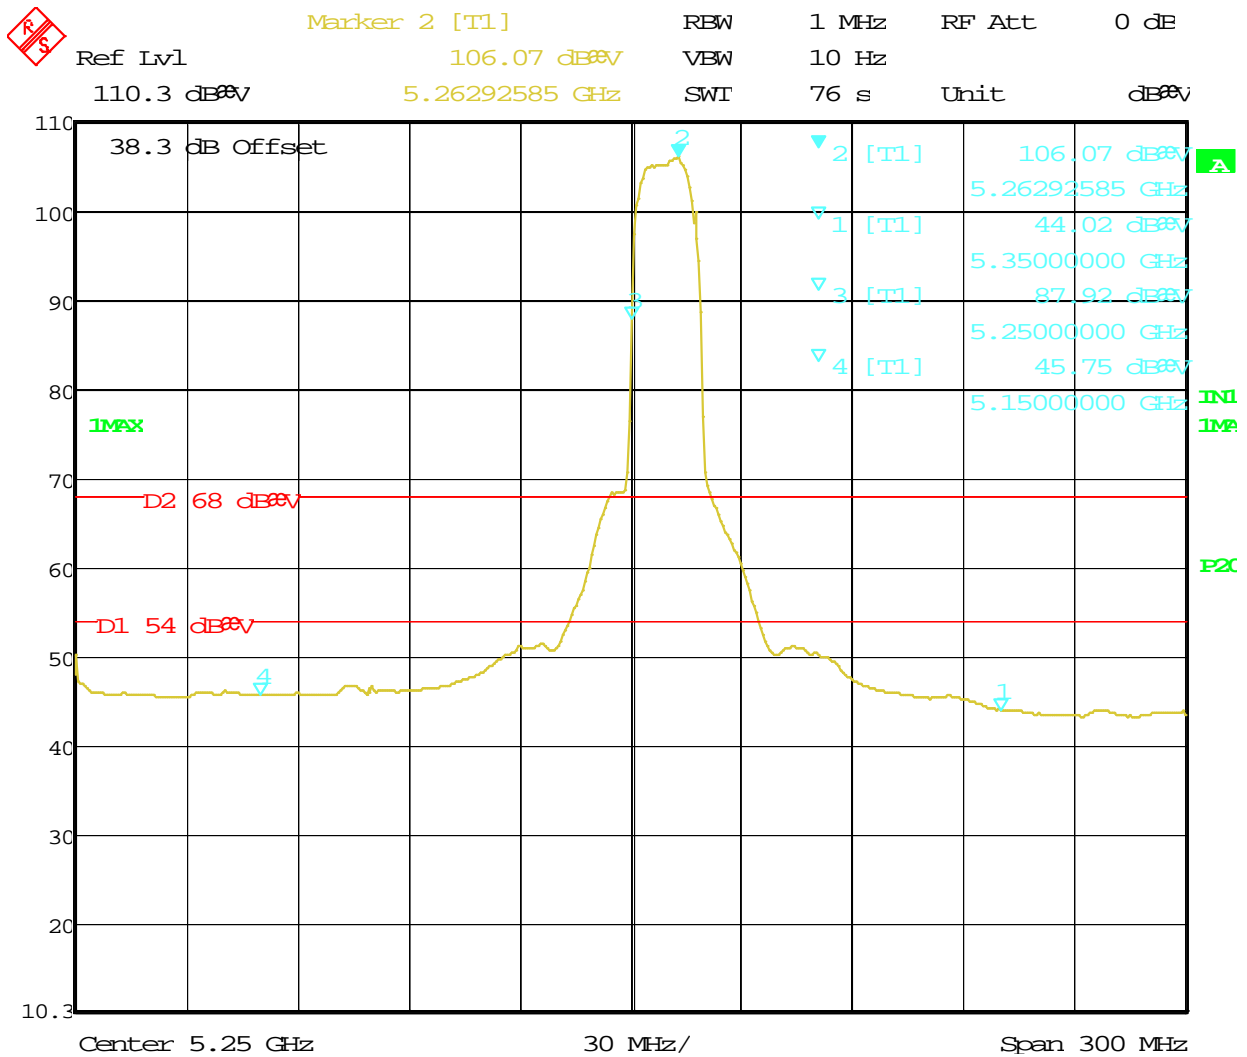


Date: 14.MAY.2013 12:55:51

**Figure 87:** Radiated Emission at the Edge for Channel 5260 MHz at 6.5Mbps – Horz. (Ave.)

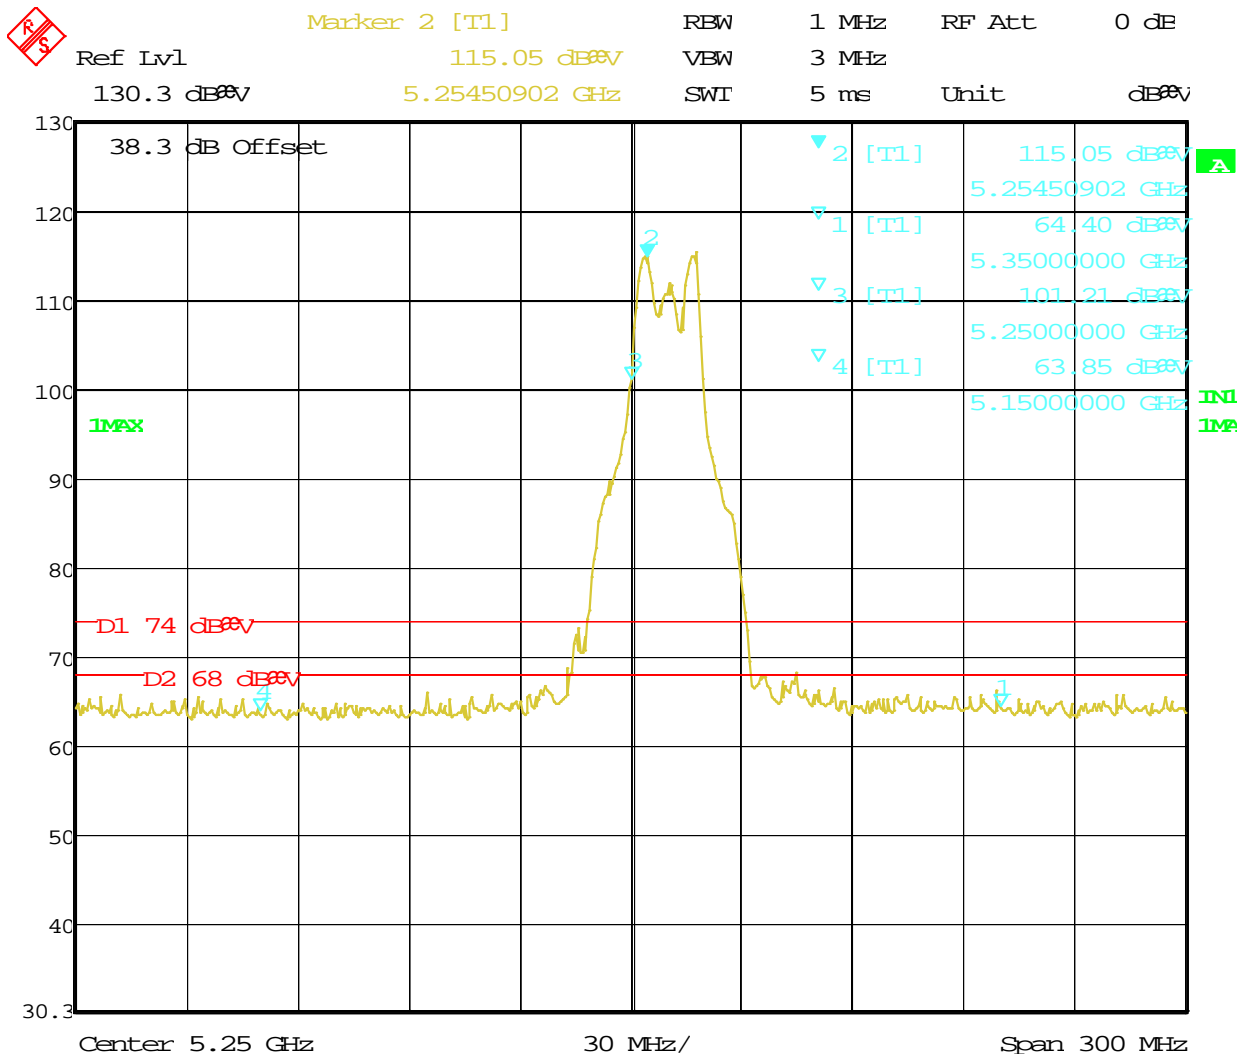


Date: 14.MAY.2013 12:27:51

**Figure 88:** Radiated Emission at the Edge for Channel 5260 MHz at 6.5Mbps – Vert. (Peak)

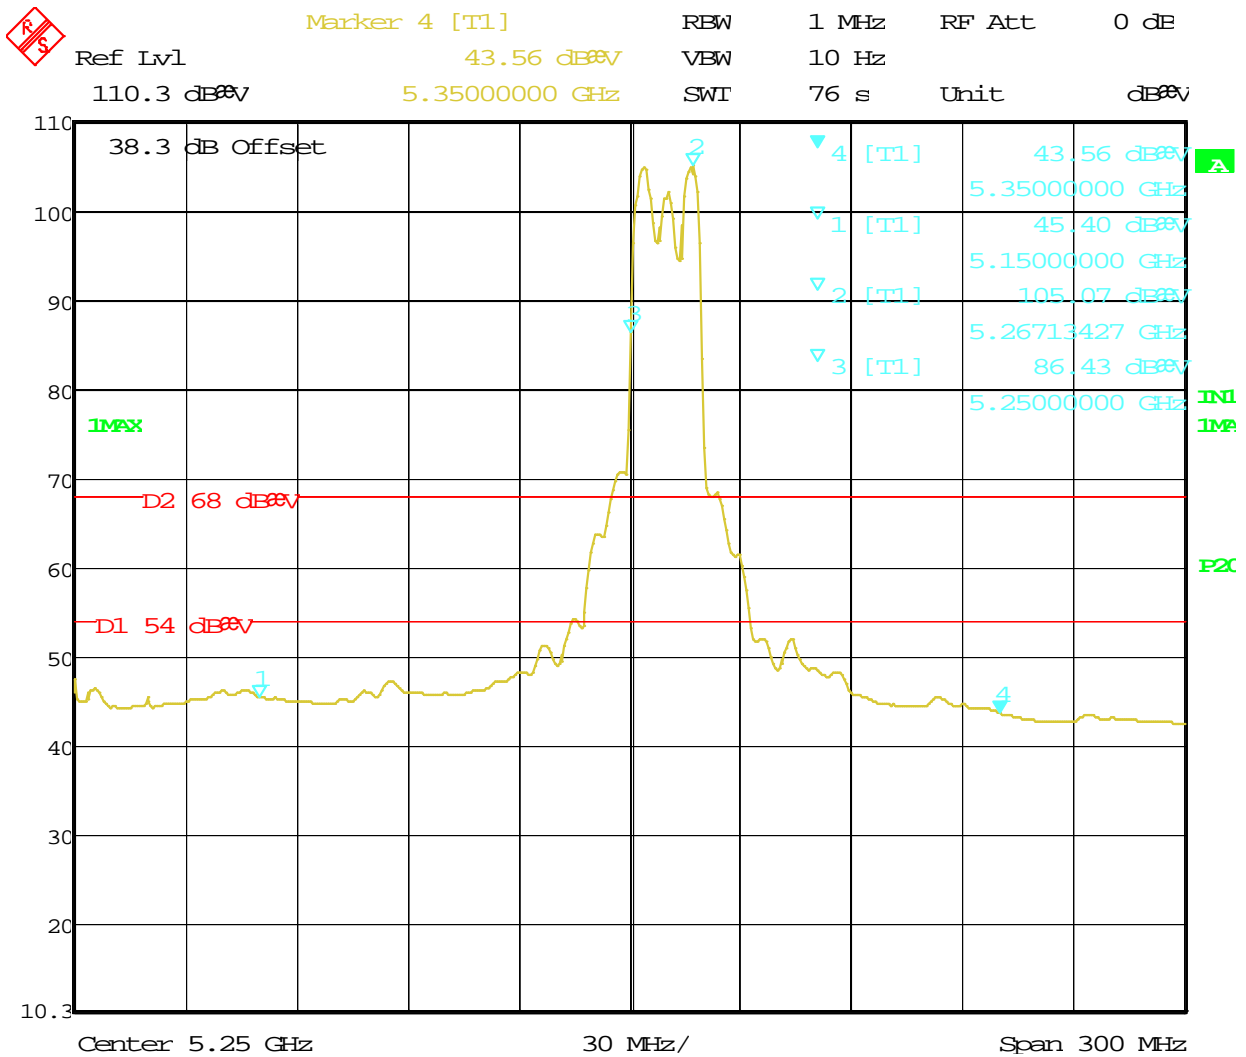


Date: 14.MAY.2013 12:29:58

**Figure 89:** Radiated Emission at the Edge for Channel 5260 MHz at 6.5Mbps – Vert. (Ave.)

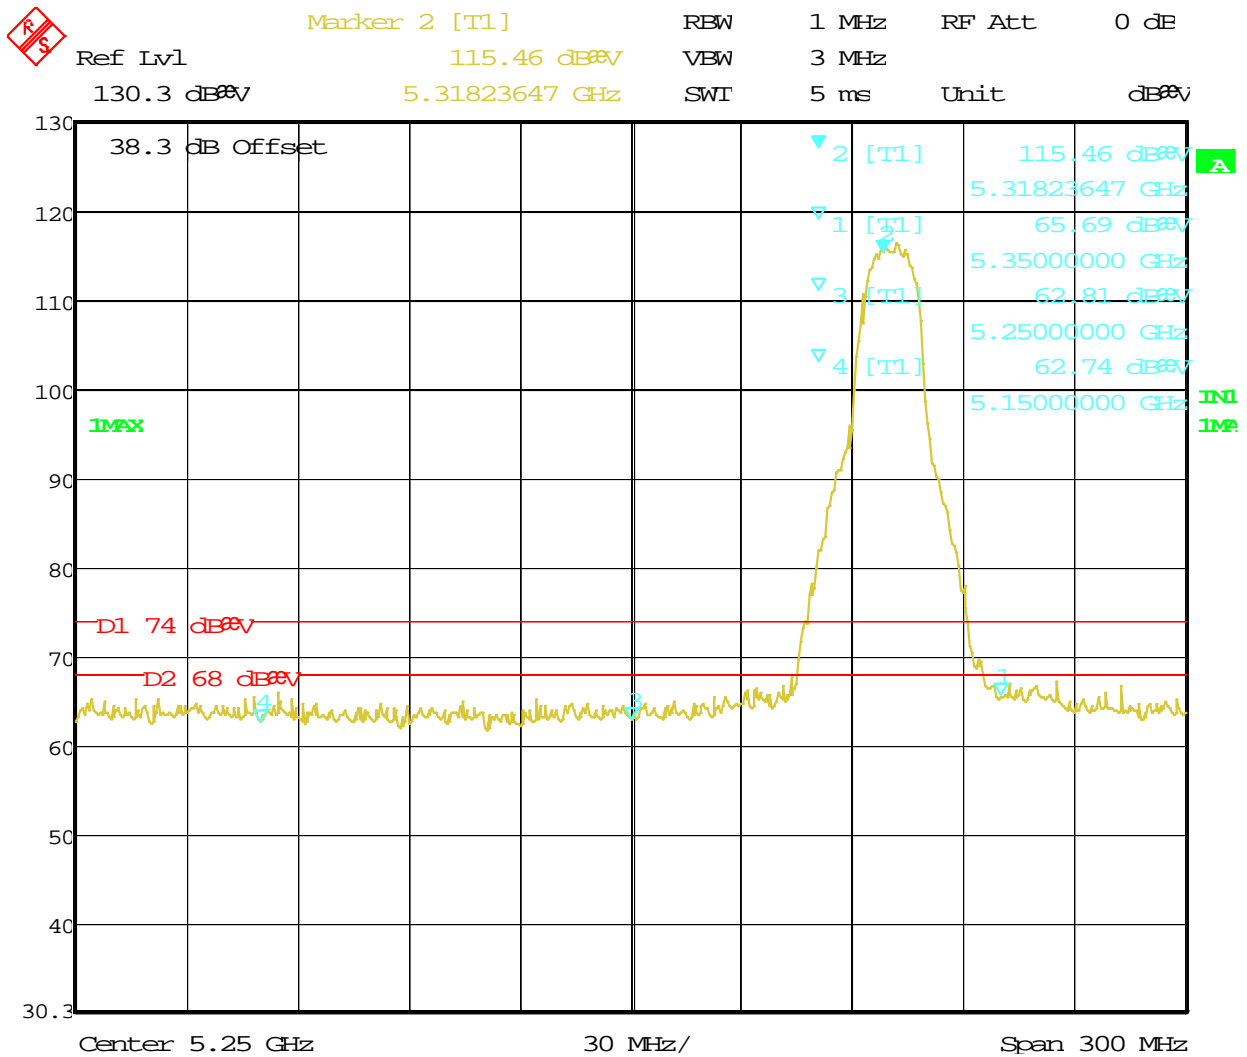


Date: 14.MAY.2013 12:37:31

**Figure 90:** Radiated Emission at the Edge for Channel 5320 MHz at 6.5Mbps – Horz. (Peak)

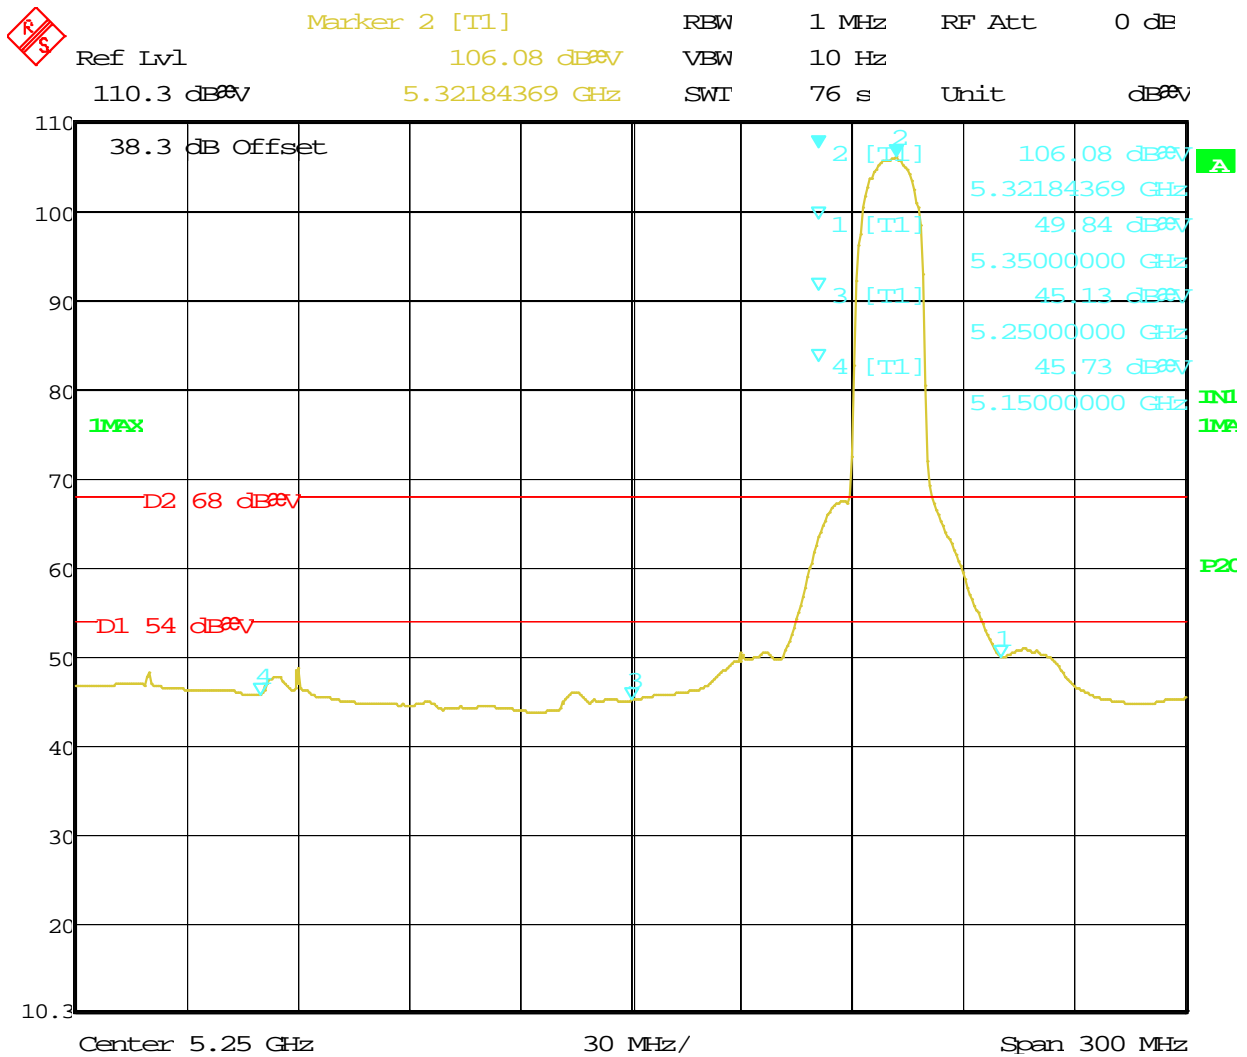


Date: 14.MAY.2013 12:41:16

**Figure 91:** Radiated Emission at the Edge for Channel 5320 MHz at 6.5Mbps – Horz. (Ave.)

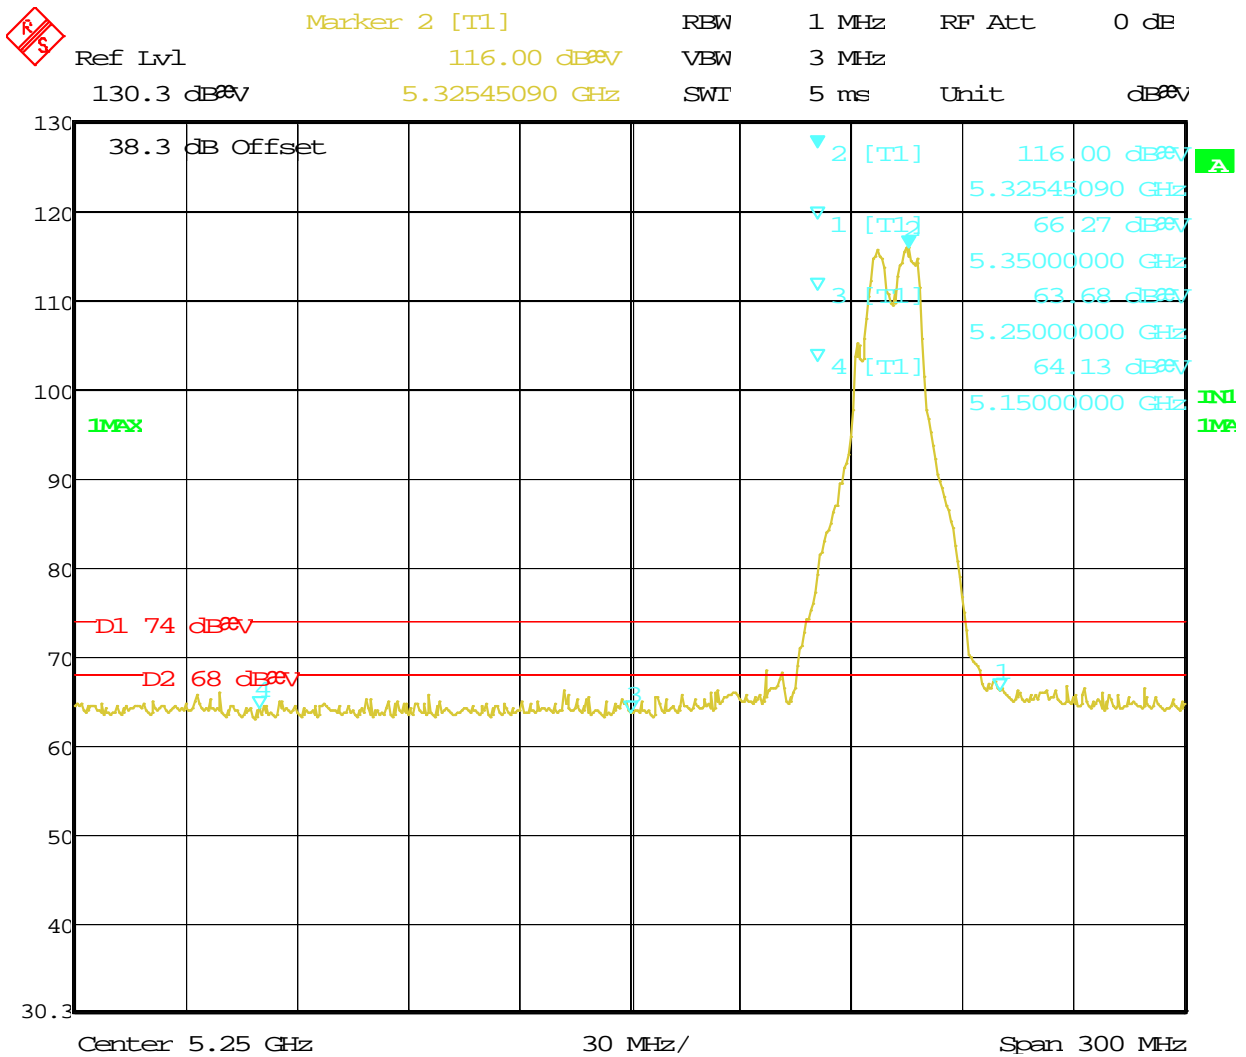


Date: 14.MAY.2013 12:49:17

**Figure 92:** Radiated Emission at the Edge for Channel 5320 MHz at 6.5Mbps – Vert. (Peak)

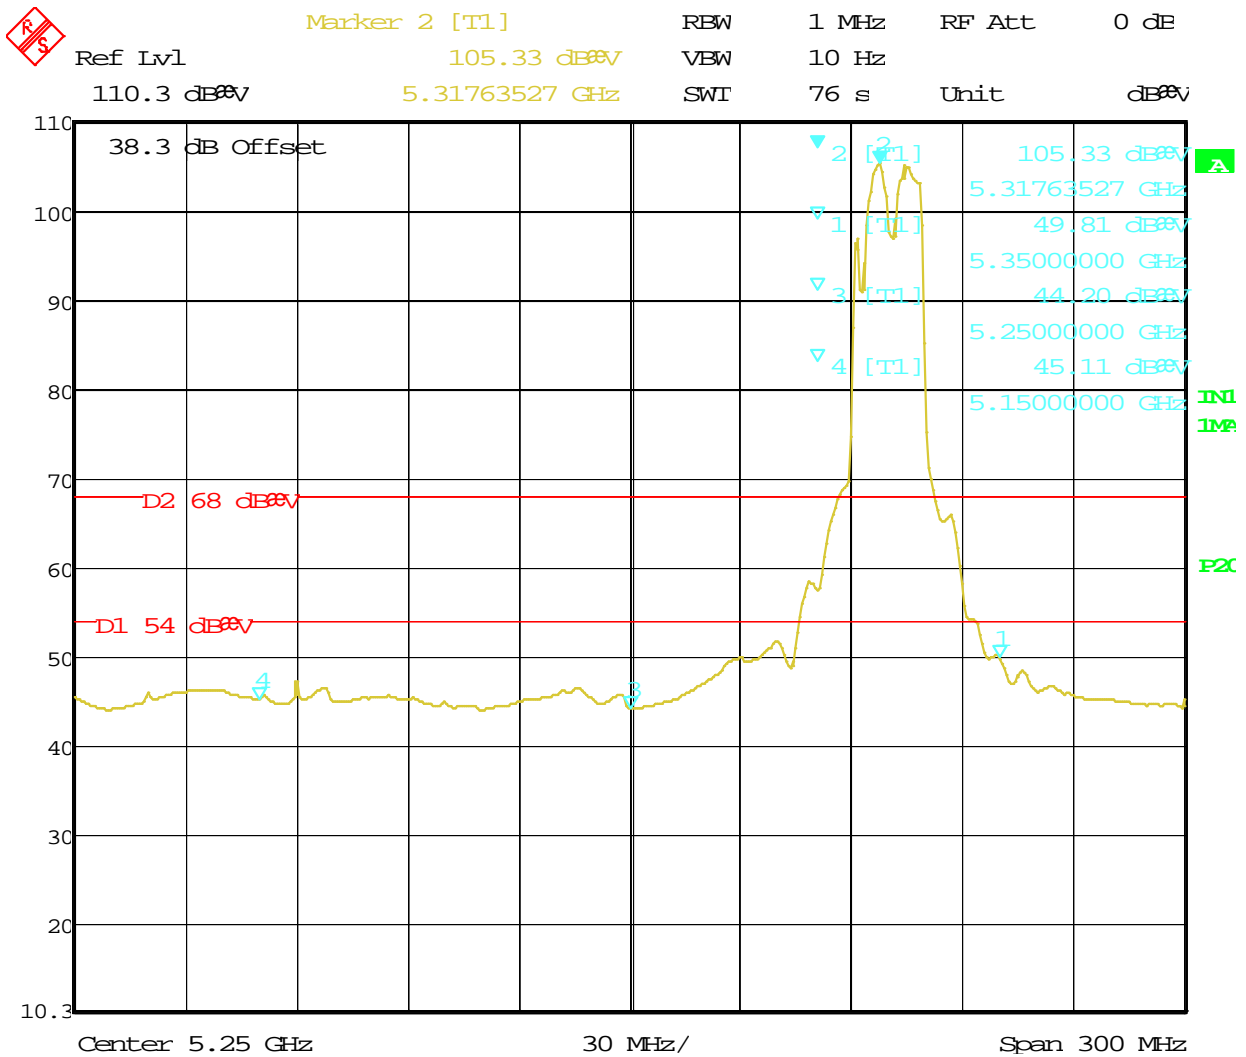

Date: 14.MAY.2013 12:50:55


**Figure 93:** Radiated Emission at the Edge for Channel 5320 MHz at 6.5Mbps – Vert. (Ave.)

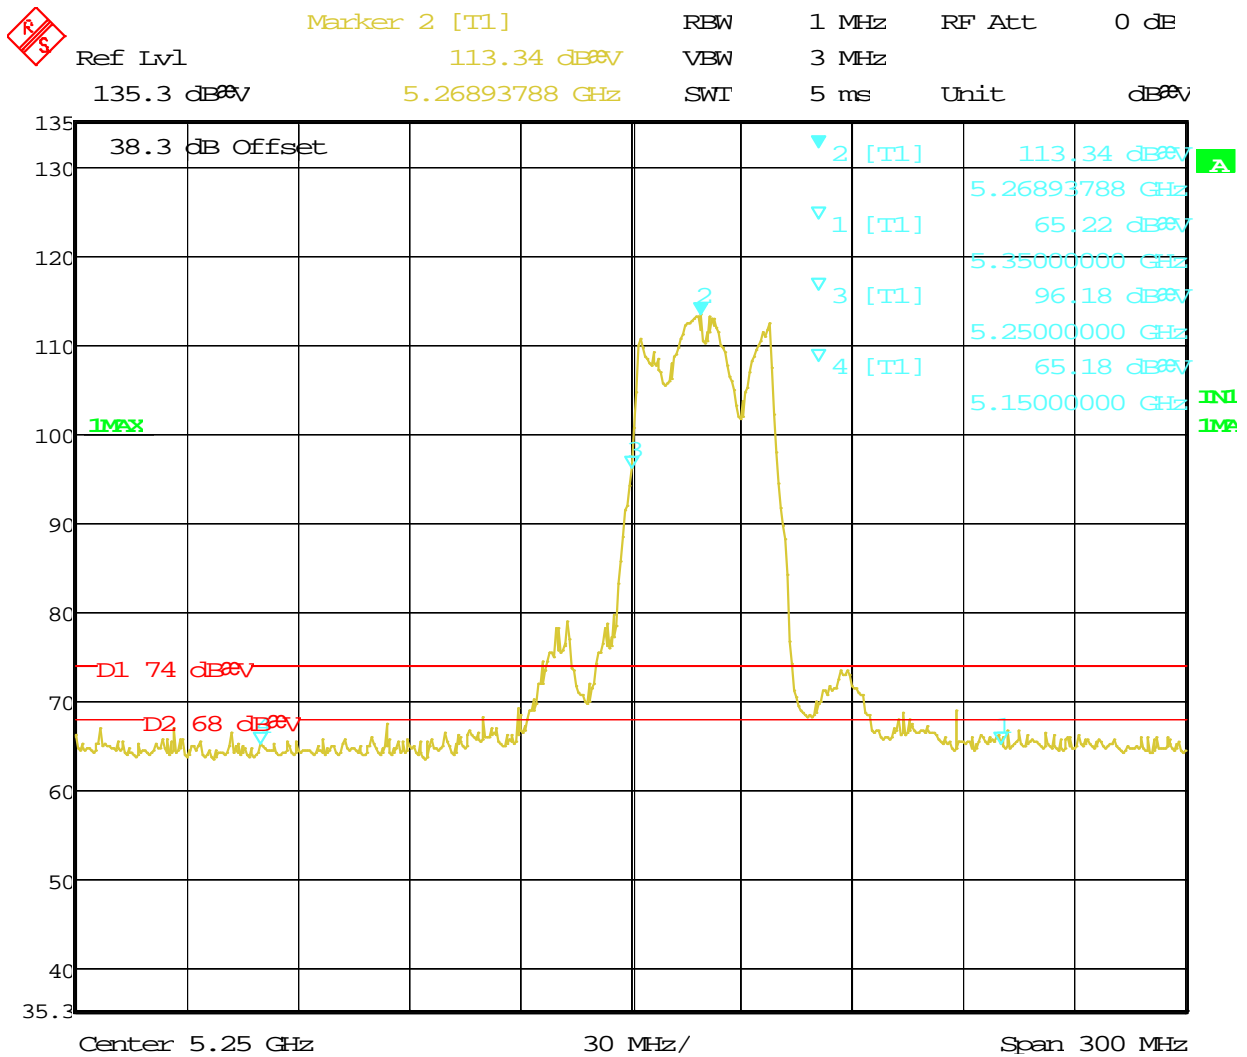

Date: 14.MAY.2013 13:01:16


**Figure 94:** Radiated Emission at the Edge for Channel 5270 MHz at 13.5Mbps – Horz. (Peak)



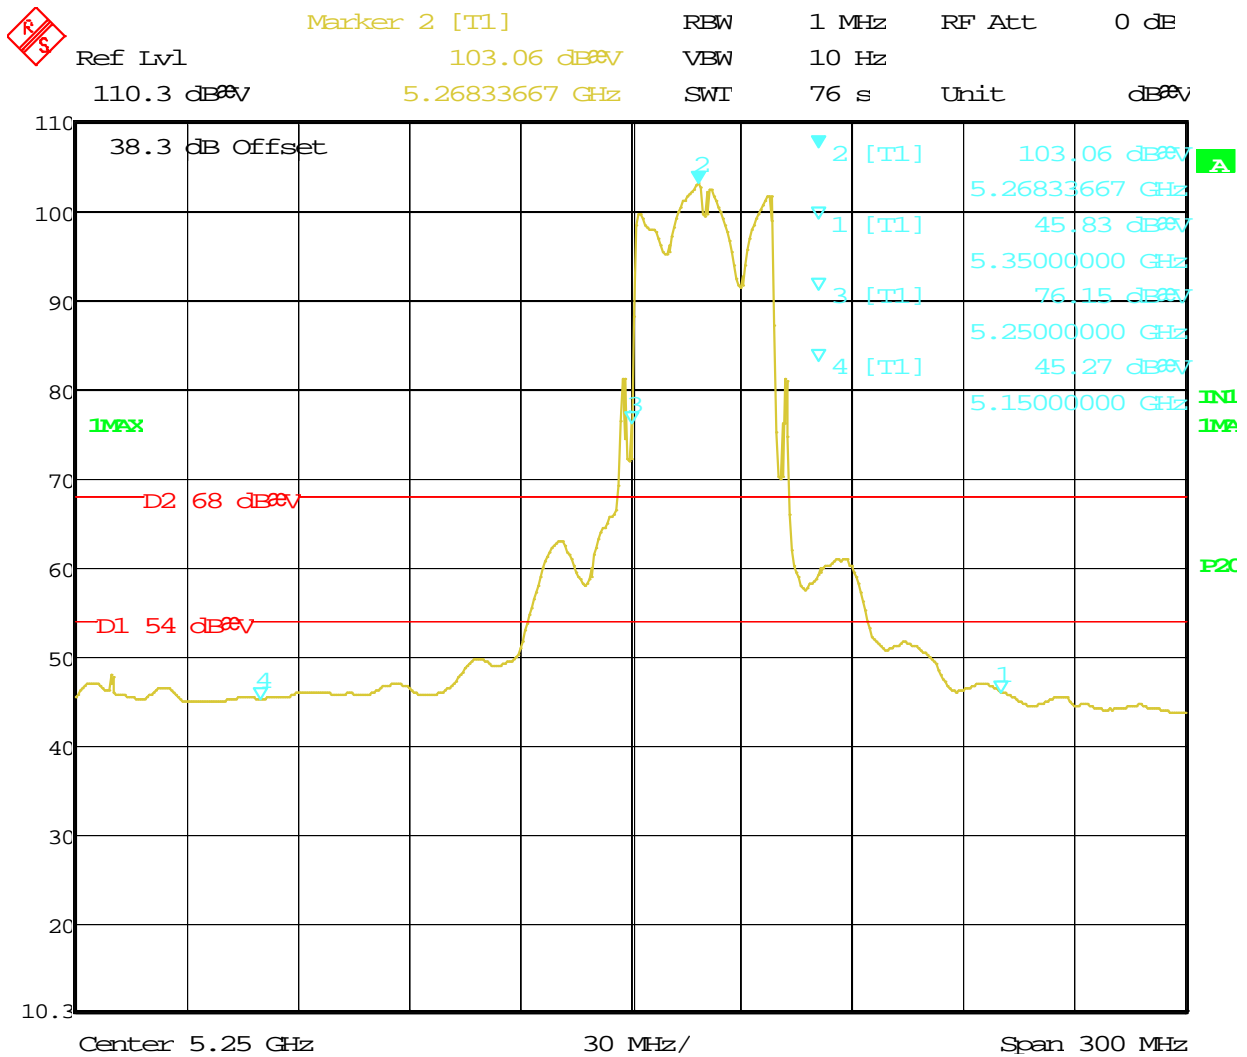


Date: 14.MAY.2013 13:03:08

**Figure 95:** Radiated Emission at the Edge for Channel 5270 MHz at 13.5Mbps – Horz. (Ave.)

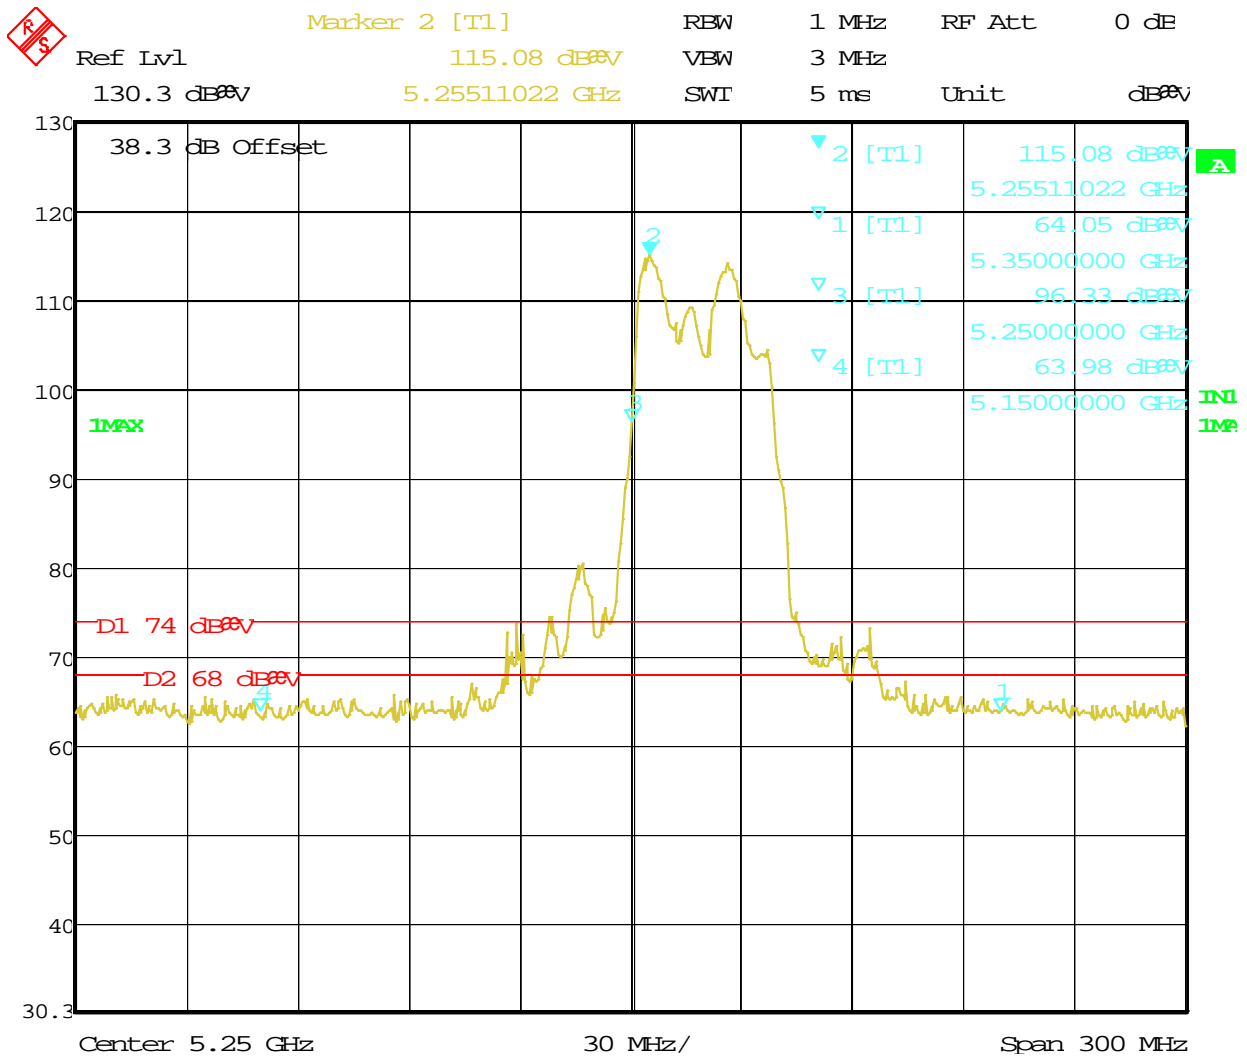


Date: 14.MAY.2013 13:05:58

**Figure 96:** Radiated Emission at the Edge for Channel 5270 MHz at 13.5Mbps – Vert. (Peak)

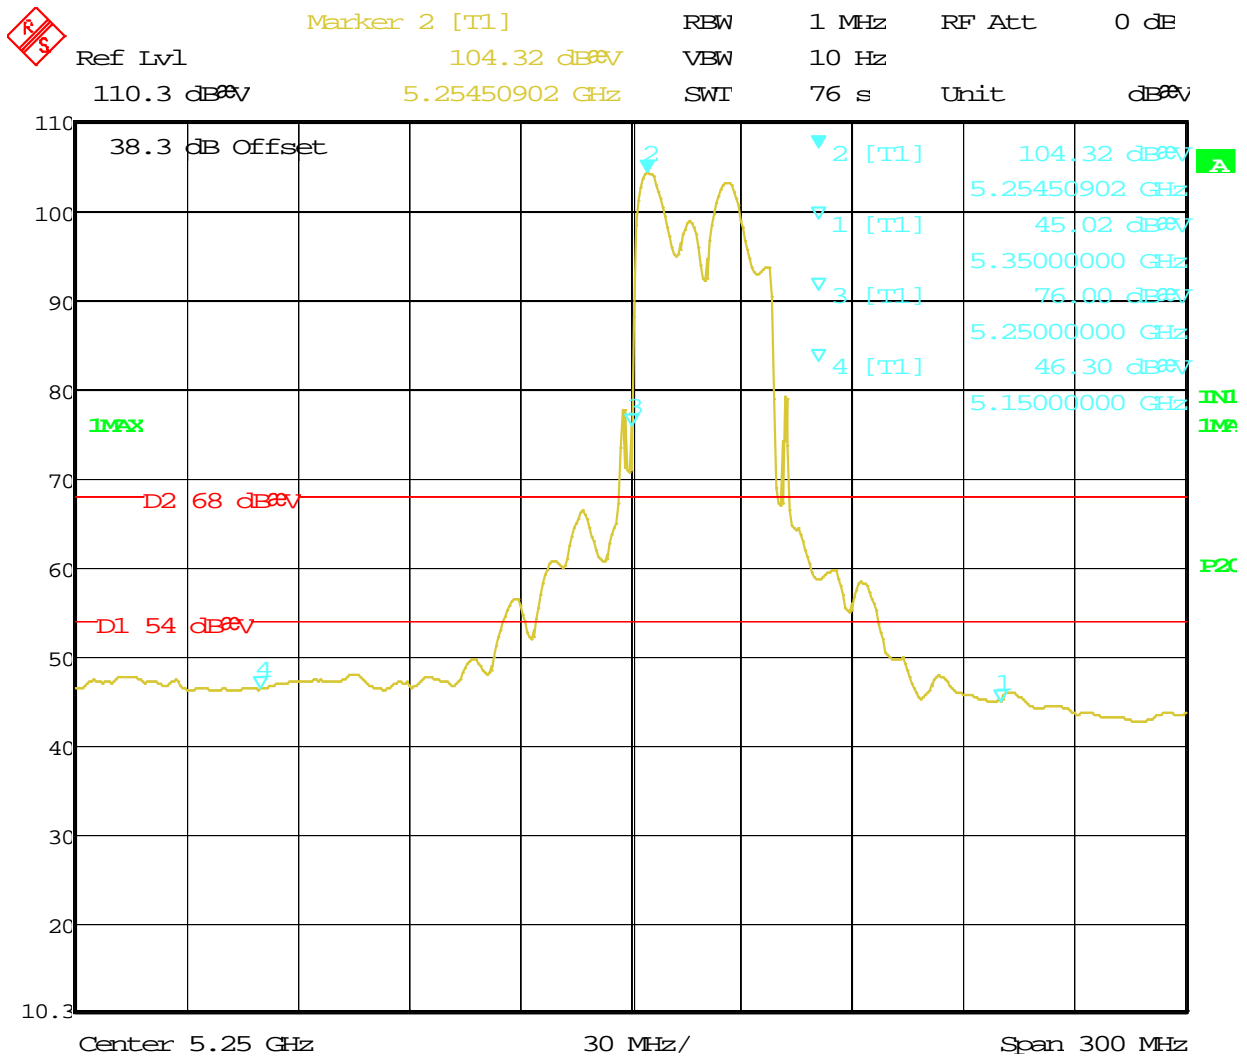

Date: 14.MAY.2013 13:07:34


**Figure 97:** Radiated Emission at the Edge for Channel 5270 MHz at 13.5Mbps – Vert. (Ave.)

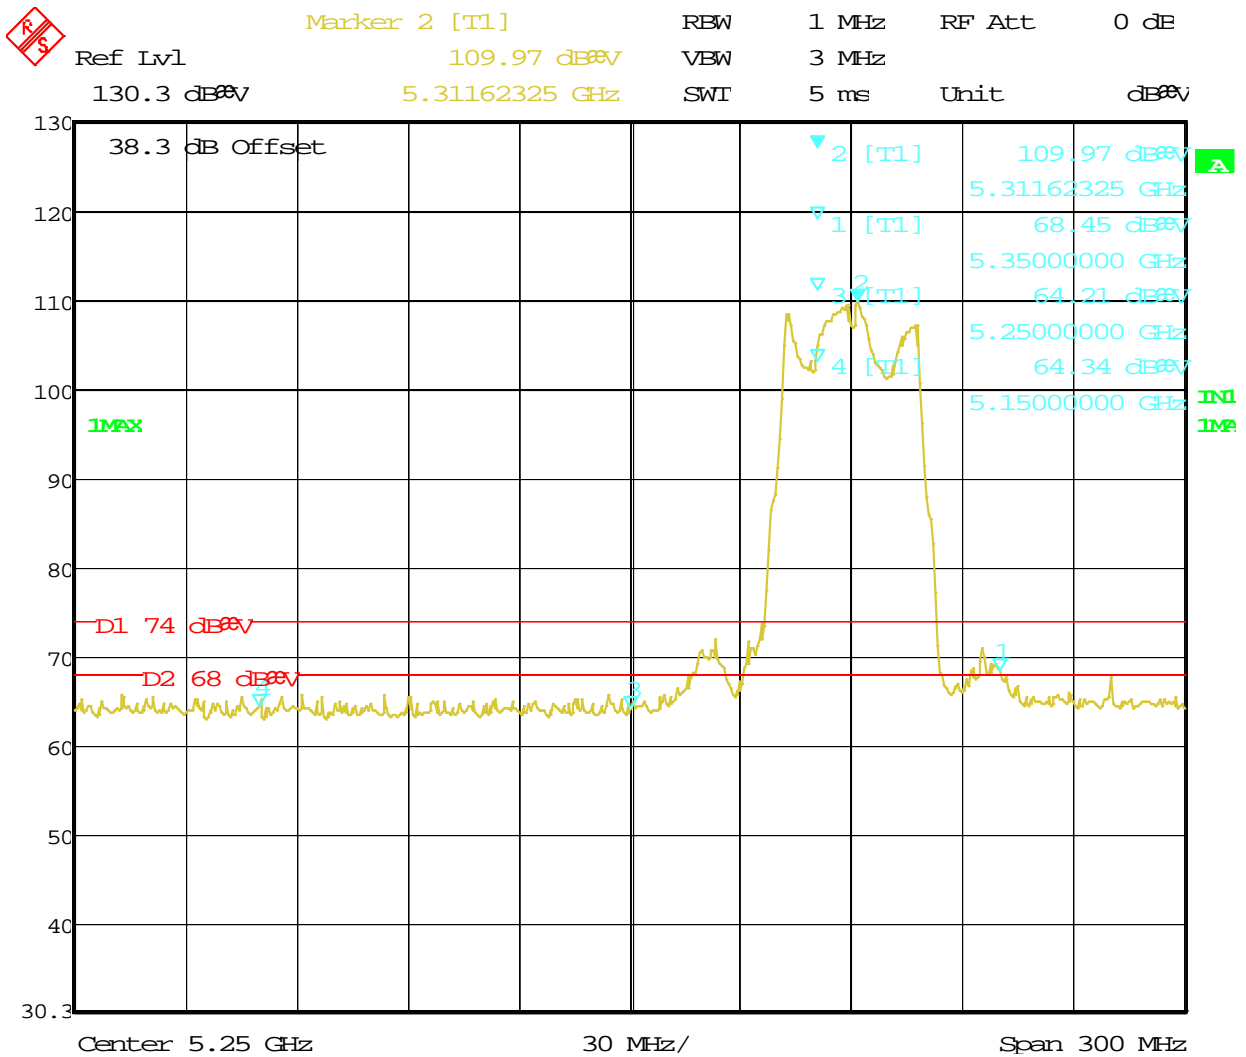

Date: 14.MAY.2013 13:28:06


**Figure 98:** Radiated Emission at the Edge for Channel 5310 MHz at 13.5Mbps – Horz (Peak)

Note: The bandedge at 5350MHz was over 68.2dBuV/m per CFR47 Part 15.407 (b) (1) to 15.407 (b) (3); however, it met both peak and average requirements of CFR47 Part 15.205 for the restricted band, per Fig. 98 and Fig. 99.

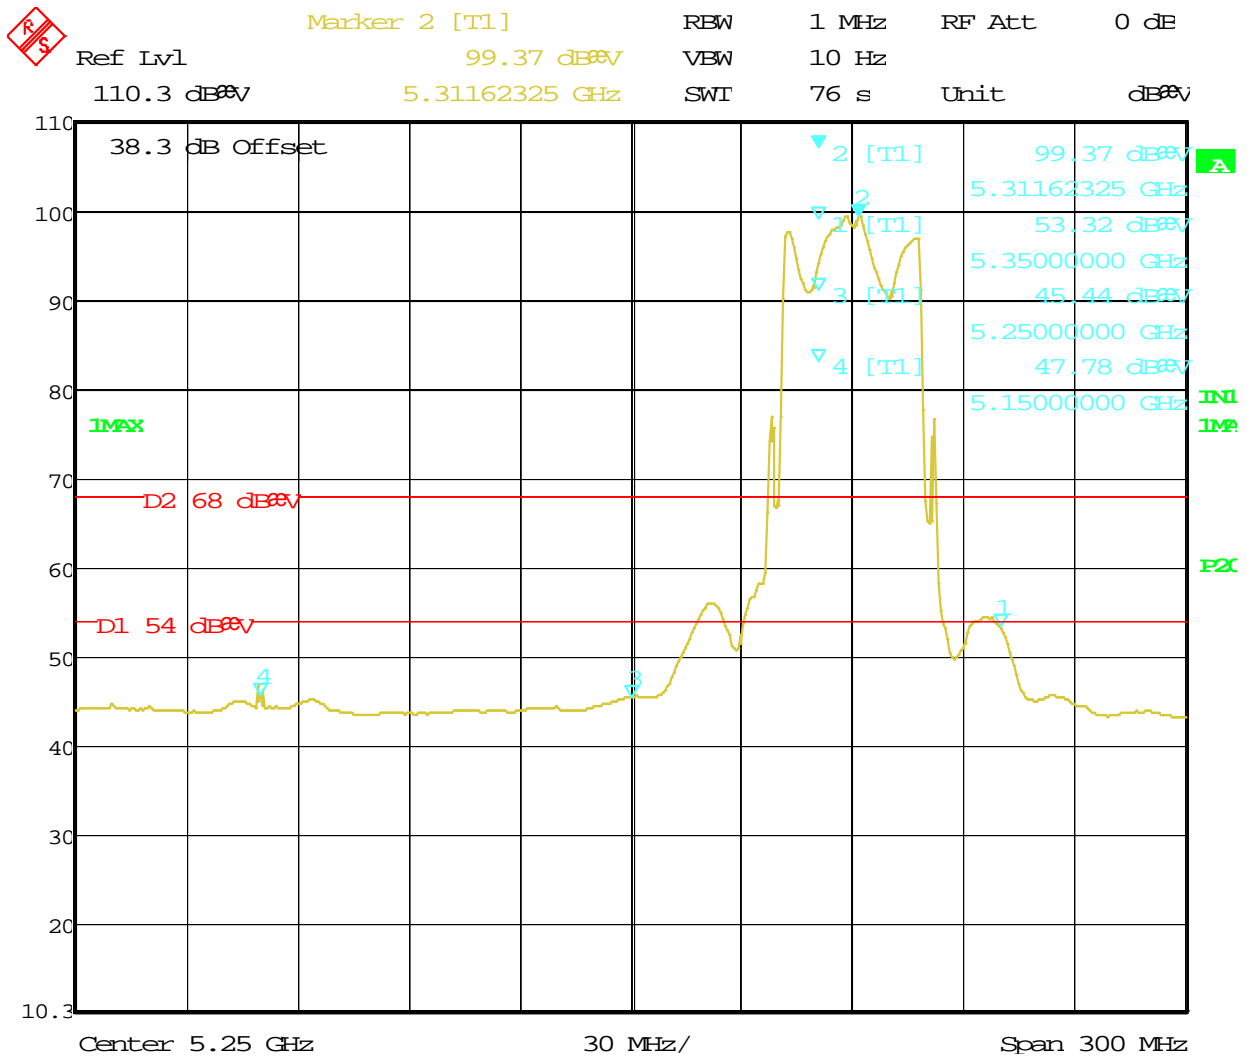


Date: 14.MAY.2013 13:27:03

**Figure 99:** Radiated Emission at the Edge for Channel 5310 MHz at 13.5Mbps – Horz (Ave.)

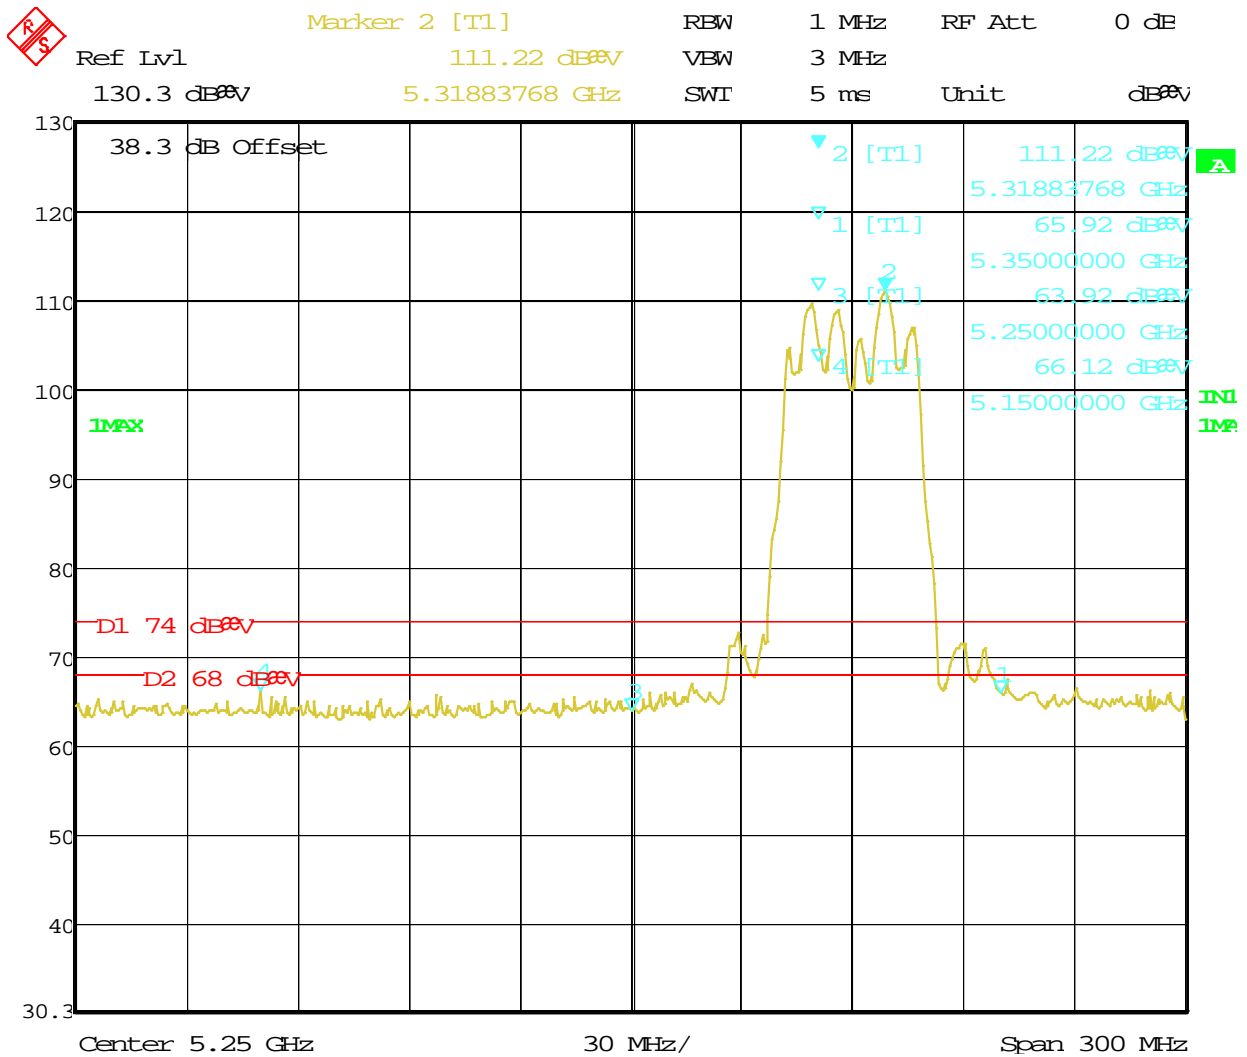

Date: 14.MAY.2013 13:34:57

**Figure 100:** Radiated Emission at the Edge for Channel 5310 MHz at 13.5Mbps – Vert (Peak)

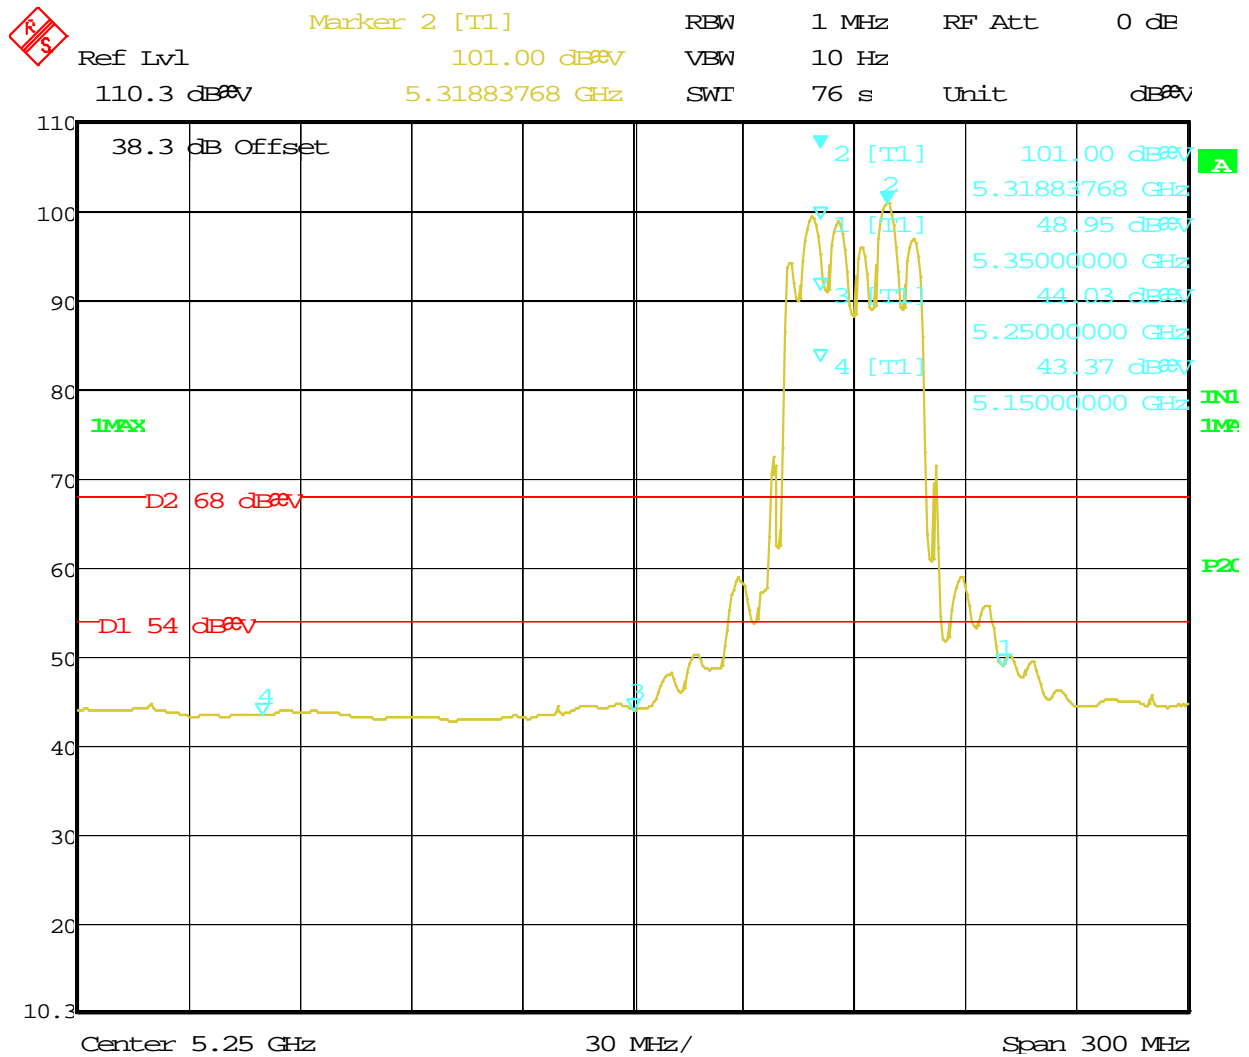

Date: 14.MAY.2013 13:36:45

**Figure 101:** Radiated Emission at the Edge for Channel 5310 MHz at 13.5Mbps – Vert (Ave.)

| SOP 1 Radiated Emissions                                                                                           |                 |                                        |                 |                 | Tracking # 31360999.003 Page 1 of 15 |                     |                     |                  |          |
|--------------------------------------------------------------------------------------------------------------------|-----------------|----------------------------------------|-----------------|-----------------|--------------------------------------|---------------------|---------------------|------------------|----------|
| <b>EUT Name</b>                                                                                                    |                 | Wireless Video Access Point            |                 |                 | <b>Date</b>                          |                     | May 13, 2013        |                  |          |
| <b>EUT Model</b>                                                                                                   |                 | 405                                    |                 |                 | <b>Temp / Hum in</b>                 |                     | 23°C / 29%rh        |                  |          |
| <b>EUT Serial</b>                                                                                                  |                 | 09130M000104                           |                 |                 | <b>Temp / Hum out</b>                |                     | N/A                 |                  |          |
| <b>EUT Config.</b>                                                                                                 |                 | Y-Axis, 802.11n HT20 at 6.5Mbps/ chain |                 |                 | <b>Line AC / Freq</b>                |                     | 120Vac/60Hz         |                  |          |
| <b>Standard</b>                                                                                                    |                 | CFR47 Part 15 Subpart C                |                 |                 | <b>RBW / VBW</b>                     |                     | 120 kHz/ 300 kHz    |                  |          |
| <b>Dist/Ant Used</b>                                                                                               |                 | 3m / JB3                               |                 |                 | <b>Performed by</b>                  |                     | Jeremy Luong        |                  |          |
| Emission Freq (MHz)                                                                                                | ANT Polar (H/V) | ANT Pos (cm)                           | Table Pos (deg) | FIM QP (dBuV/m) | Total CF (dBuV)                      | E-Field QP (dBuV/m) | Spec Limit (dBuV/m) | Spec Margin (dB) | Type     |
| 30 MHz to 1GHz Transmitted at 802.11n HT20, 5300 MHz 6.5Mbps/chain                                                 |                 |                                        |                 |                 |                                      |                     |                     |                  |          |
| 65.25                                                                                                              | V               | 124                                    | 170             | 54.37           | -18.52                               | 35.85               | 40.00               | -4.15            | Spurious |
| 69.50                                                                                                              | V               | 188                                    | 274             | 50.92           | -18.15                               | 32.77               | 40.00               | -7.23            | Spurious |
| 123.24                                                                                                             | V               | 104                                    | 314             | 51.77           | -11.91                               | 39.86               | 43.50               | -3.64            | Spurious |
| 161.92                                                                                                             | V               | 102                                    | 240             | 52.60           | -13.12                               | 39.48               | 43.50               | -4.02            | Spurious |
| 171.60                                                                                                             | V               | 108                                    | 232             | 50.47           | -13.69                               | 36.78               | 43.50               | -6.72            | Spurious |
| 319.99                                                                                                             | H               | 115                                    | 182             | 58.45           | -10.13                               | 48.32               | 46.00               | 2.32             | Spurious |
| 323.82                                                                                                             | H               | 184                                    | 356             | 50.34           | -9.98                                | 40.35               | 46.00               | -5.65            | Spurious |
| 575.00                                                                                                             | V               | 99                                     | 212             | 50.54           | -5.84                                | 44.70               | 46.00               | -1.30            | Spurious |
| 624.99                                                                                                             | V               | 102                                    | 272             | 47.08           | -5.21                                | 41.87               | 46.00               | -4.13            | Spurious |
| 959.99                                                                                                             | V               | 99                                     | 356             | 42.64           | -0.06                                | 42.58               | 46.00               | -3.42            | Spurious |
| Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty                                      |                 |                                        |                 |                 |                                      |                     |                     |                  |          |
| Total CF= Amp Gain + Cable Loss + ANT Factor                                                                       |                 |                                        |                 |                 |                                      |                     |                     |                  |          |
| Combined Standard Uncertainty $u_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence |                 |                                        |                 |                 |                                      |                     |                     |                  |          |
| Notes: Worst case was observed on Y-axis at 802.11n HT20, 5300 MHz 6.5Mbps.                                        |                 |                                        |                 |                 |                                      |                     |                     |                  |          |
| All other emissions passed Class B limit; except 320MHz. This emission is not radio related.                       |                 |                                        |                 |                 |                                      |                     |                     |                  |          |




**SOP 1 Radiated Emissions**

Tracking # 31360999.003 Page 2 of 15

|                      |                                        |                       |                  |
|----------------------|----------------------------------------|-----------------------|------------------|
| <b>EUT Name</b>      | Wireless Video Access Point            | <b>Date</b>           | May 13, 2013     |
| <b>EUT Model</b>     | 405                                    | <b>Temp / Hum in</b>  | 23°C / 29%rh     |
| <b>EUT Serial</b>    | 09130M000104                           | <b>Temp / Hum out</b> | N/A              |
| <b>EUT Config.</b>   | Y-Axis, 802.11n HT20 at 6.5Mbps/ chain | <b>Line AC</b>        | 120Vac/60Hz      |
| <b>Standard</b>      | CFR47 Part 15 Subpart C                | <b>RBW / VBW</b>      | 120 kHz/ 300 kHz |
| <b>Dist/Ant Used</b> | 3m – JB3                               | <b>Performed by</b>   | Jeremy Luong     |

30 MHz to 1GHz Plots for Transmit Mode at 5300 MHz

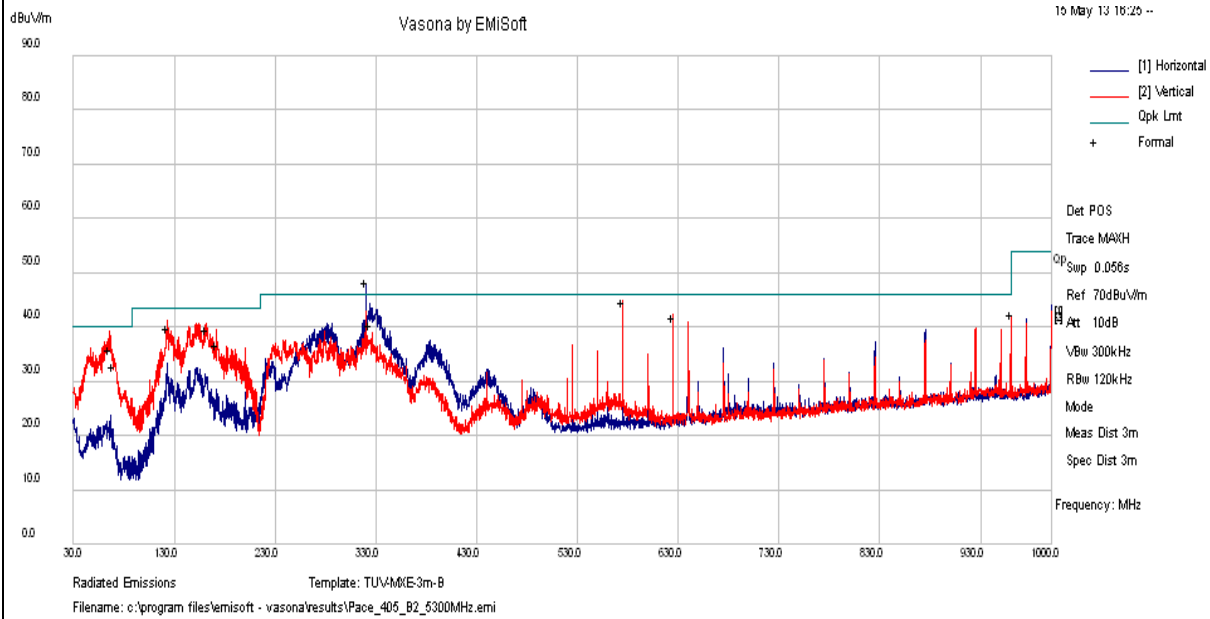

Notes: FCC Class B Limit.

| SOP 1 Radiated Emissions              |                                    |          |        |      |     | Tracking # 31360999.003 Page 3 of 15 |              |       |        |          |  |
|---------------------------------------|------------------------------------|----------|--------|------|-----|--------------------------------------|--------------|-------|--------|----------|--|
| <b>EUT Name</b>                       | Wireless Video Access Point        |          |        |      |     | <b>Date</b>                          | May 13, 2013 |       |        |          |  |
| <b>EUT Model</b>                      | 405                                |          |        |      |     | <b>Temp / Hum in</b>                 | 23°C / 28%rh |       |        |          |  |
| <b>EUT Serial</b>                     | 09130M000104                       |          |        |      |     | <b>Temp / Hum out</b>                | N/A          |       |        |          |  |
| <b>EUT Config.</b>                    | Y-Axis, 802.11 HT20 at 6.5Mbps     |          |        |      |     | <b>Line AC / Freq</b>                | 120Vac/60Hz  |       |        |          |  |
| <b>Standard</b>                       | CFR47 Part 15 Subpart C            |          |        |      |     | <b>RBW / VBW</b>                     | 1 MHz/ 3 MHz |       |        |          |  |
| <b>Dist/Ant Used</b>                  | 3m / EMCO3115 / 1m - RA42-K-F-4B-C |          |        |      |     | <b>Performed by</b>                  | Jeremy Luong |       |        |          |  |
| Transmitted Data at 5260 MHz @ 18 dBm |                                    |          |        |      |     |                                      |              |       |        |          |  |
| Freq.                                 | Raw                                | Total CF | Level  | Det. | Pol | Hgt                                  | Azt.         | Limit | Margin | Type     |  |
| MHz                                   | dBuV/m                             | dB       | dBuV/m |      | H/V | cm                                   | deg.         | dB    | dB     |          |  |
| 1279.81                               | 54.46                              | -6.71    | 47.76  | Ave  | H   | 109                                  | 62           | 54.00 | -6.24  | Spurious |  |
| 4980.13                               | 39.67                              | 3.32     | 42.99  | Ave  | V   | 186                                  | 272          | 54.00 | -11.02 | Spurious |  |
| 5497.94                               | 41.61                              | 4.98     | 46.58  | Ave  | V   | 184                                  | 116          | 54.00 | -7.42  | Spurious |  |
| 5500.28                               | 41.78                              | 4.99     | 46.77  | Ave  | V   | 121                                  | 156          | 54.00 | -7.23  | Spurious |  |
| 5716.03                               | 38.17                              | 4.98     | 43.15  | Ave  | V   | 123                                  | 174          | 54.00 | -10.86 | Spurious |  |
| 5926.88                               | 34.09                              | 5.48     | 39.57  | Ave  | V   | 247                                  | 234          | 54.00 | -14.43 | Spurious |  |
| 7013.33                               | 24.60                              | 8.21     | 32.82  | Ave  | V   | 150                                  | 292          | 54.00 | -21.18 | Spurious |  |
| 10519.89                              | 33.55                              | 11.61    | 45.16  | Ave  | H   | 102                                  | 52           | 54.00 | -8.84  | Harmonic |  |
| 21199.60                              | 43.19                              | 10.98    | 54.17  | Ave  | V   | 129                                  | 145          | 64.00 | -9.83  | Harmonic |  |
| 21199.80                              | 47.69                              | 10.98    | 58.67  | Ave  | H   | 118                                  | 89           | 64.00 | -5.33  | Harmonic |  |
| Transmitted Data at 5300 MHz @ 18 dBm |                                    |          |        |      |     |                                      |              |       |        |          |  |
| Freq.                                 | Raw                                | Total CF | Level  | Det. | Pol | Hgt                                  | Azt.         | Limit | Margin | Type     |  |
| MHz                                   | dBuV/m                             | dB       | dBuV/m |      | H/V | cm                                   | deg.         | dB    | dB     |          |  |
| 1280.00                               | 52.48                              | -6.71    | 45.77  | Ave  | H   | 102                                  | 304          | 54.00 | -8.23  | Spurious |  |
| 4946.97                               | 35.67                              | 3.25     | 38.92  | Ave  | V   | 100                                  | 280          | 54.00 | -15.08 | Spurious |  |
| 5458.28                               | 40.62                              | 4.81     | 45.44  | Ave  | V   | 110                                  | 304          | 54.00 | -8.57  | Spurious |  |
| 5539.06                               | 44.05                              | 4.94     | 49.00  | Ave  | V   | 264                                  | 232          | 54.00 | -5.00  | Spurious |  |
| 5701.22                               | 38.61                              | 4.96     | 43.57  | Ave  | V   | 100                                  | 248          | 54.00 | -10.43 | Spurious |  |
| 6220.78                               | 28.08                              | 6.05     | 34.13  | Ave  | V   | 120                                  | 252          | 54.00 | -19.87 | Spurious |  |
| 7066.69                               | 31.42                              | 8.23     | 39.64  | Ave  | V   | 285                                  | 322          | 54.00 | -14.36 | Spurious |  |
| 10592.03                              | 21.79                              | 11.66    | 33.45  | Ave  | H   | 273                                  | 66           | 54.00 | -20.55 | Harmonic |  |
| 21199.60                              | 43.19                              | 10.98    | 54.17  | Ave  | V   | 145                                  | 129          | 64.00 | -9.83  | Harmonic |  |
| 21199.80                              | 47.69                              | 10.98    | 58.67  | Ave  | H   | 89                                   | 118          | 64.00 | -5.33  | Harmonic |  |
| Transmitted Data at 5320 MHz @ 18 dBm |                                    |          |        |      |     |                                      |              |       |        |          |  |
| Freq.                                 | Raw                                | Total CF | Level  | Det. | Pol | Hgt                                  | Azt.         | Limit | Margin | Type     |  |
| MHz                                   | dBuV/m                             | dB       | dBuV/m |      | H/V | cm                                   | deg.         | dB    | dB     |          |  |
| 1279.92                               | 57.25                              | -6.71    | 50.55  | Ave  | H   | 105                                  | 312          | 54.00 | -3.45  | Spurious |  |
| 5012.45                               | 38.22                              | 3.40     | 41.62  | Ave  | V   | 188                                  | 276          | 54.00 | -12.38 | Spurious |  |
| 5297.87                               | 32.23                              | 4.42     | 36.65  | Ave  | H   | 106                                  | 278          | 54.00 | -17.35 | Spurious |  |
| 5913.13                               | 37.01                              | 5.42     | 42.44  | Ave  | V   | 110                                  | 170          | 54.00 | -11.56 | Spurious |  |
| 6082.70                               | 33.49                              | 5.85     | 39.33  | Ave  | V   | 100                                  | 166          | 54.00 | -14.67 | Spurious |  |
| 7560.03                               | 33.12                              | 8.72     | 41.85  | Ave  | H   | 176                                  | 238          | 54.00 | -12.16 | Spurious |  |
| 11339.30                              | 30.22                              | 12.29    | 42.51  | Ave  | H   | 169                                  | 42           | 54.00 | -11.49 | Spurious |  |
| 14792.37                              | 17.90                              | 18.08    | 35.97  | Ave  | V   | 178                                  | 56           | 54.00 | -18.03 | Harmonic |  |
| 17988.41                              | 17.16                              | 25.63    | 42.80  | Ave  | H   | 204                                  | 112          | 54.00 | -11.20 | Harmonic |  |

|                                                                                                                   |       |        |       |     |   |     |    |       |        |          |
|-------------------------------------------------------------------------------------------------------------------|-------|--------|-------|-----|---|-----|----|-------|--------|----------|
| 21279.80                                                                                                          | 41.63 | 10.93  | 52.56 | Ave | V | 112 | 25 | 64.00 | -11.44 | Harmonic |
| 21279.80                                                                                                          | 46.73 | 10.93  | 57.66 | Ave | H | 107 | 81 | 64.00 | -6.34  | Harmonic |
| 28373.10                                                                                                          | 56.84 | -12.43 | 44.41 | Ave | H | 132 | 87 | 64.00 | -19.59 | Harmonic |
| Spec Margin = E-Field Average - Limit, E-Field Average = Field Meas.+ Total CF ± Uncertainty                      |       |        |       |     |   |     |    |       |        |          |
| Total CF= Amp Gain + Cable Loss + ANT Factor                                                                      |       |        |       |     |   |     |    |       |        |          |
| Combined Standard Uncertainty $u_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence |       |        |       |     |   |     |    |       |        |          |
| Notes: Worst case was observed on Y-axis, 6.5Mbps.                                                                |       |        |       |     |   |     |    |       |        |          |

|                                 |                                    |  |  |                                      |              |  |  |
|---------------------------------|------------------------------------|--|--|--------------------------------------|--------------|--|--|
| <b>SOP 1 Radiated Emissions</b> |                                    |  |  | Tracking # 31360999.003 Page 4 of 15 |              |  |  |
| <b>EUT Name</b>                 | Wireless Video Access Point        |  |  | <b>Date</b>                          | May 13, 2013 |  |  |
| <b>EUT Model</b>                | 405                                |  |  | <b>Temp / Hum in</b>                 | 23°C / 28%rh |  |  |
| <b>EUT Serial</b>               | 09130M000104                       |  |  | <b>Temp / Hum out</b>                | N/A          |  |  |
| <b>EUT Config.</b>              | Y-Axis, 802.11 HT40 at 13.5Mbps    |  |  | <b>Line AC / Freq</b>                | 120Vac/60Hz  |  |  |
| <b>Standard</b>                 | CFR47 Part 15 Subpart C            |  |  | <b>RBW / VBW</b>                     | 1 MHz/ 3 MHz |  |  |
| <b>Dist/Ant Used</b>            | 3m / EMCO3115 / 1m - RA42-K-F-4B-C |  |  | <b>Performed by</b>                  | Jeremy Luong |  |  |

Transmitted Data at 5270 MHz @ 18 dBm

| Freq.    | Raw    | Total CF | Level  | Det. | Pol | Hgt | Azt. | Limit | Margin | Type     |
|----------|--------|----------|--------|------|-----|-----|------|-------|--------|----------|
| MHz      | dBuV/m | dB       | dBuV/m |      | H/V | cm  | deg. | dB    | dB     |          |
| 1280.41  | 52.91  | -6.71    | 46.20  | Ave  | H   | 106 | 312  | 54.00 | -7.80  | Spurious |
| 2428.62  | 28.06  | -1.71    | 26.35  | Ave  | V   | 264 | 272  | 54.00 | -27.65 | Spurious |
| 3099.32  | 24.57  | 0.40     | 24.98  | Ave  | H   | 125 | 24   | 54.00 | -29.02 | Spurious |
| 4959.90  | 39.43  | 3.28     | 42.71  | Ave  | V   | 153 | 284  | 54.00 | -11.29 | Spurious |
| 5515.80  | 41.44  | 4.96     | 46.40  | Ave  | V   | 223 | 244  | 54.00 | -7.60  | Spurious |
| 5755.50  | 36.62  | 5.05     | 41.67  | Ave  | V   | 161 | 174  | 54.00 | -12.33 | Spurious |
| 7026.57  | 33.08  | 8.23     | 41.30  | Ave  | V   | 134 | 314  | 54.00 | -12.70 | Spurious |
| 10539.91 | 33.60  | 11.63    | 45.23  | Ave  | H   | 105 | 38   | 54.00 | -8.78  | Harmonic |
| 14964.28 | 17.81  | 17.14    | 34.95  | Ave  | V   | 268 | 230  | 54.00 | -19.05 | Harmonic |
| 21079.80 | 46.02  | 10.95    | 56.97  | Ave  | H   | 128 | 93   | 64.00 | -7.03  | Harmonic |
| 21079.90 | 41.55  | 10.95    | 52.50  | Ave  | V   | 122 | 145  | 64.00 | -11.50 | Harmonic |
| 31619.70 | 53.10  | -8.69    | 44.41  | Ave  | H   | 120 | 418  | 64.00 | -19.59 | Harmonic |
| 36889.70 | 49.36  | -0.83    | 48.53  | Ave  | V   | 101 | 72   | 64.00 | -15.47 | Harmonic |

Transmitted Data at 5310 MHz @ 18 dBm

| Freq.    | Raw    | Total CF | Level  | Det. | Pol | Hgt | Azt. | Limit | Margin | Type     |
|----------|--------|----------|--------|------|-----|-----|------|-------|--------|----------|
| MHz      | dBuV/m | dB       | dBuV/m |      | H/V | cm  | deg. | dB    | dB     |          |
| 1279.95  | 57.30  | -6.71    | 50.59  | Ave  | H   | 107 | 308  | 54.00 | -3.41  | Spurious |
| 4959.97  | 37.10  | 3.28     | 40.37  | Ave  | H   | 209 | 254  | 54.00 | -13.63 | Spurious |
| 5566.96  | 39.26  | 4.91     | 44.17  | Ave  | H   | 284 | 260  | 54.00 | -9.83  | Spurious |
| 5615.22  | 40.18  | 4.89     | 45.07  | Ave  | V   | 199 | 226  | 54.00 | -8.93  | Spurious |
| 5920.45  | 29.93  | 5.46     | 35.38  | Ave  | V   | 196 | 162  | 54.00 | -18.62 | Spurious |
| 7080.04  | 34.37  | 8.22     | 42.59  | Ave  | V   | 232 | 240  | 54.00 | -11.41 | Spurious |
| 10619.93 | 33.84  | 11.68    | 45.52  | Ave  | H   | 113 | 50   | 54.00 | -8.48  | Spurious |
| 14602.20 | 17.41  | 17.84    | 35.26  | Ave  | H   | 186 | 250  | 54.00 | -18.74 | Harmonic |
| 21239.80 | 41.72  | 11.06    | 52.78  | Ave  | V   | 130 | 144  | 64.00 | -11.22 | Harmonic |
| 21239.90 | 47.41  | 11.06    | 58.47  | Ave  | H   | 121 | 92   | 64.00 | -5.53  | Harmonic |
| 31859.70 | 50.98  | -8.33    | 42.65  | Ave  | H   | 113 | 96   | 64.00 | -21.35 | Harmonic |
| 37169.70 | 48.67  | -0.12    | 48.55  | Ave  | V   | 99  | 86   | 64.00 | -15.45 | Harmonic |

Spec Margin = E-Field Average - Limit, E-Field Average = Field Meas.+ Total CF ± Uncertainty

Total CF= Amp Gain + Cable Loss + ANT Factor

Combined Standard Uncertainty  $u_c(y) = \pm 3.2$  dB Expanded Uncertainty  $U = k u_c(y)$   $k = 2$  for 95% confidence



Notes: Worst case was observed on Y-axis, 13.5Mbps.

**SOP 1 Radiated Emissions**

Tracking # 31360999.003 Page 6 of 15

|                      |                                    |                       |              |
|----------------------|------------------------------------|-----------------------|--------------|
| <b>EUT Name</b>      | Wireless Video Access Point        | <b>Date</b>           | May 13, 2013 |
| <b>EUT Model</b>     | 405                                | <b>Temp / Hum in</b>  | 23°C / 28%rh |
| <b>EUT Serial</b>    | 09130M000104                       | <b>Temp / Hum out</b> | N/A          |
| <b>EUT Config.</b>   | Y-Axis, 802.11n HT20 at 6.5Mbps    | <b>Line AC</b>        | 120Vac 60Hz  |
| <b>Standard</b>      | CFR47 Part 15 Subpart C            | <b>RBW / VBW</b>      | 1 MHz / 3MHz |
| <b>Dist/Ant Used</b> | 3m - EMCO3115 / 1m - RA42-K-F-4B-C | <b>Performed by</b>   | Jeremy Luong |

Above 1GHz Plots for Transmit Mode at 5260 MHz

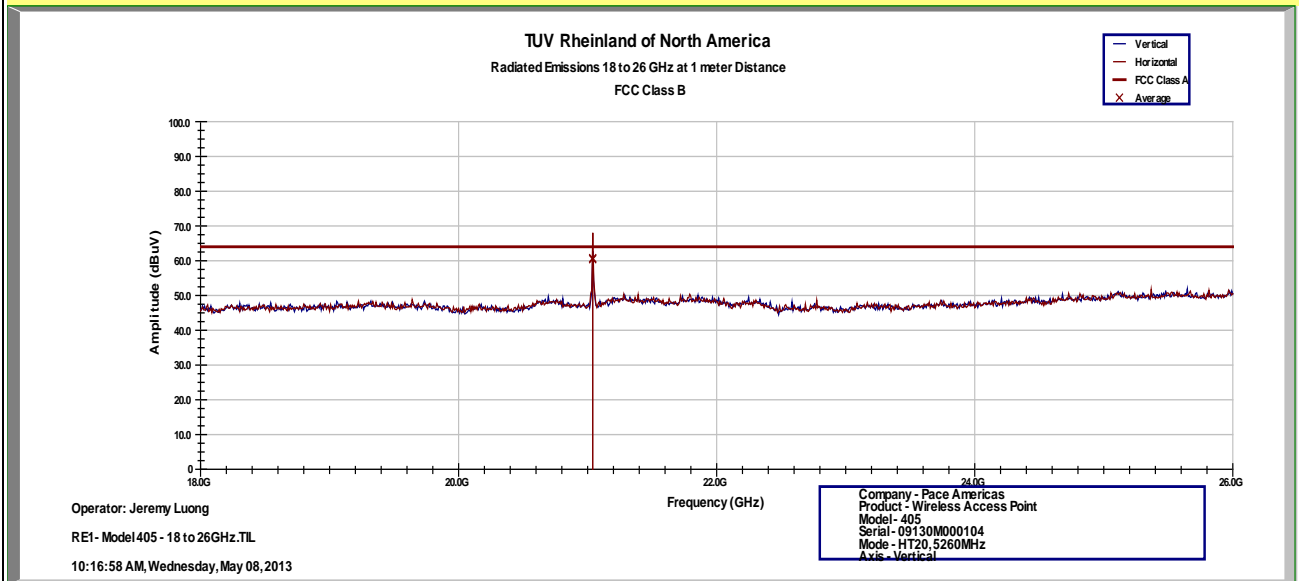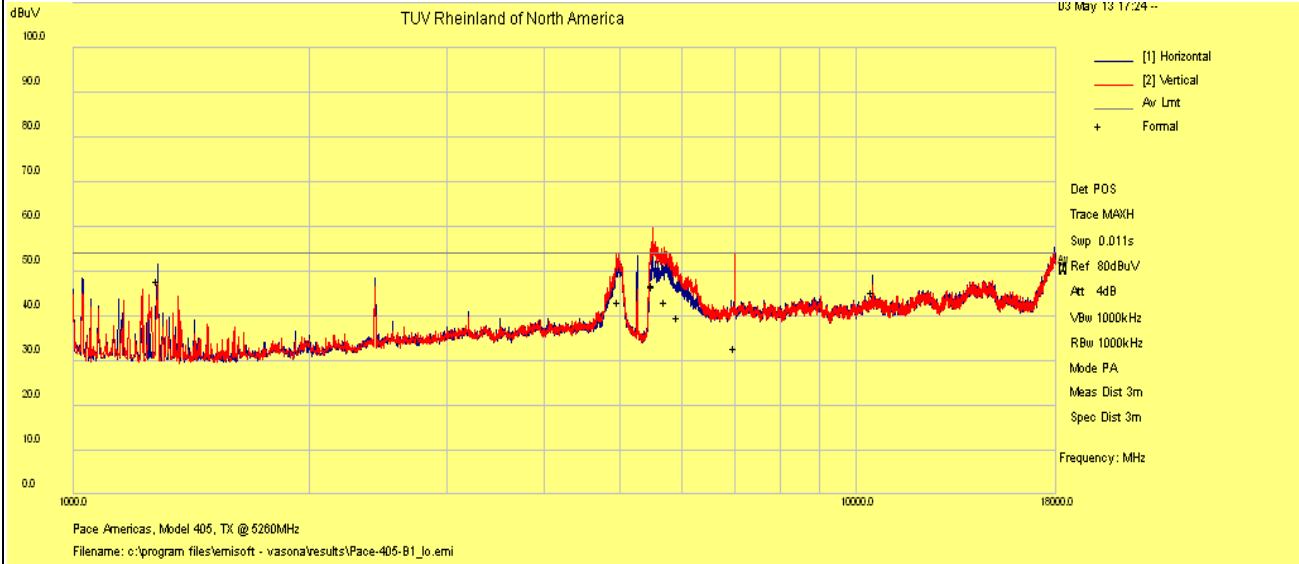


Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.003 Page 7 of 15

|                      |                                 |                       |              |
|----------------------|---------------------------------|-----------------------|--------------|
| <b>EUT Name</b>      | Wireless Video Access Point     | <b>Date</b>           | May 13, 2013 |
| <b>EUT Model</b>     | 405                             | <b>Temp / Hum in</b>  | 23°C / 28%rh |
| <b>EUT Serial</b>    | 09130M000104                    | <b>Temp / Hum out</b> | N/A          |
| <b>EUT Config.</b>   | Y-Axis, 802.11n HT20 at 6.5Mbps | <b>Line AC</b>        | 120Vac 60Hz  |
| <b>Standard</b>      | CFR47 Part 15 Subpart C         | <b>RBW / VBW</b>      | 1 MHz / 3MHz |
| <b>Dist/Ant Used</b> | 1m - RA42-K-F-4B-C              | <b>Performed by</b>   | Jeremy Luong |

Above 1GHz Plots for Transmit Mode at 5260 MHz

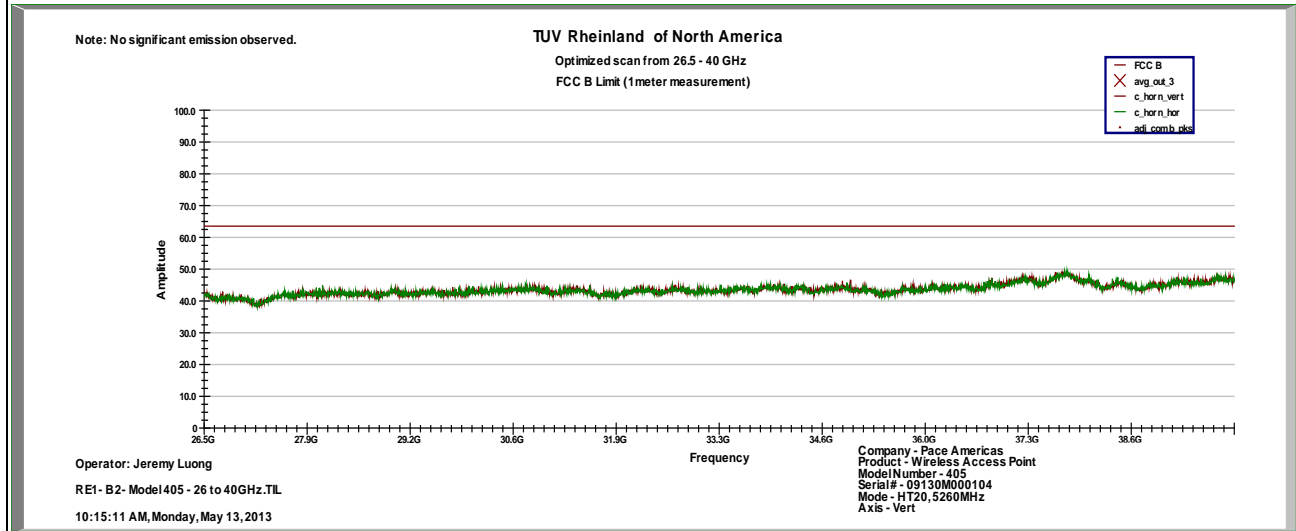



Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.003 Page 8 of 15

|                      |                                    |                       |              |
|----------------------|------------------------------------|-----------------------|--------------|
| <b>EUT Name</b>      | Wireless Video Access Point        | <b>Date</b>           | May 13, 2013 |
| <b>EUT Model</b>     | 405                                | <b>Temp / Hum in</b>  | 23°C / 28%rh |
| <b>EUT Serial</b>    | 09130M000104                       | <b>Temp / Hum out</b> | N/A          |
| <b>EUT Config.</b>   | Y-Axis, 802.11n HT20 at 6.5Mbps    | <b>Line AC</b>        | 120Vac 60Hz  |
| <b>Standard</b>      | CFR47 Part 15 Subpart C            | <b>RBW / VBW</b>      | 1 MHz / 3MHz |
| <b>Dist/Ant Used</b> | 3m - EMCO3115 / 1m - RA42-K-F-4B-C | <b>Performed by</b>   | Jeremy Luong |

Above 1GHz Plots for Transmit Mode at 5300 MHz

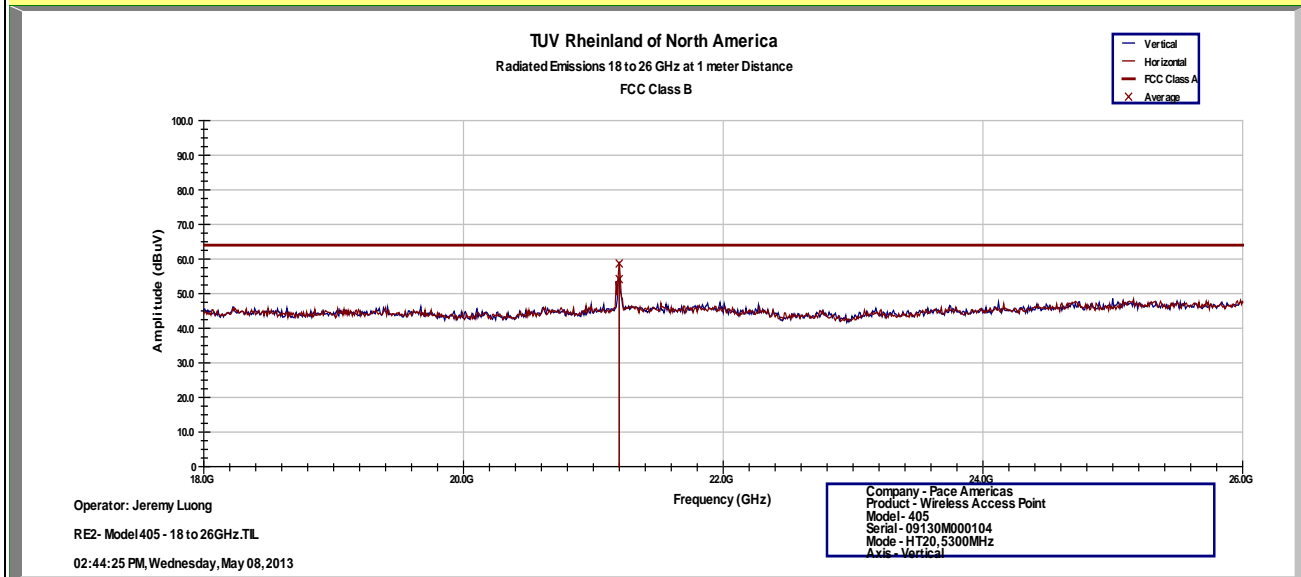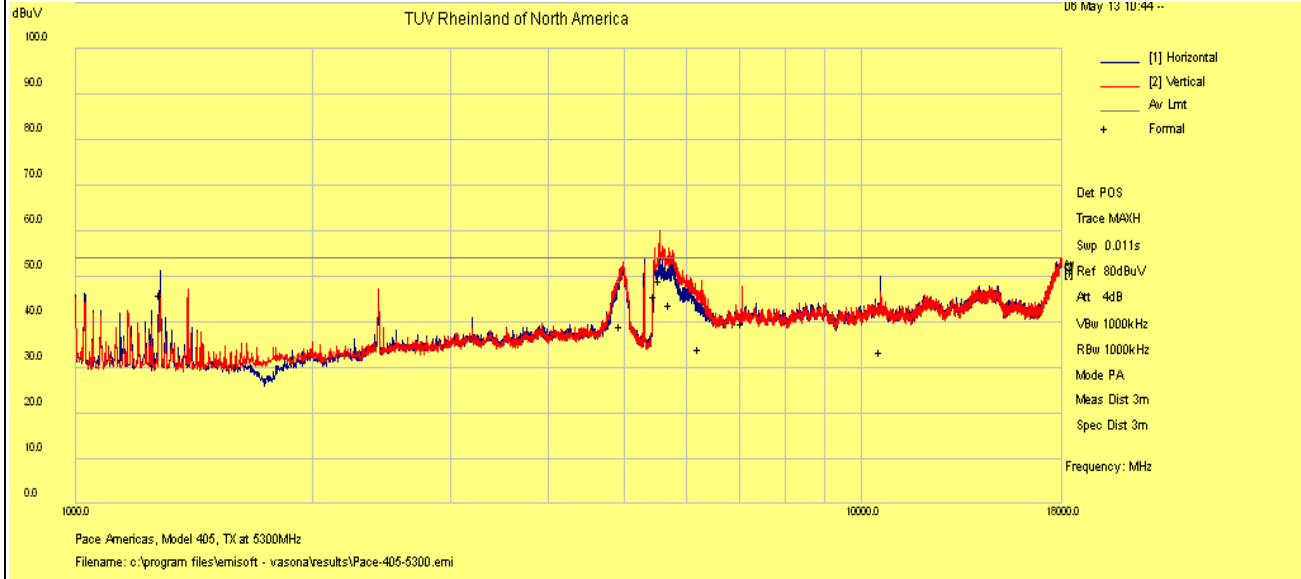


Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.003 Page 9 of 15

|                      |                                 |                       |              |
|----------------------|---------------------------------|-----------------------|--------------|
| <b>EUT Name</b>      | Wireless Video Access Point     | <b>Date</b>           | May 13, 2013 |
| <b>EUT Model</b>     | 405                             | <b>Temp / Hum in</b>  | 23°C / 28%rh |
| <b>EUT Serial</b>    | 09130M000104                    | <b>Temp / Hum out</b> | N/A          |
| <b>EUT Config.</b>   | Y-Axis, 802.11n HT20 at 6.5Mbps | <b>Line AC</b>        | 120Vac 60Hz  |
| <b>Standard</b>      | CFR47 Part 15 Subpart C         | <b>RBW / VBW</b>      | 1 MHz / 3MHz |
| <b>Dist/Ant Used</b> | 1m - RA42-K-F-4B-C              | <b>Performed by</b>   | Jeremy Luong |

Above 1GHz Plots for Transmit Mode at 5300 MHz

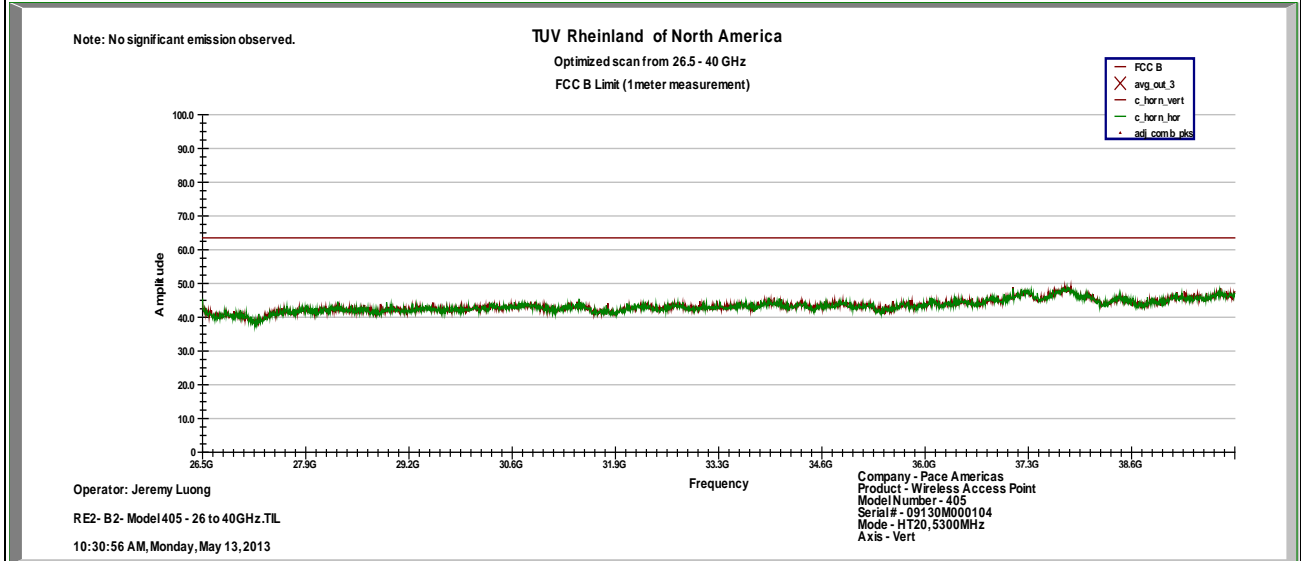

Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.





**SOP 1 Radiated Emissions**

Tracking # 31360999.003 Page 10 of 15

|                      |                                    |                       |              |
|----------------------|------------------------------------|-----------------------|--------------|
| <b>EUT Name</b>      | Wireless Video Access Point        | <b>Date</b>           | May 13, 2013 |
| <b>EUT Model</b>     | 405                                | <b>Temp / Hum in</b>  | 23°C / 28%rh |
| <b>EUT Serial</b>    | 09130M000104                       | <b>Temp / Hum out</b> | N/A          |
| <b>EUT Config.</b>   | Y-Axis, 802.11n HT20 at 6.5Mbps    | <b>Line AC</b>        | 120Vac 60Hz  |
| <b>Standard</b>      | CFR47 Part 15 Subpart C            | <b>RBW / VBW</b>      | 1 MHz / 3MHz |
| <b>Dist/Ant Used</b> | 3m - EMCO3115 / 1m - RA42-K-F-4B-C | <b>Performed by</b>   | Jeremy Luong |

Above 1GHz Plots for Transmit Mode at 5320 MHz

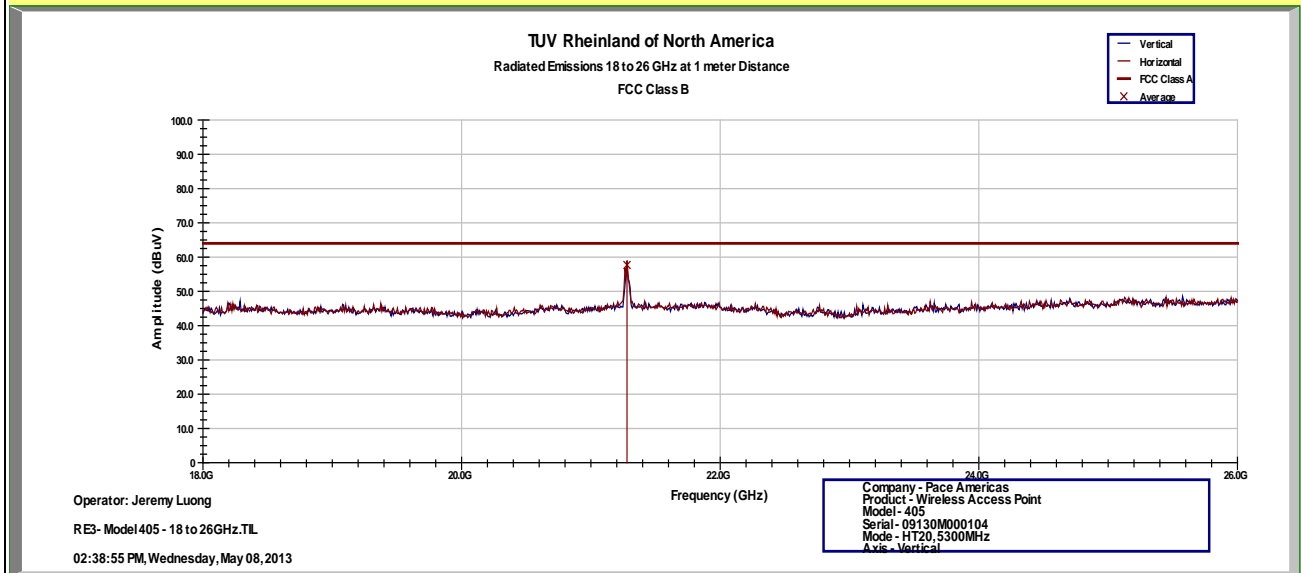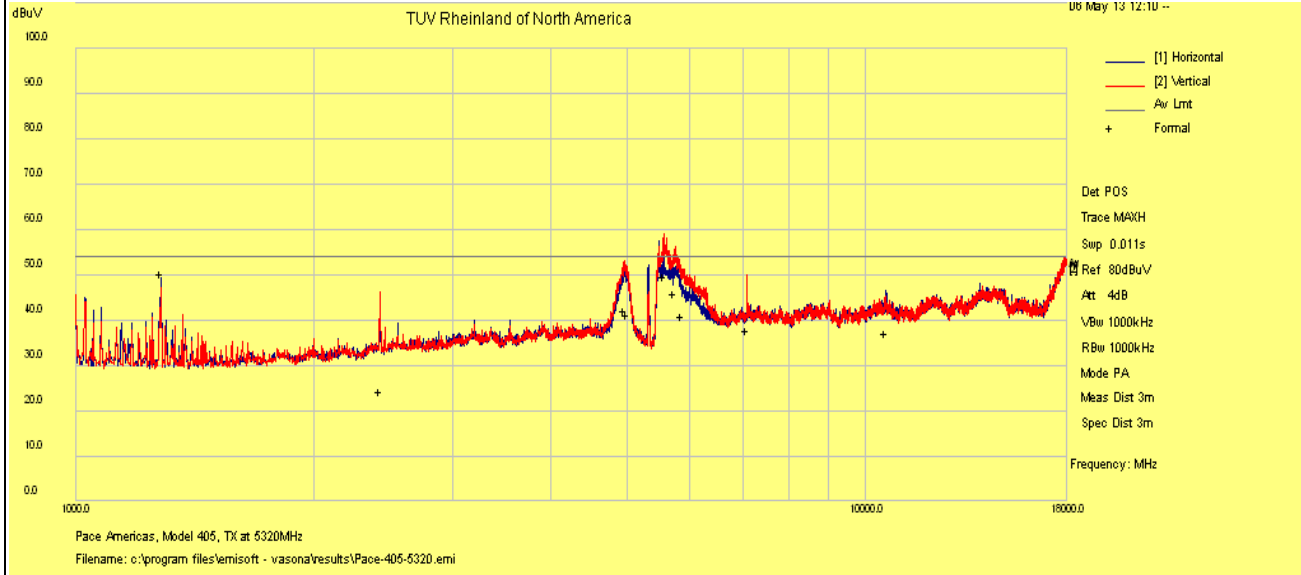


Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.003 Page 11 of 15

|                      |                                 |                       |              |
|----------------------|---------------------------------|-----------------------|--------------|
| <b>EUT Name</b>      | Wireless Video Access Point     | <b>Date</b>           | May 13, 2013 |
| <b>EUT Model</b>     | 405                             | <b>Temp / Hum in</b>  | 23°C / 28%rh |
| <b>EUT Serial</b>    | 09130M000104                    | <b>Temp / Hum out</b> | N/A          |
| <b>EUT Config.</b>   | Y-Axis, 802.11n HT20 at 6.5Mbps | <b>Line AC</b>        | 120Vac 60Hz  |
| <b>Standard</b>      | CFR47 Part 15 Subpart C         | <b>RBW / VBW</b>      | 1 MHz / 3MHz |
| <b>Dist/Ant Used</b> | 1m - RA42-K-F-4B-C              | <b>Performed by</b>   | Jeremy Luong |

Above 1GHz Plots for Transmit Mode at 5320 MHz

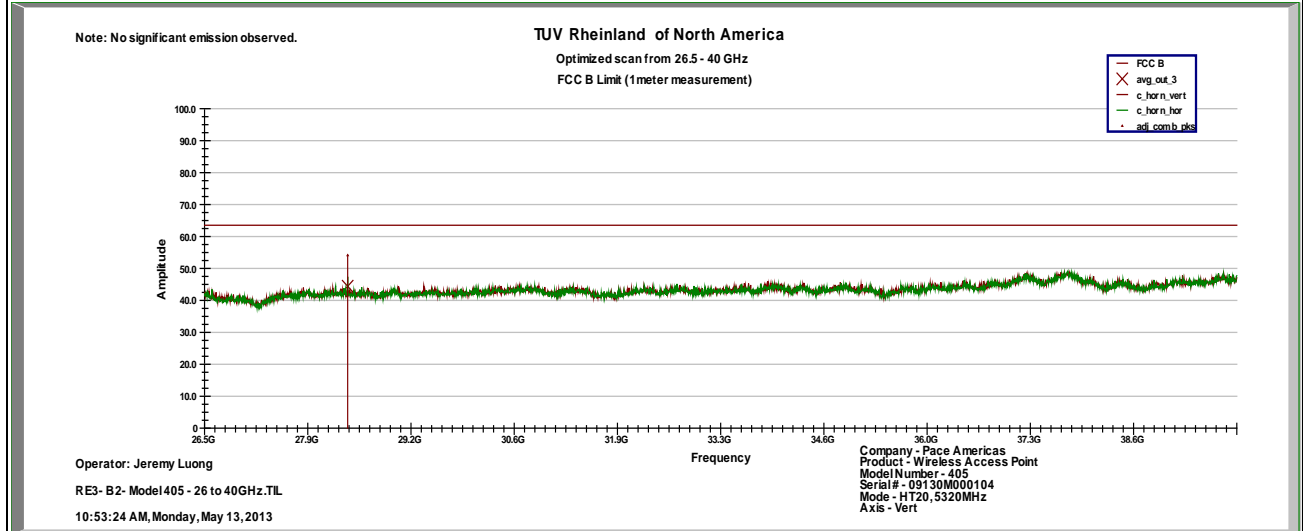



Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.003 Page 12 of 15

|                      |                                    |                       |              |
|----------------------|------------------------------------|-----------------------|--------------|
| <b>EUT Name</b>      | Wireless Video Access Point        | <b>Date</b>           | May 13, 2013 |
| <b>EUT Model</b>     | 405                                | <b>Temp / Hum in</b>  | 23°C / 28%rh |
| <b>EUT Serial</b>    | 09130M000104                       | <b>Temp / Hum out</b> | N/A          |
| <b>EUT Config.</b>   | Y-Axis, 802.11 HT40 at 13.5Mbps    | <b>Line AC</b>        | 120Vac 60Hz  |
| <b>Standard</b>      | CFR47 Part 15 Subpart C            | <b>RBW / VBW</b>      | 1 MHz / 3MHz |
| <b>Dist/Ant Used</b> | 3m - EMCO3115 / 1m - RA42-K-F-4B-C | <b>Performed by</b>   | Jeremy Luong |

Above 1GHz Plots for Transmit Mode at 5270 MHz

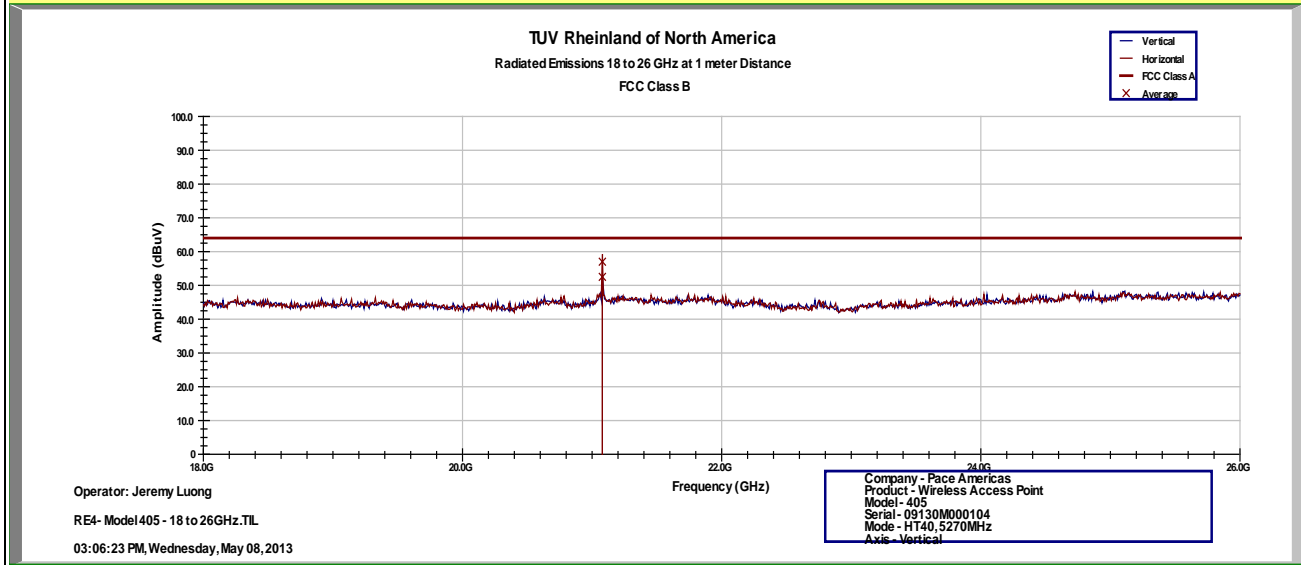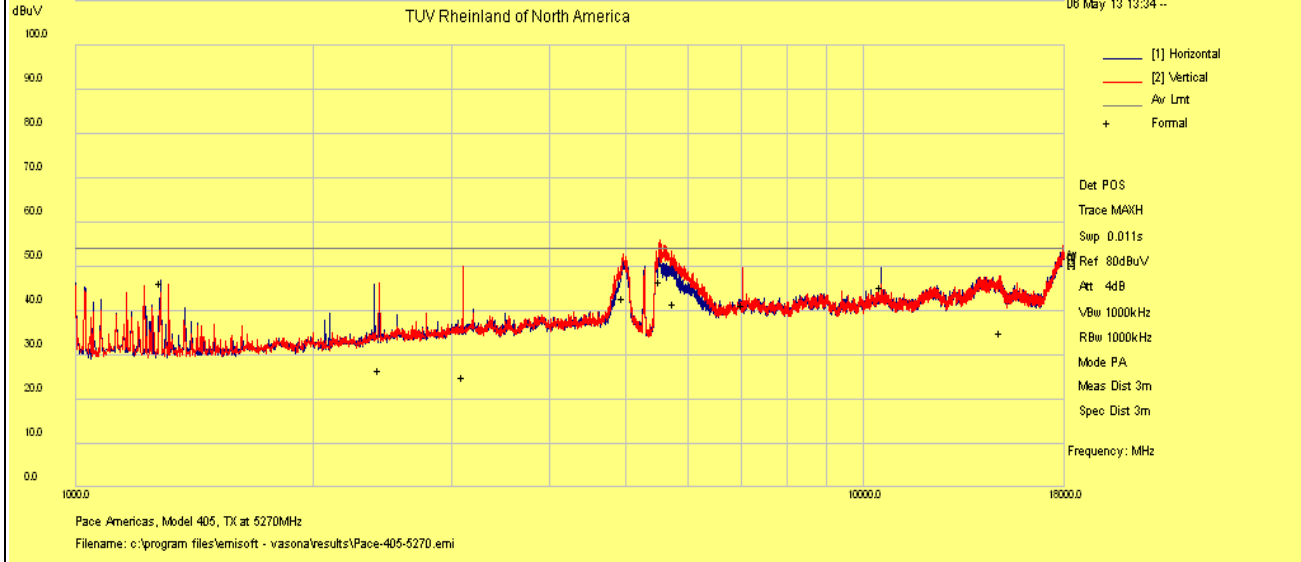


Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.003 Page 13 of 15

|                      |                                 |                       |              |
|----------------------|---------------------------------|-----------------------|--------------|
| <b>EUT Name</b>      | Wireless Video Access Point     | <b>Date</b>           | May 13, 2013 |
| <b>EUT Model</b>     | 405                             | <b>Temp / Hum in</b>  | 23°C / 28%rh |
| <b>EUT Serial</b>    | 09130M000104                    | <b>Temp / Hum out</b> | N/A          |
| <b>EUT Config.</b>   | Y-Axis, 802.11 HT40 at 13.5Mbps | <b>Line AC</b>        | 120Vac 60Hz  |
| <b>Standard</b>      | CFR47 Part 15 Subpart C         | <b>RBW / VBW</b>      | 1 MHz / 3MHz |
| <b>Dist/Ant Used</b> | 1m - RA42-K-F-4B-C              | <b>Performed by</b>   | Jeremy Luong |

Above 1GHz Plots for Transmit Mode at 5270 MHz

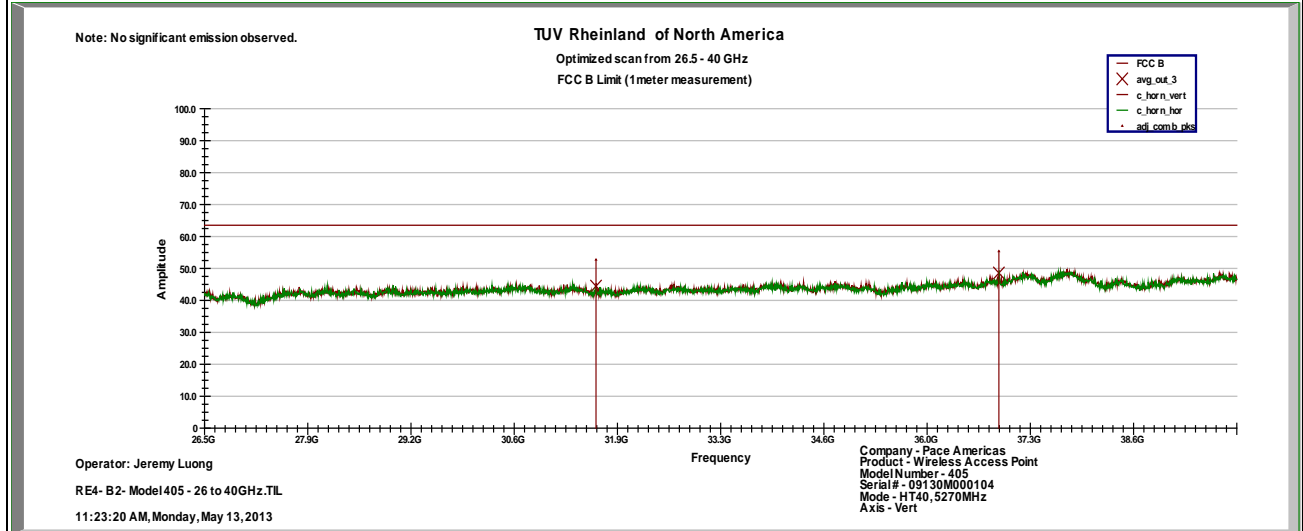



Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.003 Page 14 of 15

|                      |                                    |                       |              |
|----------------------|------------------------------------|-----------------------|--------------|
| <b>EUT Name</b>      | Wireless Video Access Point        | <b>Date</b>           | May 13, 2013 |
| <b>EUT Model</b>     | 405                                | <b>Temp / Hum in</b>  | 23°C / 28%rh |
| <b>EUT Serial</b>    | 09130M000104                       | <b>Temp / Hum out</b> | N/A          |
| <b>EUT Config.</b>   | Y-Axis, 802.11 HT40 at 13.5Mbps    | <b>Line AC</b>        | 120Vac 60Hz  |
| <b>Standard</b>      | CFR47 Part 15 Subpart C            | <b>RBW / VBW</b>      | 1 MHz / 3MHz |
| <b>Dist/Ant Used</b> | 3m - EMCO3115 / 1m - RA42-K-F-4B-C | <b>Performed by</b>   | Jeremy Luong |

Above 1GHz Plots for Transmit Mode at 5310 MHz

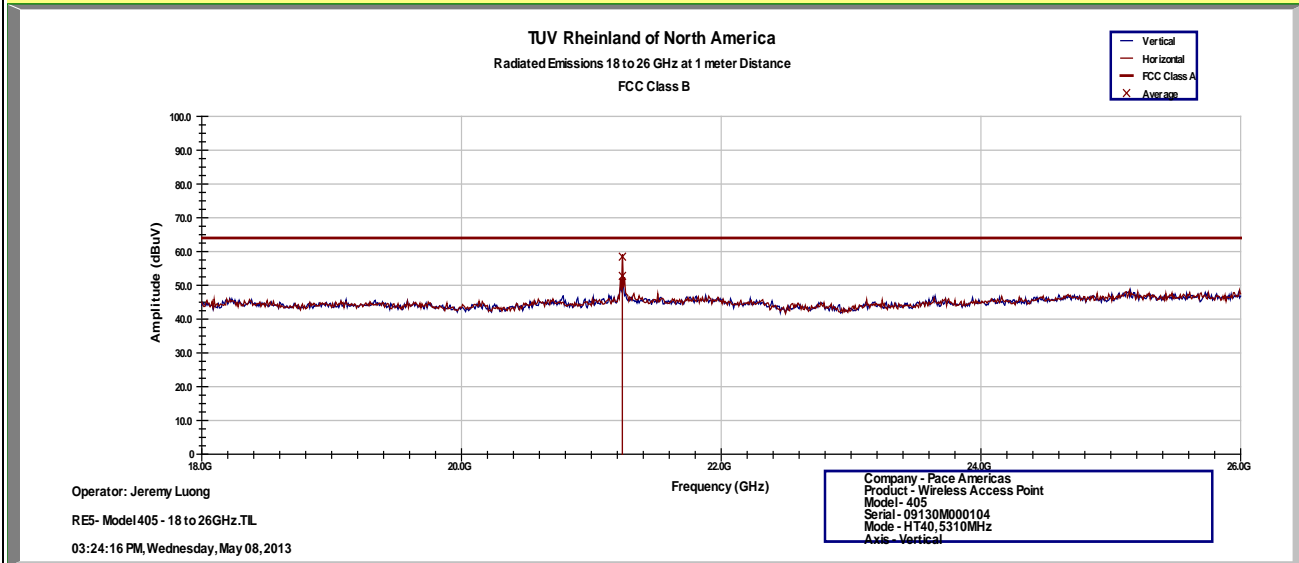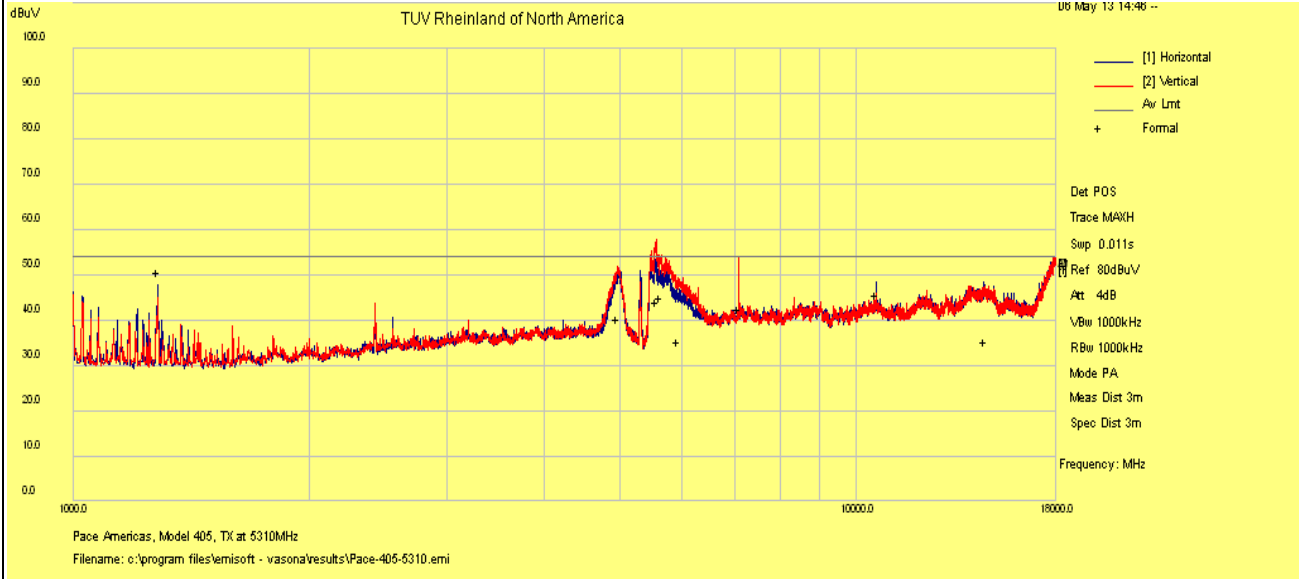


Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.  
 1GHz – 25 GHz Setting: RBW = 1 MHz/ VBW = 3MHz

**SOP 1 Radiated Emissions**

Tracking # 31360999.003 Page 15 of 15

|                      |                                    |                       |              |
|----------------------|------------------------------------|-----------------------|--------------|
| <b>EUT Name</b>      | Wireless Video Access Point        | <b>Date</b>           | May 13, 2013 |
| <b>EUT Model</b>     | 405                                | <b>Temp / Hum in</b>  | 23°C / 28%rh |
| <b>EUT Serial</b>    | 09130M000104                       | <b>Temp / Hum out</b> | N/A          |
| <b>EUT Config.</b>   | Y-Axis, 802.11 HT40 at 13.5Mbps    | <b>Line AC</b>        | 120Vac 60Hz  |
| <b>Standard</b>      | CFR47 Part 15 Subpart C            | <b>RBW / VBW</b>      | 1 MHz / 3MHz |
| <b>Dist/Ant Used</b> | 3m - EMCO3115 / 1m - RA42-K-F-4B-C | <b>Performed by</b>   | Jeremy Luong |

Above 1GHz Plots for Transmit Mode at 5310 MHz

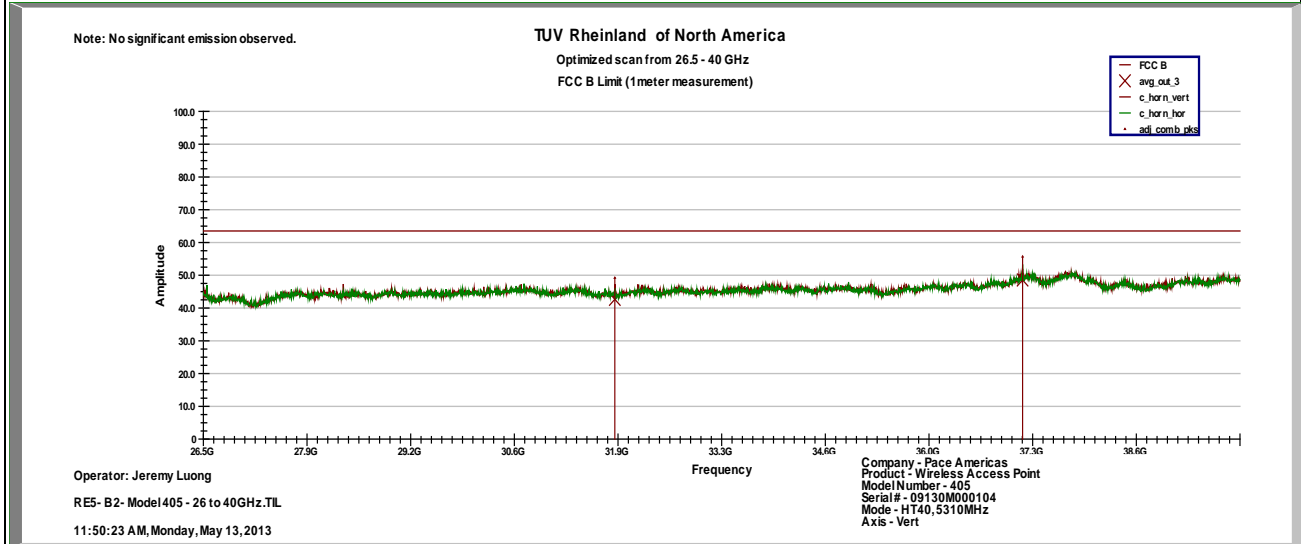

Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**4.5.4 Sample Calculation**

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

- Where: FIM = Field Intensity Meter (dBμV)
- AMP = Amplifier Gain (dB)
- CBL = Cable Loss (dB)
- ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V} / \text{m}}{20}}$$

## 4.6 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.4: 2010. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207: 2012 and RSS 210: 2010.

### 4.6.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50µH / 50Ω LISNs.

Testing is performed in Lab 5. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

#### 4.6.1.1 Deviations

There were no deviations from this test methodology.

### 4.6.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 8: AC Conducted Emissions – Test Results**

| <b>Test Conditions:</b> Conducted Measurement at Normal Conditions only |                        |                                   |
|-------------------------------------------------------------------------|------------------------|-----------------------------------|
| <b>Antenna Type:</b> Attached                                           |                        | <b>Power Level:</b> See Test Plan |
| <b>AC Power:</b> 120 Vac/60 Hz                                          |                        | <b>Configuration:</b> Tabletop    |
| <b>Ambient Temperature:</b> 23° C                                       |                        | <b>Relative Humidity:</b> 31% RH  |
| <b>Configuration</b>                                                    | <b>Frequency Range</b> | <b>Test Result</b>                |
| Line 1 (Hot)                                                            | 0.15 to 30 MHz         | Pass                              |
| Line 2 (Neutral)                                                        | 0.15 to 30 MHz         | Pass                              |


| SOP 2 Conducted Emissions                                                                                         |                             |            |           |       |          | Tracking # 31360999.003 Page 1 of 4 |               |        |        |  |
|-------------------------------------------------------------------------------------------------------------------|-----------------------------|------------|-----------|-------|----------|-------------------------------------|---------------|--------|--------|--|
| <b>EUT Name</b>                                                                                                   | Wireless Video Access Point |            |           |       |          | <b>Date</b>                         | May 16, 2013  |        |        |  |
| <b>EUT Model</b>                                                                                                  | 405                         |            |           |       |          | <b>Temp / Hum in</b>                | 23°C / 32%rh  |        |        |  |
| <b>EUT Serial</b>                                                                                                 | 09130M000104                |            |           |       |          | <b>Temp / Hum out</b>               | N/A           |        |        |  |
| <b>EUT Config.</b>                                                                                                | Attached Antenna            |            |           |       |          | <b>Line AC / Freq</b>               | 120Vac/60Hz   |        |        |  |
| <b>Standard</b>                                                                                                   | CFR47 Part 15.207           |            |           |       |          | <b>RBW / VBW</b>                    | 9kHz / 30 kHz |        |        |  |
| <b>Lab/LISN</b>                                                                                                   | Lab #2 /Com-Power, Line 1   |            |           |       |          | <b>Performed by</b>                 | Jeremy Luong  |        |        |  |
| Frequency                                                                                                         | Raw                         | Cable Loss | Ins. Loss | Level | Detector | Line                                | Limit         | Margin | Result |  |
| MHz                                                                                                               | dBuV                        | dB         | dB        | dBuV  |          | Line                                | dBuV          | dB     |        |  |
| 0.150                                                                                                             | 50.28                       | 0.02       | -0.10     | 50.20 | QP       | Live                                | 66.00         | -15.80 | Pass   |  |
| 0.150                                                                                                             | 21.16                       | 0.02       | -0.10     | 21.08 | Ave      | Live                                | 56.00         | -34.92 | Pass   |  |
| 0.169                                                                                                             | 56.28                       | 0.02       | -0.09     | 56.21 | QP       | Live                                | 65.02         | -8.81  | Pass   |  |
| 0.169                                                                                                             | 39.19                       | 0.02       | -0.09     | 39.12 | Ave      | Live                                | 55.02         | -15.90 | Pass   |  |
| 0.180                                                                                                             | 55.26                       | 0.02       | -0.09     | 55.19 | QP       | Live                                | 64.49         | -9.30  | Pass   |  |
| 0.180                                                                                                             | 38.86                       | 0.02       | -0.09     | 38.79 | Ave      | Live                                | 54.49         | -15.70 | Pass   |  |
| 0.217                                                                                                             | 43.62                       | 0.02       | -0.07     | 43.57 | QP       | Live                                | 62.95         | -19.38 | Pass   |  |
| 0.217                                                                                                             | 23.29                       | 0.02       | -0.07     | 23.24 | Ave      | Live                                | 52.95         | -29.71 | Pass   |  |
| 0.389                                                                                                             | 39.99                       | 0.03       | -0.05     | 39.97 | QP       | Live                                | 58.09         | -18.12 | Pass   |  |
| 0.389                                                                                                             | 25.53                       | 0.03       | -0.05     | 25.51 | Ave      | Live                                | 48.09         | -22.58 | Pass   |  |
| 0.441                                                                                                             | 38.29                       | 0.03       | -0.05     | 38.27 | QP       | Live                                | 57.05         | -18.78 | Pass   |  |
| 0.441                                                                                                             | 22.88                       | 0.03       | -0.05     | 22.86 | Ave      | Live                                | 47.05         | -24.19 | Pass   |  |
| 0.470                                                                                                             | 44.90                       | 0.03       | -0.05     | 44.88 | QP       | Live                                | 56.52         | -11.64 | Pass   |  |
| 0.470                                                                                                             | 37.54                       | 0.03       | -0.05     | 37.52 | Ave      | Live                                | 46.52         | -9.00  | Pass   |  |
| 2.729                                                                                                             | 36.62                       | 0.08       | -0.04     | 36.66 | QP       | Live                                | 56.00         | -19.34 | Pass   |  |
| 2.729                                                                                                             | 25.47                       | 0.08       | -0.04     | 25.51 | Ave      | Live                                | 46.00         | -20.49 | Pass   |  |
| 3.340                                                                                                             | 34.96                       | 0.08       | -0.03     | 35.01 | QP       | Live                                | 56.00         | -20.99 | Pass   |  |
| 3.340                                                                                                             | 24.48                       | 0.08       | -0.03     | 24.53 | Ave      | Live                                | 46.00         | -21.47 | Pass   |  |
| Spec Margin = QP./Ave. - Limit, ± Uncertainty                                                                     |                             |            |           |       |          |                                     |               |        |        |  |
| Combined Standard Uncertainty $u_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence |                             |            |           |       |          |                                     |               |        |        |  |
| Notes: EUT was setup as table top equipment and transmitted at 5300 MHz in HT20 at 6.5Mbps                        |                             |            |           |       |          |                                     |               |        |        |  |



**SOP 2** Conducted Emissions

Tracking # 31360999.003 Page 2 of 4

|                    |                             |                       |               |
|--------------------|-----------------------------|-----------------------|---------------|
| <b>EUT Name</b>    | Wireless Video Access Point | <b>Date</b>           | May 16, 2013  |
| <b>EUT Model</b>   | 405                         | <b>Temp / Hum in</b>  | 23°C / 32%rh  |
| <b>EUT Serial</b>  | 09130M000104                | <b>Temp / Hum out</b> | N/A           |
| <b>EUT Config.</b> | Attached Antenna            | <b>Line AC</b>        | 120Vac/60Hz   |
| <b>Standard</b>    | CFR47 Part 15.207           | <b>RBW / VBW</b>      | 9kHz / 30 kHz |
| <b>Lab/LISN</b>    | Lab #2 /Com-Power, Line 1   | <b>Performed by</b>   | Jeremy Luong  |

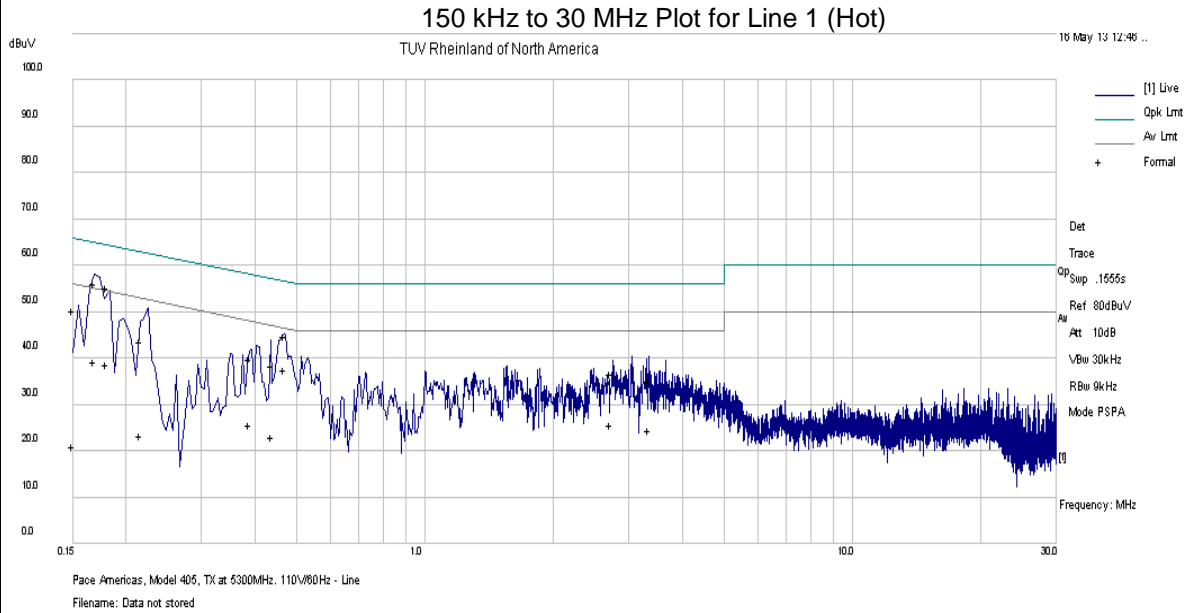


Notes: Meet FCC Class B limit.

| SOP 2 Conducted Emissions                                                                                         |       |                             |           |       |          | Tracking # 31360999.003 Page 3 of 4 |       |               |        |
|-------------------------------------------------------------------------------------------------------------------|-------|-----------------------------|-----------|-------|----------|-------------------------------------|-------|---------------|--------|
| <b>EUT Name</b>                                                                                                   |       | Wireless Video Access Point |           |       |          | <b>Date</b>                         |       | May 16, 2013  |        |
| <b>EUT Model</b>                                                                                                  |       | 405                         |           |       |          | <b>Temp / Hum in</b>                |       | 23°C / 32%rh  |        |
| <b>EUT Serial</b>                                                                                                 |       | 09130M000104                |           |       |          | <b>Temp / Hum out</b>               |       | N/A           |        |
| <b>EUT Config.</b>                                                                                                |       | Attached Antenna            |           |       |          | <b>Line AC / Freq</b>               |       | 120Vac/60Hz   |        |
| <b>Standard</b>                                                                                                   |       | CFR47 Part 15.207           |           |       |          | <b>RBW / VBW</b>                    |       | 9kHz / 30 kHz |        |
| <b>Lab/LISN</b>                                                                                                   |       | Lab #2 /Com-Power, Line 2   |           |       |          | <b>Performed by</b>                 |       | Jeremy Luong  |        |
| Frequency                                                                                                         | Raw   | Cable Loss                  | Ins. Loss | Level | Detector | Line                                | Limit | Margin        | Result |
| MHz                                                                                                               | dBuV  | dB                          | dB        | dBuV  |          | Line                                | dBuV  | dB            |        |
| 0.165                                                                                                             | 55.56 | 0.02                        | -0.09     | 55.49 | QP       | Neutral                             | 65.19 | -9.70         | Pass   |
| 0.165                                                                                                             | 36.19 | 0.02                        | -0.09     | 36.12 | Ave      | Neutral                             | 55.19 | -19.07        | Pass   |
| 0.173                                                                                                             | 57.18 | 0.02                        | -0.09     | 57.11 | QP       | Neutral                             | 64.82 | -7.71         | Pass   |
| 0.173                                                                                                             | 42.91 | 0.02                        | -0.09     | 42.84 | Ave      | Neutral                             | 54.82 | -11.98        | Pass   |
| 0.232                                                                                                             | 49.89 | 0.02                        | -0.07     | 49.85 | QP       | Neutral                             | 62.39 | -12.54        | Pass   |
| 0.232                                                                                                             | 36.15 | 0.02                        | -0.07     | 36.11 | Ave      | Neutral                             | 52.39 | -16.28        | Pass   |
| 0.388                                                                                                             | 40.26 | 0.03                        | -0.05     | 40.24 | QP       | Neutral                             | 58.10 | -17.86        | Pass   |
| 0.388                                                                                                             | 26.26 | 0.03                        | -0.05     | 26.24 | Ave      | Neutral                             | 48.10 | -21.86        | Pass   |
| 0.471                                                                                                             | 45.52 | 0.03                        | -0.05     | 45.50 | QP       | Neutral                             | 56.49 | -10.99        | Pass   |
| 0.471                                                                                                             | 35.70 | 0.03                        | -0.05     | 35.68 | Ave      | Neutral                             | 46.49 | -10.81        | Pass   |
| 0.537                                                                                                             | 37.32 | 0.03                        | -0.04     | 37.31 | QP       | Neutral                             | 56.00 | -18.69        | Pass   |
| 0.537                                                                                                             | 23.97 | 0.03                        | -0.04     | 23.96 | Ave      | Neutral                             | 46.00 | -22.04        | Pass   |
| 0.565                                                                                                             | 37.43 | 0.04                        | -0.04     | 37.43 | QP       | Neutral                             | 56.00 | -18.57        | Pass   |
| 0.565                                                                                                             | 25.86 | 0.04                        | -0.04     | 25.86 | Ave      | Neutral                             | 46.00 | -20.14        | Pass   |
| 0.728                                                                                                             | 35.20 | 0.04                        | -0.04     | 35.20 | QP       | Neutral                             | 56.00 | -20.80        | Pass   |
| 0.728                                                                                                             | 23.16 | 0.04                        | -0.04     | 23.16 | Ave      | Neutral                             | 46.00 | -22.84        | Pass   |
| 2.616                                                                                                             | 35.51 | 0.07                        | -0.04     | 35.54 | QP       | Neutral                             | 56.00 | -20.46        | Pass   |
| 2.616                                                                                                             | 23.82 | 0.07                        | -0.04     | 23.85 | Ave      | Neutral                             | 46.00 | -22.15        | Pass   |
| Spec Margin = QP./Ave. - Limit, ± Uncertainty                                                                     |       |                             |           |       |          |                                     |       |               |        |
| Combined Standard Uncertainty $u_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence |       |                             |           |       |          |                                     |       |               |        |
| Notes: EUT was setup as table top equipment and transmitted at 5300 MHz in HT20 at 6.5Mbps                        |       |                             |           |       |          |                                     |       |               |        |

**SOP 2** Conducted Emissions

Tracking # 31360999.003 Page 4 of 4

|                    |                             |                       |               |
|--------------------|-----------------------------|-----------------------|---------------|
| <b>EUT Name</b>    | Wireless Video Access Point | <b>Date</b>           | May 16, 2013  |
| <b>EUT Model</b>   | 405                         | <b>Temp / Hum in</b>  | 23°C / 32%rh  |
| <b>EUT Serial</b>  | 09130M000104                | <b>Temp / Hum out</b> | N/A           |
| <b>EUT Config.</b> | Attached Antenna            | <b>Line AC</b>        | 120Vac/60Hz   |
| <b>Standard</b>    | CFR47 Part 15.107           | <b>RBW / VBW</b>      | 9kHz / 30 kHz |
| <b>Lab/LISN</b>    | Lab #2 /Com-Power, Line 2   | <b>Performed by</b>   | Jeremy Luong  |

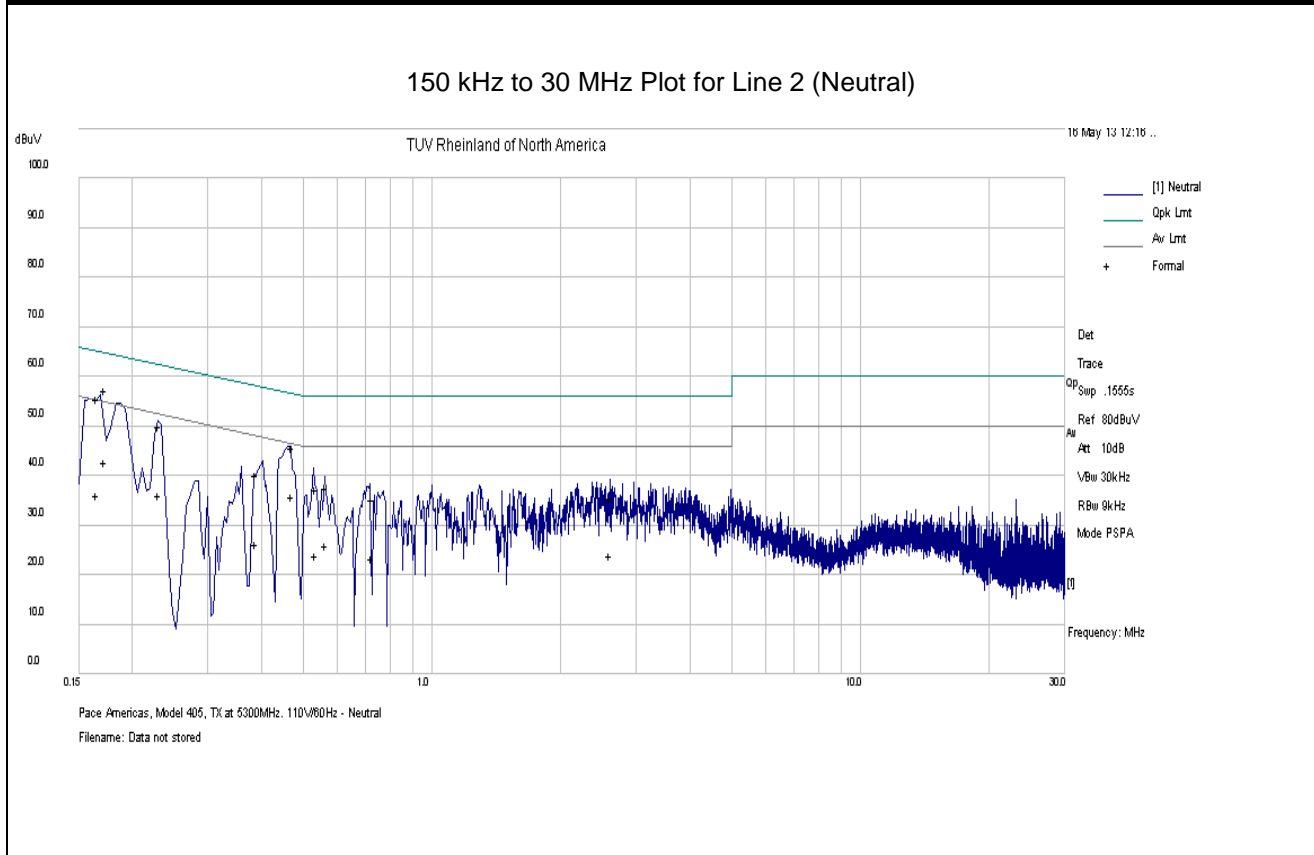

Note: Meet FCC Class B Limit.

---

## 4.7 Frequency Stability

In accordance with 47 CFR Part 15.407(g) the frequency stability of U-NII devices must be such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual. The Manufacturer calls out operating temperature ranges of +0° to +40° C

### 4.7.1 Test Methodology

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions. This test performs according to ANSI C63.10-2009 Section 6.8

### 4.7.2 Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signal should have  $\pm 20$ ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

Worst case:

5.200 GHz -  $\pm 20$ ppm/104 kHz

$\pm 20$ ppm at 5 GHz translates to a maximum frequency shift of  $\pm 103$  kHz. As the edge of the channels are at least one MHz from either of the band edges,  $\pm 103$  kHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the radio.

### 4.7.3 Limit

CFR47 Part 407(g) - Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 4.7.4 Test results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s) since the maximum frequency drift was 6.84 ppm.

**Table 9:** Frequency Stability – Test Results

| Temperature | Time   | -6 dB Lower Edge (MHz) | +6 dB Upper Edge (MHz) | Center Frequency (MHz) | PPM  |
|-------------|--------|------------------------|------------------------|------------------------|------|
| 40°C        | Start  | 5198.93220             | 5201.01530             | 5199.97375             | 5.05 |
|             | 2 Min. | 5198.94570             | 5200.98520             | 5199.96545             | 6.64 |
|             | 5 Min  | 5198.88210             | 5201.04680             | 5199.96445             | 6.84 |
|             | 10 min | 5198.88210             | 5201.04930             | 5199.96570             | 6.60 |
| 30°C        | Start  | 5198.93220             | 5201.04080             | 5199.98650             | 2.60 |
|             | 2 Min. | 5198.93070             | 5201.01830             | 5199.97450             | 4.90 |
|             | 5 Min  | 5198.93220             | 5201.01080             | 5199.97150             | 5.48 |
|             | 10 min | 5198.93220             | 5201.00780             | 5199.97000             | 5.77 |
| 20°C        | Start  | 5198.93970             | 5201.06180             | 5200.00075             | 0.14 |
|             | 2 Min. | 5198.93670             | 5201.03780             | 5199.98725             | 2.45 |
|             | 5 Min  | 5198.93520             | 5201.03180             | 5199.98350             | 3.17 |
|             | 10 min | 5198.93520             | 5201.02880             | 5199.98200             | 3.46 |
| 10°C        | Start  | 5198.94420             | 5201.08130             | 5200.01275             | 2.45 |
|             | 2 Min. | 5198.93820             | 5201.06030             | 5199.99925             | 0.14 |
|             | 5 Min  | 5198.93670             | 5201.05580             | 5199.99625             | 0.72 |
|             | 10 min | 5198.93670             | 5201.05430             | 5199.99550             | 0.87 |
| 0°C         | Start  | 5198.94420             | 5201.09030             | 5200.01725             | 3.32 |
|             | 2 Min. | 5198.94420             | 5201.08130             | 5200.01275             | 2.45 |
|             | 5 Min  | 5198.94420             | 5201.07680             | 5200.01050             | 2.02 |
|             | 10 min | 5198.94420             | 5201.07680             | 5200.01050             | 2.02 |

**Note:** 1. All frequency drifts were less than  $\pm 20$  ppm. The worst frequency drift was 6.84ppm/35.55kHz.  
 2. Channel 5200MHz was selected to frequency stability.

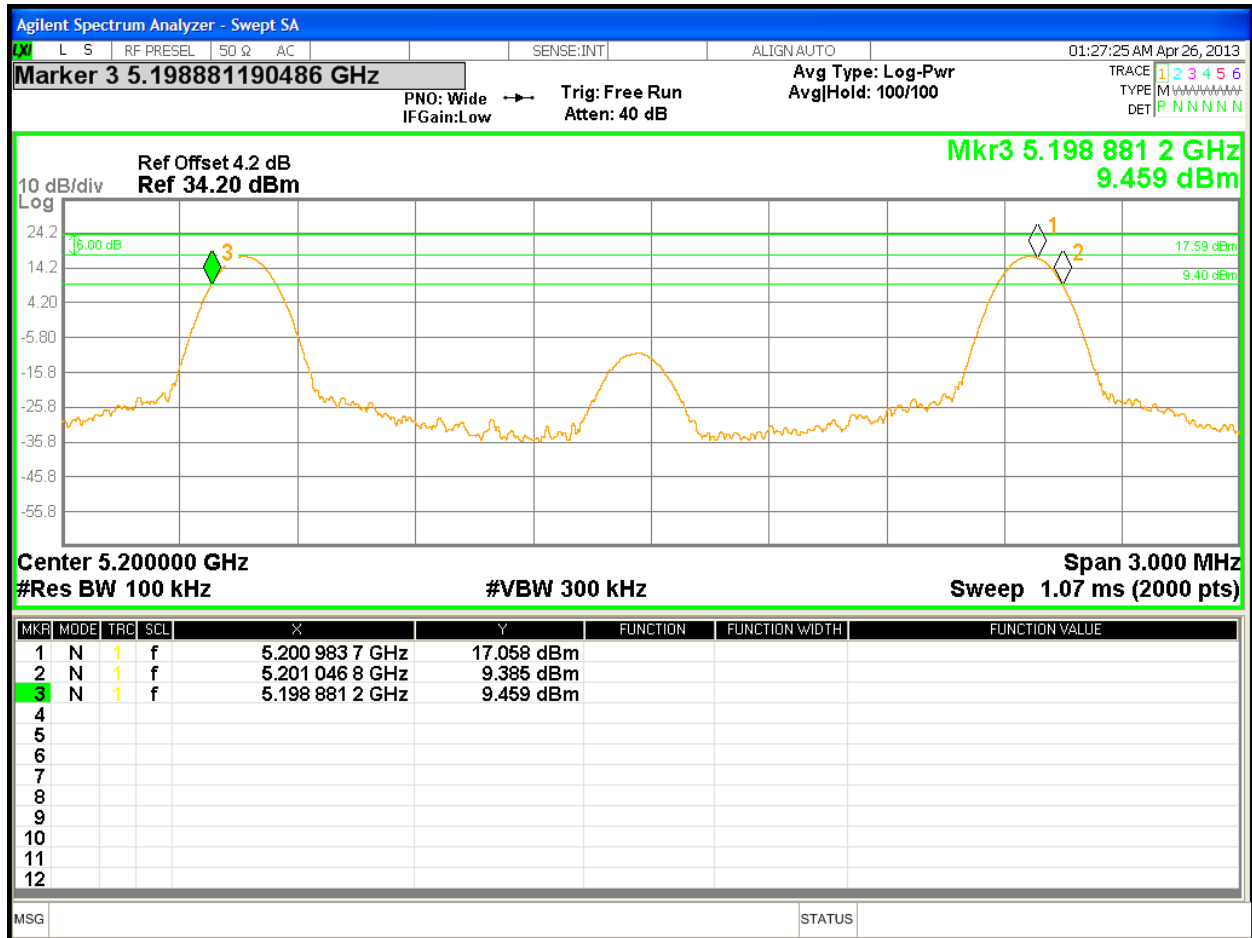


Figure 102: Frequency Stability – Worst Case

## 4.8 Voltage Variation

In accordance with 47 CFR Part 15.31 (e) intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 4.8.1 Test Methodology

The ac supply voltage was varied between 85% and 115% of the nominal rated supply voltage. The fundamental frequency was observed during the variation. The access point was powered 120V/60Hz by programmable power supply. The voltage was varied from 102Vac to 138Vac mean while the fundamental frequencies were observed and record for the maximum drift in ppm; part per millions.

### 4.8.2 Test results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s). The fundamental frequencies drifted less than  $\pm 20$ ppm.

**Table 10:** Voltage Variation – Test Results

| Frequency<br>MHz | Nominal<br>(120Vac)<br>MHz | Lo Voltage<br>(102Vac)<br>MHz | Hi Voltage<br>(138Vac)<br>MHz | Max Drift<br>ppm |
|------------------|----------------------------|-------------------------------|-------------------------------|------------------|
| 5260             | 5259.9705                  | 5259.9656                     | 5259.9661                     | 6.54             |
| 5300             | 5299.9647                  | 5299.9646                     | 5299.9665                     | 6.68             |
| 5320             | 5319.9642                  | 5319.9645                     | 5319.9640                     | 6.77             |

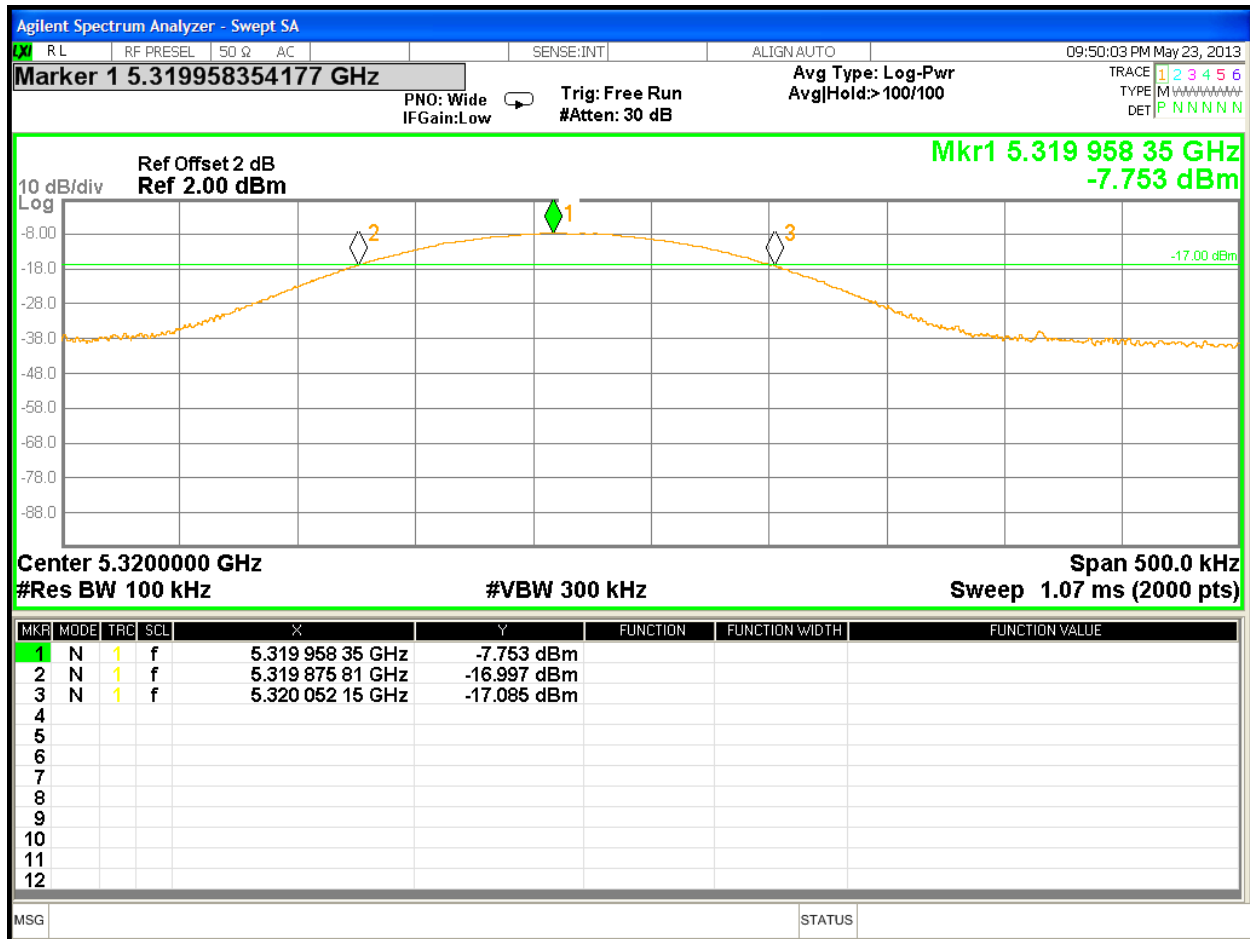


Figure 103: Voltage Variation – Worst Case



## 4.9 Maximum Permissible Exposure

### 4.9.1 Test Methodology

In this document, we try to prove the safety of radiation harmfulness to the human body for our product. The limit for Maximum Permissible Exposure (MPE) specified in FCC 1.1310 is followed. The Gain of the antenna used in this calculation is declared by the manufacturer, and the maximum total power input to the antenna is measured. Through the Friis transmission formula and the maximum gain of the antenna, we can calculate the distance, away from the product, where the limit of MPE is reached.

Although the Friis transmission formula is a far field assumption, the calculated result of that is an over-prediction for near field power density. We will take that as the worst case to specify the safety range.

### 4.9.2 RF Exposure Limit

According to FCC 1.1310 table 1: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b)

#### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency Range (MHz)                                           | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Average Time (minutes) |
|-----------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|------------------------|
| <b>(A)Limits For Occupational / Control Exposures</b>           |                               |                               |                                     |                        |
| 0.3–3.0                                                         | 614                           | 1.63                          | *(100)                              | 6                      |
| 3.0–30                                                          | 1842/f                        | 4.89/f                        | *(900/f <sup>2</sup> )              | 6                      |
| 30–300                                                          | ...                           | ...                           | 1.0                                 | 6                      |
| 300 - 1500                                                      | ...                           | ...                           | f/300                               | 6                      |
| 1500 - 100,000                                                  | ...                           | ...                           | 5                                   | 6                      |
| <b>(B)Limits For General Population / Uncontrolled Exposure</b> |                               |                               |                                     |                        |
| 0.3–1.34                                                        | 614                           | 1.63                          | *(100)                              | 30                     |
| 1.34-30                                                         | 824/f                         | 2.19/f                        | *(180/ f <sup>2</sup> )             | 30                     |
| 30–300                                                          | 27.5                          | 0.037                         | 0.2                                 | 30                     |
| 300 - 1500                                                      | ...                           | ...                           | f/1500                              | 30                     |
| 1500 - 100,000                                                  | ...                           | ...                           | 1.0                                 | 30                     |

F = Frequency in MHz

\* = Plane-wave equivalent power density

### 4.9.3 EUT Operating Condition

The software provided by Manufacturer enabled the EUT to transmit data at lowest, middle and highest channel individually.

### 4.9.4 Classification

The antenna of the product, under normal use condition, is at least 20cm away from the body of the user. Warning statement to the user for keeping at least 20cm or more separation distance with the antenna should be included in user's manual. So, this device is classified as a **Mobile Device**.

### 4.9.5 Test Results

#### 4.9.5.1 Antenna Gain

The transmitting antenna was integrated. The directional antenna gain was +8.00 dBi or 6.31 (numeric).

#### 4.9.5.2 Output Power into Antenna & RF Exposure value at distance 20cm:

Calculations for this report are based on highest power measurement.

Limit for MPE (from FCC part 1.1310 table1) is 1.0 mW/cm<sup>2</sup>

The highest measured total power is +20.79 dBm or 119.95mW

Using the Friss transmission formula, the EIRP is Pout\*G, and R is 20cm.

$Pd = (119.95 * 6.31) / (1600\pi) = 0.1506 \text{ mW/cm}^2$ , which is 0.8493 mW/cm<sup>2</sup> below to the limit.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

### 4.9.6 Sample Calculation

The Friss transmission formula:  $Pd = (Pout * G) / (4 * \pi * R^2)$

Where;

Pd = power density in mW/cm<sup>2</sup>

Pout = output power to antenna in mW

G = gain of antenna in linear scale

$\pi \approx 3.1416$

R = distance between observation point and center of the radiator in cm

Ref. : David K. Cheng, *Field and Wave Electromagnetics*, Second Edition, Page 640, Eq. (11-133).

## 6 Test Equipment Use List

### 6.1 Equipment List

| Equipment                  | Manufacturer    | Model #       | Serial/Inst # | Last Cal<br>mm/dd/yy | Next Cal<br>mm/dd/yy |
|----------------------------|-----------------|---------------|---------------|----------------------|----------------------|
| Bilog Antenna              | Sunol Sciences  | JB3           | A102606       | 05/15/2012           | 05/15/2014           |
| Horn Antenna               | Sunol Sciences  | DRH-118       | A040806       | 11/05/2012           | 11/05/2014           |
| Antenna (18-26GHz)         | CMT             | RA42-K-F-4B-C | 020131-004    | 03/05/2013           | 03/05/2014           |
| Antenna (26-40 GHz)        | CMT             | RA28-K-F-4B-C | 011469R-003   | 11/20/2012           | 11/20/2014           |
| EMI Receiver               | Hewlett Packard | 8546A         | 3807A00445    | 01/18/2013           | 01/18/2014           |
| Preselector                | Hewlett Packard | 85460A        | 3704A00407    | 01/18/2013           | 01/18/2014           |
| Amplifier                  | Hewlett Packard | 8447D         | 2944A07996    | 01/16/2013           | 01/16/2014           |
| Spectrum Analyzer          | Rohde & Schwarz | ESIB          | 832427/002    | 01/16/2013           | 01/16/2014           |
| Amplifier                  | Rohde & Schwarz | TS-PR18       | 3545.7008.03  | 01/16/2013           | 01/16/2014           |
| Amplifier                  | Rohde & Schwarz | TS-PR26       | 100011        | 03/05/2013           | 03/05/2014           |
| Amplifier                  | Rohde & Schwarz | TS-PR40       | 100012        | 11/20/2012           | 11/20/2014           |
| Signal Generator           | Anritsu         | MG3694A       | 42803         | 01/19/2013           | 01/19/2014           |
| Notch Filter               | Micro-Tronics   | BRM50702      | 37            | 01/16/2013           | 01/16/2014           |
| Notch Filter               | Micro-Tronics   | BRC50703      | 11            | 01/16/2013           | 01/16/2014           |
| Notch Filter               | Micro-Tronics   | BRC50704      | 8             | 01/16/2013           | 01/16/2014           |
| Notch Filter               | Micro-Tronics   | BRC50705      | 9             | 01/16/2013           | 01/16/2014           |
| High Pass Filter (3.5 GHz) | Hewlett Packard | 84300-80038   | 820004        | 01/16/2013           | 01/16/2014           |
| High Pass Filter (8.5 GHz) | Micro-Tronics   | HPM50107      | 4             | 01/16/2013           | 01/16/2014           |
| Power Supplier             | Kikosui         | PCR8000W      | CM000912      | 01/17/2013           | 01/17/2014           |
| Digital Multimeter         | Fluke           | 177           | 92780314      | 01/17/2013           | 01/17/2014           |
| Power Meter                | Agilent         | E4418B        | MY45103902    | 01/19/2013           | 01/19/2014           |
| Power Sensor               | Hewlett Packard | 8482A         | 55-5131       | 01/19/2013           | 01/19/2014           |
| EMI Receiver               | Hewlett Packard | 8546A         | 3942A00514    | 07/02/2012           | 07/02/2013           |
| Preselector                | Hewlett Packard | 85460A        | 3704A00485    | 07/02/2012           | 07/02/2013           |
| LISN                       | Com-Power       | LI-215        | 12100         | 01/16/2013           | 01/16/2014           |
| Transient Limiter          | Com-Power       | LIT-930       | 531582        | 01/16/2013           | 01/16/2014           |
| Thermometer                | Fluke           | 52II          | 88650033      | 07/26/2012           | 07/26/2013           |
| Thermo Chamber             | Espec           | BTZ-133       | 0613436       | 03/11/2013           | 03/11/2014           |
| Spectrum Analyzer          | Rohde & Schwarz | FSL6          | 100169        | 02/07/2013           | 02/07/2014           |
| Spectrum Analyzer          | Agilent         | N9038A        | MY51210195    | 01/19/2013           | 01/19/2014           |
| Vector Signal Generator    | Rohde & Schwarz | SMU 200A      | 1141.2005.02  | 11/24/2011           | 11/24/2013           |
| Amplifier                  | Hewlett Packard | 8449B         | 30008A01014   | 01/17/2013           | 01/17/2014           |

\* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.

## 7 EMC Test Plan

### 7.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

### 7.2 Customer

**Table 11:** Customer Information

|                         |                                    |
|-------------------------|------------------------------------|
| <b>Company Name</b>     | Pace Americas                      |
| <b>Address</b>          | 310 Providence Mine Road, Ste. 200 |
| <b>City, State, Zip</b> | Nevada City, CA 95959              |
| <b>Country</b>          | USA                                |
| <b>Phone</b>            | (530) 274 5440                     |
| <b>Fax</b>              | (530) 273 6340                     |

**Table 12:** Technical Contact Information

|               |                      |
|---------------|----------------------|
| <b>Name</b>   | Mark Rieger          |
| <b>E-mail</b> | Mark.Rieger@pace.com |
| <b>Phone</b>  | (530) 274 5440       |
| <b>Fax</b>    | (530) 273 6340       |

### 7.3 Equipment Under Test (EUT)

**Table 13:** EUT Specifications

| <b>EUT Specification</b>                                       |                                                                                                                                                                                       |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions                                                     | 6.0" x 5.6" x 1.3"                                                                                                                                                                    |
| AC Adapter<br>(Pace M/N:T018WA1225,<br>S/N:810611302000003156) | Input Voltage: 120Vac 50-60Hz<br>Input Current: 680mA<br>Output Voltage: 12VDC<br>Output Current: 1.5A                                                                                |
| Environment                                                    | Indoor and Outdoor                                                                                                                                                                    |
| Operating Temperature Range:                                   | 0 to 40 degrees C                                                                                                                                                                     |
| Multiple Feeds:                                                | <input type="checkbox"/> Yes and how many<br><input checked="" type="checkbox"/> No                                                                                                   |
| Hardware Version                                               | Rev. A1C                                                                                                                                                                              |
| Part Number                                                    | 297T1001700                                                                                                                                                                           |
| RF Software Version                                            | Busy Box V1.10.3                                                                                                                                                                      |
| 802.11-radio modules                                           |                                                                                                                                                                                       |
| Operating Mode                                                 | 802.11n HT20 and HT40                                                                                                                                                                 |
| Transmitter Frequency Band                                     | 5.15 GHz to 5.25 GHz (Indoor Use)<br>5.25 GHz to 5.35 GHz<br>5.47 GHz to 5.725 GHz (exclude 5600 MHz to 5650MHz)<br>5.725 GHz to 5.85 GHz                                             |
| Max. Rated Power Output                                        | See Channel Planning Table.                                                                                                                                                           |
| Power Setting @<br>Operating Channel                           | See Channel Planning Table.                                                                                                                                                           |
| Antenna Type                                                   | 3 integrated PCB dipole antenna and 1 attached stamped loop antenna                                                                                                                   |
| Antenna Gain                                                   | +2 dBi per antenna. (Same for both antenna type)<br>+8 dBi total directional gain.                                                                                                    |
| Modulation Type                                                | <input type="checkbox"/> AM <input type="checkbox"/> FM <input checked="" type="checkbox"/> DSSS <input checked="" type="checkbox"/> OFDM<br><input type="checkbox"/> Other describe: |
| Data Rate                                                      | 802.11n HT20:<br>4 Spatial Streams: 26, 52, 78, 104, 156, 208, 234, 260 Mbps<br>802.11n HT40:<br>4 Spatial Streams: 54, 108, 162, 216, 324, 432, 486, 540 Mbps                        |
| TX/RX Chain (s)                                                | MIMO (4x4)                                                                                                                                                                            |
| Directional Gain Type                                          | <input checked="" type="checkbox"/> Correlated <input checked="" type="checkbox"/> Beam-Forming<br><input type="checkbox"/> Other describe:                                           |

| <b>EUT Specification</b>                                                                                                                                  |                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type of Equipment                                                                                                                                         | <input checked="" type="checkbox"/> Table Top <input type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet<br><input type="checkbox"/> Other |
| <b>Note:</b> 1. All four chains will be on / transmitted at all time.<br>2. This report only documents the radio characteristics for 5250 – 5350 MHz band |                                                                                                                                                                     |

**Table 14:** EUT Channel Power Specifications

| No. | Frequency (MHz) | Target Power Value |         |         |              |              |
|-----|-----------------|--------------------|---------|---------|--------------|--------------|
|     |                 | 802.11b            | 802.11g | 802.11a | 802.11n HT20 | 802.11n HT40 |
| 36  | 5180            |                    |         |         | 10.0         | 11.0         |
| 40  | 5200            |                    |         |         | 9.0          |              |
| 44  | 5220            |                    |         |         | 9.0          | 11.0         |
| 48  | 5240            |                    |         |         | 9.0          |              |
| 52  | 5260            |                    |         |         | 15.0         | 17.0         |
| 56  | 5280            |                    |         |         | 15.0         |              |
| 60  | 5300            |                    |         |         | 15.0         | 14.0         |
| 64  | 5320            |                    |         |         | 15.0         |              |
| 100 | 5500            |                    |         |         | 16.0         | 16.0         |
| 104 | 5520            |                    |         |         | 16.0         |              |
| 108 | 5540            |                    |         |         | 16.0         | 18.0         |
| 112 | 5560            |                    |         |         | 16.0         |              |
| 116 | 5580            |                    |         |         | 16.0         |              |
| 120 | 5600            |                    |         |         |              |              |
| 124 | 5620            |                    |         |         |              |              |
| 128 | 5640            |                    |         |         |              |              |
| 132 | 5660            |                    |         |         | 16.0         | 18.0         |
| 136 | 5680            |                    |         |         | 16.0         |              |
| 140 | 5700            |                    |         |         | 16.0         |              |
| 149 | 5745            |                    |         |         | 22.0         | 22.0         |
| 153 | 5765            |                    |         |         | 22.0         |              |
| 157 | 5785            |                    |         |         | 22.0         | 22.0         |
| 159 | 5795            |                    |         |         | 22.0         |              |
| 161 | 5805            |                    |         |         | 22.0         |              |
| 165 | 5825            |                    |         |         | 22.0         |              |

**Note:** 1. The center operating frequency is shifted upward by 10 MHz for HT40.  
 2. The final adjusted power targets are updated at the above indicated frequencies.

**Table 15:** Interface Specifications

| Interface Type | Cabled with what type of cable? | Is the cable shielded?      | Maximum potential length of the cable?           | Metallic (M), Coax (C), Fiber (F), or Not Applicable? |
|----------------|---------------------------------|-----------------------------|--------------------------------------------------|-------------------------------------------------------|
| RJ45           | CAT-5 Ethernet                  | <input type="checkbox"/> No | <input checked="" type="checkbox"/> Metric: 10 m | <input checked="" type="checkbox"/> M                 |

**Table 16:** Supported Equipment

| Equipment          | Manufacturer | Model  | Serial     | Used for                    |
|--------------------|--------------|--------|------------|-----------------------------|
| Laptop             | Dell         | PP23LB | 9271001233 | Setup EUT operating channel |
| <b>Note:</b> None. |              |        |            |                             |

**Table 17:** Description of Sample used for Testing

| Device | Serial       | RF Connection                | CFR47 Part 15.407                                                                                                                              |
|--------|--------------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| 405    | 09130M000104 | Integrated Antenna           | TX Emission,<br>AC Conducted Emission                                                                                                          |
|        |              | Direct via Murada Connection | Transmitted Output Power,<br>Power Spectral Density,<br>Peak Excursion Ratio<br>Occupied Bandwidth<br>Frequency Stability<br>Voltage Variation |

**Table 18:** Description of Test Configuration used for Radiated Measurement.

| Device                                                                            | Antenna    | Mode     | Setup Photo (X-Axis) | Setup Photo (Y-Axis) | Setup Photo (Z-Axis) |
|-----------------------------------------------------------------------------------|------------|----------|----------------------|----------------------|----------------------|
| 405                                                                               | Integrated | Transmit | EUT laid flat.       | EUT stood upright    | Na.                  |
| <b>Note:</b> Pre-scans were performed in 2 supporting axis, and Y-axis was worst. |            |          |                      |                      |                      |

**Table 19:** Final Test Mode for 5250 - 5350 Bands

| Test                                          | 802.11a | 802.11n HT20                                                | 802.11n HT40                                           |
|-----------------------------------------------|---------|-------------------------------------------------------------|--------------------------------------------------------|
| Occupied Bandwidth<br>FCC Part 15.407(a)      |         | Band 2: 5260, 5300, 5320 MHz<br>4 Streams – 6.5Mbps/ stream | Band 2: 5270, 5310 MHz<br>4 Streams – 13.5Mbps/ stream |
| Output Power<br>FCC Part 15.407(a)(1-2)       |         | Band 2: 5260, 5300, 5320 MHz<br>4 Streams – 6.5Mbps/ stream | Band 2: 5270, 5310 MHz<br>4 Streams – 13.5Mbps/ stream |
| Peak Excursion Ratio<br>FCC Part 15.407(a)(6) |         | Band 2: 5260, 5300, 5320 MHz<br>4 Streams – 6.5Mbps/ stream | Band 2: 5270, 5310 MHz<br>4 Streams – 13.5Mbps/ stream |



| Test                                                                                                                                                                                                                                       | 802.11a                                                                                                                                                                                                                         | 802.11n HT20                                                            | 802.11n HT40                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------------|
| Peak Power Spectral Density<br>FCC Part 15.407(a)                                                                                                                                                                                          |                                                                                                                                                                                                                                 | Band 2: 5260, 5300, 5320 MHz<br>4 Streams – 6.5Mbps/ stream             | Band 2: 5270, 5310 MHz<br>4 Streams – 13.5Mbps/ stream             |
| Band-Edge (Radiated)<br>FCC Part 15.205, 15.209, 15.407(b)                                                                                                                                                                                 |                                                                                                                                                                                                                                 | Band 2: 5260, 5300, 5320 MHz<br>4 Streams – 6.5Mbps/ stream<br>(Y-Axis) | Band 2: 5270, 5310 MHz<br>4 Streams – 13.5Mbps/ stream<br>(Y-Axis) |
| Transmitted Spurious Emission (30 MHz – 1GHz)<br>FCC Part 15.205, 15.209, 15.407(b)                                                                                                                                                        |                                                                                                                                                                                                                                 | Worst Case: 5300 MHz<br>4 Streams – 6.5Mbps/ stream<br>(Y-Axis)         |                                                                    |
| Transmitted Spurious Emission (Above 1GHz)<br>FCC Part 15.205, 15.209, 15.407(b)                                                                                                                                                           |                                                                                                                                                                                                                                 | Band 2: 5260, 5300, 5320 MHz<br>4 Streams – 6.5Mbps/ stream<br>(Y-Axis) | Band 2: 5270, 5310 MHz<br>4 Streams – 13.5Mbps/ stream<br>(Y-Axis) |
| Conducted Spurious Emission (antenna port). FCC Part 15.407 (b)                                                                                                                                                                            | According to CFR47 15.407 (b) EIPR shall not exceed -27 dBm/MHz. This is equivalent to the field strength of 68.2dBuV/m at 3 meter distance. The EUT is satisfied the requirement by meeting the limit under CFR47 Part 15.209. |                                                                         |                                                                    |
| AC Conducted Emission<br>FCC Part 15.207                                                                                                                                                                                                   |                                                                                                                                                                                                                                 | 5300 MHz at<br>4 Data Stream: 6.5Mbps                                   |                                                                    |
| Frequency Stability<br>FCC Part 15.407 (g)                                                                                                                                                                                                 | CW Tone at 5200 MHz, (Send_cw_signal 40 0 0 3 1 0).                                                                                                                                                                             |                                                                         |                                                                    |
| Voltage Variation<br>FCC Part 15.31 (e)                                                                                                                                                                                                    | Continuous wave at 5260, 5300, 5320MHz, (Send_cw_signal 40 0 0 3 1 0)                                                                                                                                                           |                                                                         |                                                                    |
| Dynamic Frequency Selection<br>FCC Part 15.407 (h)                                                                                                                                                                                         | 5250 – 5350 MHz band supports DFS. See DFS test report.                                                                                                                                                                         |                                                                         |                                                                    |
| <b>Note:</b> 1. Band 2: 5250 MHz – 5350 MHz does not support 802.11a.<br>2. All radiated emission performed on Y-Axis.<br>3. All four chains will be on at all time.<br>4. All tests were pre-scanned for worst case before final testing. |                                                                                                                                                                                                                                 |                                                                         |                                                                    |

---

## 7.4 Test Specifications

Testing requirements

**Table 20:** Test Specifications

| Emissions and Immunity   |             |
|--------------------------|-------------|
| Standard                 | Requirement |
| CFR 47 Part 15.407: 2012 | All         |
| RSS 210 Issue 8, 2010    | All         |