

# Emissions Test Report

**EUT Name:** Wireless Video Access Point  
**Model No.:** 405  
CFR 47 Part 15.407 2012 and RSS 210:2010

*Prepared for:*

Mark Rieger  
Pace Americas  
310 Providence Mine Road, Ste. 200  
Nevada City, CA 95959  
Tel: (530) 274-5440  
Fax: (530) 273-6340

*Prepared by:*

TUV Rheinland of North America, Inc.  
1279 Quarry Lane  
Pleasanton, CA 94566  
Tel: (925) 249-9123  
Fax: (925) 249-9124  
<http://www.tuv.com/>

*Report/Issue Date:* June 7, 2013  
*Job #* 0000110737  
*Report Number:* 31360999.004

## Revisions

Revision No.	Date MM/DD/YYYY	Reason for Change	Author
0	06/07/2013	Original Document	N/A

Note: Latest revision report will replace all previous reports.

# Statement of Compliance

*Manufacturer:* Pace Americas  
310 Providence Mine Road, Ste. 200  
Nevada City, CA 95959  
(530) 274-5440

*Requester / Applicant:* Mark Rieger

*Name of Equipment:* Wireless Video Access Point  
*Model No.* 405  
*Type of Equipment:* Intentional Radiator  
*Application of Regulations:* CFR 47 Part 15.407 2012 and RSS 210:2010  
*Test Dates:* April 29, 2013 to May 24, 2013

*Guidance Documents:*


Emissions: ANSI C63.10-2009, KDB 789033 D01 General UNII Test Procedure v01r03

*Test Methods:*

Emissions: ANSI C63.10-2009, KDB 789033 D01 General UNII Test Procedure v01r03

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.



Jeremy Luong                      06/07/2013  
-----  
Test Engineer                      Date

Jeremy Luong                      06/07/2013  
-----  
Test Engineer                      Date



**Testing Cert #3331.02**

**US5254**

**2932M-1**

Table of Contents

<b>1</b>	<b>Executive Summary</b>	<b>7</b>
1.1	Scope	7
1.2	Purpose	7
1.3	Summary of Test Results	8
1.4	Special Accessories	8
1.5	Equipment Modifications	8
<b>2</b>	<b>Laboratory Information</b>	<b>9</b>
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	NIST / A2LA	9
2.1.3	Canada – Industry Canada	9
2.1.4	Japan – VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	10
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.2.2	Immunity Test Facility	10
2.3	Measurement Uncertainty	10
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty	11
2.4	Calibration Traceability	12
<b>3</b>	<b>Product Information</b>	<b>13</b>
3.1	Product Description	13
3.2	Equipment Configuration	13
3.3	Operating Mode	13
3.4	Unique Antenna Connector	14
3.4.1	Results	14
<b>4</b>	<b>Emissions</b>	<b>15</b>
4.1	Output Power Requirements	15
4.1.1	Test Method	15
4.1.2	Results	16
4.2	Occupied Bandwidth	30
4.2.1	Test Method	30
4.2.2	Results	31
4.3	Peak Excursion	44
4.3.1	Test Method	44
4.3.2	Results	45
4.4	Power Spectral Density	58
4.4.1	Test Method	58
4.4.2	Results	59

Table of Contents

<b>4.5</b>	<b>Transmitter Spurious Emissions</b>	<b>78</b>
4.5.1	Test Methodology	78
4.5.2	Transmitter Spurious Emission Limit	79
4.5.3	Test Results	79
4.5.4	Sample Calculation	114
<b>4.6</b>	<b>AC Conducted Emissions</b>	<b>115</b>
4.6.1	Test Methodology	115
4.6.2	Test Results	115
<b>4.7</b>	<b>Frequency Stability</b>	<b>120</b>
4.7.1	Test Methodology	120
4.7.2	Manufacturer Declaration	120
4.7.3	Limit	121
4.7.4	Test results	121
<b>4.8</b>	<b>Voltage Variation</b>	<b>123</b>
4.8.1	Test Methodology	123
4.8.2	Test results	123
<b>4.9</b>	<b>Maximum Permissible Exposure</b>	<b>125</b>
4.9.1	Test Methodology	125
4.9.2	RF Exposure Limit	125
	<b><i>LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)</i></b>	<b>125</b>
4.9.3	EUT Operating Condition	126
4.9.4	Classification	126
4.9.5	Test Results	126
4.9.6	Sample Calculation	126
<b>6</b>	<b><i>Test Equipment Use List</i></b>	<b>127</b>
<b>6.1</b>	<b>Equipment List</b>	<b>127</b>
<b>7</b>	<b><i>EMC Test Plan</i></b>	<b>128</b>
<b>7.1</b>	<b>Introduction</b>	<b>128</b>
<b>7.2</b>	<b>Customer</b>	<b>128</b>
<b>7.3</b>	<b>Equipment Under Test (EUT)</b>	<b>129</b>
<b>7.4</b>	<b>Test Specifications</b>	<b>134</b>

Index of Tables

**Table 1:** Summary of Test Results ..... 8  
**Table 2:** RF Output Power at the Antenna Port – Test Results ..... 16  
**Table 3:** Average Output Power at the Antenna Port – Reference Only ..... 17  
**Table 4:** Occupied Bandwidth – Test Results ..... 31  
**Table 5:** Peak Excursion – Test Results ..... 45  
**Table 6:** Power Spectral Density – Test Results ..... 59  
**Table 7:** Transmit Spurious Emission at Band-Edge Requirements ..... 80  
**Table 8:** AC Conducted Emissions – Test Results ..... 115  
**Table 9:** Frequency Stability – Test Results ..... 121  
**Table 10:** Voltage Variation – Test Results ..... 123  
**Table 11:** Customer Information ..... 128  
**Table 12:** Technical Contact Information ..... 128  
**Table 13:** EUT Specifications ..... 129  
**Table 14:** EUT Channel Power Specifications ..... 131  
**Table 15:** Interface Specifications ..... 131  
**Table 16:** Supported Equipment ..... 132  
**Table 17:** Description of Sample used for Testing ..... 132  
**Table 18:** Description of Test Configuration used for Radiated Measurement. .... 132  
**Table 19:** Final Test Mode for 5470 - 5725 Band ..... 132  
**Table 20:** Test Specifications ..... 134

# 1 Executive Summary

## 1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.407 2012 and RSS 210:2010 based on the results of testing performed on April 29, 2013 to May 24, 2013 on the Wireless Video Access Point Model 405 manufactured by Pace Americas. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

## 1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

This report will document the result for operating frequency band 5470 MHz to 5725 MHz.

### 1.3 Summary of Test Results

**Table 1:** Summary of Test Results

Test	Test Method ANSI C63.10	Test Parameters (from Standard)	Result
Spurious Emission in Transmitted Mode	CFR47 15.209, CFR47 15.407 (b) RSS-GEN Sect.7.2.3, RSS 210 Sect. A.9.2	Class B	Complied
Restricted Bands of Operation	CFR47 15.205, RSS 210 Sect.2.6	Class B	Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.7.2.2	Class B	Complied
Occupied Bandwidth	CFR47 15.407 (a), RSS GEN Sect.4.4.1	Na	N/A
Maximum Output Power	CFR47 15.407 (a), RSS 210 Sect. A.9.2	Band 3: 23.97 dBm	Complied
Peak Power Spectral Density	CFR47 15.407 (a), RSS 210 Sect. A.9.2	Band 2: 11 dBm/MHz	Complied
Peak Excursion Ratio	CFR47 15.407 (a)(6)	< 13 dB	Complied
Conducted Emission – Antenna Port	CFR47 15.407 (b), RSS 210 Sect.6.2.2	30 MHz -40 GHz < 27 dBm/MHz	Complied
Frequency Stability	CFR47 15.407 (g), RSS GEN Sect. 4.7.	±20 ppm	Complied
RF Exposure	CFR47 15.247 (i), 2.1091	General Population	Complied

Note: This report will cover only band 5470 MHz to 5825 MHz.

### 1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

### 1.5 Equipment Modifications

None



## 2 Laboratory Information

### 2.1 Accreditations & Endorsements

#### 2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US5254). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

#### 2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:1999 and ISO 9002 (Lab Code Testing Cert #3331.02). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

#### 2.1.3 Canada – Industry Canada



TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M-1). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

#### 2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0031

VCCI Registration No. for Santa Clara: A-0032

### 2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

## 2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA. The 2305 Mission College, Santa Clara, 95054, USA location is considered a Pleasanton annex.

### 2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Lab Code Testing Cert #3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

### 2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of  $10^9$  Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

## 2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1<sup>st</sup> Edition, 1995.

The *Combined Standard Uncertainty* is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

### 2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V} / \text{m}}{20}}$$

#### Sample radiated emissions calculation @ 30 MHz

**Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)**

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

### 2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	U <sub>lab</sub>	U <sub>cispr</sub>
<b>Radiated Disturbance @ 10 meters</b>		
30 – 1,000 MHz	2.25 dB	4.51 dB
<b>Radiated Disturbance @ 3 meters</b>		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 40 GHz	2.47 dB	4.93 dB
<b>Conducted Disturbance @ Mains Terminals</b>		
150 kHz – 30 MHz	1.09 dB	2.18 dB
<b>Disturbance Power</b>		
30 MHz – 300 MHz	3.92 dB	4.3 dB

### 2.3.1 Measurement Uncertainty Immunity

The estimated combined standard uncertainty for ESD immunity measurements is $\pm 8.2\%$ .	Per IEC 61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is $\pm 4.10$ dB.	Per IEC 61000-4-3
The estimated combined standard uncertainty for conducted immunity measurements with CDN is $\pm 3.66$ dB	Per IEC 61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity is $\pm 2.9\%$ .	Per IEC 61000-4-8

#### Thermo KeyTek EMC Pro

The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 2.6\%$ .
The estimated combined standard uncertainty for surge immunity measurements is $\pm 2.6\%$ .
The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 1.74\%$ .

#### Measurement Uncertainty – Radio Testing

The estimated combined standard uncertainty for frequency error measurements is $\pm 3.88$ Hz
The estimated combined standard uncertainty for carrier power measurements is $\pm 1.59$ dB.
The estimated combined standard uncertainty for adjacent channel power measurements is $\pm 1.47$ dB.
The estimated combined standard uncertainty for modulation frequency response measurements is $\pm 0.46$ dB.
The estimated combined standard uncertainty for transmitter conducted emission measurements is $\pm 4.01$ dB

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

## 2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

---

## 3 Product Information

### 3.1 Product Description

The Pace 405 wireless video access point allows service providers to securely deliver high quality HD video to any location in a subscriber home. Using state of the art wireless technology including digital beam forming, customers retain traditional “wired” levels of service and quality while service providers enjoy the benefits of shortened installation times and more flexibility in how they deploy their IPTV or OTT services

Key Feature:

- 5GHz 802.11n wireless access point
- 4x4 MIMO (up to 600Mbps phy rate)
- High-Power Transmit For Maximum Coverage
- Gigabit Ethernet port
- Robust quality of service (QoS) and traffic management features
- Simple, push-button wireless setup for wireless set-tops
- TR-069 Management Client
- LEDs: Power, Wireless Signal Quality, Operational Mode (AP/STA), Ethernet Link, Wireless Pairing Indicator

### 3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

### 3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

### **3.4 Unique Antenna Connector**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

#### **3.4.1 Results**

The Wireless Video Access Point has 4 internal fixed antennas, 3 onboard PCB dipole antennas and 1 stamped metal loop antenna. All antennas are integrated on the PCB. There is no external antenna connection available.

## 4 Emissions

Testing was performed in accordance with CFR 47 Part 15.407: 2012 and RSS 210 Annex 9: 2010. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

### 4.1 Output Power Requirements

*The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.*

*The maximum output power and harmonics shall not exceed CFR47 Part 15.407 (a):2012 and RSS 210 A9.2: 2010.*

*The maximum transmitted powers are*

*Band 5150-5250 MHz: 50 mW or 4 dBm + 10Log B.*


*Band 5250-5350 MHz, 5470-5725 MHz: 250 mW or 11 dBm + 10Log B.*

*Band 5725-5825 MHz: 1 W or 17 dBm + 10Log B. Where B is 26 dB Bandwidth.*

#### 4.1.1 Test Method

The ANSI C63.10-2009 Section 6.10.3.1 conducted method was used to measure the channel power output. The preliminary investigation was performed at different data rate/ chain to determine the highest power output for each mode. The worst findings were conducted on 3 channels in each mode on the sample, S/N 09130M000104, per CFR47 Part 15.407(a): 2012 and RSS 210 A.9.2; 5470 MHz to 5725 MHz. The worst mode results indicated below.

Test Setup:

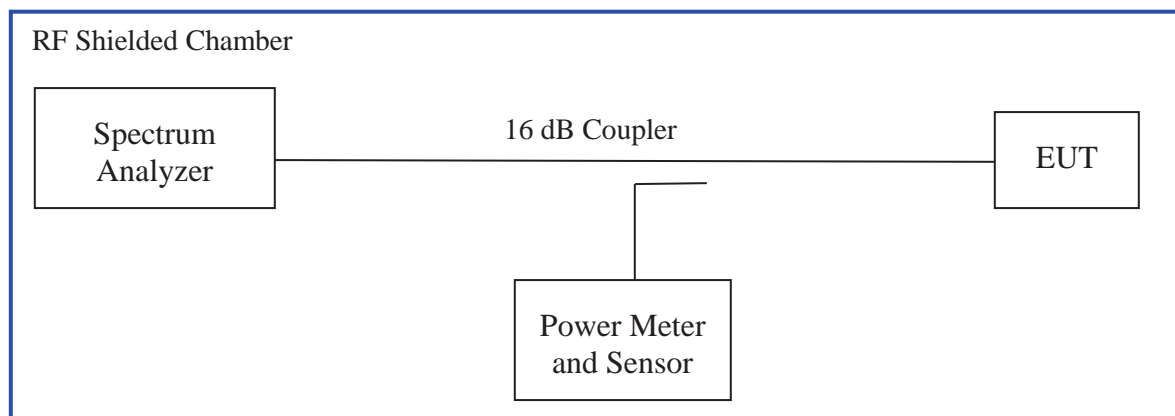

*Method SA-1 of "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices" applies since the EUT continuously transmit; where duty cycle is greater than 98%. Sample detector was used.*

Each chain was measured individually and applied the measure-and-sum approach per KDB66291.

#### 4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 2: RF Output Power at the Antenna Port – Test Results**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature							
<b>Antenna Type:</b> Integrated				<b>Power Setting:</b> See test plan			
<b>Max. Directional Gain:</b> + 8 dBi				<b>Signal State:</b> Modulated at 100%.			
<b>Ambient Temp.:</b> 23 °C				<b>Relative Humidity:</b> 30%			
<b>802.11n (HT20) Mode, 4x4</b>							
Operating Channel	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Ch2 [dBm]	Ch3 [dBm]	Total Power [dBm]	Margin [dB]
5500	21.97	13.16	13.75	13.15	14.24	19.62	-2.29
5580	21.97	13.08	14.18	13.59	14.31	19.84	-2.07
5700	21.97	12.77	13.39	12.76	13.33	19.09	-2.82
<b>Note:</b> 1.The highest output power was observed at HT20 6.5 Mbps, 4 Data Streams. 2. All chains will be on at all time and beam performing. RF output powers were summed per KDB 662911. 3. The total directional gain would be 8dBi; 2dBi +10*Log(4). Per CFR47 Part 15.407 (a), the limit is reduced for every dBi gain exceeding 6dBi. The limit would be 21.97 dBm.							
<b>802.11n (HT40) Mode, 4x4</b>							
Operating Channel	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Ch2 [dBm]	Ch3 [dBm]	Total Power [dBm]	Margin [dB]
5510	21.97	15.21	15.32	14.90	16.05	21.41	-0.56
5550	21.97	14.92	15.71	15.01	15.85	21.41	-0.56
5670	21.97	14.71	15.19	15.03	15.67	21.19	-0.78
<b>Note:</b> 1.The highest output power was observed at HT40 13.5 Mbps, 4 Data Streams. 2. All chains will be on at all time and beam performing. RF output powers were summed per KDB 662911. 3. The total directional gain would be 8dBi; 2dBi +10*Log(4). Per CFR47 Part 15.407 (a), the limit is reduced for every dBi gain exceeding 6dBi. The limit would be 21.97 dBm							



**Table 3: Average Output Power at the Antenna Port – Reference Only**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature							
<b>Antenna Type:</b> Integrated				<b>Power Setting:</b> See test plan			
<b>Max. Directional Gain:</b> + 8 dBi				<b>Signal State:</b> Modulated at 100%.			
<b>Ambient Temp.:</b> 23 °C				<b>Relative Humidity:</b> 30%			
<b>802.11n (HT20) Mode, 4x4</b>							
Operating Channel	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Ch2 [dBm]	Ch3 [dBm]	Total Power [dBm]	Margin [dB]
5500		14.05	14.72	14.14	15.25	20.59	
5580		14.64	15.77	15.21	15.93	21.43	
5700		15.24	15.32	14.54	15.24	21.12	
<b>Note:</b> The highest output power was observed at HT20 6.5 Mbps, 4 Data Streams.							
<b>802.11n (HT40) Mode, 4x4</b>							
Operating Channel	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Ch2 [dBm]	Ch3 [dBm]	Total Power [dBm]	Margin [dB]
5510		15.82	15.66	15.62	16.11	21.83	
5550		15.24	16.05	15.27	15.93	21.66	
5670		14.96	15.48	15.31	15.65	21.38	
<b>Note:</b> The highest output power was observed at HT40 13.5 Mbps, 4 Data Streams.							

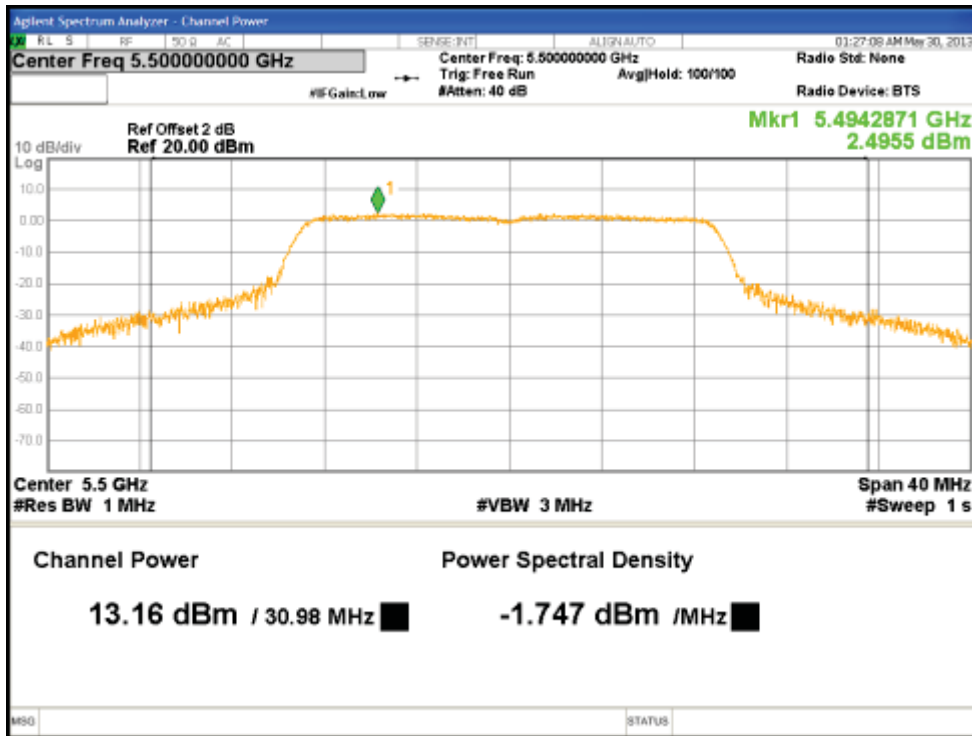


Figure 1: Maximum Transmitted Power, 5500 MHz at HT20, Chain 0

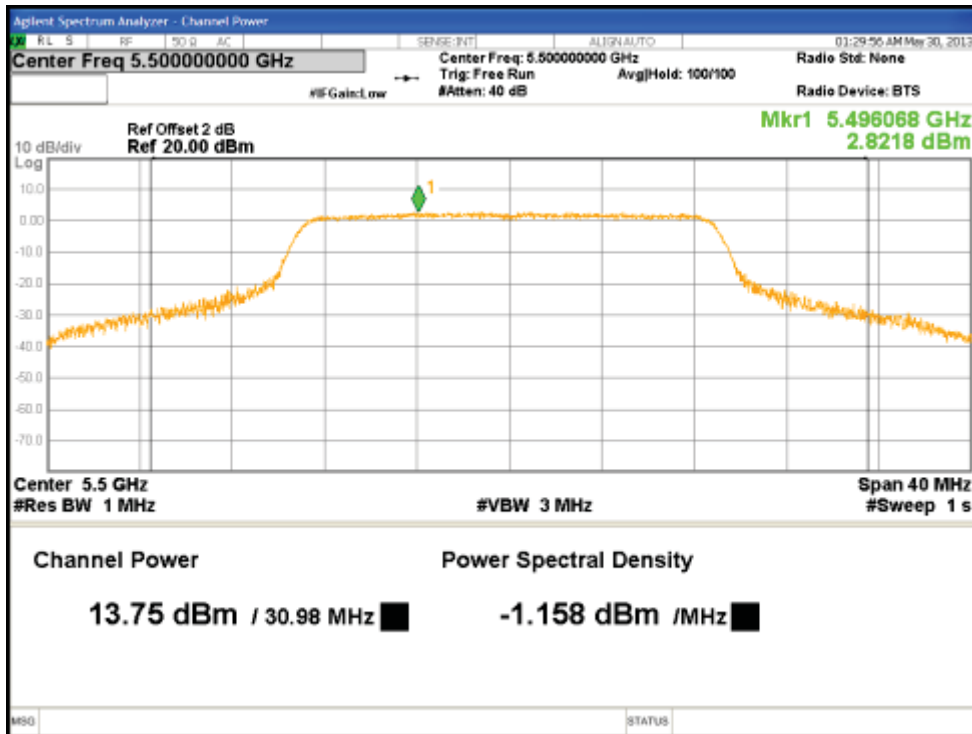


Figure 2: Maximum Transmitted Power, 5500 MHz at HT20, Chain 1

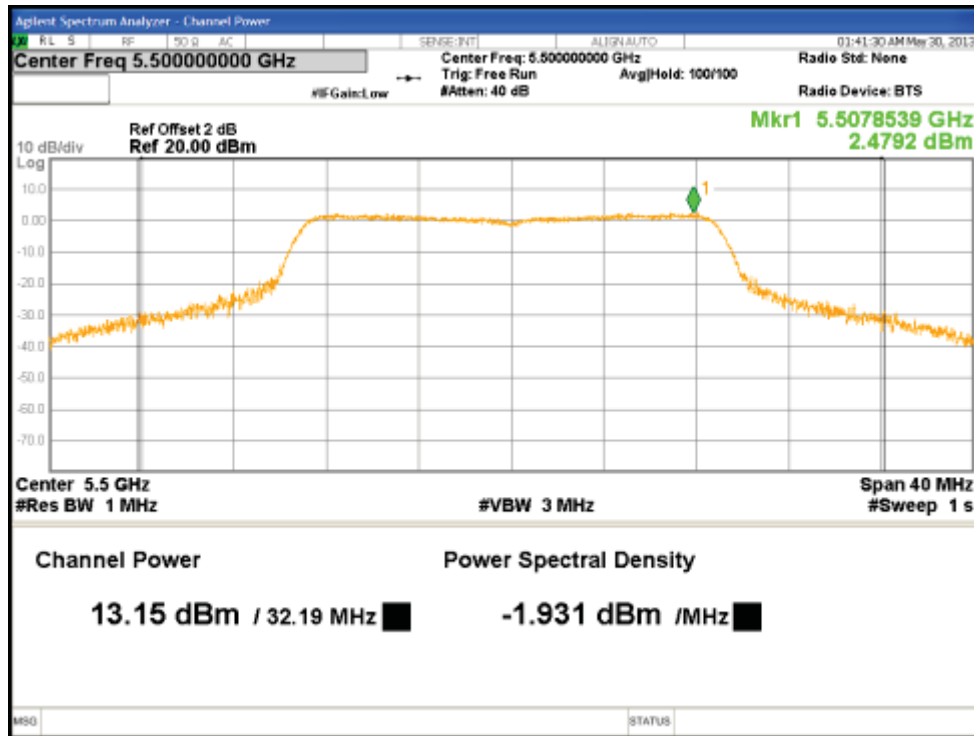


Figure 3: Maximum Transmitted Power, 5500 MHz at HT20, Chain 2

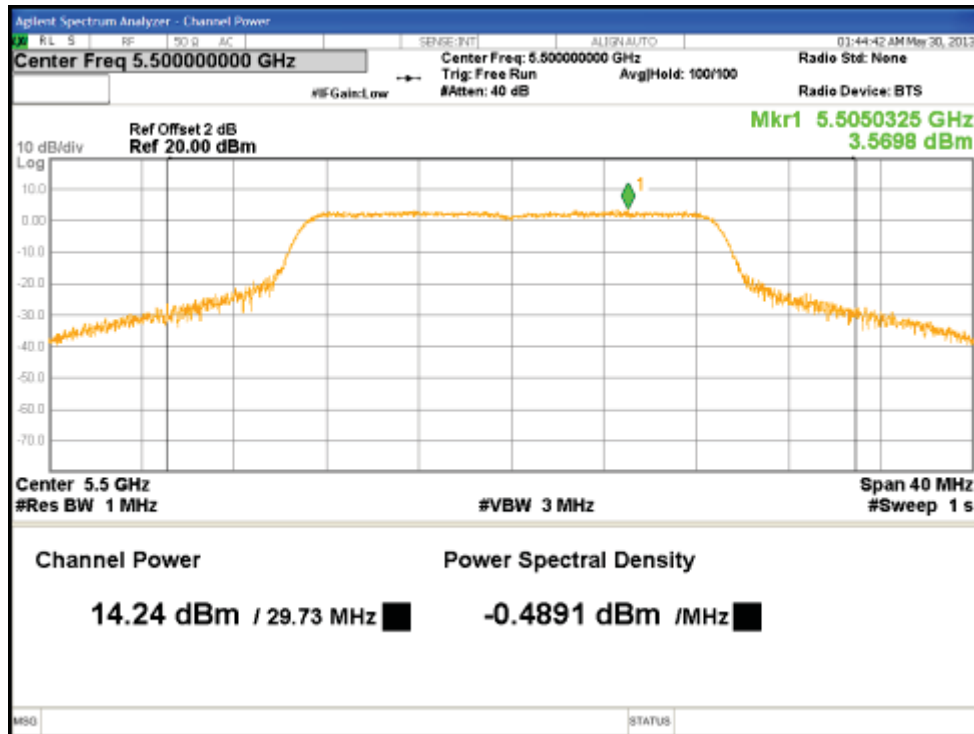


Figure 4: Maximum Transmitted Power, 5500 MHz at HT20, Chain 3

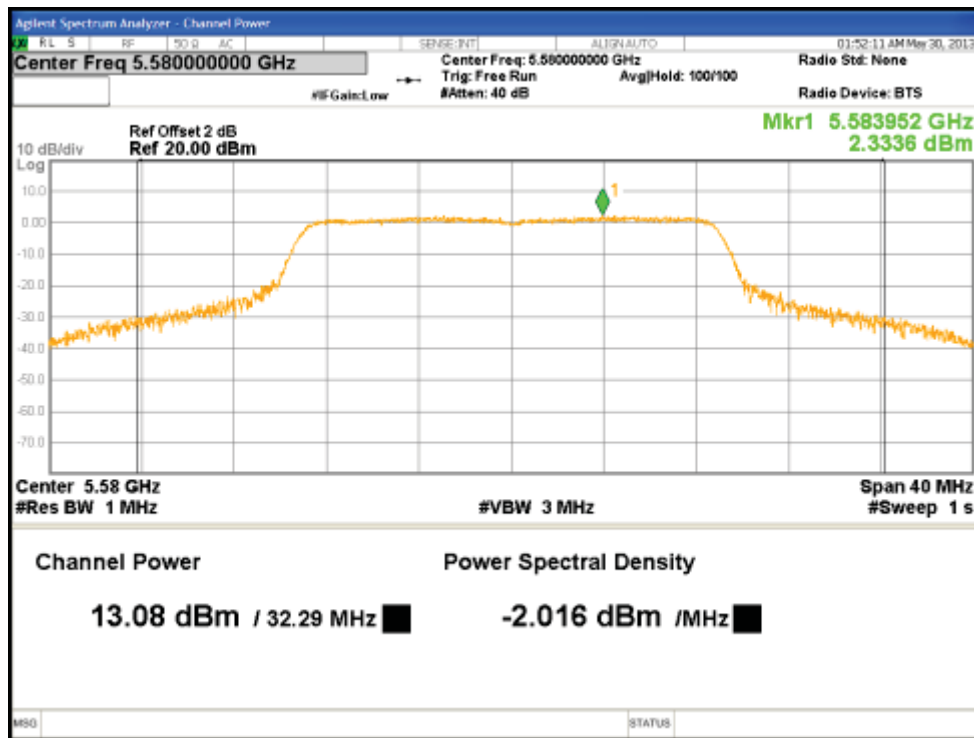


Figure 5: Maximum Transmitted Power, 5580MHz at HT20, Chain 0

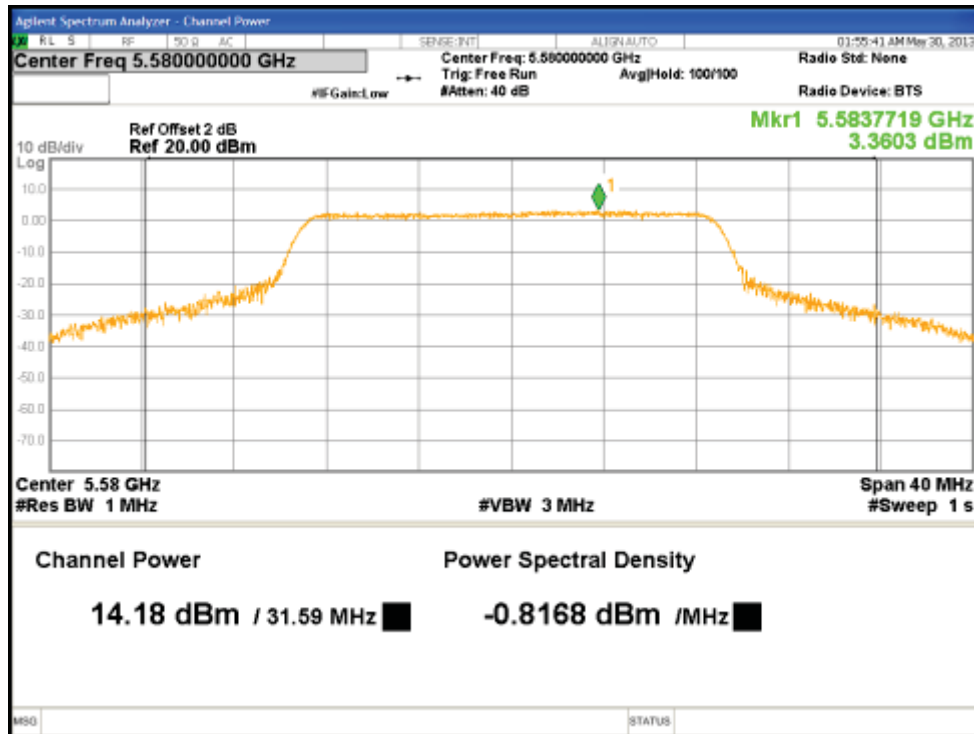


Figure 6: Maximum Transmitted Power, 5580MHz at HT20, Chain 1

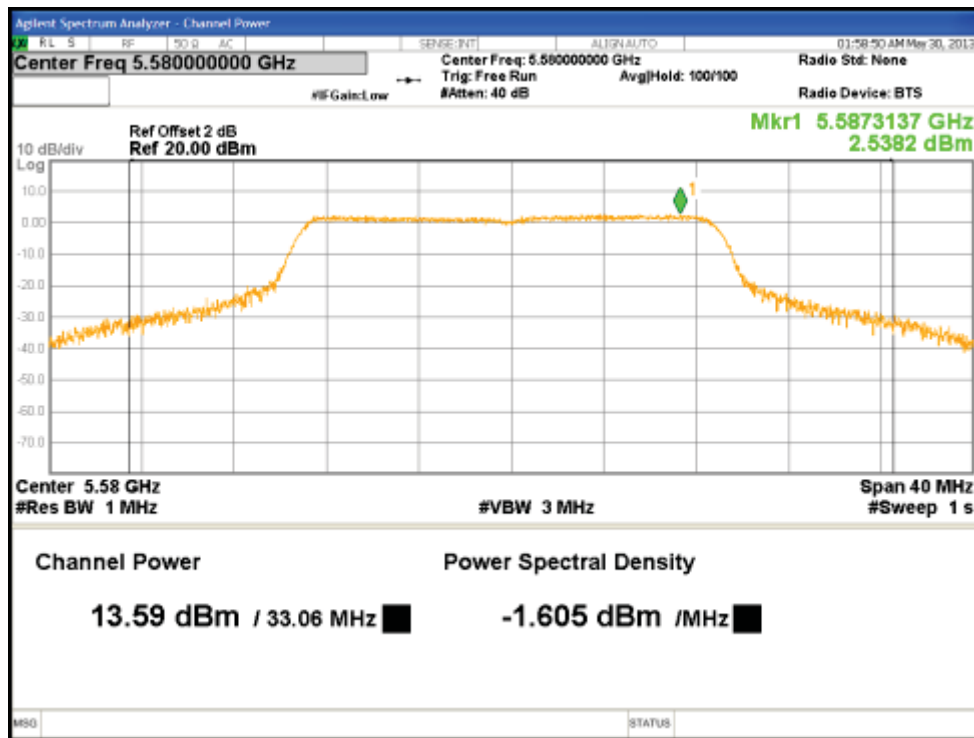


Figure 7: Maximum Transmitted Power, 5580MHz at HT20, Chain 2

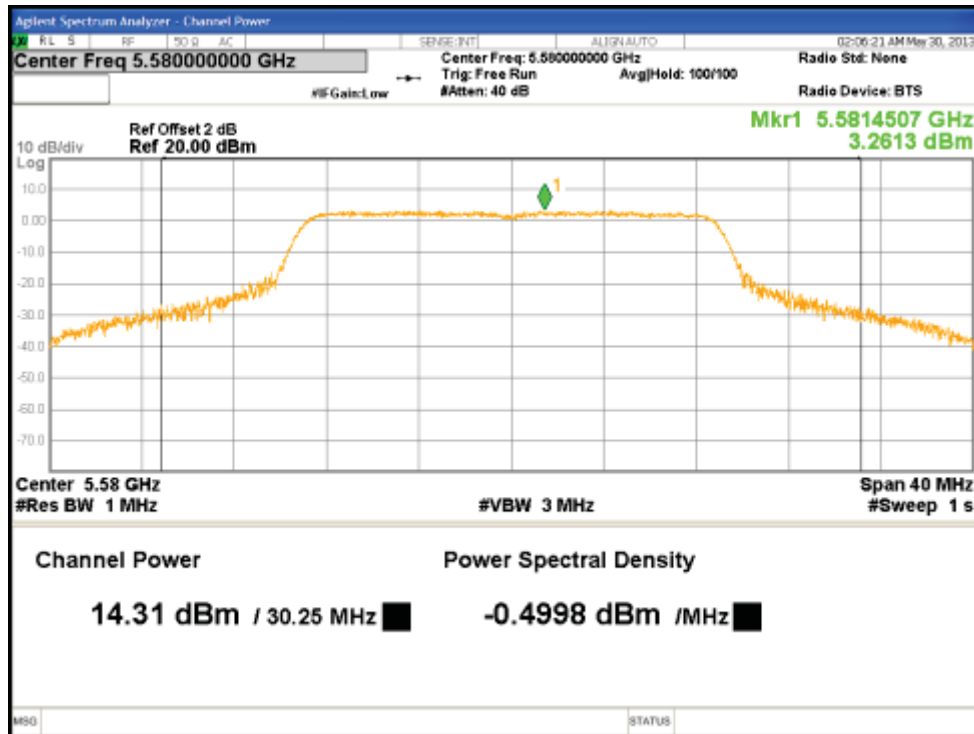


Figure 8: Maximum Transmitted Power, 5580MHz at HT20, Chain 3

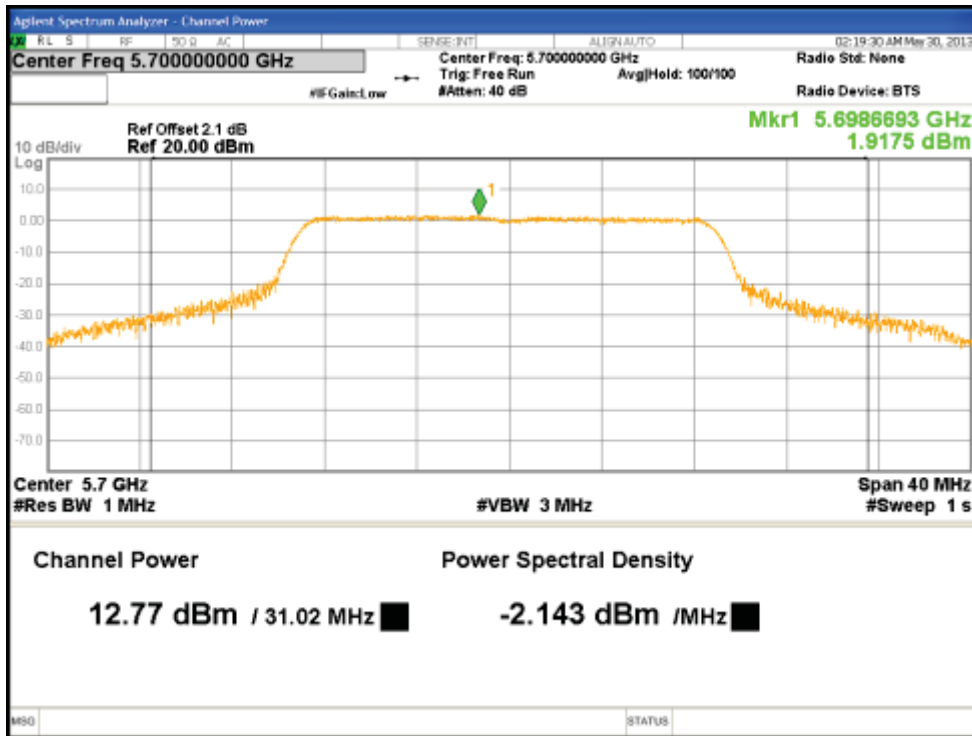


Figure 9: Maximum Transmitted Power, 5700MHz at HT20, Chain 0

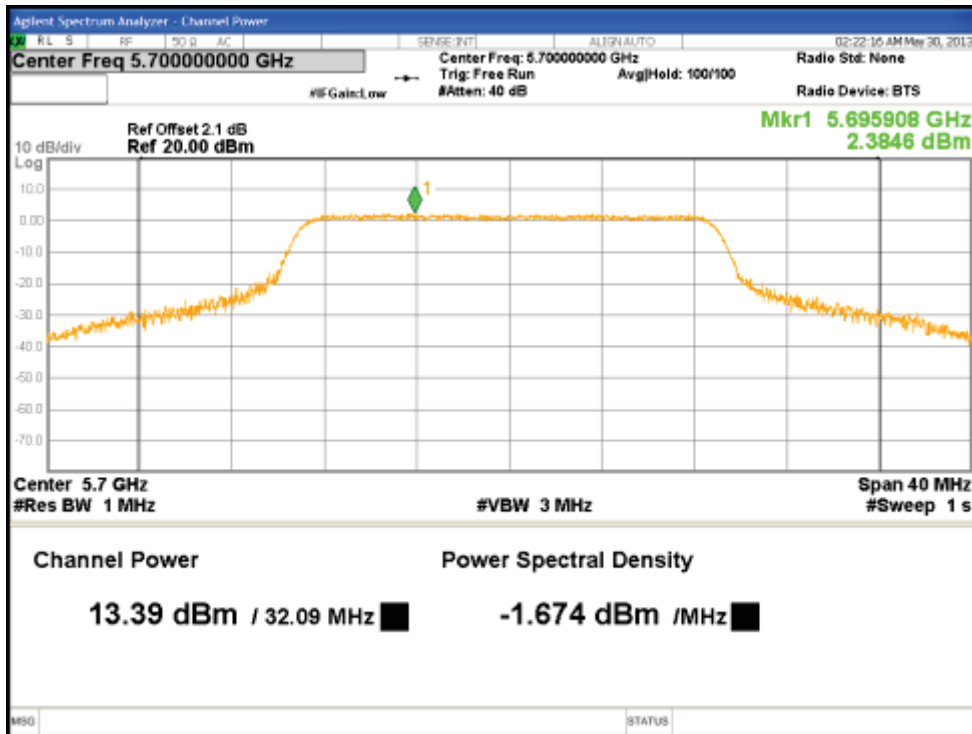


Figure 10: Maximum Transmitted Power, 5700MHz at HT20, Chain 1

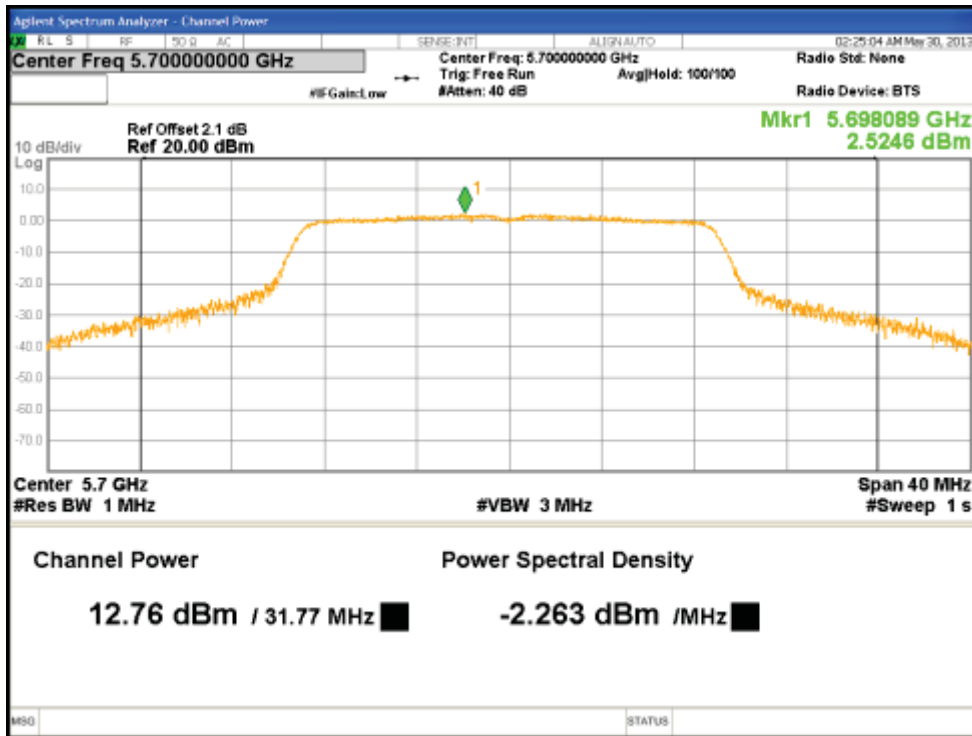


Figure 11: Maximum Transmitted Power, 5700MHz at HT20, Chain 2

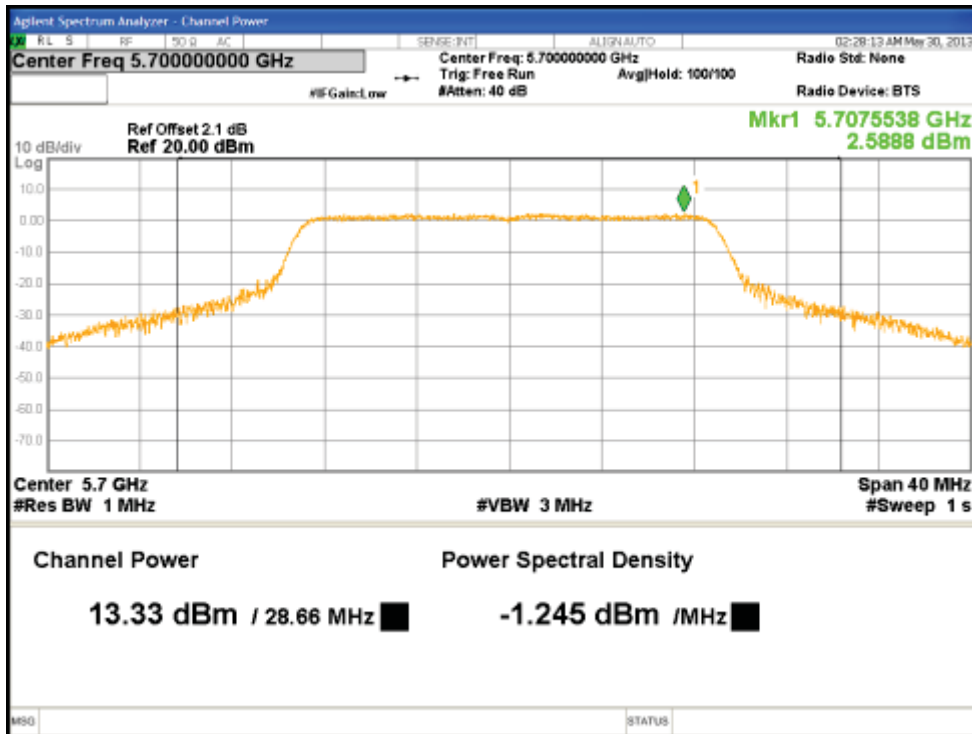


Figure 12: Maximum Transmitted Power, 5700MHz at HT20, Chain 3

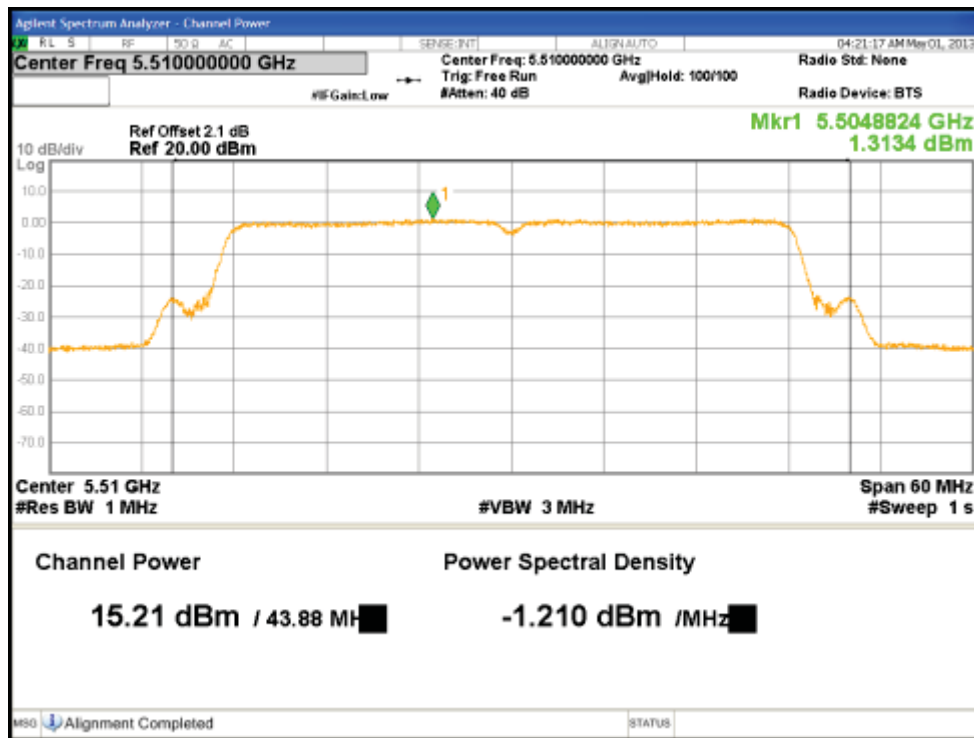


Figure 13: Maximum Transmitted Power, 5510MHz at HT40, Chain 0

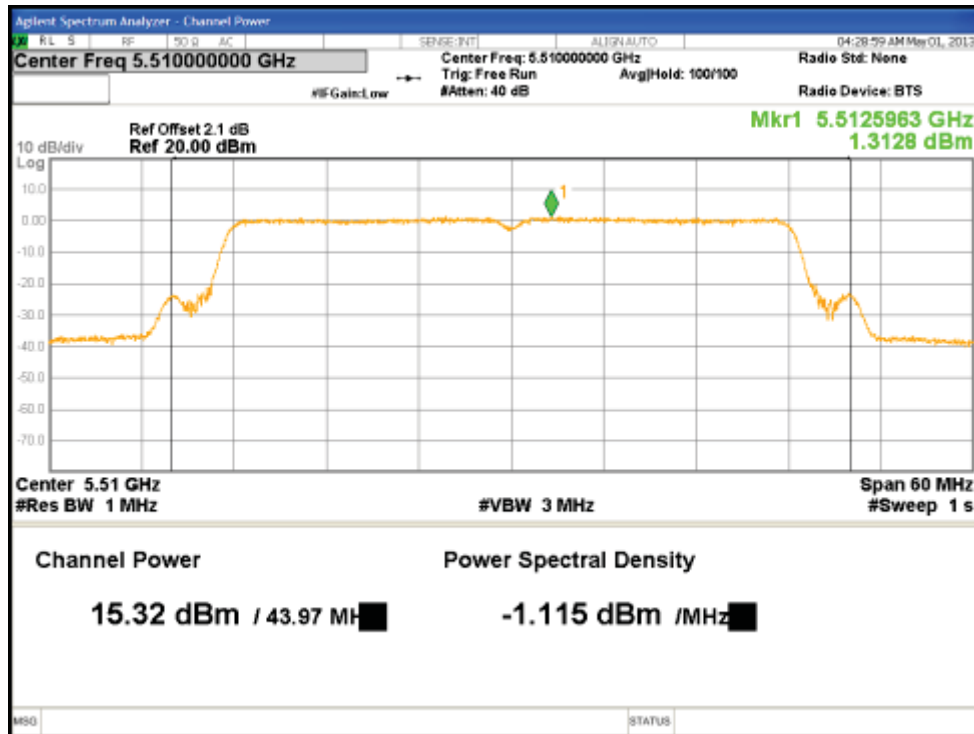


Figure 14: Maximum Transmitted Power, 5510MHz at HT40, Chain 1



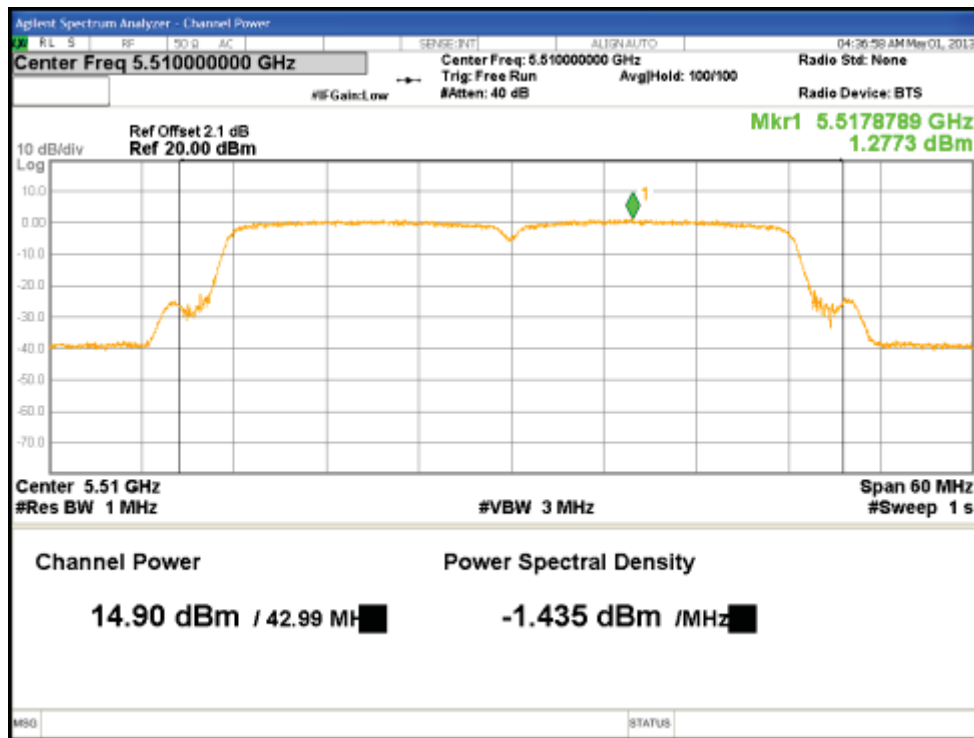


Figure 15: Maximum Transmitted Power, 5510MHz at HT40, Chain 2

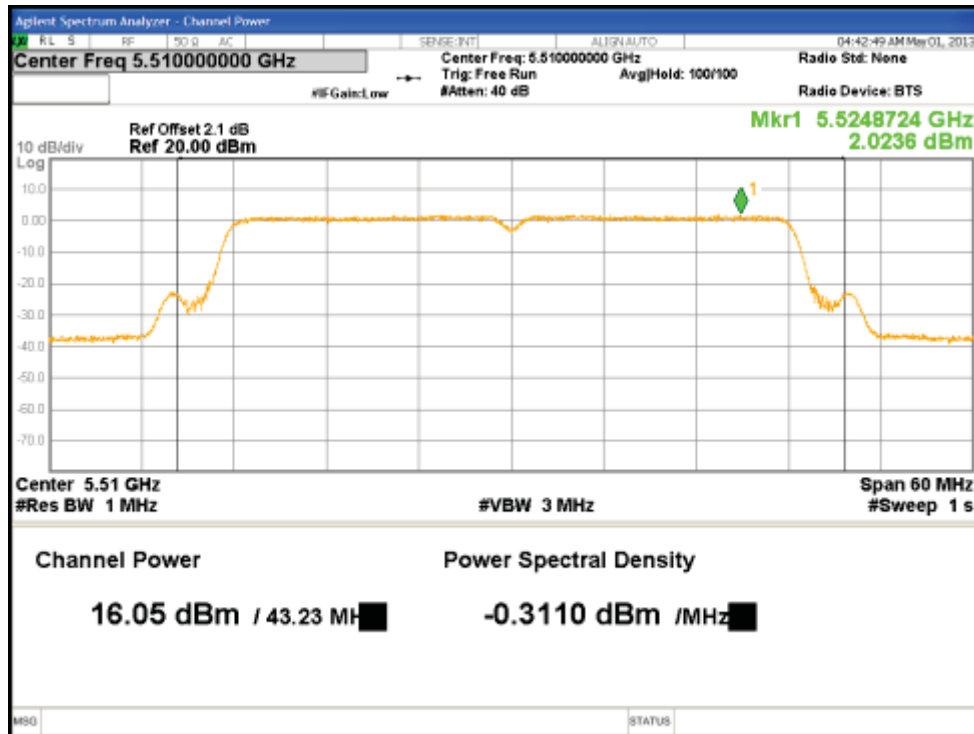


Figure 16: Maximum Transmitted Power, 5510MHz at HT40, Chain 3

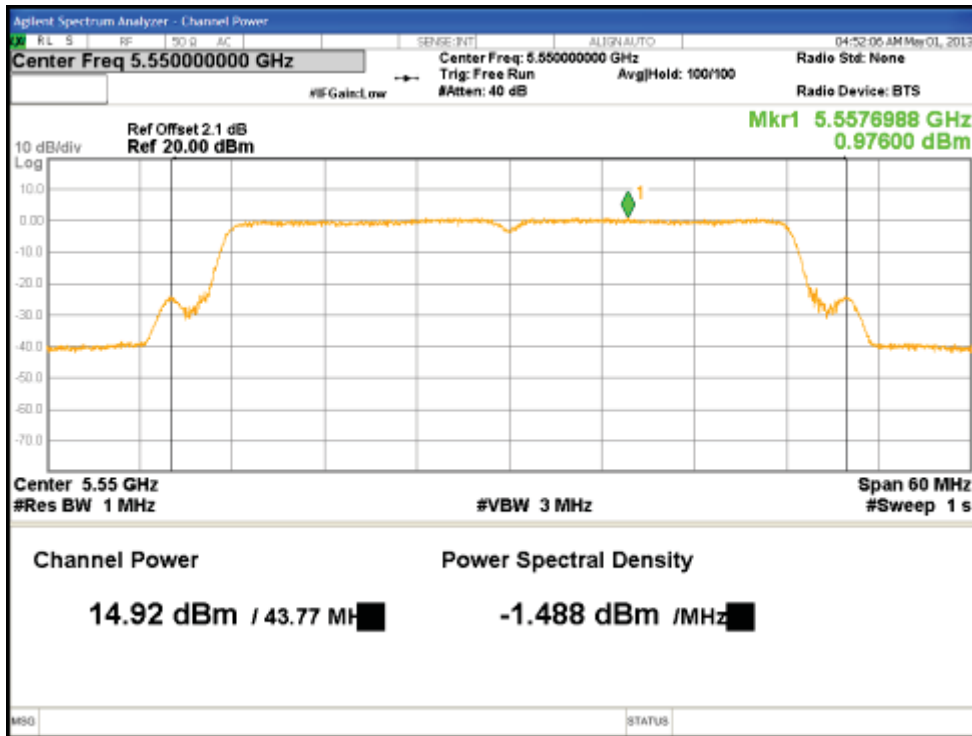


Figure 17: Maximum Transmitted Power, 5550MHz at HT40, Chain 0

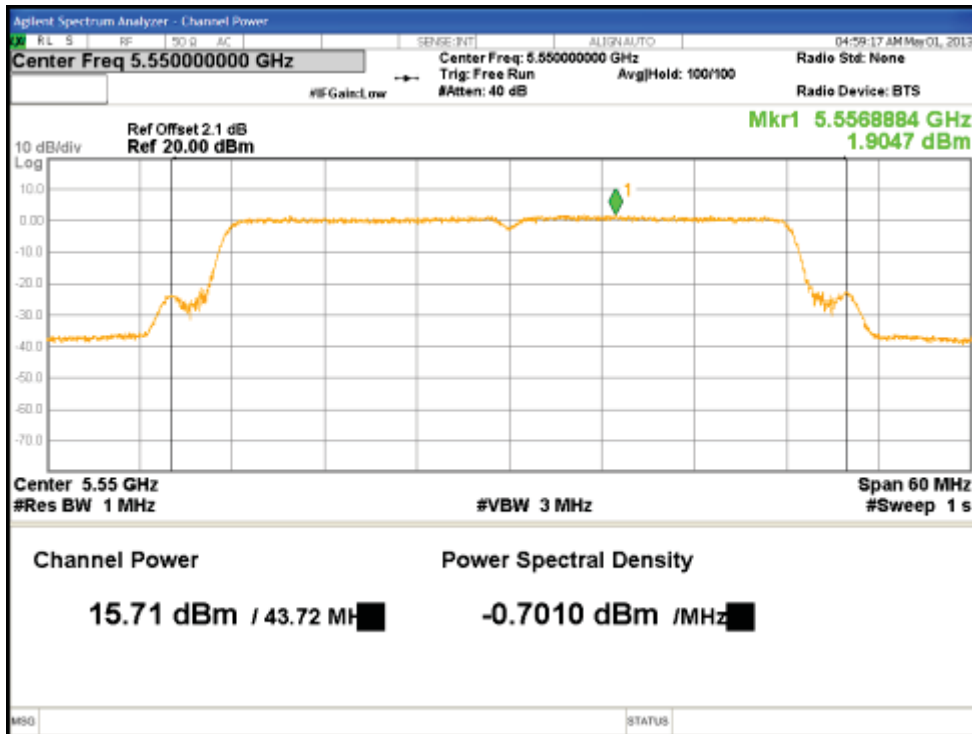


Figure 18: Maximum Transmitted Power, 5550MHz at HT40, Chain 1

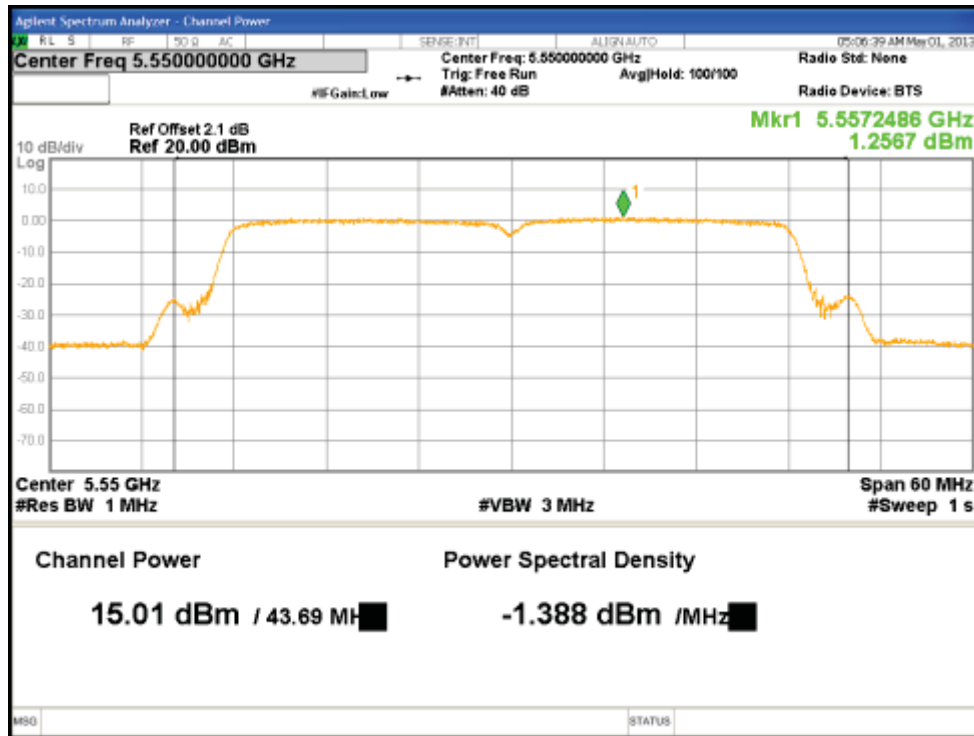


Figure 19: Maximum Transmitted Power, 5550MHz at HT40, Chain 2

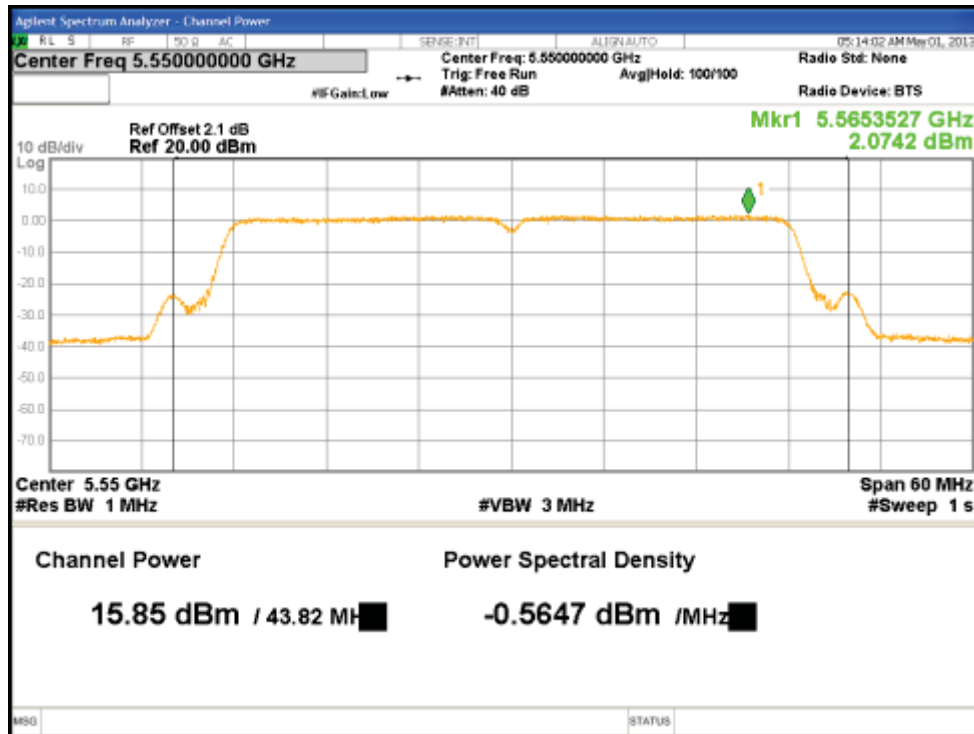


Figure 20: Maximum Transmitted Power, 5550MHz at HT40, Chain 3

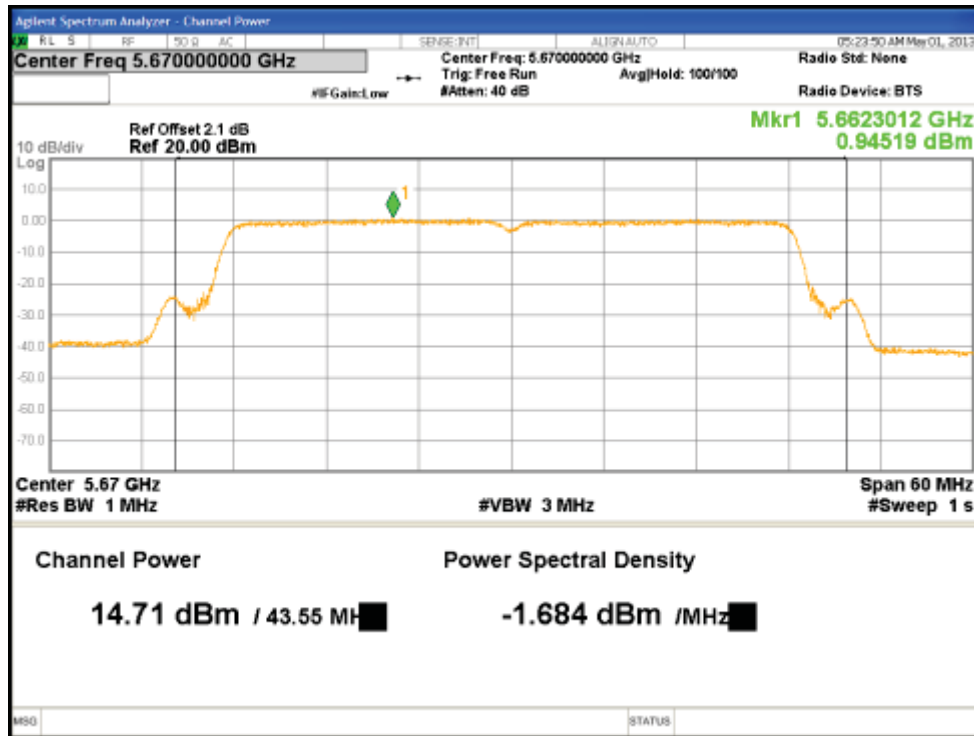


Figure 21: Maximum Transmitted Power, 5670MHz at HT40, Chain 0

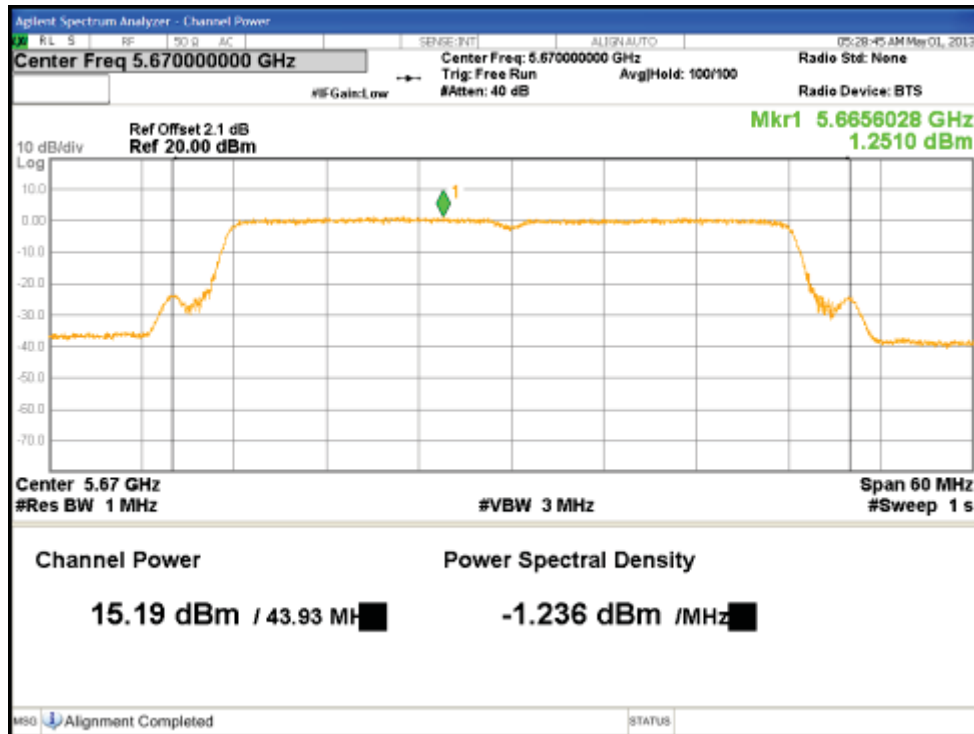


Figure 22: Maximum Transmitted Power, 5670MHz at HT40, Chain 1

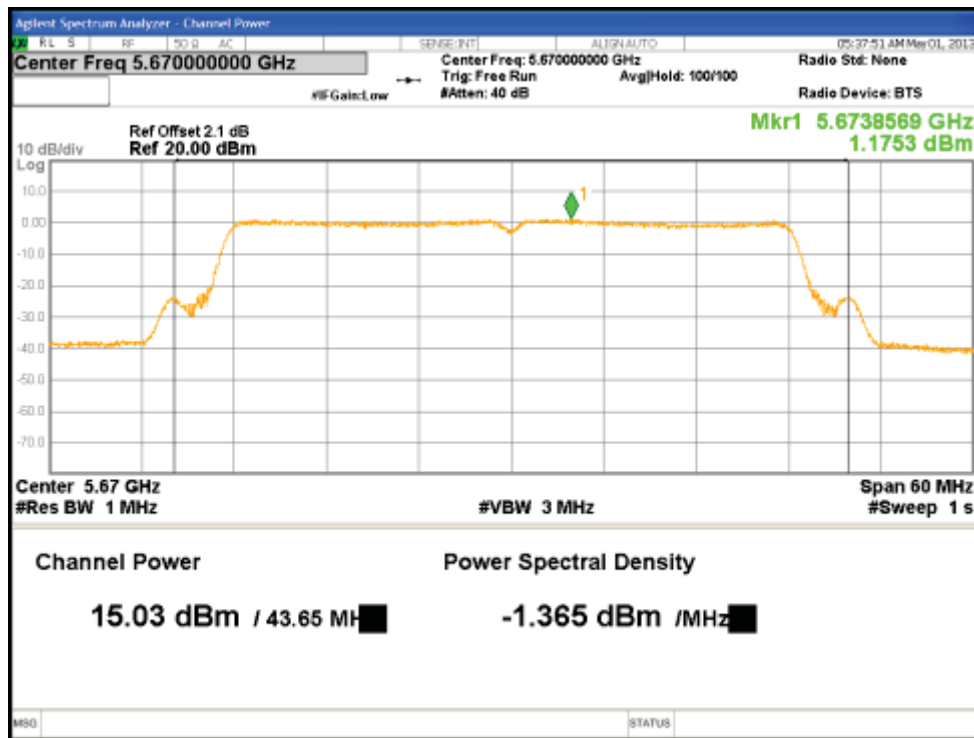


Figure 23: Maximum Transmitted Power, 5670MHz at HT40, Chain 2

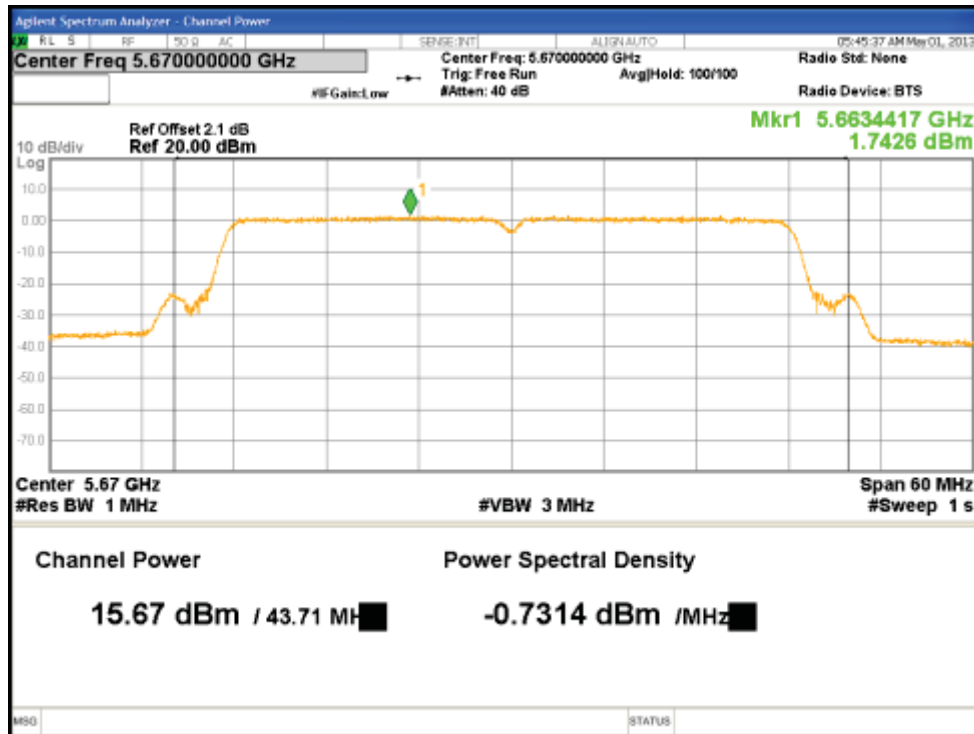


Figure 24: Maximum Transmitted Power, 5670MHz at HT40, Chain 3

## 4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.

The 26 dB bandwidth is defined the bandwidth of 26 dB from highest transmitted level of the fundamental frequency.


There is no restriction limits for the bandwidth. The 26 dB bandwidth was used to determine the limit for maximum conducted output power per CFR47 Part 15.407(a).

To obtain the tighter limit,

### 4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth. The measurement was performed with modulation per CFR47 15.407(a) 2012 and RSS Gen Sect. 4.4.1:2010. The preliminary investigation was performed to find the narrowest 26 dB bandwidth for each operational mode at different data rates. This worst finding was performed on 3 channels in each operating frequency range; 5470 MHz to 5725 MHz on the sample, S/N 09130M000104. The results indicated below.

Test Setup:

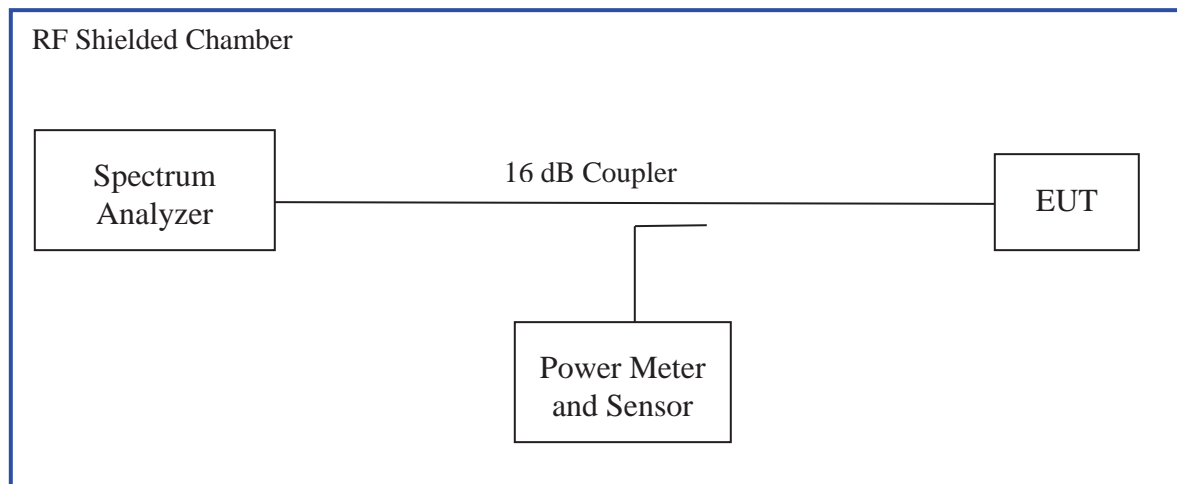

#### 4.2.2 Results

These occupied bandwidth measurements were taken for references only.

**Table 4:** Occupied Bandwidth – Test Results

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only								
<b>Antenna Type:</b> Integrated					<b>Power Setting:</b> See Test Plan			
<b>Max. Directional Gain:</b> + 8 dBi					<b>Signal State:</b> Modulated at 100%.			
<b>Ambient Temp.:</b> 23 °C					<b>Relative Humidity:</b> 30%			
Bandwidth (MHz) for 802.11n HT20								
Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
	Ch0	Ch1	Ch2	Ch3	Ch0	Ch1	Ch2	Ch3
5500	26.994	27.106	25.851	25.578	18.147	18.310	18.231	18.089
5580	26.852	28.340	25.790	25.673	18.157	18.351	18.158	18.086
5700	26.931	27.936	25.254	25.859	18.169	18.438	18.014	18.133
<b>Note:</b> The bandwidth was measured at 6.5Mbps for 802.11n HT20 mode.								
Bandwidth (MHz) for 802.11n HT40								
Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
	Ch0	Ch1	Ch2	Ch3	Ch0	Ch1	Ch2	Ch3
5510	44.019	44.491	44.028	43.772	36.428	36.699	36.366	36.232
5550	43.984	44.427	43.894	43.896	36.413	36.667	36.399	36.219
5670	43.963	44.423	44.020	43.638	36.432	36.648	36.585	36.238
<b>Note:</b> The bandwidth was measured at 13.5Mbps for 802.11n HT40 mode.								

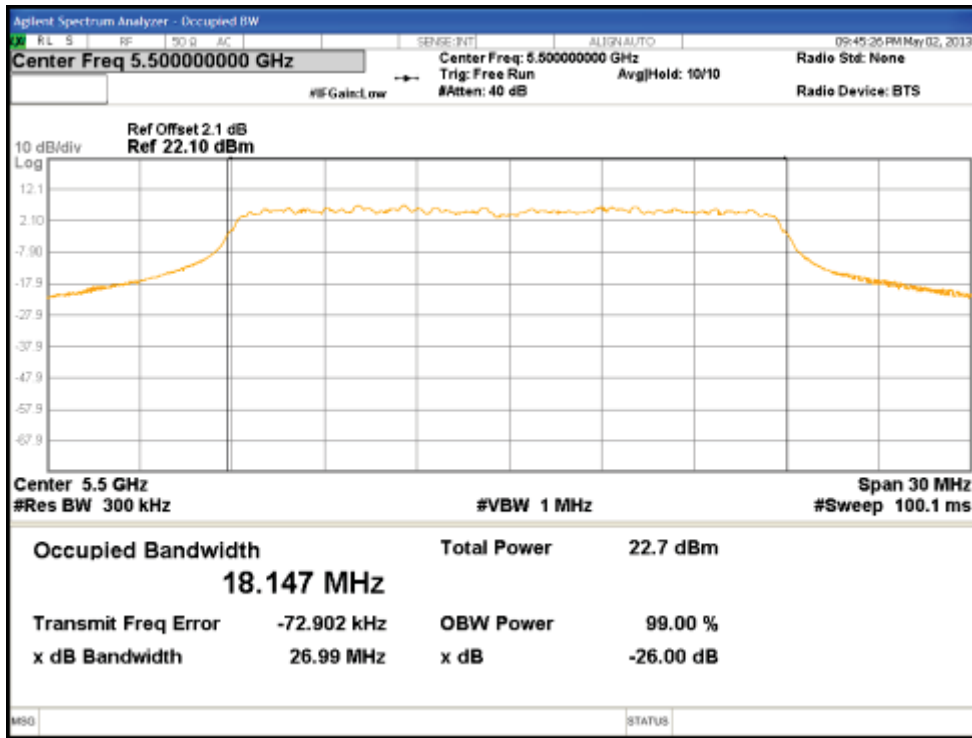


Figure 25: Occupied Bandwidth at 5500 MHz, Chain 0

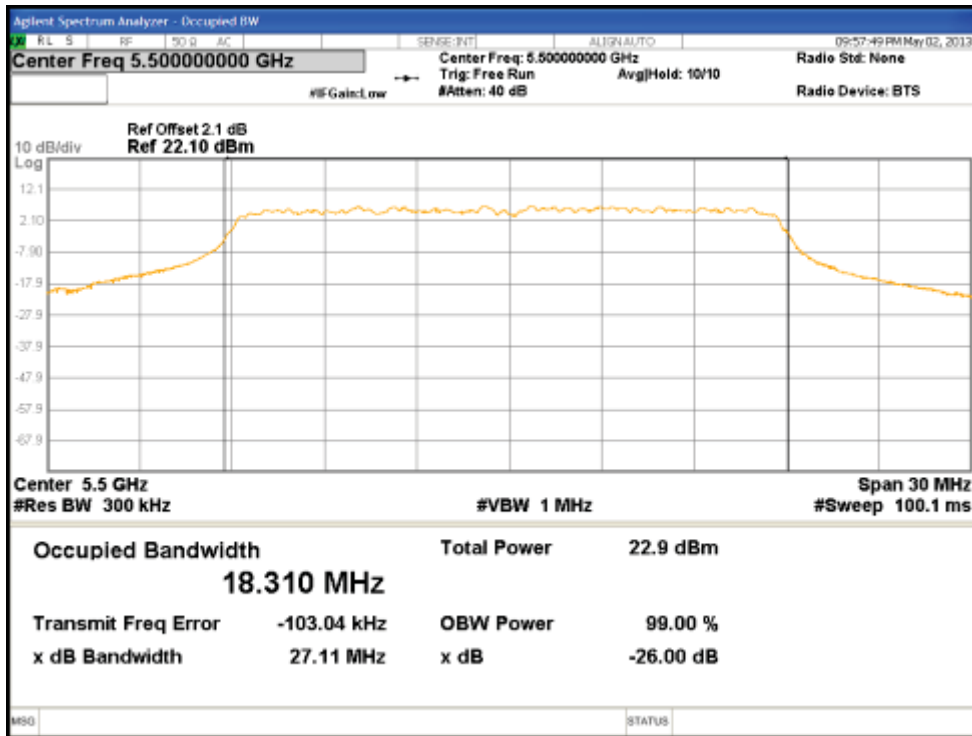


Figure 26: Occupied Bandwidth at 5500 MHz, Chain 1



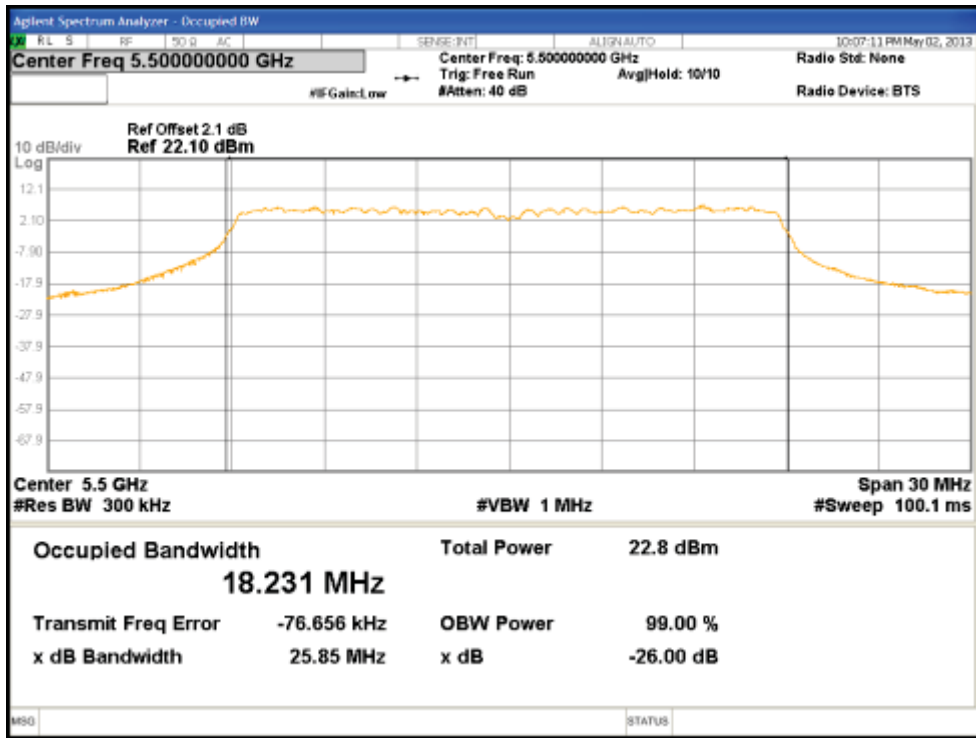


Figure 27: Occupied Bandwidth at 5500 MHz, Chain 2

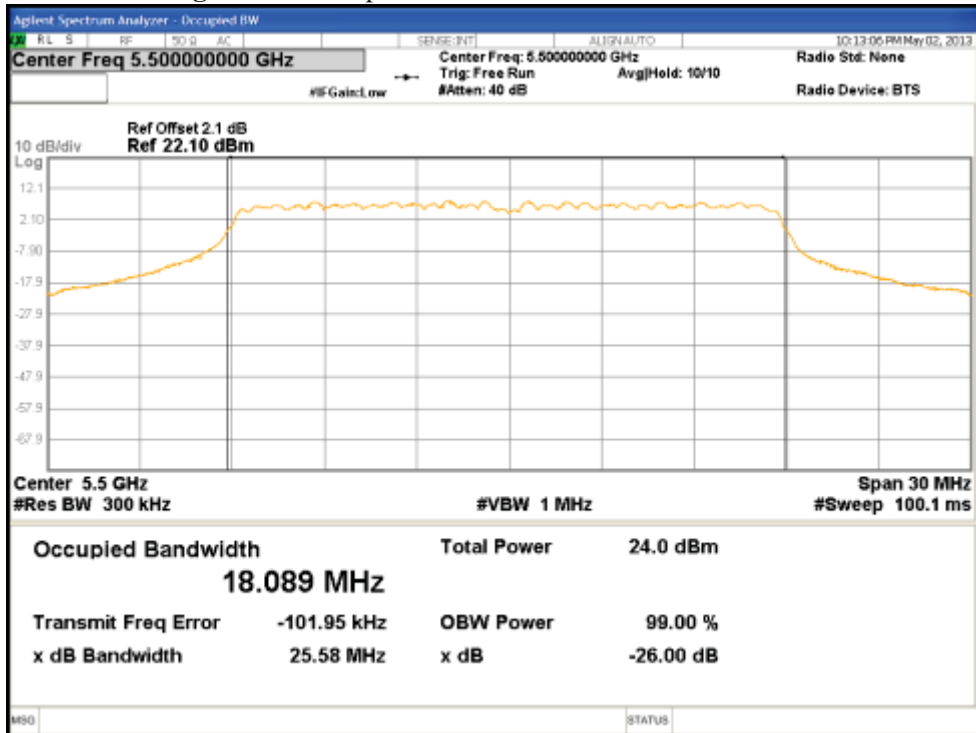


Figure 28: Occupied Bandwidth at 5500 MHz, Chain 3

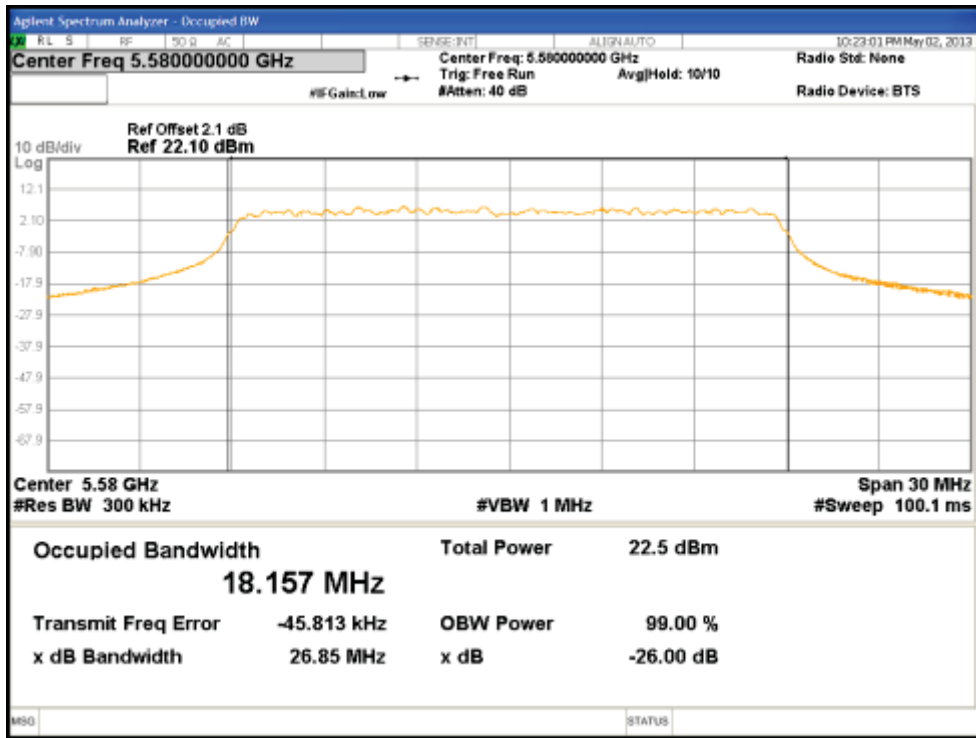


Figure 29: Occupied Bandwidth at 5580 MHz, Chain 0

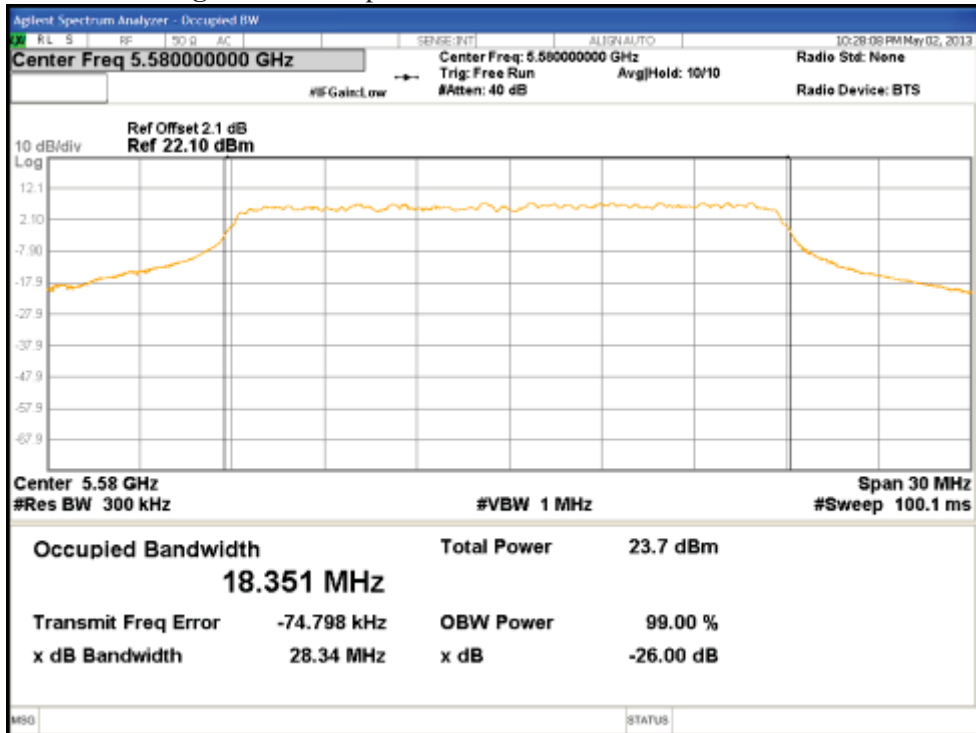


Figure 30: Occupied Bandwidth at 5580 MHz, Chain 1

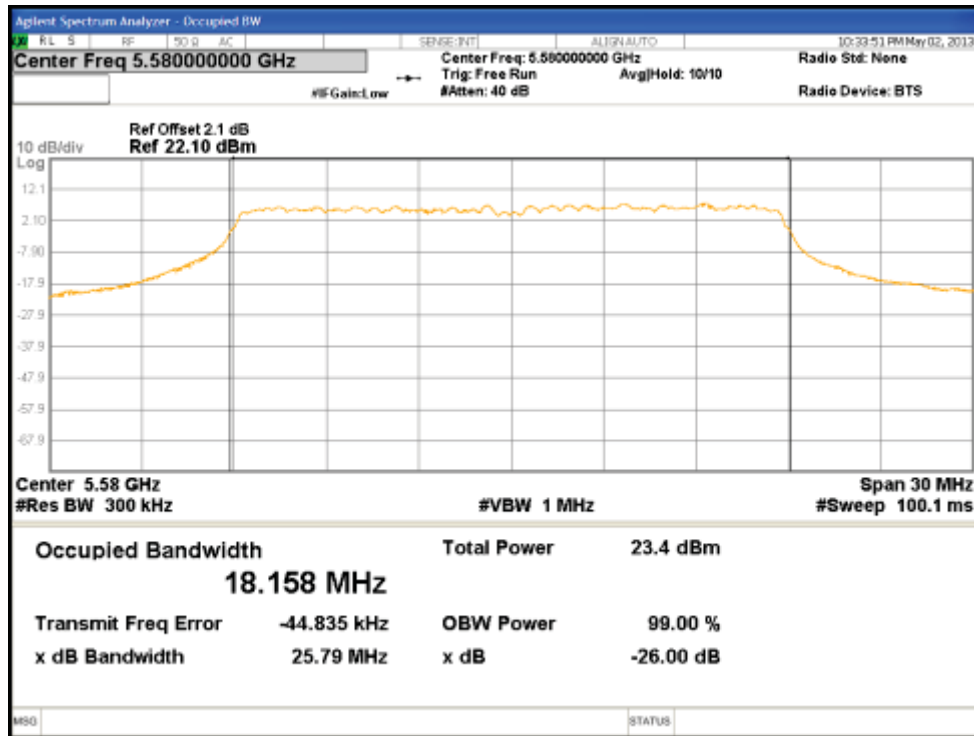


Figure 31: Occupied Bandwidth at 5580 MHz, Chain 2

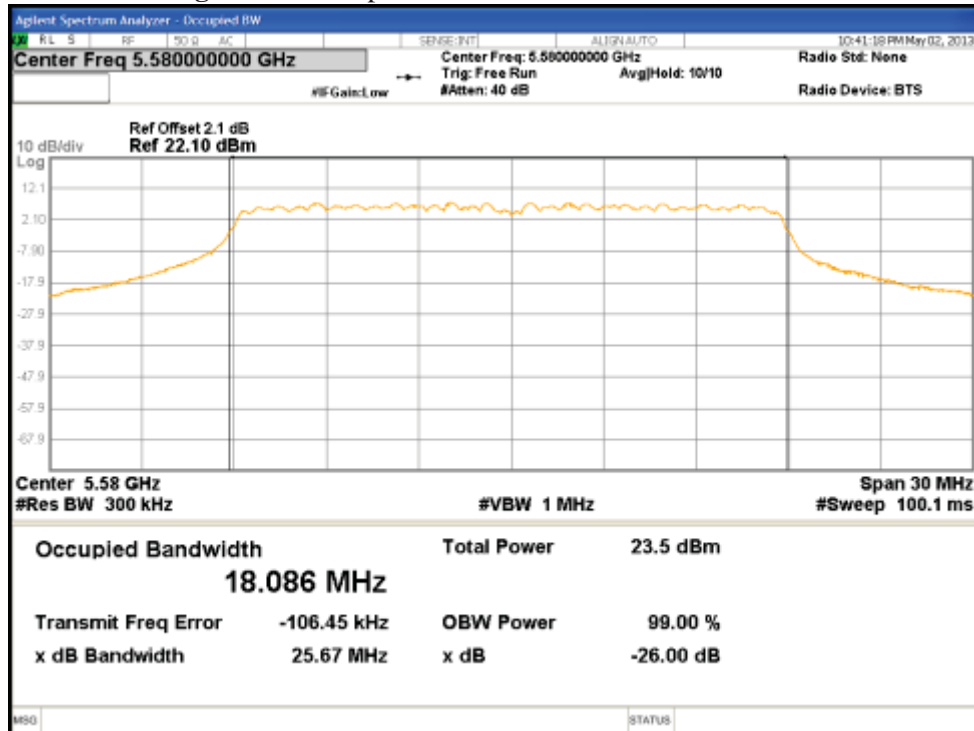


Figure 32: Occupied Bandwidth at 5580 MHz, Chain 3

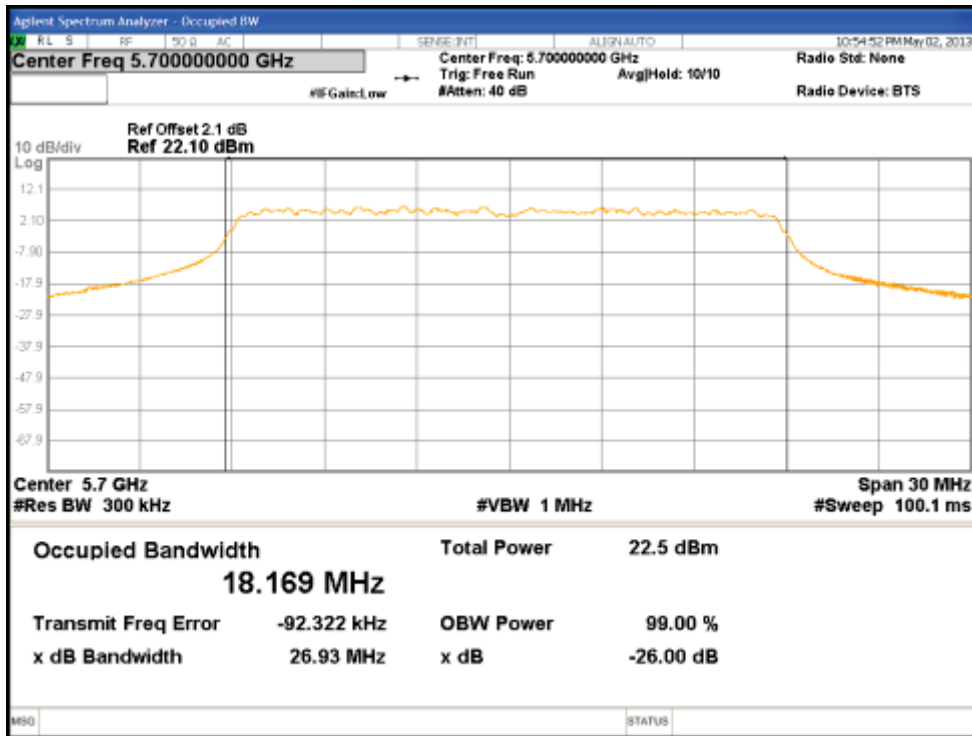


Figure 33: Occupied Bandwidth at 5700 MHz, Chain 0

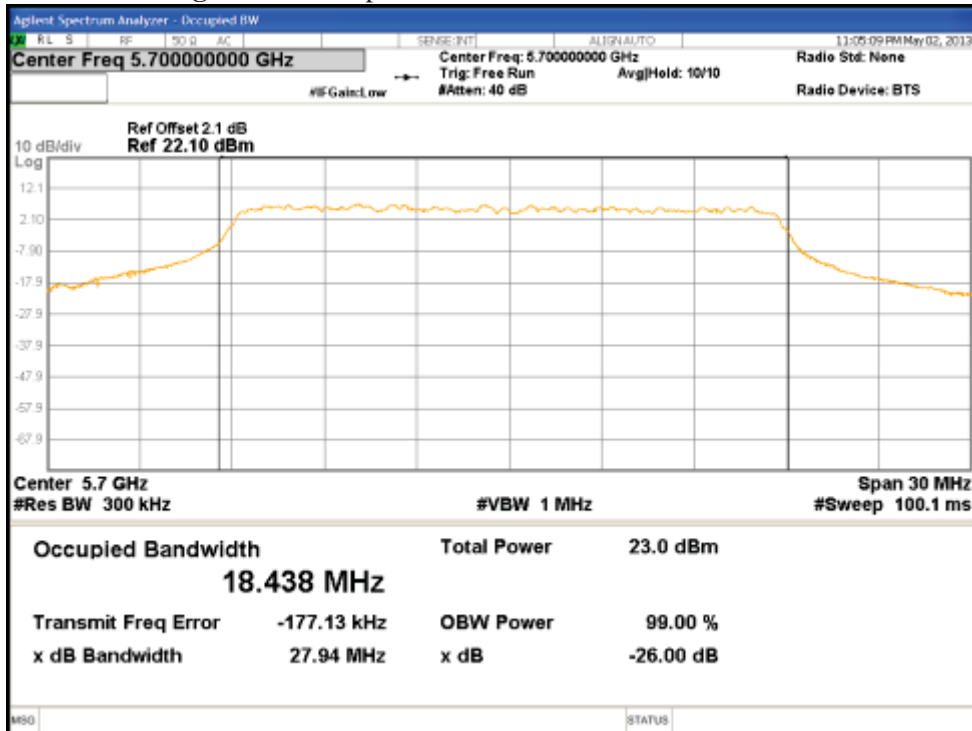


Figure 34: Occupied Bandwidth at 5700 MHz, Chain 1

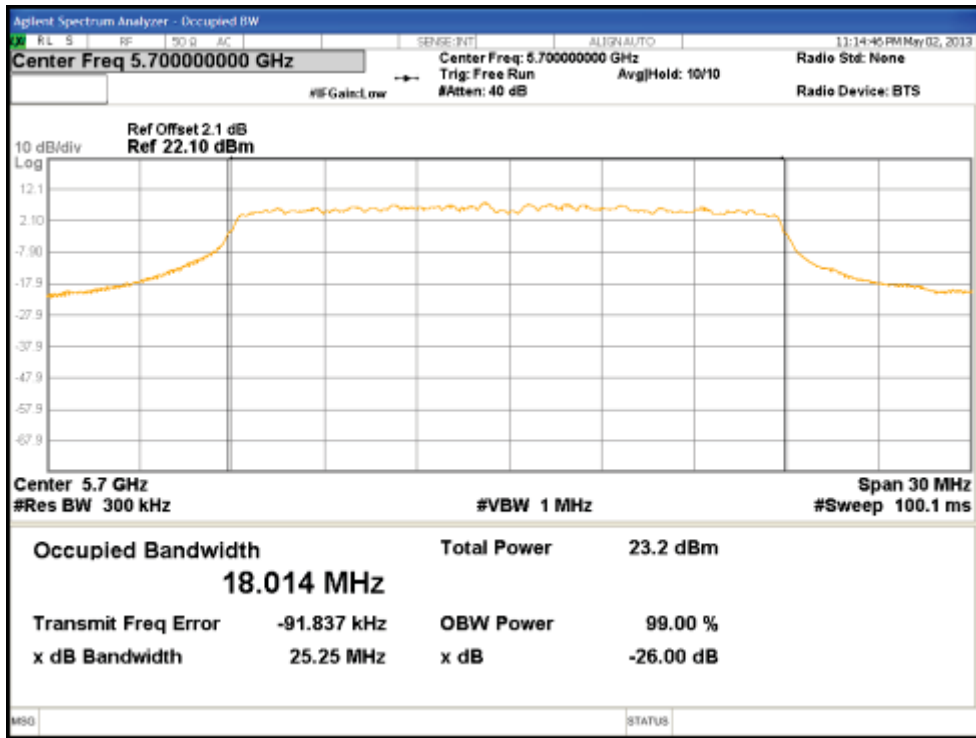


Figure 35: Occupied Bandwidth at 5700 MHz, Chain 2

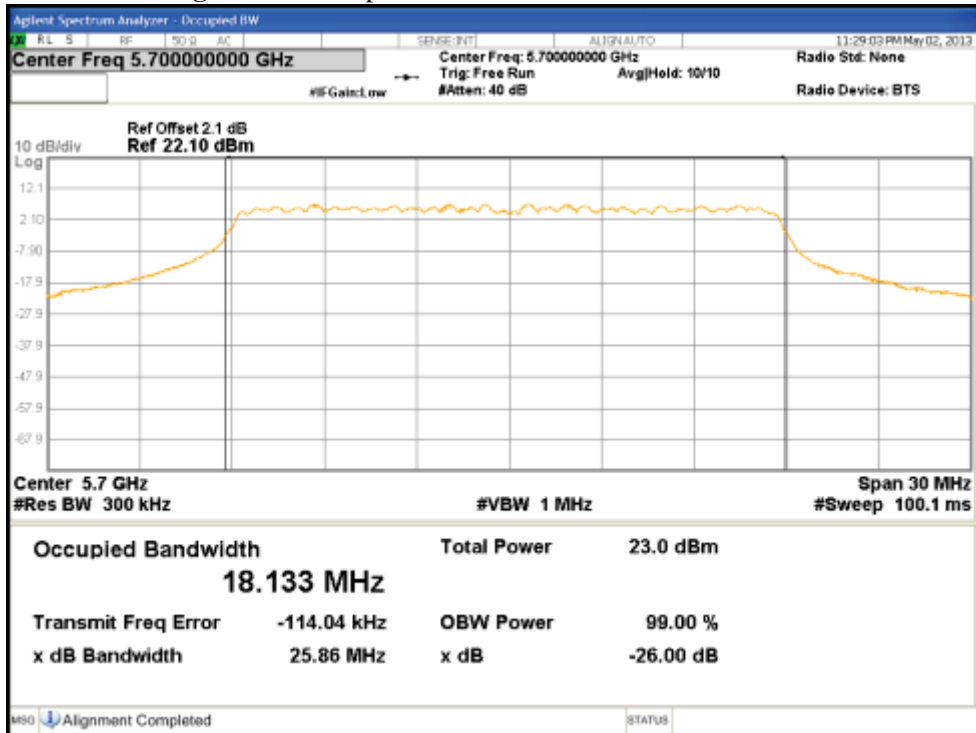


Figure 36: Occupied Bandwidth at 5700 MHz, Chain 3

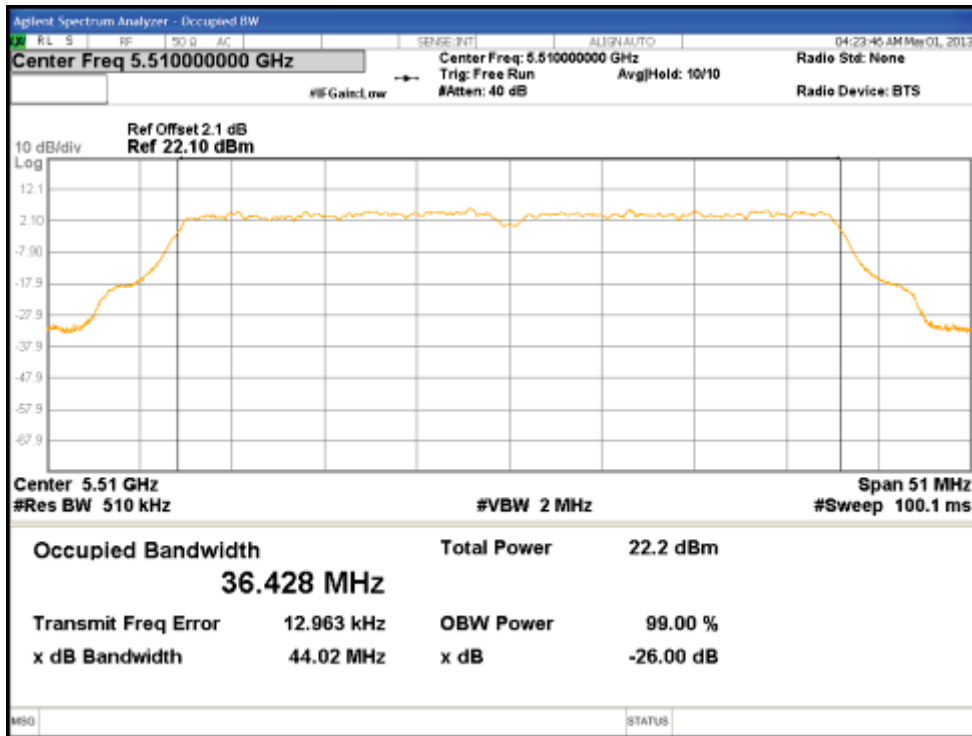


Figure 37: Occupied Bandwidth at 5510 MHz, Chain 0

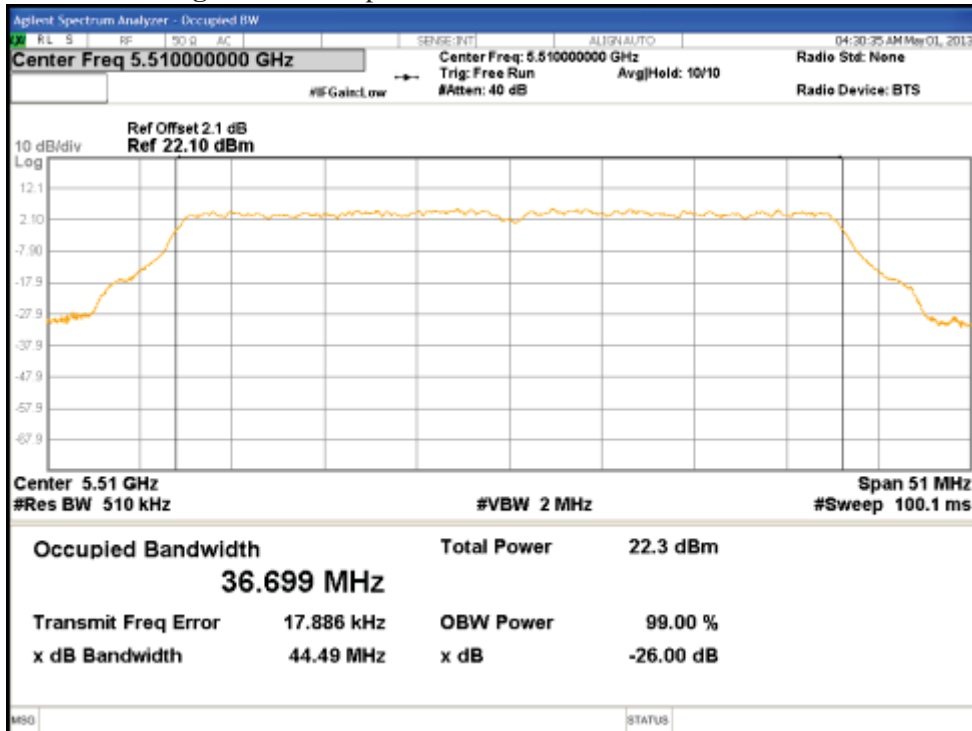


Figure 38: Occupied Bandwidth at 5510 MHz, Chain 1

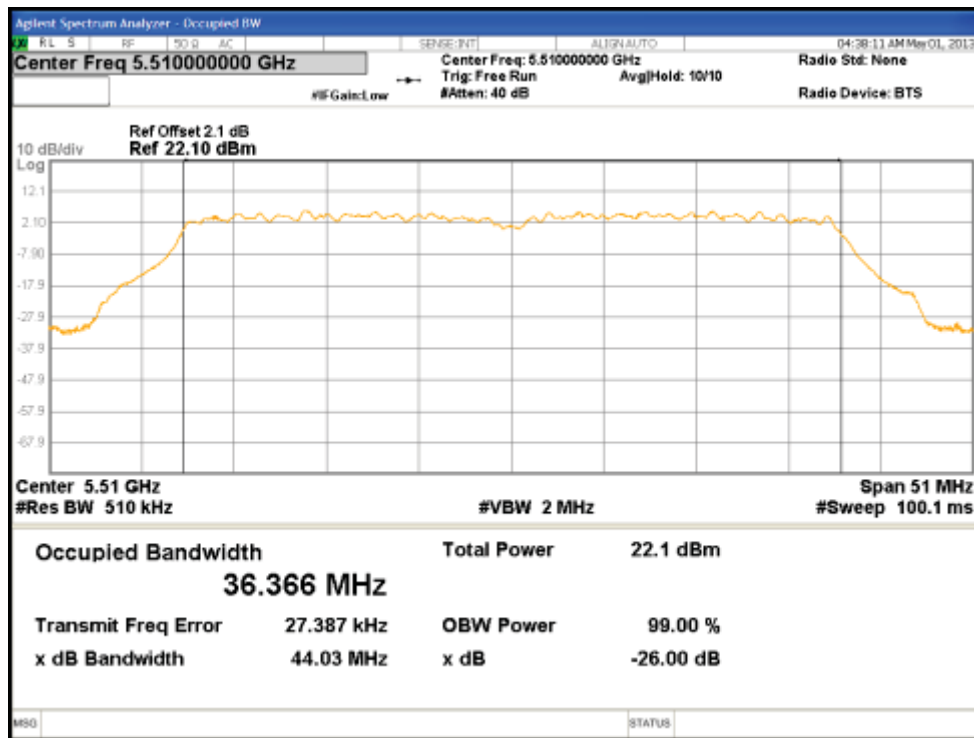


Figure 39: Occupied Bandwidth at 5510 MHz, Chain 2

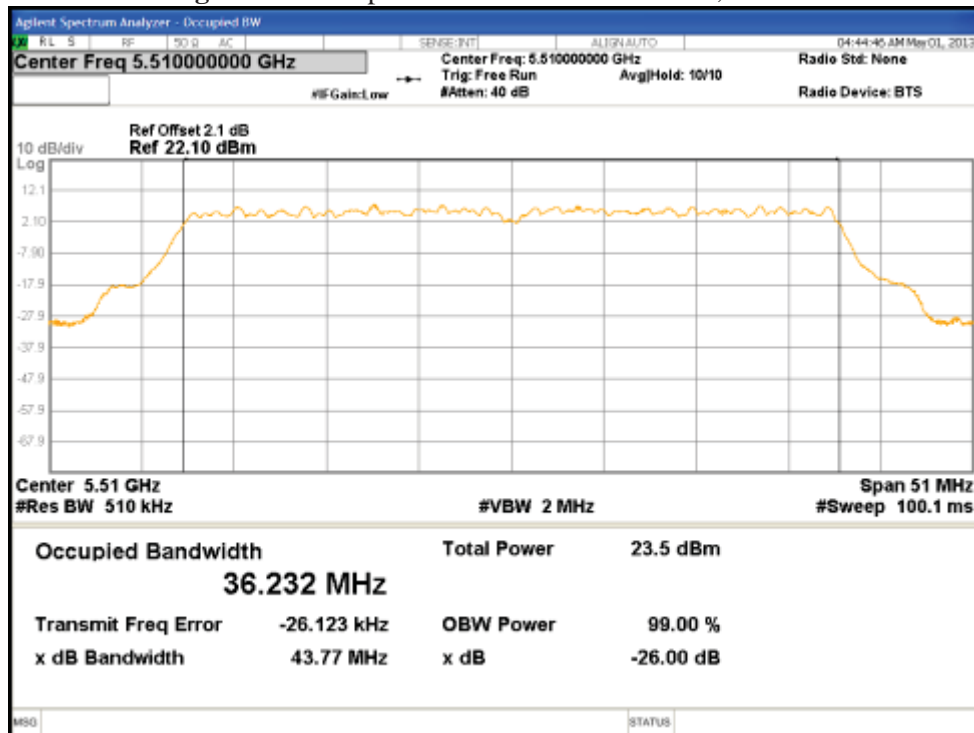


Figure 40: Occupied Bandwidth at 5510 MHz, Chain 3

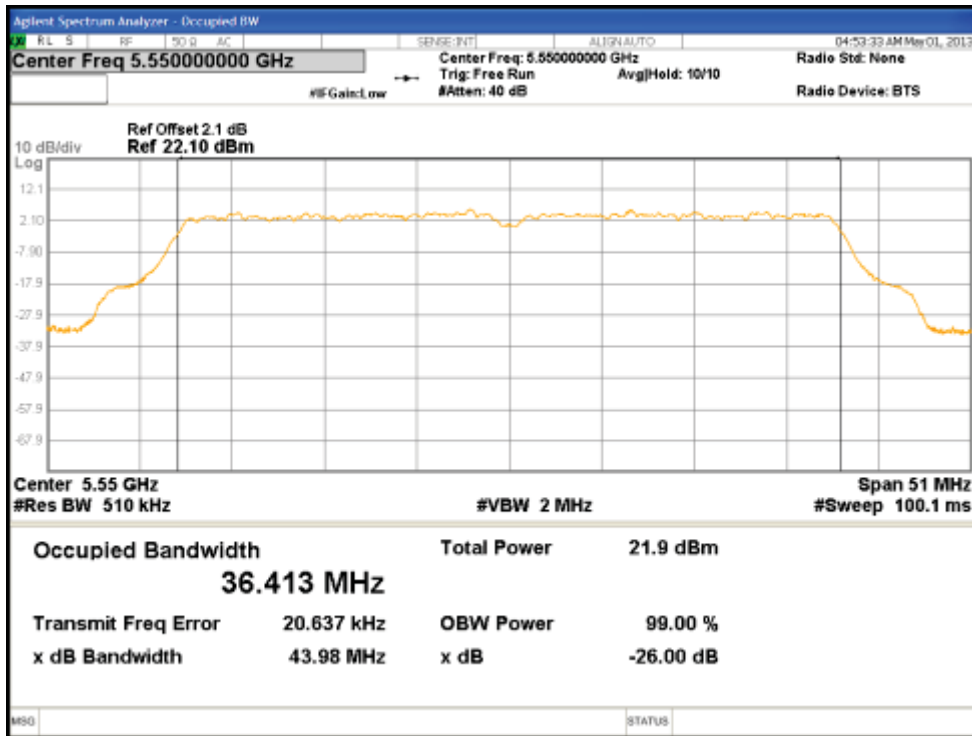


Figure 41: Occupied Bandwidth at 5550 MHz, Chain 0

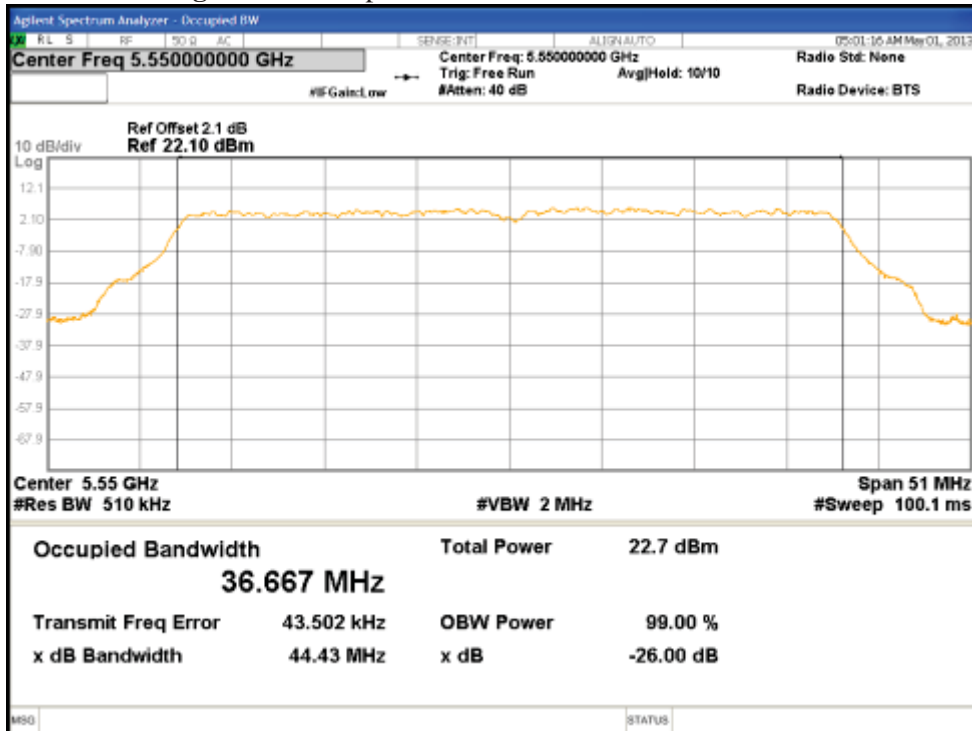


Figure 42: Occupied Bandwidth at 5550 MHz, Chain 1



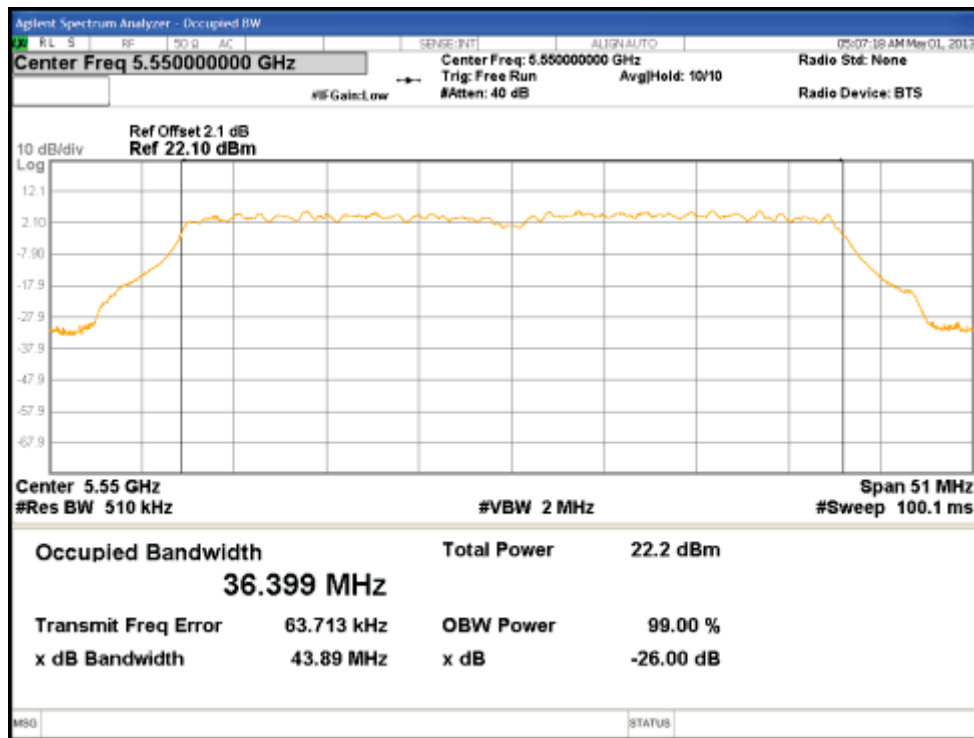


Figure 43: Occupied Bandwidth at 5550 MHz, Chain 2

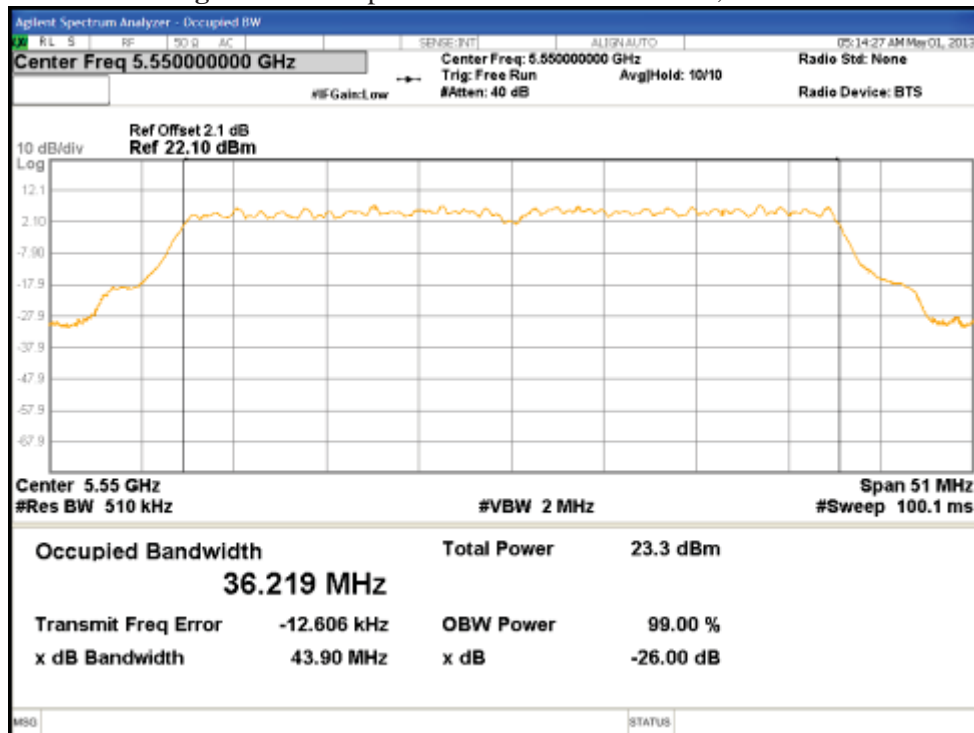


Figure 44: Occupied Bandwidth at 5550 MHz, Chain 3

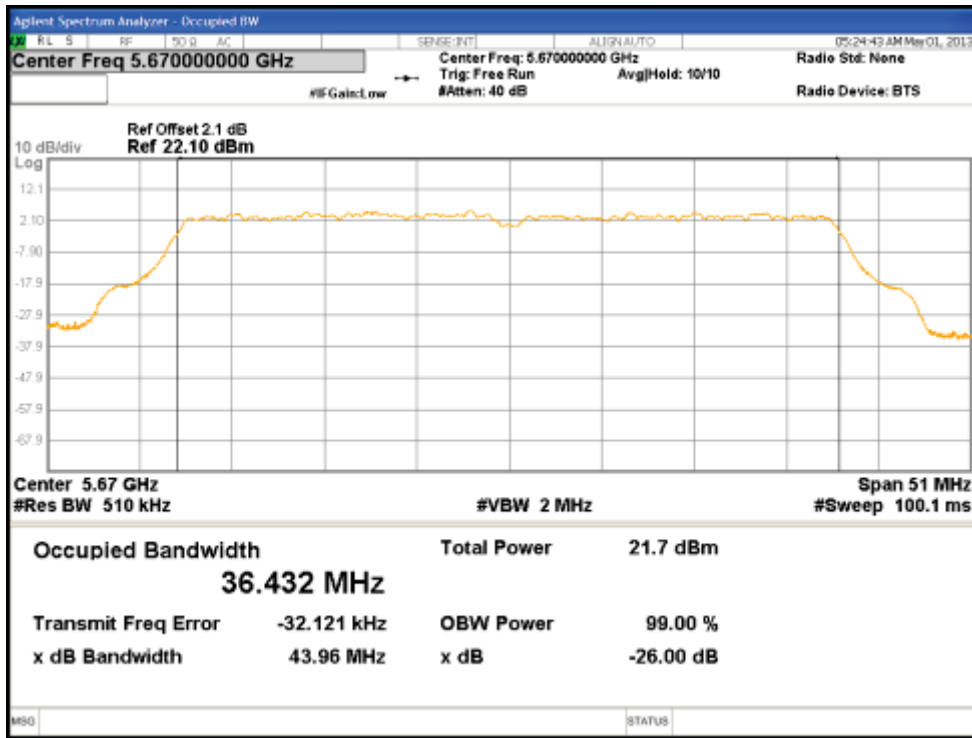


Figure 45: Occupied Bandwidth at 5670 MHz, Chain 0

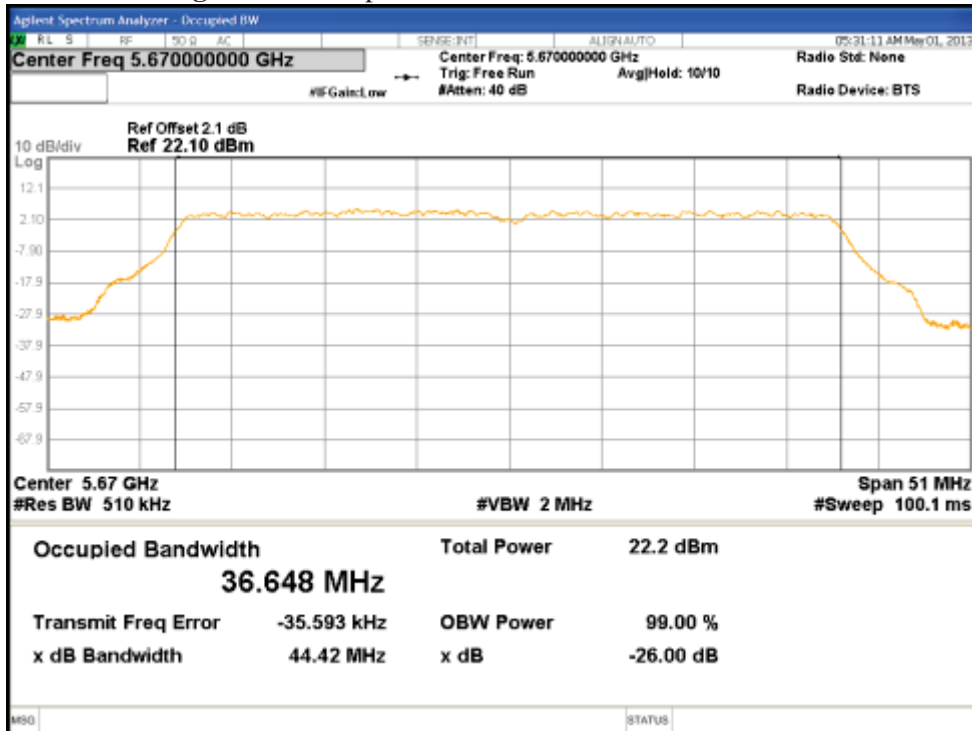


Figure 46: Occupied Bandwidth at 5670 MHz, Chain 1

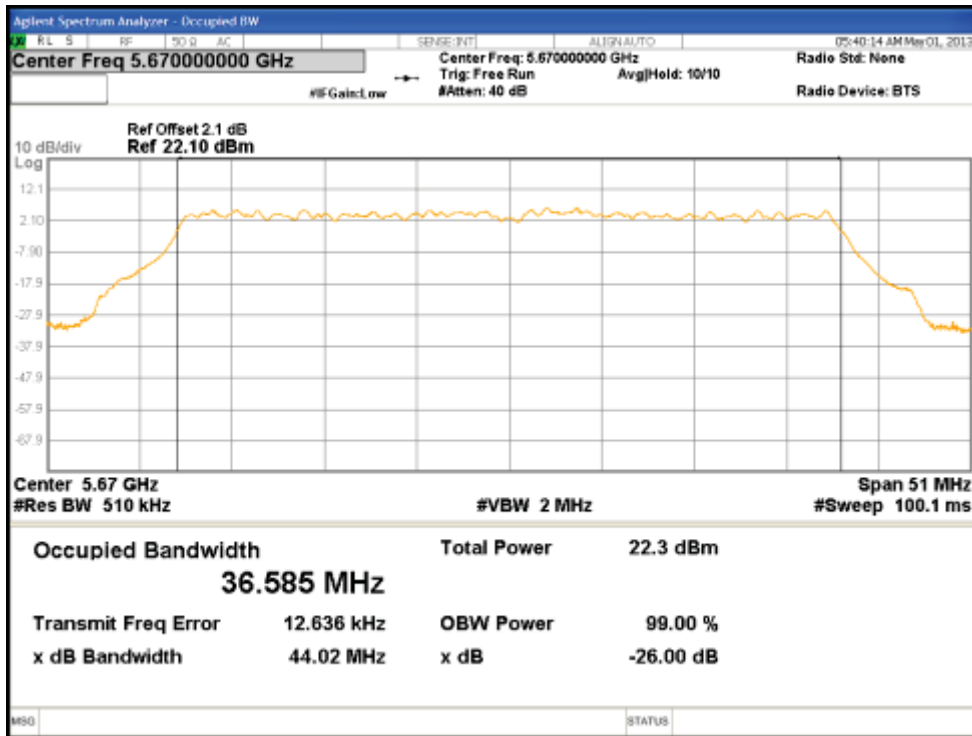


Figure 47: Occupied Bandwidth at 5670 MHz, Chain 2

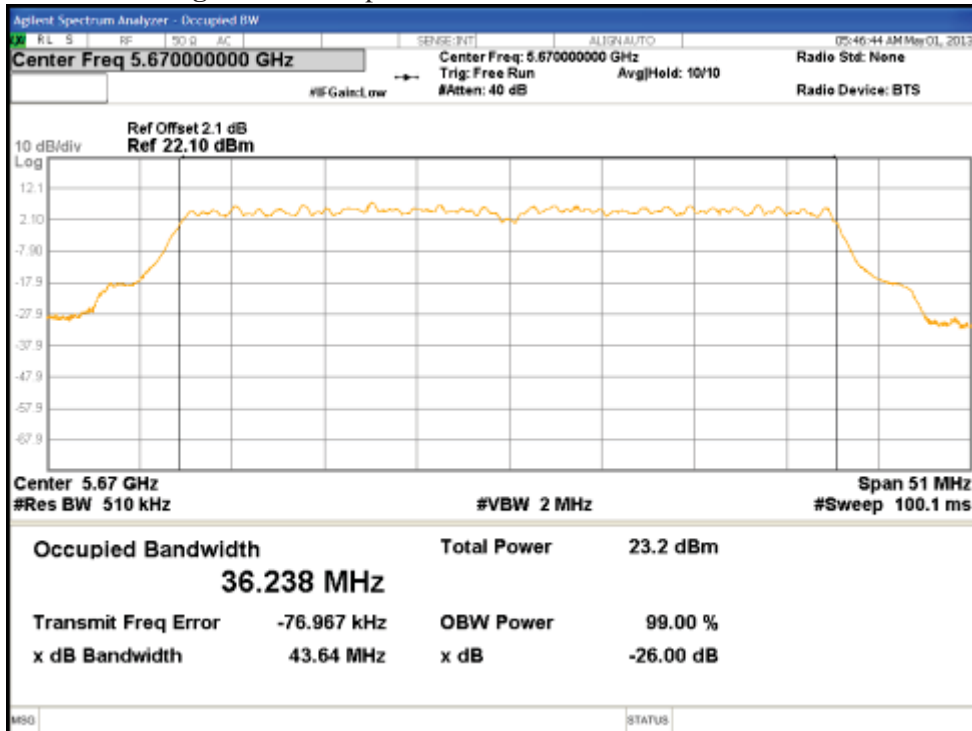


Figure 48: Occupied Bandwidth at 5670 MHz, Chain 3


### 4.3 Peak Excursion

According to the CFR47 Part 15.407 (a)(6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

#### 4.3.1 Test Method

The ANSI C63.10-2009 Section 6.10.4 conducted method was used to measure the peak excursion. The measurement was performed with modulation per CFR47 Part 15.407 (a) (6). This test was conducted on 3 channels in each operating mode in frequency range 5470 MHz to 5725 MHz on the test sample, S/N 09130M000104. The worst sample result indicated below.

Test Setup:

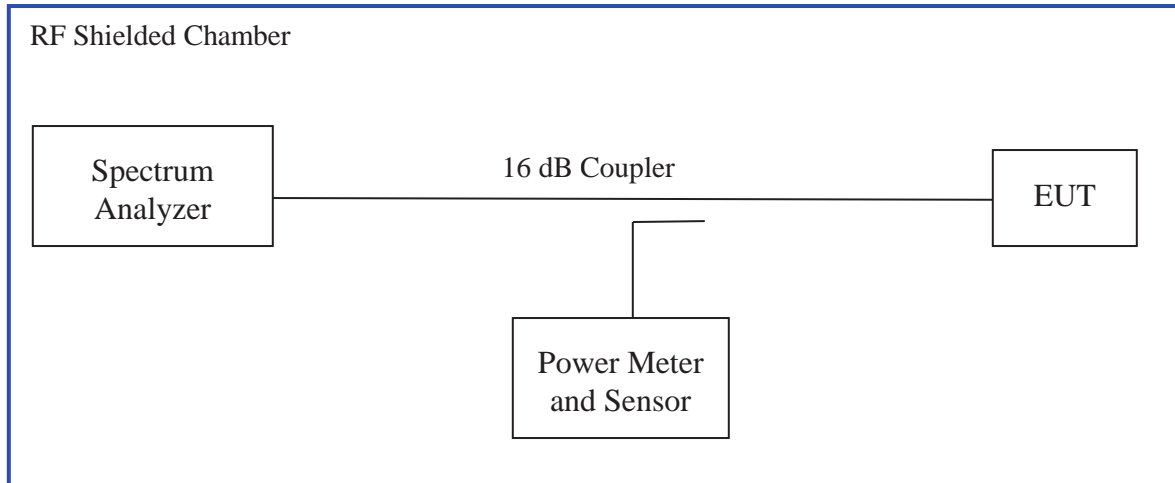

### 4.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 5: Peak Excursion – Test Results**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature						
<b>Antenna Type:</b> Integrated			<b>Power Setting:</b> see test plan			
<b>Max. Directional Gain:</b> + 8 dBi			<b>Signal State:</b> Modulated at 100%.			
<b>Ambient Temp.:</b> 23 °C			<b>Relative Humidity:</b> 32%			
<b>802.11n (HT20) Mode</b>						
Operating Channel	Limit [dB]	Ch0 [dB]	Ch1 [dB]	Ch2 [dB]	Ch3 [dB]	Margin [dB]
5500	13.0	-7.10	-7.30	-7.67	-8.30	-5.90
5580	13.0	-7.50	-6.96	-7.68	-8.51	-6.04
5700	13.0	-7.89	-7.13	-8.37	-8.48	-5.87
<b>Note:</b> The peak excursion was observed at HT20 6.5 Mbps per Data Stream.						
<b>802.11n (HT40) Mode</b>						
Operating Channel	Limit [dB]	Ch0 [dB]	Ch1 [dB]	Ch2 [dB]	Ch3 [dB]	Margin [dB]
5510	13.0	-7.14	-7.28	-6.96	-7.57	-6.05
5550	13.0	-7.21	-7.32	-7.46	-7.73	-5.79
5670	13.0	-7.65	-6.70	-7.66	-8.22	-6.30
<b>Note:</b> The peak excursion was observed at HT40 13.5 Mbps per Data Stream						

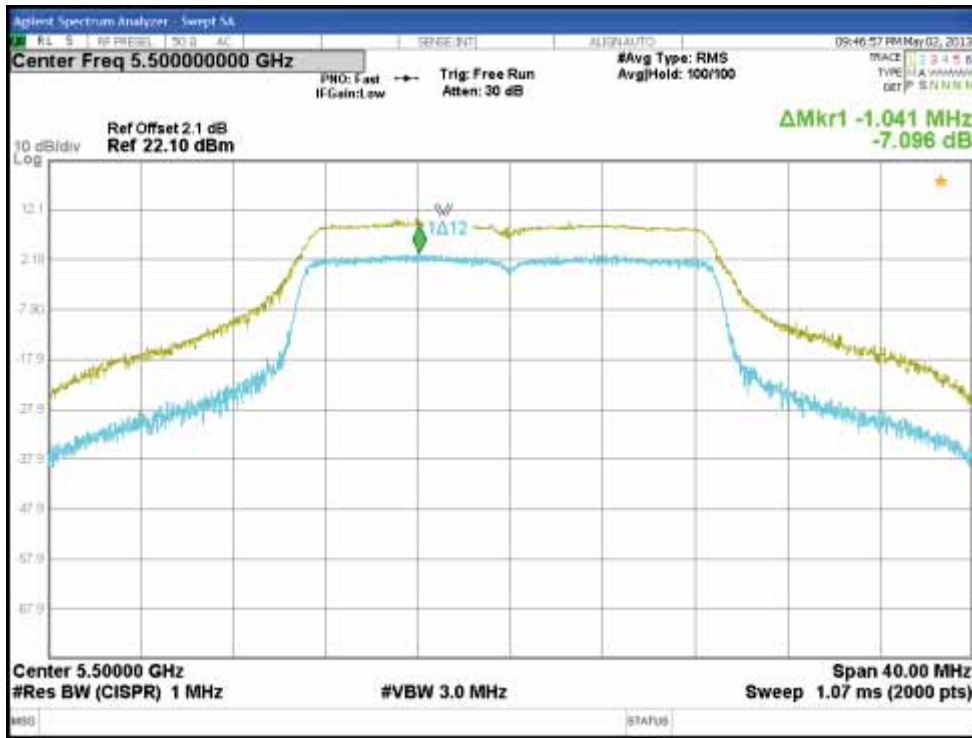


Figure 49: Peak Excursion, 5500 MHz at 802.11n, Chain 0 – 6.5Mbps



Figure 50: Peak Excursion, 5500 MHz at 802.11n, Chain 1 – 6.5Mbps



Figure 51: Peak Excursion, 5500 MHz at 802.11n, Chain 2 – 6.5Mbps



Figure 52: Peak Excursion, 5500 MHz at 802.11n, Chain 3 – 6.5Mbps



Figure 53: Peak Excursion, 5580 MHz at 802.11n, Chain 0 – 6.5Mbps



Figure 54: Peak Excursion, 5580 MHz at 802.11n, Chain 1 – 6.5Mbps





Figure 55: Peak Excursion, 5580 MHz at 802.11n, Chain 2 – 6.5Mbps



Figure 56: Peak Excursion, 5580 MHz at 802.11n, Chain 3 – 6.5Mbps

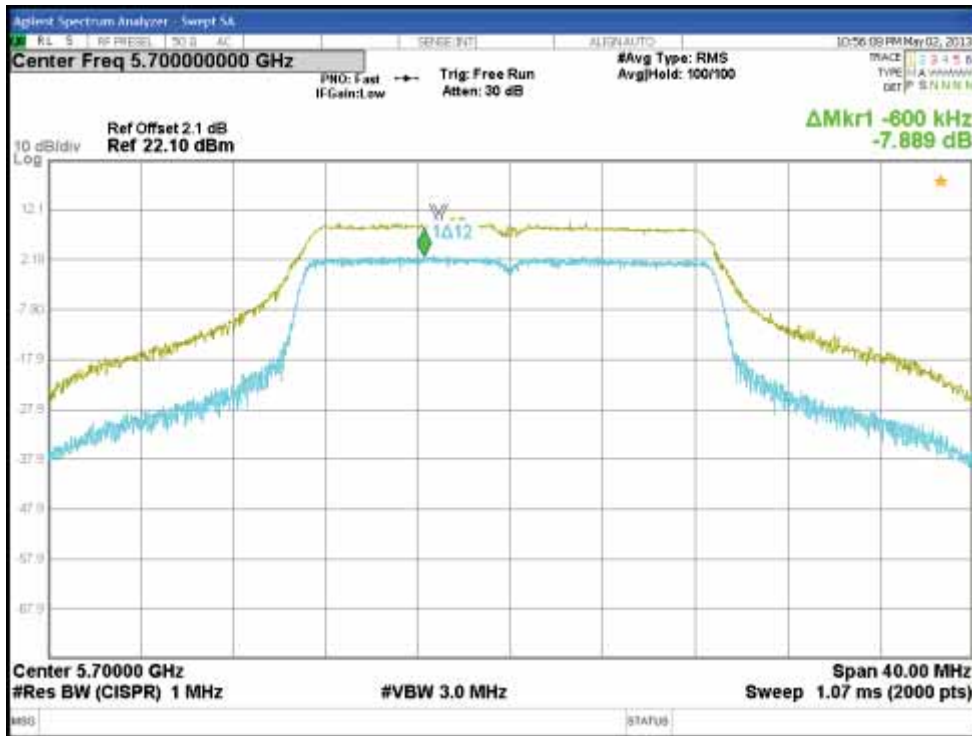


Figure 57: Peak Excursion, 5700 MHz at 802.11n, Chain 0 – 6.5Mbps



Figure 58: Peak Excursion, 5700 MHz at 802.11n, Chain 1 – 6.5Mbps



Figure 59: Peak Excursion, 5700 MHz at 802.11n, Chain 2 – 6.5Mbps



Figure 60: Peak Excursion, 5700 MHz at 802.11n, Chain 3 – 6.5Mbps



Figure 61: Peak Excursion, 5510 MHz at 802.11n, Chain 0 – 13.5Mbps



Figure 62: Peak Excursion, 5510 MHz at 802.11n, Chain 1 – 13.5Mbps



Figure 63: Peak Excursion, 5510 MHz at 802.11n, Chain 2 – 13.5Mbps



Figure 64: Peak Excursion, 5510 MHz at 802.11n, Chain 3 – 13.5Mbps



Figure 65: Peak Excursion, 5550 MHz at 802.11n, Chain 0 – 13.5Mbps



Figure 66: Peak Excursion, 5550 MHz at 802.11n, Chain 1 – 13.5Mbps

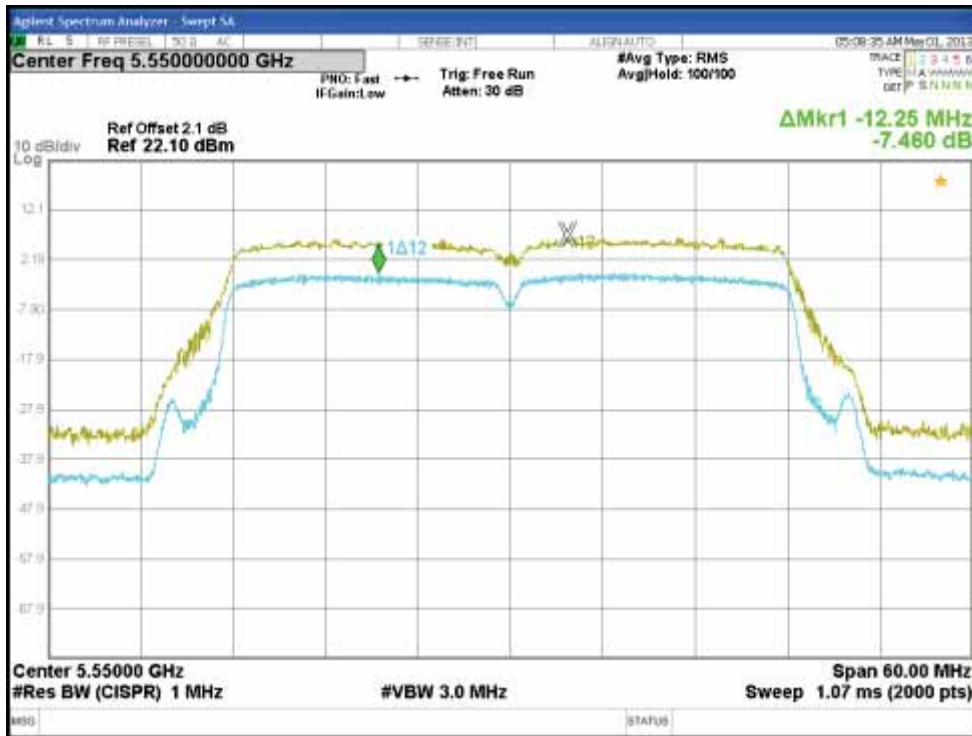


Figure 67: Peak Excursion, 5550 MHz at 802.11n, Chain 2 – 13.5Mbps



Figure 68: Peak Excursion, 5550 MHz at 802.11n, Chain 3 – 13.5Mbps



Figure 69: Peak Excursion, 5670 MHz at 802.11n, Chain 0 – 13.5Mbps



Figure 70: Peak Excursion, 5670MHz at 802.11n, Chain 1 – 13.5Mbps





Figure 71: Peak Excursion, 5670MHz at 802.11n, Chain 2 – 13.5Mbps



Figure 72: Peak Excursion, 5670MHz at 802.11n, Chain 3 – 13.5Mbps


#### 4.4 Power Spectral Density

According to the CFR47 Part 15.407 (a) and RSS 210 (A9.2), the spectral power density output of the antenna port shall be less than 11 dBm in any 1 MHz band during any time interval of continuous transmission.

##### 4.4.1 Test Method

The conducted method was used to measure the power spectral density per ANSI C63.10-2009 Section 6.11.2. The measurement was performed with modulation per CFR47 Part 15.407 (a) and RSS 210 (A9.2). The pre-evaluation was performed to find the worst modes. The worst findings were conducted on 3 channels in frequency range of 5470 MHz to 5725 MHz for the test sample, S/N 09130M000104. The result indicated below.

Test Setup:

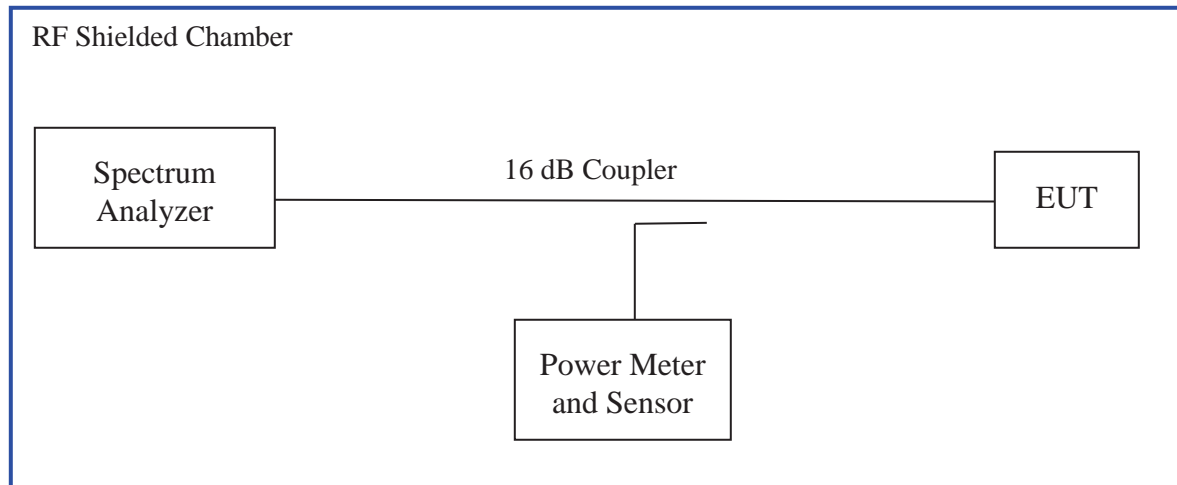

#### 4.4.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 6:** Power Spectral Density – Test Results

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only			
<b>Antenna Type:</b> Integrated		<b>Power Setting:</b> See Test plan	
<b>Max. Directional Gain:</b> + 8 dBi		<b>Signal State:</b> Modulated at 100%.	
<b>Ambient Temp.:</b> 23 °C		<b>Relative Humidity:</b> 28%	
<b>Power Spectral Density</b>			
<b>802.11n (HT20) Mode</b>			
Freq. (MHz)	Total PSD [dBm]	Limit [dBm]	Margin [dB]
5500	8.185	9.00	-0.82
5580	8.442	9.00	-0.56
5700	7.645	9.00	-1.36
<p><b>Note:</b> 1. The highest power spectral density was observed at HT20 6.5 Mbps per data stream.                  2. According KDB 662911, amplitude bins of all chains were sum together.                  3. The total directional gain would be 8dBi; 2dBi +10*Log(4). Per CFR47 Part 15.407 (a), the limit is reduced for every dBi gain exceeding 6dBi. The limit would be 9.00 dBm.</p>			
<b>802.11n (HT40) Mode</b>			
Freq. (MHz)	Total PSD [dBm]	Limit [dBm]	Margin [dB]
5510	6.947	9.00	-2.05
5550	6.999	9.00	-2.00
5670	6.839	9.00	-2.16
<p><b>Note:</b> 1. The highest peak output power was observed at HT40 13.5 Mbps per data stream.                  2. According KDB 662911, amplitude bins of all chains were sum together.                  3. The total directional gain would be 8dBi; 2dBi +10*Log(4). Per CFR47 Part 15.407 (a), the limit is reduced for every dBi gain exceeding 6dBi. The limit would be 9.00 dBm.</p>			



Figure 73: Power Spectral Density, 5500 MHz at 802.11n, Chain 0 – 6.5Mbps



Figure 74: Power Spectral Density, 5500 MHz at 802.11n, Chain 1 – 6.5Mbps

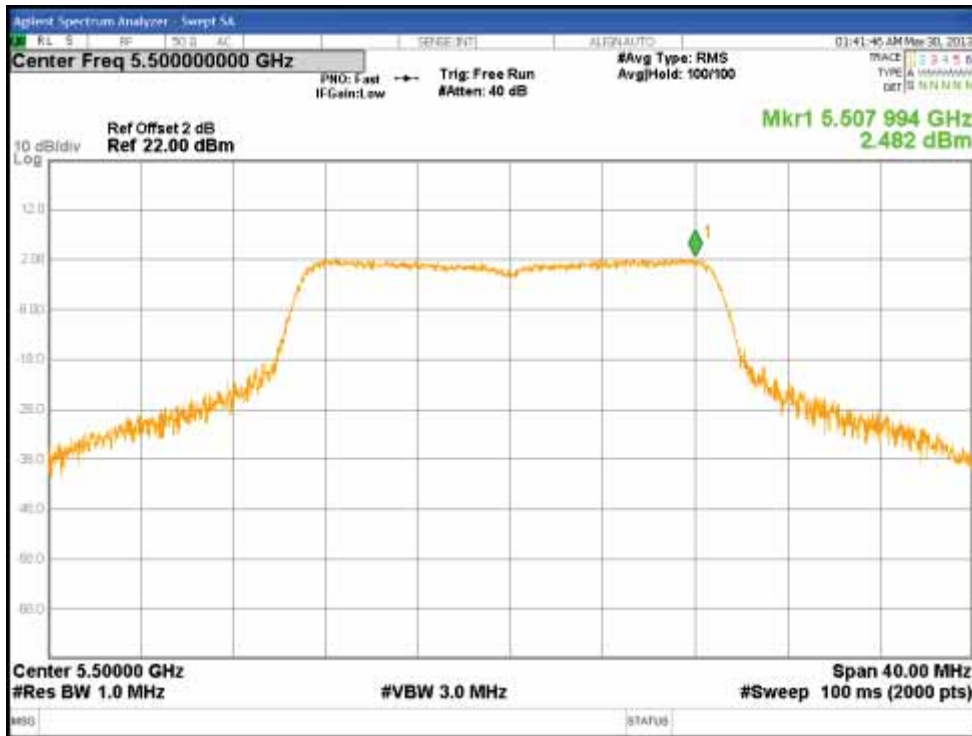
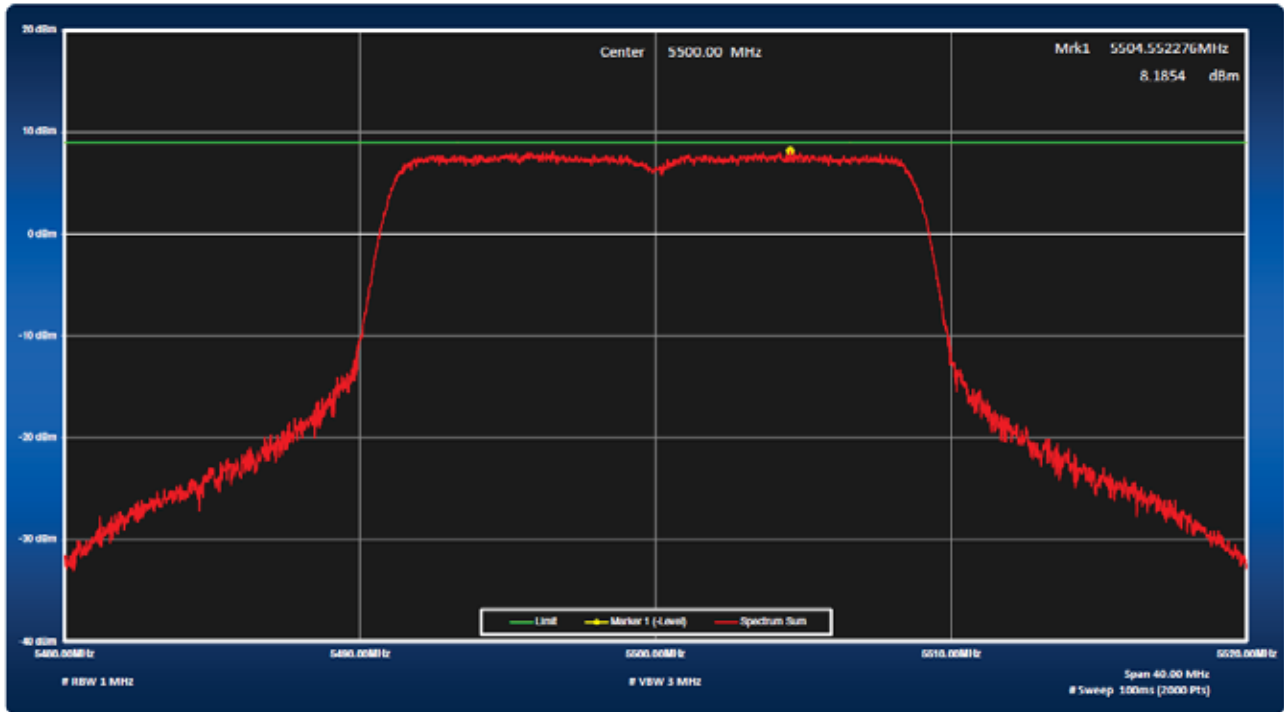


Figure 75: Power Spectral Density, 5500 MHz at 802.11n, Chain 2 – 6.5Mbps



Figure 76: Power Spectral Density, 5500 MHz at 802.11n, Chain 3 – 6.5Mbps



**Figure 77:** Total Sum of Power Spectral Density, 5500 MHz at 802.11n, 6.5Mbps



Figure 78: Power Spectral Density, 5580 MHz at 802.11n, Chain 0 – 6.5Mbps



Figure 79: Power Spectral Density, 5580 MHz at 802.11n, Chain 1 – 6.5Mbps



Figure 80: Power Spectral Density, 5580 MHz at 802.11n, Chain 2 – 6.5Mbps



Figure 81: Power Spectral Density, 5580 MHz at 802.11n, Chain 3 – 6.5Mbps



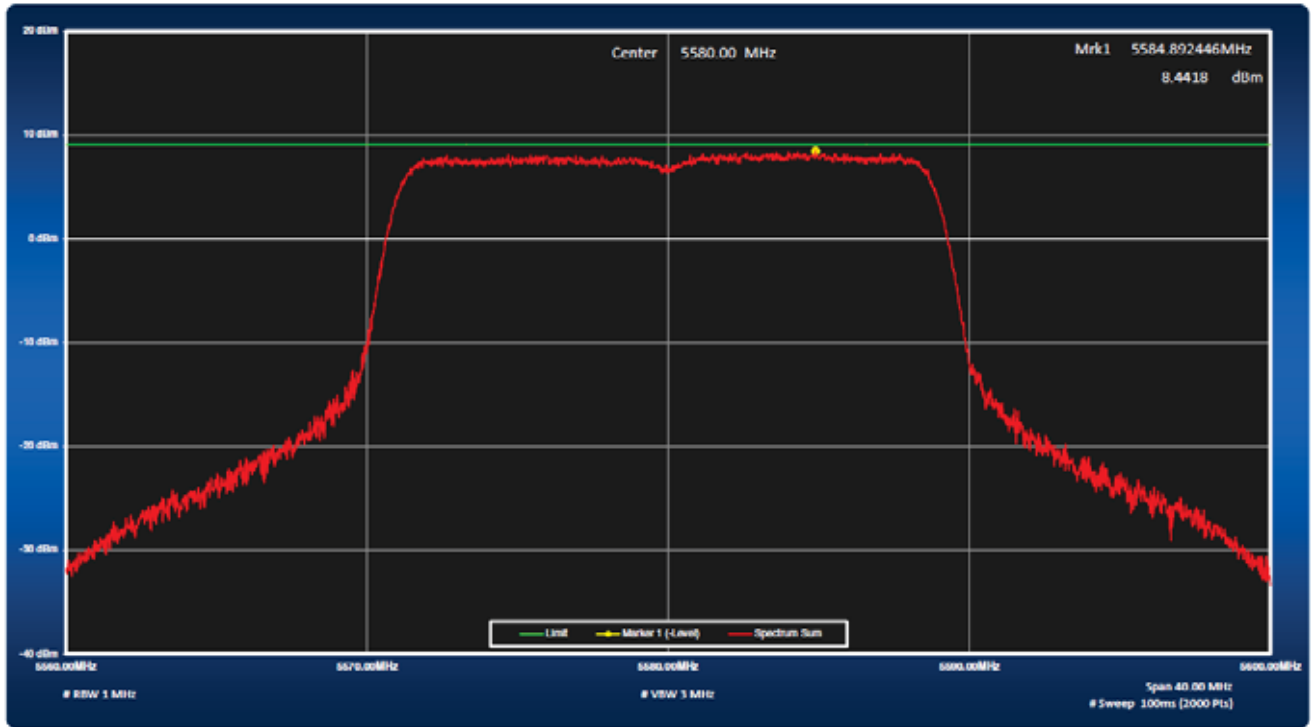


Figure 82: Total Sum of Power Spectral Density, 5580 MHz at 802.11n, 6.5Mbps



Figure 83: Power Spectral Density, 5700 MHz at 802.11n, Chain 0 – 6.5Mbps



Figure 84: Power Spectral Density, 5700 MHz at 802.11n, Chain 1 – 6.5Mbps



Figure 85: Power Spectral Density, 5700 MHz at 802.11n, Chain 2 – 6.5Mbps



Figure 86: Power Spectral Density, 5700 MHz at 802.11n, Chain 3 – 6.5Mbps

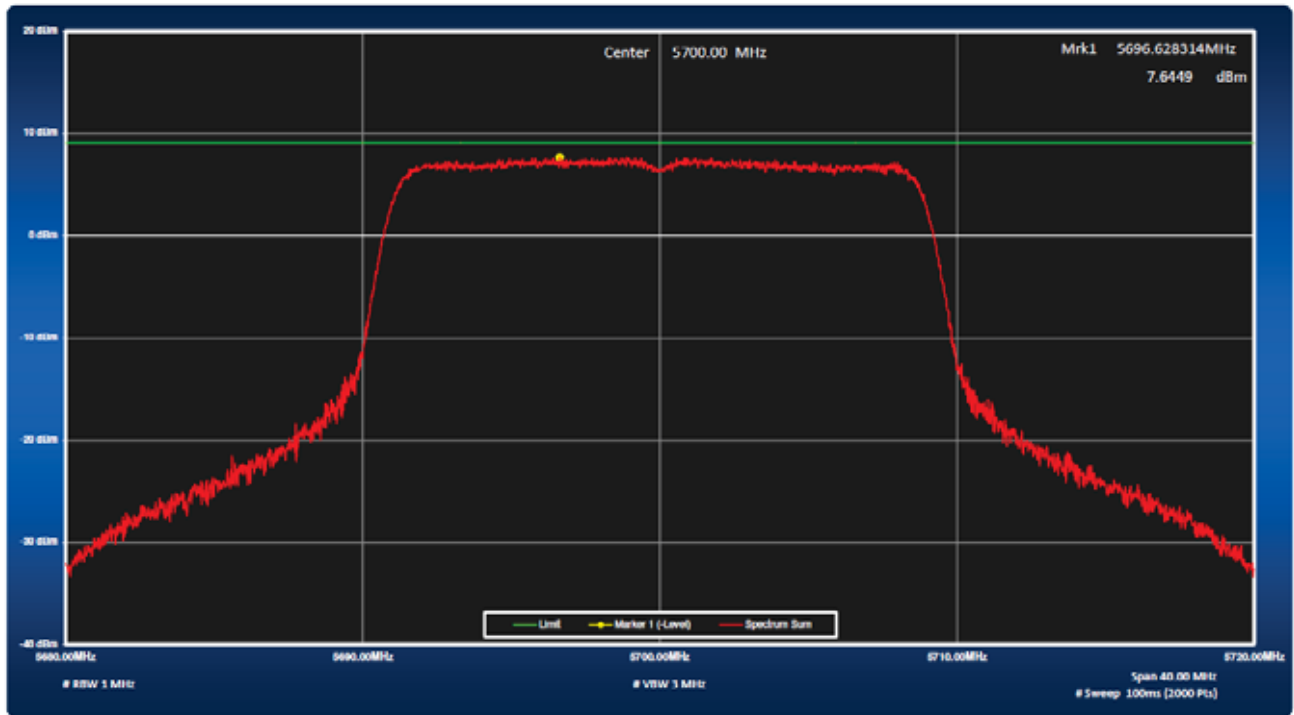


Figure 87: Total Sum of Power Spectral Density, 5700 MHz at 802.11n, 6.5Mbps



Figure 88: Power Spectral Density, 5510 MHz at 802.11n, Chain 0 – 13.5Mbps



Figure 89: Power Spectral Density, 5510 MHz at 802.11n, Chain 1 – 13.5Mbps



Figure 90: Power Spectral Density, 5510 MHz at 802.11n, Chain 2 – 13.5Mbps



Figure 91: Power Spectral Density, 5510 MHz at 802.11n, Chain 3 – 13.5Mbps

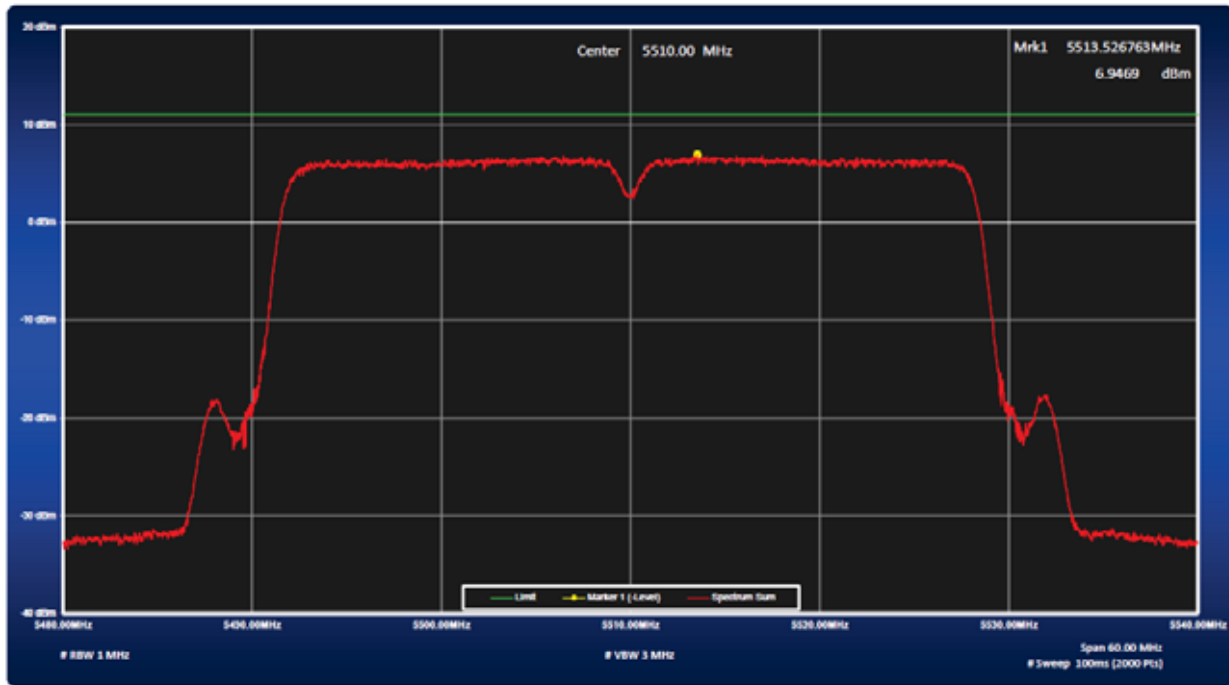


Figure 92: Total Sum of Power Spectral Density, 5510 MHz at 802.11n, 13.5Mbps



Figure 93: Power Spectral Density, 5550 MHz at 802.11n, Chain 0 – 13.5Mbps



Figure 94: Power Spectral Density, 5550 MHz at 802.11n, Chain 1 – 13.5Mbps





Figure 95: Power Spectral Density, 5550 MHz at 802.11n, Chain 2 – 13.5Mbps



Figure 96: Power Spectral Density, 5550 MHz at 802.11n, Chain 3 – 13.5Mbps

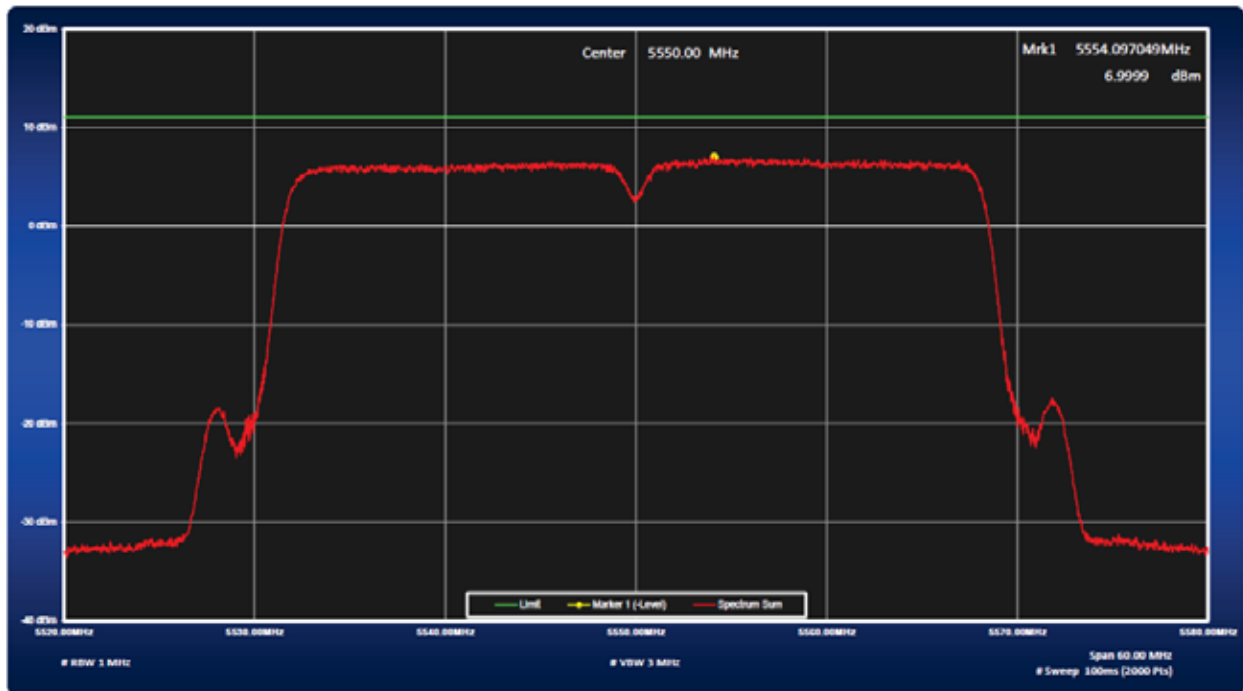


Figure 97: Total Sum of Power Spectral Density, 5550 MHz at 802.11n, 13.5Mbps



Figure 98: Power Spectral Density, 5670 MHz at 802.11n, Chain 0 – 13.5Mbps



Figure 99: Power Spectral Density, 5670MHz at 802.11n, Chain 1 – 13.5Mbps



Figure 100: Power Spectral Density, 5670MHz at 802.11n, Chain 2 – 13.5Mbps



Figure 101: Power Spectral Density, 5670MHz at 802.11n, Chain 3 – 13.5Mbps

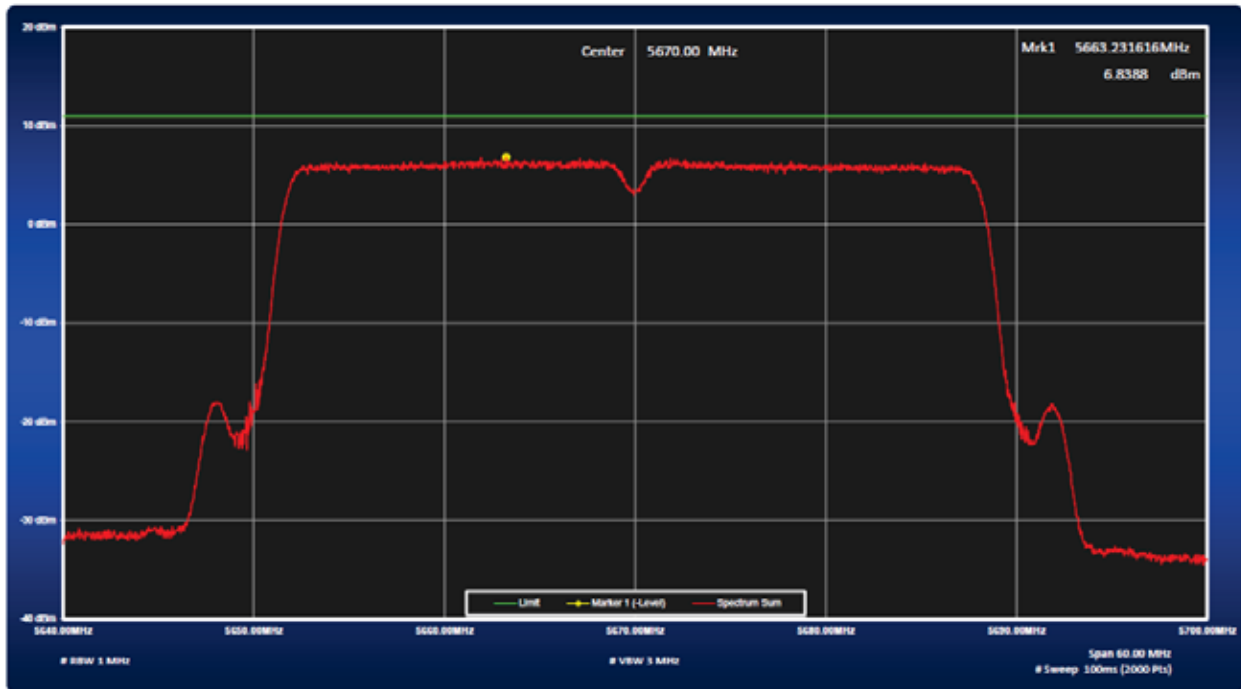


Figure 102: Total Sum of Power Spectral Density, 5670MHz at 802.11n, 13.5Mbps

## 4.5 Transmitter Spurious Emissions

*Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.407(b), RSS 210 Sect. A.9.2*

### 4.5.1 Test Methodology

#### 4.5.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Pres-scans were performed to determine the worst axis, data rate/ chains.

#### 4.5.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

The final scan for 30 MHz to 1 GHz was performed at 5580 MHz, 6.5 Mbit/s .

The above 1GHz final scans performed on the worst axis, Y-Axis, for three operating channels;

6.5 Mbit/s for 802.11n HT20 Mode: 5500 MHz, 5580 MHz, 5700 MHz

13.5 Mbit/s for 802.11n HT40 Mode: 5510 MHz, 5550 MHz, 5670 MHz.

### 4.5.1.3 Deviations

None.

### 4.5.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2012 and RSS 210 A1.1.2 2010.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

According to CFR47 15.407 (b), all harmonics and spurious emissions which are outside the 5150 MHz - 5250 MHz, 5250 MHz – 5350 MHz, or 5470 MHz – 5725MHz shall not exceed -27 dBm/MHz. This is equivalent to 68.2 dBuV/m at 3 meter distance.

### 4.5.3 Test Results


The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 7: Transmit Spurious Emission at Band-Edge Requirements**


<b>Test Conditions:</b> Radiated Measurement, Normal Temperature and Voltage only								
<b>Antenna Type:</b> Integrated				<b>Power Setting:</b> See test plan				
<b>Max. Directional Gain:</b> +8.0 dBi				<b>Signal State:</b> Modulated at 100%				
<b>Ambient Temp.:</b> 23 °C				<b>Relative Humidity:</b> 31%				
<b>Band-Edge Results</b>								
Freq. (MHz)	Level (dBuV/m)	Polarity (H/V)	Limit (dBuV/m)	Margin (dB)	Det.	Table Deg.	Tower (cm)	Note
5470	69.05	V	74.00	-4.95	Pk	176	103	HT20-5500MHz-17dBm
5470	52.99	V	54.00	-1.01	Ave	176	103	HT20-5500MHz-17dBm
5470	65.21	H	74.00	-8.79	Pk	260	311	HT20-5500MHz-17dBm
5470	47.36	H	54.00	-6.64	Ave	260	311	HT20-5500MHz-17dBm
5725	64.14	H	74.00	-9.86	Pk	248	274	HT20-5700MHz-18dBm
5725	50.49	H	54.00	-3.51	Ave	248	274	HT20-5700MHz-18dBm
5725	66.18	V	74.00	-7.82	Pk	107	127	HT20-5700MHz-18dBm
5725	52.99	V	54.00	-1.01	Ave	107	127	HT20-5700MHz-18dBm
5470	67.98	V	74.00	-6.02	Pk	232	115	HT40-5510MHz-17dBm
5470	53.61	V	54.00	-0.39	Ave	232	115	HT40-5510MHz-17dBm
5468	69.16	H	74.00	-4.84	Pk	269	309	HT40-5510MHz-16dBm
5468	53.74	H	54.00	-0.26	Ave	269	309	HT40-5510MHz-16dBm
5725	65.64	H	74.00	-8.36	Pk	254	167	HT40-5670MHz-18dBm
5725	51.29	H	54.00	-2.71	Ave	254	167	HT40-5670MHz-18dBm
5725	65.26	V	74.00	-8.74	Pk	158	101	HT40-5670MHz-18dBm
5725	51.42	V	54.00	-2.58	Ave	158	101	HT40-5670MHz-18dBm
<p><b>Note:</b></p> <ol style="list-style-type: none"> <li>1. Band-edge frequency at 5460MHz is at the restricted band.</li> <li>2. All the band-edge measurements met the restricted band requirements of CFR47 15.205.</li> <li>3. It is also complied with the -27 dBm/MHz (68.2dBuV/m at 3m) requirements as stated in CFR47 15.407 (b) (1) to 15.407 (b) (3).</li> </ol>								



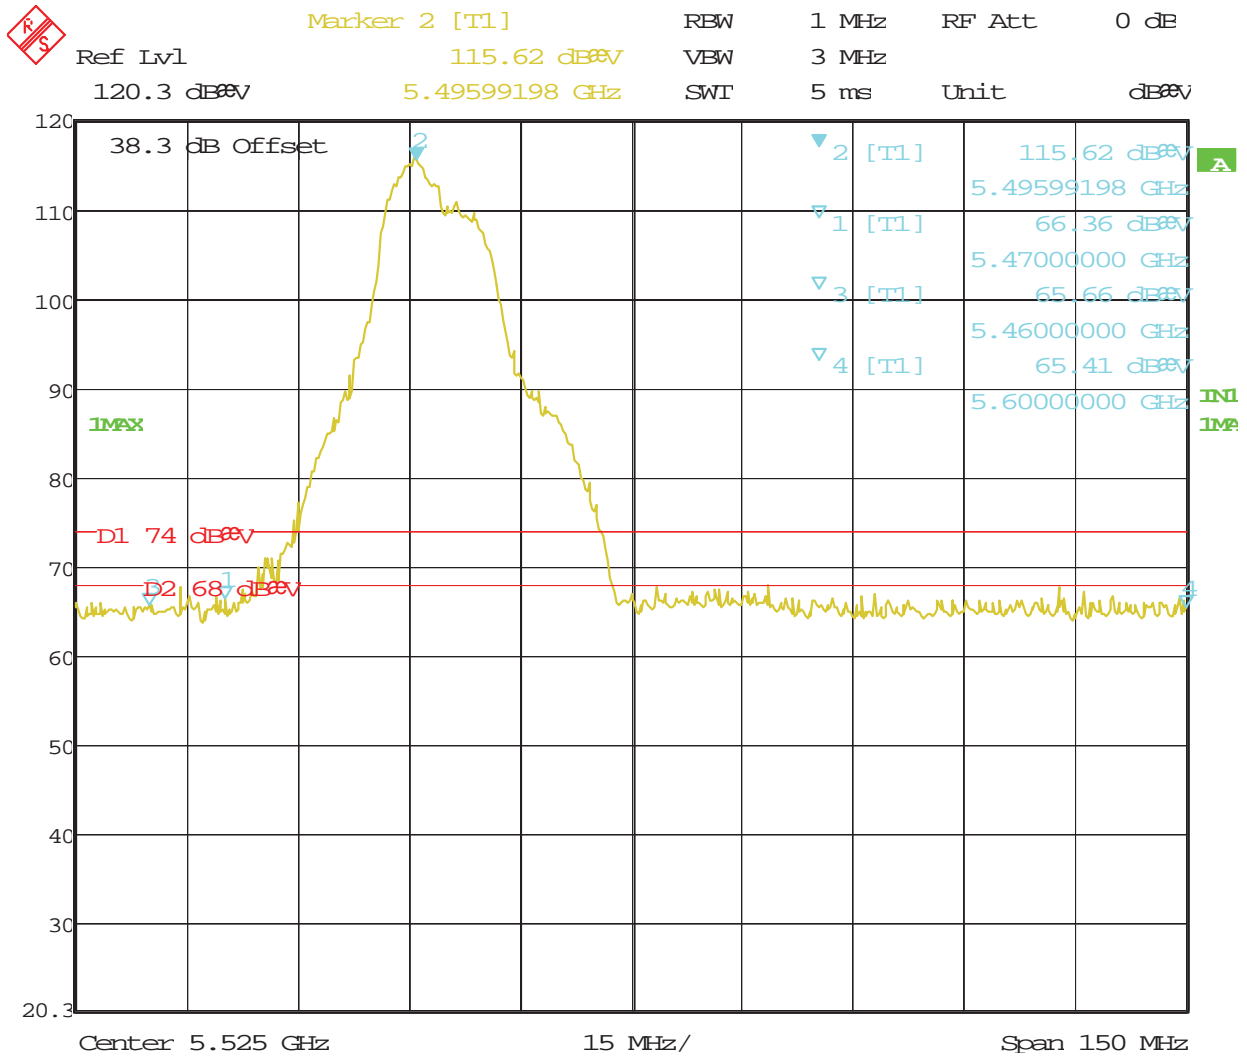


Date: 14.MAY.2013 14:31:45

**Figure 103:** Radiated Emission at the Edge for Channel 5500 MHz at 6.5Mbps – Horz. (Peak)

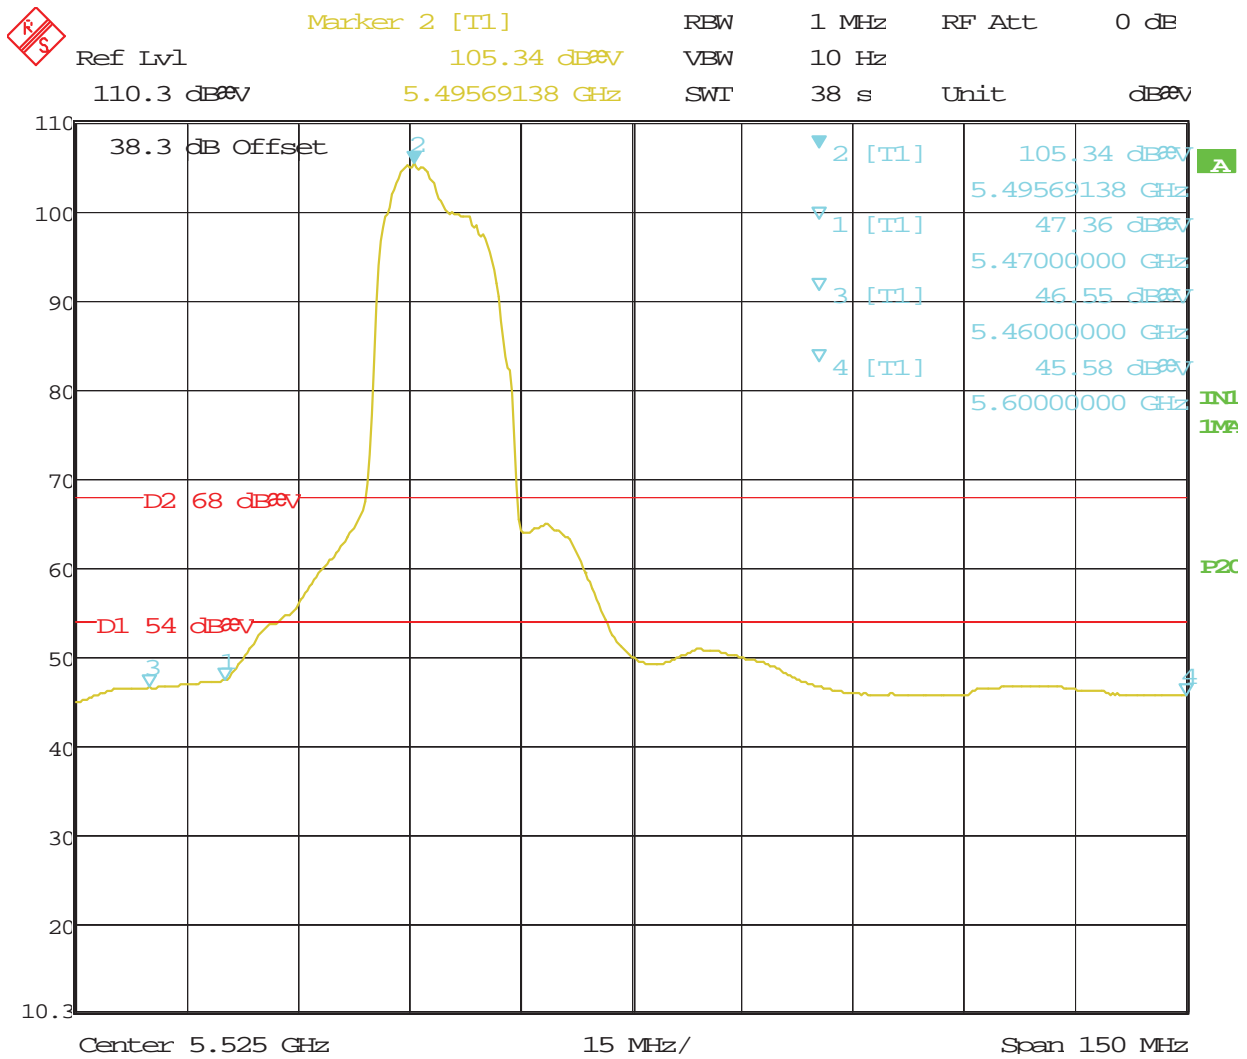

Date: 14.MAY.2013 14:33:11


**Figure 104:** Radiated Emission at the Edge for Channel 5500 MHz at 6.5Mbps – Horz. (Ave.)

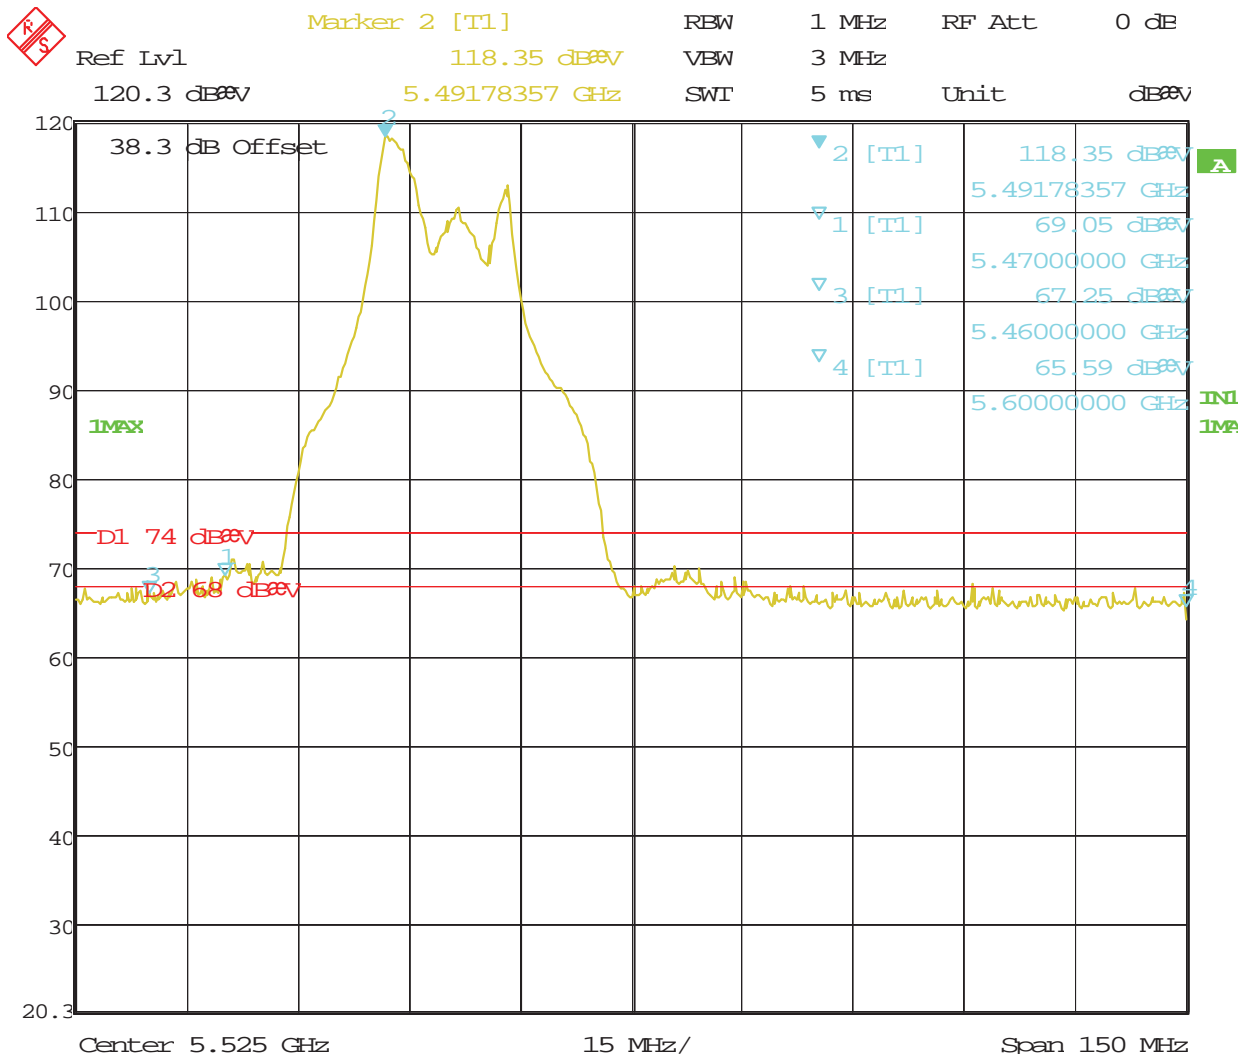

Date: 14.MAY.2013 14:25:44


**Figure 105:** Radiated Emission at the Edge for Channel 5500 MHz at 6.5Mbps – Vert. (Peak)

Note: The bandedge at 5470MHz was over 68.2dBuV/m per CFR47 Part 15.407 (b) (1) to 15.407 (b) (3); however, it met both peak and average requirements of CFR47 Part 15.205 for the restricted band, per Fig. 105 and Fig. 106.

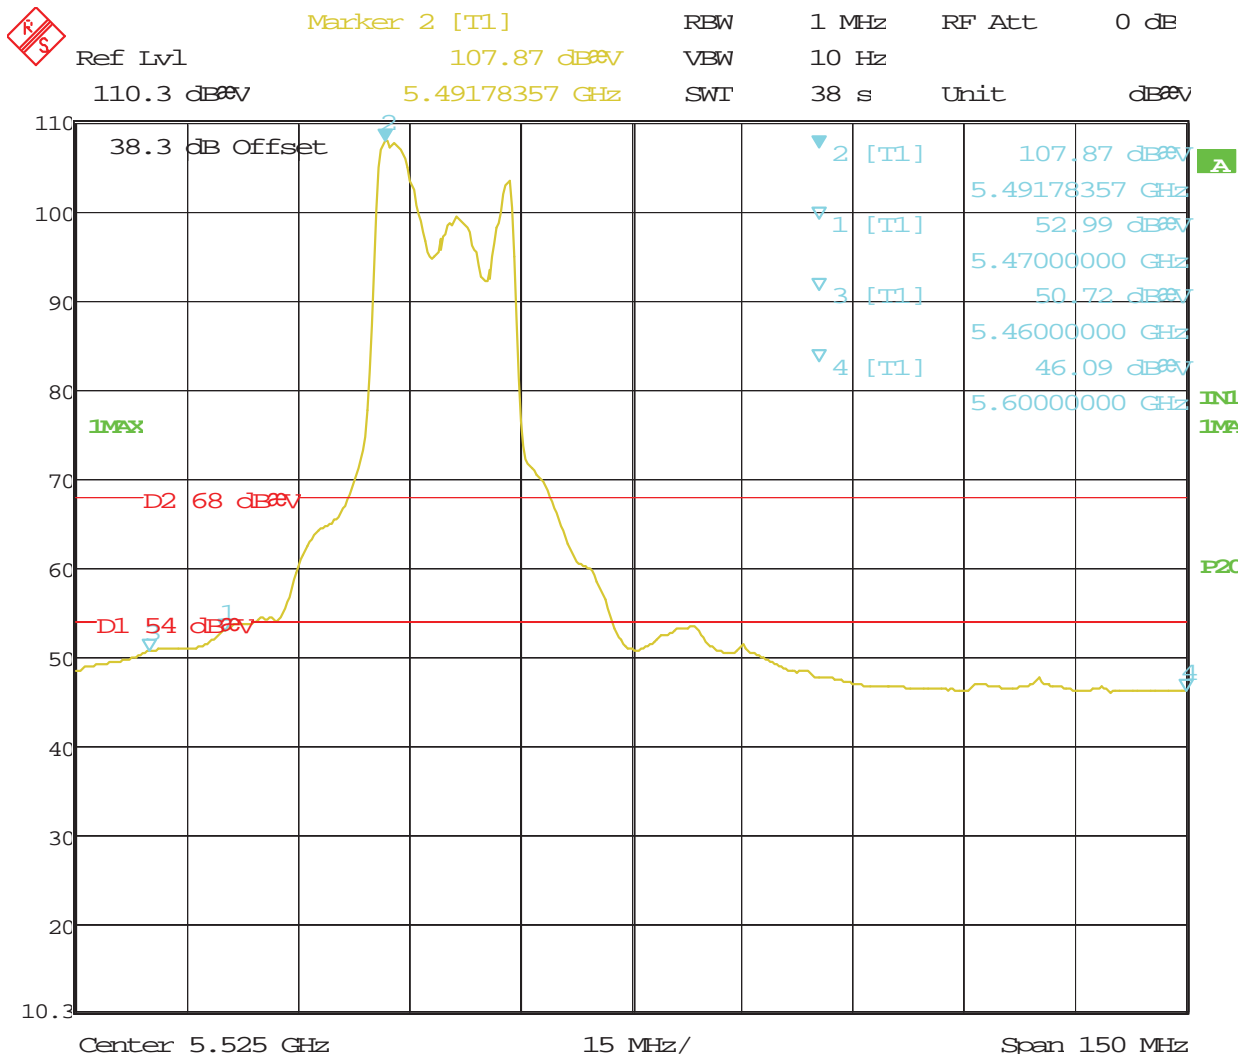


Date: 14.MAY.2013 14:24:08

**Figure 106:** Radiated Emission at the Edge for Channel 5500 MHz at 6.5Mbps – Vert. (Ave.)

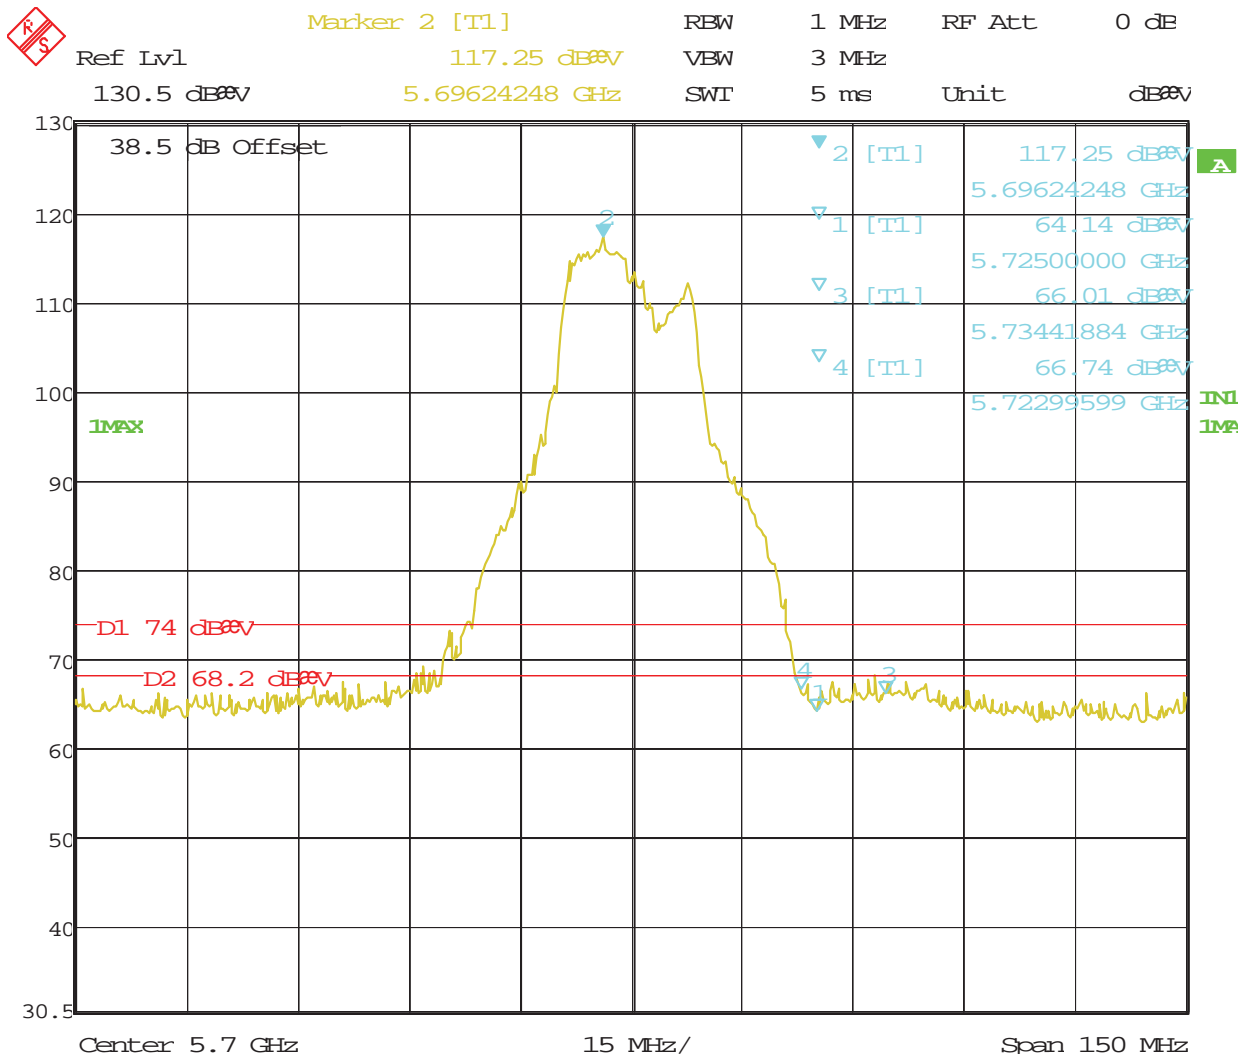


Date: 14.MAY.2013 14:43:32

**Figure 107:** Radiated Emission at the Edge for Channel 5700 MHz at 6.5Mbps – Horz. (Peak)

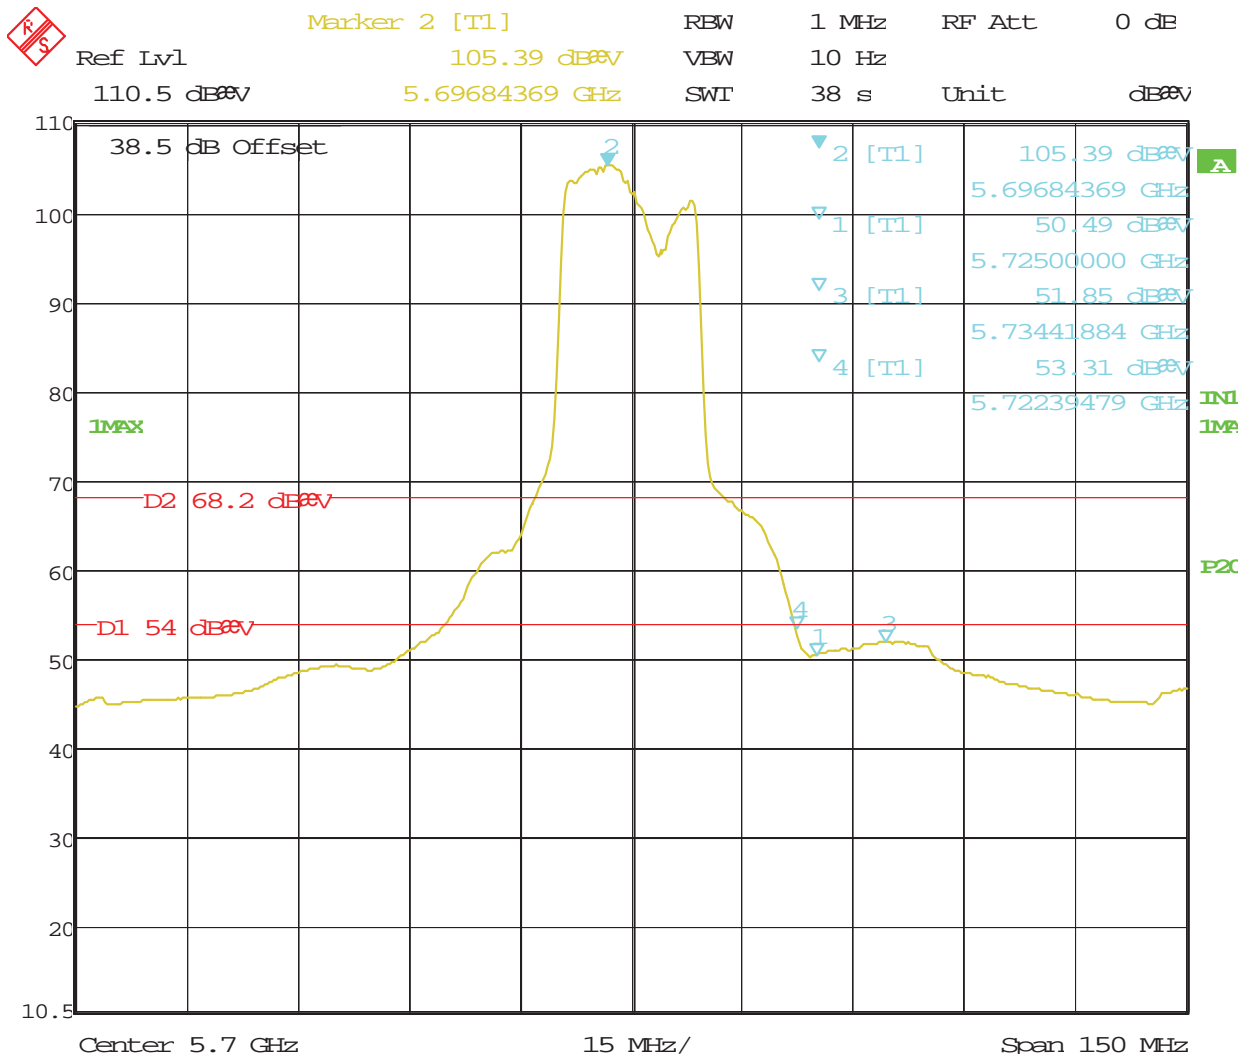

Date: 14.MAY.2013 14:45:00


**Figure 108:** Radiated Emission at the Edge for Channel 5700 MHz at 6.5Mbps – Horz. (Ave.)

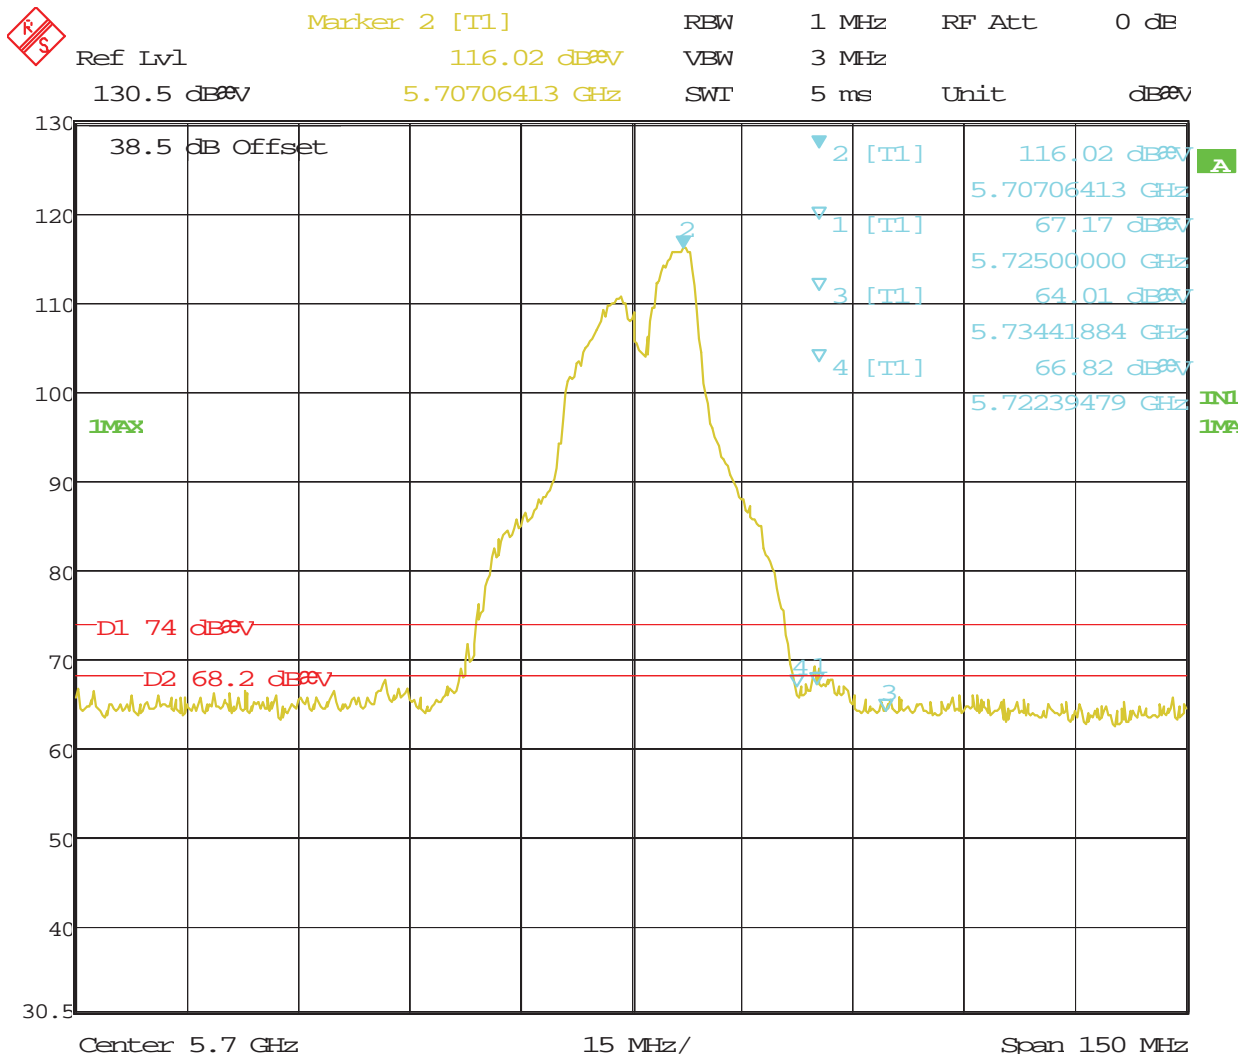

Date: 14.MAY.2013 14:47:59

**Figure 109:** Radiated Emission at the Edge for Channel 5700 MHz at 6.5Mbps – Vert. (Peak)


Note: The bandedge at 5725MHz was over 68.2dBuV/m per CFR47 Part 15.407 (b) (1) to 15.407 (b) (3); however, it met both peak and average requirements of CFR47 Part 15.205 for the restricted band, per Fig. 109 and Fig. 110.

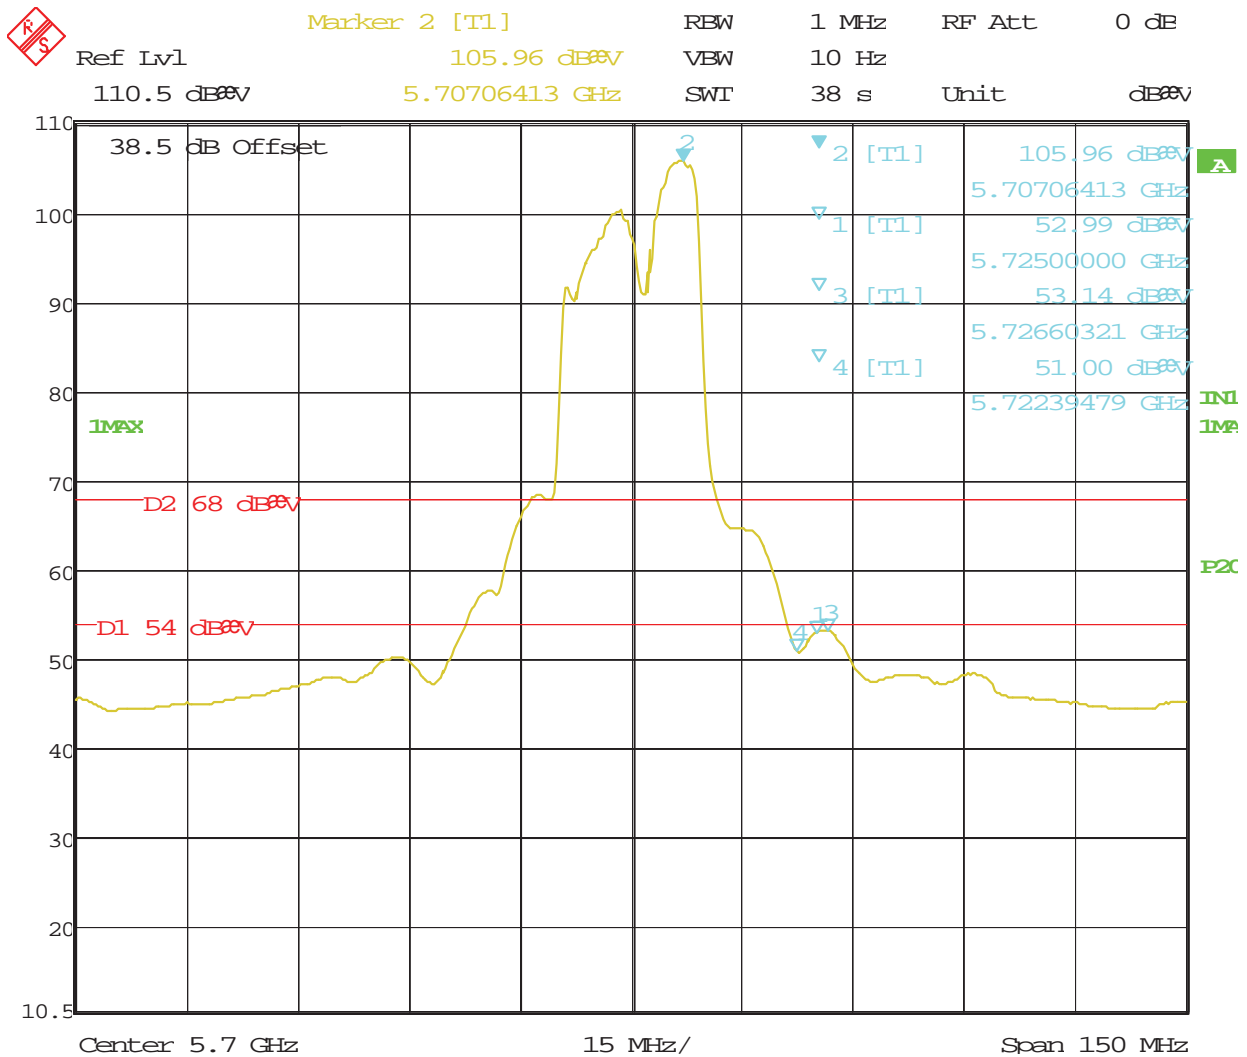

Date: 14.MAY.2013 14:50:23

**Figure 110:** Radiated Emission at the Edge for Channel 5700 MHz at 6.5Mbps – Vert. (Ave.)




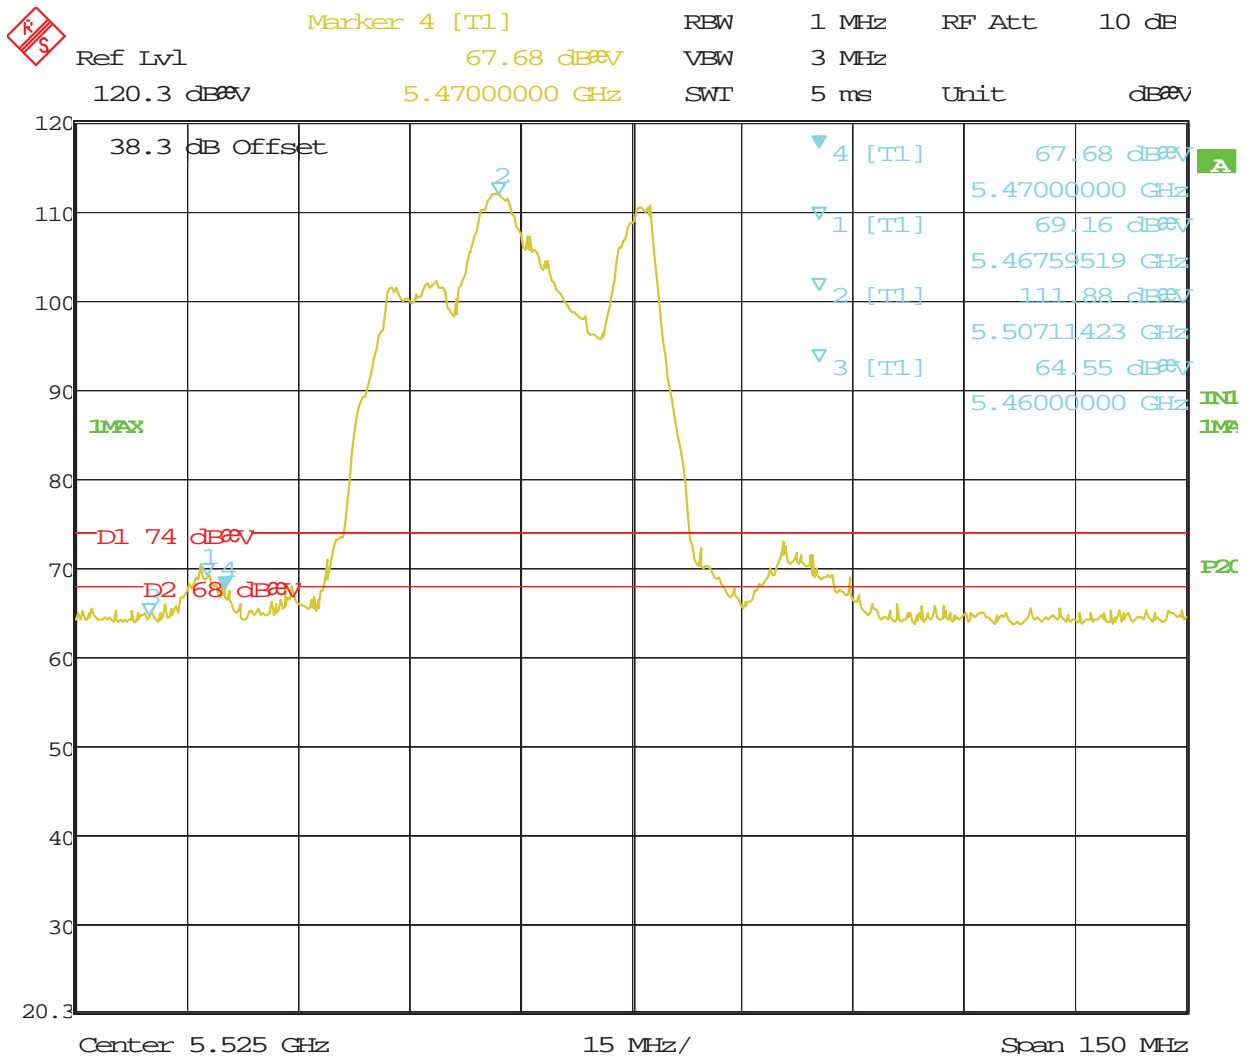

Date: 14.MAY.2013 15:30:31


**Figure 111:** Radiated Emission at the Edge for Channel 5510 MHz at 13.5Mbps – Horz. (Peak)

Note: The bandedge at 5470MHz was over 68.2dBuV/m per CFR47 Part 15.407 (b) (1) to 15.407 (b) (3); however, it met both peak and average requirements of CFR47 Part 15.205 for the restricted band, per Fig. 111 and Fig. 112.

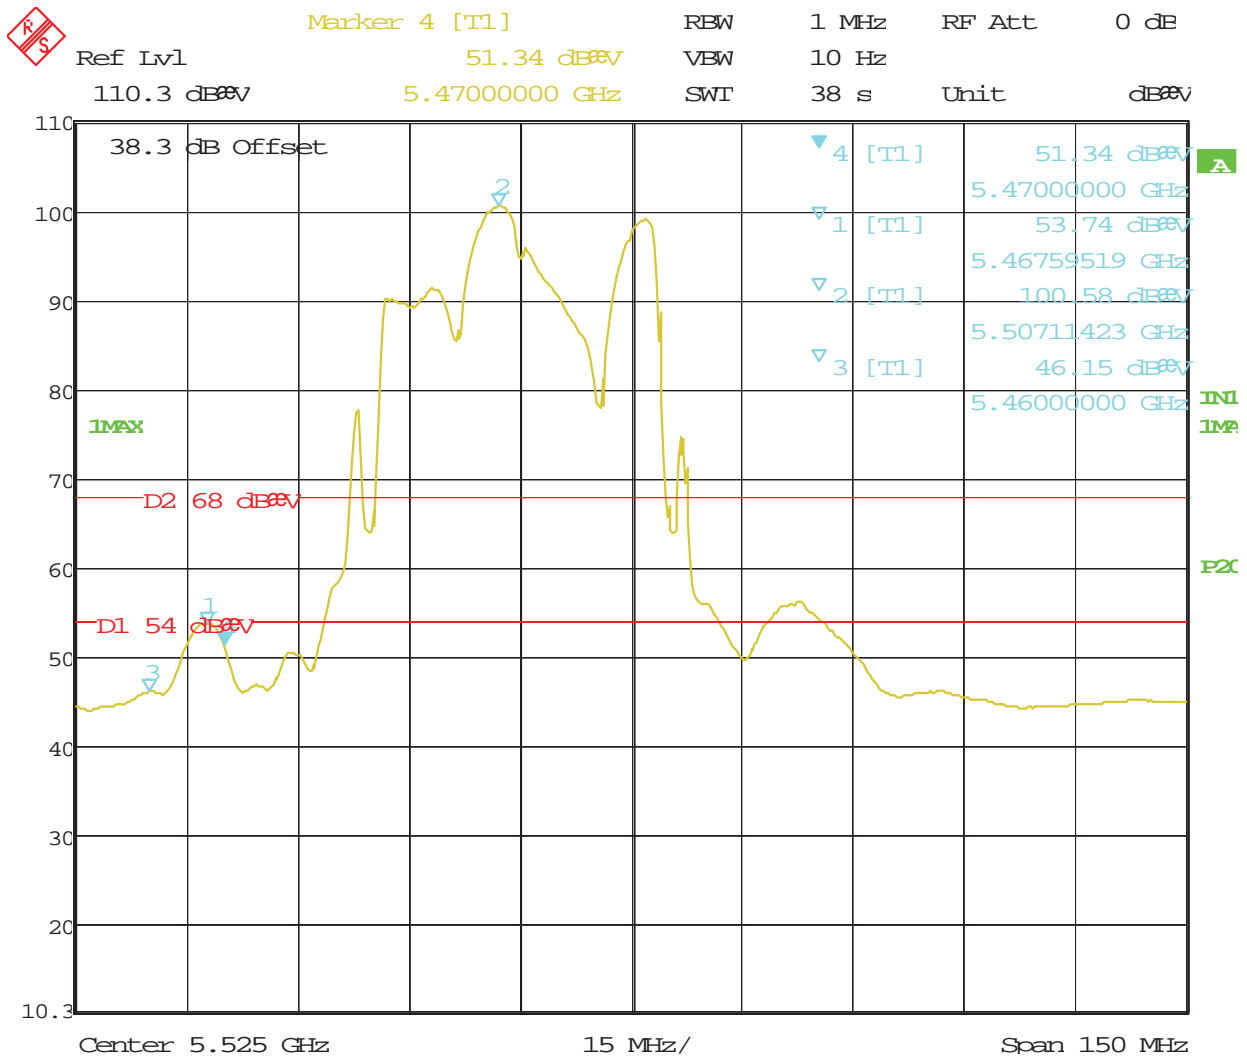

Date: 14.MAY.2013 15:26:49


**Figure 112:** Radiated Emission at the Edge for Channel 5510 MHz at 13.5Mbps – Horz. (Ave.)

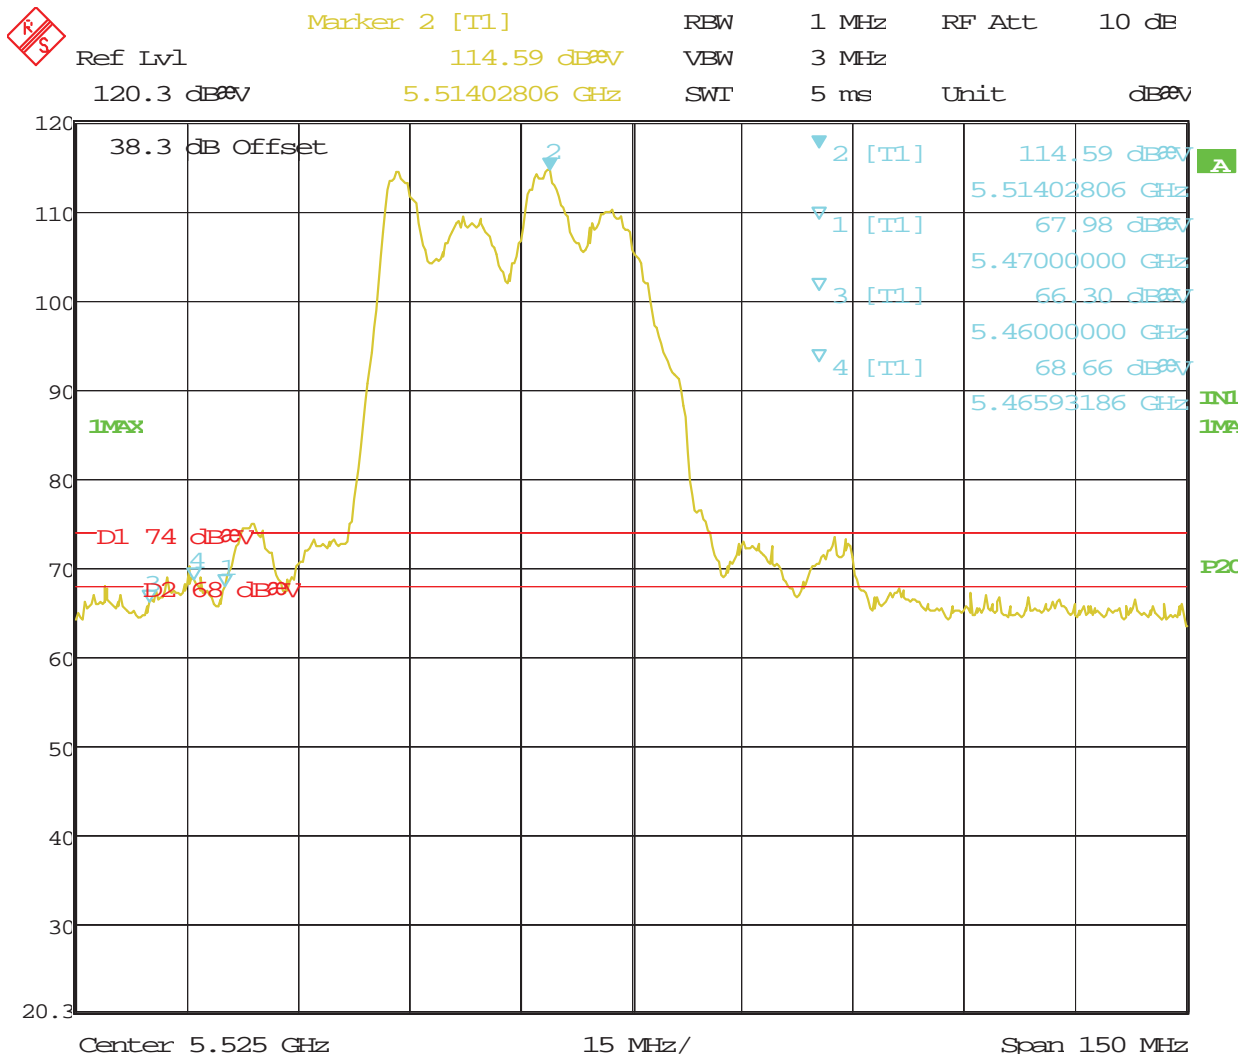

Date: 14.MAY.2013 15:05:31


**Figure 113:** Radiated Emission at the Edge for Channel 5510 MHz at 13.5Mbps – Vert. (Peak)

Note: The bandedge at 5470MHz was over 68.2dBuV/m per CFR47 Part 15.407 (b) (1) to 15.407 (b) (3); however, it met both peak and average requirements of CFR47 Part 15.205 for the restricted band, per Fig. 113 and Fig. 114.

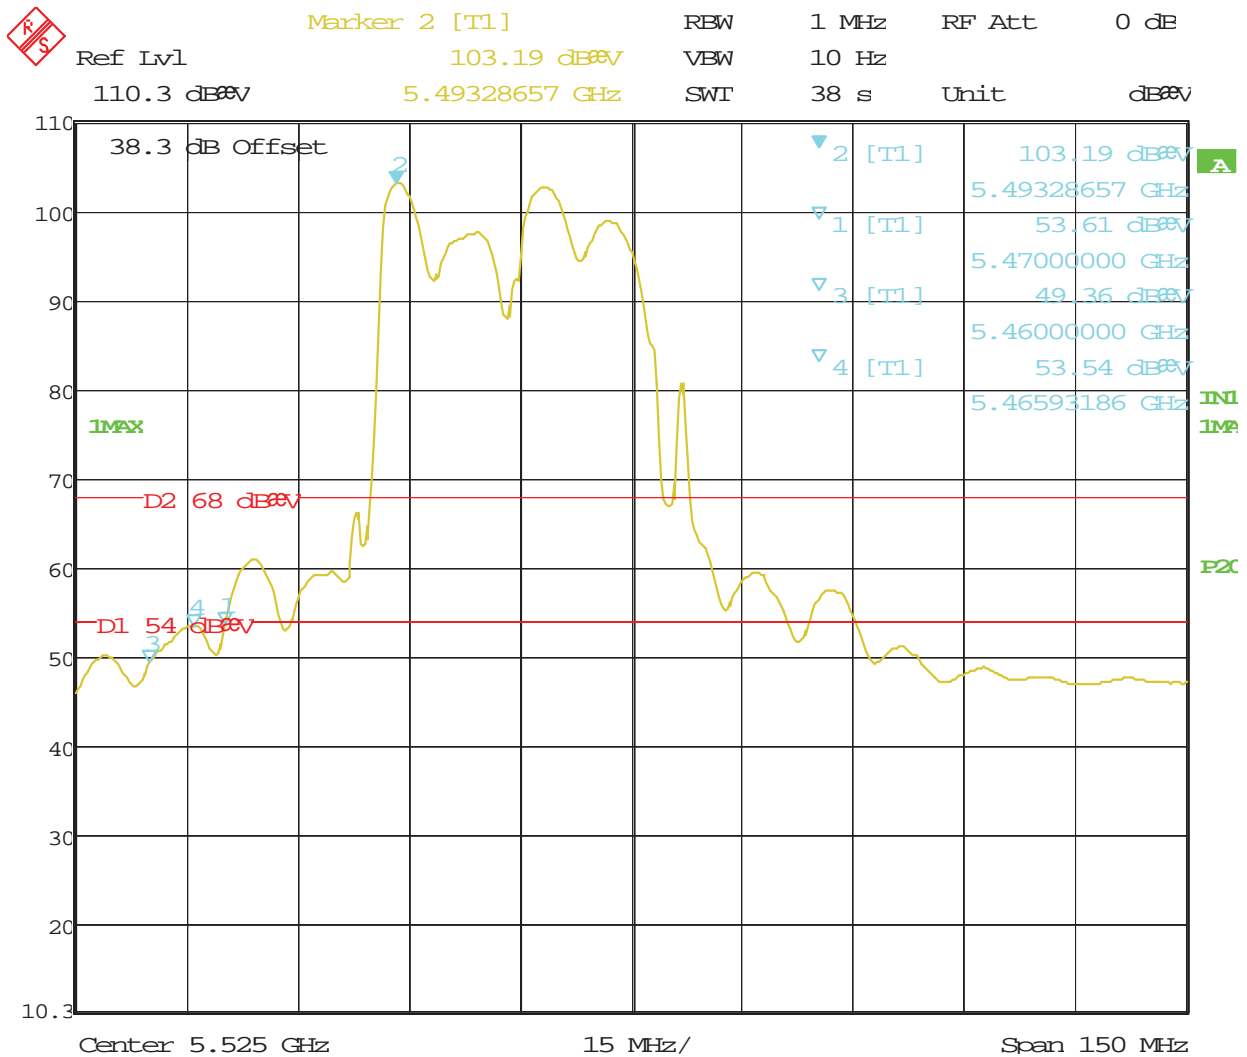


Date: 14.MAY.2013 15:04:40

**Figure 114:** Radiated Emission at the Edge for Channel 5510 MHz at 13.5Mbps – Vert. (Ave.)

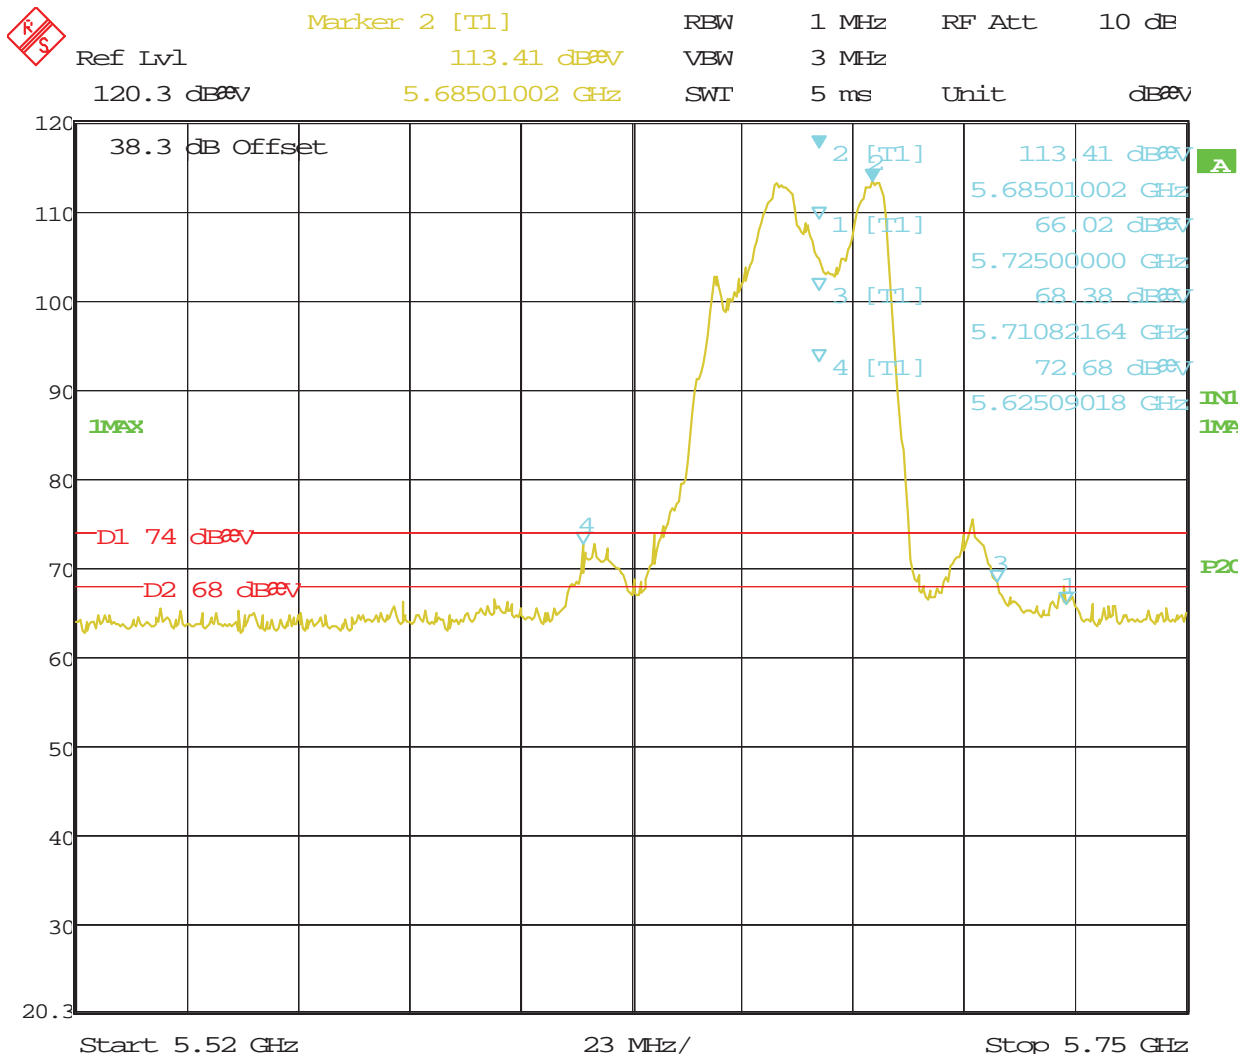

Date: 14.MAY.2013 15:54:38

**Figure 115:** Radiated Emission at the Edge for Channel 5670 MHz at 13.5Mbps – Horz (Peak)

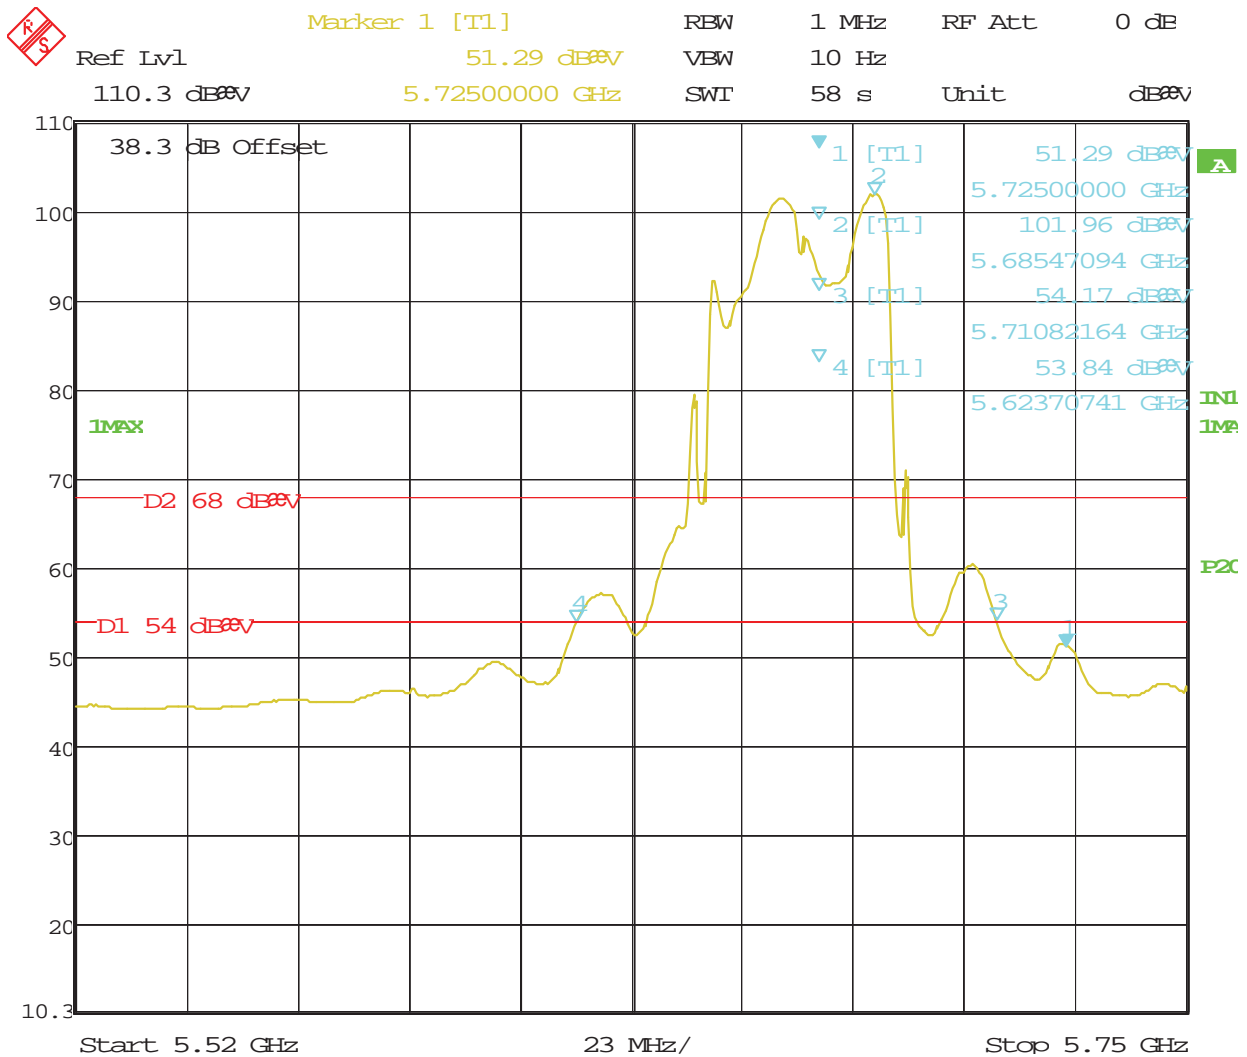


Date: 14.MAY.2013 15:56:25

**Figure 116:** Radiated Emission at the Edge for Channel 5670 MHz at 13.5Mbps – Horz (Ave.)



Date: 14.MAY.2013 16:00:01

**Figure 117:** Radiated Emission at the Edge for Channel 5670 MHz at 13.5Mbps – Vert (Peak)

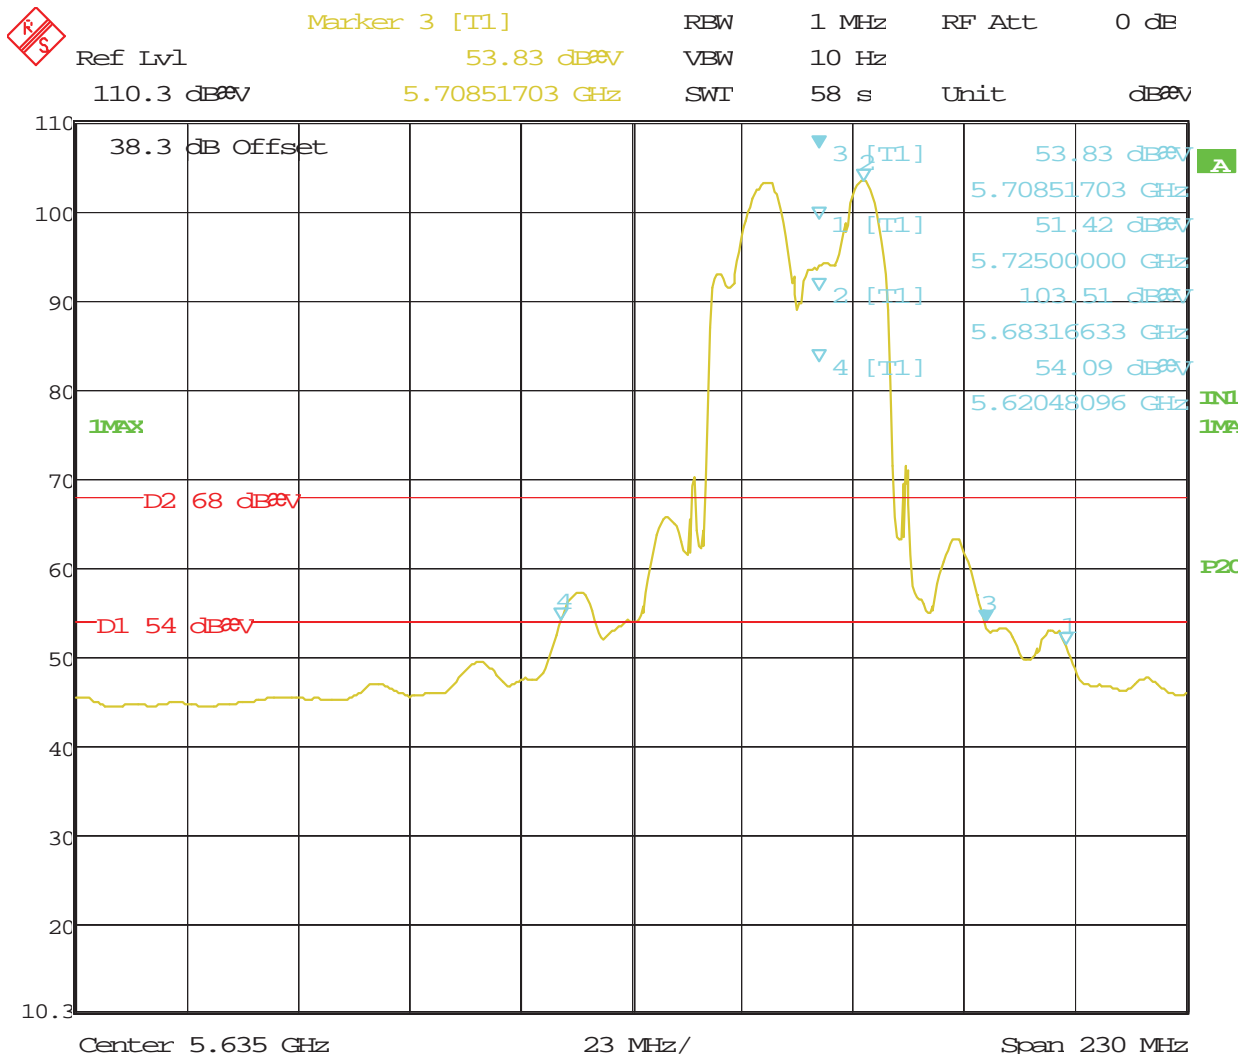

Date: 14.MAY.2013 16:01:36

**Figure 118:** Radiated Emission at the Edge for Channel 5670 MHz at 13.5Mbps – Vert (Ave.)




SOP 1 Radiated Emissions					Tracking # 31360999.004 Page 1 of 17				
<b>EUT Name</b>		Wireless Video Access Point			<b>Date</b>		May 13, 2013		
<b>EUT Model</b>		405			<b>Temp / Hum in</b>		23°C / 29%rh		
<b>EUT Serial</b>		09130M000104			<b>Temp / Hum out</b>		N/A		
<b>EUT Config.</b>		Y-Axis, 802.11n HT20 at 6.5Mbps/ chain			<b>Line AC / Freq</b>		120Vac/60Hz		
<b>Standard</b>		CFR47 Part 15 Subpart C			<b>RBW / VBW</b>		120 kHz/ 300 kHz		
<b>Dist/Ant Used</b>		3m / JB3			<b>Performed by</b>		Jeremy Luong		
Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (cm)	Table Pos (deg)	FIM QP (dBuV/m)	Total CF (dBuV)	E-Field QP (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)	Type
30 MHz to 1GHz Transmitted at 802.11n HT20, 5300 MHz 6.5Mbps/chain									
69.49	V	106	318	52.38	-18.16	34.22	40.00	-5.78	Spurious
123.25	V	103	332	52.51	-11.91	40.59	43.50	-2.91	Spurious
145.13	V	123	308	49.34	-12.89	36.45	43.50	-7.05	Spurious
279.85	H	108	174	48.49	-10.88	37.60	46.00	-8.40	Spurious
328.86	H	120	194	50.07	-9.94	40.13	46.00	-5.88	Spurious
574.99	V	99	264	48.80	-5.84	42.96	46.00	-3.04	Spurious
640.00	V	100	82	45.94	-4.75	41.19	46.00	-4.81	Spurious
924.99	V	103	12	40.75	-0.42	40.33	46.00	-5.67	Spurious
Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty									
Total CF= Amp Gain + Cable Loss + ANT Factor									
Combined Standard Uncertainty $u_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence									
Notes: Worst case was observed on Y-axis at 802.11n HT20, 5580 MHz 6.5Mbps. All other emissions passed Class B limit.									

**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 2 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 13, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 29%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11n HT20 at 6.5Mbps/ chain	<b>Line AC</b>	120Vac/60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	120 kHz/ 300 kHz
<b>Dist/Ant Used</b>	3m – JB3	<b>Performed by</b>	Jeremy Luong

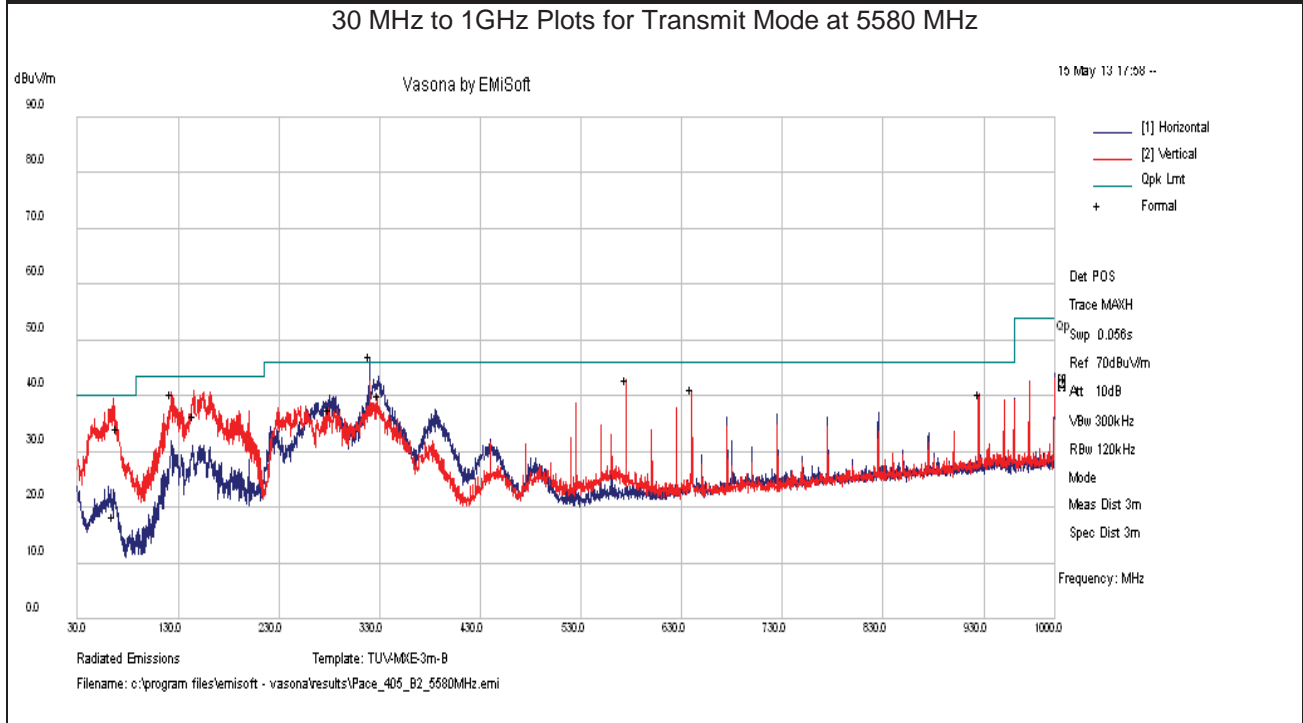

Notes: FCC Class B Limit. The emission 320MHz was not over the limit, however, it was not radio-related.

SOP 1 Radiated Emissions						Tracking # 31360999.004 Page 3 of 17				
EUT Name			Wireless Video Access Point			Date		May 13, 2013		
EUT Model			405			Temp / Hum in		23°C / 28%rh		
EUT Serial			09130M000104			Temp / Hum out		N/A		
EUT Config.			Y-Axis, 802.11 HT20 at 6.5Mbps			Line AC / Freq		120Vac/60Hz		
Standard			CFR47 Part 15 Subpart C			RBW / VBW		1 MHz/ 3 MHz		
Dist/Ant Used			3m / EMCO3115 / 1m - RA42-K-F-4B-C			Performed by		Jeremy Luong		
Transmitted Data at 5500 MHz @ 18 dBm										
Freq.	Raw	Total CF	Level	Det.	Pol	Hgt	Azt.	Limit	Margin	Type
MHz	dBuV/m	dB	dBuV/m		H/V	cm	deg.	dB	dB	
1279.71	55.12	-6.71	48.41	Ave	H	108	310	54.00	-5.59	Spurious
1288.53	26.36	-6.71	19.64	Ave	V	256	32	54.00	-34.36	Spurious
2428.38	28.12	-1.71	26.41	Ave	V	102	212	54.00	-27.59	Spurious
5092.14	41.04	3.72	44.76	Ave	H	200	272	54.00	-9.25	Spurious
5252.51	42.90	4.35	47.26	Ave	V	149	172	54.00	-6.75	Spurious
5307.09	33.33	4.44	37.77	Ave	H	190	288	54.00	-16.23	Spurious
5940.89	34.54	5.53	40.07	Ave	H	205	256	54.00	-13.93	Spurious
7333.31	38.30	8.71	47.02	Ave	V	206	296	54.00	-6.99	Spurious
10998.45	28.47	11.70	40.17	Ave	H	252	128	54.00	-13.83	Harmonic
14713.74	17.04	18.22	35.26	Ave	V	281	118	54.00	-18.74	Harmonic
21999.80	44.75	10.71	55.46	Ave	V	104	85	64.00	-8.54	Harmonic
21999.80	45.00	10.71	55.71	Ave	H	133	103	64.00	-8.29	Harmonic
27499.70	59.43	-12.36	47.07	Ave	V	97	102	64.00	-16.93	Harmonic
27499.90	60.90	-12.36	48.54	Ave	H	106	93	64.00	-15.46	Harmonic
32999.70	47.41	-4.57	42.84	Ave	H	113	92	64.00	-21.16	Harmonic
38499.70	47.02	0.19	47.21	Ave	V	112	22	64.00	-16.80	Harmonic
Transmitted Data at 5580 MHz @ 18 dBm										
Freq.	Raw	Total CF	Level	Det.	Pol	Hgt	Azt.	Limit	Margin	Type
MHz	dBuV/m	dB	dBuV/m		H/V	cm	deg.	dB	dB	
1131.77	26.87	-7.13	19.74	Ave	H	265	104	54.00	-34.26	Spurious
1279.54	56.87	-6.71	50.17	Ave	H	102	304	54.00	-3.84	Spurious
1347.00	26.12	-6.66	19.46	Ave	H	209	354	54.00	-34.54	Spurious
5096.02	42.08	3.73	45.81	Ave	V	167	284	54.00	-8.19	Spurious
5152.96	39.27	4.00	43.27	Ave	H	259	266	54.00	-10.73	Spurious
5905.89	36.87	5.39	42.26	Ave	V	135	234	54.00	-11.74	Spurious
6104.77	30.94	5.88	36.83	Ave	V	238	252	54.00	-17.17	Spurious
7439.87	37.34	8.78	46.12	Ave	V	262	268	54.00	-7.88	Spurious
11161.33	27.74	11.97	39.71	Ave	V	99	64	54.00	-14.30	Harmonic
22319.80	42.54	10.61	53.15	Ave	V	130	104	64.00	-10.85	Harmonic
22319.90	49.37	10.61	59.98	Ave	H	105	76	64.00	-4.02	Harmonic
27899.80	59.05	-12.76	46.29	Ave	H	122	92	64.00	-17.72	Harmonic
27899.80	59.73	-12.76	46.97	Ave	V	100	154	64.00	-17.04	Harmonic
33479.70	51.91	-4.08	47.83	Ave	H	106	24	64.00	-16.17	Harmonic
33479.80	51.32	-4.08	47.24	Ave	V	111	70	64.00	-16.76	Harmonic

Transmitted Data at 5700 MHz @ 18 dBm										
Freq.	Raw	Total CF	Level	Det.	Pol	Hgt	Azt.	Limit	Margin	Type
MHz	dBuV/m	dB	dBuV/m		H/V	cm	deg.	dB	dB	
1170.76	26.02	-6.85	19.18	Ave	V	292	192	54.00	-34.83	Spurious
1280.01	53.28	-6.71	46.58	Ave	H	101	304	54.00	-7.42	Spurious
5035.13	39.31	3.49	42.80	Ave	V	182	310	54.00	-11.20	Spurious
5866.34	42.03	5.29	47.33	Ave	V	168	244	54.00	-6.68	Spurious
5944.61	45.17	5.54	50.72	Ave	V	166	240	54.00	-3.28	Spurious
5981.49	35.34	5.69	41.02	Ave	V	102	290	54.00	-12.98	Spurious
7600.04	31.35	8.67	40.03	Ave	H	193	292	54.00	-13.97	Spurious
11396.41	30.29	12.38	42.67	Ave	H	237	104	54.00	-11.34	Harmonic
17960.59	17.63	25.35	42.98	Ave	V	164	226	54.00	-11.02	Harmonic
22799.80	43.26	10.48	53.74	Ave	H	139	115	64.00	-10.26	Harmonic
22799.80	47.77	10.48	58.25	Ave	V	157	91	64.00	-5.75	Harmonic
28499.70	59.32	-12.29	47.03	Ave	V	131	89	64.00	-16.97	Harmonic
28499.80	55.27	-12.29	42.98	Ave	H	142	50	64.00	-21.02	Harmonic
34199.70	51.09	-3.59	47.50	Ave	V	145	30	64.00	-16.50	Harmonic
39899.80	45.19	1.89	47.08	Ave	H	141	68	64.00	-16.92	Harmonic
Spec Margin = E-Field Average - Limit, E-Field Average = Field Meas.+ Total CF ± Uncertainty										
Total CF= Amp Gain + Cable Loss + ANT Factor										
Combined Standard Uncertainty $u_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence										
Notes: Worst case was observed on Y-axis, 6.5Mbps. The frequency range 26GHz to 40GHz was measured at 1 meter distance; limit was extrapolated.										

<b>SOP 1 Radiated Emissions</b>						Tracking # 31360999.004 Page 4 of 17					
<b>EUT Name</b>	Wireless Video Access Point					<b>Date</b>	May 13, 2013				
<b>EUT Model</b>	405					<b>Temp / Hum in</b>	23°C / 28%rh				
<b>EUT Serial</b>	09130M000104					<b>Temp / Hum out</b>	N/A				
<b>EUT Config.</b>	Y-Axis, 802.11 HT40 at 13.5Mbps					<b>Line AC / Freq</b>	120Vac/60Hz				
<b>Standard</b>	CFR47 Part 15 Subpart C					<b>RBW / VBW</b>	1 MHz/ 3 MHz				
<b>Dist/Ant Used</b>	3m / EMCO3115 / 1m - RA42-K-F-4B-C					<b>Performed by</b>	Jeremy Luong				

Transmitted Data at 5510 MHz @ 18 dBm

Freq.	Raw	Total CF	Level	Det.	Pol	Hgt	Azt.	Limit	Margin	Type
MHz	dBuV/m	dB	dBuV/m		H/V	cm	deg.	dB	dB	
1263.45	26.22	-6.70	19.52	Ave	H	217	178	54.00	-34.48	Spurious
1281.18	51.40	-6.71	44.69	Ave	H	104	316	54.00	-9.31	Spurious
5113.16	40.43	3.82	44.24	Ave	H	263	270	54.00	-9.76	Spurious
5300.84	36.22	4.42	40.65	Ave	H	271	262	54.00	-13.36	Spurious
5925.45	35.05	5.48	40.52	Ave	V	250	240	54.00	-13.48	Spurious
7346.64	36.09	8.74	44.84	Ave	V	209	264	54.00	-9.16	Spurious
11204.32	17.97	12.04	30.02	Ave	H	108	338	54.00	-23.98	Spurious
17961.59	17.64	25.36	43.00	Ave	H	175	322	54.00	-11.00	Harmonic
22039.90	43.78	10.86	54.64	Ave	V	129	103	64.00	-9.36	Harmonic
22039.90	48.87	10.86	59.73	Ave	H	140	83	64.00	-4.27	Harmonic
27549.70	60.06	-12.40	47.66	Ave	V	103	142	64.00	-16.34	Harmonic
27549.80	59.58	-12.40	47.18	Ave	H	135	129	64.00	-16.82	Harmonic
33059.80	50.80	-4.45	46.35	Ave	V	133	22	64.00	-17.65	Harmonic
33059.80	51.23	-4.45	46.78	Ave	H	129	126	64.00	-17.22	Harmonic

Transmitted Data at 5550 MHz @ 18 dBm

Freq.	Raw	Total CF	Level	Det.	Pol	Hgt	Azt.	Limit	Margin	Type
MHz	dBuV/m	dB	dBuV/m		H/V	cm	deg.	dB	dB	
1094.23	26.65	3.77	19.26	Ave	H	206	336	54.00	-34.74	Spurious
1279.69	56.59	25.26	49.89	Ave	H	105	320	54.00	-4.11	Spurious
1356.92	25.89	4.31	19.23	Ave	V	237	170	54.00	-34.77	Spurious
5103.71	40.99	-6.65	44.76	Ave	H	284	268	54.00	-9.24	Spurious
5235.20	36.96	5.48	41.27	Ave	V	137	176	54.00	-12.73	Spurious
5927.05	33.68	18.08	39.16	Ave	V	192	216	54.00	-14.84	Spurious
7399.95	33.86	-6.71	42.66	Ave	H	245	202	54.00	-11.34	Spurious
11100.29	24.00	-7.39	35.86	Ave	H	223	36	54.00	-18.14	Harmonic
14783.94	17.82	8.80	35.90	Ave	H	197	194	54.00	-18.10	Harmonic
17949.88	17.28	11.86	42.55	Ave	V	247	102	54.00	-11.45	Harmonic
22199.80	44.58	10.79	55.37	Ave	V	148	147	64.00	-8.63	Harmonic
22199.90	49.31	10.79	60.10	Ave	H	140	84	64.00	-3.90	Harmonic
27749.80	58.51	-12.58	45.93	Ave	H	111	137	64.00	-18.07	Harmonic
27749.80	58.87	-12.58	46.29	Ave	V	136	17	64.00	-17.71	Harmonic
33299.80	49.25	-4.12	45.13	Ave	H	143	26	64.00	-18.87	Harmonic
38849.70	46.09	0.09	46.18	Ave	H	111	40	64.00	-17.82	Harmonic

Transmitted Data at 5670 MHz @ 18 dBm

Freq.	Raw	Total CF	Level	Det.	Pol	Hgt	Azt.	Limit	Margin	Type
-------	-----	----------	-------	------	-----	-----	------	-------	--------	------

MHz	dBuV/m	dB	dBuV/m		H/V	cm	deg.	dB	dB	
1279.92	57.25	-6.71	50.55	Ave	H	105	312	54.00	-3.45	Spurious
5012.45	38.22	3.40	41.62	Ave	V	188	276	54.00	-12.38	Spurious
5297.87	32.23	4.42	36.65	Ave	H	106	278	54.00	-17.35	Spurious
5913.13	37.01	5.42	42.44	Ave	V	110	170	54.00	-11.56	Spurious
6082.70	33.49	5.85	39.33	Ave	V	100	166	54.00	-14.67	Spurious
7560.03	33.12	8.72	41.85	Ave	H	176	238	54.00	-12.16	Spurious
11339.30	30.22	12.29	42.51	Ave	H	169	42	54.00	-11.49	Spurious
14792.37	17.90	18.08	35.97	Ave	V	178	56	54.00	-18.03	Harmonic
17988.41	17.16	25.63	42.80	Ave	H	204	112	54.00	-11.20	Harmonic
22679.80	45.52	10.33	55.85	Ave	V	114	74	64.00	-8.15	Harmonic
22679.90	36.26	10.33	46.59	Ave	H	113	134	64.00	-17.41	Harmonic
28349.90	54.28	-12.46	41.82	Ave	V	126	91	64.00	-22.18	Harmonic
34019.70	51.32	-3.24	48.08	Ave	H	139	121	64.00	-15.92	Harmonic
34019.80	50.28	-3.24	47.04	Ave	V	134	61	64.00	-16.96	Harmonic



Spec Margin = E-Field Average - Limit, E-Field Average = Field Meas.+ Total CF ± Uncertainty  
 Total CF= Amp Gain + Cable Loss + ANT Factor  
 Combined Standard Uncertainty  $u_c(y) = \pm 3.2$  dB Expanded Uncertainty  $U = k u_c(y)$   $k = 2$  for 95% confidence  
 Notes: Worst case was observed on Y-axis, 13.5Mbps.  
 The frequency range 26GHz to 40GHz was measured at 1 meter distance; limit was extrapolated.

**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 6 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 8, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 30%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11n HT20 at 6.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5500 MHz

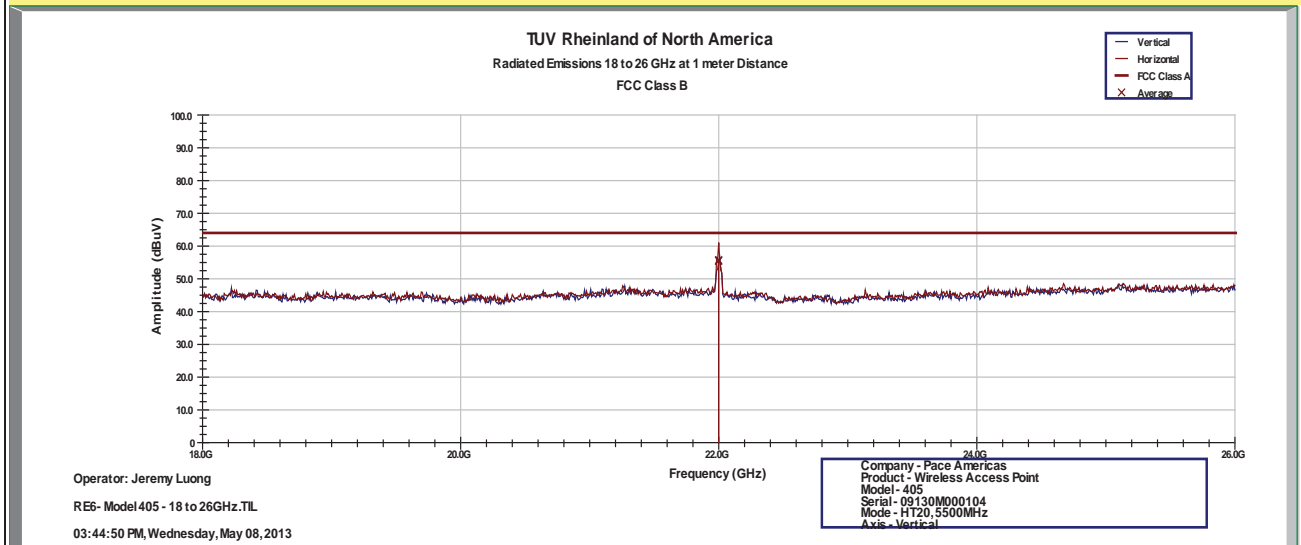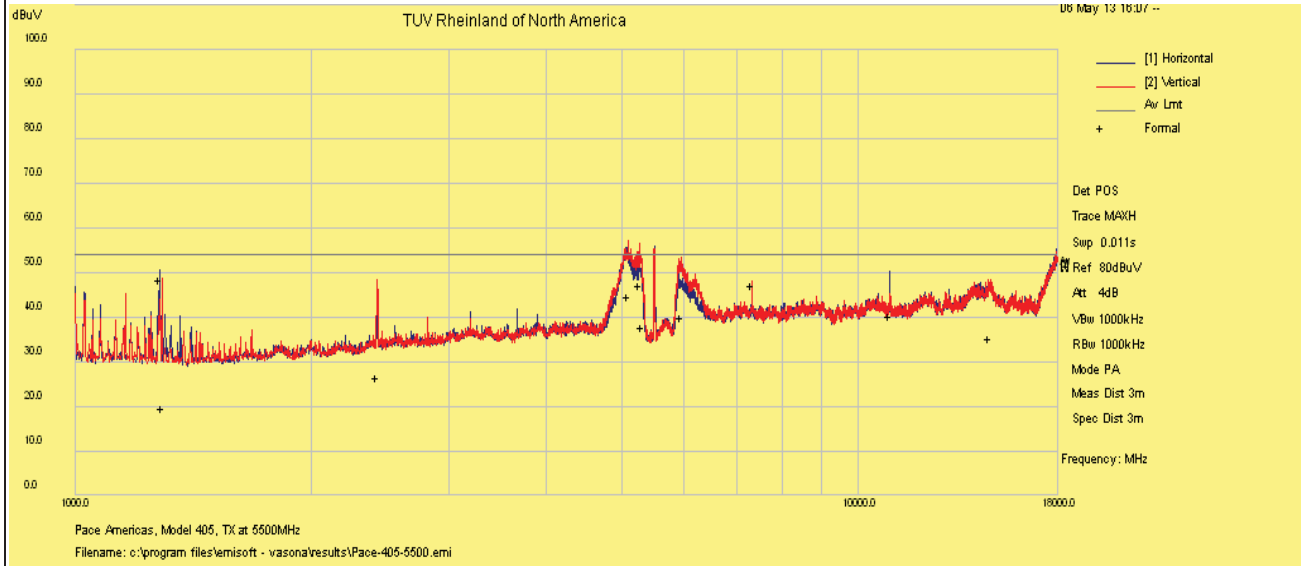


Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 7 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 13, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 28%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11n HT20 at 6.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5500 MHz

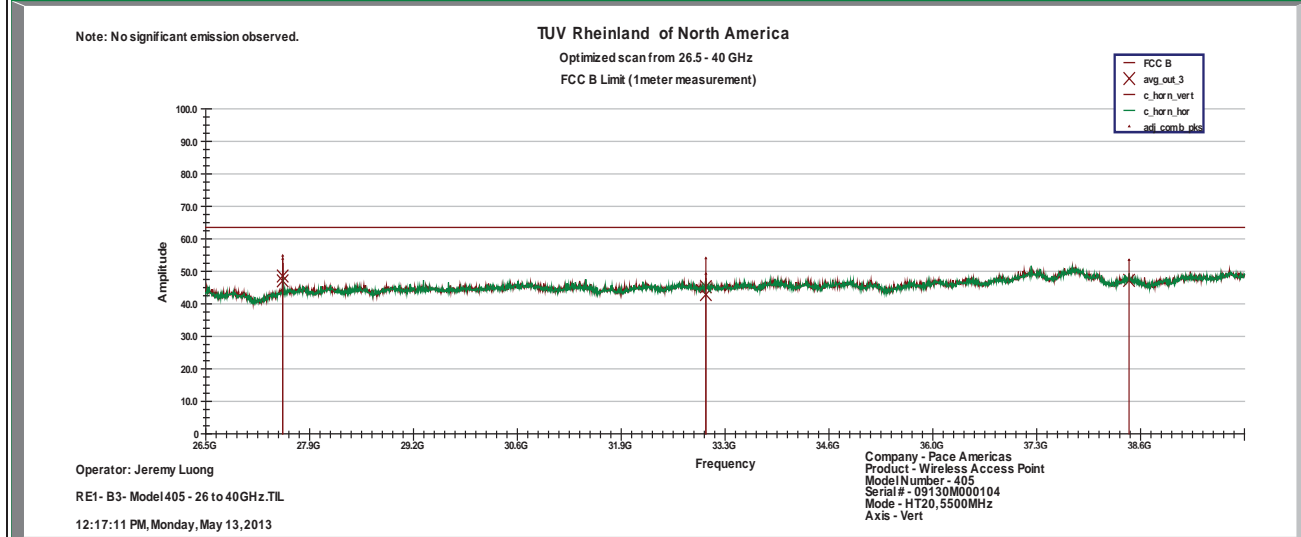

Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.





**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 8 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 8, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 30%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11n HT20 at 6.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5580 MHz

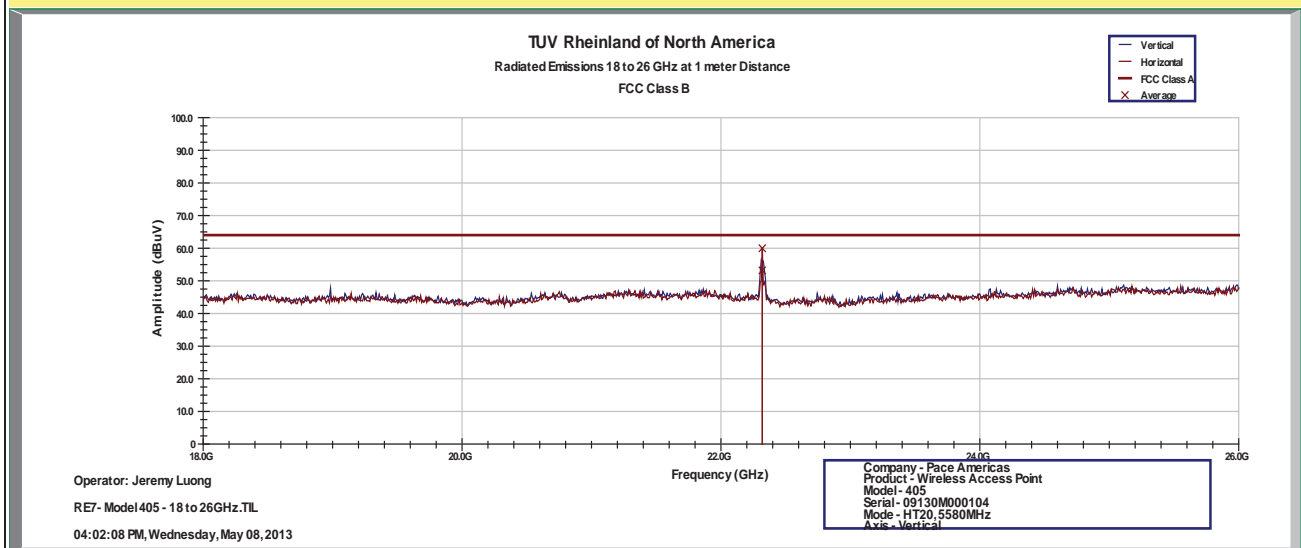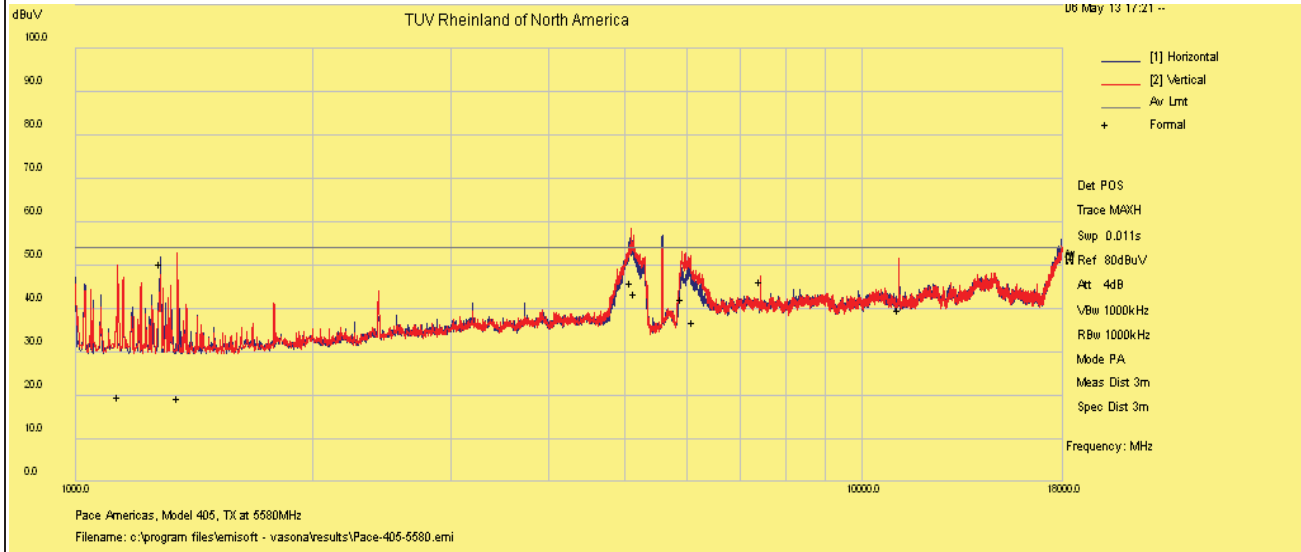


Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 9 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 13, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 28%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11n HT20 at 6.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5580 MHz

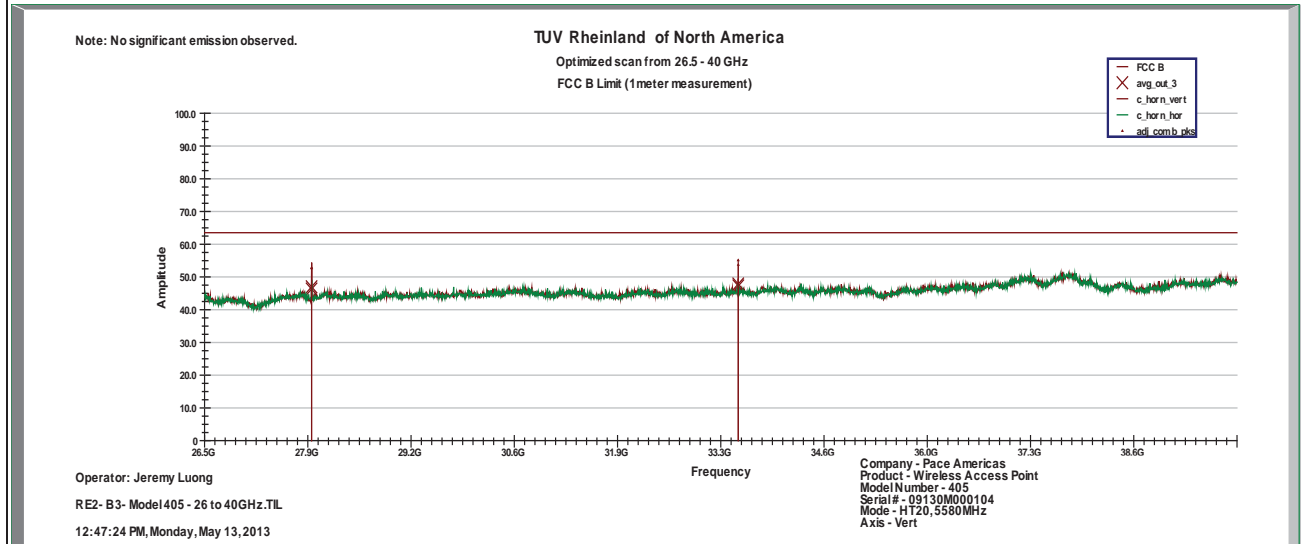



Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 10 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 8, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 23%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11n HT20 at 6.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5700 MHz

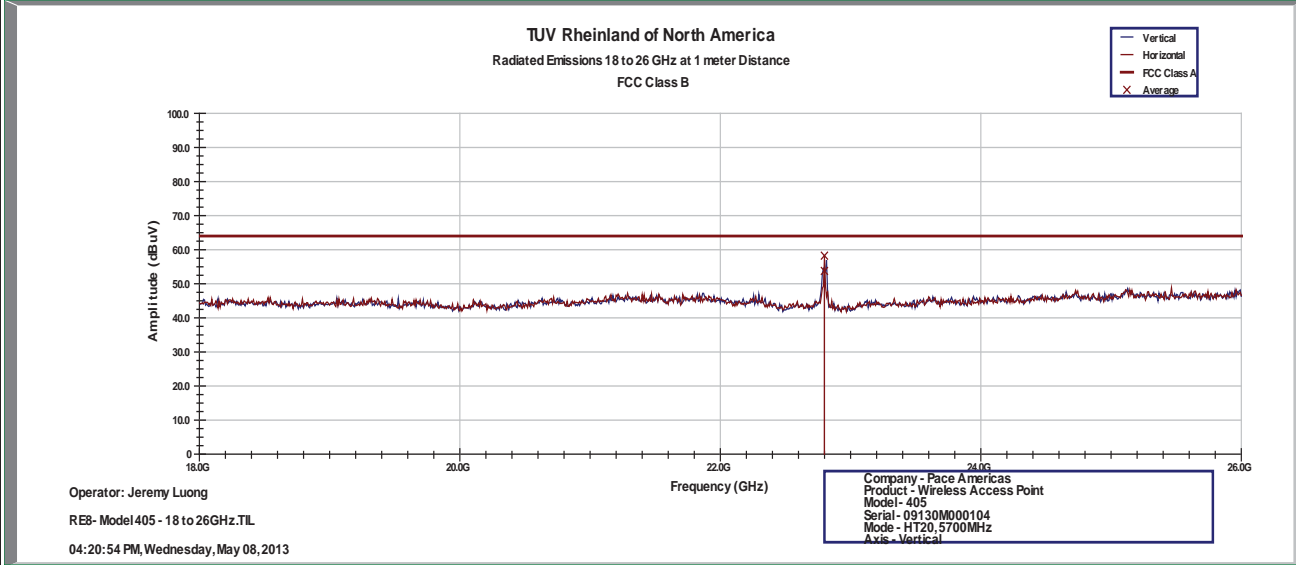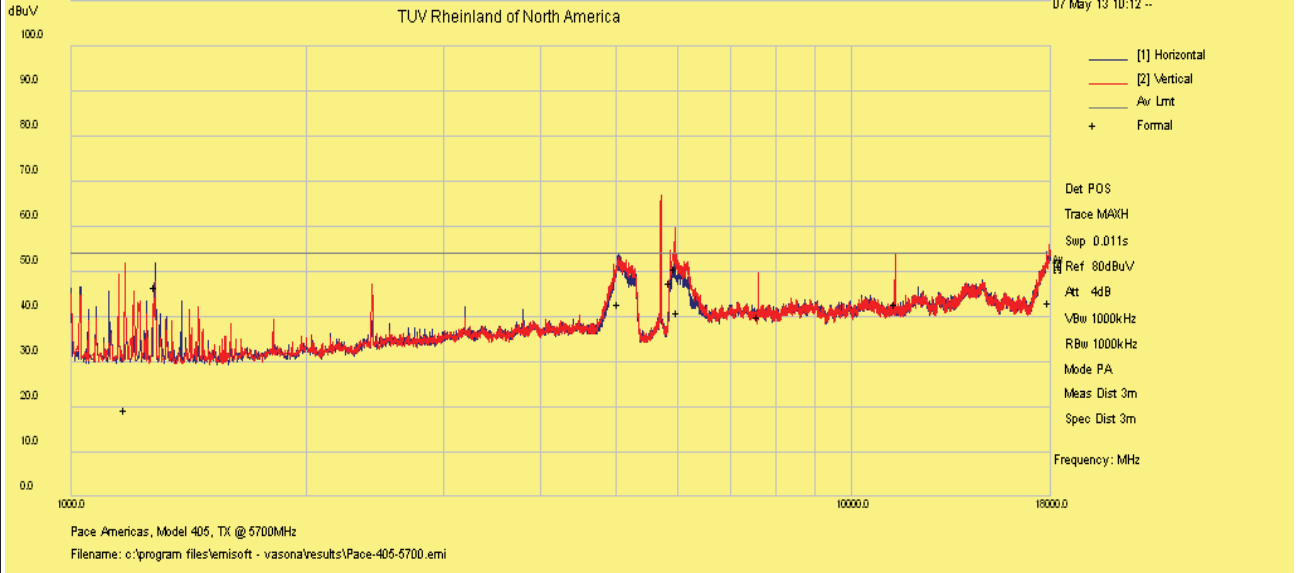


Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 11 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 13, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 28%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11n HT20 at 6.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5700 MHz

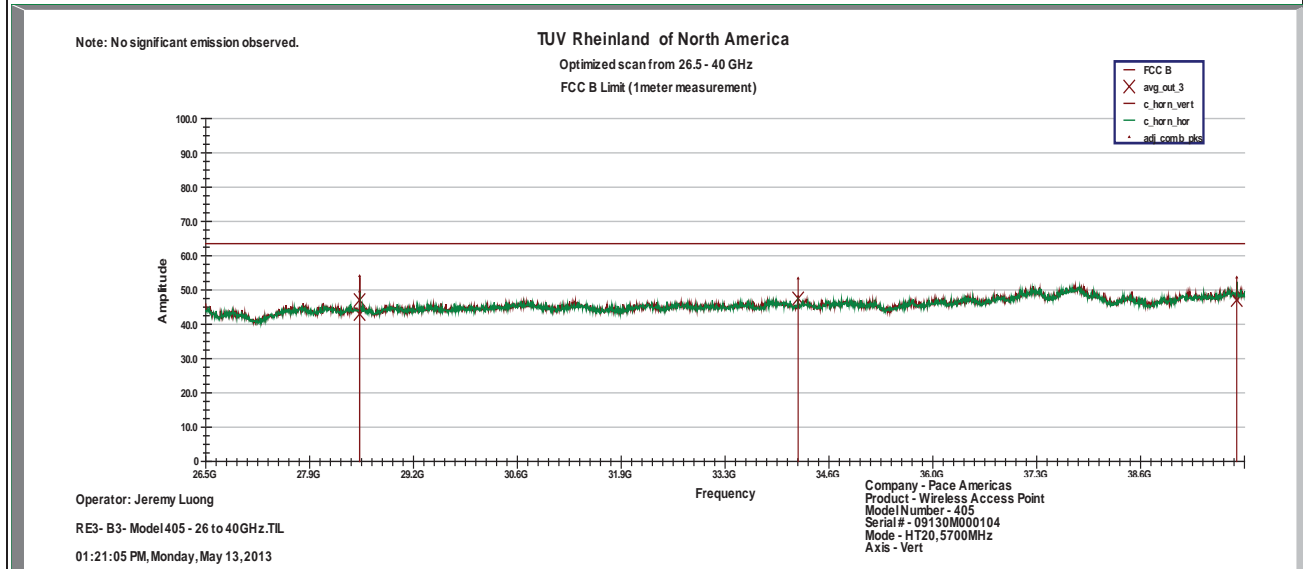



Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 12 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 8, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 30%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11 HT40 at 13.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5510 MHz

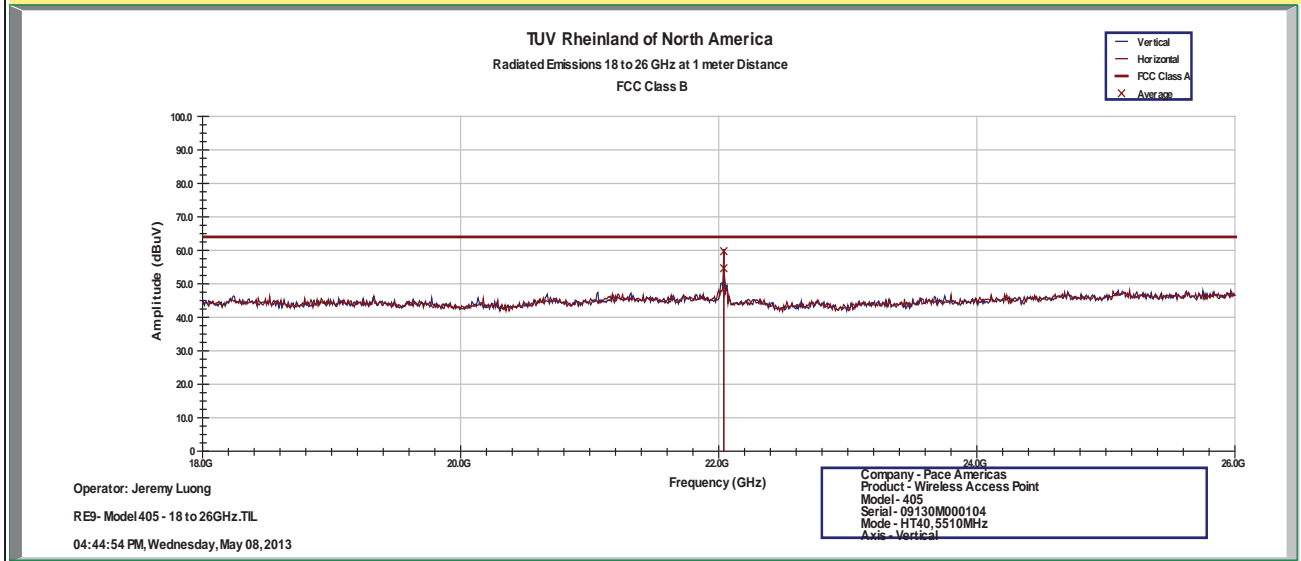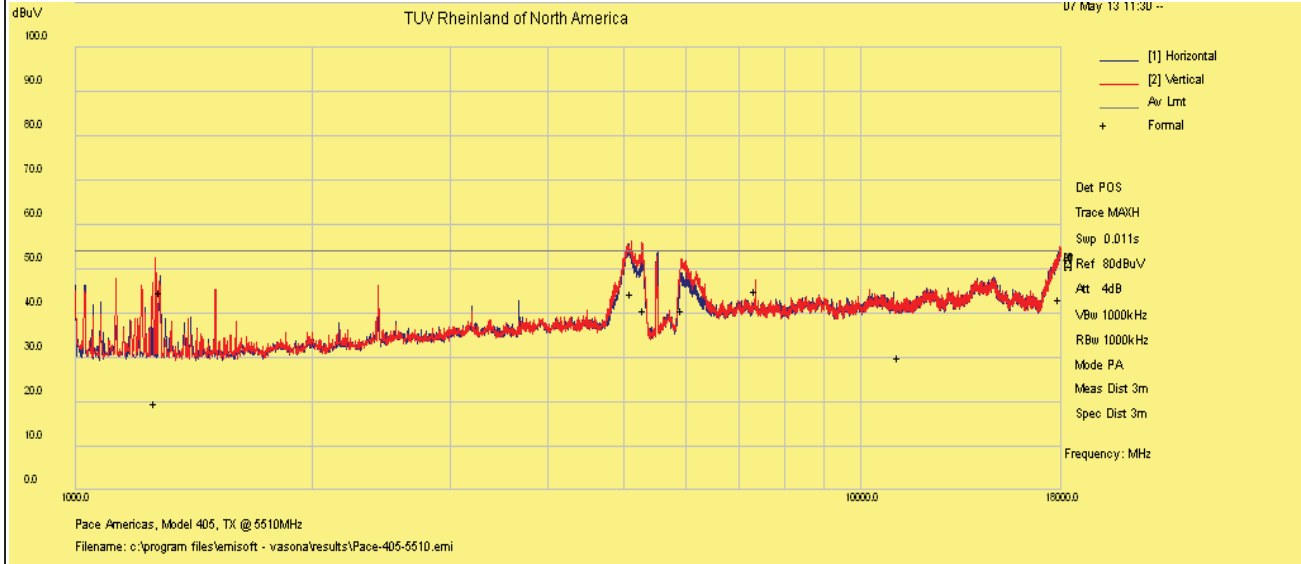


Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 13 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 13, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 28%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11 HT40 at 13.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5510 MHz

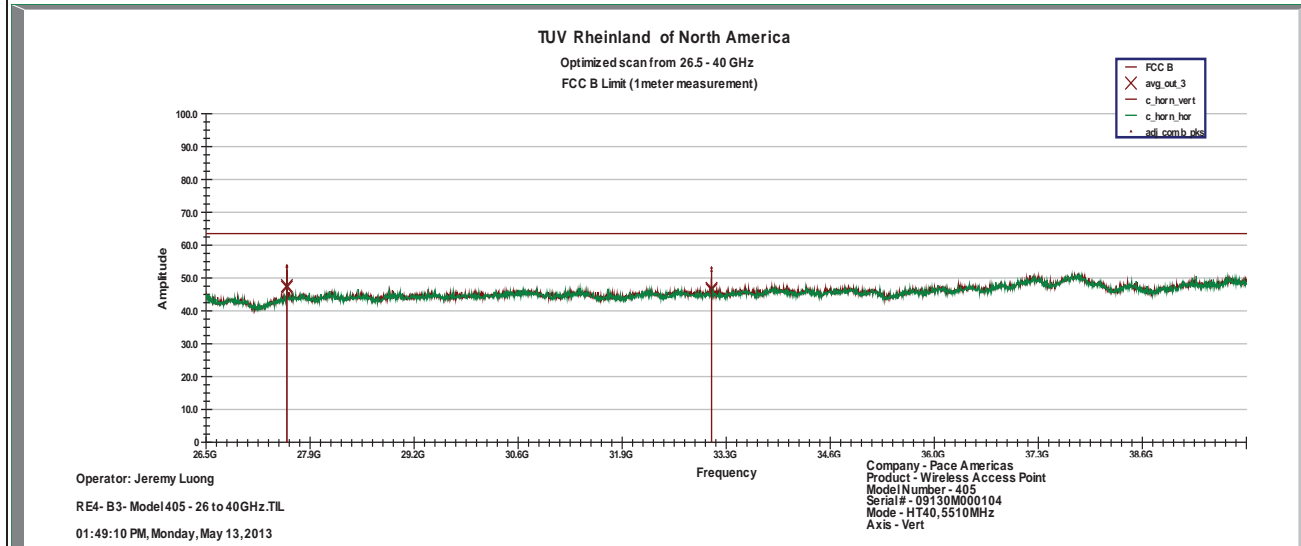



Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 14 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 8, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 30%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11 HT40 at 13.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5550 MHz

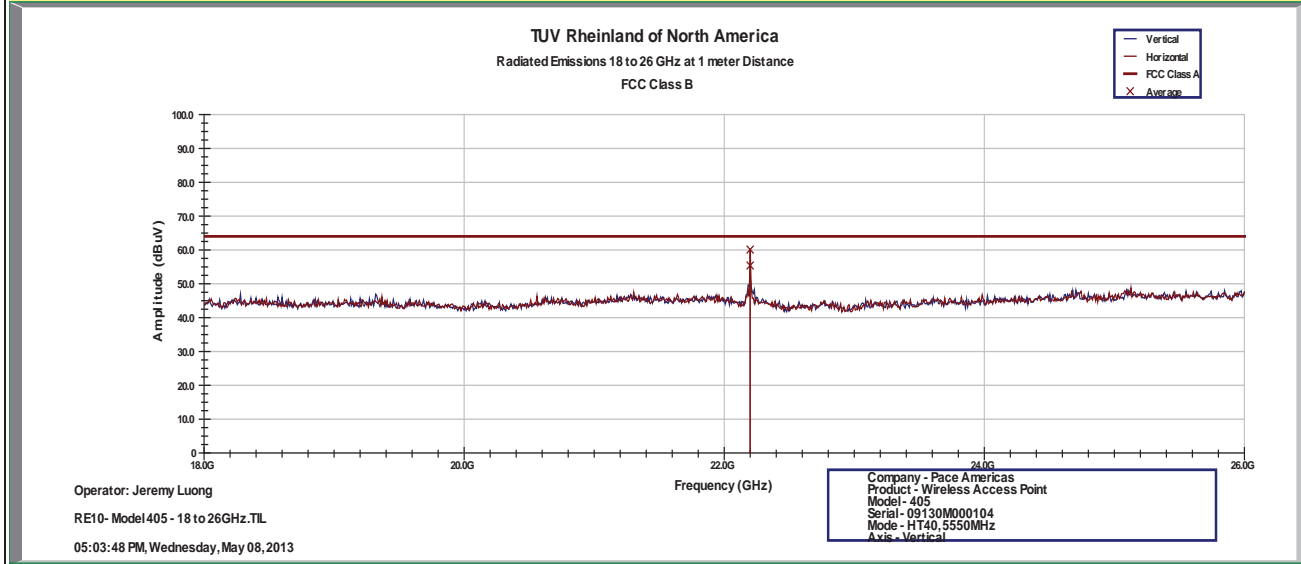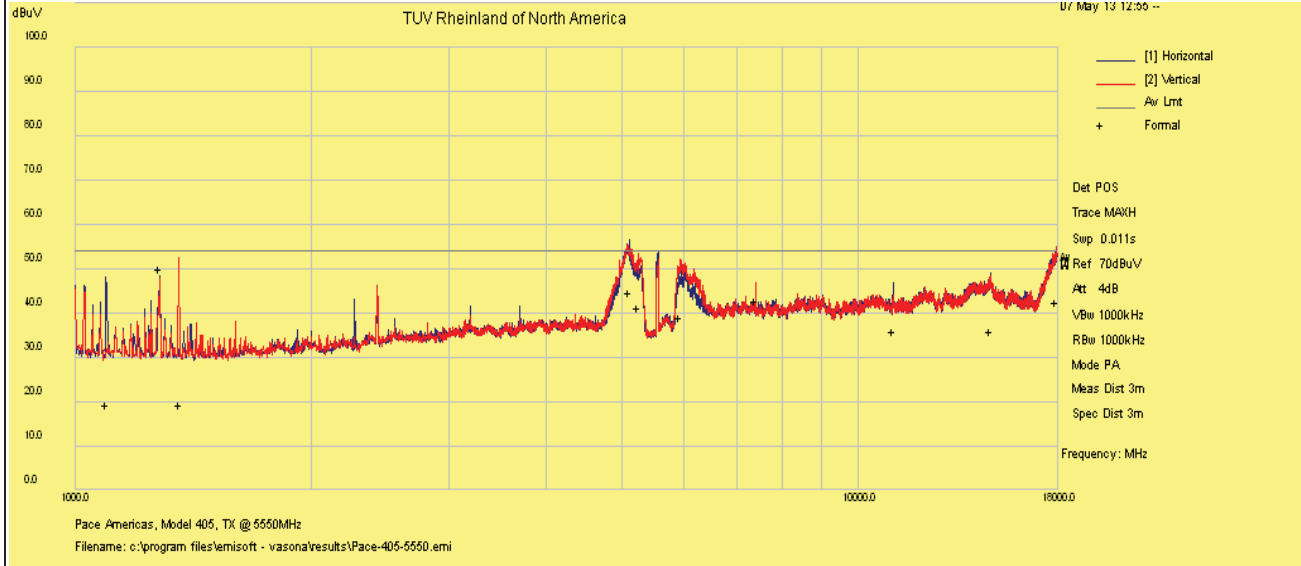


Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.  
 1GHz – 25 GHz Setting: RBW = 1 MHz/ VBW = 3MHz

**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 15 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 13, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 28%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11 HT40 at 13.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5550 MHz

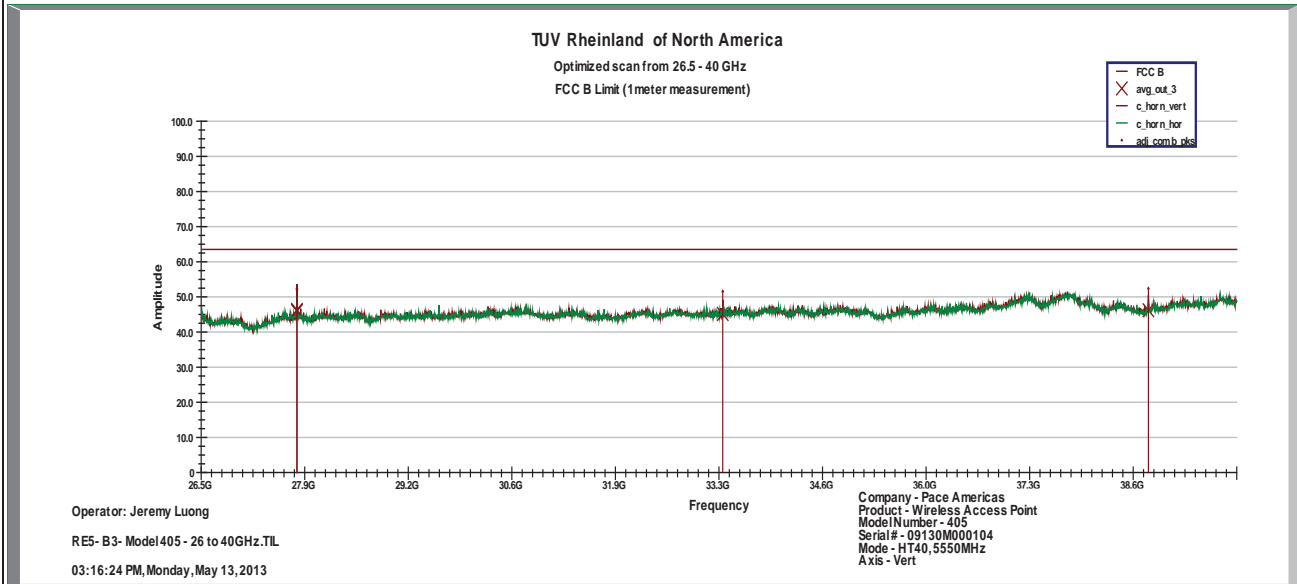

Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.





**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 16 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 8, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 30%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11 HT40 at 13.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5670 MHz

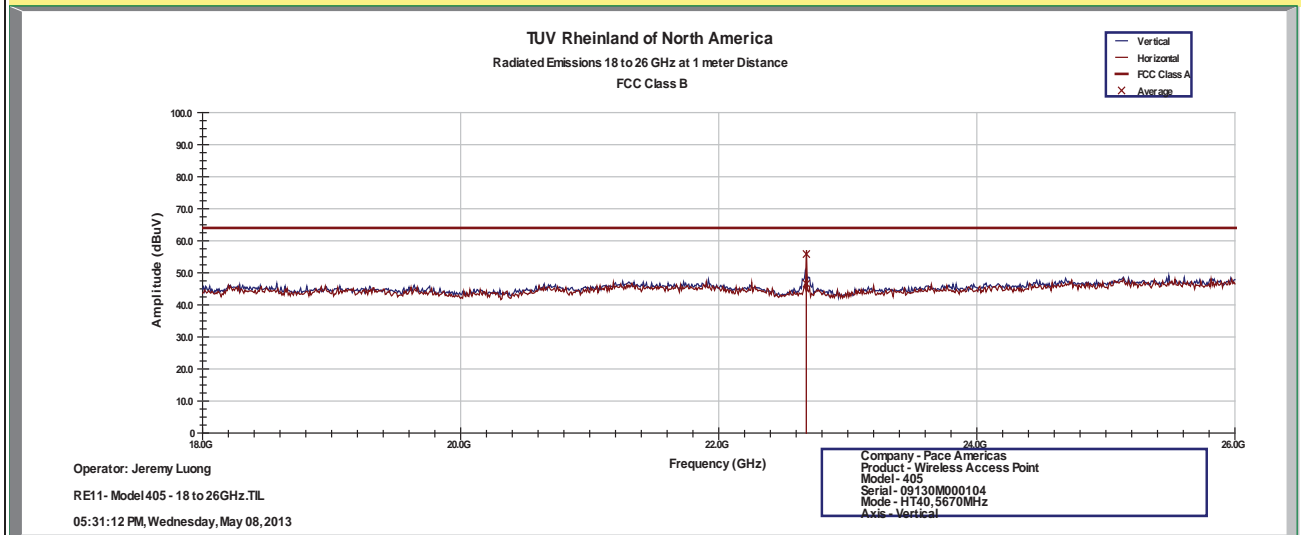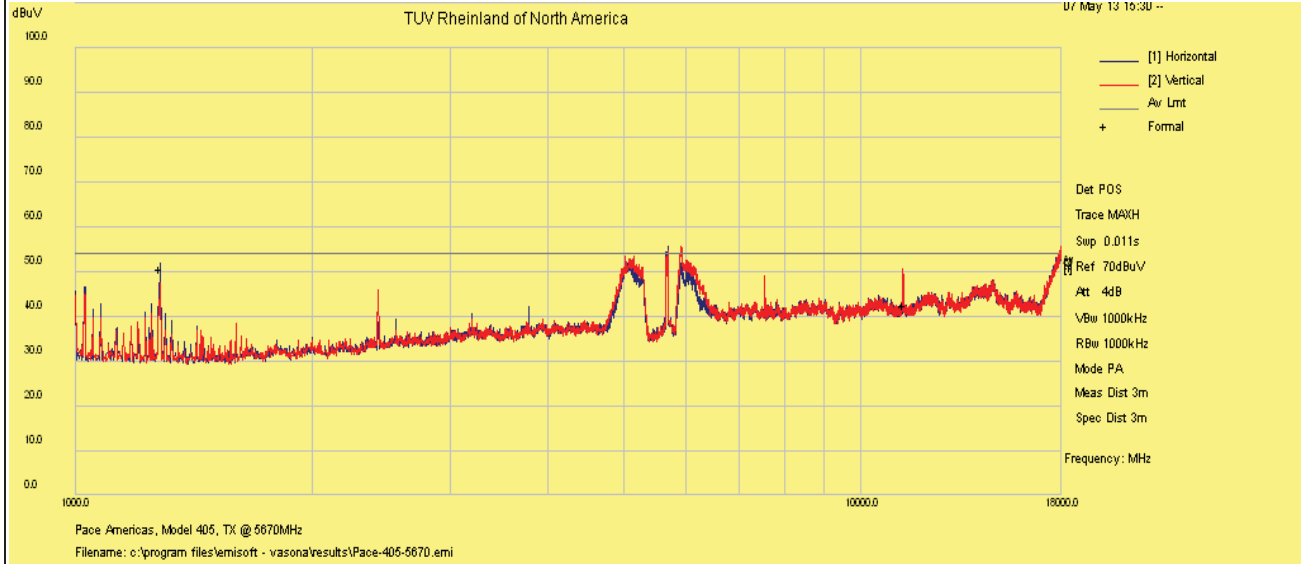


Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.  
 1GHz – 25 GHz Setting: RBW = 1 MHz/ VBW = 3MHz

**SOP 1 Radiated Emissions**

Tracking # 31360999.004 Page 17 of 17

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 13, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 28%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Y-Axis, 802.11 HT40 at 13.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 5670 MHz

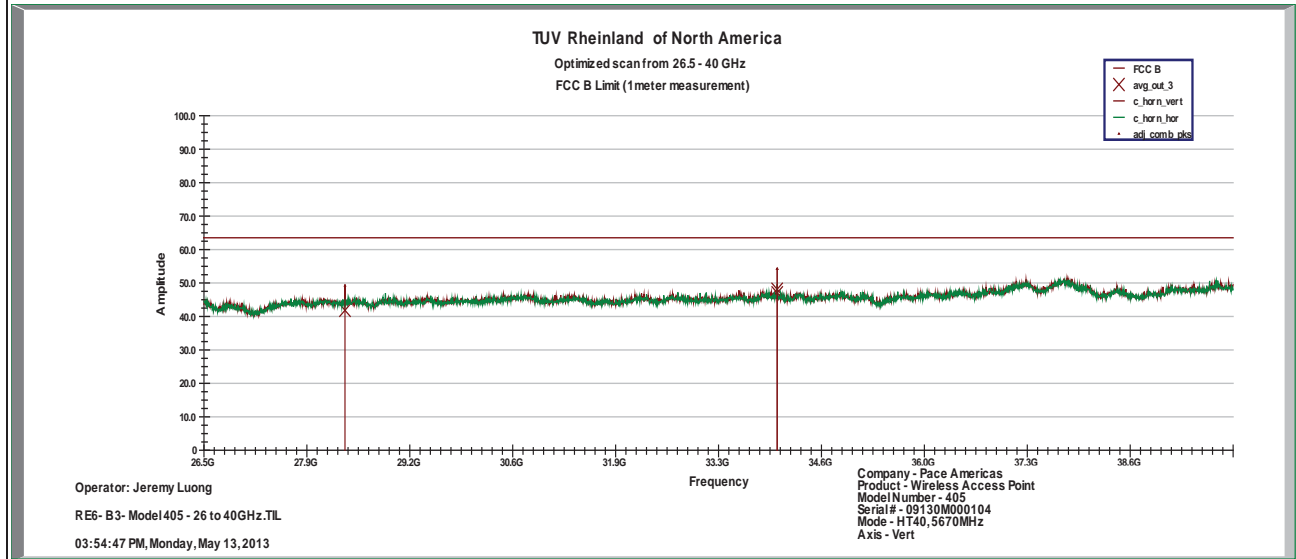

Notes: Limit was extrapolated to 1m distance for 18GHz – 40 GHz range.

**4.5.4 Sample Calculation**

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: FIM = Field Intensity Meter (dBμV)  
 AMP = Amplifier Gain (dB)  
 CBL = Cable Loss (dB)  
 ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V} / \text{m}}{20}}$$

## 4.6 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.4: 2010. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207: 2012 and RSS 210: 2010.

### 4.6.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50µH / 50Ω LISNs.

Testing is performed in Lab 5. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

#### 4.6.1.1 Deviations

There were no deviations from this test methodology.

### 4.6.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 8:** AC Conducted Emissions – Test Results

<b>Test Conditions:</b> Conducted Measurement at Normal Conditions only		
<b>Antenna Type:</b> Attached		<b>Power Level:</b> See Test Plan
<b>AC Power:</b> 120 Vac/60 Hz		<b>Configuration:</b> Tabletop
<b>Ambient Temperature:</b> 23° C		<b>Relative Humidity:</b> 31% RH
Configuration	Frequency Range	Test Result
Line 1 (Hot)	0.15 to 30 MHz	Pass
Line 2 (Neutral)	0.15 to 30 MHz	Pass


SOP 2 Conducted Emissions						Tracking # 31360999.004 Page 1 of 4			
<b>EUT Name</b>		Wireless Video Access Point				<b>Date</b>		May 16, 2013	
<b>EUT Model</b>		405				<b>Temp / Hum in</b>		23°C / 32%rh	
<b>EUT Serial</b>		09130M000104				<b>Temp / Hum out</b>		N/A	
<b>EUT Config.</b>		Attached Antenna				<b>Line AC / Freq</b>		120Vac/60Hz	
<b>Standard</b>		CFR47 Part 15.207				<b>RBW / VBW</b>		9kHz / 30 kHz	
<b>Lab/LISN</b>		Lab #2 /Com-Power, Line 1				<b>Performed by</b>		Jeremy Luong	
Frequency	Raw	Cable Loss	Ins. Loss	Level	Detector	Line	Limit	Margin	Result
MHz	dBuV	dB	dB	dBuV			dBuV	dB	
0.158	50.20	0.02	-0.10	50.12	QP	Live	65.57	-15.45	Pass
0.158	24.13	0.02	-0.10	24.05	Ave	Live	55.57	-31.52	Pass
0.175	56.18	0.02	-0.09	56.11	QP	Live	64.73	-8.62	Pass
0.175	40.83	0.02	-0.09	40.76	Ave	Live	54.73	-13.97	Pass
0.225	44.79	0.02	-0.07	44.74	QP	Live	62.63	-17.89	Pass
0.225	24.08	0.02	-0.07	24.03	Ave	Live	52.63	-28.60	Pass
0.361	39.52	0.03	-0.05	39.50	QP	Live	58.70	-19.20	Pass
0.361	27.85	0.03	-0.05	27.83	Ave	Live	48.70	-20.87	Pass
0.470	44.67	0.03	-0.05	44.65	QP	Live	56.51	-11.86	Pass
0.470	37.34	0.03	-0.05	37.32	Ave	Live	46.51	-9.19	Pass
0.540	39.81	0.03	-0.04	39.80	QP	Live	56.00	-16.20	Pass
0.540	29.82	0.03	-0.04	29.81	Ave	Live	46.00	-16.19	Pass
2.746	36.76	0.08	-0.04	36.80	QP	Live	56.00	-19.20	Pass
2.746	25.65	0.08	-0.04	25.69	Ave	Live	46.00	-20.31	Pass
3.532	34.92	0.09	-0.03	34.98	QP	Live	56.00	-21.02	Pass
3.532	22.61	0.09	-0.03	22.67	Ave	Live	46.00	-23.33	Pass
Spec Margin = QP./Ave. - Limit, ± Uncertainty									
Combined Standard Uncertainty $u_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence									
Notes: EUT was setup as table top equipment and transmitted at 5580 MHz in HT20 at 6.5Mbps									

**SOP 2** Conducted Emissions

Tracking # 31360999.004 Page 2 of 4

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 16, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 32%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Attached Antenna	<b>Line AC</b>	120Vac/60Hz
<b>Standard</b>	CFR47 Part 15.207	<b>RBW / VBW</b>	9kHz / 30 kHz
<b>Lab/LISN</b>	Lab #2 /Com-Power, Line 1	<b>Performed by</b>	Jeremy Luong

150 kHz to 30 MHz Plot for Line 1 (Hot)

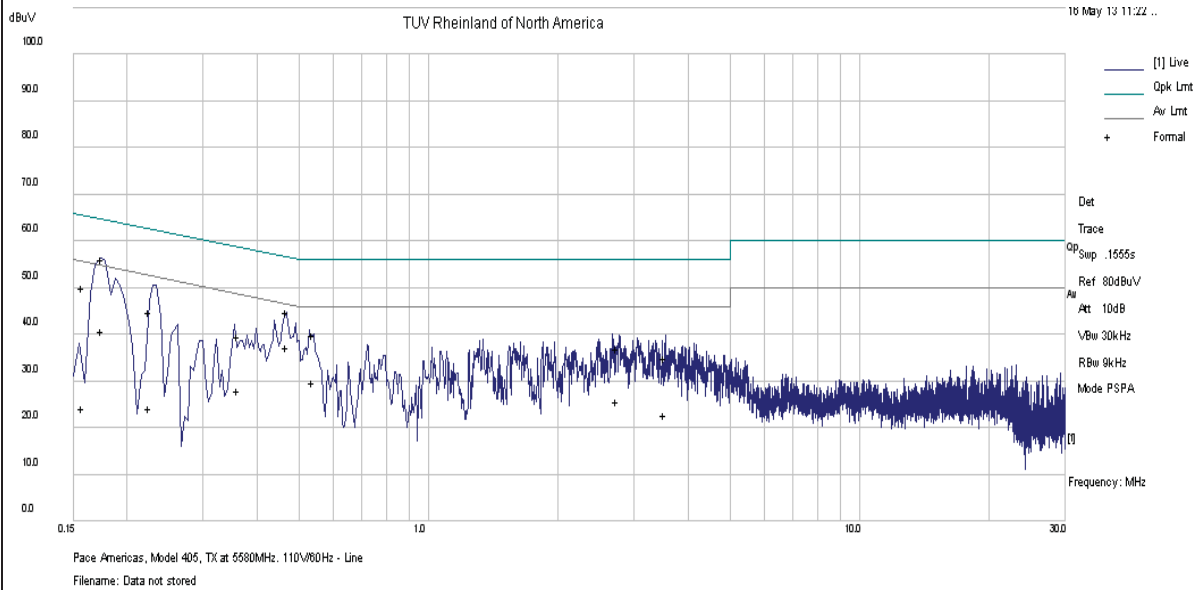

Notes: Meet FCC Class B limit.


SOP 2 Conducted Emissions						Tracking # 31360999.004 Page 3 of 4			
<b>EUT Name</b>		Wireless Video Access Point				<b>Date</b>		May 16, 2013	
<b>EUT Model</b>		405				<b>Temp / Hum in</b>		23°C / 32%rh	
<b>EUT Serial</b>		09130M000104				<b>Temp / Hum out</b>		N/A	
<b>EUT Config.</b>		Attached Antenna				<b>Line AC / Freq</b>		120Vac/60Hz	
<b>Standard</b>		CFR47 Part 15.207				<b>RBW / VBW</b>		9kHz / 30 kHz	
<b>Lab/LISN</b>		Lab #2 /Com-Power, Line 2				<b>Performed by</b>		Jeremy Luong	
Frequency	Raw	Cable Loss	Ins. Loss	Level	Detector	Line	Limit	Margin	Result
MHz	dBuV	dB	dB	dBuV			dBuV	dB	
0.156	50.46	0.02	-0.10	50.38	QP	Neutral	65.69	-15.31	Pass
0.156	20.75	0.02	-0.10	20.67	Ave	Neutral	55.69	-35.02	Pass
0.175	56.60	0.02	-0.09	56.53	QP	Neutral	64.72	-8.19	Pass
0.175	41.85	0.02	-0.09	41.78	Ave	Neutral	54.72	-12.94	Pass
0.212	42.70	0.02	-0.07	42.65	QP	Neutral	63.11	-20.46	Pass
0.212	17.62	0.02	-0.07	17.57	Ave	Neutral	53.11	-35.54	Pass
0.396	38.36	0.03	-0.05	38.34	QP	Neutral	57.94	-19.60	Pass
0.396	23.37	0.03	-0.05	23.35	Ave	Neutral	47.94	-24.59	Pass
0.469	45.70	0.03	-0.05	45.68	QP	Neutral	56.52	-10.84	Pass
0.469	37.97	0.03	-0.05	37.95	Ave	Neutral	46.52	-8.57	Pass
0.536	39.48	0.03	-0.04	39.47	QP	Neutral	56.00	-16.53	Pass
0.536	31.15	0.03	-0.04	31.14	Ave	Neutral	46.00	-14.86	Pass
0.729	38.18	0.04	-0.04	38.18	QP	Neutral	56.00	-17.82	Pass
0.729	24.57	0.04	-0.04	24.57	Ave	Neutral	46.00	-21.43	Pass
2.456	36.90	0.07	-0.04	36.93	QP	Neutral	56.00	-19.07	Pass
2.456	25.86	0.07	-0.04	25.89	Ave	Neutral	46.00	-20.11	Pass
3.051	35.69	0.08	-0.04	35.73	QP	Neutral	56.00	-20.27	Pass
3.051	24.27	0.08	-0.04	24.31	Ave	Neutral	46.00	-21.69	Pass
Spec Margin = QP./Ave. - Limit, ± Uncertainty									
Combined Standard Uncertainty $u_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence									
Notes: EUT was setup as table top equipment and transmitted at 5580 MHz in HT20 at 6.5Mbps									

**SOP 2** Conducted Emissions

Tracking # 31360999.004 Page 4 of 4

<b>EUT Name</b>	Wireless Video Access Point	<b>Date</b>	May 16, 2013
<b>EUT Model</b>	405	<b>Temp / Hum in</b>	23°C / 32%rh
<b>EUT Serial</b>	09130M000104	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	Attached Antenna	<b>Line AC</b>	120Vac/60Hz
<b>Standard</b>	CFR47 Part 15.107	<b>RBW / VBW</b>	9kHz / 30 kHz
<b>Lab/LISN</b>	Lab #2 /Com-Power, Line 2	<b>Performed by</b>	Jeremy Luong

150 kHz to 30 MHz Plot for Line 2 (Neutral)

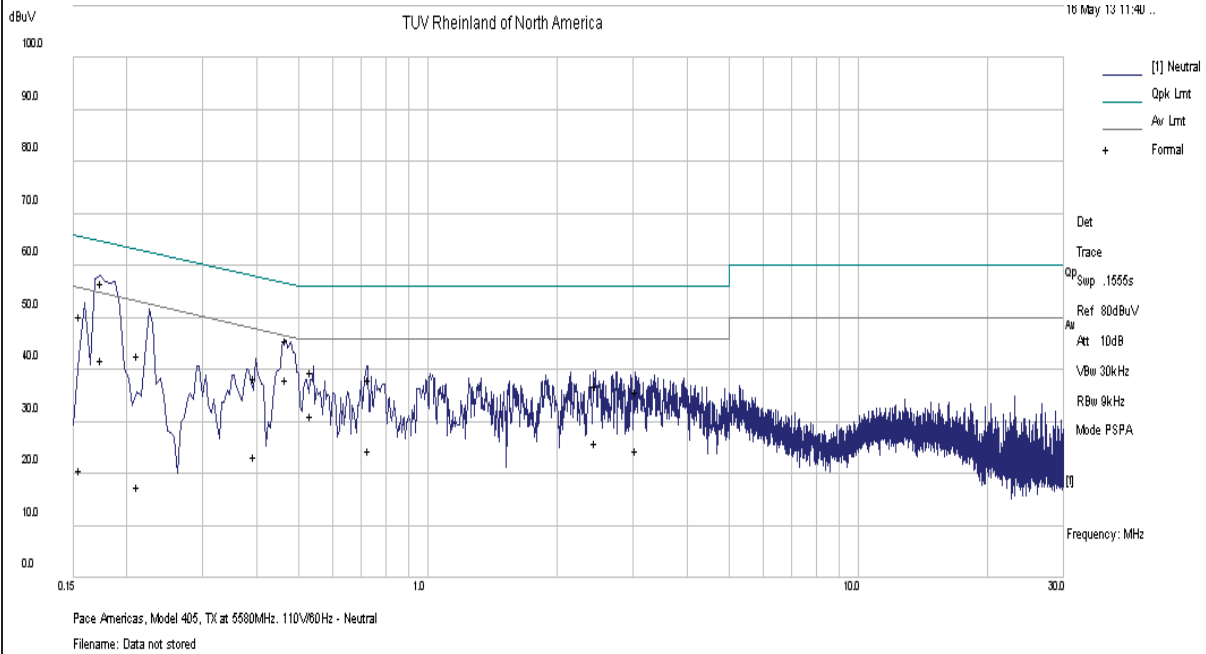

Note: Meet FCC Class B Limit.

---

## 4.7 Frequency Stability

In accordance with 47 CFR Part 15.407(g) the frequency stability of U-NII devices must be such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual. The Manufacturer calls out operating temperature ranges of +0° to +40° C

### 4.7.1 Test Methodology

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions. This test performs according to ANSI C63.10-2009 Section 6.8

### 4.7.2 Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signal should have  $\pm 20$ ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

Worst case:

5.200 GHz -  $\pm 20$ ppm/104 kHz

$\pm 20$ ppm at 5 GHz translates to a maximum frequency shift of  $\pm 103$  kHz. As the edge of the channels are at least one MHz from either of the band edges,  $\pm 103$  kHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the radio.



### 4.7.3 Limit

CFR47 Part 407(g) - Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 4.7.4 Test results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s) since the maximum frequency drift was 6.84 ppm.

**Table 9:** Frequency Stability – Test Results

Temperature	Time	-6 dB Lower Edge (MHz)	+6 dB Upper Edge (MHz)	Center Frequency (MHz)	PPM
40°C	Start	5198.93220	5201.01530	5199.97375	5.05
	2 Min.	5198.94570	5200.98520	5199.96545	6.64
	5 Min	5198.88210	5201.04680	5199.96445	6.84
	10 min	5198.88210	5201.04930	5199.96570	6.60
30°C	Start	5198.93220	5201.04080	5199.98650	2.60
	2 Min.	5198.93070	5201.01830	5199.97450	4.90
	5 Min	5198.93220	5201.01080	5199.97150	5.48
	10 min	5198.93220	5201.00780	5199.97000	5.77
20°C	Start	5198.93970	5201.06180	5200.00075	0.14
	2 Min.	5198.93670	5201.03780	5199.98725	2.45
	5 Min	5198.93520	5201.03180	5199.98350	3.17
	10 min	5198.93520	5201.02880	5199.98200	3.46
10°C	Start	5198.94420	5201.08130	5200.01275	2.45
	2 Min.	5198.93820	5201.06030	5199.99925	0.14
	5 Min	5198.93670	5201.05580	5199.99625	0.72
	10 min	5198.93670	5201.05430	5199.99550	0.87
0°C	Start	5198.94420	5201.09030	5200.01725	3.32
	2 Min.	5198.94420	5201.08130	5200.01275	2.45
	5 Min	5198.94420	5201.07680	5200.01050	2.02
	10 min	5198.94420	5201.07680	5200.01050	2.02

**Note:** 1. All frequency drifts were less than  $\pm 20$  ppm. The worst frequency drift was 6.84ppm/35.55kHz.  
 2. Channel 5200MHz was selected to frequency stability.

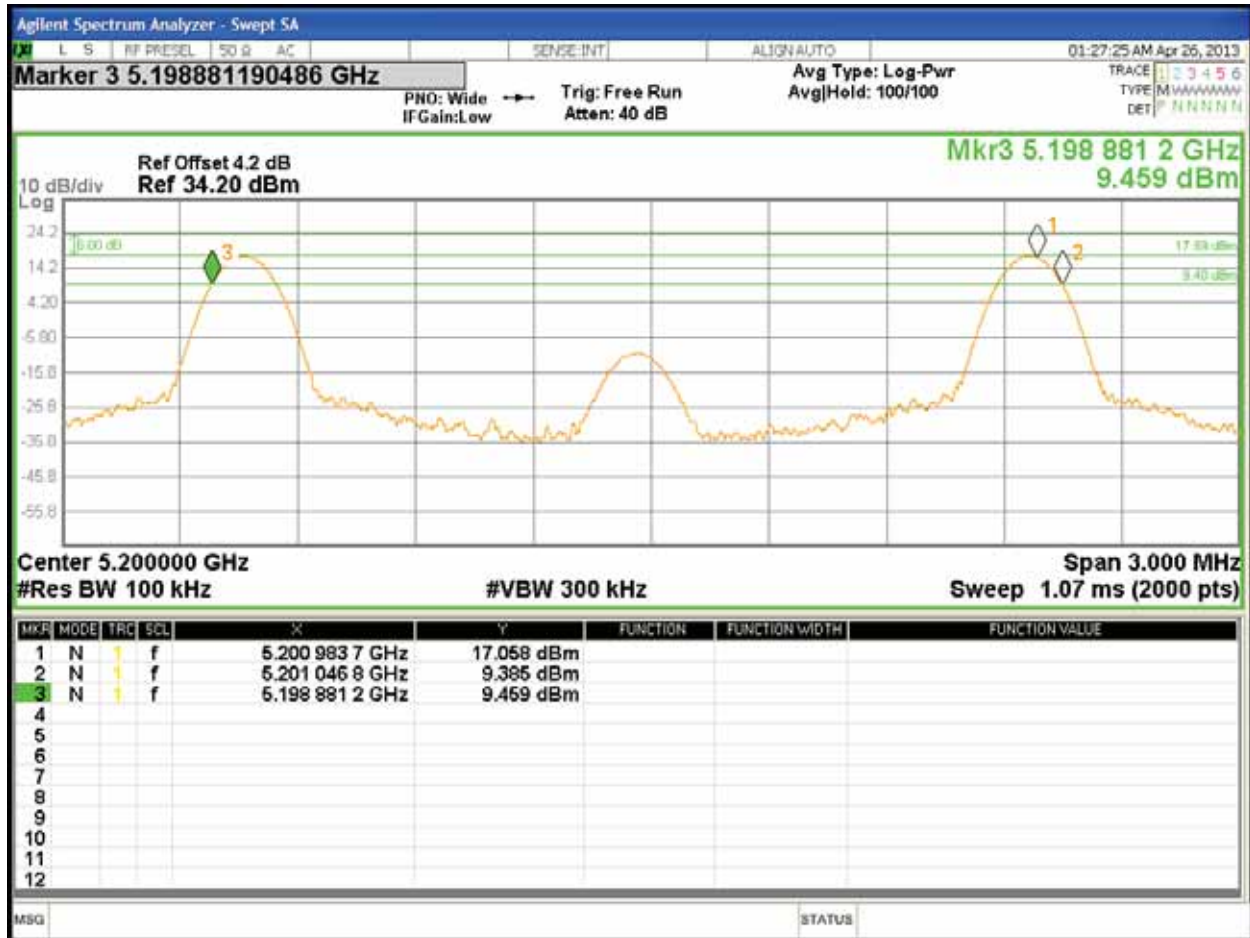


Figure 119: Frequency Stability – Worst Case

## 4.8 Voltage Variation

In accordance with 47 CFR Part 15.31 (e) intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 4.8.1 Test Methodology

The ac supply voltage was varied between 85% and 115% of the nominal rated supply voltage. The fundamental frequency was observed during the variation. The access point was powered 120V/60Hz by programmable power supply. The voltage was varied from 102Vac to 138Vac mean while the fundamental frequencies were observed and record for the maximum drift in ppm; part per millions.

### 4.8.2 Test results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s). The fundamental frequencies drifted less than  $\pm 20$ ppm.

**Table 10:** Voltage Variation – Test Results

Frequency MHz	Nominal (120Vac) MHz	Lo Voltage (102Vac) MHz	Hi Voltage (138Vac) MHz	Max Drift ppm
5500	5499.9640	5499.9675	5499.9634	6.66
5580	5579.9604	5579.9606	5579.9634	7.10
5700	5699.9589	5699.9595	5699.9584	7.31



Figure 120: Voltage Variation – Worst Case

## 4.9 Maximum Permissible Exposure

### 4.9.1 Test Methodology

In this document, we try to prove the safety of radiation harmfulness to the human body for our product. The limit for Maximum Permissible Exposure (MPE) specified in FCC 1.1310 is followed. The Gain of the antenna used in this calculation is declared by the manufacturer, and the maximum total power input to the antenna is measured. Through the Friis transmission formula and the maximum gain of the antenna, we can calculate the distance, away from the product, where the limit of MPE is reached.

Although the Friis transmission formula is a far field assumption, the calculated result of that is an over-prediction for near field power density. We will take that as the worst case to specify the safety range.

### 4.9.2 RF Exposure Limit

According to FCC 1.1310 table 1: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b)

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
<b>(A)Limits For Occupational / Control Exposures</b>				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300	...	...	1.0	6
300 - 1500	...	...	f/300	6
1500 - 100,000	...	...	5	6
<b>(B)Limits For General Population / Uncontrolled Exposure</b>				
0.3–1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/ f <sup>2</sup> )	30
30–300	27.5	0.037	0.2	30
300 - 1500	...	...	f/1500	30
1500 - 100,000	...	...	1.0	30

F = Frequency in MHz

\* = Plane-wave equivalent power density

### 4.9.3 EUT Operating Condition

The software provided by Manufacturer enabled the EUT to transmit data at lowest, middle and highest channel individually.

### 4.9.4 Classification

The antenna of the product, under normal use condition, is at least 20cm away from the body of the user. Warning statement to the user for keeping at least 20cm or more separation distance with the antenna should be included in user's manual. So, this device is classified as a **Mobile Device**.

### 4.9.5 Test Results

#### 4.9.5.1 Antenna Gain

The transmitting antenna was integrated. The directional antenna gain was +8.00 dBi or 6.31 (numeric).

#### 4.9.5.2 Output Power into Antenna & RF Exposure value at distance 20cm:

Calculations for this report are based on highest power measurement.

Limit for MPE (from FCC part 1.1310 table1) is 1.0 mW/cm<sup>2</sup>

The highest measured total power is +21.41 dBm or 138.36mW

Using the Friss transmission formula, the EIRP is Pout\*G, and R is 20cm.

$Pd = (138.36 * 6.31) / (1600\pi) = 0.1738 \text{ mW/cm}^2$ , which is 0.8262 mW/cm<sup>2</sup> below to the limit.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

### 4.9.6 Sample Calculation

The Friss transmission formula:  $Pd = (Pout * G) / (4 * \pi * R^2)$

Where;

Pd = power density in mW/cm<sup>2</sup>

Pout = output power to antenna in mW

G = gain of antenna in linear scale

$\pi \approx 3.1416$

R = distance between observation point and center of the radiator in cm

Ref. : David K. Cheng, *Field and Wave Electromagnetics*, Second Edition, Page 640, Eq. (11-133).

## 6 Test Equipment Use List

### 6.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
Bilog Antenna	Sunol Science	JB3	A102606	05/15/2012	05/15/2014
Horn Antenna	Sunol Science	DRH-118	A040806	11/05/2012	11/05/2014
Antenna (18-26GHz)	CMT	RA42-K-F-4B-C	020131-004	03/05/2013	03/05/2014
Antenna (26-40 GHz)	CMT	RA28-K-F-4B-C	011469R-003	11/20/2012	11/20/2014
EMI Receiver	Hewlett Packard	8546A	3807A00445	01/18/2013	01/18/2014
Preselector	Hewlett Packard	85460A	3704A00407	01/18/2013	01/18/2014
Amplifier	Hewlett Packard	8447D	2944A07996	01/16/2013	01/16/2014
Spectrum Analyzer	Rhode&Schwarz	ESIB	832427/002	01/16/2013	01/16/2014
Amplifier	Rhode&Schwarz	TS-PR18	3545.7008.03	01/16/2013	01/16/2014
Amplifier	Rhode&Schwarz	TS-PR26	100011	03/05/2013	03/05/2014
Amplifier	Rhode&Schwarz	TS-PR40	100012	11/20/2012	11/20/2014
Signal Generator	Anritsu	MG3694A	42803	01/19/2013	01/19/2014
Notch Filter	Micro-Tronics	BRM50702	37	01/16/2013	01/16/2014
Notch Filter	Micro-Tronics	BRC50703	11	01/16/2013	01/16/2014
Notch Filter	Micro-Tronics	BRC50704	8	01/16/2013	01/16/2014
Notch Filter	Micro-Tronics	BRC50705	9	01/16/2013	01/16/2014
High Pass Filter (3.5 GHz)	Hewlett Packard	84300-80038	820004	01/16/2013	01/16/2014
High Pass Filter (8.5 GHz)	Micro-Tronics	HPM50107	4	01/16/2013	01/16/2014
Power Supplier	Kikosui	PCR8000W	CM000912	01/17/2013	01/17/2014
Digital Multimeter	Fluke	177	92780314	01/17/2013	01/17/2014
Power Meter	Agilent	E4418B	MY45103902	01/19/2013	01/19/2014
Power Sensor	Hewlett Packard	8482A	55-5131	01/19/2013	01/19/2014
EMI Receiver	Hewlett Packard	8546A	3942A00514	07/02/2012	07/02/2013
Preselector	Hewlett Packard	85460A	3704A00485	07/02/2012	07/02/2013
LISN	Com-Power	LI-215	12100	01/16/2013	01/16/2014
Transient Limiter	Com-Power	LIT-930	531582	01/16/2013	01/16/2014
Thermometer	Fluke	52II	88650033	07/26/2012	07/26/2013
Thermo Chamber	Espec	BTZ-133	0613436	03/11/2013	03/11/2014
Spectrum Analyzer	Rhode&Schwarz	FSL6	100169	02/07/2013	02/07/2014
Spectrum Analyzer	Agilent	N9038A	MY51210195	01/19/2013	01/19/2014
Vector Signal Generator	Rhode&Schwarz	SMU 200A	1141.2005.02	11/24/2011	11/24/2013
Amplifier	Hewlett Packard	8449B	30008A01014	01/17/2013	01/17/2014

\* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.

## 7 EMC Test Plan

### 7.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

### 7.2 Customer

**Table 11:** Customer Information

<b>Company Name</b>	Pace Americas
<b>Address</b>	310 Providence Mine Road, Ste. 200
<b>City, State, Zip</b>	Nevada City, CA 95959
<b>Country</b>	USA
<b>Phone</b>	(530) 274-5440
<b>Fax</b>	(530) 273-6340

**Table 12:** Technical Contact Information

<b>Name</b>	Mark Rieger
<b>E-mail</b>	Mark.Rieger@pace.com
<b>Phone</b>	(530) 274-5440
<b>Fax</b>	(530) 273-6340



### 7.3 Equipment Under Test (EUT)

**Table 13:** EUT Specifications

EUT Specification	
Dimensions	6.0" x 5.6" x 1.3"
AC Adapter (Pace M/N:T018WA1225, S/N:810611302000003156)	Input Voltage: 120Vac 50-60Hz Input Current: 680mA Output Voltage: 12VDC Output Current: 1.5A
Environment	Indoor and Outdoor
Operating Temperature Range:	0 to 40 degrees C
Multiple Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Hardware Version	Rev. A1C
Part Number	297T1001700
RF Software Version	Busy Box V1.10.3
802.11-radio modules	
Operating Mode	802.11n HT20 and HT40
Transmitter Frequency Band	5.15 GHz to 5.25 GHz (Indoor Use) 5.25 GHz to 5.35 GHz 5.47 GHz to 5.725 GHz (excludes 5600 MHz to 5650MHz) 5.725 GHz to 5.85 GHz
Max. Rated Power Output	See Channel Planning Table.
Power Setting @ Operating Channel	See Channel Planning Table.
Antenna Type	3 integrated PCB dipole antenna and 1 attached stamped loop antenna
Antenna Gain	+2 dBi per antenna. (Same for both antenna type) +8 dBi max directional gain
Modulation Type	<input type="checkbox"/> AM <input type="checkbox"/> FM <input checked="" type="checkbox"/> DSSS <input checked="" type="checkbox"/> OFDM <input type="checkbox"/> Other describe:
Data Rate	802.11n HT20: 4 Spatial Streams: 26, 52, 78, 104, 156, 208, 234, 260 Mbps 802.11n HT40: 4 Spatial Streams: 54, 108, 162, 216, 324, 432, 486, 540 Mbps
TX/RX Chain (s)	MIMO (4x4)
Directional Gain Type	<input checked="" type="checkbox"/> Correlated <input checked="" type="checkbox"/> Beam-Forming <input type="checkbox"/> Other describe:

<b>EUT Specification</b>	
Type of Equipment	<input checked="" type="checkbox"/> Table Top <input type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input type="checkbox"/> Other
<b>Note:</b> 1. All four chains will be on / transmitted at all time. 2. This report only documents the radio characteristics for 5470 – 5725 MHz band	

**Table 14:** EUT Channel Power Specifications

No.	Frequency (MHz)	Target Power Value				
		802.11b	802.11g	802.11a	802.11n HT20	802.11n HT40
36	5180				10.0	11.0
40	5200				9.0	
44	5220				9.0	11.0
48	5240				9.0	
52	5260				15.0	17.0
56	5280				15.0	
60	5300				15.0	14.0
64	5320				15.0	
100	5500				16.0	16.0
104	5520				16.0	
108	5540				16.0	18.0
112	5560				16.0	
116	5580				16.0	
120	5600					
124	5620					
128	5640					
132	5660				16.0	18.0
136	5680				16.0	
140	5700				16.0	
149	5745				22.0	22.0
153	5765				22.0	
157	5785				22.0	22.0
159	5795				22.0	
161	5805				22.0	
165	5825				22.0	

**Note:** 1. The center operating frequency is shifted upward by 10 MHz for HT40.  
 2. The final adjusted power targets are updated at the above indicated frequencies.

**Table 15:** Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
RJ45	CAT-5 Ethernet	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Metric: 10 m	<input checked="" type="checkbox"/> M

**Table 16:** Supported Equipment

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Dell	PP23LB	9271001233	Setup EUT operating channel
<b>Note:</b> None.				

**Table 17:** Description of Sample used for Testing

Device	Serial	RF Connection	CFR47 Part 15.407
405	09130M000104	Integrated Antenna	TX Emission, AC Conducted Emission
		Direct via Murada Connection	Transmitted Output Power, Power Spectral Density, Peak Excursion Ratio Occupied Bandwidth Frequency Stability Voltage Variation

**Table 18:** Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Photo (X-Axis)	Setup Photo (Y-Axis)	Setup Photo (Z-Axis)
405	Integrated	Transmit	EUT laid flat.	EUT stood upright	Na.
<b>Note:</b> Pre-scans were performed in 2 supporting axis, and Y-axis was worst.					

**Table 19:** Final Test Mode for 5470 - 5725 Band

Test	802.11a	802.11n HT20	802.11n HT40
Occupied Bandwidth FCC Part 15.407(a)		Band 3: 5500, 5580, 5700 MHz 4 Streams – 6.5Mbps/ stream	Band 3: 5510, 5550, 5670 MHz 4 Streams – 13.5Mbps/ stream
Output Power FCC Part 15.407(a)(1-2)		Band 3: 5500, 5580, 5700 MHz 4 Streams – 6.5Mbps/ stream	Band 3: 5510, 5550, 5670 MHz 4 Streams – 13.5Mbps/ stream
Peak Excursion Ratio FCC Part 15.407(a)(6)		Band 3: 5500, 5580, 5700 MHz 4 Streams – 6.5Mbps/ stream	Band 3: 5510, 5550, 5670 MHz 4 Streams – 13.5Mbps/ stream

Test	802.11a	802.11n HT20	802.11n HT40
Power Spectral Density FCC Part 15.407(a)		Band 3: 5500, 5580, 5700 MHz 4 Streams – 6.5Mbps/ stream	Band 3: 5510, 5550, 5670 MHz 4 Streams – 13.5Mbps/ stream
Band-Edge (Radiated) FCC Part 15.205, 15.209, 15.407(b)		Band 3: 5500 , 5700 MHz 4 Streams – 6.5Mbps/ stream	Band 3: 5510, 5670 MHz 4 Streams – 13.5Mbps/ stream
Transmitted Spurious Emission (30 MHz – 1GHz) FCC Part 15.205, 15.209, 15.407(b)		Worst Case: 5580 MHz 4 Streams – 6.5Mbps/ stream (Y-Axis)	
Transmitted Spurious Emission (Above 1GHz) FCC Part 15.205, 15.209, 15.407(b)		Band 3: 5500, 5580, 5700 MHz 4 Streams – 6.5Mbps/ stream (Y-Axis)	Band 3: 5510, 5550, 5670 MHz 4 Streams – 13.5Mbps/ stream (Y-Axis)
Conducted Spurious Emission (antenna port). FCC Part 15.407 (b)	According to CFR47 15.407 (b) EIPR shall not exceed -27 dBm/MHz. This is equivalent to the field strength of 68.2dBuV/m at 3 meter distance. The EUT is satisfied the requirement by meeting the limit under CFR47 Part 15.209.		
AC Conducted Emission FCC Part 15.207		5580 MHz at 4 Data Stream: 6.5Mbps	
Frequency Stability FCC Part 15.407 (g)	CW Tone at 5200 MHz, (Send_cw_signal 40 0 0 3 1 0).		
Voltage Variation FCC Part 15.31 (e)	Continuous wave at 5500, 5580, 5700MHz, (Send_cw_signal 40 0 0 3 1 0)		
Dynamic Frequency Selection FCC Part 15.407 (h)	5470 – 5725 MHz band supports DFS. See DFS test report.		
<b>Note:</b> <ol style="list-style-type: none"> <li>1. Band 3: 5470 MHz – 5725 MHz does not support 802.11a.</li> <li>2. All radiated emission performed on Y-Axis.</li> <li>3. All four chains will be on at all time.</li> <li>4. All tests were pre-scanned for worst case before final testing.</li> </ol>			

---

## 7.4 Test Specifications

Testing requirements

**Table 20:** Test Specifications

Emissions and Immunity	
Standard	Requirement
CFR 47 Part 15.407: 2012	All
RSS 210 Issue 8, 2010	All