


Label with static, pre-printed text only
(STA-L000115)

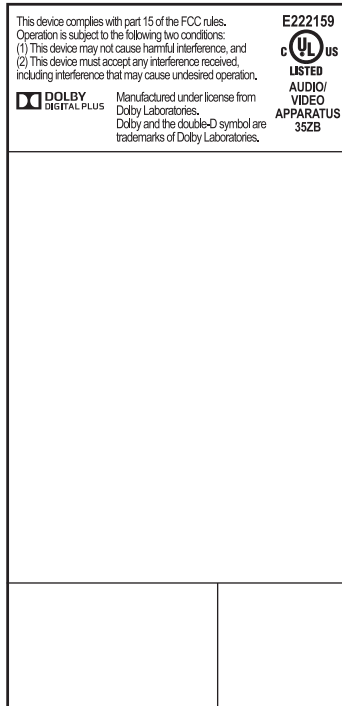

Notes:

The barcodes MUST have a minimum x-dimension of 5 mils (0.125mm). This can only be achieved by using a 600dpi printer.


The barcodes must be as wide as possible across the width of the label, while still including enough quiet zone to the left and right of the barcode to ensure an accurate scan.

Colons (:), and hyphens (-) are to be used only in human-readable serial numbers. Do not include these in the barcoded serial numbers.

Minimum point size for serial numbers:
On base label: 8 point
On rear-panel label: 7 point

The label system (label, ink and printing) shall be UL certified to UL 969.

Label with example variable data (not for manufacture)

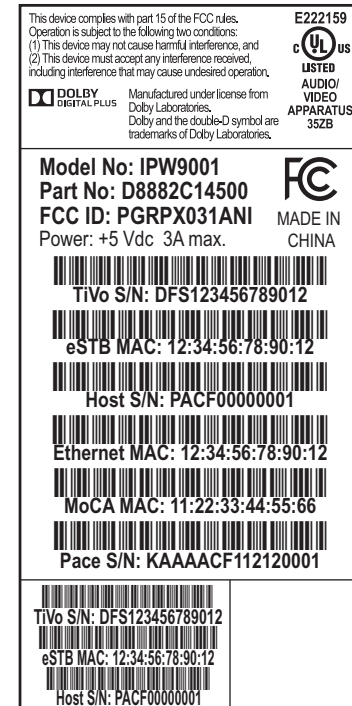

Blank Label Part	STA-L000115	Ribbon	STA-CZEB001		D888-IPW9001-Product-Label			Rev	
								B	
Additional Notes				Model	TiVo IPW9001	Drafted By	Nick Tonge	Sheet 1 of 1	
See also: D888 IPW9001 Serialisation Specification (latest issue on D888 BoM) Label Position Instructions 700-52C000x Changes since last revision: FCC logo added				Model Part No	D8882C14500	Date	16 April 2014		
				Additional Graphics (if required)		Approved by		Signature	Date
				fcc-logo_black-on-white.jpg		Tech Pubs	M Heron		
						Approvals	R Turner		
		Project Team	C Paulat-Brigg						