



Engineering and Testing for EMC and Safety Compliance

---

---

**APPLICATION FOR FCC CLASS B CERTIFICATION**  
**SCANNING RECEIVER**

**Alinco Incorporated; Electronics Division**  
**Shin Dai Building 9F**  
**1-2-6 Dojimahama**  
**Kita-ku, Osaka 530-0004**  
**Japan**

**MODEL: DJ-296T**  
**FCC ID: PH3DJ-296T**

*February 26, 2002*

STANDARDS REFERENCED FOR THIS REPORT	
<b>PART 2: 1999</b>	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
<b>PART 15: 1999</b>	RADIO FREQUENCY DEVICES
<b>ANSI C63.4-1992</b>	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
<b>RSS-215; ISSUE 1 (PROVISIONAL)</b>	ANALOGUE SCANNER RECEIVERS

FCC Rules Parts	Frequency Range (MHz)	Output Power (W)	Freq. Tolerance	Emission Designator
15.121	216.000 - 249.995	N/A	N/A	N/A

**REPORT PREPARED BY:**

**Test Engineer: Franck Schuppius**  
**Administrative Writer: Franck Schuppius**

**Rhein Tech Laboratories, Inc.**

*Document Number: 2002032 / QRTL02-151DF*

*No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.*



## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
1.1	MODIFICATIONS .....	4
1.2	RELATED SUBMITTAL (S)/GRANT (S) .....	4
1.3	TEST METHODOLOGY .....	4
<b>2</b>	<b>CONFORMANCE STATEMENT.....</b>	<b>5</b>
<b>3</b>	<b>SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
3.1	JUSTIFICATION.....	6
3.2	EXERCISING THE EUT .....	6
3.3	TEST SYSTEM DETAILS.....	6
3.4	CONFIGURATION OF TESTED SYSTEM .....	7
<b>4</b>	<b>CONDUCTED EMISSIONS .....</b>	<b>8</b>
4.1	TEST METHODOLOGY FOR CONDUCTED EMISSIONS MEASUREMENTS.....	8
4.2	CONDUCTED EMISSION TEST.....	8
4.3	CONDUCTED EMISSION TEST DATA.....	9
<b>5</b>	<b>RADIATED EMISSIONS.....</b>	<b>12</b>
5.1	TEST METHODOLOGY FOR RADIATED EMISSIONS MEASUREMENTS .....	12
5.2	RADIATED EMISSION DATA .....	13
<b>6</b>	<b>38DB REJECTION TEST .....</b>	<b>15</b>
6.1	38DB REJECTION TEST DATA FOR BASE BAND (869.040-893.970 MHZ) .....	16
6.2	38DB REJECTION TEST DATA FOR MOBILE BAND (824.040-848.970 MHZ) .....	17

## TABLE OF TABLE

TABLE 1:	EQUIPMENT UNDER TEST (EUT).....	6
TABLE 2:	EXTERNAL COMPONENTS IN TEST CONFIGURATION.....	6
TABLE 3:	CONDUCTED EMISSIONS TEST (NEUTRAL SIDE) (216.000 MHZ) .....	9
TABLE 4:	CONDUCTED EMISSIONS TEST (NEUTRAL SIDE) (232.995 MHZ) .....	10
TABLE 5:	CONDUCTED EMISSIONS TEST (PHASE SIDE) (232.995 MHZ) .....	10
TABLE 6:	CONDUCTED EMISSIONS TEST (NEUTRAL SIDE) (249.995 MHZ) .....	11
TABLE 7:	CONDUCTED EMISSIONS TEST (PHASE SIDE) (249.995 MHZ) .....	11
TABLE 8:	EQUIPMENT USED FOR TESTING .....	11
TABLE 9:	RADIATED EMISSIONS: (INPUT FREQUENCY: 216.000 MHZ).....	13
TABLE 10:	RADIATED EMISSIONS: (INPUT FREQUENCY: 232.995 MHZ).....	13
TABLE 11:	RADIATED EMISSIONS: (INPUT FREQUENCY: 249.995 MHZ).....	14
TABLE 12:	EQUIPMENT USED FOR TESTING .....	14
TABLE 13:	38DB REJECTION {FREQUENCY INJECTED: 869.040 MHZ} (CELLULAR BAND) .....	16
TABLE 14:	38DB REJECTION {FREQUENCY INJECTED: 881.505 MHZ} (CELLULAR BAND) .....	16
TABLE 15:	38DB REJECTION {FREQUENCY INJECTED: 893.970 MHZ} (CELLULAR BAND) .....	16
TABLE 16:	38DB REJECTION {FREQUENCY INJECTED: 824.040 MHZ} (MOBILE BAND) .....	17
TABLE 17:	38DB REJECTION {FREQUENCY INJECTED: 836.505 MHZ} (MOBILE BAND) .....	17
TABLE 18:	38DB REJECTION {FREQUENCY INJECTED: 848.970 MHZ} (MOBILE BAND) .....	17



## TABLE OF APPENDIX

---

APPENDIX A:	AGENCY AUTHORIZATION LETTER .....	18
APPENDIX B:	CONFIDENTIALITY REQUEST LETTER (IF APPLICABLE).....	19
APPENDIX C:	ATTESTATION LETTER(S) (IF APPLICABLE).....	20
APPENDIX D:	PRODUCT DESCRIPTION .....	21
APPENDIX E:	LABEL AND LABEL LOCATION .....	22
APPENDIX F:	BILL OF MATERIAL (PARTS LIST) (IF APPLICABLE).....	23
APPENDIX G:	SCHEMATIC.....	24
APPENDIX H:	BLOCK DIAGRAM.....	25
APPENDIX I:	MANUAL.....	26
APPENDIX J:	TEST PHOTOGRAPHS.....	27
APPENDIX K:	EXTERNAL PHOTOGRAPHS.....	29
APPENDIX L:	INTERNAL PHOTOGRAPHS.....	37
APPENDIX M:	ADDITIONAL INFORMATION FOR CANADIAN CERTIFICATION.....	43

## TABLE OF PHOTOGRAPHS

---

PHOTOGRAPH 1:	LABEL LOCATION .....	22
PHOTOGRAPH 2:	CONDUCTED TEST CONFIGURATION (FRONT VIEW) .....	27
PHOTOGRAPH 3:	CONDUCTED TEST CONFIGURATION (REAR VIEW).....	27
PHOTOGRAPH 4:	RADIATED TEST CONFIGURATION (FRONT VIEW) .....	28
PHOTOGRAPH 5:	RADIATED TEST CONFIGURATION (REAR VIEW).....	28
PHOTOGRAPH 6:	FRONT VIEW OF DEVICE .....	29
PHOTOGRAPH 7:	BACK VIEW OF EUT WITH BATTERY PACK .....	30
PHOTOGRAPH 8:	LEFT SIDE OF EUT.....	31
PHOTOGRAPH 9:	RIGHT SIDE OF EUT .....	32
PHOTOGRAPH 10:	REAR VIEW OF EUT WITHOUT BATTERY .....	33
PHOTOGRAPH 11:	TOP OF BATTERY PACK .....	34
PHOTOGRAPH 12:	BOTTOM OF BATTERY PACK .....	35
PHOTOGRAPH 13:	WHIP ANTENNA.....	36
PHOTOGRAPH 14:	BOTTOM VIEW OF PCB .....	37
PHOTOGRAPH 15:	TOP VIEW OF PCB .....	38
PHOTOGRAPH 16:	TOP VIEW OF PCB WITHOUT LCD PANEL .....	39
PHOTOGRAPH 17:	BOTTOM CHASSIS WITH PCB REMOVED.....	40
PHOTOGRAPH 18:	PCB WITH FRONT COVER .....	41
PHOTOGRAPH 19:	BOTTOM WITH FRONT COVER .....	42



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 1 GENERAL INFORMATION

The following Application for FCC Type Certification of a Transceiver (Analog Scanner Receiver portion) is prepared on behalf of **Alinco Incorporated; Electronics Division** in accordance with Part 2, and Part 15, Subparts A and B of the Federal Communications Commissions rules and regulations and Industry Canada RSS-215. The Equipment Under Test (EUT) was the **DJ-296T, FCC ID: PH3DJ-296T**. The test results reported in this document relate only to the item that was tested.

All measurements contained in this Application were conducted in accordance with ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Some accessories are used to increase sensitivity and prevent overloading of the measuring instrument. These are explained in the appendix of this report. Calibration checks are performed regularly on the instruments, and all accessories including the high pass filter, preamplifier and cables.

All radiated emissions measurement were performed manually at Rhein Tech, Incorporated. The radiated emissions measurements required by the rules were performed on the three-meter, open field; test range maintained by Rhein Tech Laboratories, Inc., 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. Complete description and site attenuation measurement data have been placed on file with the Federal Communications Commission. The power line conducted emission measurements were performed in a shielded enclosure also located at the Herndon, Virginia facility. The FCC accepts Rhein Tech Laboratories, Inc. as a facility available to do measurement work for others on a contractual basis.

### 1.1 MODIFICATIONS

No modifications were made during testing.

### 1.2 RELATED SUBMITTAL (S)/GRANT (S)

This is an original certification submission.

### 1.3 TEST METHODOLOGY

Radiated testing was performed according to the procedures in ANSI C63.4 2000. Radiated testing was performed at an antenna to EUT distance of 3 meters.

Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report, submitted to and approved by the Federal Communication Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).



360 Herndon Parkway  
 Suite 1400  
 Herndon, VA 20170  
<http://www.rheintech.com>

## 2 CONFORMANCE STATEMENT

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 1999	RADIO FREQUENCY DEVICES
ANSI C63.4-1992	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
RSS-215; ISSUE 1 (PROVISIONAL)	ANALOGUE SCANNER RECEIVERS

FCC Rules Parts	Frequency Range (MHz)	Output Power (W)	Freq. Tolerance	Emission Designator
15.121	216.000 – 249.995	N/A	N/A	N/A

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described above. Modifications were not made during testing to the equipment in order to achieve compliance with these standards.


Furthermore, there was no deviation from, additions to or exclusions from the ANSI C63.4 test methodology.

Signature: 

Date: March 23, 2002

Typed/Printed Name: Desmond A. Fraser

Position: President  
(NVLAP Signatory)

 Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 20061-0.

**Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.**



### 3 SYSTEM TEST CONFIGURATION

#### 3.1 JUSTIFICATION

To complete the test configuration required by the FCC, the receiver was connected to an external antenna, which receives a signal from a signal generator output. With the antenna installed, the receiver indicator was used to determine optional reception. The EUT's Intermediate frequencies (IF), Local Oscillators (LO), 2<sup>nd</sup> Local Oscillators (LO), crystal oscillators and harmonics of each were investigated. Conducted emission was measured from the AC port of the charger. All modes were investigated and tested including standby mode and scanning mode. The final radiated data was taken with the EUT locked to a set frequency.

#### 3.2 EXERCISING THE EUT

The DJ-296T is a receiver designed to function at the following frequency range (216.000 – 249.995 MHz). The following frequencies were tested: 216.000 MHz, 232.995MHz and 249.995MHz. Each receiver frequency was measured independently. In order to activate the receiver circuitry; a signal was transmitted from a signal generator. This allowed the EUT to function in its typical state through out the course of all testing.

#### 3.3 TEST SYSTEM DETAILS

The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system are:

TABLE 1: EQUIPMENT UNDER TEST (EUT)

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
UHF FM TRANSCEIVER	ALINCO	DJ-296T	N/A	PH3DJ-296T	N/A	014174


TABLE 2: EXTERNAL COMPONENTS IN TEST CONFIGURATION

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
SIGNAL GENERATOR	HEWLETT PACKARD	8648C	3537A01741	N/A	SHIELDED POWER	900917
ANTENNA	ALINCO	WHIP ANTENNA	N/A	N/A	N/A	014180



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

### 3.4 CONFIGURATION OF TESTED SYSTEM





## 4 CONDUCTED EMISSIONS

### 4.1 TEST METHODOLOGY FOR CONDUCTED EMISSIONS MEASUREMENTS

The power line conducted emission measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50 ohm / 50 microhenry Line Impedance Stabilization Network (EUT LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 400 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 400 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. No video filter less than 10 times the resolution bandwidth was used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from (150/450) kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in this report.

*Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.*

### 4.2 CONDUCTED EMISSION TEST

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emissions exceed the limit with the instrument set to the quasi-peak mode, then measurements are made in the average mode. If the quasi-peak measurement is at least 6dB higher than the amplitude in the average mode, the level measured in the quasi-peak mode may be reduced by 13dB before comparing it to the limit.

The conducted test was performed with the EUT exercise program loaded, and the emissions were scanned between 450 kHz to 30 MHz on the NEUTRAL SIDE and PHASE SIDE.





**4.3 CONDUCTED EMISSION TEST DATA**

TABLE 3: CONDUCTED EMISSIONS TEST (NEUTRAL SIDE) (216.000 MHZ)

		Temperature: 73°F		Humidity: 25%		
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)
0.450	Pk	44.2	0.9	45.1	48.0	-2.9
0.511	Pk	39.0	0.9	39.9	48.0	-8.1
0.739	Pk	36.5	0.9	37.4	48.0	-10.6
0.947	Pk	31.2	0.8	32.0	48.0	-16.0
1.940	Pk	28.4	1.4	29.8	48.0	-18.2
5.275	Pk	17.7	2.0	19.7	48.0	-28.3
11.360	Pk	16.5	2.9	19.4	48.0	-28.6

TABLE 4: CONDUCTED EMISSIONS TEST (PHASE SIDE) (216.000 MHZ)

		Temperature: 73°F		Humidity: 25%		
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)
0.450	Pk	36.7	0.9	37.6	48.0	-10.4
0.926	Pk	26.8	0.8	27.6	48.0	-20.4
1.384	Pk	28.0	1.1	29.1	48.0	-18.9
1.864	Pk	25.1	1.4	26.5	48.0	-21.5
5.235	Pk	16.9	2.0	18.9	48.0	-29.1
11.510	Pk	16.7	3.0	19.7	48.0	-28.3
25.330	Pk	16.8	4.3	21.1	48.0	-26.9

<sup>0</sup>Pk = Peak; QP = Quasi-Peak; Av = Average

TEST PERSONNEL:

Signature:  Date: February 21, 2002  
 Typed/Printed Name: Franck Schuppis



360 Herndon Parkway  
 Suite 1400  
 Herndon, VA 20170  
<http://www.rheintech.com>

TABLE 4: CONDUCTED EMISSIONS TEST (NEUTRAL SIDE) (232.995 MHZ)

		Temperature: 73°F		Humidity: 25%		
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)
0.451	Pk	43.0	0.9	43.9	48.0	-4.1
0.707	Pk	36.2	0.9	37.1	48.0	-10.9
0.889	Pk	32.2	0.8	33.0	48.0	-15.0
1.920	Pk	27.5	1.4	28.9	48.0	-19.1
5.220	Pk	18.0	2.0	20.0	48.0	-28.0
10.780	Pk	16.5	2.8	19.3	48.0	-28.7
22.660	Pk	17.2	4.1	21.3	48.0	-26.7

TABLE 5: CONDUCTED EMISSIONS TEST (PHASE SIDE) (232.995 MHZ)

		Temperature: 73°F		Humidity: 25%		
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)
0.451	Pk	36.3	0.9	37.2	48.0	-10.8
0.903	Pk	26.5	0.8	27.3	48.0	-20.7
1.380	Pk	28.2	1.1	29.3	48.0	-18.7
6.605	Pk	17.2	2.2	19.4	48.0	-28.6
9.890	Pk	17.5	2.7	20.2	48.0	-27.8
11.280	Pk	17.1	2.9	20.0	48.0	-28.0
24.110	Pk	17.2	4.3	21.5	48.0	-26.5

<sup>(1)</sup>Pk = Peak; QP = Quasi-Peak; Av = Average

TEST PERSONNEL:

Signature: 

Date: February 21, 2002

Typed/Printed Name: Franck Schuppis



TABLE 6: CONDUCTED EMISSIONS TEST (NEUTRAL SIDE) (249.995 MHZ)

Temperature: 73°F Humidity: 25%						
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)
0.451	Pk	43.3	0.9	44.2	48.0	-3.8
0.725	Pk	35.7	0.9	36.6	48.0	-11.4
0.913	Pk	32.1	0.8	32.9	48.0	-15.1
1.960	Pk	27.6	1.4	29.0	48.0	-19.0
5.270	Pk	17.9	2.0	19.9	48.0	-28.1
15.140	Pk	16.9	3.4	20.3	48.0	-27.7
23.980	Pk	16.6	4.2	20.8	48.0	-27.2

TABLE 7: CONDUCTED EMISSIONS TEST (PHASE SIDE) (249.995 MHZ)

Temperature: 73°F Humidity: 25%						
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)
0.453	Pk	36.9	0.9	37.8	48.0	-10.2
0.911	Pk	26.6	0.8	27.4	48.0	-20.6
1.400	Pk	28.8	1.1	29.9	48.0	-18.1
1.880	Pk	26.0	1.4	27.4	48.0	-20.6
7.260	Pk	17.2	2.3	19.5	48.0	-28.5
13.930	Pk	18.2	3.3	21.5	48.0	-26.5
21.710	Pk	17.1	4.0	21.1	48.0	-26.9

<sup>(1)</sup>Pk = Peak; QP = Quasi-Peak; Av = Average

TEST PERSONNEL:

Signature: 

Date: February 21, 2002

Typed/Printed Name: Franck Schuppis

TABLE 8: EQUIPMENT USED FOR TESTING

Conducted Emissions					
RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900897	HP	85650A	Spectrum Analyzer (10 kHz – 1.5 GHz)	N/A	11/09/02
900339	HP	N/A	Quasi-Peak Adapter	N/A	11/09/02
901084	AFJ	LS16	LISN	N/A	11/09/02



## 5 RADIATED EMISSIONS

### 5.1 TEST METHODOLOGY FOR RADIATED EMISSIONS MEASUREMENTS

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one meter and three meter distances, in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to insure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three-meter, open-field test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane. The spectrum was examined from 30 MHz to 1000 MHz using a spectrum analyzer, a quasi-peak adapter, and EMCO log periodic and biconical antenna. In order to gain sensitivity, a preamplifier was connected in series between the antenna and the input of the spectrum analyzer.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. No video filter less than 10 times the resolution bandwidth was used. The second harmonic of the highest LO was tested. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

*Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.*



**5.2 RADIATED EMISSION DATA**

TABLE 9: RADIATED EMISSIONS: (INPUT FREQUENCY: 216.000 MHZ)

		Temperature: 52°F			Humidity: 40%				
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
185.150	Qp	V	145	1.0	38.1	-18.0	20.1	43.5	-23.4
281.600	Qp	H	225	1.0	35.8	-13.9	21.9	46.0	-24.1
370.300	Qp	H	0	1.0	43.5	-11.1	32.4	46.0	-13.6
555.450	Qp	V	145	1.0	41.0	-6.3	34.7	46.0	-11.3
740.600	Qp	V	320	1.0	40.1	-4.4	35.7	46.0	-10.3
925.750	Qp	V	225	1.0	38.5	-3.7	34.8	46.0	-11.2

1<sup>st</sup> IF = 30.85 MHz, 2<sup>nd</sup> IF = 455KHz, 1<sup>st</sup> LO = 185.150 MHz, 2<sup>nd</sup> Harmonic of 1<sup>st</sup> LO = 370.300 MHz, 2<sup>nd</sup> LO = 30.395 MHz, Harmonics of 12.8 MHz and 3.68 MHz clock oscillators

*\*All readings are quasi-peak, unless stated otherwise.*

TEST PERSONNEL:

Signature: \_\_\_\_\_

Date: February 25, 2002

Typed/Printed Name: Franck Schuppius

TABLE 10: RADIATED EMISSIONS: (INPUT FREQUENCY: 232.995 MHZ)

		Temperature: 52°F			Humidity: 40%				
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
202.145	Qp	V	145	1.0	40.8	-17.6	23.2	43.5	-20.3
231.668	Qp	V	180	1.0	39.9	-16.6	23.3	46.0	-22.7
404.290	Qp	H	145	1.0	53.8	-9.8	44.0	46.0	-2.0
606.435	Qp	V	270	1.0	42.1	-6.2	35.9	46.0	-10.1
808.580	Qp	V	0	1.0	32.8	-4.0	28.8	46.0	-17.2
930.200	Qp	V	270	1.0	34.5	-3.4	31.1	46.0	-14.9

1<sup>st</sup> IF = 30.85 MHz, 2<sup>nd</sup> IF = 455KHz, 1<sup>st</sup> LO = 202.145 MHz, 2<sup>nd</sup> Harmonic of 1<sup>st</sup> LO = 404.290 MHz, 2<sup>nd</sup> LO = 30.395 MHz, Harmonics of 12.8 MHz and 3.68 MHz clock oscillators

*\*All readings are quasi-peak, unless stated otherwise.*

TEST PERSONNEL:

Signature: \_\_\_\_\_

Date: February 25, 2002

Typed/Printed Name: Franck Schuppius



360 Herndon Parkway  
 Suite 1400  
 Herndon, VA 20170  
<http://www.rheintech.com>

TABLE 11: RADIATED EMISSIONS: (INPUT FREQUENCY: 249.995 MHZ)

		Temperature: 48°F			Humidity: 52%				
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.854	Qp	V	145	1.0	39.4	-12.3	27.1	40.0	-12.9
182.728	Qp	V	270	1.0	39.7	-17.9	21.8	43.5	-21.7
219.145	Qp	V	0	1.0	51.5	-17.5	34.0	46.0	-12.0
438.290	Qp	V	90	1.0	52.0	-9.4	42.6	46.0	-3.4
657.435	Qp	V	180	1.0	41.6	-5.9	35.7	46.0	-10.3
930.800	Qp	V	145	1.0	36.8	-3.4	33.4	46.0	-12.6

1<sup>st</sup> IF = 30.85 MHz, 2<sup>nd</sup> IF = 455KHz, 1<sup>st</sup> LO = 219.145 MHz, 2<sup>nd</sup> Harmonic of 1<sup>st</sup> LO = 438.290 MHz, 2<sup>nd</sup> LO = 30.395 MHz, Harmonics of 12.8 MHz and 3.68 MHz clock oscillators

\*All readings are quasi-peak, unless stated otherwise.

TEST PERSONNEL:

Signature: \_\_\_\_\_  
 Typed/Printed Name: Franck Schuppilus

Date: February 25, 2002

TABLE 12: EQUIPMENT USED FOR TESTING

\* Note: The preamplifier's gain is included in the site correction factor.

Radiated Emissions					
RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900897	HP	8565A	Spectrum Analyzer (10kHz – 1.5 GHz)	N/A	03/27/02
901053	Schaffner & Chase	CBL6112B	Bilog antenna (20 MHz - 2 GHz)	2648	05/24/02
*900905	Rhein Tech Laboratories, Inc.	PR-1040	Pre Amplifier 40dB (10MHz – 2 GHz)	1006	N/A




## 6 38DB REJECTION TEST

A signal generator was connected to the receiver under test, and the output of the receiver was connected to an audio analyzer.

A FM signal was applied to the receiver antenna input with a 1kHz tone modulated at 8 kHz deviation, and adjusted with the audio analyzer to produce a 12 dB SINAD. This was done across the receiver bands to determine a reference level. The reference level used was that with the highest sensitivity in all of the bands.

The output of the signal generator was then adjusted to a level 40 dB above the reference level established and set to a low, medium and high frequency in both the mobile and base cellular bands. (Mobile = 824.04 MHz through 848.97 MHz, Base = 881.50 MHz through 893.97 MHz). The squelch of the receiver was then set to a minimum threshold level and scanning began from the lowest to the highest channel. Whenever the receiver stopped and “un-squelched” that frequency was noted as a response. After all the frequencies of responses were noted, the signal generator was set to measure the sensitivity at each of these response frequencies. This measurement was the reference sensitivity for the particular received frequency measured. The audio analyzer measurement was used to measure the 12 dB SINAD and that is the spurious value. The difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38 dB.

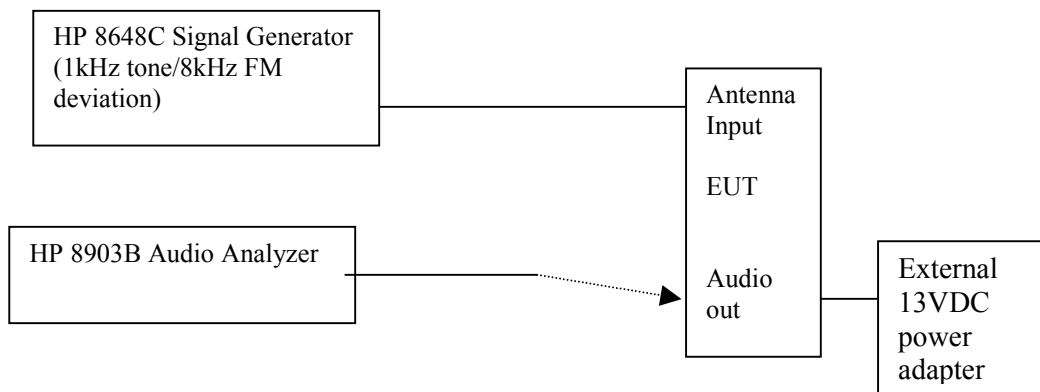

Frequencies used on the Signal Generator were 824.04, 836.50, 848.97 MHz for the Mobile and 869.04, 881.50, 893.97 MHz for the Base.

The DJ-296T unit reference level used was  $-78.5$  dBm from the signal generator. The DJ-296T unit was scanned from 30 - 960 MHz for all channels (manufacturers spec.). Signals that were noted as responses were checked with the signal generator off. If they are still present they were determined as ambient signals and removed from the response list. There was no signal available for the 38 dB rejection test requirements.



**6.1 38DB REJECTION TEST DATA FOR BASE BAND (869.040-893.970 MHZ)**

TABLE 13: 38DB REJECTION {FREQUENCY INJECTED: 869.040 MHZ} (CELLULAR BAND)

Frequency Injected: 869.040 MHz		Temperature: 74°F; Humidity: 45%		
Frequency Detected (MHz)	Level 12dB SINAD at 869.040 MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TABLE 14: 38DB REJECTION {FREQUENCY INJECTED: 881.505 MHZ} (CELLULAR BAND)

Frequency Injected: 881.500 MHz		Temperature: 74°F; Humidity: 45%		
Frequency Detected (MHz)	Level 12dB SINAD at 881.50MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TABLE 15: 38DB REJECTION {FREQUENCY INJECTED: 893.970 MHZ} (CELLULAR BAND)

Frequency Injected: 893.970 MHz		Temperature: 74°F; Humidity: 45%		
Frequency Detected (MHz)	Level 12dB SINAD at 893.970MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TEST PERSONNEL:

Signature: 

Date: February 26, 2002

Typed/Printed Name: Franck Schuppis





**6.2 38DB REJECTION TEST DATA FOR MOBILE BAND (824.040-848.970 MHZ)**

TABLE 16: 38DB REJECTION {FREQUENCY INJECTED: 824.040 MHZ} (MOBILE BAND)

Frequency Injected: 824.040 MHz		Temperature: 74°F; Humidity: 45%		
Frequency Detected (MHz)	Level 12dB SINAD at 824.040MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TABLE 17: 38DB REJECTION {FREQUENCY INJECTED: 836.505 MHZ} (MOBILE BAND)

Frequency Injected: 836.505 MHz		Temperature: 74°F; Humidity: 45%		
Frequency Detected (MHz)	Level 12dB SINAD at 836.500MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TABLE 18: 38DB REJECTION {FREQUENCY INJECTED: 848.970 MHZ} (MOBILE BAND)

Frequency Injected: 848.970 MHz		Temperature: 74°F; Humidity: 45%		
Frequency Detected (MHz)	Level 12dB SINAD at 848.970MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TEST PERSONNEL:

Signature: 

Date: February 26, 2002

Typed/Printed Name: Franck Schuppis