



Engineering and Testing for EMC and Safety Compliance

**APPLICATION FOR FCC CLASS B CERTIFICATION
WIDE BAND COMMUNICATION RECEIVER**

**Alinco Incorporated; Electronics Division
Shin Dai Building 9F
1-2-6 Dojimahama
Kita-ku, Osaka 530-0004
Japan**

**MODEL: DJ-S40T
FCC ID: PH3 DJ-S40T**

October 24, 2001

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 1999	RADIO FREQUENCY DEVICES
ANSI C63.4-1992	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
RSS-215; ISSUE 1 (PROVISIONAL)	ANALOGUE SCANNER RECEIVERS

FCC Rules Parts	Frequency Range MHz	Output Power (W)	Freq. Tolerance	Emission Designator
15.121	400-479..995 MHz	N/A	N/A	N/A

REPORT PREPARED BY:

**Test Engineer: Franck Schuppius
Administrative Writer: Franck Schuppius**

Rhein Tech Laboratories, Inc.

Document Number: 2001281 / QRTL01-153F

No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.



TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	MODIFICATIONS.....	4
1.2	RELATED SUBMITTAL(S)/GRANT(S).....	4
1.3	TEST METHODOLOGY.....	4
1.4	TEST FACILITY.....	4
2	CONFORMANCE STATEMENT.....	5
3	SYSTEM TEST CONFIGURATION.....	6
3.1	JUSTIFICATION.....	6
3.2	EXERCISING THE EUT.....	6
3.3	TEST SYSTEM DETAILS.....	6
3.4	CONFIGURATION OF TESTED SYSTEM.....	7
4	CONDUCTED EMISSIONS.....	8
4.1	TEST METHODOLOGY FOR CONDUCTED EMISSIONS MEASUREMENTS.....	8
4.2	CONDUCTED EMISSION TEST.....	8
4.3	CONDUCTED EMISSION TEST DATA.....	9
5	RADIATED EMISSIONS.....	12
5.1	TEST METHODOLOGY FOR RADIATED EMISSIONS MEASUREMENTS.....	12
5.2	RADIATED EMISSION DATA.....	13
6	38DB REJECTION TEST.....	15
6.1	38DB REJECTION TEST DATA FOR BASE BAND (869.040-893.970 MHZ).....	16
6.2	38DB REJECTION TEST DATA FOR MOBILE BAND (824.040-848.970 MHZ).....	17

TABLE OF TABLE

TABLE 1:	EQUIPMENT UNDER TEST (EUT).....	6
TABLE 2:	EXTERNAL COMPONENTS IN TEST CONFIGURATION.....	6
TABLE 3:	CONDUCTED EMISSIONS TEST (PHASE SIDE) (400.000 MHZ).....	9
TABLE 4:	CONDUCTED EMISSIONS TEST (NEUTRAL SIDE) (439.995 MHZ).....	10
TABLE 5:	CONDUCTED EMISSIONS TEST (PHASE SIDE) (439.995 MHZ).....	10
TABLE 6:	CONDUCTED EMISSIONS TEST (NEUTRAL SIDE) (479.995 MHZ).....	11
TABLE 7:	CONDUCTED EMISSIONS TEST (PHASE SIDE) (479.995 MHZ).....	11
TABLE 8:	EQUIPMENT USED FOR TESTING.....	11
TABLE 9:	RADIATED EMISSIONS: (INPUT FREQUENCY: 400.000 MHZ).....	13
TABLE 10:	RADIATED EMISSIONS: (INPUT FREQUENCY: 439.995 MHZ).....	13
TABLE 11:	RADIATED EMISSIONS: (INPUT FREQUENCY: 479.995 MHZ).....	14
TABLE 12:	EQUIPMENT USED FOR TESTING.....	14
TABLE 13:	38DB REJECTION {FREQUENCY INJECTED: 869.040 MHZ} (CELLULAR BAND).....	16
TABLE 14:	38DB REJECTION {FREQUENCY INJECTED: 881.505 MHZ} (CELLULAR BAND).....	16
TABLE 15:	38DB REJECTION {FREQUENCY INJECTED: 893.970 MHZ} (CELLULAR BAND).....	16
TABLE 16:	38DB REJECTION {FREQUENCY INJECTED: 824.040 MHZ} (MOBILE BAND).....	17
TABLE 17:	38DB REJECTION {FREQUENCY INJECTED: 836.505 MHZ} (MOBILE BAND).....	17
TABLE 18:	38DB REJECTION {FREQUENCY INJECTED: 848.970 MHZ} (MOBILE BAND).....	17



TABLE OF APPENDIX

APPENDIX A: LABEL INFORMATION	18
APPENDIX B: PRODUCT DESCRIPTION.....	19
APPENDIX C: BILL OF MATERIALS (PARTS LIST)	22
APPENDIX D: BLOCK DIAGRAM.....	23
APPENDIX E: SCHEMATICS.....	24
APPENDIX F: MANUAL.....	25
APPENDIX G: TEST CONFIGURATION PICTURES	26
APPENDIX H: EXTERNAL PHOTOGRAPHS.....	28
APPENDIX I: INTERNAL PHOTOGRAPHS.....	35

TABLE OF PHOTOGRAPHS

PHOTOGRAPH 1: CONFIGURATION OF TESTED SYSTEM (FRONT VIEW)	7
PHOTOGRAPH 2: CONFIGURATION OF TESTED SYSTEM (REAR VIEW)	7
PHOTOGRAPH 3: LABEL LOCATION.....	18
PHOTOGRAPH 4: CONDUCTED TEST CONFIGURATION (FRONT VIEW)	26
PHOTOGRAPH 5: CONDUCTED TEST CONFIGURATION (REAR VIEW)	26
PHOTOGRAPH 6: RADIATED TEST CONFIGURATION (FRONT VIEW)	27
PHOTOGRAPH 7: RADIATED TEST CONFIGURATION (REAR VIEW)	27
PHOTOGRAPH 8: FRONT VIEW OF DEVICE	28
PHOTOGRAPH 9: LEFT SIDE OF EUT.....	29
PHOTOGRAPH 10: RIGHT SIDE OF EUT	30
PHOTOGRAPH 11: REAR VIEW OF EUT WITH BATTERY	31
PHOTOGRAPH 12: BATTERY.....	32
PHOTOGRAPH 13: INTERNAL VIEW OF FRONT COVER	33
PHOTOGRAPH 14: WHIP ANTENNA.....	34
PHOTOGRAPH 15: BOTTOM VIEW OF PCB	35
PHOTOGRAPH 16: TOP VIEW OF PCB.....	36
PHOTOGRAPH 17: BOTTOM COVER WITH PCB REMOVED.....	37
PHOTOGRAPH 18: EUT WITH FRONT COVER REMOVED	38



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

1 GENERAL INFORMATION

The following Application for FCC Type Certification of a Transceiver (Analog Scanner Receiver portion) is prepared on behalf of *Alinco Incorporated; Electronics Division* in accordance with Part 2, and Part 15, Subparts A and B of the Federal Communications Commissions rules and regulations and Industry Canada RSS-215. The Equipment Under Test (EUT) was the *DJ-S40T, FCC ID: PH3 DJ-S40T*. The test results reported in this document relate only to the item that was tested.

All measurements contained in this Application were conducted in accordance with ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Some accessories are used to increase sensitivity and prevent overloading of the measuring instrument. These are explained in the appendix of this report. Calibration checks are performed regularly on the instruments, and all accessories including the high pass filter, preamplifier and cables.

All radiated emissions measurement were performed manually at Rhein Tech, Incorporated. The radiated emissions measurements required by the rules were performed on the three-meter, open field; test range maintained by Rhein Tech Laboratories, Inc., 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. Complete description and site attenuation measurement data have been placed on file with the Federal Communications Commission. The power line conducted emission measurements were performed in a shielded enclosure also located at the Herndon, Virginia facility. The FCC accepts Rhein Tech Laboratories, Inc. as a facility available to do measurement work for others on a contractual basis.

1.1 MODIFICATIONS

No modifications were made during testing.

1.2 RELATED SUBMITTAL(S)/GRANT(S)

This is an original certification submission.

1.3 TEST METHODOLOGY

Radiated testing was performed according to the procedures in ANSI C63.4 1992. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.4 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report, submitted to and approved by the Federal Communication Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).



360 Hemdon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

2 CONFORMANCE STATEMENT

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 1999	RADIO FREQUENCY DEVICES
ANSI C63.4-1992	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
RSS-215; ISSUE 1 (PROVISIONAL)	ANALOGUE SCANNER RECEIVERS

FCC Rules Parts	Frequency Range MHz	Output Power (W)	Freq. Tolerance	Emission Designator
15.121	400.000 – 479.995 MHz	N/A	N/A	N/A

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described above. Modifications were not made during testing to the equipment in order to achieve compliance with these standards.


Furthermore, there was no deviation from, additions to or exclusions from the ANSI C63.4 test methodology.

Signature: 

Date: October 24, 2001

Typed/Printed Name: Desmond A. Fraser

Position: President
(NVLAP Signatory)

 Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 20061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



3 SYSTEM TEST CONFIGURATION

3.1 JUSTIFICATION

To complete the test configuration required by the FCC, the receiver was connected to an external antenna, which receives a signal from a signal generator output. With the antenna installed, the receiver indicator was used to determine optional reception. The EUT's Inter-mediate frequencies (IF), Local Oscillators (LO), crystal oscillators and harmonics of each were investigated. Conducted emission was measured from the AC port of the charger. All modes were investigated and tested including standby mode and scanning mode. The final radiated data was taken with the EUT locked to a set frequency.

3.2 EXERCISING THE EUT

The DJ-S40T is a receiver designed to function at the following frequency range (400.000MHz-479.995MHz). The following frequencies were tested: 400.000MHz, 439.995MHz and 479.995MHz. Each receiver frequency was measured independently. In order to activate the receiver circuitry; a signal was transmitted from a signal generator. This allowed the EUT to function in its typical state through out the course of all testing.

3.3 TEST SYSTEM DETAILS

The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system are:

TABLE 1: EQUIPMENT UNDER TEST (EUT)

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
UHF FM TRANSCEIVER	ALINCO	DJ-S40T	N/A	PH3 DJ-S40T	N/A	013798

TABLE 2: EXTERNAL COMPONENTS IN TEST CONFIGURATION

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
SIGNAL GENERATOR	HEWLETT PACKARD	8648C	3537A01741	N/A	SHIELDED POWER	900917
ANTENNA	ALINCO	WHIP ANTENNA	N/A	N/A	N/A	013800



360 Hemdon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

3.4 CONFIGURATION OF TESTED SYSTEM



PHOTOGRAPH 1: CONFIGURATION OF TESTED SYSTEM (FRONT VIEW)



PHOTOGRAPH 2: CONFIGURATION OF TESTED SYSTEM (REAR VIEW)



4 CONDUCTED EMISSIONS

4.1 TEST METHODOLOGY FOR CONDUCTED EMISSIONS MEASUREMENTS

The power line conducted emission measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50 ohm / 50 microhenry Line Impedance Stabilization Network (EUT LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 400 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 400 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. No video filter less than 10 times the resolution bandwidth was used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from (150/450) kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in this report.

Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.

4.2 CONDUCTED EMISSION TEST

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emissions exceed the limit with the instrument set to the quasi-peak mode, then measurements are made in the average mode. If the quasi-peak measurement is at least 6dB higher than the amplitude in the average mode, the level measured in the quasi-peak mode may be reduced by 13dB before comparing it to the limit.

The conducted test was performed with the EUT exercise program loaded, and the emissions were scanned between 450 kHz to 30 MHz on the NEUTRAL SIDE and HOT SIDE, herein referred to as L1 and L2, respectively.



4.3 CONDUCTED EMISSION TEST DATA

		Temperature: 73°F		Humidity: 45%		
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.666	Pk	42.3	0.7	43.0	48.0	-5.0
0.853	Pk	30.3	0.7	31.0	48.0	-17.0
1.988	Pk	25.7	1.2	26.9	48.0	-21.1
8.185	Pk	13.9	2.0	15.9	48.0	-32.1
16.370	Pk	14.3	2.8	17.1	48.0	-30.9
29.230	Pk	17.1	3.6	20.7	48.0	-27.3

TABLE 3: CONDUCTED EMISSIONS TEST (PHASE SIDE) (400.000 MHZ)

		Temperature: 73°F		Humidity: 45%		
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.450	Pk	43.4	0.8	44.2	48.0	-3.8
0.539	Pk	33.4	0.7	34.1	48.0	-13.9
0.590	Pk	32.3	0.7	33.0	48.0	-15.0
0.845	Pk	38.3	0.7	39.0	48.0	-9.0
1.468	Pk	29.8	0.9	30.7	48.0	-17.3
5.210	Pk	17.5	1.7	19.2	48.0	-28.8
12.080	Pk	17.1	2.5	19.6	48.0	-28.4
25.940	Pk	16.8	3.4	20.2	48.0	-27.8

⁽¹⁾Pk = Peak; QP = Quasi-Peak; Av = Average

TEST PERSONNEL:

Signature:  Date: October 22, 2001
 Typed/Printed Name: Franck Schuppius



360 Hemdon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

TABLE 4: CONDUCTED EMISSIONS TEST (NEUTRAL SIDE) (439.995 MHZ)


Temperature: 73°F Humidity: 45%						
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.655	Pk	33.6	0.7	34.3	48.0	-13.7
0.843	Pk	37.9	0.7	38.6	48.0	-9.4
1.416	Pk	27.8	0.9	28.7	48.0	-19.3
2.092	Pk	24.8	1.2	26.0	48.0	-22.0
6.555	Pk	17.5	1.8	19.3	48.0	-28.7
18.740	Pk	17.6	3.0	20.6	48.0	-27.4
22.680	Pk	17.4	3.2	20.6	48.0	-27.4

TABLE 5: CONDUCTED EMISSIONS TEST (PHASE SIDE) (439.995 MHZ)

Temperature: 73°F Humidity: 45%						
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.451	Pk	40.2	0.8	41.0	48.0	-7.0
0.564	Pk	32.4	0.7	33.1	48.0	-14.9
0.842	Pk	38.4	0.7	39.1	48.0	-8.9
1.000	Pk	34.5	0.7	35.2	48.0	-12.8
1.520	Pk	29.1	1.0	30.1	48.0	-17.9
7.720	Pk	16.7	2.0	18.7	48.0	-29.3
22.250	Pk	17.2	3.2	20.4	48.0	-27.6

⁽¹⁾Pk = Peak; QP = Quasi-Peak; Av = Average

TEST PERSONNEL:

Signature: 

Date: October 22, 2001

Typed/Printed Name: Franck Schuppis



360 Hemdon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

TABLE 6: CONDUCTED EMISSIONS TEST (NEUTRAL SIDE) (479.995 MHZ)

Temperature: 73°F Humidity: 45%						
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.557	Pk	30.9	0.7	31.6	48.0	-16.4
0.782	Pk	40.1	0.7	40.8	48.0	-7.2
1.292	Pk	29.9	0.9	30.8	48.0	-17.2
5.845	Pk	17.8	1.7	19.5	48.0	-28.5
13.300	Pk	17.2	2.5	19.7	48.0	-28.3
28.140	Pk	17.3	3.6	20.9	48.0	-27.1

TABLE 7: CONDUCTED EMISSIONS TEST (PHASE SIDE) (479.995 MHZ)

Temperature: 73°F Humidity: 45%						
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.451	Pk	40.8	0.8	41.6	48.0	-6.4
0.872	Pk	37.3	0.7	38.0	48.0	-10.0
1.000	Pk	35.3	0.7	36.0	48.0	-12.0
1.552	Pk	27.8	1.0	28.8	48.0	-19.2
7.380	Pk	17.7	1.9	19.6	48.0	-28.4
14.140	Pk	16.8	1.8	18.6	48.0	-29.4
22.380	Pk	17.2	3.2	20.4	48.0	-27.6

⁽¹⁾Pk = Peak; QP = Quasi-Peak; Av = Average

TEST PERSONNEL:

Signature: 

Date: October 22, 2001

Typed/Printed Name: Franck Schuppis

TABLE 8: EQUIPMENT USED FOR TESTING

Conducted Emissions					
RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900897	HP	85650A	Spectrum Analyzer (10 kHz – 1.5 GHz)	N/A	11/08/01
900339	HP	N/A	Quasi-Peak Adapter	N/A	11/08/01
901084	AFJ	LS16	LISN	N/A	09/05/02



360 Hemdon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

5 RADIATED EMISSIONS

5.1 TEST METHODOLOGY FOR RADIATED EMISSIONS MEASUREMENTS

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one meter and three meter distances, in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to insure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three-meter, open-field test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane. The spectrum was examined from 30 MHz to 1000 MHz using a spectrum analyzer, a quasi-peak adapter, and bilog antenna. In order to gain sensitivity, a preamplifier was connected in series between the antenna and the input of the spectrum analyzer.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. No video filter less than 10 times the resolution bandwidth was used. The second harmonic of the highest LO was tested. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.



5.2 RADIATED EMISSION DATA

TABLE 9: RADIATED EMISSIONS: (INPUT FREQUENCY: 400.000 MHZ)

Temperature: 57°F Humidity: 89%									
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
73.728	Qp	H	0	1.5	39.9	-22.5	17.4	40.0	-22.6
148.750	Qp	H	145	25.0	40.2	-17.2	23.0	43.5	-20.5
228.557	Qp	H	180	3.0	37.8	-16.8	21.0	46.0	-25.0
378.300	Qp	V	0	1.4	51.6	-11.2	40.4	46.0	-5.6
425.000	Qp	H	225	2.0	38.5	-8.9	29.6	46.0	-16.4
756.600	Qp	V	0	1.2	44.0	-4.4	39.6	46.0	-6.4

1st IF = 21.7 MHz, 2nd IF = 450KHz, 1st LO = 378.300 MHz, 2nd Harmonic of 1st LO = 756.600 MHz
 Harmonics of 21.25MHz and 3.6864 MHz clock oscillators

**All readings are quasi-peak, unless stated otherwise.*

TABLE 10: RADIATED EMISSIONS: (INPUT FREQUENCY: 439.995 MHZ)

Temperature: 57°F Humidity: 89%									
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
63.750	Qp	V	145	1.0	40.4	-23.1	17.3	40.0	-22.7
147.456	Qp	V	90	1.0	36.9	-16.8	20.1	43.5	-23.4
202.752	Qp	V	225	1.0	37.5	-17.6	19.9	43.5	-23.6
297.500	Qp	V	145	1.0	37.6	-14.2	23.4	46.0	-22.6
418.295	Qp	H	90	2.1	52.3	-9.0	43.3	46.0	-2.7
836.590	Qp	H	90	1.0	47.3	-3.5	43.8	46.0	-2.2

1st IF = 21.7 MHz, 2nd IF = 450KHz, 1st LO = 418.295 MHz, 2nd Harmonic of 1st LO = 836.590 MHz
 Harmonics of 21.25MHz and 3.6864 MHz clock oscillators

**All readings are quasi-peak, unless stated otherwise.*

TEST PERSONNEL:

Signature: 

Date: October 22, 2001

Typed/Printed Name: Franck Schuppis



360 Hemdon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>


TABLE 11: RADIATED EMISSIONS: (INPUT FREQUENCY: 479.995 MHZ)

		Temperature: 57°F			Humidity: 89%				
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
127.500	Qp	H	180	2.0	34.7	-16.1	18.6	43.5	-24.9
148.750	Qp	H	225	2.0	40.2	-17.2	23.0	43.5	-20.5
425.000	Qp	H	145	1.0	35.9	-8.9	27.0	46.0	-19.0
458.294	Qp	V	0	1.0	55.1	-11.2	43.8	46.0	-2.7
786.250	Qp	H	225	2.0	34.2	-4.1	30.1	46.0	-15.9
916.588	Qp	V	90	1.0	48.6	-5.2	43.4	46.0	-2.6

1st IF = 21.7 MHz, 2nd IF = 450KHz, 1st LO = 458.294 MHz, 2nd Harmonic of 1st LO = 916.588 MHz
 Harmonics of 21.25MHz and 3.6864 MHz clock oscillators

*All readings are quasi-peak, unless stated otherwise.

TEST PERSONNEL:

Signature: 

Date: October 22, 2001

Typed/Printed Name: Franck Schuppis

Typed/Printed Name: Franck Schuppis

TABLE 12: EQUIPMENT USED FOR TESTING

* Note: The preamplifier's gain is included in the site correction factor.

Radiated Emissions					
RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900897	HP	8565A	Spectrum Analyzer (10kHz – 1.5 GHz)	N/A	03/27/02
901053	Schaffner &Chase	CBL6112B	Bilog antenna (20 MHz - 2 GHz)	2648	05/24/02
*900905	Rhein Tech Laboratories, Inc.	PR-1040	Pre Amplifier 40dB (10MHz – 2GHz)	1006	N/A




6 38DB REJECTION TEST

A signal generator was connected to the receiver under test, and the output of the receiver was connected to an audio analyzer.

A FM signal was applied to the receiver antenna input with a 1kHz tone modulated at 8 kHz deviation, and adjusted with the audio analyzer to produce a 12 dB SINAD. This was done across the receiver bands to determine a reference level. The reference level used was that with the highest sensitivity in all of the bands.

The output of the signal generator was then adjusted to a level 40 dB above the reference level established and set to a low, medium and high frequency in both the mobile and base cellular bands. (Mobile = 824.04 MHz through 848.97 MHz, Base = 881.50 MHz through 893.97 MHz). The squelch of the receiver was then set to a minimum threshold level and scanning began from the lowest to the highest channel. Whenever the receiver stopped and “un-squelched” that frequency was noted as a response. After all the frequencies of responses were noted, the signal generator was set to measure the sensitivity at each of these response frequencies. This measurement was the reference sensitivity for the particular received frequency measured. The audio analyzer measurement was used to measure the 12 dB SINAD and that is the spurious value. The difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38 dB.

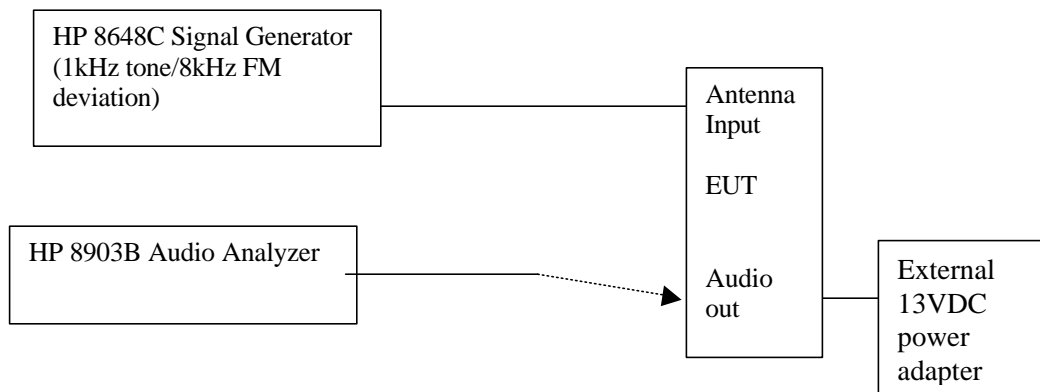

Frequencies used on the Signal Generator were 824.04, 836.50, 848.97 MHz for the Mobile and 869.04, 881.50, 893.97 MHz for the Base.

The DJ-S40T unit reference level used was -40.5 dBm from the signal generator. The DJ-S40T unit was scanned from 30 - 960 MHz for all channels (manufacturers spec.). Signals that were noted as responses were checked with the signal generator off. If they are still present they were determined as ambient signals and removed from the response list. There was no signal available for the 38 dB rejection test requirements.



6.1 38DB REJECTION TEST DATA FOR BASE BAND (869.040-893.970 MHZ)

TABLE 13: 38DB REJECTION {FREQUENCY INJECTED: 869.040 MHZ} (CELLULAR BAND)

Frequency Injected: 869.040 MHz		Temperature: 74°F; Humidity: 33%		
Frequency Detected (MHz)	Level 12dB SINAD at 869.040 MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TABLE 14: 38DB REJECTION {FREQUENCY INJECTED: 881.505 MHZ} (CELLULAR BAND)

Frequency Injected: 881.500 MHz		Temperature: 74°F; Humidity: 33%		
Frequency Detected (MHz)	Level 12dB SINAD at 881.50MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TABLE 15: 38DB REJECTION {FREQUENCY INJECTED: 893.970 MHZ} (CELLULAR BAND)

Frequency Injected: 893.970 MHz		Temperature: 74°F; Humidity: 33%		
Frequency Detected (MHz)	Level 12dB SINAD at 893.970MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TEST PERSONNEL:

Signature: 

Date: October 24, 2001

Typed/Printed Name: Franck Schuppis



6.2 38DB REJECTION TEST DATA FOR MOBILE BAND (824.040-848.970 MHZ)

TABLE 16: 38DB REJECTION {FREQUENCY INJECTED: 824.040 MHZ} (MOBILE BAND)

Frequency Injected: 824.040 MHz		Temperature: 74°F; Humidity: 33%		
Frequency Detected (MHz)	Level 12dB SINAD at 824.040MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TABLE 17: 38DB REJECTION {FREQUENCY INJECTED: 836.505 MHZ} (MOBILE BAND)

Frequency Injected: 836.505 MHz		Temperature: 74°F; Humidity: 33%		
Frequency Detected (MHz)	Level 12dB SINAD at 836.500MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TABLE 18: 38DB REJECTION {FREQUENCY INJECTED: 848.970 MHZ} (MOBILE BAND)

Frequency Injected: 848.970 MHz		Temperature: 74°F; Humidity: 33%		
Frequency Detected (MHz)	Level 12dB SINAD at 848.970MHz	Level 12dB at frequency detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

TEST PERSONNEL:

Signature: 

Date: October 24, 2001

Typed/Printed Name: Franck Schuppis