



Engineering and Testing for EMC and Safety Compliance

CERTIFICATION APPLICATION TEST REPORT

VHF FM HANDHELD SCANNING RECEIVER

FCC ID: PH3DJ-V17T
IC: 3070C-DJV17T

MODEL: DJ-V17T

Alinco Incorporated
Electronics Division
Shin-Dai Building 9F
2-6, 1-Chome, Dojimahama, Kita-ku
Osaka 530-0004 Japan

February 9, 2006

Standards Referenced for this Report	
Part 2: 2004	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 15.121: 2004	Radio Frequency Devices; Scanning Receivers and Frequency Converters Used with Scanning Receivers
ANSI C63.4-2003	Standard Format Measurement/Technical Report Personal Computer and Peripherals
RSS-215; Issue 1 (Provisional)	Analogue Scanner Receivers

Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
130-173.995	N/A	N/A	N/A

REPORT PREPARED BY:

Test Engineer: Daniel Baltzell
Administrative Writer: Daniel Baltzell

Rhein Tech Laboratories, Inc.

Document Number: 2006012

*This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc.
The test results relate only to the EUT tested.*

Table of Contents

1	General Information	4
1.1	Modifications	4
1.2	Related Submittal(s)/Grant(s)	4
1.3	Test Methodology	4
1.4	Test Facility	4
2	Conformance Statement.....	5
3	System Test Configuration.....	6
3.1	Justification	6
3.2	Exercising the EUT	6
3.3	Test System Details.....	6
3.4	Configuration of Tested System.....	7
4	AC Conducted Emissions	8
4.1	Site and Test Description.....	8
4.2	Test Limits	8
4.3	Conducted Emissions Test Data	9
5	Radiated Emissions – FCC Rules and Regulations Part 15 §15.109(a): Radiated Emissions Limits; RSS-215 Section 7 - Receiver Spurious Emissions	10
5.1	Test Methodology for Radiated Emissions Measurements	10
5.2	Radiated Emissions Data	11
6	FCC Rules and Regulations Part 15 §15.121(b) - 38 dB Rejection Test	12
6.1	38 dB Rejection Test Data for Base Band (869.040-893.970 MHz)	13
6.2	38dB Rejection Test Data for Mobile Band (824.040-848.970 MHz)	13
7	Conclusion	14

Table Index

Table 3-1:	Equipment Under Test (EUT).....	6
Table 4-1:	Conducted Emissions Test Data – Mode RX, Neutral Side Line 1, 152 MHz	9
Table 4-2:	Conducted Emissions Test Data – Mode RX, Hot Side Line 2, 152 MHz	9
Table 4-3:	Equipment Used for Testing.....	9
Table 5-1:	Radiated Emissions – Mode RX.....	11
Table 5-2:	Equipment Used for Testing.....	11
Table 6-1:	38 dB Rejection {Frequency Injected: 869.040 MHz} (Cellular Band).....	13
Table 6-2:	38 dB Rejection {Frequency Injected: 881.500 MHz} (Cellular Band).....	13
Table 6-3:	38 dB Rejection {Frequency Injected: 893.970 MHz} (Cellular Band).....	13
Table 6-4:	38 dB Rejection {Frequency Injected: 824.040 MHz} (Mobile Band).....	13
Table 6-5:	38 dB Rejection {Frequency Injected: 836.500 MHz} (Mobile Band).....	13
Table 6-6:	38 dB Rejection {Frequency Injected: 848.970 MHz} (Mobile Band).....	13
Table 6-7:	Equipment Used for Testing.....	14

Appendix Index

Appendix A:	Agency Authorization Letter	15
Appendix B:	Confidentiality Request Letter	16
Appendix C:	FCC Attestation Letter.....	17
Appendix D:	RSS-215 Attestation Letter.....	18
Appendix E:	IC Agent Authority and Listing Requirements Letters.....	19
Appendix F:	Label & Location	20
Appendix G:	Product Description.....	22
Appendix H:	Block Diagram.....	23
Appendix I:	Schematics.....	24
Appendix J:	Manual	25
Appendix K:	Test Configuration Photographs.....	26
Appendix L:	External Photographs.....	29
Appendix M:	Internal Photographs.....	39

Photograph Index

Photograph 1:	FCC/IC ID and Warning Label locations.....	20
Photograph 2:	FCC/IC ID Label Sample and Warning Label Sample	21
Photograph 3:	Radiated Emissions Test Configuration (Front View)	26
Photograph 4:	Radiated Emissions Test Configuration (Rear View).....	27
Photograph 5:	38 dB Rejection Test Configuration	28
Photograph 6:	Front View	29
Photograph 7:	Back View.....	30
Photograph 8:	Right Side View	31
Photograph 9:	Left Side View.....	32
Photograph 10:	Top View.....	33
Photograph 11:	Bottom View	34
Photograph 12:	EDC-146 AC Adapter Top View	35
Photograph 13:	EBP-63, EBP-65, EBP-66 Battery Labels.....	36
Photograph 14:	EDH-34, EBP-64 Battery Labels.....	37
Photograph 15:	Antenna	38
Photograph 16:	Inside Front Cover and PCB in Back Case.....	39
Photograph 17:	Inside Back Cover	40
Photograph 18:	Back Side with Panel Removed.....	41
Photograph 19:	Front PCB with LCD	42
Photograph 20:	Front PCB with LCD Removed.....	43
Photograph 21:	Back PCB with Shield.....	44
Photograph 22:	Back PCB with Shield Removed.....	45

1 General Information

The following application for certification of an analog scanning receiver is prepared on behalf of Alinco Incorporated; Electronics Division, in accordance with FCC Rules and Regulations Parts 2 and 15 and Industry Canada RSS-215. The Equipment Under Test (EUT) is Model DJ-V17T, FCC ID: PH3DJ-V17T. The test results reported in this document relate only to the item that was tested.

All measurements contained in this application were conducted in accordance with ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 2003. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Some accessories are used to increase sensitivity and prevent overloading of the measuring instrument. Calibration checks are performed regularly on the instruments, and all accessories including the high pass filter, preamplifier and cables.

1.1 Modifications

No modifications were made during testing.

1.2 Related Submittal(s)/Grant(s)

This is an original certification submission.

1.3 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4 2003. Radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report, submitted to, and approved by the Federal Communications Commission; to perform AC line conducted and radiated emissions testing (ANSI C63.4 2003).

2 Conformance Statement

Standards Referenced for this Report	
Part 2: 2004	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 15.121: 2004	Radio Frequency Devices; Scanning Receivers and Frequency Converters Used with Scanning Receivers
ANSI C63.4-2003	Standard Format Measurement/Technical Report Personal Computer and Peripherals
RSS-215; Issue 1 (Provisional)	Analogue Scanner Receivers

Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
130-173.995	N/A	N/A	N/A

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described above. No modifications were made to the equipment during testing in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to, or exclusions from the ANSI C63.4 test methodology.


Signature:



Date: February 9, 2006

Typed/Printed Name: Desmond A. Fraser

Position: President
 (NVLAP Signatory)

 Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 20061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

3 System Test Configuration

3.1 Justification

To complete the test configuration required by the FCC, the receiver was connected to an external antenna, which receives a signal from a signal generator output. With the antenna installed, the receiver indicator was used to determine optimal reception. The EUT's intermediate frequencies (IF), local oscillators (LO), crystal oscillators and harmonics of each were investigated. Conducted emissions were measured from the AC port of the charger. All modes were investigated and tested, including standby mode and scanning mode. The final radiated data was taken with the EUT locked to a set frequency.

3.2 Exercising the EUT

The DJ-V17T is a receiver designed to function at the following frequency range: 130–173.995 MHz. The following frequencies were tested: 130, 152, and 173.995 MHz. In order to activate the receiver circuitry, a signal was transmitted from a signal generator. This allowed the EUT to function in its typical state throughout the course of all testing.


3.3 Test System Details

The test sample was received on February 6, 2006. The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system are:

Table 3-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
VHF FM Mobile Scanning Receiver	Alinco	DJ-V17T	M000403	PH3DJ-V17T	N/A	17059
12VDC Charger	Alinco	AD35-12002	N/A	N/A	N/A	17001
Adapter	Alinco	N/A	N/A	N/A	N/A	17016
Li-ion Rechargeable Battery	Alinco	EBP-63	N/A	N/A	N/A	17006
Li-ion Rechargeable Battery	Alinco	EBP-64	N/A	N/A	N/A	17007
Ni-MH Rechargeable Battery	Alinco	EBP-65	N/A	N/A	N/A	17008
Ni-MH Rechargeable Battery	Alinco	EBP-66	N/A	N/A	N/A	17009
Battery Case	Alinco	EDH-34	N/A	N/A	N/A	17010
Antenna	Alinco	N/A	N/A	N/A	N/A	17011

3.4 Configuration of Tested System

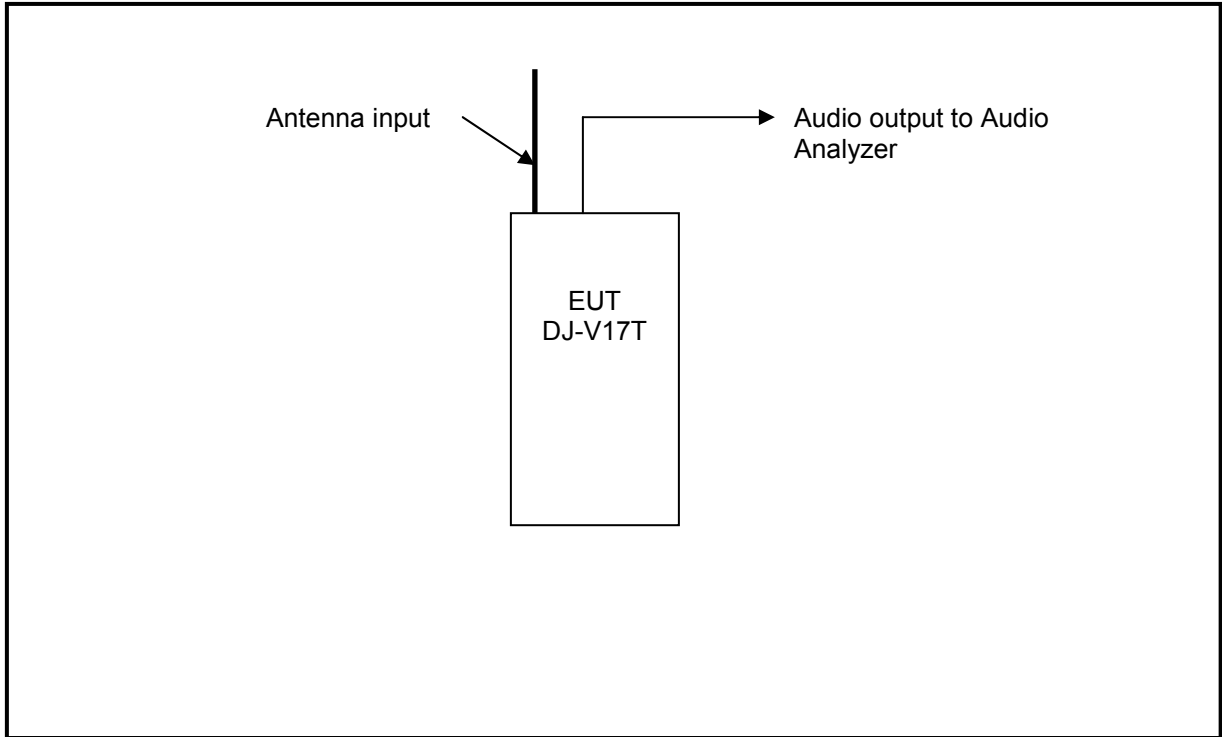

4 AC Conducted Emissions - FCC Rules and Regulations Part 15 §15.107(b): Conducted Limits

4.1 Site and Test Description

The power line conducted emissions measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50-ohm/50 microhenry Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable).

The analyzer's 6 dB bandwidth was set to 9 kHz. Video filter less than 10 times the resolution bandwidth is not used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded.

Conducted measurements at telecommunications ports (if applicable) were performed per EN55022: 1998. The limits for Class A and Class B are contained therein.

4.2 Test Limits

Class A Line-Conducted Emissions		
Frequency (MHz)	Limit (dBµV)	
	Quasi-Peak	Average
0.15 to 0.50	79	66
0.50 to 30.0	73	60

Class B Line-Conducted Emissions		
Frequency (MHz)	Limit (dBµV)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.00	56	46
5.00 to 30.00	60	50

4.3 Conducted Emissions Test Data

Table 4-1: Conducted Emissions Test Data – Mode RX, Neutral Side Line 1, 152 MHz

Temperature: 74°F Humidity: 53%									
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)	FCC B AV Limit (dBuV)	FCC B AV Margin (dBuV)	Pass/Fail
0.223	Pk	35.4	0.2	35.6	62.7	-27.1	52.7	-17.1	Pass
0.423	Pk	36.5	0.3	36.8	57.4	-20.6	47.4	-10.6	Pass
0.510	Pk	25.5	0.2	25.7	56.0	-30.3	46.0	-20.3	Pass
12.220	Pk	7.1	1.9	9.0	60.0	-51.0	50.0	-41.0	Pass
14.070	Pk	6.6	2.0	8.6	60.0	-51.4	50.0	-41.4	Pass
20.760	Pk	7.5	2.4	9.9	60.0	-50.1	50.0	-40.1	Pass

Limit: CISPR B

Table 4-2: Conducted Emissions Test Data – Mode RX, Hot Side Line 2, 152 MHz


Temperature: 74°F Humidity: 53%									
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)	FCC B AV Limit (dBuV)	FCC B AV Margin (dBuV)	Pass/Fail
0.157	Pk	35.1	0.2	35.3	65.6	-30.3	55.6	-20.3	0.157
0.281	Pk	32.2	0.2	32.4	60.8	-28.4	50.8	-18.4	0.281
0.419	Pk	35.6	0.3	35.9	57.5	-21.6	47.5	-11.6	0.419
0.519	Pk	25.4	0.2	25.6	56.0	-30.4	46.0	-20.4	0.519
4.020	Pk	8.0	1.0	9.0	56.0	-47.0	46.0	-37.0	4.020
12.720	Pk	8.0	2.0	10.0	60.0	-50.0	50.0	-40.0	12.720
21.770	Pk	6.6	2.5	9.1	60.0	-50.9	50.0	-40.9	21.770

Limit: CISPR B

Table 4-3: Equipment Used for Testing

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
900969	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	2412A00414	08/3/06
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	08/3/06
900930	Hewlett Packard	85662A	Spectrum Analyzer Display	3144A20839	08/3/06
901083	AFJ	LS16	16A LISN	16010020082	3/24/06

Test Personnel:



Signature: _____ Typed Name: Daniel Baltzell Date: February 8, 2006

5 Radiated Emissions – FCC Rules and Regulations Part 15 §15.109(a): Radiated Emissions Limits; RSS-215 Section 7 - Receiver Spurious Emissions

5.1 Test Methodology for Radiated Emissions Measurements

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one meter and three meter distances, in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction, and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three meter, open-field test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane. The spectrum was examined from 30 MHz to 1000 MHz using a spectrum analyzer, a quasi-peak adapter, and EMCO log periodic and biconical antenna. In order to gain sensitivity, a preamplifier was connected in series between the antenna and the input of the spectrum analyzer.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. No video filter less than 10 times the resolution bandwidth was used. The second harmonic of the highest LO was tested. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech Quality Manual, Section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.

5.2 Radiated Emissions Data

Table 5-1: Radiated Emissions – Mode RX


Temperature: 34°F Humidity: 44%									
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
122.300	Qp	H	0	1.0	33.2	-16.3	16.9	43.5	-26.6
123.300	Qp	H	0	1.0	33.0	-16.3	16.7	43.5	-26.8
124.288	Qp	H	0	1.0	36.1	-16.2	19.9	43.5	-23.6
244.600	Qp	H	0	1.0	33.1	-15.0	18.1	46.0	-27.9
246.600	Qp	H	0	1.0	33.0	-14.8	18.2	46.0	-27.8
248.576	Qp	H	0	1.0	35.3	-14.8	20.5	46.0	-25.5

Notes: All readings are quasi-peak, unless stated otherwise.
 A low, middle, and high channel was checked for every frequency band.
 Limit/Distance: FCC B/3M

Table 5-2: Equipment Used for Testing

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	8/3/06
900930	Hewlett Packard	85662A	Spectrum Analyzer Display Section	3144A20839	8/3/06
901053	Schaffner & Chase	CBL6112B	Bilog Antenna (20 MHz - 2 GHz)	2648	9/20/06
901281	Rhein Tech Laboratories, Inc.	PR-1040	Pre Amplifier 40 dB (10 MHz - 2 GHz)	1006	10/8/06
900969	Hewlett Packard	85650A	Quasi-Peak Adapter	2412A00414	8/3/06

Test Personnel:




Signature: _____ Typed Name: Daniel Baltzell Date: February 8, 2006

6 FCC Rules and Regulations Part 15 §15.121(b) - 38 dB Rejection Test

A signal generator was connected to the receiver under test, and the output of the receiver was connected to an audio analyzer.

An FM signal was applied to the receiver antenna input with a 1 kHz tone modulated at 8 kHz deviation, and adjusted with the audio analyzer to produce a 12 dB SINAD. This was done across the receiver bands to determine a reference level. The reference level used was that with the highest sensitivity in all of the bands.

The output of the signal generator was then adjusted to a level 40 dB above the reference level established and set to a low, medium, and high frequency in both the mobile and base cellular bands: the mobile band being 824.04 MHz - 848.97 MHz, and the base band being 869.04 MHz - 893.97 MHz. The squelch of the receiver was then set to a minimum threshold level, and scanning begun from the lowest to the highest channel. Whenever the receiver stopped and “un-squelched”, that frequency was noted as a response. After all the frequencies of responses were noted, the signal generator was set to measure the sensitivity at each of these response frequencies. This measurement was the reference sensitivity for the particular received frequency measured. The audio analyzer measurement was used to measure the 12 dB SINAD, which is the spurious value. The difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38 dB.

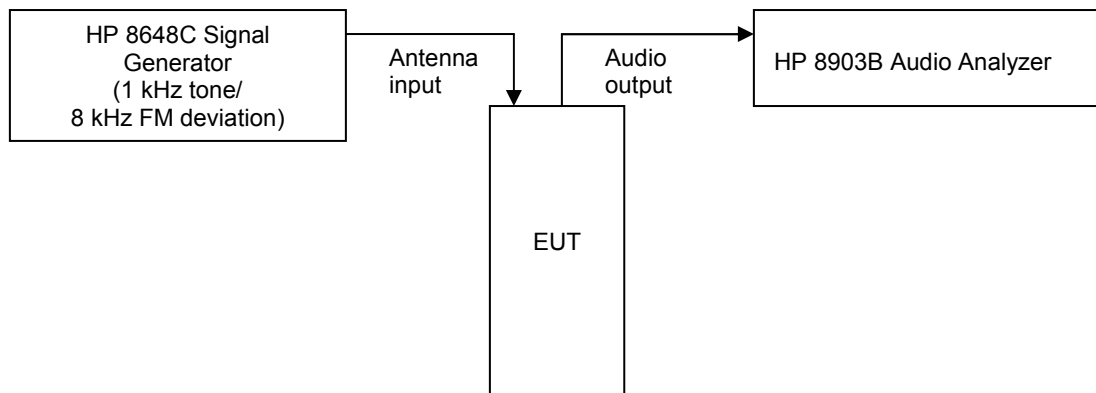

Frequencies used on the signal generator were 824.04, 836.50, and 848.97 MHz for the mobile band, and 869.04, 881.50, and 893.97 MHz for the base band.

The DJ-V17T unit reference level used was -70 dBm from the signal generator. The DJ-V17T unit was scanned on all specified operating frequency ranges (per manufacturer’s specifications.). Signals that were noted as responses were checked with the signal generator off. If they were still present, they were determined to be ambient signals and removed from the response list.

No signals were detected for the 38 dB rejection test requirements.

6.1 38 dB Rejection Test Data for Base Band (869.040-893.970 MHz)

Table 6-1: 38 dB Rejection {Frequency Injected: 869.040 MHz} (Cellular Band)

Frequency Injected: 869.040 MHz		Temperature: 80°F; Humidity: 22%		
Frequency Detected (MHz)	Level 12 dB SINAD at 869.040 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

Table 6-2: 38 dB Rejection {Frequency Injected: 881.500 MHz} (Cellular Band)

Frequency Injected: 881.500 MHz		Temperature: 80°F; Humidity: 22%%		
Frequency Detected (MHz)	Level 12 dB SINAD at 881.500 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

Table 6-3: 38 dB Rejection {Frequency Injected: 893.970 MHz} (Cellular Band)

Frequency Injected: 893.970 MHz		Temperature: 80°F; Humidity: 22%		
Frequency Detected (MHz)	Level 12 dB SINAD at 893.970 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

6.2 38dB Rejection Test Data for Mobile Band (824.040-848.970 MHz)

Table 6-4: 38 dB Rejection {Frequency Injected: 824.040 MHz} (Mobile Band)

Frequency Injected: 824.040 MHz		Temperature: 80°F; Humidity: 22%		
Frequency Detected (MHz)	Level 12 dB SINAD at 824.040 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

Table 6-5: 38 dB Rejection {Frequency Injected: 836.500 MHz} (Mobile Band)

Frequency Injected: 836.505 MHz		Temperature: 80°F; Humidity: 22%		
Frequency Detected (MHz)	Level 12 dB SINAD at 836.500 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

Table 6-6: 38 dB Rejection {Frequency Injected: 848.970 MHz} (Mobile Band)

Frequency Injected: 848.970 MHz		Temperature: 80°F; Humidity: 22%		
Frequency Detected (MHz)	Level 12 dB SINAD at 848.970 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

Table 6-7: Equipment Used for Testing

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
901157	Marconi	2022D	Signal Generator	119161/056	7/29/06
901067	Hewlett Packard	HP8903B	Audio Analyzer	2450A00135	5/13/06

Test Personnel:



Signature: _____ Typed Name: Daniel Baltzell Date: February 8, 2006

7 Conclusion

The data in this measurement report shows that the Alinco Incorporated Model DJ-V17T, FCC ID: **PH3DJ-V17T**, IC: 3070C-DJV17T, complies with all applicable requirements of Parts 2 and 15.121 of the FCC Rules and Industry Canada RSS-215, Issue 1.