



Engineering and Testing for EMC and Safety Compliance

FCC CERTIFICATION TEST REPORT

UHF FM HANDHELD TRANCEIVER

MODEL: DJ-S45T
FCC ID: PH3DJ-S45T
IC: 3070C-DJS45T

Alinco Incorporated
Electronics Division
Shin-Dai Building 9F
2-6, 1-Chome, Dojimahama, Kita-ku
Osaka 530-0004 Japan

October 10, 2005

Standards Referenced for this Report	
Part 2: 2004	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 15.121: 2004	Radio Frequency Devices; Scanning Receivers and Frequency Converters Used with Scanning Receivers
ANSI C63.4-2003	Standard Format Measurement/Technical Report Personal Computer and Peripherals
RSS-215; Issue 1 (Provisional)	Analogue Scanner Receivers

Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
420-474	N/A	N/A	N/A

REPORT PREPARED BY:

Test Engineer: Daniel Biggs
Administrative Writer: Daniel Biggs

Rhein Tech Laboratories, Inc.

Document Number: 2005166

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc.

Table of Contents

1	General Information	4
1.1	Modifications.....	4
1.2	Related Submittal(s)/Grant(s).....	4
1.3	Test Methodology	4
1.4	Test Facility	4
2	Conformance Statement.....	5
3	System Test Configuration.....	6
3.1	Justification	6
3.2	Exercising the EUT	6
3.3	Test System Details.....	6
3.4	Configuration of Tested System.....	7
4	AC Conducted Emissions	8
4.1	Site and Test Description.....	8
4.2	Test Limits	8
4.3	Conducted Emissions Test Data	9
5	Radiated Emissions – FCC Rules and Regulations Part 15 §15.109(a): Radiated Emissions Limits; RSS-215 Section 7 - Reciever Spurious Emissions	11
5.1	Test Methodology for Radiated Emissions Measurements.....	11
5.2	Radiated Emissions Data	12
6	FCC Rules and Regulations Part 15 §15.121(b) - 38 dB Rejection Test	13
6.1	38 dB Rejection Test Data for Base Band (869.040-893.970 MHz)	14
6.2	38dB Rejection Test Data for Mobile Band (824.040-848.970 MHz)	14
7	Conclusion	15

Table Index

Table 1:	Equipment Under Test (EUT).....	6
Table 2:	Equipment Used for Testing	10
Table 2:	Radiated Emissions	12
Table 3:	Equipment Used for Testing	12
Table 4:	38 dB Rejection {Frequency Injected: 869.040 MHz} (Cellular Band).....	14
Table 5:	38 dB Rejection {Frequency Injected: 881.500 MHz} (Cellular Band).....	14
Table 6:	38 dB Rejection {Frequency Injected: 893.970 MHz} (Cellular Band).....	14
Table 8:	38 dB Rejection {Frequency Injected: 824.040 MHz} (Mobile Band)	14
Table 9:	38 dB Rejection {Frequency Injected: 836.500 MHz} (Mobile Band)	14
Table 10:	38 dB Rejection {Frequency Injected: 848.970 MHz} (Mobile Band)	14
Table 7:	Equipment Used for Testing	15

Appendix Index

Appendix A:	Agency Authorization Letter	16
Appendix B:	Confidentiality Request Letter	17
Appendix C:	Attestation Letter	18
Appendix D:	Label & Location Information.....	19
Appendix E:	Product Description	21
Appendix F:	Block Diagram.....	22
Appendix G:	Schematics.....	23
Appendix H:	Manual	24
Appendix I:	Test Configuration Pictures	25
Appendix J:	External Photographs.....	26
Appendix K:	Internal Photographs	29

Photograph Index

Photograph 1:	FCC ID/IC ID Label location	20
Photograph 2:	Warning Label Location on End of EUT	20
Photograph 3:	Radiated Emissions Test Configuration (Front View)	25
Photograph 4:	Radiated Emissions Test Configuration (Rear View).....	25
Photograph 5:	Front of EUT	26
Photograph 6:	Top of EUT	26
Photograph 7:	Back of EUT	27
Photograph 8:	Bottom of EUT	27
Photograph 9:	Charger and Adapter	28
Photograph 10:	Antenna	28
Photograph 11:	Upper PCB Top View.....	29
Photograph 12:	Upper PCB Bottom View	30
Photograph 13:	Lower PCB	31
Photograph 14:	Bottom Case and Battery.....	32

1 General Information

The following application for FCC Certification of an analog scanning receiver is prepared on behalf of Alinco Incorporated; Electronics Division, in accordance with FCC Rules and Regulations Parts 2 and 15 and Industry Canada RSS-215. The Equipment Under Test (EUT) is Model DJ-S45T, FCC ID: PH3DJ-S45T. The test results reported in this document relate only to the item that was tested.

All measurements contained in this application were conducted in accordance with ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 2003. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Some accessories are used to increase sensitivity and prevent overloading of the measuring instrument. Calibration checks are performed regularly on the instruments, and all accessories including the high pass filter, preamplifier and cables.

1.1 Modifications

No modifications were made during testing.

1.2 Related Submittal(s)/Grant(s)

This is an original certification submission.

1.3 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4 2003. Radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report, submitted to, and approved by the Federal Communications Commission; to perform AC line conducted and radiated emissions testing (ANSI C63.4 2003).

2 Conformance Statement

Standards Referenced for this Report	
Part 2: 2004	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 15.121: 2004	Radio Frequency Devices; Scanning Receivers and Frequency Converters Used with Scanning Receivers
ANSI C63.4-2003	Standard Format Measurement/Technical Report Personal Computer and Peripherals
RSS-215; Issue 1 (Provisional)	Analogue Scanner Receivers

Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
420-474	N/A	N/A	N/A

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described above. No modifications were made to the equipment during testing in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to, or exclusions from the ANSI C63.4 test methodology.

Signature:



Date: October 10, 2005

Typed/Printed Name: Desmond A. Fraser

Position: President
(NVLAP Signatory)

 Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 20061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

3 System Test Configuration

3.1 Justification

To complete the test configuration required by the FCC, the receiver was connected to an external antenna, which receives a signal from a signal generator output. With the antenna installed, the receiver indicator was used to determine optimal reception. The EUT's intermediate frequencies (IF), local oscillators (LO), crystal oscillators and harmonics of each were investigated. Conducted emissions were measured from the AC port of the charger. All modes were investigated and tested, including standby mode and scanning mode. The final radiated data was taken with the EUT locked to a set frequency.

3.2 Exercising the EUT

The DJ-S45T is a receiver designed to function at the following frequency range: 420 – 474 MHz. The following frequencies were tested: 420, 440, 460, 473.995 MHz. In order to activate the receiver circuitry, a signal was transmitted from a signal generator. This allowed the EUT to function in its typical state throughout the course of all testing.


3.3 Test System Details

The test sample was received on September 27, 2005. The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system are:

Table 3-1: EQUIPMENT UNDER TEST (EUT)

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
UHF FM Mobile Transceiver	Alinco	DJ-S45T	M000490	PH3DJ-S45T	N/A	16895
Charging stand	Alinco	EDC-138	N/A	N/A	N/A	16879
Adapter	Alinco	EDC-140	N/A	N/A	N/A	16880
Li-ion rechargeable battery pack	Alinco	EBP-60	N/A	N/A	N/A	16881

3.4 Configuration of Tested System

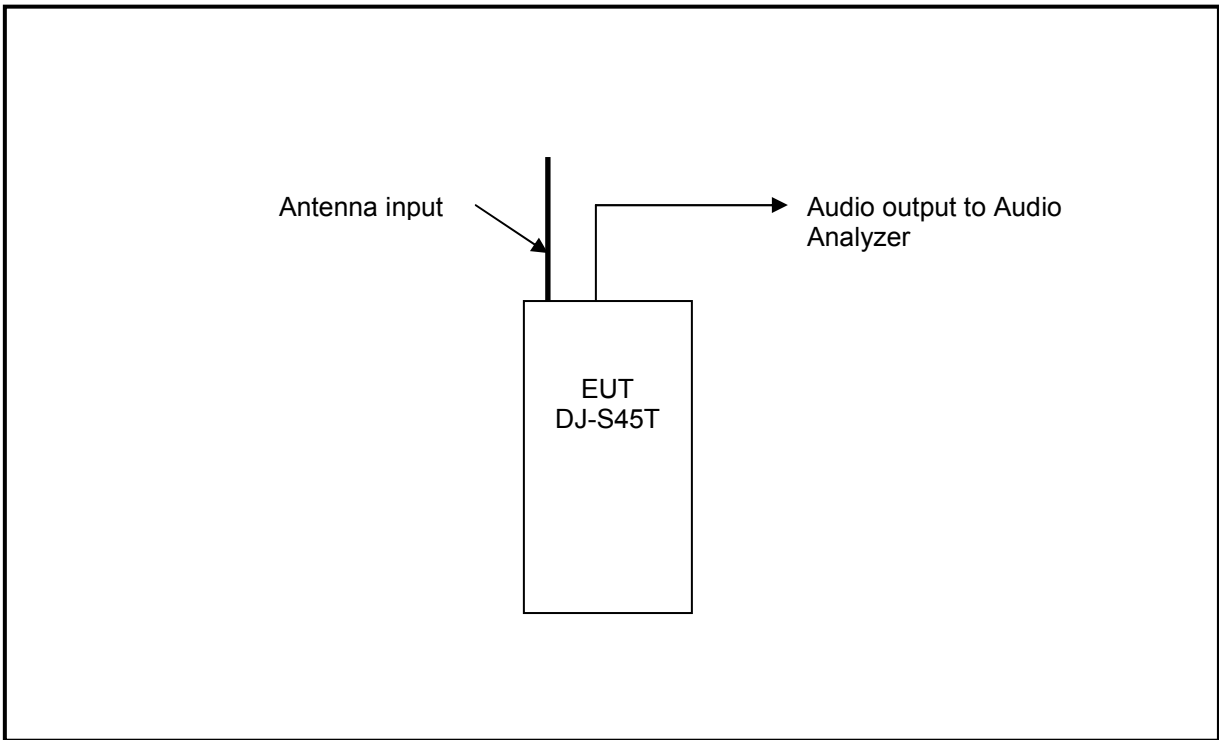

4 AC Conducted Emissions - FCC Rules and Regulations Part 15 §15.107(b): Conducted Limits

4.1 Site and Test Description

The power line conducted emission measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50-ohm/50 microhenry Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable).

The analyzer's 6 dB bandwidth was set to 9 kHz. Video filter less than 10 times the resolution bandwidth is not used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded.

Conducted measurements at telecommunications ports (if applicable) were performed per EN55022: 1998. The limits for Class A and Class B are contained therein.

4.2 Test Limits

Class A Line-Conducted Emissions		
Frequency (MHz)	Limit (dBµV)	
	Quasi-Peak	Average
0.15 to 0.50	79	66
0.50 to 30.0	73	60

Class B Line-Conducted Emissions		
Frequency (MHz)	Limit (dBµV)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.00	56	46
5.00 to 30.00	60	50

4.3 Conducted Emissions Test Data

Table 4-1: Conducted Emissions Test Data – Mode RX, Neutral Side Line 1, CH 450

Temperature: 75°F Humidity: 60%									
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	CISPR B QP Limit (dBuV)	CISPR B QP Margin (dBuV)	CISPR B AV Limit (dBuV)	CISPR B AV Margin (dBuV)	Pass/Fail
0.173	Pk	50.0	0.2	50.2	64.8	-14.6	54.8	-4.6	Pass
0.232	Pk	42.6	0.2	42.8	62.4	-19.6	52.4	-9.6	Pass
0.289	Pk	43.2	0.2	43.4	60.6	-17.2	50.6	-7.2	Pass
0.349	Pk	44.6	0.3	44.9	59.0	-14.1	49.0	-4.1	Pass
0.407	Pk	43.0	0.3	43.3	57.7	-14.4	47.7	-4.4	Pass
0.465	Pk	39.2	0.3	39.5	56.6	-17.1	46.6	-7.1	Pass
0.638	Av	33.2	0.3	33.5	56.0	-22.5	46.0	-12.5	Pass
0.869	Av	33.4	0.4	33.8	56.0	-22.2	46.0	-12.2	Pass
1.391	Av	33.7	0.6	34.3	56.0	-21.7	46.0	-11.7	Pass
2.606	Av	25.2	0.9	26.1	56.0	-29.9	46.0	-19.9	Pass
4.921	Av	24.8	1.2	26.0	56.0	-30.0	46.0	-20.0	Pass
24.834	Pk	25.1	2.7	27.8	60.0	-32.2	50.0	-22.2	Pass

Limit: CISPR B

Table 4-2: Conducted Emissions Test Data – Mode RX, Hot Side Line 2, CH 450

Temperature: 75°F Humidity: 60%									
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	CISPR B QP Limit (dBuV)	CISPR B QP Margin (dBuV)	CISPR B AV Limit (dBuV)	CISPR B AV Margin (dBuV)	Pass/Fail
0.637	Av	26.7	0.3	27.0	56.0	-29.0	46.0	-19.0	Pass
0.812	Av	25.6	0.4	26.0	56.0	-30.0	46.0	-20.0	Pass
0.870	Av	27.0	0.4	27.4	56.0	-28.6	46.0	-18.6	Pass
1.042	Av	25.5	0.5	26.0	56.0	-30.0	46.0	-20.0	Pass
1.389	Av	25.7	0.6	26.3	56.0	-29.7	46.0	-19.7	Pass
1.447	Av	23.9	0.6	24.5	56.0	-31.5	46.0	-21.5	Pass
1.854	Av	22.4	0.8	23.2	56.0	-32.8	46.0	-22.8	Pass
2.434	Av	18.5	0.9	19.4	56.0	-36.6	46.0	-26.6	Pass
3.420	Av	18.8	1.0	19.8	56.0	-36.2	46.0	-26.2	Pass
4.754	Av	21.1	1.2	22.3	56.0	-33.7	46.0	-23.7	Pass
5.020	Pk	38.8	1.2	40.0	60.0	-20.0	50.0	-10.0	Pass
24.830	Pk	21.4	2.7	24.1	60.0	-35.9	50.0	-25.9	Pass
24.848	Pk	22.9	2.7	25.6	60.0	-34.4	50.0	-24.4	Pass

Limit: CISPR B

Table 4-3: Equipment Used for Testing

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
900969	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	2412A00414	08/3/06
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	08/3/06
900930	Hewlett Packard	85662A	Spectrum Analyzer Display	3144A20839	08/3/06
901084	AFJ	LS16	16A LISN	16010020082	12/24/05

Test Personnel:

Signature: 

Date: October 7, 2005

Typed Name: Daniel Biggs

5 Radiated Emissions – FCC Rules and Regulations Part 15 §15.109(a): Radiated Emissions Limits; RSS-215 Section 7 - Receiver Spurious Emissions

5.1 Test Methodology for Radiated Emissions Measurements

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one meter and three meter distances, in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction, and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three meter, open-field test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane. The spectrum was examined from 30 MHz to 1000 MHz using a spectrum analyzer, a quasi-peak adapter, and EMCO log periodic and biconical antenna. In order to gain sensitivity, a preamplifier was connected in series between the antenna and the input of the spectrum analyzer.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. No video filter less than 10 times the resolution bandwidth was used. The second harmonic of the highest LO was tested. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech Quality Manual, Section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.

5.2 Radiated Emissions Data

Table 5-1: Radiated Emissions – Mode RX

Temperature: 82°F					Humidity: 62%				
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
398.300	Qp	V	0	1.0	40.6	-12.4	28.2	46.0	-17.8
418.300	Qp	V	0	1.0	42.7	-11.3	31.4	46.0	-14.6
438.300	Qp	V	0	1.0	46.5	-11.1	35.4	46.0	-10.6
452.291	Qp	V	0	1.0	46.4	-11.2	35.2	46.0	-10.8
796.600	Qp	V	0	1.0	37.8	-5.6	32.2	46.0	-13.8
836.600	Qp	V	0	1.0	39.0	-5.1	33.9	46.0	-12.1
876.600	Qp	V	0	1.0	42.1	-4.6	37.5	46.0	-8.5
904.582	Qp	V	0	1.0	39.9	-4.2	35.7	46.0	-10.3
1194.900	Av	V	0	1.0	36.6	0.1	36.7	54.0	-17.3
1254.900	Av	V	0	1.0	36.2	1.3	37.5	54.0	-16.5
1314.900	Av	V	0	1.0	37.8	1.7	39.5	54.0	-14.5

Notes: All readings are quasi-peak, unless stated otherwise.

A low, middle, and high channel was checked for every frequency band.

Limit/Distance: FCC B/3M

Table 5-2: Equipment Used for Testing

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	8/3/06
900930	Hewlett Packard	85662A	Spectrum Analyzer Display Section	3144A20839	8/3/06
901053	Schaffner & Chase	CBL6112B	Bilog Antenna (20 MHz - 2 GHz)	2648	9/20/06
*900905	Rhein Tech Laboratories, Inc.	PR-1040	Pre Amplifier 40 dB (10 MHz – 2 GHz)	1006	N/A
900969	Hewlett Packard	85650A	Quasi-Peak Adapter	2412A00414	8/3/06

*The preamplifier's gain is included in the site correction factor.

Test Personnel:

Signature: 

Date: October 6, 2005


Typed Name: Daniel Biggs

6 FCC Rules and Regulations Part 15 §15.121(b) - 38 dB Rejection Test

A signal generator was connected to the receiver under test, and the output of the receiver was connected to an audio analyzer.

An FM signal was applied to the receiver antenna input with a 1 kHz tone modulated at 8 kHz deviation, and adjusted with the audio analyzer to produce a 12 dB SINAD. This was done across the receiver bands to determine a reference level. The reference level used was that with the highest sensitivity in all of the bands.

The output of the signal generator was then adjusted to a level 40 dB above the reference level established and set to a low, medium, and high frequency in both the mobile and base cellular bands: the mobile band being 824.04 MHz - 848.97 MHz, and the base band being 869.04 MHz - 893.97 MHz. The squelch of the receiver was then set to a minimum threshold level, and scanning begun from the lowest to the highest channel. Whenever the receiver stopped and “un-squelched”, that frequency was noted as a response. After all the frequencies of responses were noted, the signal generator was set to measure the sensitivity at each of these response frequencies. This measurement was the reference sensitivity for the particular received frequency measured. The audio analyzer measurement was used to measure the 12 dB SINAD, which is the spurious value. The difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38 dB.

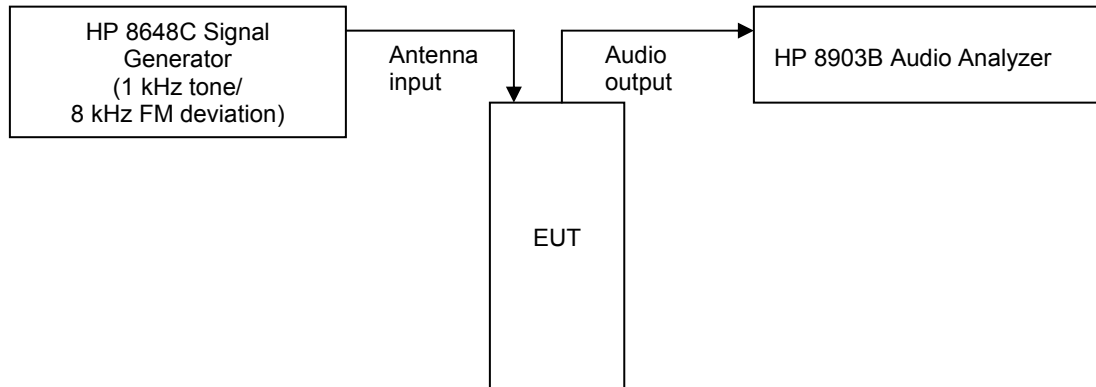

Frequencies used on the signal generator were 824.04, 836.50, and 848.97 MHz for the mobile band, and 869.04, 881.50, and 893.97 MHz for the base band.

The DJ-S45T unit reference level used was -70 dBm from the signal generator. The DJ-S45T unit was scanned on all specified operating frequency ranges (per manufacturer's specifications.). Signals that were noted as responses were checked with the signal generator off. If they were still present, they were determined to be ambient signals and removed from the response list.

No signals were detected for the 38 dB rejection test requirements.

6.1 38 dB Rejection Test Data for Base Band (869.040-893.970 MHz)

Table 6-1: 38 dB Rejection {Frequency Injected: 869.040 MHz} (Cellular Band)

Frequency Injected: 869.040 MHz		Temperature: 72°F; Humidity: 45%		
Frequency Detected (MHz)	Level 12 dB SINAD at 869.040 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

Table 6-2: 38 dB Rejection {Frequency Injected: 881.500 MHz} (Cellular Band)

Frequency Injected: 881.500 MHz		Temperature: 72°F; Humidity: 45%%		
Frequency Detected (MHz)	Level 12 dB SINAD at 881.500 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

Table 6-3: 38 dB Rejection {Frequency Injected: 893.970 MHz} (Cellular Band)

Frequency Injected: 893.970 MHz		Temperature: 72°F; Humidity: 45%		
Frequency Detected (MHz)	Level 12 dB SINAD at 893.970 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

6.2 38dB Rejection Test Data for Mobile Band (824.040-848.970 MHz)

Table 6-4: 38 dB Rejection {Frequency Injected: 824.040 MHz} (Mobile Band)

Frequency Injected: 824.040 MHz		Temperature: 72°F; Humidity: 45%		
Frequency Detected (MHz)	Level 12 dB SINAD at 824.040 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

Table 6-5: 38 dB Rejection {Frequency Injected: 836.500 MHz} (Mobile Band)

Frequency Injected: 836.505 MHz		Temperature: 72°F; Humidity: 45%		
Frequency Detected (MHz)	Level 12 dB SINAD at 836.500 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

Table 6-6: 38 dB Rejection {Frequency Injected: 848.970 MHz} (Mobile Band)

Frequency Injected: 848.970 MHz		Temperature: 72°F; Humidity: 45%		
Frequency Detected (MHz)	Level 12 dB SINAD at 848.970 MHz	Level 12 dB at Frequency Detected	Rejection	Margin
No Frequencies Detected	N/A	N/A	N/A	N/A

Table 6-7: Equipment Used for Testing

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
900917	Hewlett Packard	8648B	Signal Generator	3537A01741	7/29/06
901067	Hewlett Packard	HP8903B	Audio Analyzer	2450A00135	5/13/06

Test Personnel:

Signature:



Date: October 7, 2005

Typed Name: Daniel Biggs

7 Conclusion

The data in this measurement report shows that the Alinco Incorporated Model DJ-S45T, FCC ID: **PH3DJ-S45T**, IC: 3070C-DJS45T, complies with all applicable requirements of Parts 2 and 15.121 of the FCC Rules and Industry Canada RSS-215, Issue 1.