
FCC Test Report

Report No.: AGC01370170801FE08

FCC ID : PH3DR-735T2

PRODUCT DESIGNATION : VHF/UHF twinband FM amateur radio mobile transceiver

BRAND NAME : ALINCO

TEST MODEL : DR-735T

CLIENT : Alinco Incorporated, Electronics Division

DATE OF ISSUE : Jul. 05, 2017

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul. 05, 2017	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	4
2. PRODUCT INFORMATION	5
3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	6
4. SUPPORT EQUIPMENT LIST	7
5. SYSTEM DESCRIPTION.....	7
6. SUMMARY OF TEST RESULTS	8
7. FCC RADIATED EMISSION TEST	9
7.1. TEST EQUIPMENT OF RADIATED EMISSION	9
7.2. LIMITS OF RADIATED EMISSION TEST	9
7.3 BLOCK DIAGRAM OF RADIATED EMISSION TEST	9
7.4 PROCEDURE OF RADIATED EMISSION TEST	10
7.5 TEST RESULT OF RADIATED EMISSION TEST	11
8. ANTENNA CONDUCTED POWER FOR RECEIVERS	13
APPENDIX 1	18
PHOTOGRAPHS OF TEST SETUP.....	18
APPENDIX 2	19
PHOTOGRAPHS OF EUT.....	19

1. VERIFICATION OF COMPLIANCE

Applicant	Alinco Incorporated Electronics Division
Address	Yodoyabashi Dai-Bldg 13F, 4-4-9 Koraibashi, Chuo-ku, Osaka 541-0043 Japan
Manufacturer	Alinco Incorporated Electronics Division
Address	Yodoyabashi Dai-Bldg 13F, 4-4-9 Koraibashi, Chuo-ku, Osaka 541-0043 Japan
Product Designation	VHF/UHF twinband FM amateur radio mobile transceiver
Brand name	ALINCO
Test Model	DR-735T
Hardware Version	V2.0
Software Version	V2.0
Measurement Procedure	ANSI C63.4: 2014
Date of test:	Jul. 01, 2017 to Jul. 05, 2017
Deviation:	None
Condition of Test Sample	Normal

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2014. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested By



Steven Zhou(Zhou Pengyun) Jul. 05, 2017

Reviewed By



Bart Xie(Xie Xiaobin) Jul. 05, 2017

Approved By



Solger Zhang(Zhang Hongyi)
Authorized Officer Jul. 05, 2017

2. PRODUCT INFORMATION

The EUT is a ALINCO designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only
Modulation	FM
RX Frequency Range	108.000MHz - 173.995MHz 400.000MHz - 479.995MHz
Emission Type	F3E
Antenna Designation	Detachable
Antenna Gain	0dBi
Power Supply	DC 13.8V

I/O Port Information (Applicable Not Applicable)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
DC Input Port	1	2.95m, Unshielded	1
Antenna Connect Port	1	0	1
Hand-Operated Microphone Connect Port	1	0.8 m, Unshielded	1

3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.
Description	The test site is constructed and calibrated to meet the FCC requirements in documents TIA/EIA 603
FCC Registration No.	371540

List Of Test Equipment:

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 2, 2017	July 1, 2018
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 2, 2017	July 1, 2018
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 2, 2017	July 1, 2018
RF Cable	SCHWARZBECK	AK9515E	96221	July 2, 2017	July 1, 2018
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 2, 2017	June 1, 2018
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 2, 2017	June 1, 2018
Spectrum analyzer	Agilent	E4407B	MY46185649	June 2, 2017	June 1, 2018
Power Sensor	Agilent	U2021XA	MY55050474	June 2, 2017	June 1, 2018
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	June 2, 2017	June 1, 2018
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 2, 2017	June 1, 2018

4. SUPPORT EQUIPMENT LIST

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
--	--	--	--	--	--

5. SYSTEM DESCRIPTION

EUT test procedure:

1. Connect EUT and peripheral devices.
2. Power on the EUT, the EUT begins to work.
3. Running data transmission and make sure the EUT normal working.

EMC TEST MODES

No.	TEST MODES
1	Scanning mode + Receiving mode
2	No scanning mode

Note:

Only the result of the worst case was recorded in the report.

6. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.107	Conduction Emission	N/A
§15.109	Radiated Emission	Compliant
§15.111	Antenna Conducted Power for receivers	Compliant

7. FCC RADIATED EMISSION TEST


7.1. TEST EQUIPMENT OF RADIATED EMISSION

7.2. LIMITS OF RADIATED EMISSION TEST

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3	40.0
88~216	3	43.5
216~960	3	46.0
Above 960	3	54.0

**Note: The lower limit shall apply at the transition frequency.

7.3 BLOCK DIAGRAM OF RADIATED EMISSION TEST

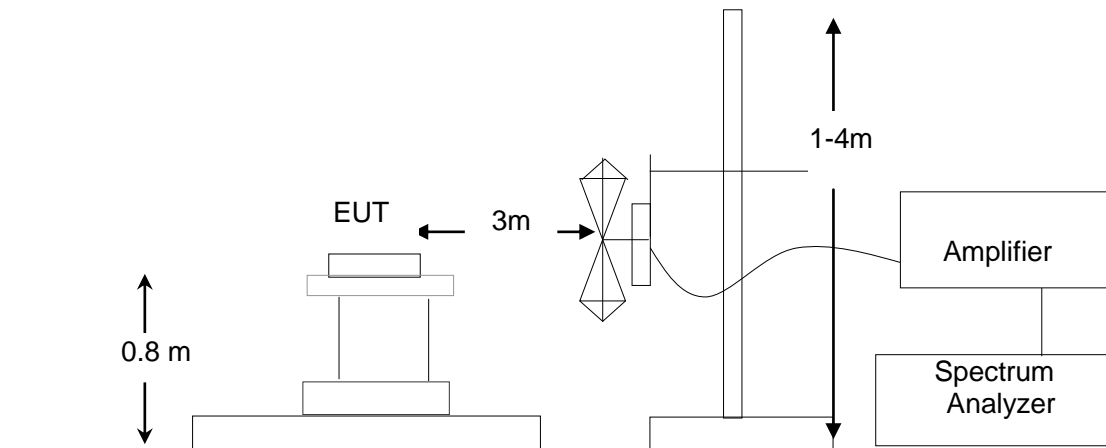

7.4 PROCEDURE OF RADIATED EMISSION TEST


- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) The EUT received power by DC source. All support equipments received AC 120V/60Hz power from socket under the turntable, if any.
- 5) The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7) The test mode(s) were scanned during the test:
- 8) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented.

The test data of the worst case condition(mode 1) was reported on the following Data page

7.5 TEST RESULT OF RADIATED EMISSION TEST

Radiated Emission Test –Horizontal -3m Below 1G


66.9 dBuV/m

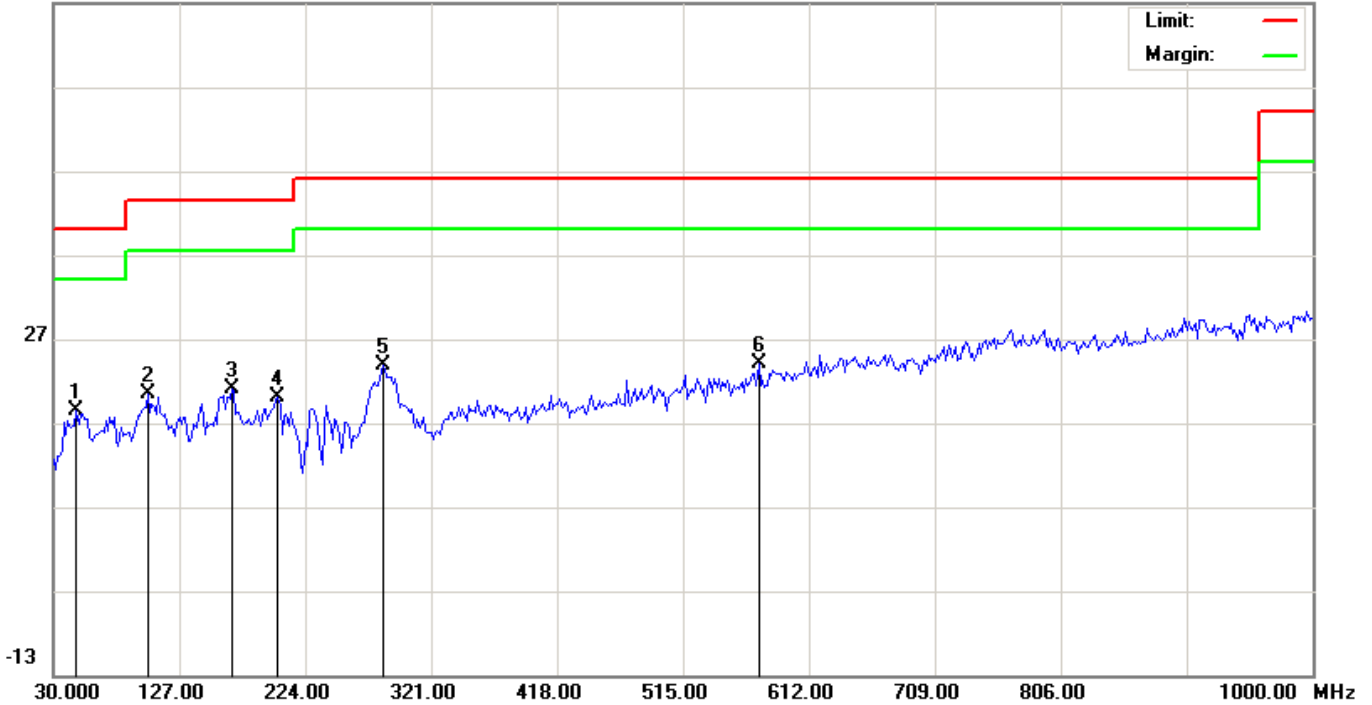

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	47.7832	7.05	11.39	18.44	40.00	-21.56	peak			
2		102.7500	10.54	9.84	20.38	43.50	-23.12	peak			
3		167.4166	10.47	10.60	21.07	43.50	-22.43	peak			
4		202.9833	8.36	11.70	20.06	43.50	-23.44	peak			
5		283.8167	11.05	12.66	23.71	46.00	-22.29	peak			
6		573.2000	0.85	23.06	23.91	46.00	-22.09	peak			

RESULT: PASS

Radiated Emission Test –Vertical -3m Below 1G

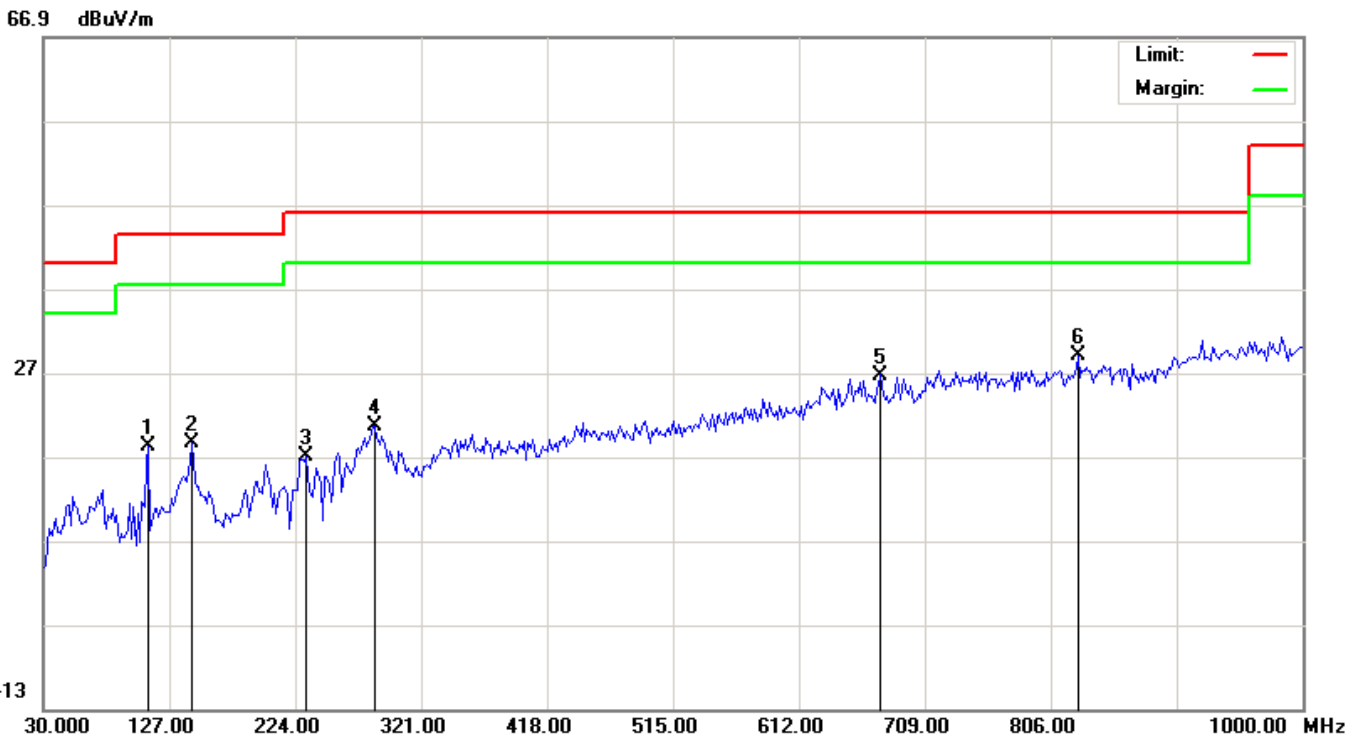

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		110.8332	10.22	7.98	18.20	43.50	-25.30	peak			
2		144.7832	4.50	14.04	18.54	43.50	-24.96	peak			
3		232.0833	8.27	8.73	17.00	46.00	-29.00	peak			
4		285.4332	7.61	12.93	20.54	46.00	-25.46	peak			
5		675.0499	2.18	24.52	26.70	46.00	-19.30	peak			
6	*	827.0167	1.60	27.31	28.91	46.00	-17.09	peak			

RESULT: PASS

- Note:** 1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin = Measurement- Limit..
2. The “Factor” value can be calculated automatically by software of measurement system.
3. Emissions range from 1GHz to 2GHz have 20dB margin. No recording in the test report.
4. Only the data of the worst case would be record in this test report.


8. ANTENNA CONDUCTED POWER FOR RECEIVERS

LIMIT

The antenna conducted power of the receiver as defined in §15.111 shall not exceed the values given in the following tables

Frequency Range	9 KHz to 2GHz
Limit	2.0 nW (-57 dBm)

TEST CONFIGURATION




TEST PROCEDURE


1. The receiver antenna terminal connected to to a spectrum analyzer.
2. The test data of condition (mode 1+ mode 2) was reported on the following Data page.

TEST RESULTS (Mode 1)


Conducted Measurement (9 KHz to 150 KHz)

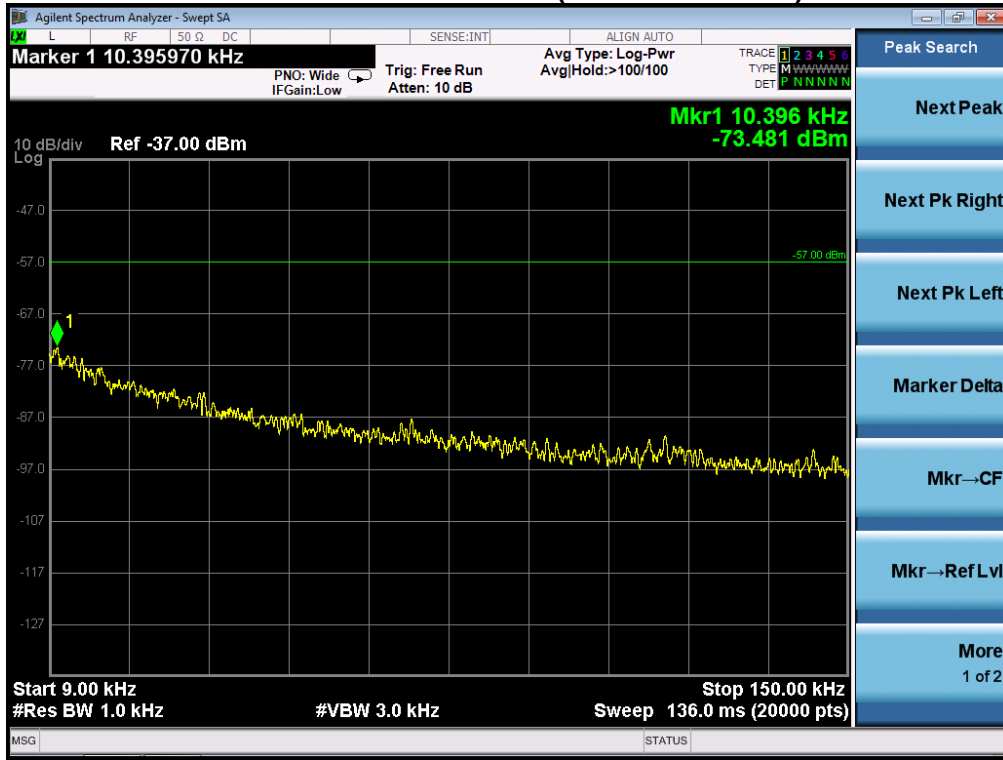


Conducted Measurement (150KHz to 30MHz)

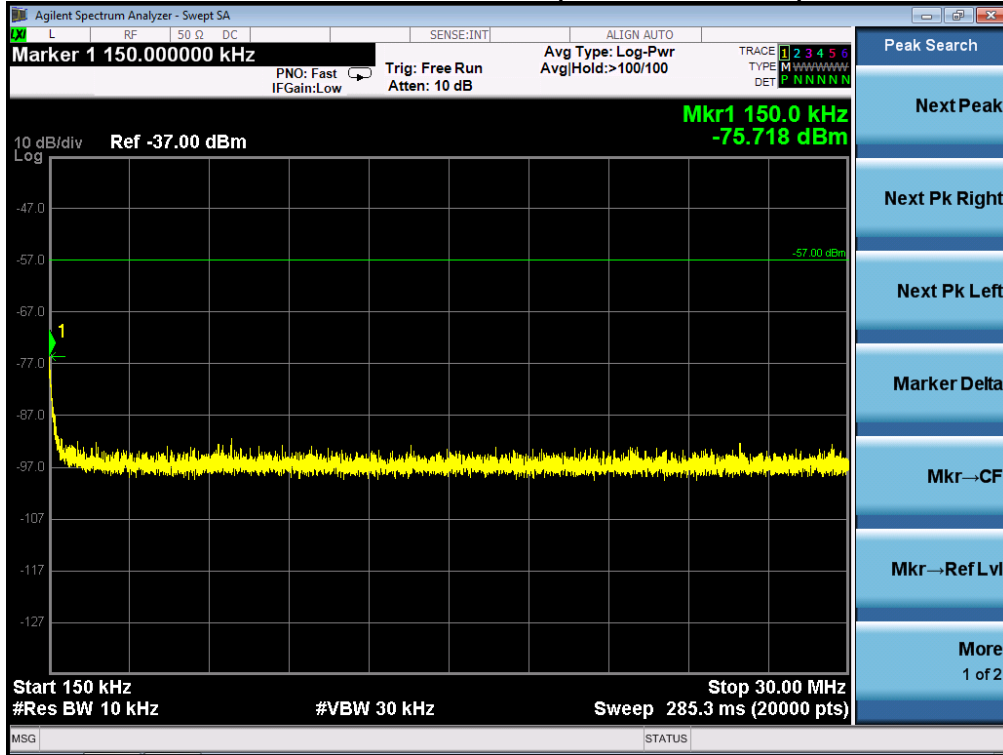

Conducted Measurement (30MHz to 1GHz)

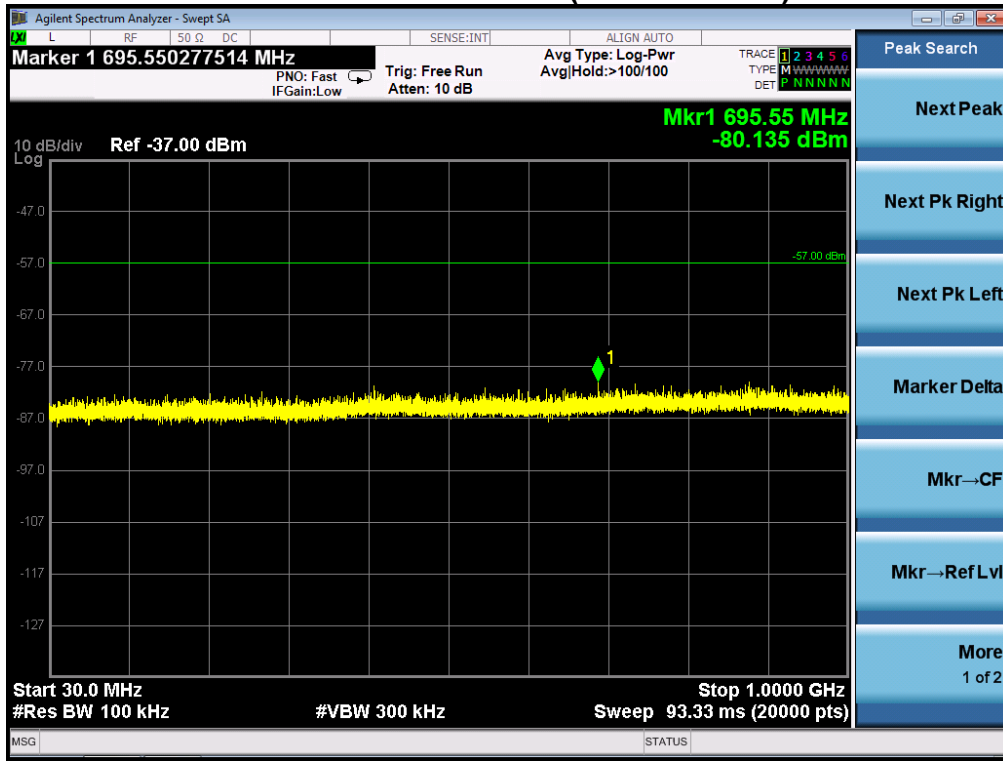


Conducted Measurement (1GHz to 2GHz)

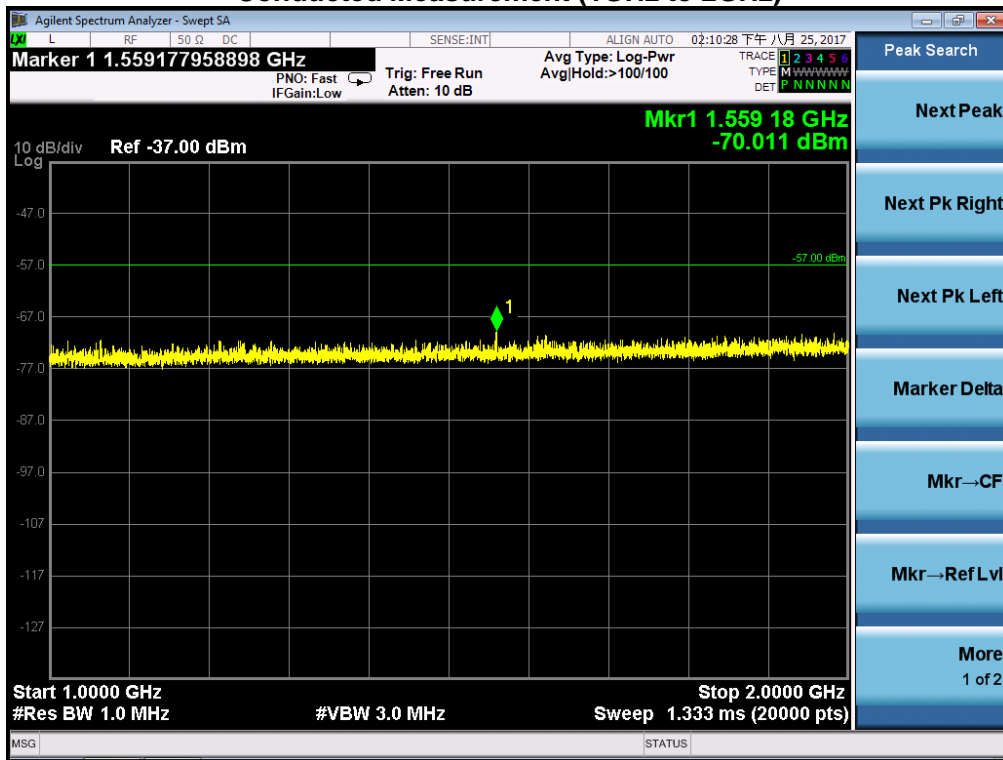


PASS

TEST RESULTS (Mode 2)

Conducted Measurement (9 KHz to 150 KHz)

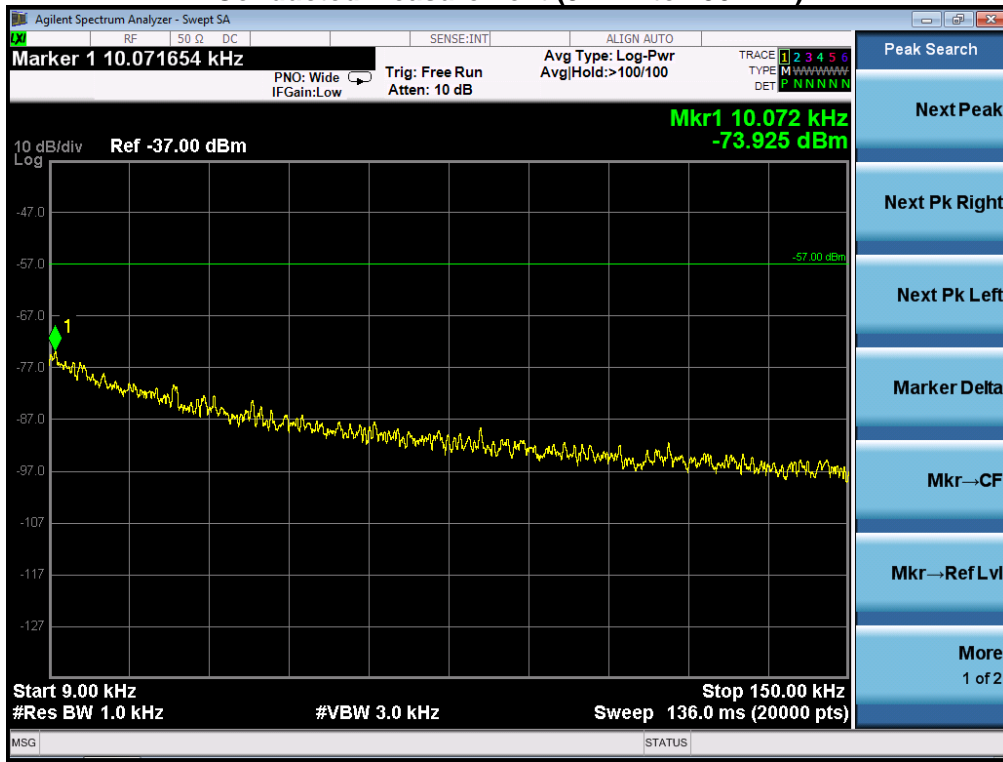


Conducted Measurement (150 KHz to 30MHz)

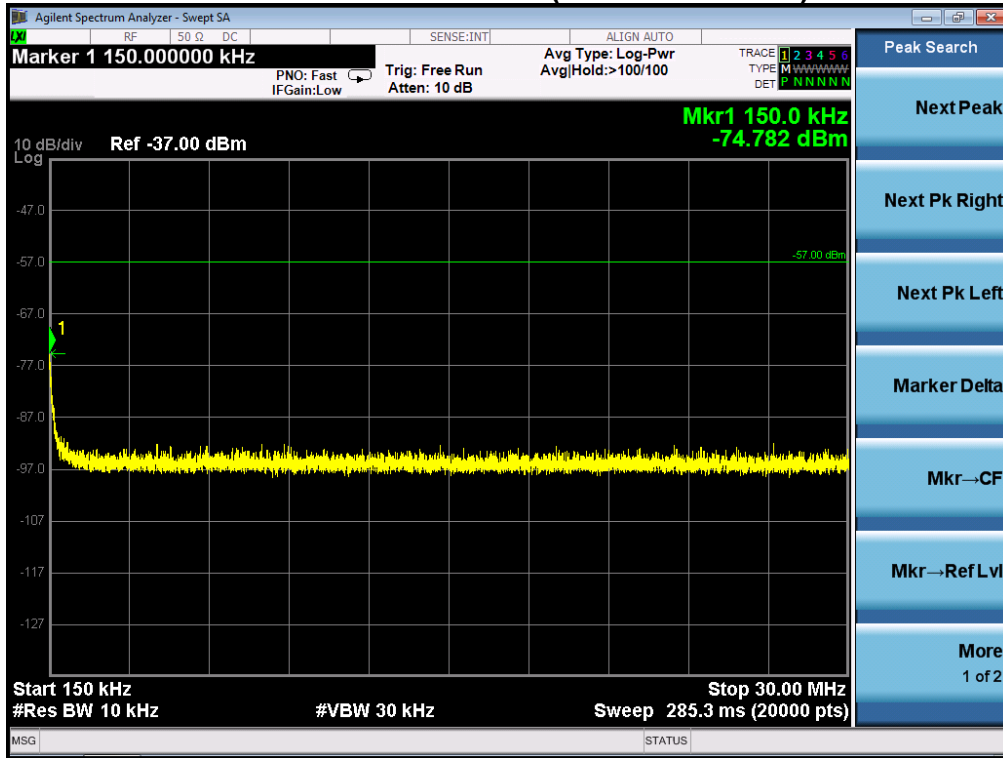


APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

RADIATED TEST SETUP

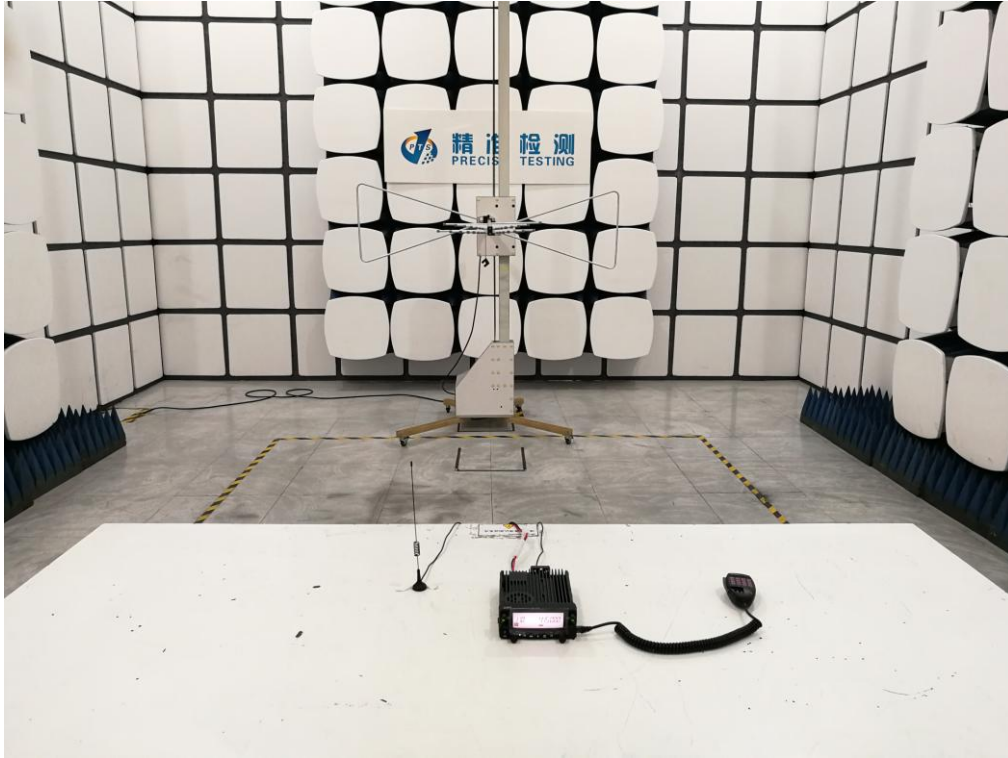

APPENDIX 2 PHOTOGRAPHS OF EUT


TOTAL VIEW OF EUT

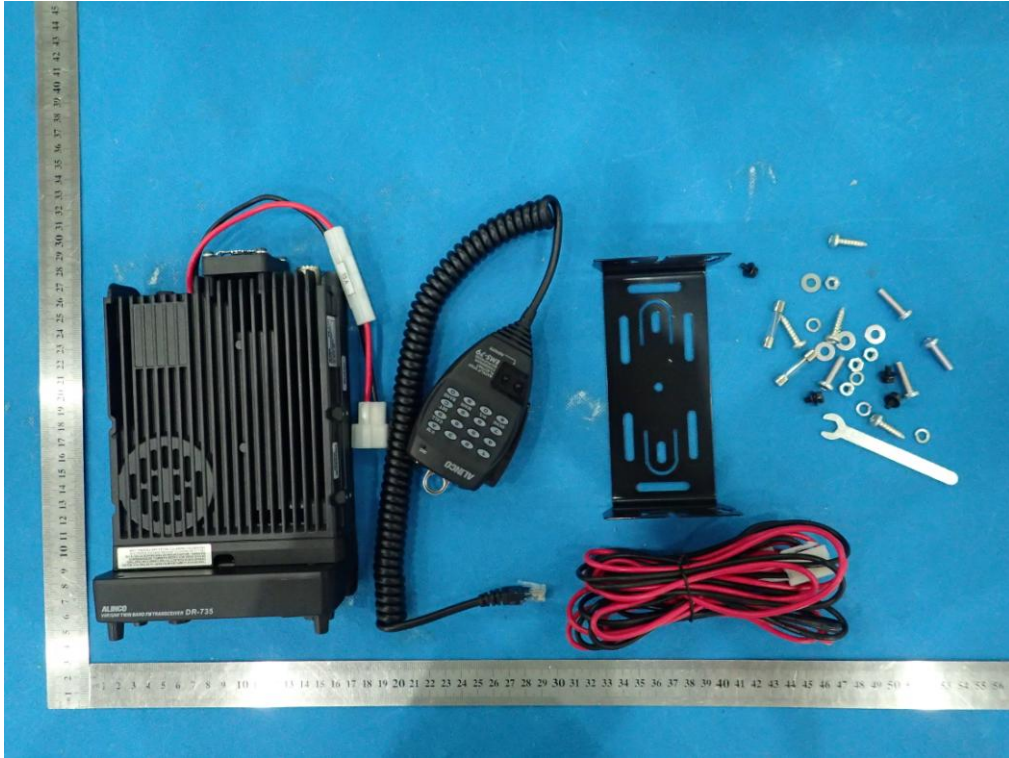


TOP VIEW OF EUT




BOTTOM VIEW OF EUT

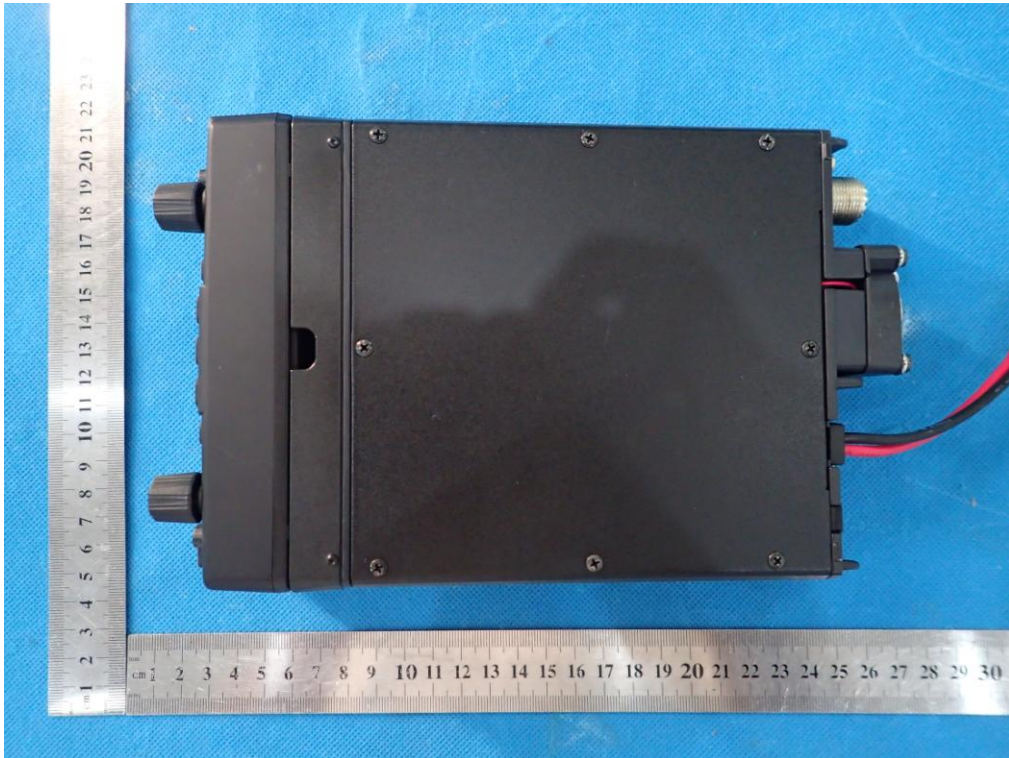

FRONT VIEW OF EUT

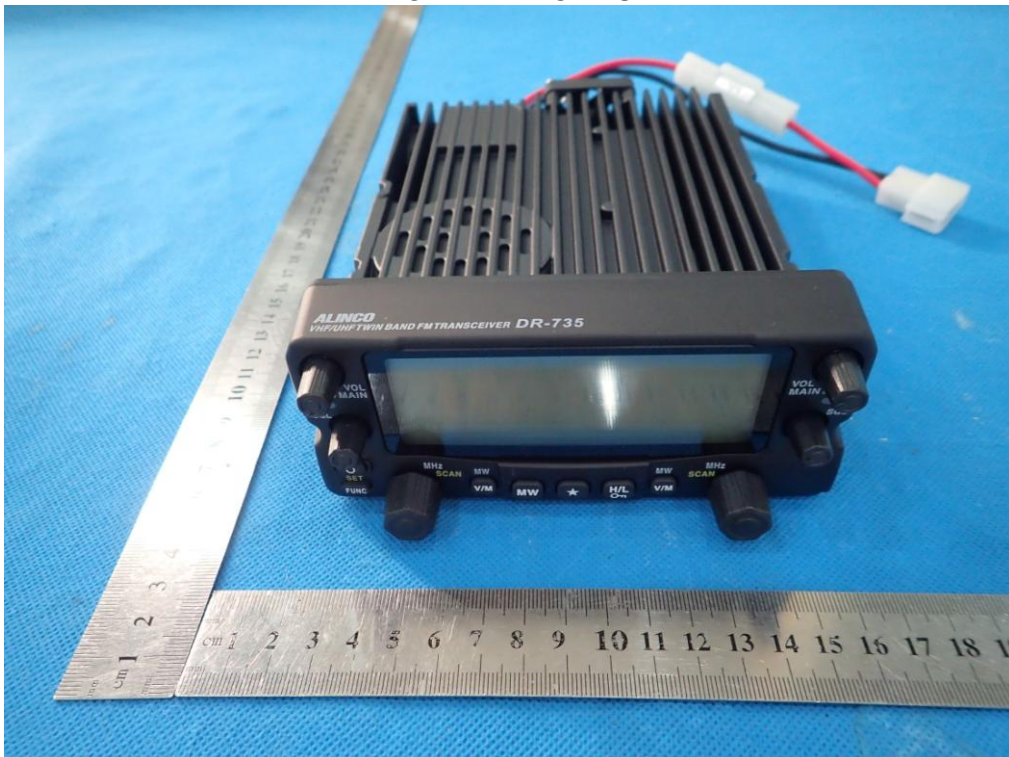

BACK VIEW OF EUT

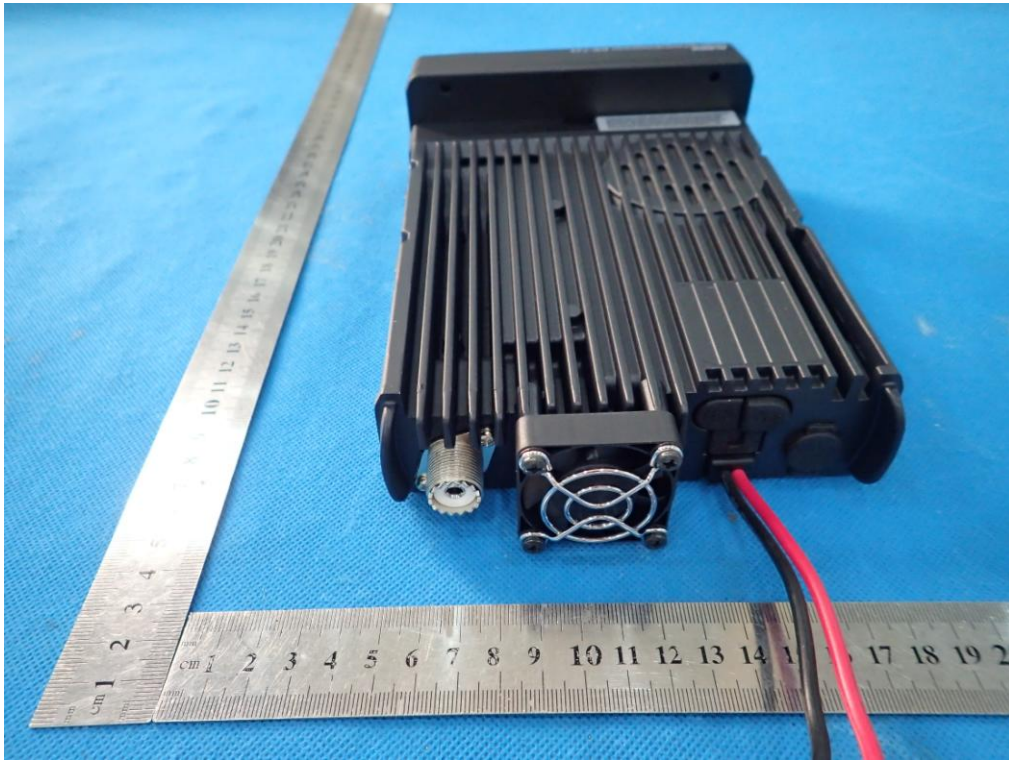

LEFT VIEW OF EUT




RIGHT VIEW OF EUT




OPEN VIEW-1 OF EUT




OPEN VIEW-2 OF EUT

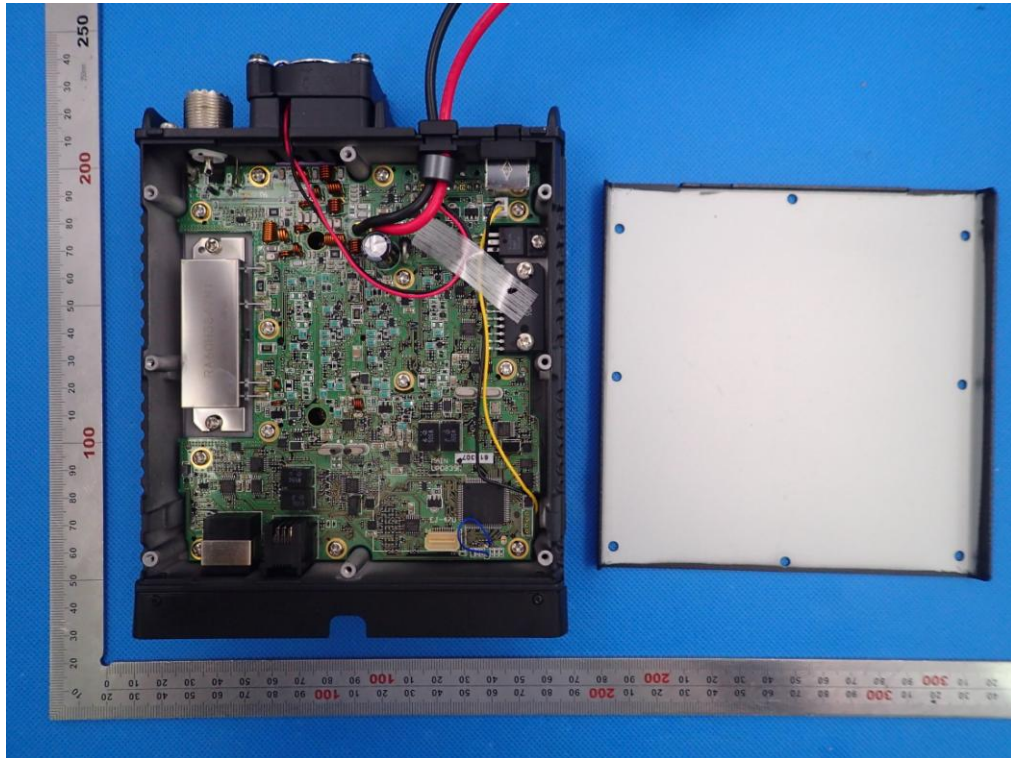


OPEN VIEW-3 OF EUT

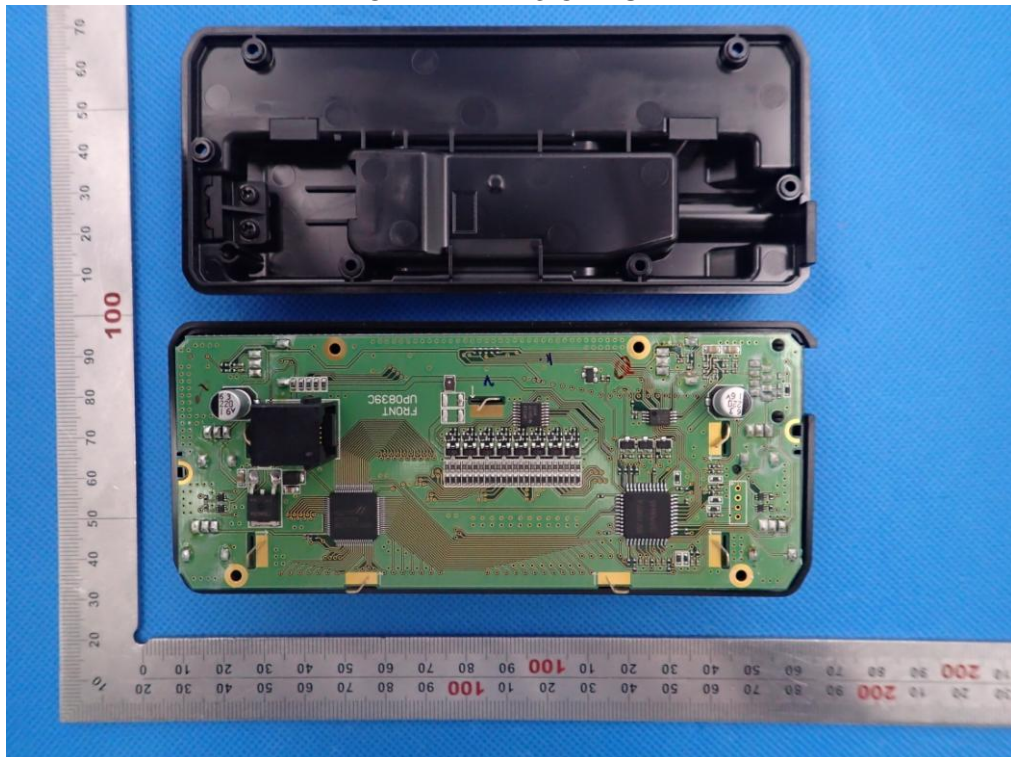


OPEN VIEW-4 OF EUT

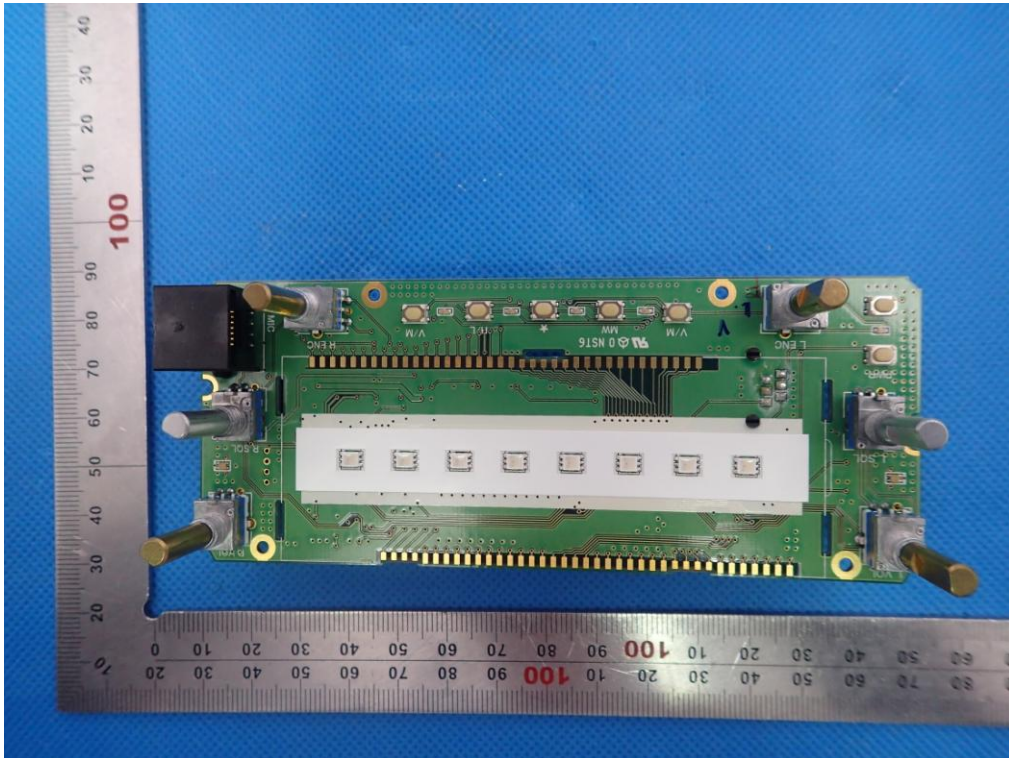


OPEN VIEW-5 OF EUT

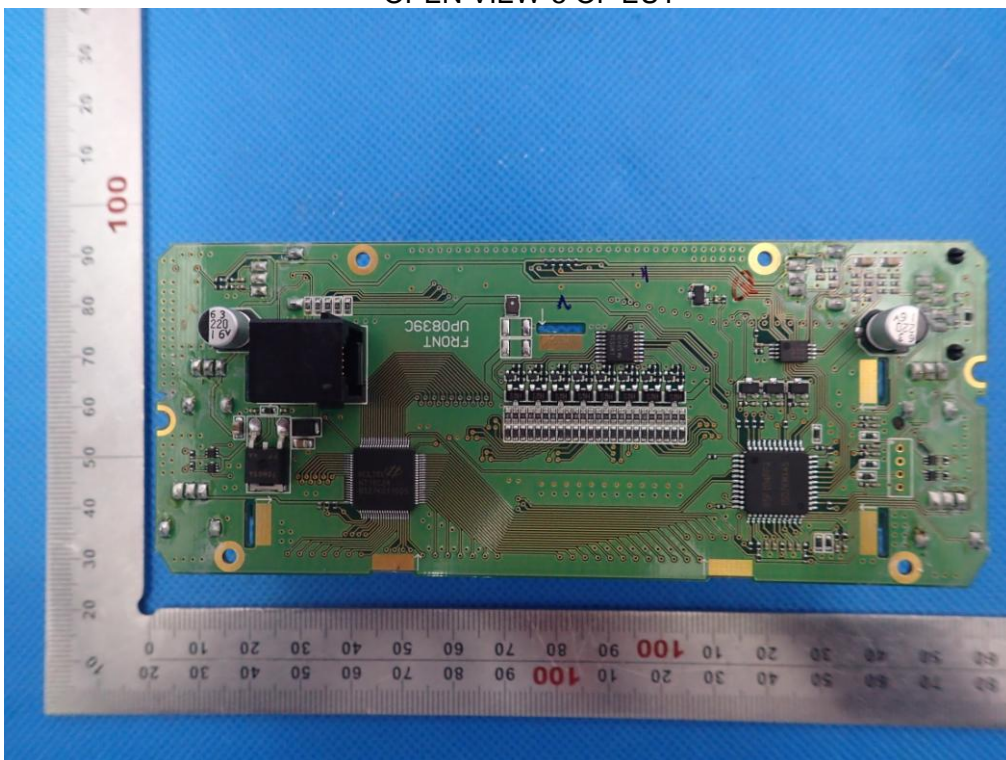


OPEN VIEW-6 OF EUT

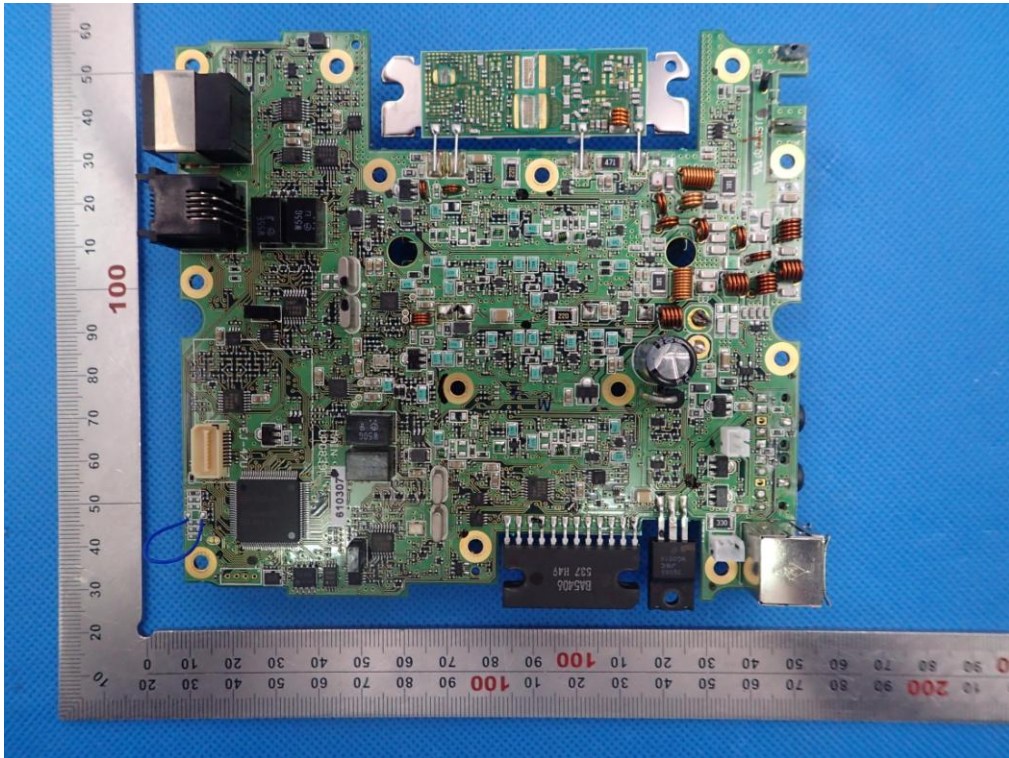


OPEN VIEW-7 OF EUT

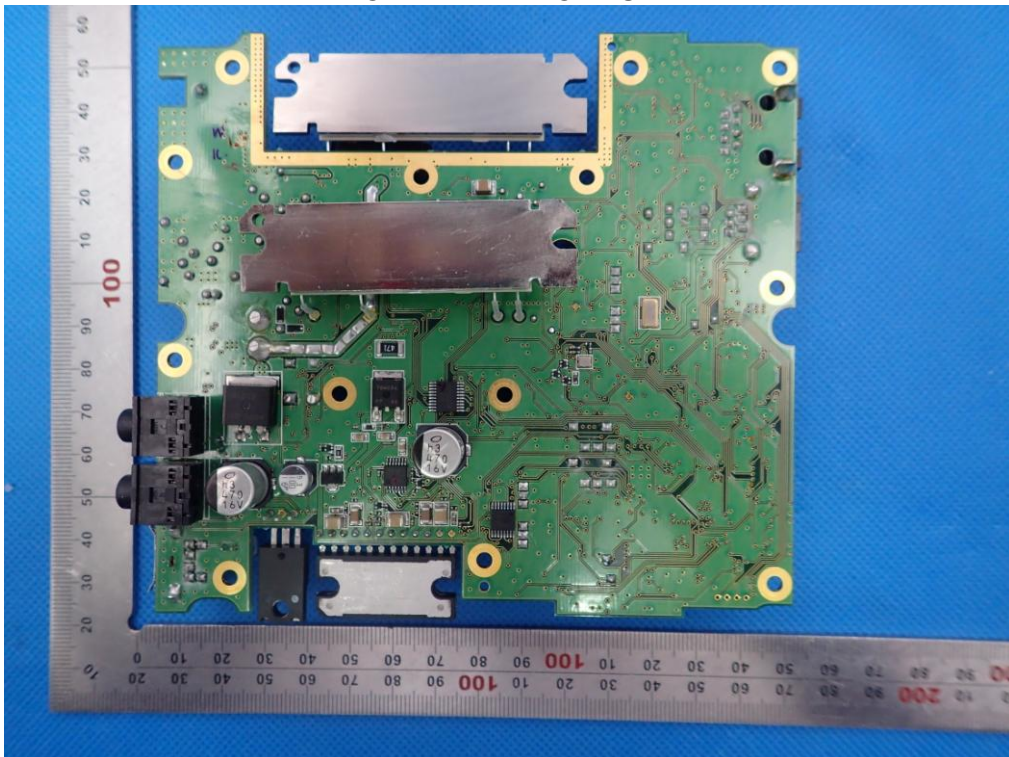

OPEN VIEW-8 OF EUT

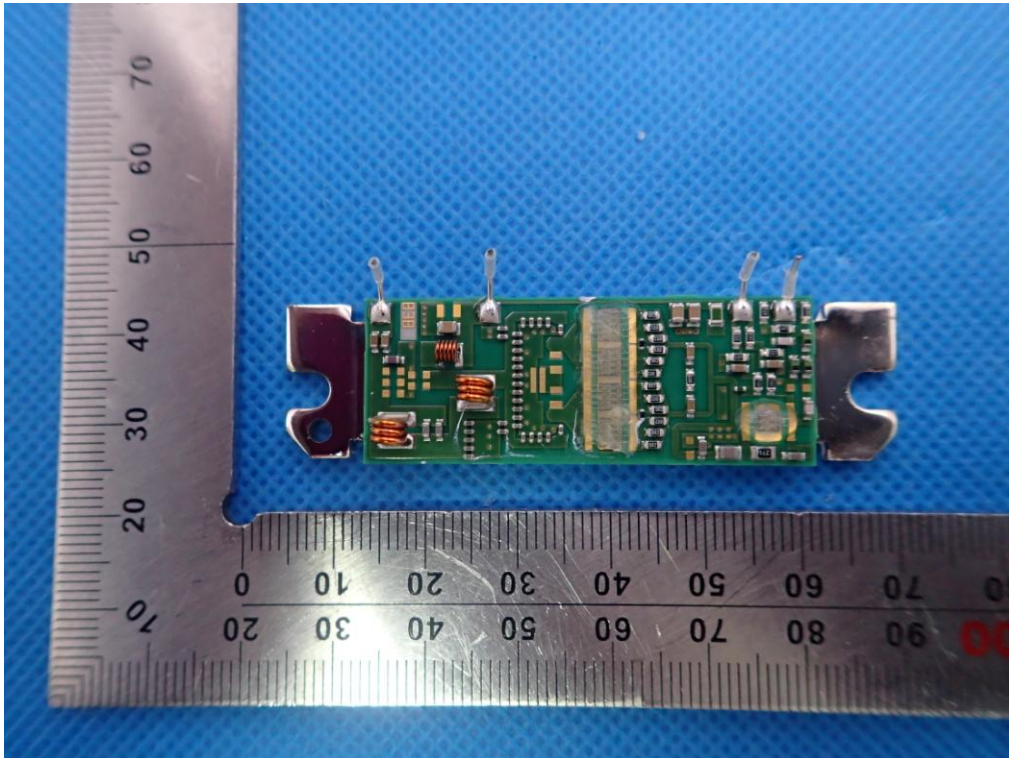

OPEN VIEW-9 OF EUT

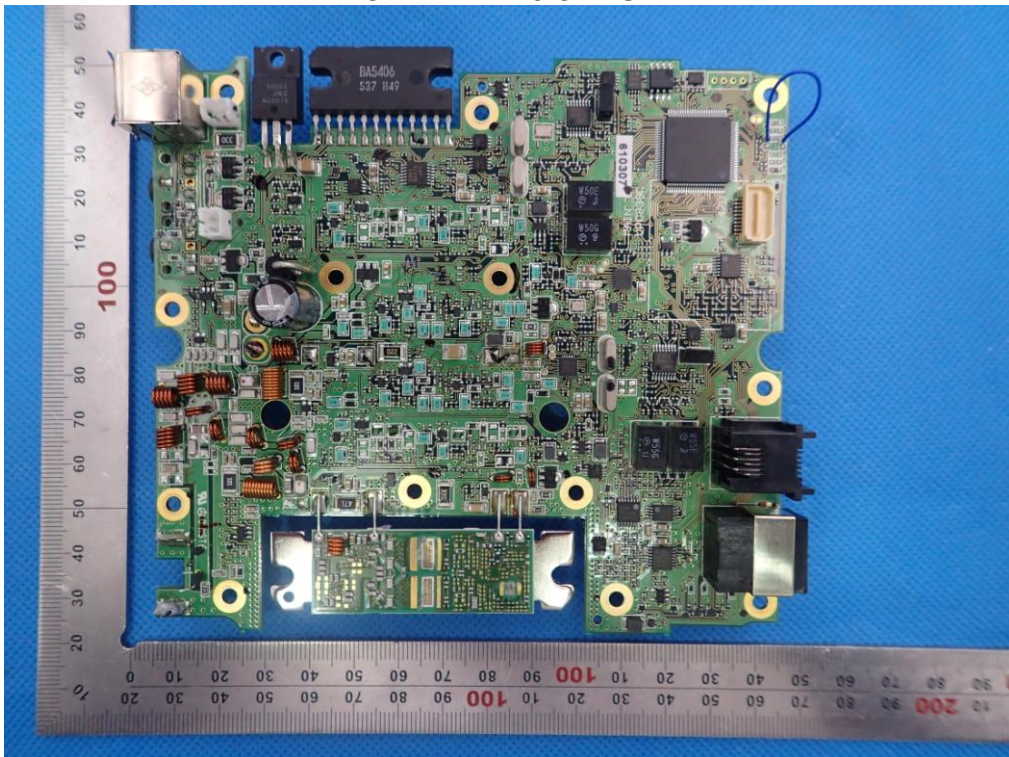

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT




LEFT VIEW OF EUT




RIGHT VIEW OF EUT




OPEN VIEW-1 OF EUT

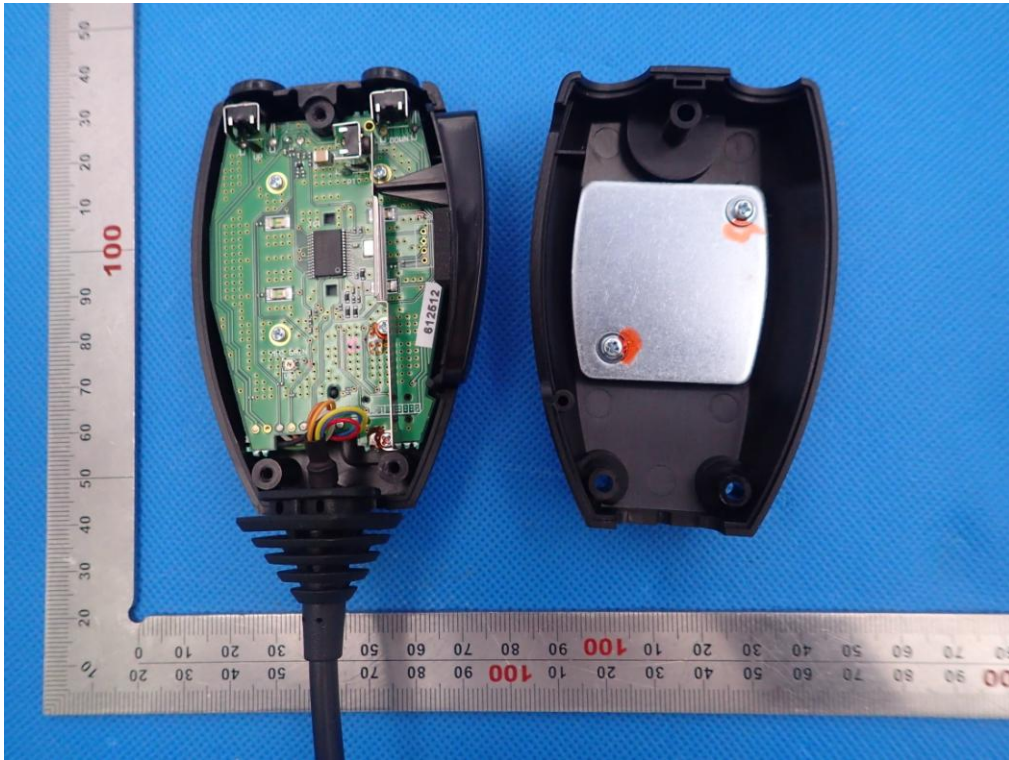

INTERNAL VIEW-2 OF EUT

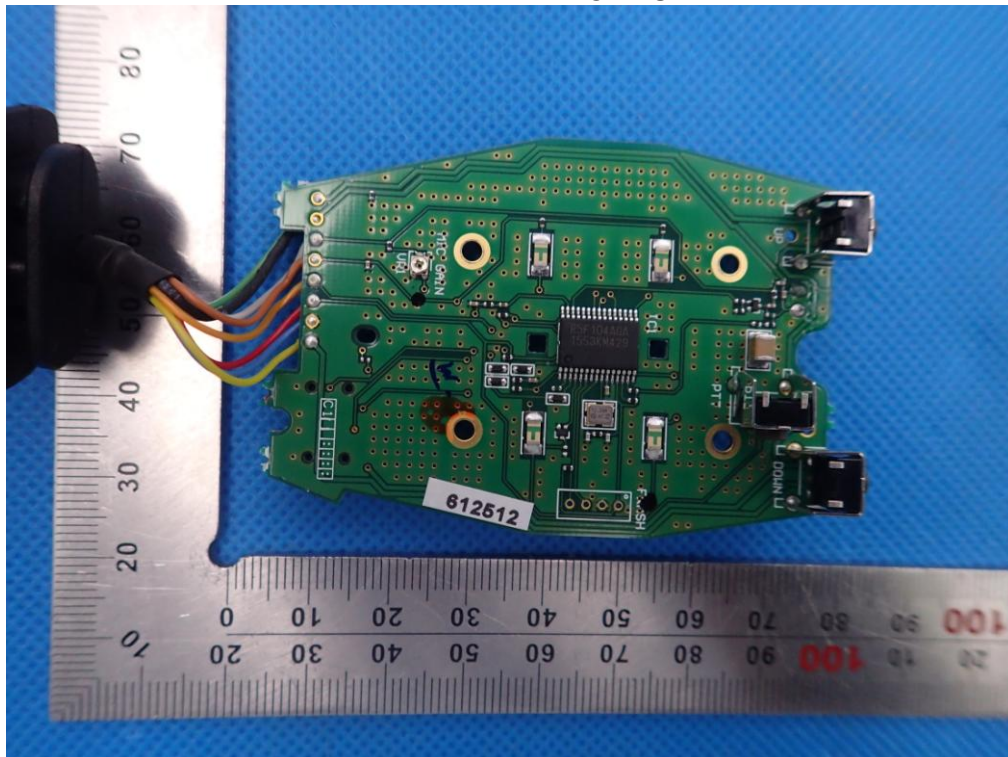

INTERNAL VIEW-3 OF EUT

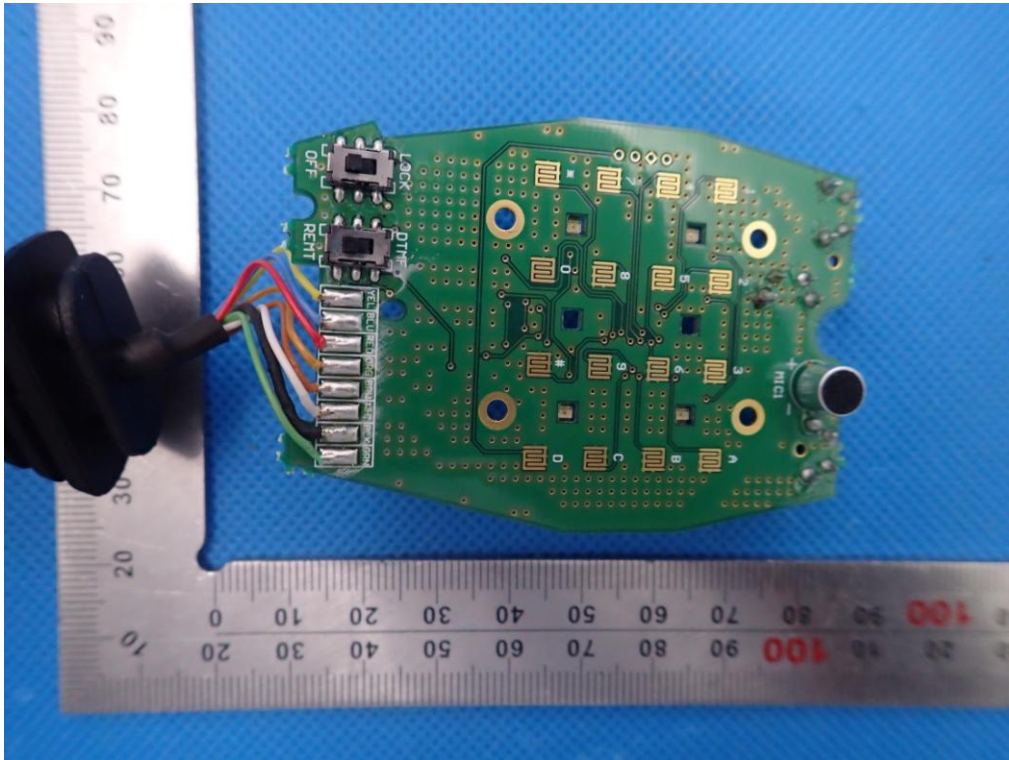

----END OF REPORT----