

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666 Fax: +86 (0) 21 6191 5678

ee.shanghai@sgs.com

Report No.: SHEM130400066601

Page 1 of 37

### **FCC REPORT**

Application No. :	SHEM1304000666RF	
Applicant:	Axesstel,Inc.	
FCC ID:	PH7AX52R	
Equipment Under Test (E NOTE: The following samp	EUT):  Dle(s) submitted was/were identified on behalf of the client as	
Product Name:	Home Alert	
Brand Name:	Axesstel	
Model:	AX52R	
Added Model:	N/A	
Standards:	47 CFR Part 2 (2012)	
	47 CFR Part 22 subpart H (2012)	
Date of Receipt:	Mar.29, 2013	
<b>Date of Test:</b> Apr. 1, 2013 to Jun. 18, 2013		
Date of Issue:	Jun.18, 2013	
Test Result :	PASS *	

<sup>\*</sup>In the configuration tested, the EUT detailed in this report complied with the standards specified above.

**Tony Wu** 

**E&E Section Manager** 

N Apr. 2013

SGS-CSTC (Shanghai) Co., Ltd.

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

588 West Jindu Road, Songjiang District, Shanghai, China

Report No.: SHEM130400066601

Page 2 of 37

### 2 Version

	Revision Record							
Version Chapter Date Modifier Remark								
00	/	Jun.18, 2013	/	Original				

Authorized for issue by:		
Engineer	Zenger Zhang	Zenger Zhang
	Print Name	
Clerk	Amy Wang Print Name	Amy Wang
Reviewer	Keny Xu Print Name	Keny u



Report No.: SHEM130300066601 Page: 3 of 38

### 3 Test Summary

Test Item	FCC Requirement	Test method	Result			
CDMA Cell 800						
Conducted output power	Part 2.1046(a)/Part 22.913(a)	ITA-603-D-2010 Clause 2.2.1	PASS			
Effective Radiated Power of Transmitter(ERP)	Part 2.1046(a)/Part 22.913(a)	ITA-603-D-2010 Clause 2.2.17	PASS			
99% Occupied Bandwidth	<b>dwidth</b> Part 2.1049(h) Part 22.917(b)		PASS			
Band Edge at antenna terminals  Part 2.1051/Part 22.917(a)		Part 22.917(b)	PASS			
Spurious emissions at antenna terminals  Part 2.1051/ Part 2.1057/ Part 22.917(a)(b)		ITA-603-D-2010 Clause 2.2.13	PASS			
Field strength of spurious radiation	Part 2.1053/ Part 2.1057/ Part 22.917(a)(b)	ITA-603-D-2010 Clause 2.2.12	PASS			
Frequency stability	Part 2.1055/ Part 22.355	ITA-603-D-2010 Clause 2.2.2	PASS			



Report No.: SHEM130300066601 Page: 4 of 38

### 4 Contents

		Page
1 (	COVER PAGE	1
2 V	/ERSION	2
	TEST SUMMARY	
	CONTENTS	
	GENERAL INFORMATION	
5 G		
5.1	CLIENT INFORMATION	
5.2	GENERAL DESCRIPTION OF E.U.T.	
5.3	TECHNICAL SPECIFICATIONS:	
5.4	ACCESSORIES OF PRODUCT:	
5.5	SUPPORT EQUIPMENTS FOR TESTING	
5.6	DETAILS OF TEST MODE	
5.7	TEST LOCATION	
5.8	TEST FACILITY	
6 E	EQUIPMENTS USED DURING TEST	8
7 T	TEST RESULTS AND MEASUREMENT DATA	10
7.1	CONDUCTED OUTPUT POWER	10
7.2	EFFECTIVE RADIATED POWER OF TRANSMITTER (ERP/EIRP)	
7.3	99%OCCUPIED BANDWIDTH	15
7.4	BAND EDGE AT ANTENNA TERMINALS	
7.5	SPURIOUS EMISSIONS AT ANTENNA TERMINALS	21
7.6	FIELD STRENGTH OF SPURIOUS RADIATION	24
7.7	FREQUENCY STABILITY	36
8 P	PHOTOGRAPHS - EUT TEST SETUP	38
9 P	PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	38



Report No.: SHEM130300066601 Page: 5 of 38

### 5 General Information

### 5.1 Client Information

Applicant:	Axesstel, Inc		
Address of Applicant:	6815 Flanders Drive, Ste 210, San Diego, CA92121, USA		
Manufacturer:	Axesstel (Shanghai) Ltd.		
Address of Manufacturer:	Room 1101, Building 19, No.1515 Gumei Road, Xuhui District, Shanghai		
Factory:	Eastcom incorporated Co.,LTD		

### 5.2 General Description of E.U.T.

Product Name	Home Alert
Brand Name:	Axesstel
Model No:	AX52R
Added Model:	N/A
Product Description:	Fixed production

### **5.3** Technical Specifications:

Operation Frequency:	CDMA Cell 800
Modulation:	Fwd 1, Rvs1/SO2 Fwd 2, Rvs2/SO9 Fwd 3,Rvs3/SO55 Fwd 4,Rvs3/SO55 Fwd 5,Rvs4/SO55
Power Supply:	9V DC Battery or 5V DC Charger.
Antenna Type	Integral



Report No.: SHEM130300066601 Page: 6 of 38

### Error! Hyperlink reference not valid. Error! Hyperlink reference not valid. Error! Hyperlink reference not valid.:

Battery:	Battery Type:	9V DC		
Adapter:	Model No.:	TA31-0502000		
	Rated Input:	AC 100V-240V 50-60Hz 0.4A		
	Rated Output:	DC 5.0V 2.0	0A	
	Cable length:	DC port:	180cm (2 wires)	

### 5.5 Support equipments for Testing

The EUT has been tested independently.

### 5.6 Details of Test Mode

Test Mode	Description of Test Mode
Transmitting mode	Keep the EUT on continue transmitting mode.

#### 5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab No.588 West Jindu Road, Songjiang District, Shanghai, China. 201612.

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

### 5.8 Test Facility

### CNAS (No. CNAS L0599)

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2014-07-26.

### • FCC – Registration No.: 402683

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2015-02-22.

### Industry Canada (IC) – IC Assigned Code: 8617A

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 7 of 38

testing with Registration No.: 8617A. Expiry Date: 2014-09-20.

VCCI (Member No.: 3061)

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.



Report No.: SHEM130300066601 Page: 8 of 38

### 6 Equipments Used during Test

□ Conducted Emission

	adoled Ellission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2012-06-13	2013-06-12
2	Line impedance stabilization network (LISN)	SCHWARZBECK	NSLK8127	8127-490	2012-06-13	2013-06-12
3	Line impedance stabilization network (LISN)	ETS	3816/2	00034161	2012-06-13	2013-06-12

Radiated Spurious Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2012-06-02	2013-06-01
2	Antenna	SCHWARZBECK	VULB9168	9168-313	2012-08-15	2013-08-14
3	CONTROLLER	INNCO	CO200	474	/	/
4	Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2012-08-15	2013-08-14
5	Antenna	SCHWARZBECK	BBHA9170	9170-373	2012-08-15	2013-08-14
6	Low nosie amplifier	LNA6900	TESEQ	71033	2012-08-15	2013-08-14

**⊠** RF Conducted Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2013-05-26	2014-05-25
2	Horn Antenna	SCHWARZBEC K	BBHA9120D	9120D-679	2013-05-26	2014-05-25
3	Horn Antenna	Rohde & Schwarz	HF906	100284	2013-05-26	2014-05-25
4	ANTENNA	SCHWARZBEC K	VULB9168	9168-313	2013-05-26	2014-05-25
5	Horn Antenna	SCHWARZBEC K	BBHA 9170	BBHA91703 73	2012-08-15	2013-08-14
6	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2012-10-09	2013-10-08
7	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co;Ltd	BY-2009P		2012-10-09	2013-10-08
8	CLAMP METER	FLUKE	316	86080010	2013-05-26	2014-05-25

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 9 of 38


		1	1	T	1	
9	Thermo- Hygrometer	ZHICHEN	ZC1-2	01050033	2012-10-09	2013-10-08
11	High-low temperature cabinet	Shanghai YuanZhen	GW2050		2013-05-26	2014-05-25
12	Tunable Notch Filter	Wainwright instruments	WRCT1800. 0/ 2000.0- 0.2/40-5SSK	11	2013-05-26	2014-05-25
13	Tunable Notch Filter	Wainwright instruments Gmbh	WRCT800.0/ 880.0- 0.2/40-5SSK	9	2013-05-26	2014-05-25
14	High pass Filter	FSCW	HP 12/2800- 5AA2	19A45-02	2013-05-26	2014-05-25
15	Low nosie amplifier	TESEQ	LNA6900	70133	2013-05-26	2014-05-25
16	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2013-05-26	2014-05-25
17	Line impedance stabilization network	SCHWARZBEC K	NSLK8127	8127-490	2013-05-26	2014-05-25
18	Universal radio communicatio n	Agilent	E5515C	45361045	2013-05-26	2014-05-25
19	Power meter	Rohde & Schwarz	NRP	101641	2013-02-23	2014-02-22



Report No.: SHEM130300066601 Page: 10 of 38

### 7 Test results and Measurement Data

### 7.1 Conducted Output Power

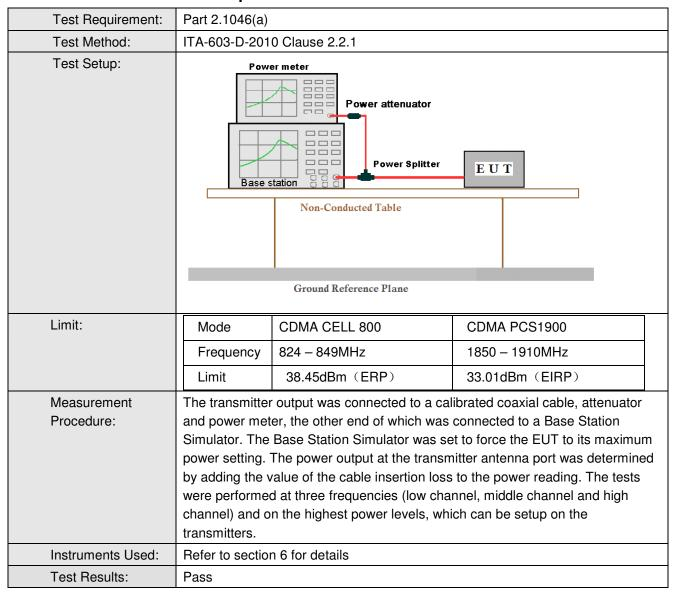



Report No.: SHEM130300066601 Page: 11 of 38

#### Measurement results:

	C	ell 800	
Center Frequency (MHz)	Channel No.	Test Mode	RF Power output dBm(Average)
(1011 12)	Ondinior Hor	Fwd 1, Rvs1/SO2	24.76
		Fwd 2,Rvs2/SO9	24.18
824.7	1013	Fwd 3,Rvs3/SO55	23.43
		Fwd 4,Rvs3/SO55	23.27
		Fwd 5,Rvs4/SO55	23.21
	363	Fwd 1, Rvs1/SO2	24.25
		Fwd 2,Rvs2/SO9	24.16
835.89		Fwd 3,Rvs3/SO55	23.16
		Fwd 4,Rvs3/SO55	23.22
		Fwd 5,Rvs4/SO55	23.28
		Fwd 1, Rvs1/SO2	24.56
		Fwd 2,Rvs2/SO9	24.53
848.31	777	Fwd 3,Rvs3/SO55	23.12
		Fwd 4,Rvs3/SO55	23.23
		Fwd 5,Rvs4/SO55	23.35




Report No.: SHEM130300066601 Page: 12 of 38

### 7.2 Effective Radiated Power of Transmitter (ERP/EIRP)

			-	-		
Test Requirement:	Part 2.1046(a)					
Test Method:	ITA-603-D-2010 Clause 2.2.17					
Receiver Setup:	Frequency Detector RBW VBW Remark					
	30MHz-1GHz	peak	100 kHz	300kHz	Peak	
	Above 1GHz	Peak	1MHz	3MHz	Peak	
Test Setup:						

Test Setup:







Figure 1. 30MHz to 1GHz

Figure 2. above 1GHz






Figure 1. 30MHz to 1GHz

Figure 2. above 1GHz

Limit:

Mode	CDMA CELL 800	CDMA PCS1900
Frequency	824 – 849MHz	1850 – 1910MHz
Limit	38.45dBm (7W)	33.01dBm (2W)

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 13 of 38

Measurement	Below 1GHz test procedure as below:
Procedure:	1). The EUT was powered ON and placed on a 0.8m high table in the
	chamber. The antenna of the transmitter was extended to its maximum
	<ul> <li>length.</li> <li>2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.</li> <li>3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.</li> <li>4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.</li> <li>5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.</li> <li>6) The output power into the substitution antenna was then measured.</li> </ul>
	6). The output power into the substitution antenna was then measured. 7). Steps 5) and 6) were repeated with both antennas polarized.
	8). Calculate power in dBm by the following formula:  ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)  where:
	Pg is the generator output power into the substitution antenna.  Above 1GHz test procedure as below:
	Different between above is the test site, change from Semi- Anechoic     Chamber to fully Anechoic Chamber
	2). Calculate power in dBm by the following formula:  EIRP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBi)  EIRP=ERP+2.15dB
	where: Pg is the generator output power into the substitution antenna. 3). Test the EUT in the lowest channel, the middle channel the Highest channel
	4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
	5). Repeat above procedures until all frequencies measured was complete.
Instruments Used:	Refer to section 6 for details
Test Results:	Pass

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 14 of 38


#### **Measurement Data**

EUT mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. output (dBm)	Antenna Gain (dBd)	Cable loss (dB)	ERP (dBm)	Limit (dBm)
				V	94.79	18.55	8.4	3.32	23.63	38.45
	824.70	1013	Н	Н	100.38	18.31	8.4	3.32	23.39	38.45
Cell				V	99.13	19.02	8.42	3.4	24.04	38.45
800	835.89	363	Н	Н	102.65	18.73	8.42	3.4	23.75	38.45
				V	99.1	17.76	8.47	3.43	22.8	38.45
	848.31	777	Н	Н	103.53	18.53	8.47	3.43	23.57	38.45



Report No.: SHEM130300066601 Page: 15 of 38

### 7.3 99%Occupied Bandwidth

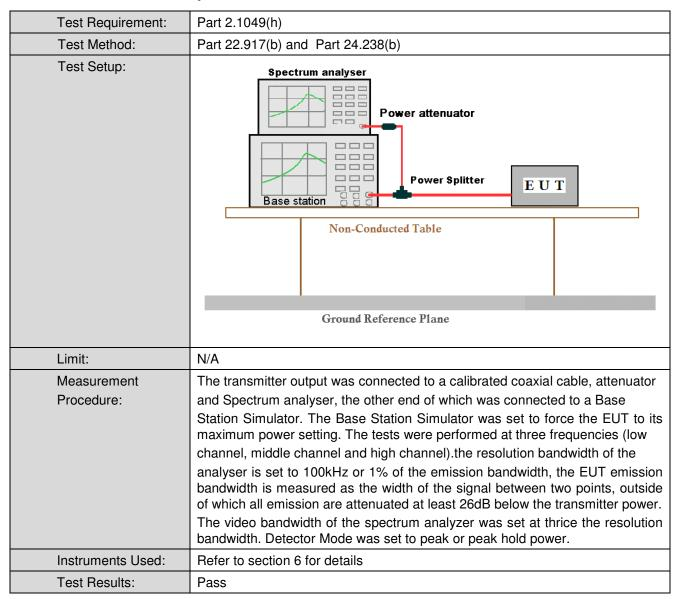



Report No.: SHEM130300066601 Page: 16 of 38

#### **Measurement Data**

modearomont Bata							
Cell 800							
Test channel Frequency (MHz) 99% Emission Bandwidth Result							
Lowest/1013	824.70	1.276MHz	Pass				
Middle/363	835.89	1.280MHz	Pass				
Highest/777	848.31	1.272MHz	Pass				



Report No.: SHEM130300066601 Page: 17 of 38


Test plot as follows:





Date: 30.APR.2013 17:15:36

Test mode: Cell 800 Test channel: Middle/363 Operation Frequency 835.89MHz

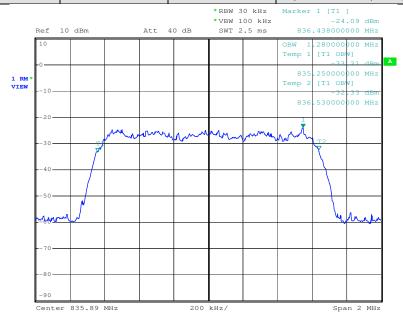


Date: 30.APR.2013 17:21:40

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 18 of 38





Date: 30.APR.2013 17:16:51



Report No.: SHEM130300066601 Page: 19 of 38

### 7.4 Band Edge at antenna terminals

Test Requirement:	Part 2.1051				
Test Method:	Part 22.917(b) and Part 24.238(b)				
Test Setup:	Power attenuator  Power Splitter  E U T  Non-Conducted Table  Ground Reference Plane				
Measurement Procedure:	The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to				
Limit:	peak or peak hold power.  Operation Band Frequency Range Limit (MHz)				
	CDMA Below 824 and above 849 Attenuated at least Cell800 43+10log(P)				
	CDMA Below 1850 and above 1910 Attenuated at least PCS1900 43+10log(P)				
Instruments Used:	Refer to section 6 for details				
Test Results:	Pass				


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 20 of 38


#### **Measurement Data**

Cell800				
Test channel	Frequency (MHz)	Result		
Lowest/1013	824.70	Pass		

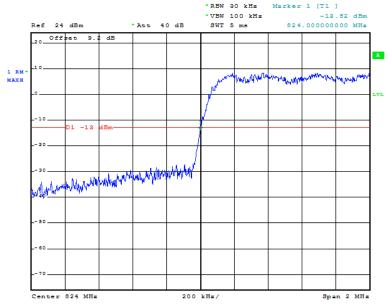

Date: 18 JUN.2013 13:58:04

Test channel	Frequency (MHz)	Result
Highest/777	848.31	Pass

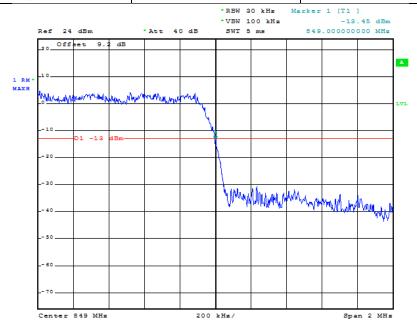


Date: 18 JUN.2013 13:02:39

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 21 of 38

### 7.5 Spurious emissions at antenna terminals

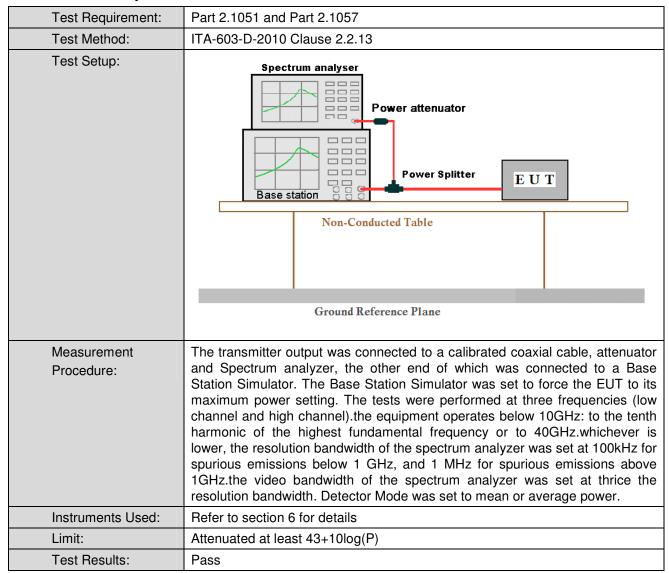





Report No.: SHEM130300066601 Page: 22 of 38

Test plot as follows:

Test mode: Cell 800 Test channel: Lowest/1013 Operation Frequency 824.7MHz

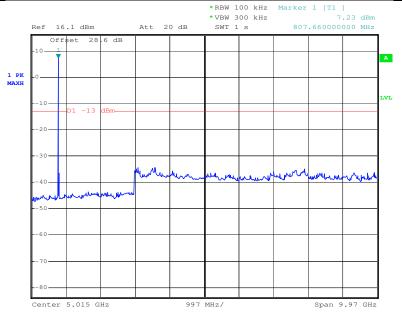

Test mode: Cell 800 Test channel: Middle/363 Operation Frequency 835.89MHz

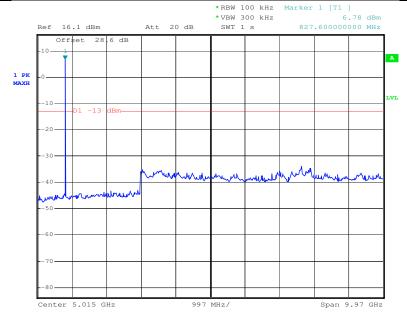


Date: 30.APR.2013 17:46:38

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 23 of 38

Test mode: Cell 800 Test channel: High/777 Operation Frequency 848.31MHz

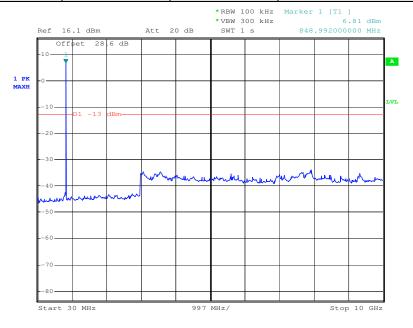


Date: 30.APR.2013 17:45:31



Report No.: SHEM130300066601 Page: 24 of 38

### 7.6 Field strength of spurious radiation

Test Requirement:	Part 2.1053 and Part 2.1057						
Test Method:	ITA-603-D-2010 Cla	ITA-603-D-2010 Clause 2.2.12					
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark		
	9KHz-150KHz	Quasi-peak	200Hz	1KHz	Quasi-peak		
	150KHz-30MHz	Quasi-peak	9kHz	30KHz	Quasi-peak		
	30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak		
	Above 1GHz	Peak	1MHz	3MHz	Peak		
	Above IGHZ	Peak	1MHz	10Hz	Average		
Test frequency range	9KHz-10GHz						
Test Setup:							






Figure 2. 30MHz to 1GHz

Figure 3. above 1GHz

### Measurement Procedure:

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 1.70m high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 25 of 38


	antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.  6). The output power into the substitution antenna was then measured.  7). Steps 5) and 6) were repeated with both antennas polarized.  8) Calculate power in dBm by the following formula:  ERP(dBm) = Pg(dBm) – cable loss (dB) + antenna gain (dBd) where:  Pg is the generator output power into the substitution antenna.  Above 1GHz test procedure as below:  1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber  2) Calculate power in dBm by the following formula:  EIRP(dBm) = Pg(dBm) – cable loss (dB) + antenna gain (dBi)  EIRP=ERP+2.15dB  where:  Pg is the generator output power into the substitution antenna.  3. Test the EUT in the lowest channel, the middle channel the Highest channel  4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
	5. Repeat above procedures until all frequencies measured was complete.
Instruments Used:	Refer to section 6 for details
Limit:	Attenuated at least 43+10log(P)
Test Results:	Pass




Report No.: SHEM130300066601 Page: 26 of 38

Test mode: Cell 800 Test channel: 1013

#### 30MHz to 1G: Vertical:

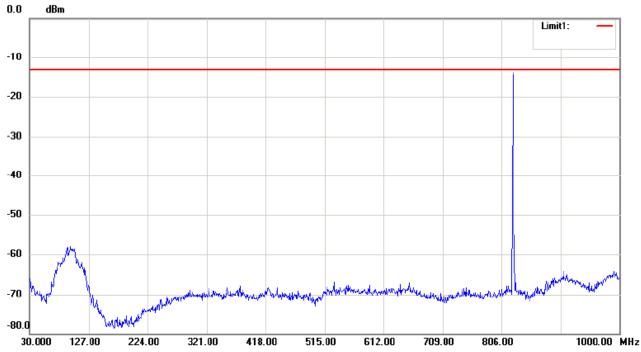

#### Horizontal:

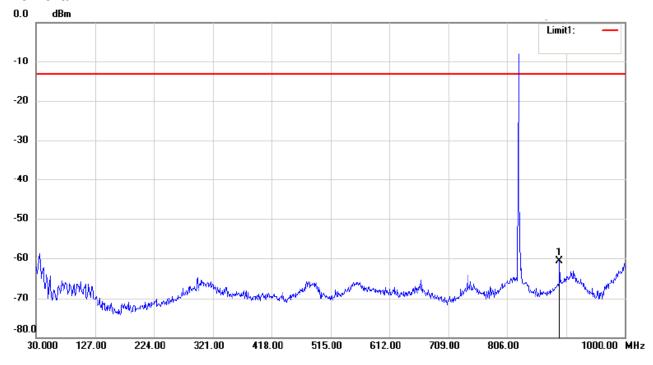


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 27 of 38

### 1G to 10G: Vertical:

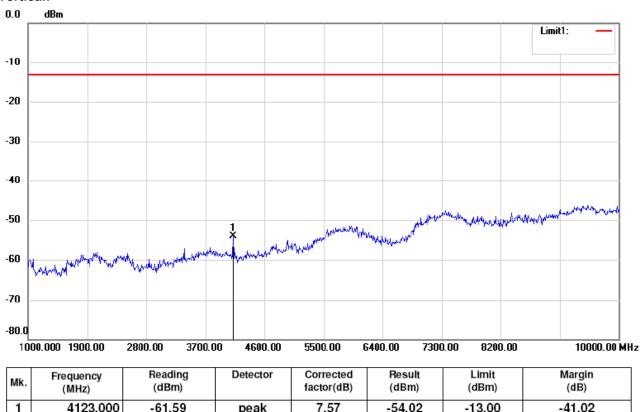

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corrected factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)
1	4123.000	-61.59	peak	7.57	-54.02	-13.00	-41.02



Report No.: SHEM130300066601 Page: 28 of 38

#### Horizontal:






Report No.: SHEM130300066601 Page: 29 of 38


Test mode: Cell 800 Test channel: 363

#### 30MHz to 1G:

#### Vertical:

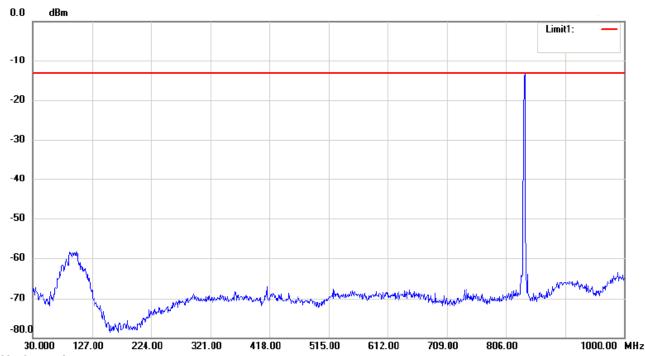

### Horizontal:

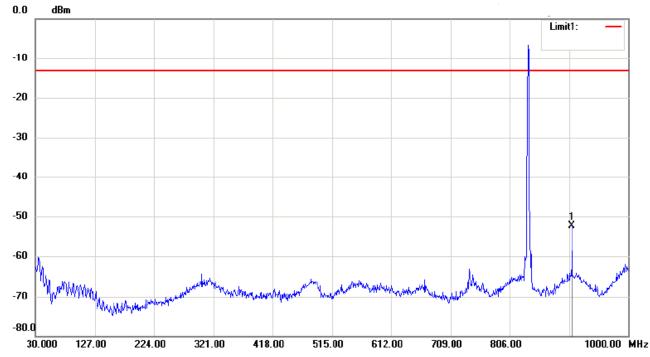


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 30 of 38

### 1G to 10G:



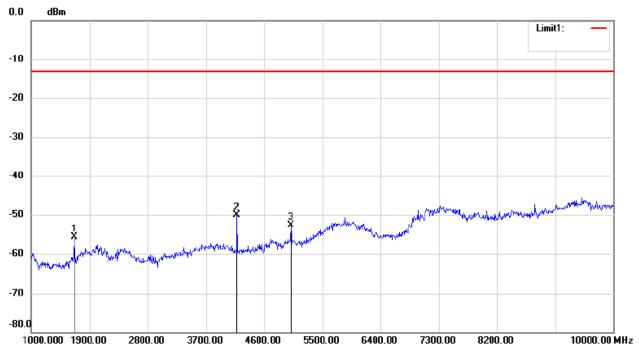


Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corrected factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)
1	1666.000	-56.96	peak	1.27	-55.69	-13.00	-42.69
2	4177.000	-57.84	peak	7.68	-50.16	-13.00	-37.16
3	5014.000	-63.17	peak	10.47	-52.70	-13.00	-39.70



Report No.: SHEM130300066601 Page: 31 of 38

#### Horizontal:

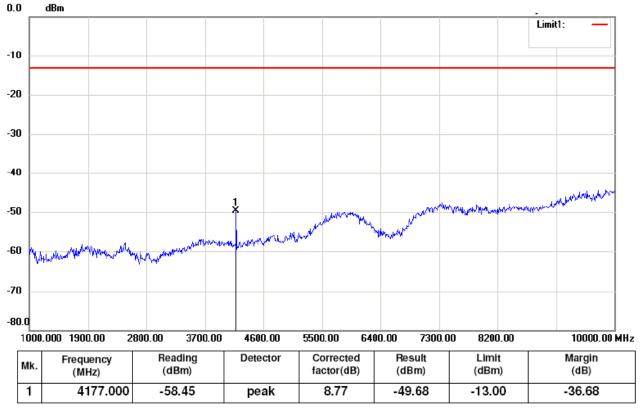




Report No.: SHEM130300066601 Page: 32 of 38

Test mode:	Cell 800	Test channel:	777
------------	----------	---------------	-----

#### 30MHz to 1G:


#### Vertical:

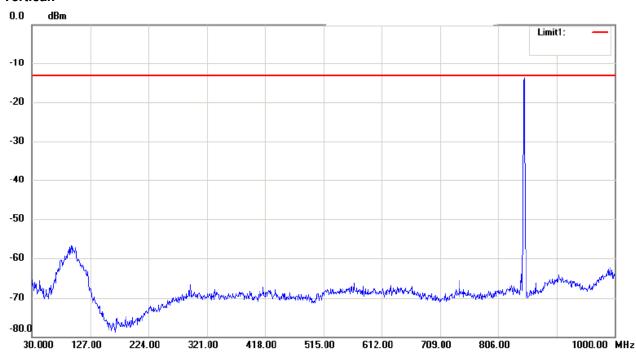



Report No.: SHEM130300066601 Page: 33 of 38

#### Horizontal:

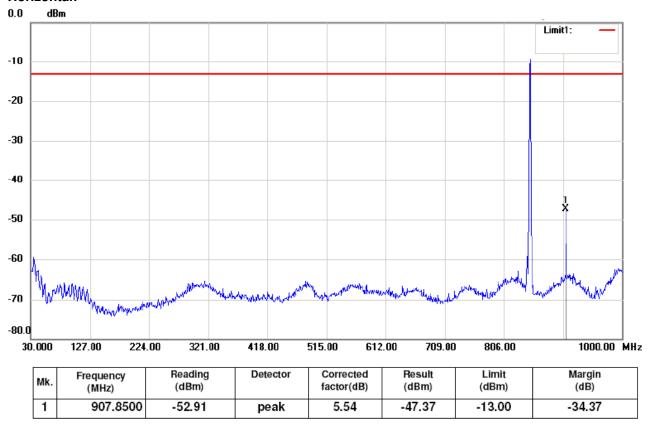


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any

holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SHEM130300066601 Page: 34 of 38


### 1G to 10G: Vertical:

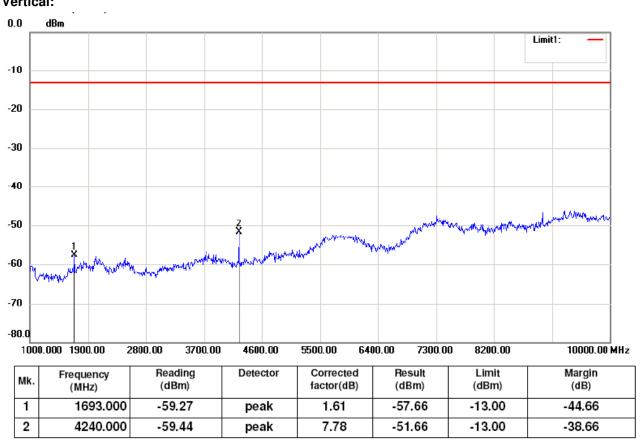



Report No.: SHEM130300066601 Page: 35 of 38

#### Horizontal:

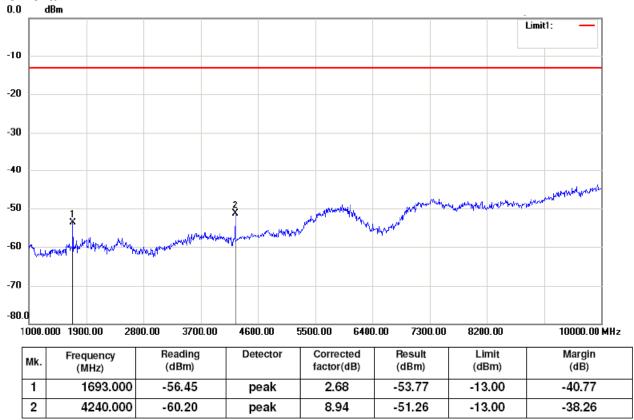

#### NOTE:

1) The disturbance and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Report No.: SHEM130300066601 Page: 36 of 38

### 7.7 Frequency stability

Test Requirement:	Part 2.1055				
Test Method:	ITA-603-D-2010 Clause 2.2.2				
	11A-603-D-2010 Clause 2.2.2				
Test Setup:	Non-Conducted T				
Measurement Procedure:	The transmitter output was connected to a calibrated coaxial cable and a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The EUT was place in the temperature chamber, the DC leads and RF output cable exited the chamber though an opening made for that purpose. After Operate the equipment in standby conditions for 15 minutes before proceeding. The temperature was varied from -30°C to +50°C at intervals of not more than 10°C The frequency stability was read from the base station at 25°C the input voltage was varied +/-15%, the frequency stability and input voltage was record.				
Instruments Used:	Refer to section 4.10 for details				
Limit:	Operation Band Frequency stability Limit(ppm)				
	CDMA Cell 800 ±2.5ppm				
	CDMA PCS 1900				
Test Results:	Pass				



Report No.: SHEM130300066601 Page: 37 of 38

Cell 800						
Power Supply	Environment	Test Channel		Freq Delta	Freq Dev	Limit
Vdc	Temperature (°C)	Channel No.	Frequency (MHz)	(Hz)	(ppm)	(ppm)
120	-20	1013	824.7	23	0.03	±2.5
120	-20	777	848.31	-26	-0.03	±2.5
120	-10	1013	824.7	34	0.04	±2.5
120	-10	777	848.31	28	0.03	±2.5
120	0	1013	824.7	-33	-0.04	±2.5
120	0	777	848.31	29	0.03	±2.5
120	10	1013	824.7	31	0.04	±2.5
120	10	777	848.31	35	0.04	±2.5
120	20	1013	824.7	-18	-0.02	±2.5
120	20	777	848.31	22	0.03	±2.5
120	30	1013	824.7	27	0.03	±2.5
120	30	777	848.31	-36	-0.04	±2.5
120	40	1013	824.7	41	0.05	±2.5
120	40	777	848.31	-52	-0.06	±2.5
120	50	1013	824.7	-29	-0.04	±2.5
120	50	777	848.31	52	0.06	±2.5
138	20	1013	824.7	-15	-0.02	±2.5
138	20	777	848.31	41	0.05	±2.5
102	20	1013	824.7	-34	-0.04	±2.5
102	20	777	848.31	35	0.04	±2.5



Report No.: SHEM130300066601 Page: 38 of 38

### 8 Photographs - EUT Test Setup

Refer to the < AX52R--Test Setup photos>.

### 9 Photographs - EUT Constructional Details

Refer to the < AX52R--External Photos > & < AX52R--Internal Photos >.