



AXW-T1900

SAM II Phantom: Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.57$
 mho/m $\epsilon_r = 53.2$ $r = 1.00$ g/cm^3
Cube 5x5x7; SAR (1g): 1.06 mW/g, SAR (10g): 0.641 mW/g
Coarse: $D_x = 20.0$, $D_y = 20.0$, $D_z = 10.0$
Powerdrift: -0.22 dB
Comment:
FCC ID : PH7AXWT1900 / MODEL : AXW-T1900
Company : AXESSTEL INC.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel: 25 (1851.25MHz)
Conducted Power: 24.5 dBm
Liquid Temperature : 21.3 °C
Date Tested : November 30, 2004

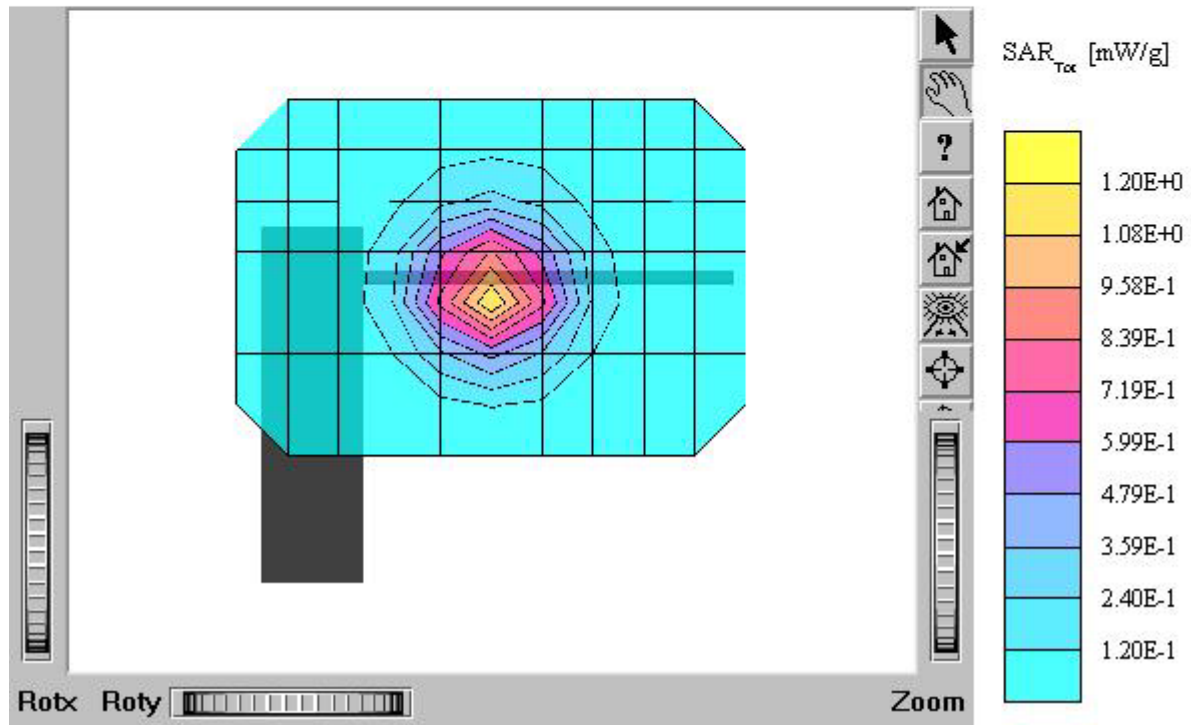


AXW-T1900

SAM II Phantom: Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.57$
 $\rho_{ho/m} \epsilon_r = 53.2$ $r = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 1.18 mW/g, SAR (10g): 0.710 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.01 dB
Comment:
FCC ID : PH7AXWT1900 / MODEL : AXW-T1900
Company : AXESSTEL INC.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel: 600 (1880 MHz)
Conducted Power: 24.5 dBm
Liquid Temperature : 21.3 °C
Date Tested : November 30, 2004

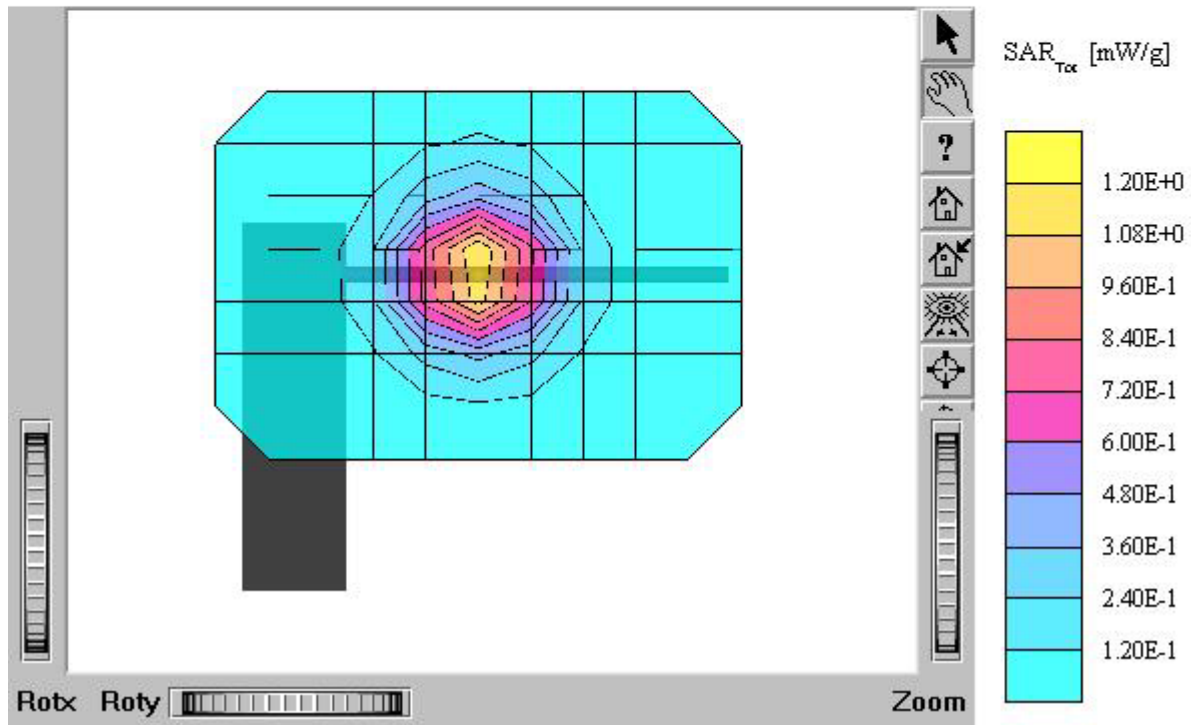


AXW-T1900

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.57$
 $\mu\text{ho/m}$ $\epsilon_r = 53.2$ $r = 1.00$ g/cm^3
Cube 5x5x7; SAR (1g): 0.846 mW/g, SAR (10g): 0.509 mW/g
Coarse: $D_x = 20.0$, $D_y = 20.0$, $D_z = 10.0$
Powerdrift: -0.12 dB
Comment:
FCC ID : PH7AXWT1900 / MODEL : AXW-T1900
Company : AXESSTEL INC.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel: 1175 (1908.75 MHz)
Conducted Power: 24.5 dBm
Liquid Temperature : 21.3 °C
Date Tested : November 30, 2004

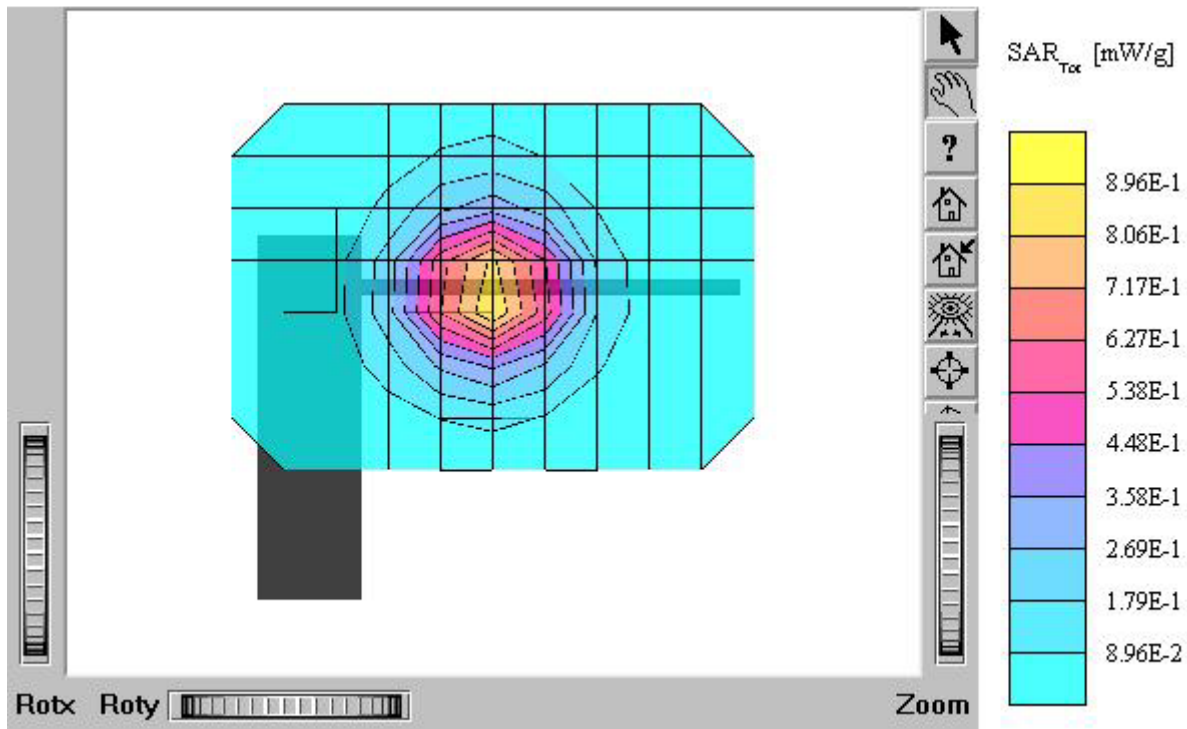


AXW-T1900

SAM II Phantom: Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.57$
 ρ_{ho}/m $e_r = 53.2$ $r = 1.00$ g/cm^3
Cube 5x5x7; SAR (1g): 1.03 mW/g, SAR (10g): 0.622 mW/g
Coarse: $D_x = 20.0$, $D_y = 20.0$, $D_z = 10.0$
Powerdrift: -0.13 dB
Comment:
FCC ID : PH7AXWT1900 / MODEL : AXW-T1900 (With Charger)
Company : AXESSTEL INC.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel: 25 (1851.25MHz)
Conducted Power: 24.5 dBm
Liquid Temperature : 21.3 °C
Date Tested : November 30, 2004

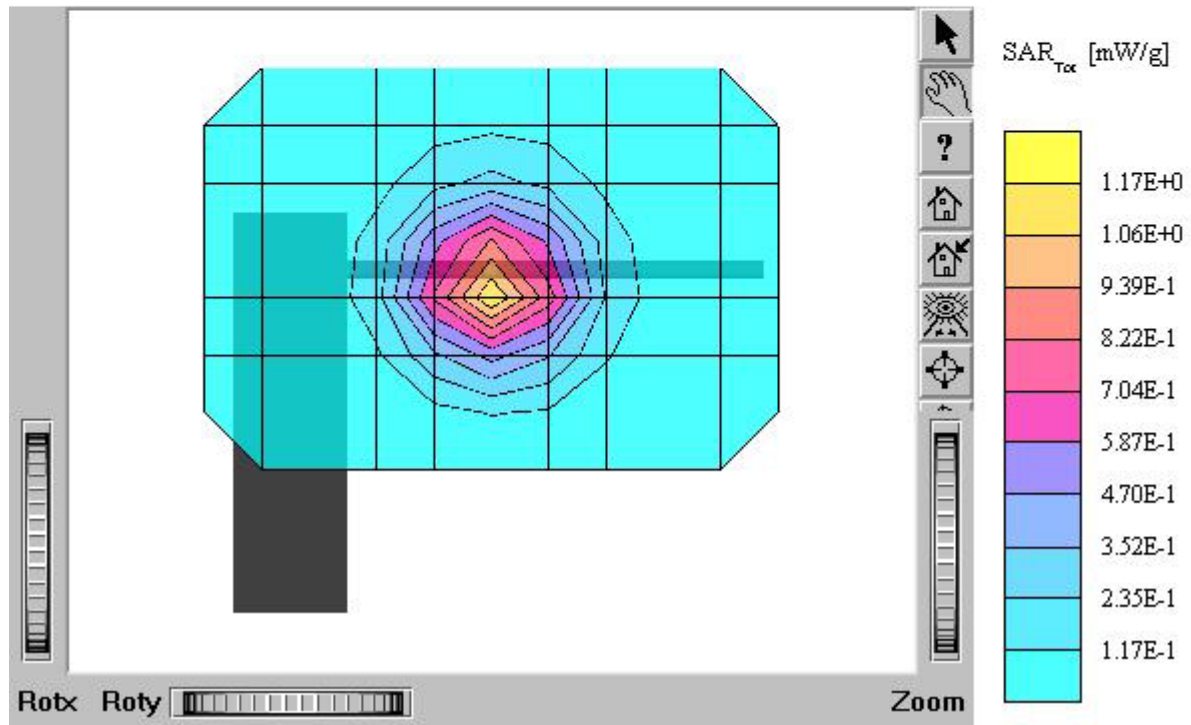


AXW-T1900

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz
 Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.57$
 ρ/m $\epsilon_r = 53.2$ $r = 1.00$ g/cm³
 Cube 5x5x7; SAR (1g): 1.21 mW/g, SAR (10g): 0.725 mW/g
 Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
 Powerdrift: -0.11 dB
 Comment:
 FCC ID : PH7AXWT1900 / MODEL : AXW-T1900 (With Charger)
 Company : AXESSTEL INC.
 Test Position: Body / Antenna: Fixed
 Mode: PCS CDMA / Channel: 600 (1880 MHz)
 Conducted Power: 24.5 dBm
 Liquid Temperature : 21.3 °C
 Date Tested : November 30, 2004

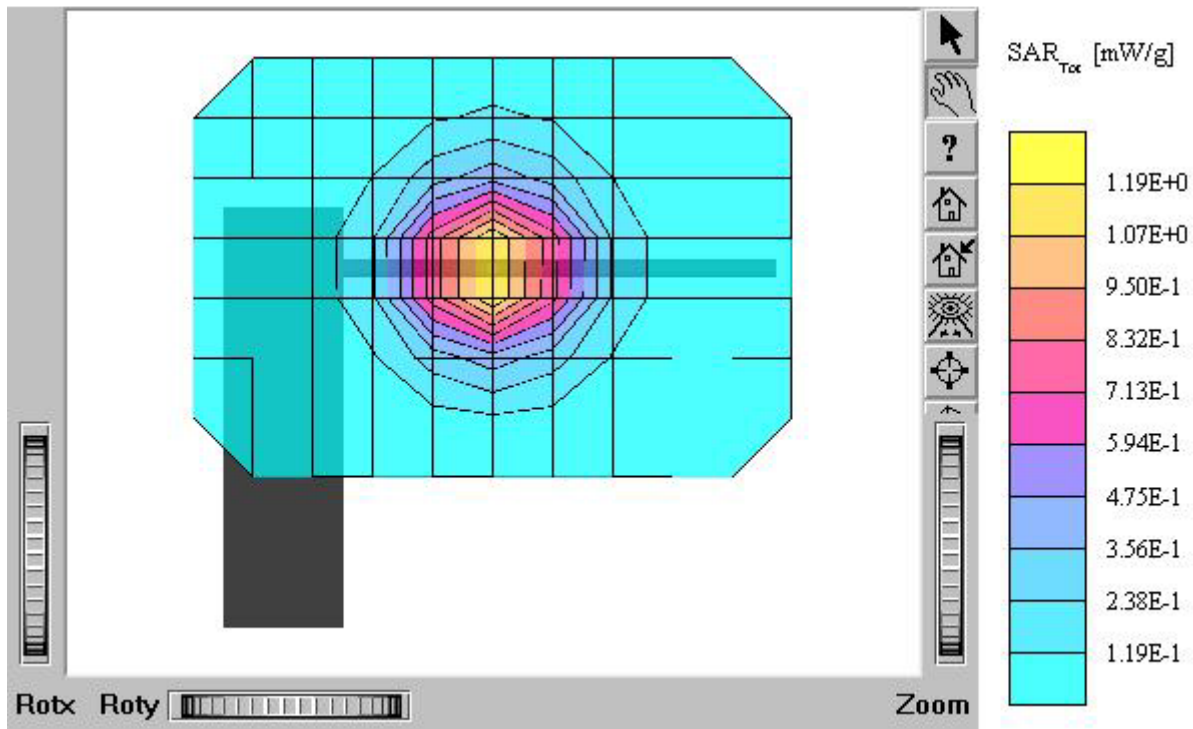

AXW-T1900

SAM II Phantom: Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.57$
 ρ_{ho}/m $e_r = 53.2$ $r = 1.00$ g/cm^3
Cube 5x5x7; SAR (1g): 0.834 mW/g, SAR (10g): 0.502 mW/g
Coarse: $D_x = 20.0$, $D_y = 20.0$, $D_z = 10.0$
Powerdrift: -0.01 dB
Comment:
FCC ID : PH7AXWT1900 / MODEL : AXW-T1900 (With Charger)
Company : AXESSTEL INC.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel: 1175 (1908.75 MHz)
Conducted Power: 24.5 dBm
Liquid Temperature : 21.3 °C
Date Tested : November 30, 2004

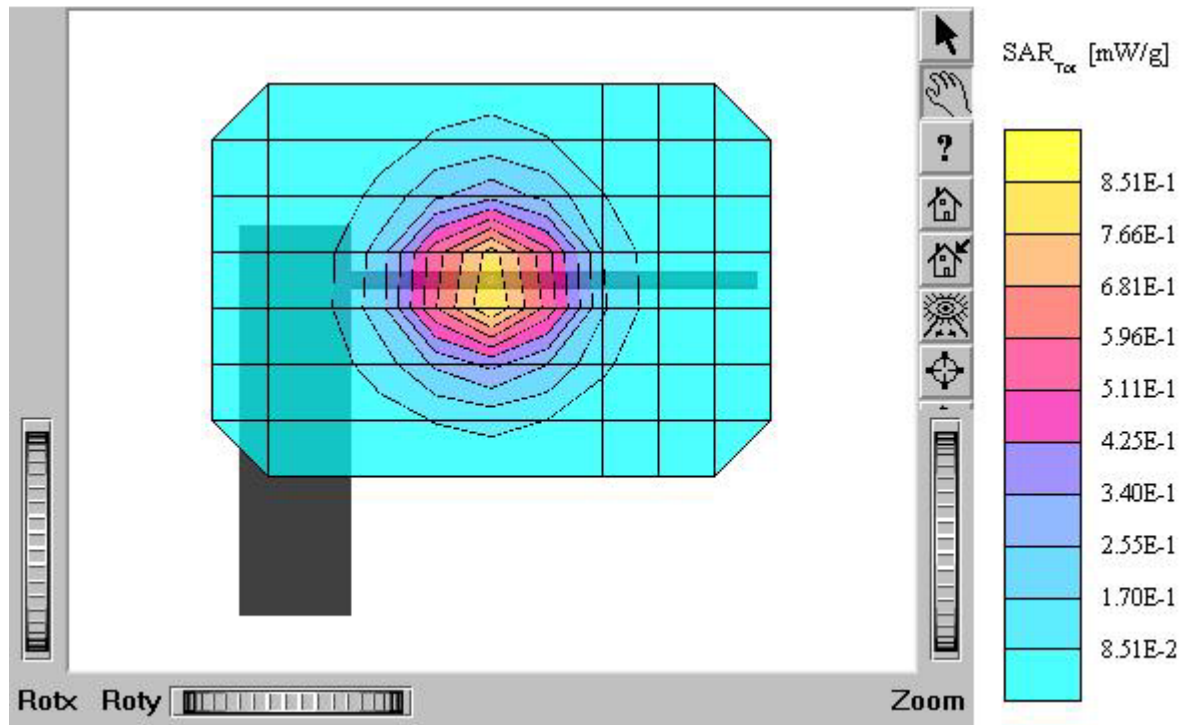

AXW-T1900

SAM II Phantom; Section; Position: ; Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: s = 1.57
mho/m $\epsilon_r = 53.2$ $r = 1.00$ g/cm³

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID : PH7AXWT1900 / MODEL : AXW-T1900

Company : AXESSTEL INC.

Test Position: Body / Antenna: Fixed

Mode: PCS CDMA / Channel: 600 (1880 MHz)

Conducted Power: 24.5 dBm

Liquid Temperature : 21.3 °C

Date Tested : November 30, 2004

