


Validation Data (835MHz Brain)

Dipole 835 MHz

SAM 1 Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Brain 835 MHz: $s = 0.89$
mho/m $\epsilon_r = 42.4$ $r = 1.00$ g/cm³
Cubes (2): SAR (1g): 10.1 mW/g ± 0.14 dB, SAR (10g): 6.51 mW/g ± 0.14 dB
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: 0.01 dB
Comment:
835MHz Brain Dipole Validation (D835V2/ S.N: 441)
Antenna Input Power : 30 dBm (1W)
HCT Co., Ltd. Brain Tissue Simulating Liquid
Liquid Temperature : 21.5 °C
Date Tested : November 29, 2004

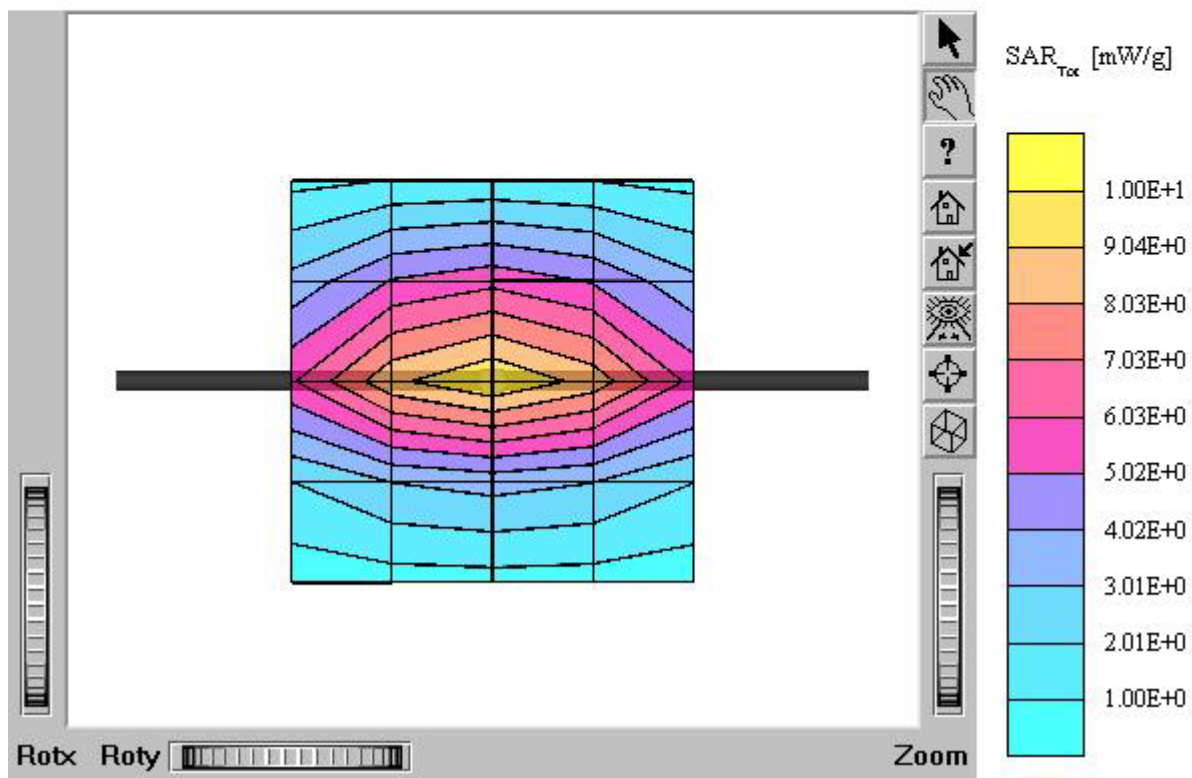


Dipole 835 MHz

SAM I Phantom; Section; Position: ; Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.63,6.63,6.63); Crest factor: 1.0; Brain 835 MHz: $s = 0.89$
 $\rho_{\text{mho/m}}$ $\epsilon_r = 42.4$ $r = 1.00$ g/cm^3

Z-Axis: $D_x = 0.0$, $D_y = 0.0$, $D_z = 5.0$

Comment:
835MHz Brain Dipole Validation (D835V2/ S.N: 441)
Antenna Input Power : 30 dBm (1W)
HCT Co., Ltd. Brain Tissue Simulating Liquid
Liquid Temperature : 21.5 °C
Date Tested : November 29, 2004

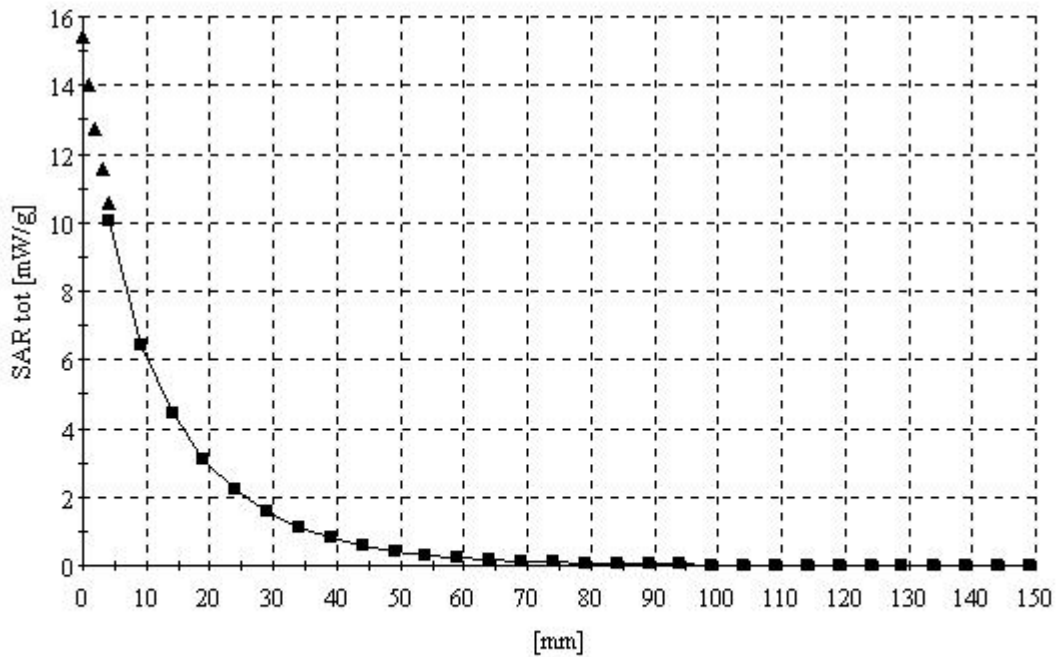

■ Dielectric Parameter (835MHz Brain)

Title : AXW-T800

SubTitle : CDMA BRAIN

November 29, 2004 09:05 AM

Frequency	e'	e''
800.000000 MHz	43.0719	19.0541
805.000000 MHz	42.9365	19.0607
810.000000 MHz	42.8585	19.0732
815.000000 MHz	42.7607	19.0485
820.000000 MHz	42.6612	19.1263
825.000000 MHz	42.5922	19.0994
830.000000 MHz	42.4921	19.1083
835.000000 MHz	42.4290	19.1489
840.000000 MHz	42.3184	19.1296
845.000000 MHz	42.3018	19.1777
850.000000 MHz	42.2228	19.2226
855.000000 MHz	42.2007	19.2095
860.000000 MHz	42.1251	19.2223
865.000000 MHz	42.1289	19.2222
870.000000 MHz	42.0403	19.2187
875.000000 MHz	42.0089	19.1984
880.000000 MHz	41.9878	19.2107
885.000000 MHz	41.9221	19.1558
890.000000 MHz	41.9166	19.0984
895.000000 MHz	41.8528	19.0292
900.000000 MHz	41.8099	18.9940

■ Dielectric Parameter (835MHz Body)

Title : AXW-T800

SubTitle : CDMA BODY

November 30, 2003 01:12 PM

Frequency	e'	e''
800.000000 MHz	54.3220	21.6442
805.000000 MHz	54.3586	21.6376
810.000000 MHz	54.2772	21.6160
815.000000 MHz	54.2478	21.6100
820.000000 MHz	54.2312	21.5434
825.000000 MHz	54.1882	21.5258
830.000000 MHz	54.1890	21.5035
835.000000 MHz	54.1238	21.5108
840.000000 MHz	54.0568	21.4199
845.000000 MHz	54.0386	21.3995
850.000000 MHz	53.9757	21.3740
855.000000 MHz	53.9329	21.3414
860.000000 MHz	53.8672	21.2744
865.000000 MHz	53.8216	21.2868
870.000000 MHz	53.7592	21.2519
875.000000 MHz	53.7015	21.2263
880.000000 MHz	53.6126	21.2556
885.000000 MHz	53.5311	21.2451
890.000000 MHz	53.4510	21.2344
895.000000 MHz	53.3830	21.2247
900.000000 MHz	53.3832	21.1992

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **H-CT (Dymstec)**

Certificate No: **D835V2-441_Sep04**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 441**

Calibration procedure(s) **QA CAL-05.v6
Calibration procedure for dipole validation kits**

Calibration date: **September 16, 2004**

Condition of the calibrated item **In Tolerance**



This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power sensor HP 8481A	US37292783	5-Nov-03 (METAS, No. 252-0254)	Nov-04
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference Probe ET3DV6	SN 1507	23-Jan-04 (SPEAG, No. ET3-1507_Jan04)	Jan-05
DAE4	SN 601	6-Nov-03 (SPEAG, No. DAE4-601_Jul04)	Jul-05

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	GB43310788	13-Aug-03 (SPEAG, in house check Jan-04)	In house check: Jan-06
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-03)	In house check: Oct-05
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Nov-04

	Name	Function	Signature
Calibrated by:	Judith Mueller	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: September 24, 2004

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D835V2-441_Sep04

Page 1 of 6

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
ConF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.3
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Area Scan resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.8 ± 6 %	0.92 mho/m ± 6 %
Head TSL temperature during test	(21.2 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	2.54 mW / g
SAR normalized	normalized to 1W	10.2 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	10.2 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.65 mW / g
SAR normalized	normalized to 1W	6.60 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	6.63 mW / g ± 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	51.6 Ω - 6.8 $j\Omega$
Return Loss	23.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.375 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 9, 2001

DASY4 Validation Report for Head TSL

Date/Time: 09/16/04 14:52:29

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN441

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 835 MHz;

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.3, 6.3, 6.3); Calibrated: 23.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 22.07.2004
- Phantom: Flat Phantom half size; Type: QD000P49AA; Serial: SN:1001;
- Measurement SW: DASY4, V4.3 Build 20; Postprocessing SW: SEMCAD, V1.8 Build 126

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.74 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.4 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 3.78 W/kg

SAR(1 g) = 2.54 mW/g; SAR(10 g) = 1.65 mW/g

Maximum value of SAR (measured) = 2.74 mW/g

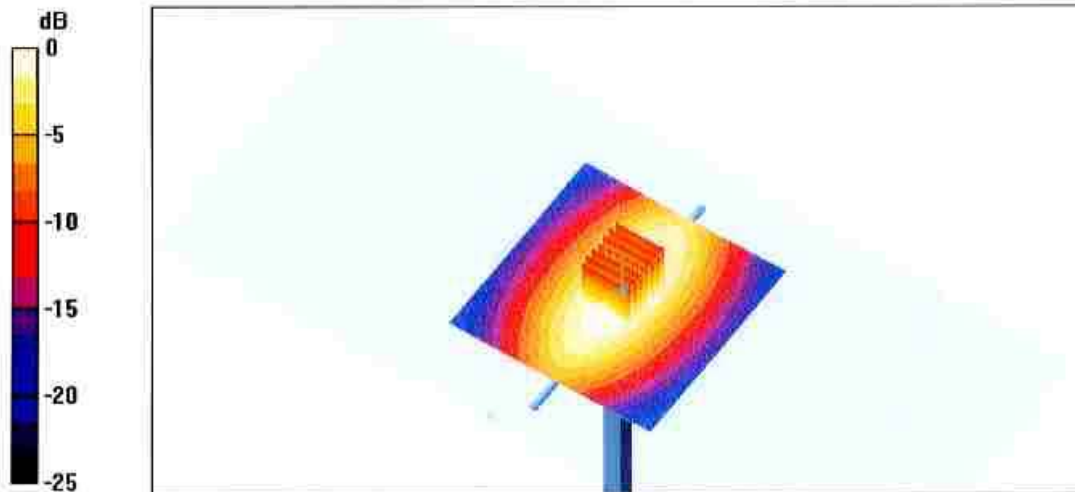

0 dB = 2.74mW/g

Impedance Measurement Plot for Head TSL

