

System Check_Body_835MHz_100817

DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_850_100817 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 56.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.6 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.22, 8.22, 8.22); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM2; Type: SAM; Serial: TP-1479
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Pin=100mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.991 mW/g



Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.6 V/m ; Power Drift = -0.0037 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.916 mW/g ; SAR(10 g) = 0.605 mW/g

Maximum value of SAR (measured) = 0.989 mW/g

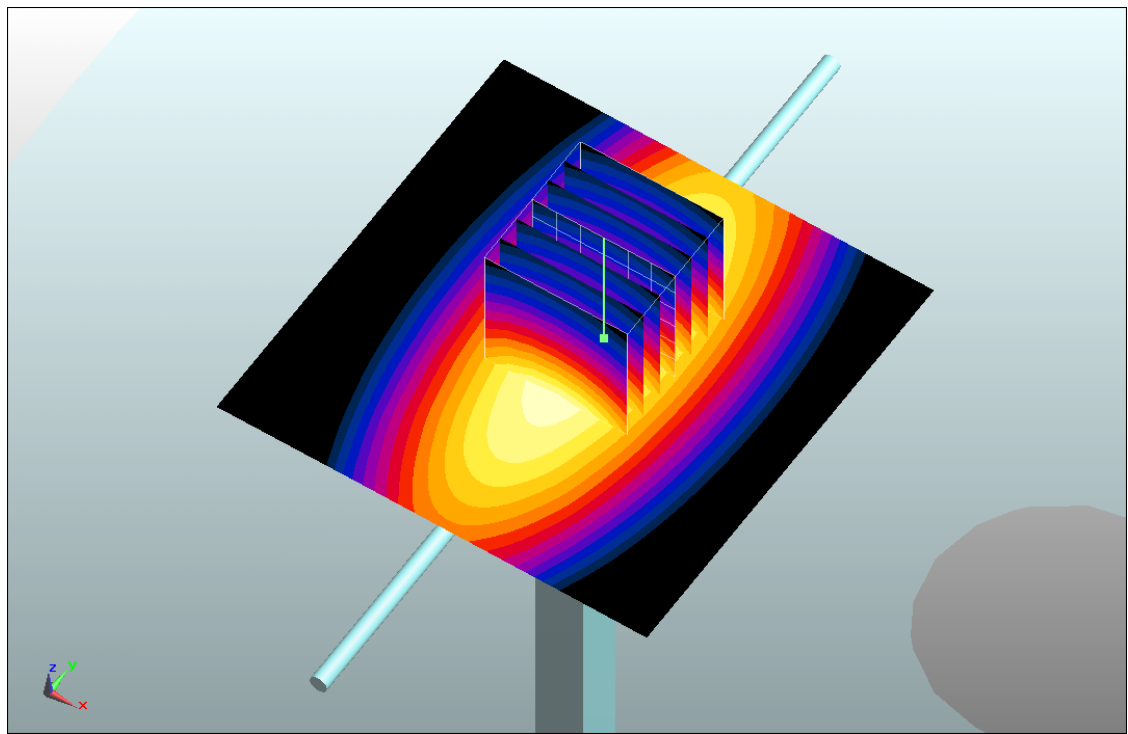

0 dB = 0.989mW/g

System Check_Body_835MHz_100818

DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_850_100818 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 56.5$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.7 \text{ }^\circ\text{C}$; Liquid Temperature : $21.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.22, 8.22, 8.22); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM2; Type: SAM; Serial: TP-1479
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Pin=100mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.05 mW/g



Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 32.6 V/m ; Power Drift = -0.0120 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.975 mW/g ; SAR(10 g) = 0.643 mW/g

Maximum value of SAR (measured) = 1.05 mW/g

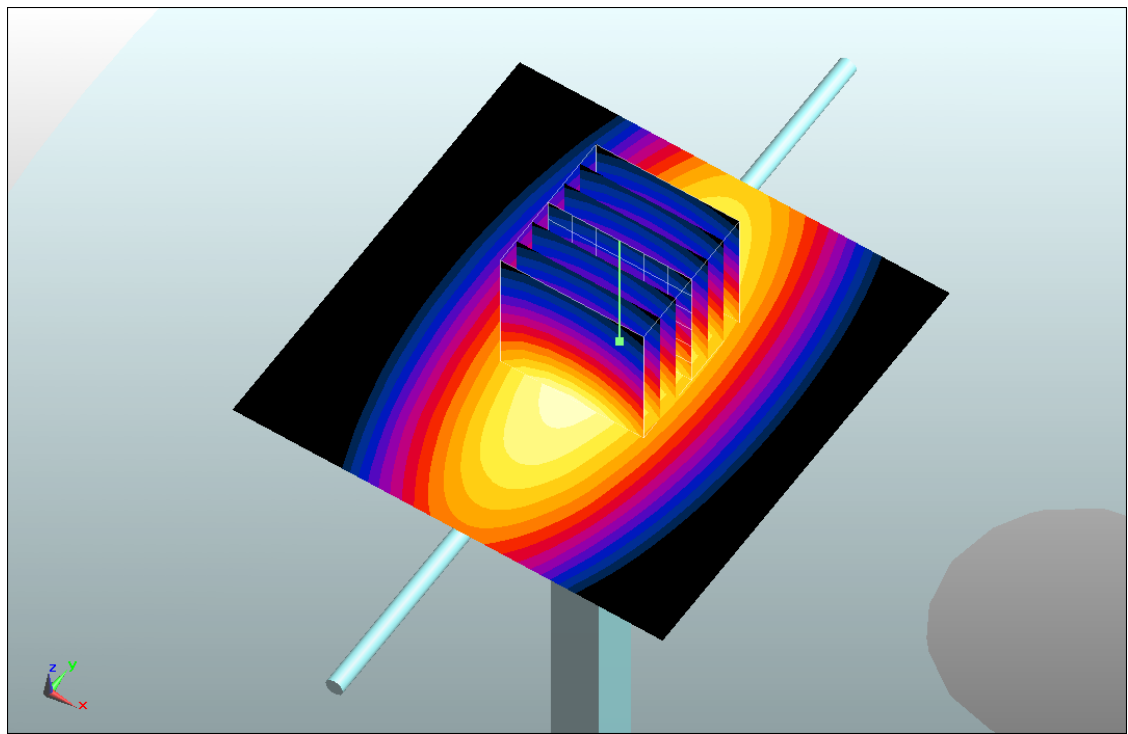

0 dB = 1.05mW/g

System Check_Body_1900MHz_100817

DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_100817 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.04, 7.04, 7.04); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM1; Type: SAM; Serial: TP-1477
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 4.57 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.5 V/m; Power Drift = -0.00135 dB

Peak SAR (extrapolated) = 7.55 W/kg

SAR(1 g) = 4.01 mW/g; SAR(10 g) = 2.06 mW/g

Maximum value of SAR (measured) = 4.57 mW/g

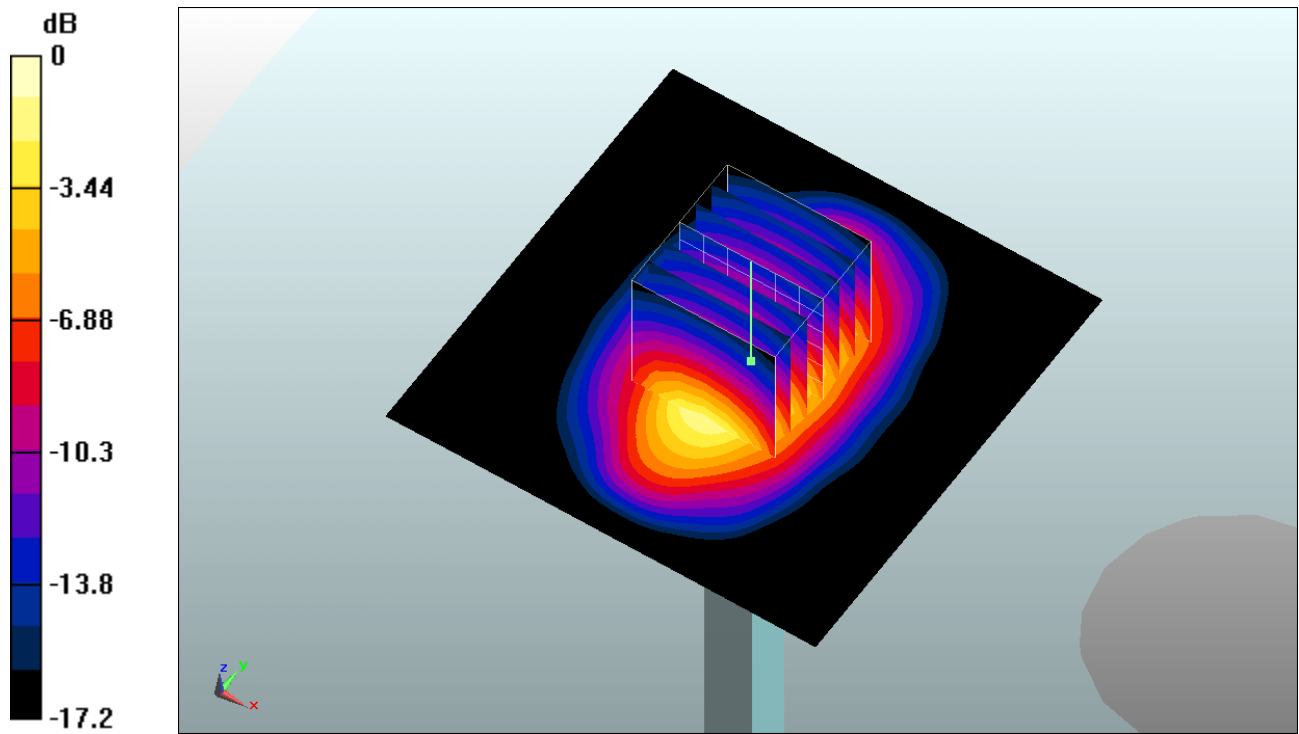

0 dB = 4.57mW/g

System Check_Body_1900MHz_100818

DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_100818 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.04, 7.04, 7.04); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM1; Type: SAM; Serial: TP-1477
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 4.58 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54 V/m; Power Drift = -0.0079 dB

Peak SAR (extrapolated) = 7.49 W/kg

SAR(1 g) = 4 mW/g; SAR(10 g) = 2.05 mW/g

Maximum value of SAR (measured) = 4.49 mW/g

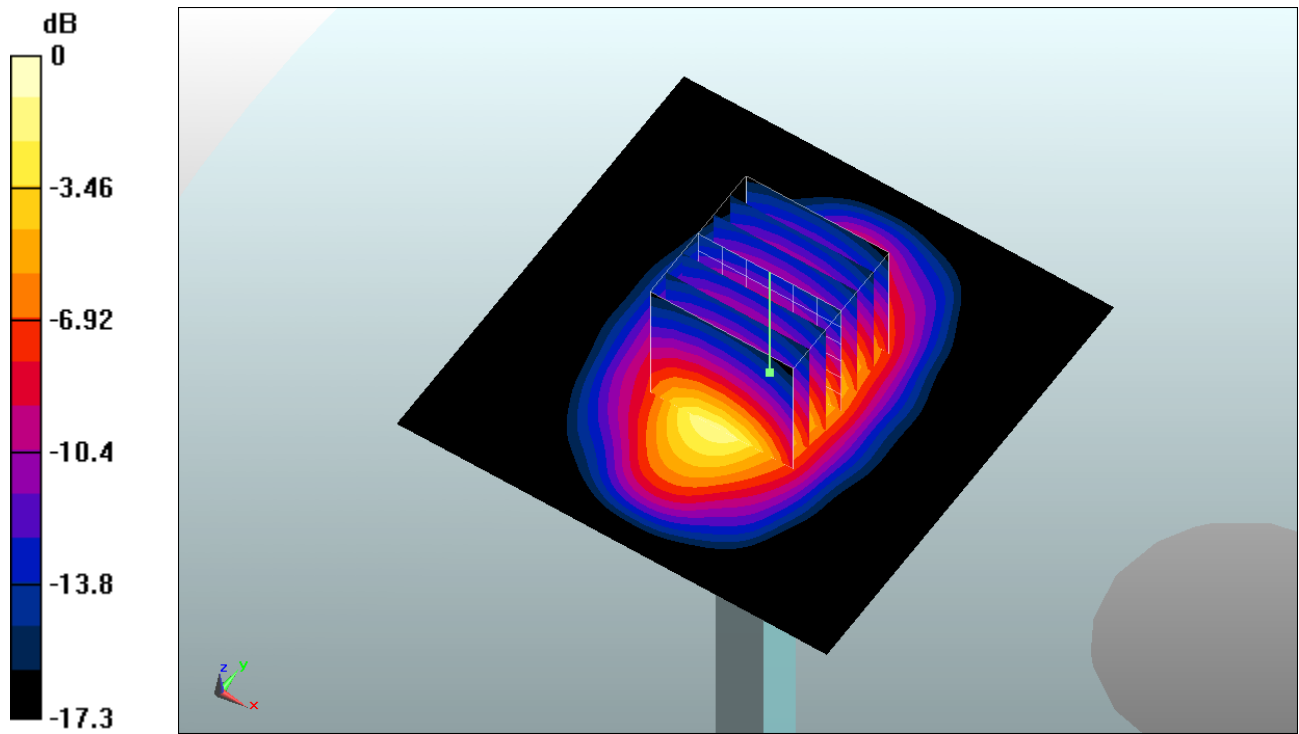

0 dB = 4.49mW/g