

Date : 2008. 4. 1

APPROVAL SHEET

• Part Name : SKQ801 – 0000AA

• Vender Name : SE KWANG

• Description : Quad Band ANTENNA

• Model Name : PG430

APPROVAL	Written	Checked	Approved
			
	2008.4.2	2008.4.2	2008.4.2
	강재호	이동녕	강종훈

QuestLabs co.,Ltd

6th Floor Inquest Bldg., 271-2 Seohyeon-Dong,
Bundang-Gu, Sungnam-Shi, Gyeonggi-Do. Korea,
463-824

Tel: 031-701-6040 Fax: 031-701-5874

www.questlabs.co.kr

QUESTLABS



No. : SEKWANG 2008-16

Date :2008. 04. 01

SPECIFICATION

Product Name	ANTENNA
Customer	
Model Name	PG430
Customer Code.	
Provider	SE KWANG
Part Code.	SKQ801-0000AA

Buyer	Submitted	Checked		Approved
SE KWANG	Submitted	Checked	Checked	Approved
				



– Table of Contents –

1. Product History-----	3
2. Electrical Feature -----	4
2.1 Frequency Band	
2.2 Impedance	
2.3 Matching circuit	
2.4 VSWR	
2.5 Directivity	
2.6 Maximum Power	
3. Environment Test -----	6
4. Electric Performance Data -----	8
5. Drawing -----	11
6. Packing -----	12
7. Certification of RoHS -----	13



1. Product History

LIST					
NO	Data	Front	After	Change	REV
1	2008.04.01			Approval	0
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					



2. Electrical Feature

2.1. Frequency Band

BAND	GSM850		GSM900		DCS1800		PCS1900	
FREQUENCY	Tx	Rx	Tx	Rx	Tx	Rx	Tx	Rx
	824MHz ~ 849MHz	869MHz ~ 894MHz	880MHz ~ 915MHz	925MHz ~ 960MHz	1710MHz ~ 1785MHz	1805MHz ~ 1880MHz	1850MHz ~ 1910MHz	1930MHz ~ 1990MHz

2.2 Impedance

2.2.1 Input Impedance


- $R = 50\Omega$

2.2.2 Measuring Method

By using Network Analyzer, connect the antenna installed handset to the reflection point of Analyzer and measure the impedance value within the designated frequency band.

2.3 Matching circuit

Matching Circuit is composed in free space of 2.1 frequency band while satisfying customer's requirements.

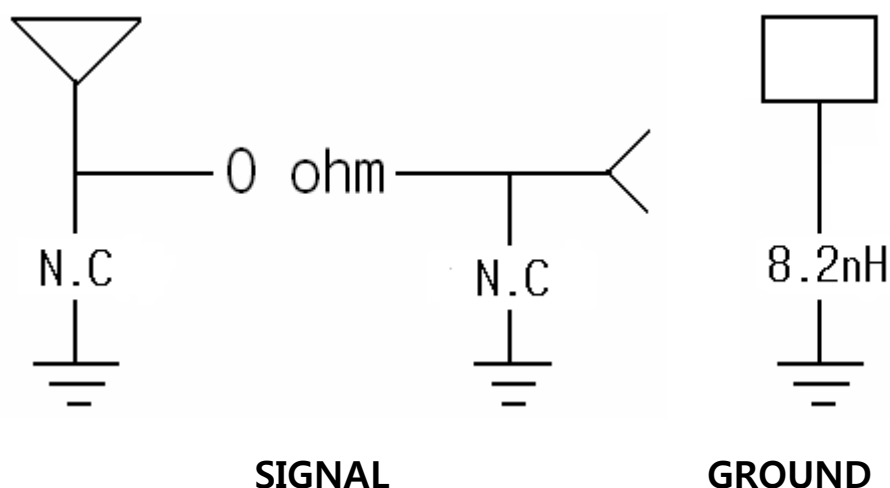

<Figure 2.3.1 Matching circuit>



2.4 VSWR

Impedance Matching optimization is performed under the below mentioned environment.

2.4.1 Free Space Environment

BAND	GSM850	GSM900	DCS1800	PCS1900
FREQ	824MHz	960MHz	1710MHz	1990MHz
BAR	3.5:1	3.0:1	3.0:1	4.0:1

2.4.2 Measuring Method

Connect (soldering) 50Ω semi-rigid coaxial cable to the 50Ω spot in handset. To minimize the loss of transmission, semi-rigid coaxial cable is used. Including PCB, the handset shouldn't be different from the one, which will be used for mass production.

Specification should be the same for all frequency bands. Free Space means that Handset is put on the surface of no conducting plastic.

2.5 Directivity

Omni-directional (Horizontal)

BAND		GSM850	GSM900	DCS1800	PCS1900
GAIN	Avg.	-5.27 dBi	-4.79 dBi	-3.32 dBi	-3.96 dBi
	Peak	-1.77 dBi	-1.44 dBi	0.88 dBi	-0.04 dBi

2.6 Maximum Power

- P=2W Under



3. Environment Test

3.1 Operating Temperature Test

3.1.1 Test Condition

Temperature = -30°C , $+80^{\circ}\text{C}$

Duration time = 1 hour

3.1.2 Requirements

After the test, the antenna must not have an outer damage, and also it must pass requirement shown in 2.4.

3.1.3 Measuring Method

Antenna is kept at -30°C for 1 hour and $+80^{\circ}\text{C}$ for 1 hour and then passed test of 2.4

3.2 Temperature Cycling Test

3.2.1 Test Condition

- Low cycling Temperature TLC = -40°C
- High cycling Temperature THC = $+80^{\circ}\text{C}$
- 1Cycle = 4 hours
- Test number = 10Cycle

3.2.2 Requirements

After the test, the antenna must not have an outer damage, and also it must pass requirement shown in 2.4.



3.2.3 Measuring Method

Antenna is kept at low temperature -40°C for 2 hours and increase the temperature up to $+80^{\circ}\text{C}$ within 2 hour and kept for another 2 hours at the same temperature will be 1 cycle. As shown in Figure 3.2.1 repeat 10 cycle and kept for 2 hour in normal temperature.

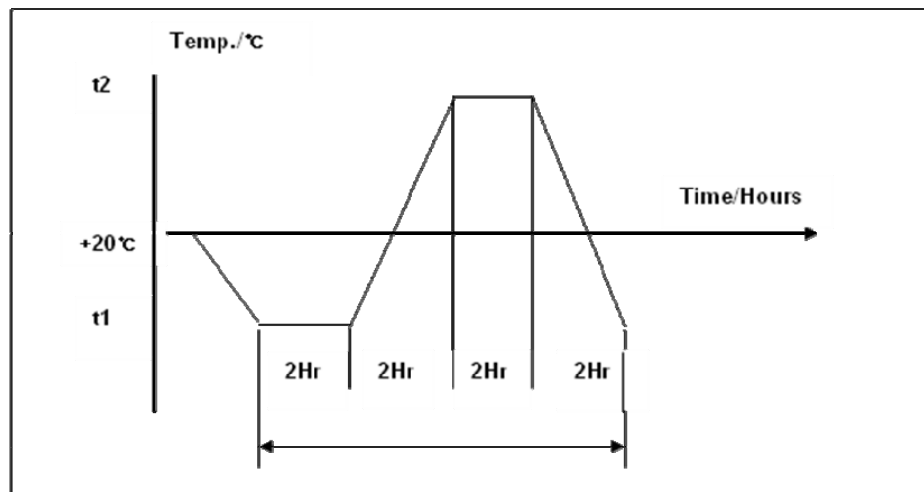


Figure 3.2.1 Temperature Cycling

3.3 Corrosion Resistance Test

3.3.1 Test Condition

- NaCl = 90%
- Water Temperature = 60°C
- Duration Time = 96 hours

3.3.2 Requirements

After the test, the antenna must not have an outer damage, and also it must pass requirement shown in 2.4.


3.3.3 Measuring Method

Antenna is soaked in sodium chloride solution at temperature $+60^{\circ}\text{C}$ and 90%(NaCl) for 96 hours and dry out.



4. Electric Performance Data


4.1.1. Smith Chart & VSWR

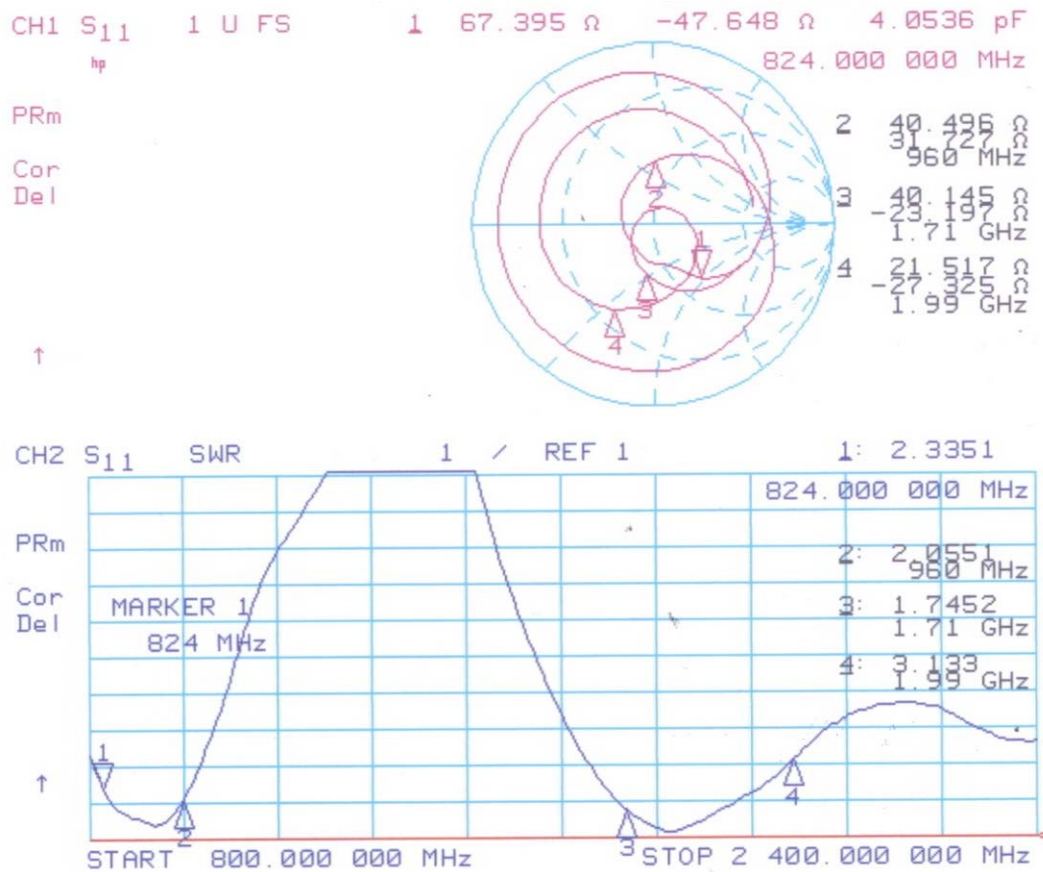




4.2.1. GAIN DATA

GSM850, GSM900

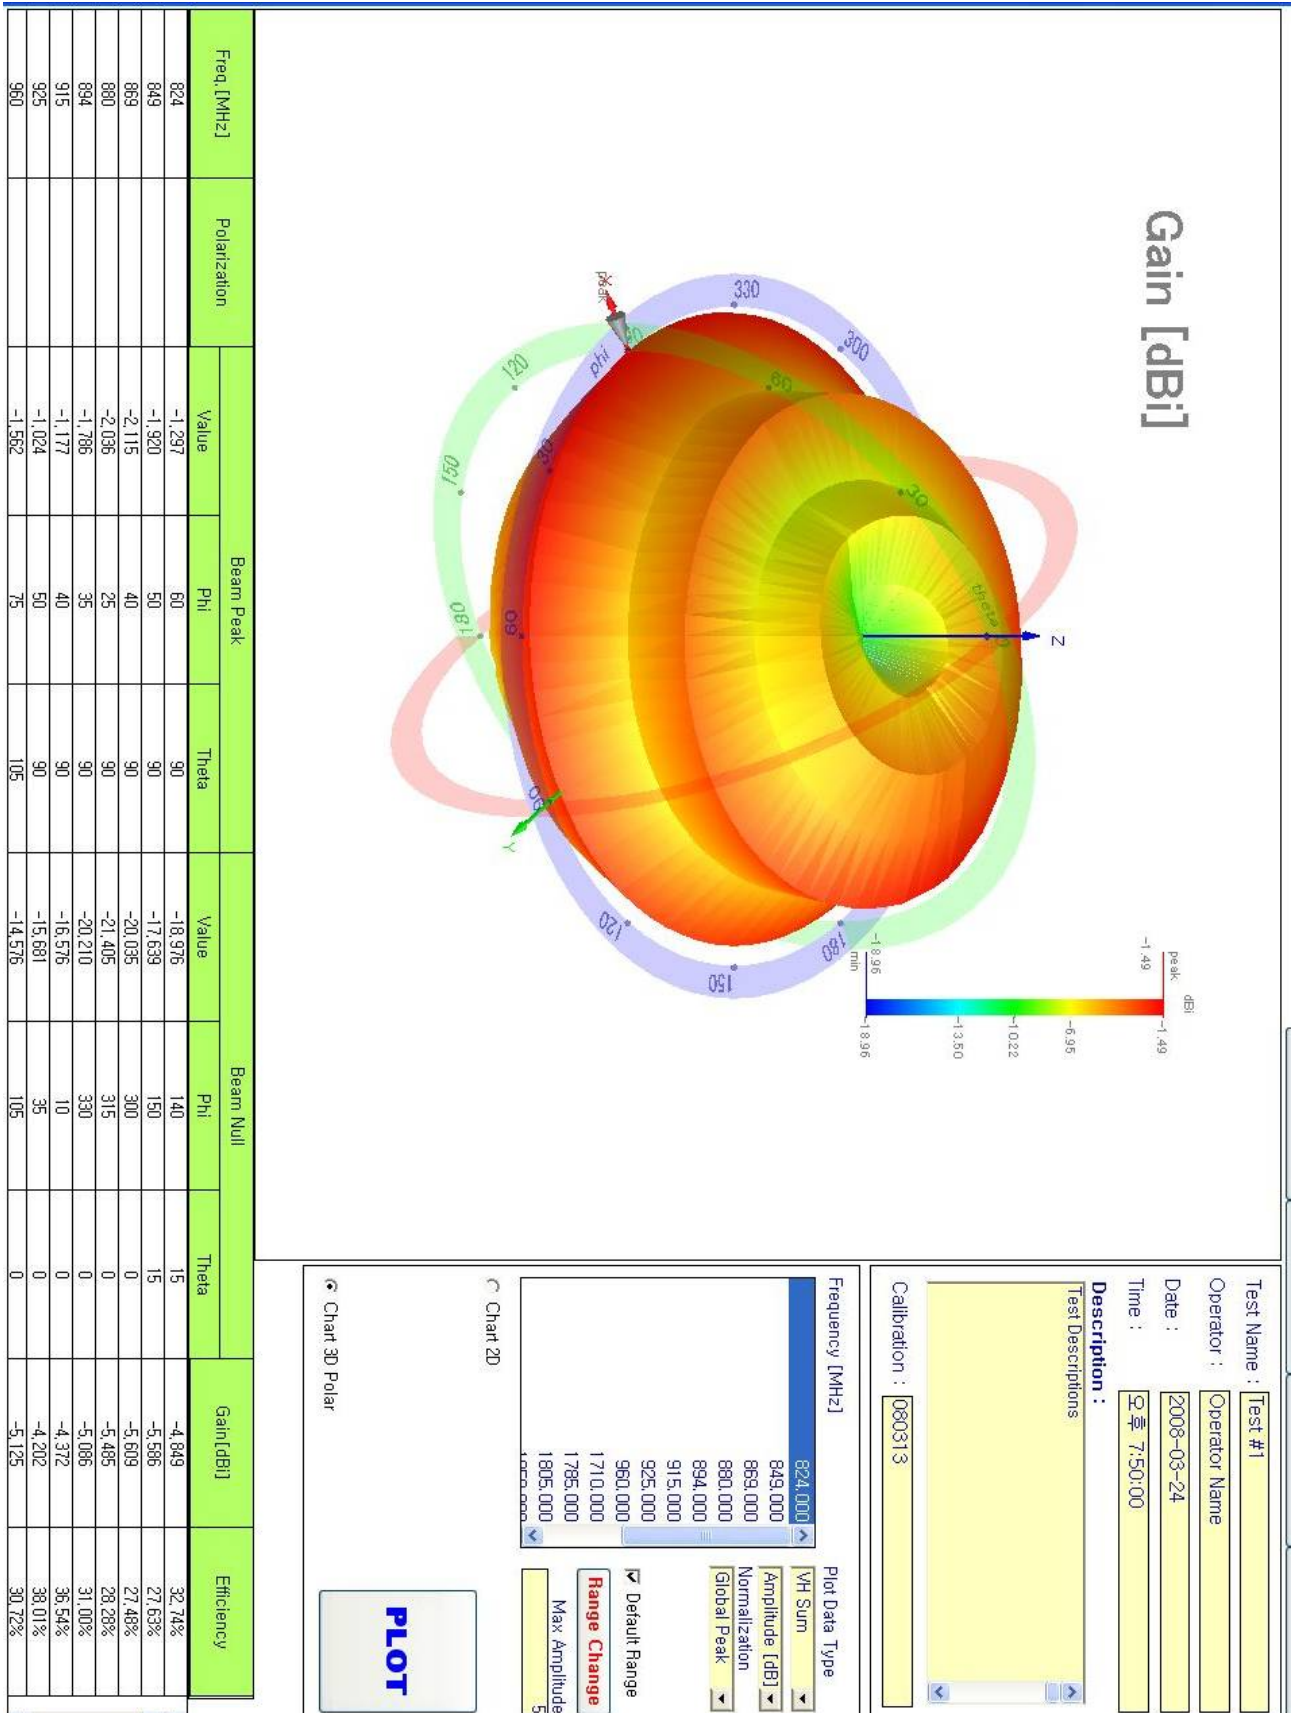




DCS1800, PCS1900

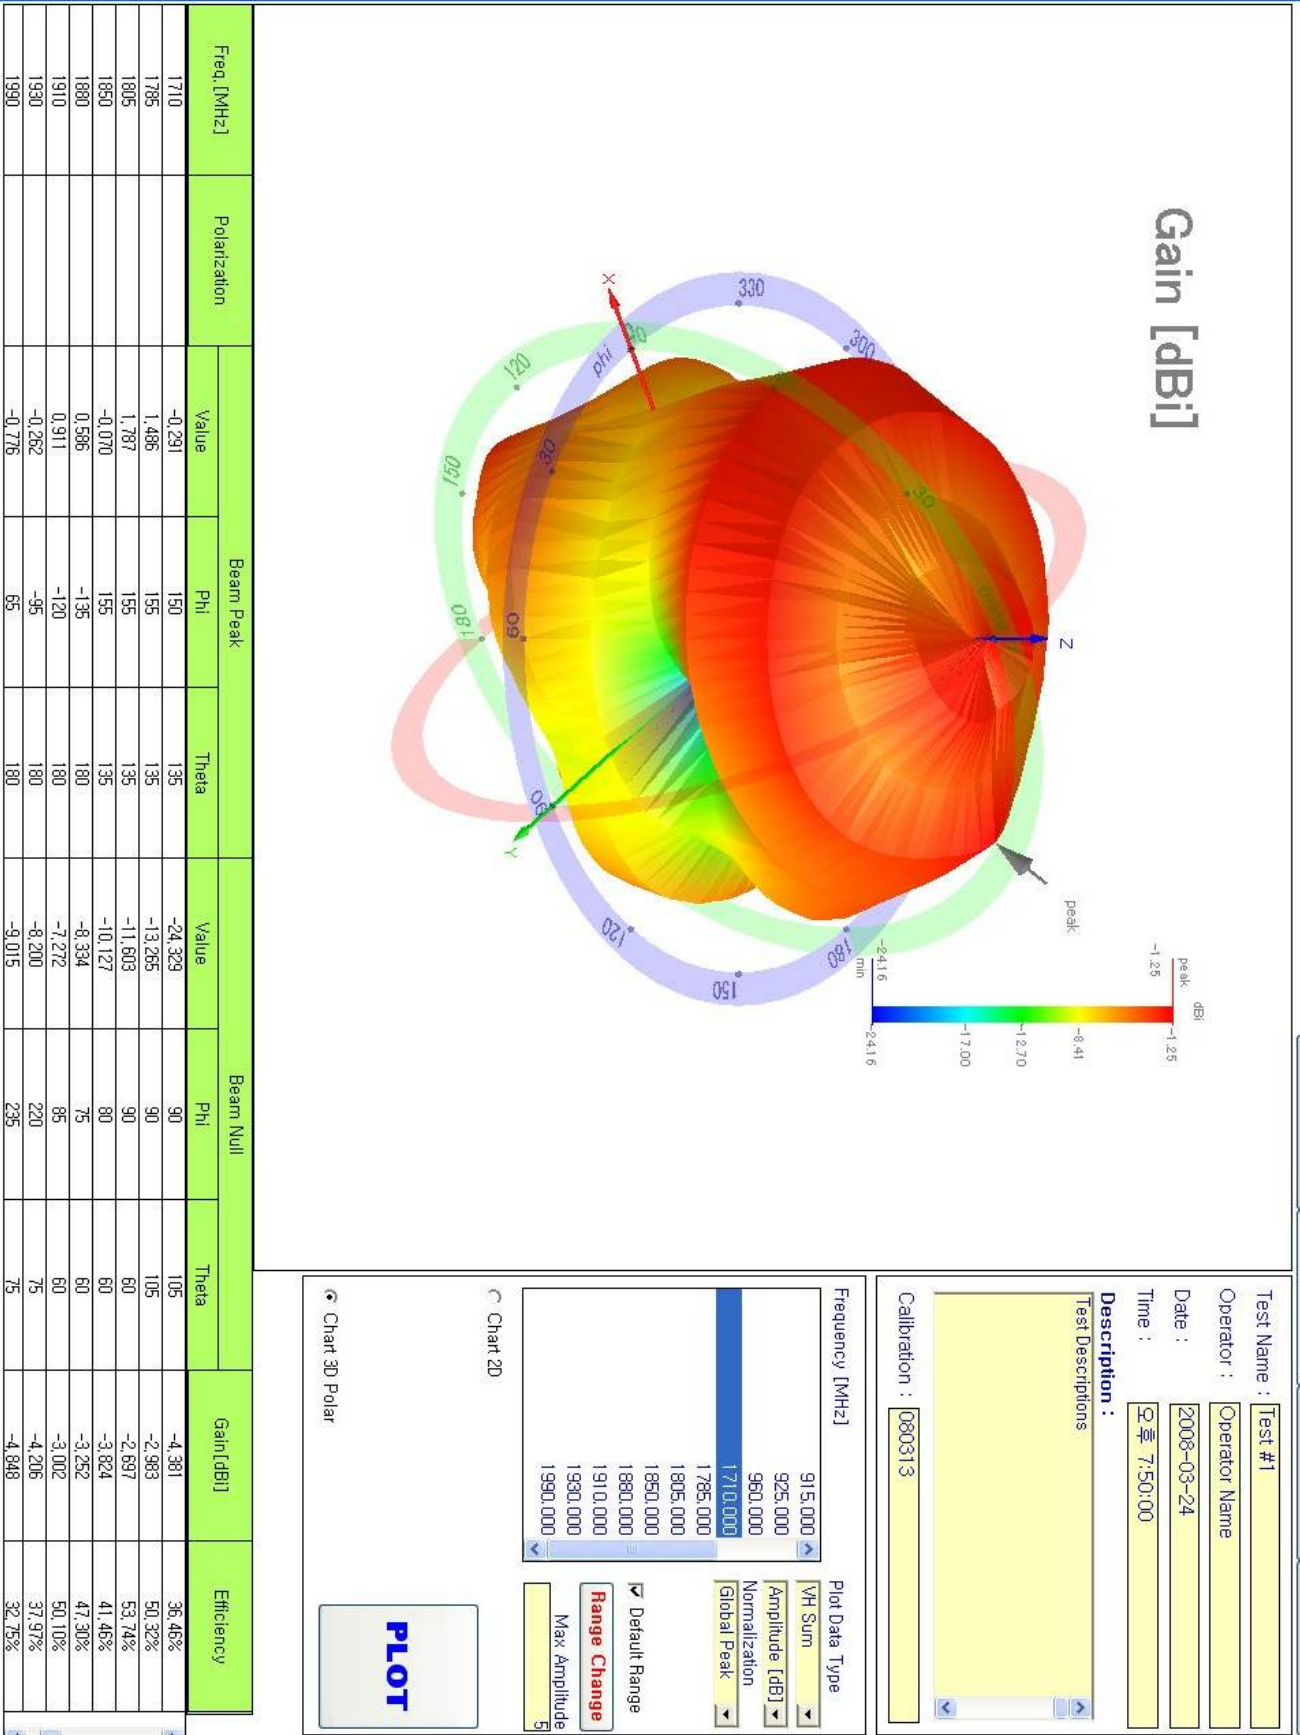



5. Drawing

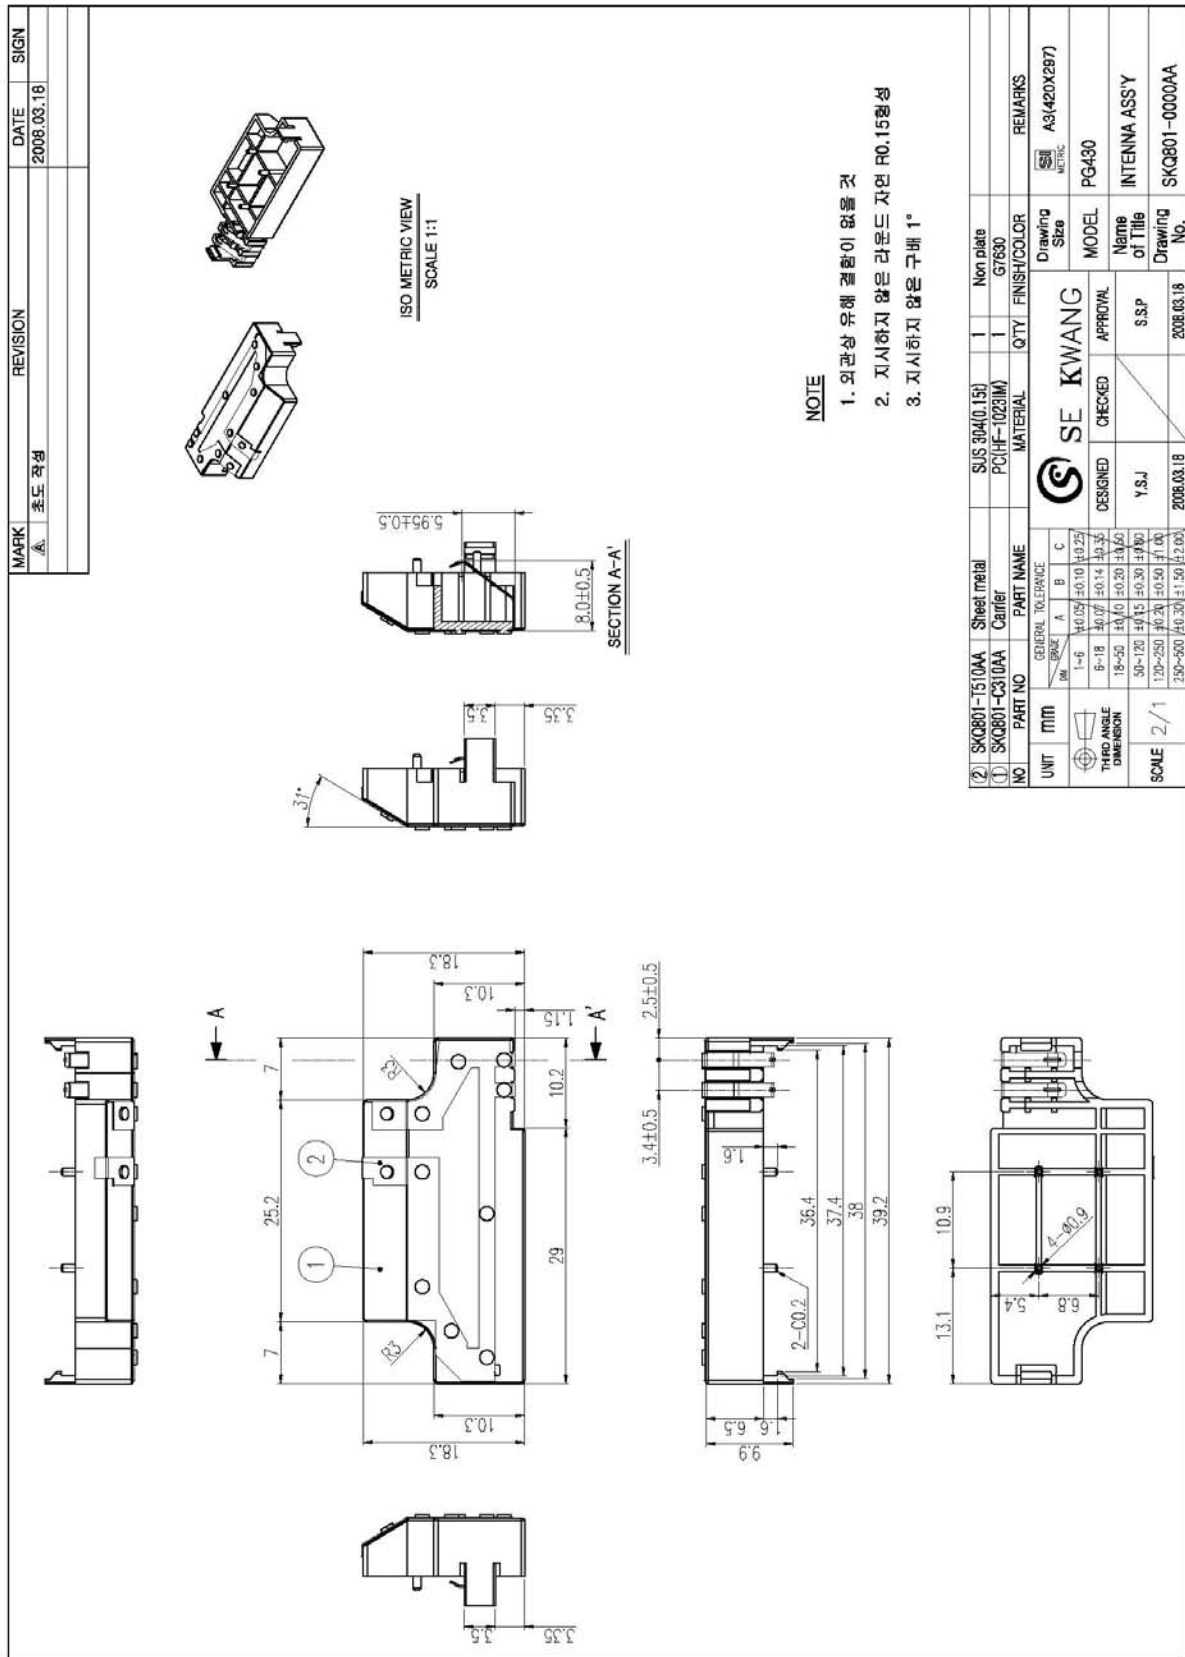



6. Packing

(ANTENNA TOTAL : 1,320 PCS)

Product	
Color	
CODE NO.	
LOT NO.	
Quality	
Etc.	

PRINTED TABLE

⑤	PACKING TAPE	-	-		
④	C/T BOX	SW2	1		
③	PAD	SW1	1		
②	INNER CASE	P.S	22		
①	ANTENNA	-	1,320		
NO	PART NAME	MATERIAL	Q'TY	FINISH//COLOR	REMARKS

UNIT	mm	GENERAL TOLERANCE					Drawing Size METRIC A4(210X297)	
	THIRD ANGLE DIMENSION	DIM	GRADE	A	B			C
		1~6	±0.05	±0.10	±0.25			
		6~18	±0.07	±0.14	±0.35			
		18~50	±0.10	±0.20	±0.50			
SCALE	1/2	50~120	±0.15	±0.30	±0.80			
		120~250	±0.20	±0.50	±1.00			
		250~500	±0.30	±1.50	±2.00			
		DESIGNED	CHECKED	APPROVAL	MODEL	PACKING		
		PARK.S.S			Name of Title			
					Drawing No.	-		



7.Certification of RoHS

7.1. CARRIER(PC HF-1023IM)

ECO-013163




Result of RoHS

Company DAE SANG PRECISIDN

Grade/Color HF-1023IM/K2261

Application ANTENNA

Organization Chemicals R&D Center of Samsung Cheil Industries Inc.

Material

Section	Material	Remark
Grade	HF-1023IM	
Color	K2261	B707,DK03

Test Results

Test Items	Test Method	Analyzer	Unit(ppm)	M.D.L	Contents
Heavy Metals	Cd	EN 1122	ICP-AES	mg/kg	0.5 N.D
	Pb	US EPA 3050B	ICP-AES	mg/kg	5 N.D
	Hg	US EPA7473	Hg Analyzer	mg/kg	0.03 N.D
	Cr ⁶⁺	USEPA 3060A	UV/VIS	mg/kg	1 N.D
Flame Retardants	PBB	Cheil Method	GC/MS	mg/kg	5 N.D
	PBDE	Cheil Method	GC/MS	mg/kg	5 N.D

* This results are not violated Eu regulations * M.D.L : Method Detection Limit * ND : Not Detected

Charger : Choi, Sooman *Choi Sooman*, Approver : Han, Yeonjong *Y. J. Han*

Published Date : January 02, 2008

Approved Date : January 01, 2008

Quality Management Team





7-2. SHEET METAL(STS 304)

SGS**Test Report No.** F690501/LF-CTSAYA07-25042

Issued Date: November 14, 2007 Page 1 of 4

To: TAIHAN STAINLESS STEEL CO., LTD
603 Seonggok-dong
Danwon-gu
Ansan-city
GYEONGGI-DO
Korea

The following merchandise was submitted and identified by the client as :

Product Name : STS304
SGS File No. : AYA07-25042
Received Date : November 08, 2007
Test Performing Date : November 09, 2007
Test Performed : SGS Testing Korea tested the sample(s) selected by applicant with following results
Test Results : For further details, please refer to following page(s)
Buyer(s) : LG,SAMSUNG

Pluto Kim
Monet Jeong
Billy Oh / Testing Person

SGS Testing Korea Co. Ltd.

Jeff Jang / Chemical Lab Mgr

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated the results shown in this test report refer only to the sample (s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

F052 Version2

**SGS****Test Report No. F690501/LF-CTSAYA07-25042**

Issued Date: November 14, 2007 Page 2 of 4

Sample No. : AYA07-25042.001
Sample Description : STS304
Style/Item No. : N/A
Comments : Material is stainless steel.

Heavy Metals

Test Items	Unit	Test Method	MDL	Results
Cadmium (Cd)	mg/kg	US EPA 3052(1996), US EPA 6010B(1996), ICP	0.5	N.D.
Lead (Pb)	mg/kg	US EPA 3052(1996), US EPA 6010B(1996), ICP	5	N.D.
Mercury (Hg)	mg/kg	US EPA 3052(1996), US EPA 6010B(1996), ICP	2	N.D.
Hexavalent Chromium (Cr VI)	mg/kg	US EPA 3060A(1996), US EPA 7196A(1992), UV	1	N.D.

Flame Retardants-PBBs/PBDEs

Test Items	Unit	Test Method	MDL	Results
Monobromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Dibromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Tribromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Tetrabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Pentabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Hexabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Heptabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Octabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Nonabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Decabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Monobromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Dibromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Tribromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Tetrabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Pentabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Hexabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Heptabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Octabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Nonabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Decabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.

NOTE: (1) N.D. = Not detected.(<MDL)
(2) mg/kg = ppm
(3) MDL = Method Detection Limit
(4) - = No regulation
(5) ** = Qualitative analysis (No Unit)
(6) Negative = Undetectable / Positive = Detectable

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated the results shown in this test report refer only to the sample (s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

F052 Version2



Test Report No. F690501/LF-CTSAYA07-25042

Issued Date: November 14, 2007 Page 3 of 4

Picture of Sample as Received:

Sample Color : Silver



- NOTE:
- (1) N.D. = Not detected.($<$ MDL)
 - (2) mg/kg = ppm
 - (3) MDL = Method Detection Limit
 - (4) - = No regulation
 - (5) ** = Qualitative analysis (No Unit)
 - (6) Negative = Undetectable / Positive = Detectable

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated the results shown in this test report refer only to the sample (s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

F052 Version2




Test Report No. F690501/LF-CTSAYA07-25042

Issued Date: November 14, 2007 Page 4 of 4

Flow Chart of Digestion

(EPA 3052 for Cd, Pb)

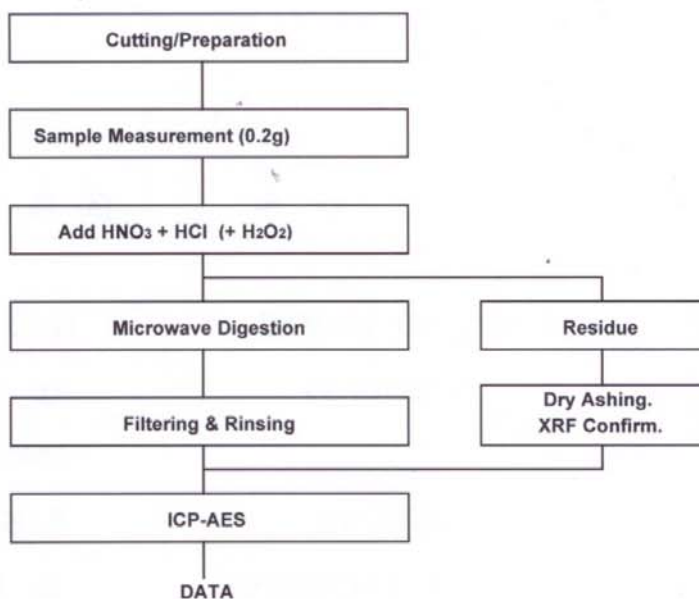

The samples were dissolved totally by pre-conditioning method according to above flow chart.

Operator Dami Yeom

Section Chief Jeff Jang

*** End ***

NOTE: (1) N.D. = Not detected.(<MDL)
(2) mg/kg = ppm
(3) MDL = Method Detection Limit
(4) - = No regulation
(5) ** = Qualitative analysis (No Unit)
(6) Negative = Undetectable / Positive = Detectable

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated the results shown in this test report refer only to the sample (s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

F052 Version2