

Test Report #:	WC403349 Run 12	Test Area:	LTS			
EUT Model #	RSU-2400A	Date:	10/8/04	_		
EUT Serial #		EUT Power:	60 Hz / 110 VAC	Temperature:	23.0	°C
Test Method:	FCC B			Air Pressure:	99.0	kPa
Customer	Next Net			Rel. Humidity:	65.0	%
EUT Description:	2.4 GHz TRx & Rcvr Residental Sub-	scriber Unit				_
Notes:	transmitter on					
Data File Name:	3349.dat			Pag	e: 1 of	f <b>4</b>

List of me	asureme	nts for run #: 12				
FREQ	LEVEL	CABLE / ANT / PREAMP /	FINAL	POL/HGT/AZ	DELTA1	DELTA2
	(dBuV)	ATTEN	(dBuV/m)	(m)(DEG)	FCC-B <1GHz	FCC B >1GHz
	,,	(dB)	` '	, , ,	3m	3m
37.32 MHz	38.51 Qp	0.48 / 17.7 / 25.9 / 0.0	30.79	V / 1.00 / 0	-9.21	n/a
75.0 MHz	50.24 Qp	0,71/8.2/25.8/0.0	33.35	V / 1.00 / 0	-6.65	n/a
124.48 MHz	53.55 Qp	0.94 / 8.98 / 26.02 / 0.0	37.45	V / 1.00 / 0	-6.05	n/a
150.0 MHz	54.09 Qp	1.0 / 9.97 / 25.92 / 0.0	39.14	V / 1,00 / 0	-4.36	n/a
156.85 MHz	51.81 Qp	1.0 / 9.12 / 25.95 / 0.0	35.98	V / 1.00 / 0	-7.52	n/a
162.9 MHz	55.21 Qp	1.03 / 9.0 / 26.0 / 0.0	39.23	V / 1.00 / 0	-4.27	n/a
280.0 MHz	57.32 Qp	1.5 / 12.66 / 26.48 / 0.0	45.0	V / 1.00 / 0	-1.0	n/a
325.75 MHz	49.66 Qp	1.53 / 14.0 / 26.7 / 0.0	38.49	V / 1.00 / 0	-7.51	n/a
405.5 MHz	46.66 Qp	1.7 / 16.3 / 26.72 / 0.0	37.94	V / 1.00 / 0	-8.06	n/a
980.0 MHz	35.75 Qp	2.71 / 24.14 / 26.42 / 0.0	36.18	V / 1.00 / 0	-17.82	n/a
280.0 MHz	31.61 Qp	1.5 / 12.66 / 0.0 / 0.0	45.77	V / 1.80 / 100	-0.23	n/a
280.0 MHz	46.12 Qp	1.5 / 12.66 / 26.48 / 0.0	33.8	V / 1.80 / 100	-12.2	n/a
280.0 MHz	56.54 Qp	1.5 / 12.66 / 26.48 / 0.0	44.22	H/3.00/0	-1.78	n/a
added ferrite on	ethernet cable	at the eut end				· · · · · · · · · · · · · · · · · · ·
added ferrite on	router end of e	thernet cable		<u> </u>		
280.0 MHz	56.41 Qp	1.5 / 12.66 / 26.48 / 0.0	44.09	H / 1.00 / 70	-1.91	n/a
1.494 GHz	42.88 Av	3.42 / 26.7 / 26.3 / 0.0	46.7	V / 1.00 / 0	n/a	-7.3
2.335 GHz	41.43 Av	4.23 / 30.34 / 26.86 / 0.0	49.14	V / 1.00 / 0	n/a	-4.86

Tested by:	J. T. Schneider	
	Printed	Signature
Reviewed by:		
	Printed	Signature



Test Report #:	WC403349 Run 12	Test Area:	LTS				
EUT Model #.	RSU-2400A	Date:	10/8/04				
EUT Serial #.		EUT Power:	60 Hz / 110 VAC	Temperature:	_2	23.0	°C
Test Method:	FCC B			Air Pressure:		99.0	kPa
Customer	Next Net			Rel. Humidity:	: 6	65.0_	%
EUT Description:	2.4 GHz TRx & Rcvr Residents	Subscriber Unit					
Notes:	transmitter on						
Data File Name:	3349.dat			Pa	age:	2 of	4

Measurement summary for limit1: FCC-B <1GHz 3m (Qp)					
FREQ	LEVEL	CABLE / ANT / PREAMP /	FINAL	POL/HGT/AZ	DELTA1
	(dBuV)	ATTEN	(dBuV/m)	(m)(DEG)	FCC-B <1GHz
	( /	(dB)			3m
280.0 MHz	31.61 Qp	1.5 / 12.66 / 0.0 / 0.0	45.77	V / 1.80 / 100	-0.23
162.9 MHz	55.21 Qp	1.03 / 9.0 / 26.0 / 0.0	39.23	V / 1.00 / 0	-4.27
150.0 MHz	54.09 Qp	1.0 / 9.97 / 25.92 / 0.0	39.14	V / 1.00 / 0	-4.36
124.48 MHz	53.55 Qp	0.94 / 8.98 / 26.02 / 0.0	37.45	V / 1.00 / 0	-6.05
75.0 MHz	50.24 Qp	0.71 / 8.2 / 25.8 / 0.0	33.35	V / 1.00 / 0	-6.65
325.75 MHz	49.66 Qp	1.53 / 14.0 / 26.7 / 0.0	38.49	V / 1.00 / 0	-7.51
156.85 MHz	51.81 Qp	1.0 / 9.12 / 25.95 / 0.0	35.98	V / 1.00 / 0	-7.52
405.5 MHz	46.66 Qp	1.7 / 16.3 / 26.72 / 0.0	37.94	V / 1.00 / 0	-8.06
37.32 MHz	38.51 Qp	0.48 / 17.7 / 25.9 / 0.0	30.79	V/1.00/0	-9.21
980.0 MHz	35.75 Qp	2.71 / 24.14 / 26.42 / 0.0	36.18	V / 1.00 / 0	-17.82

Tested by:	J. T. Schneider	
<del>-</del>	Printed	Signature
Reviewed by:		
, <u> </u>	Printed	Signature



Test Report #.	WC403349 Run 12	Test Area:	LTS				
EUT Model #	RSU-2400A	Date:	10/8/04				
EUT Serial #:		EUT Power.	60 Hz / 110 VAC	Temperatu	ıre:	23.0	°C
Test Method:	FCC B			Air Pressu	ıre:	99.0	kPa
Customer:	Next Net			Rel. Humic	lity:	65.0	%
EUT Description:	2.4 GHz TRx & Rcvr Residental Sub	scriber Unit					
Notes:	transmitter on						
Data File Name:	3349.dat				Page:	3 of	4


Measuren	nent sum	mary for limit2: FC0	B >1GH	z 3m (Av)	
FREQ	(dBuV)	CABLE / ANT / PREAMP / ATTEN	FINAL (dBuV/m)	POL / HGT / AZ (m)(DEG)	DELTA2 FCC B >1GHz 3m
2.335 GHz	41.43 Av	(dB) 4.23 / 30.34 / 26.86 / 0.0	49.14	V / 1.00 / 0	-4.86
1 494 GHz	42.88 Av	3.42 / 26.7 / 26.3 / 0.0	46.7	V / 1.00 / 0	-7.3

Tested by:	J. T. Schneider		
· <del></del>	Printed	Signature	
Reviewed by:			
-	Printed	Signature	



Test Report #:	WC403349 Run 12	Test Area:	LTS			
EUT Model #:	RSU-2400A	Date:	10/8/04			
EUT Serial #:		EUT Power:	60 Hz / 110 VAC	Temperature:	23.0	0_ °C
Test Method:	FCC B			Air Pressure:	99.	0 kPa
Customer.	Next Net			Rel. Humidity:	65.	0 %
EUT Description:	2.4 GHz TRx & Rcvr Residen	ntal Subscriber Unit				
Notes:	transmitter on					
Data File Name:	3349.dat			Pag	e: 4	of 4

## Graph:

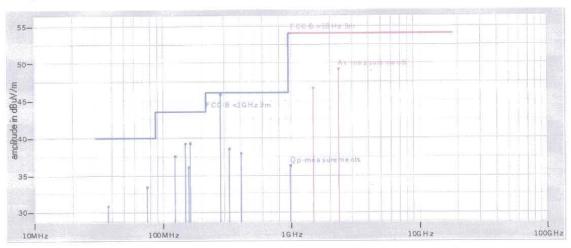

Tested by:	J. T. Schneider	
	Printed	Signature
Reviewed by:		
	Printed	Signature