

**TEST-REPORT No. 50305-10031-1**

|                      |   |
|----------------------|---|
| Product Description  | <b>Transceiver</b>  |
| Brand                | <b>Orderman LEO</b>   |
| Model / Type         | <b>OM9401 US</b>  |
| Serial No.           | ---   |
| Applicant            | <b>think dig High Tech Solutions GmbH<br/>Bachstrasse 59<br/>A-5023 Salzburg</b>  |
| Contact              | <b>Klaus Strasser</b>   |
| Order / Date         | <b>January 18, 2001</b>   |
| Test sample received | <b>January 18, 2001</b>   |
| Test Specification   | <b>FCC Rules Part 15, Subpart C, Section 15.249<br/>Industry Canada RSS 210, Issue 2,</b>   |
| Test Result          | <b>The tested sample complies with the test specifications</b>  |
| Tested by            | <b>March 08, 2001</b>   |
|                      | <b>Johann Roidt</b> Date  |
| Checked              | <b>March 08, 2001</b>   |
|                      | <b>Johann Roidt</b> Date  |
| Note                 | <p>The test data of this report relate only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.</p> |

## Table of Contents

|  |           |
|--|-----------|
| <b>1. Operation Mode of EUT .....</b>                                  | <b>3</b>  |
| <b>2. Changes made to the EUT during this certification test .....</b> | <b>4</b>  |
| <b>3. Configuration of EUT and periperal devices .....</b>             | <b>5</b>  |
| <b>4. Measuring Methods.....</b>                                       | <b>6</b>  |
| Transmitter Parameter TestS (§15.209).....                             | 6         |
| Radiated Emissions 0.009 – 30 MHz .....                                | 7         |
| Radiated Emissions 30 MHz – 1 GHz .....                                | 8         |
| Radiated Emissions above 1 GHz.....                                    | 9         |
| Procedure for preliminary Radiated Emission Tests .....                | 10        |
| Method for comparing spectrum analyzer output to the limit .....       | 11        |
| Spectrum analyzer setting for final test .....                         | 11        |
| <b>5. Photographs taken during testing .....</b>                       | <b>12</b> |
| <b>6. List of Measurements .....</b>                                   | <b>14</b> |
| <b>7. Test Results.....</b>  | <b>15</b> |
| <b>8. Equipment List .....</b>   | <b>18</b> |
| <b>9. Charts taken during Testing.....</b>                             | <b>20</b> |

## 1. Operation Mode of EUT

The EUT was equipped with a test software which allowed independent access to individual RF channels as well as transmit and receive mode. All tests were performed at lowest and highest RF-channel.

## **2. Changes made to the EUT during this certification test**

No changes have been made to the EUT during this certification test.

### **3. Configuration of EUT and peripheral devices**

#### **Configuration of cables connected to the EUT**

Not applicable

#### **Configuration of peripheral devices connected to the EUT**

Not applicable

#### 4. Measuring Methods


##### Transmitter Parameter TestS (§15.209)

All transmitter parameter radiated tests are performed at a test distance of 3 meters in a semianechoic chamber. During the tests the EUT will be rotated all around and the receiving antenna will be raised and lowered from 1 meter to 4 meter to find the maximum levels of emission. Cables and equipment will be placed and moved within the position likely to find their maximum emissions.

Measurements will be made in horizontal and vertical polarization of the receiving antenna.

The EUT was operating in transmit mode with its internal modulation.

The bandwidth of the emission will be measured with a spectrum analyzer. Resolution Bandwidth and Video Bandwidth will be set to 10 kHz.

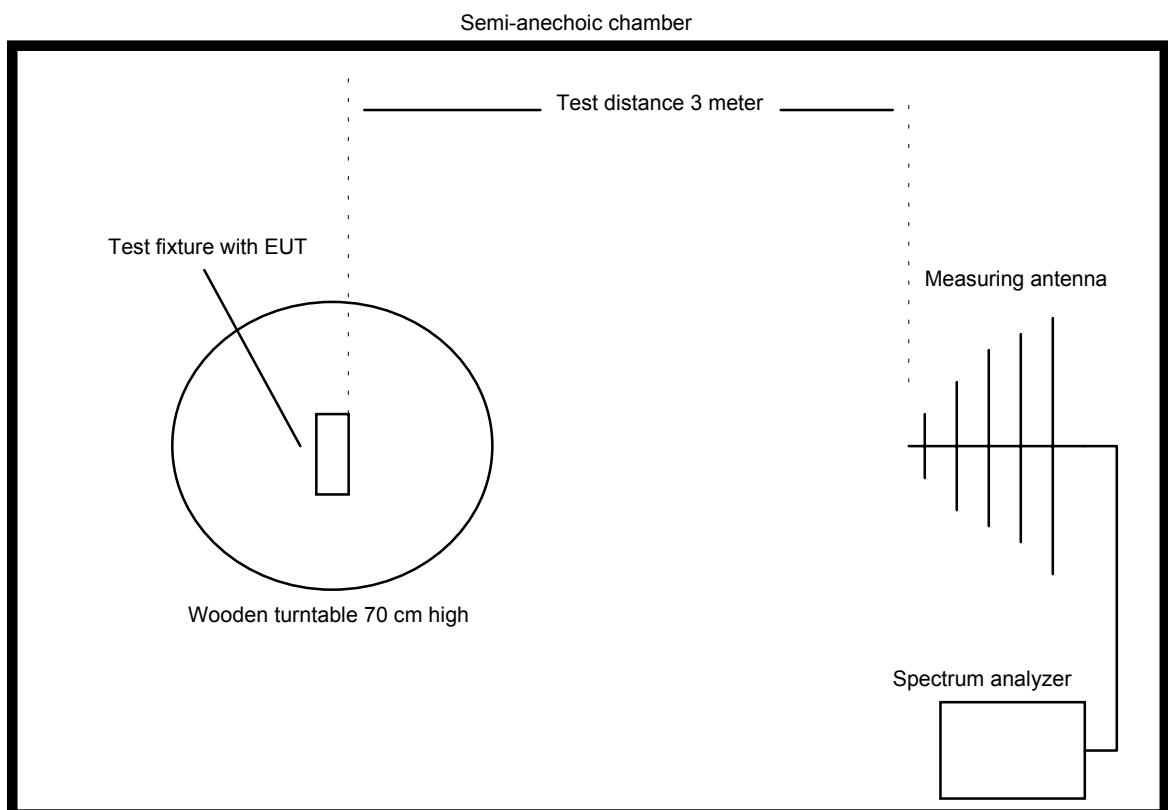

## Radiated Emissions 0.009 – 30 MHz

Radiated emissions in the frequency range 0.009 – 30 MHz will be measured initially at a distance of 3 meters. A prescan at 3 meter distance will be performed in a shielded room with the detector of the spectrum analyzer or EMI Receiver set to peak. Final measurement is then performed at 30 meter distance. In case the regulation requires testing at other distances, the result will be extrapolated. The extrapolation factor will be determined by making a second measurement at 10 meter distance. The provisions of 15.31 (d) apply.

According to section 15.209 (d) final measurements is performed with the detector set to Quasi Peak except for the frequency bands 9 – 90 kHz and 110 – 490 kHz where average detector is employed.


## Radiated Emissions 30 MHz – 1 GHz (FCC §15.109, RSS-210 Section 7.3)

Radiated emissions in the frequency range 30 – 1000 MHz will be measured at a distance of 3 meter. The bandwidth of the spectrum analyzer will be set to 100 kHz and the detector function set to Quasi Peak.

The test setup will be made in accordance with ANSI C.63.4-1992.

Measurements will be made in horizontal and vertical polarization of the receiving antenna. Prescans will be taken in a semianechoic chamber using a spectrum analyzer with the detector function set to peak. All tests will be performed at a test distance of 3 meters. For final testing an open field test site will be used. During the tests the EUT will be rotated all around and the receiving antenna will be raised and lowered from 1 meter to 4 meters to find maximum levels of emissions.

For handheld equipment the tests will be performed in three orthogonal axes.

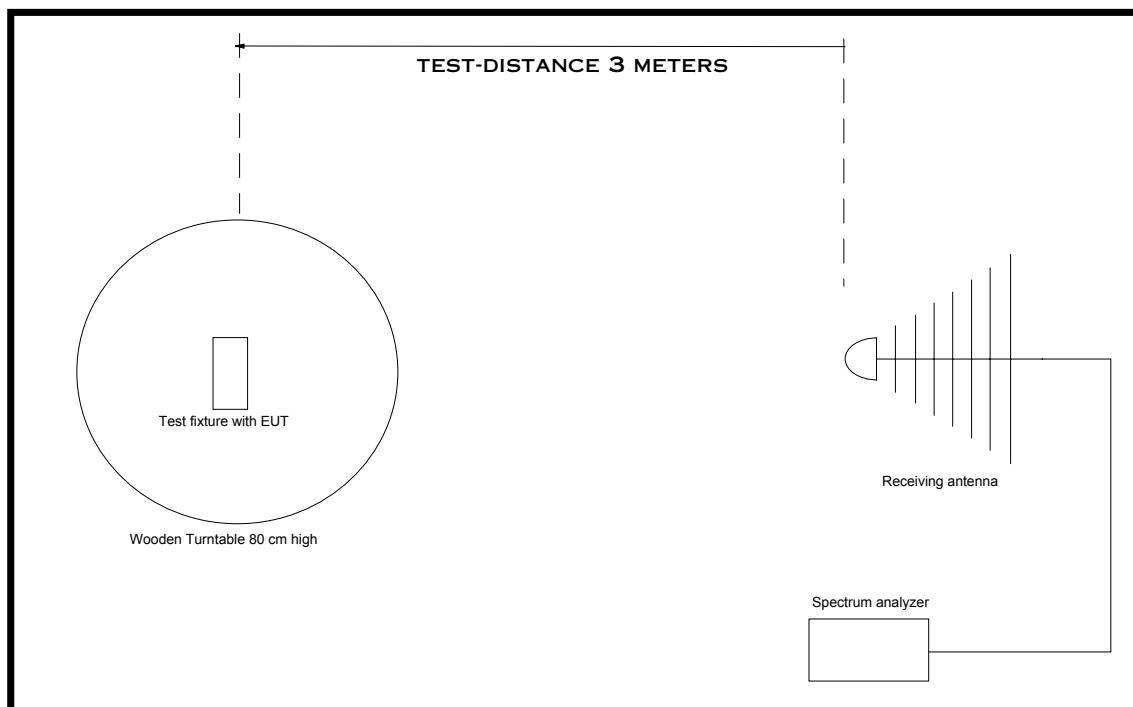


## Radiated Emissions above 1 GHz (FCC §15.109, RSS-210 Section 7.3)

Radiated emissions were measured in the frequency range 1 GHz to 3.15 GHz in transmit mode. The resolution bandwidth and the video bandwidth of the spectrum analyzer was set to 1 MHz. Prescans with video bandwidth 1 MHz (peak mode) were taken to check out the highest levels (with reference to the limits), see 6.4 for details to prescan procedure. Final measurements were performed at the three highest emissions per band. EUT was rotated all around and receiving antenna was raised and lowered to find the maximum levels of emission. Cables and equipment were placed and moved within the range of position likely to find their maximum emissions. Measurements were made in horizontal and vertical polarization. All tests were performed in a semi-anechoic chamber with a test-distance of 3 meters. For handheld equipment the tests will be performed in three orthogonal axes.

To avoid overload in transmit mode a high pass filter was connected to the input of the preamplifier (in case when a preamplifier was necessary). In this case a signal generator was used for substitution to eliminate the influence of filter and preamplifier.

Substitution was performed in the following steps:

- antenna cable was disconnected from receiving antenna and connected to signal generator output
- level of signal generator was increased until the reading value of the analyzer was the same as caused by EUT
- level of signal generator was noted
- final value was calculated by converting the signal generator level to dB $\mu$ V/m and adding the antenna correction factor.

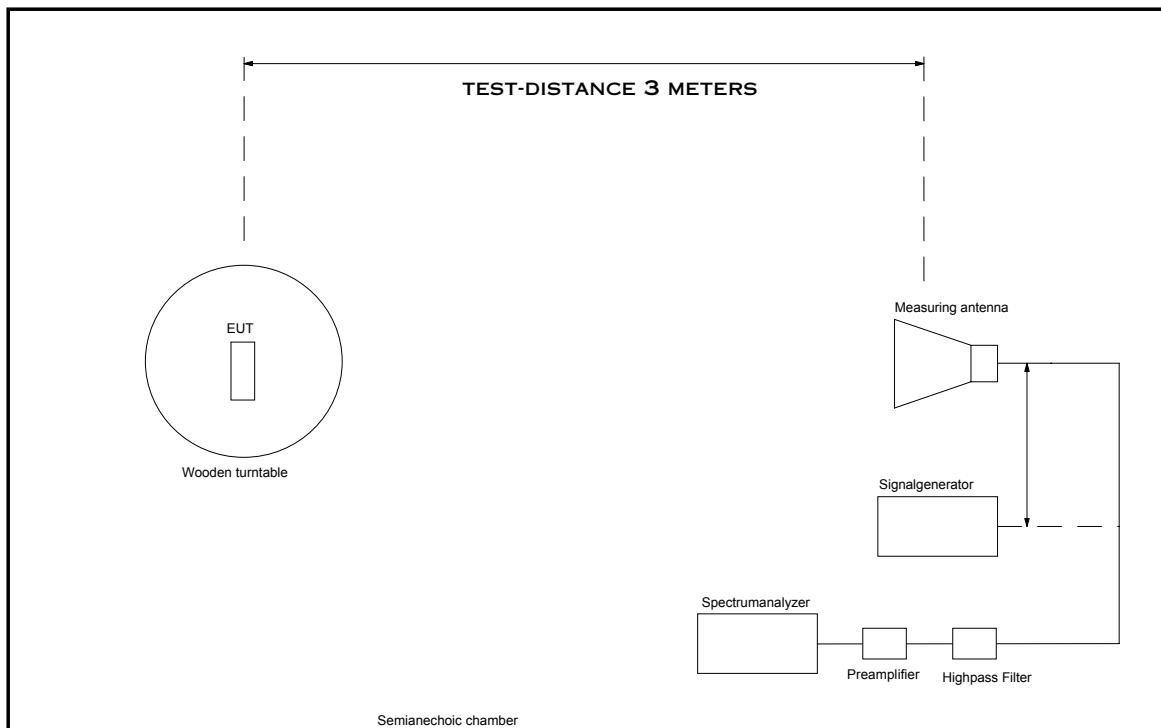

## Procedure for preliminary Radiated Emission Tests

The procedure for preliminary radiated emission tests follows section 13.4.1 of ANSI C63.4-1992.

In case the EUT is a handheld device preliminary emission measurements will be performed in three orthogonal axes of the EUT.

Prescans are made in the following frequency range:

0.009 – 30 MHz  
30 – 230 MHz  
230 – 1000 MHz  
1000 – 2600 MHz  
2600 – 3950 MHz  
3950 – 5850 MHz  
5850 – 8200 MHz  
8200 – 12400 MHz  
12400 – 18000 MHz  
18000 – 26500 MHz  
26500 – 40000 MHz

with the receiving antenna set to horizontal and vertical polarization.

The following step-by-step procedure will be used:

Monitor the frequency range at a fixed antenna height and EUT azimuth

Rotate the EUT by 360 degrees to maximize the suspected highest azimuth signals. Note the amplitude and frequency of the signals. Orient the EUT azimuth for maximum emission.

Move the antenna over its full allowed range of travel to maximize the emission. If the signal or another one at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to step 2) with the antenna fixed at this height. Otherwise move the antenna to the height that repeats the highest amplitude observation and proceed.

Identify at least the three highest emissions per band by using the multimarker function of the spectrum analyzer. Make a hardcopy of the spectrum.

Repeat steps 1) through 4) for the other orthogonal axes of the EUT.

Repest steps 1) through 5) for other orthogonal antenna polarization.

## **Method for comparing spectrum analyzer output to the limit**

The following procedure will be used:

Maximize the emission according to 6.4.

Set the spectrum analyzer to **Max Hold**

Wait until the noise is fully maximized.

Put the marker on top of the investigated signal.

Note frequency and level of the investigated signal


Add antenna correction and cable loss to this level and compare it with the limit.


## **Spectrum analyzer setting for final test**

| Frequency range             | Detector   | Resolution Bandwidth | Video Bandwidth | Trace Mode |
|-----------------------------|------------|----------------------|-----------------|------------|
| 0.009 – 30 MHz              | Quasi Peak | 10 kHz               | 10 kHz          | Max Hold   |
| 9 – 90 kHz<br>110 – 490 kHz | Average    | 10 kHz               | 100 Hz          | Max Hold   |
| 30 – 1000 MHz               | Quasi Peak | 100 kHz              | 1 MHz           | Max Hold   |
| > 1000 MHz                  | Peak       | 1 MHz                | 1 MHz           | Max Hold   |
| > 1000 MHz                  | Average    | 1 MHz                | 1 kHz           | Max Hold   |

## 5. Photographs taken during testing

### Radiated emission measurement >30 MHz

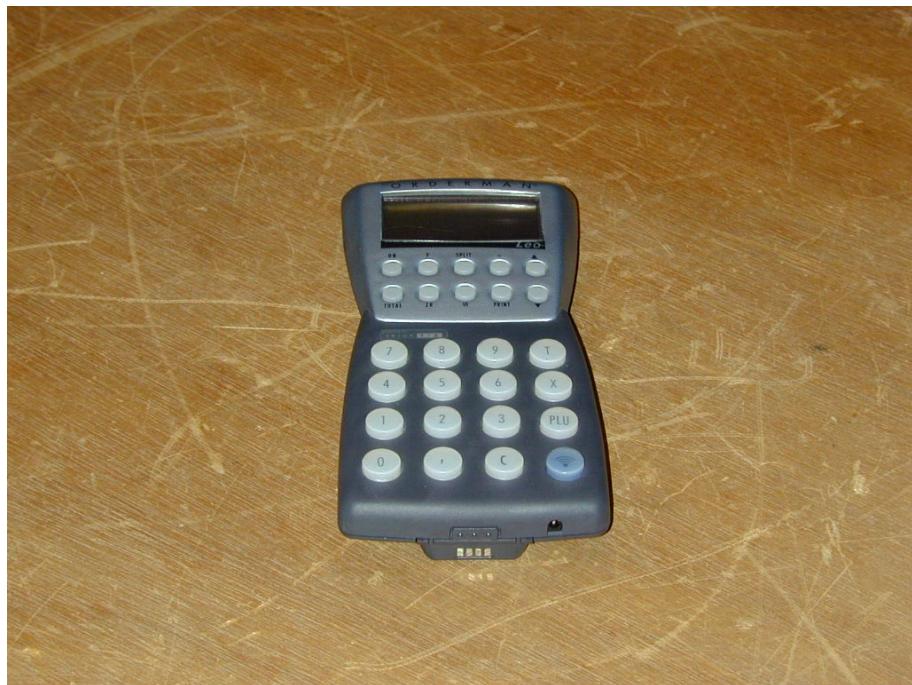

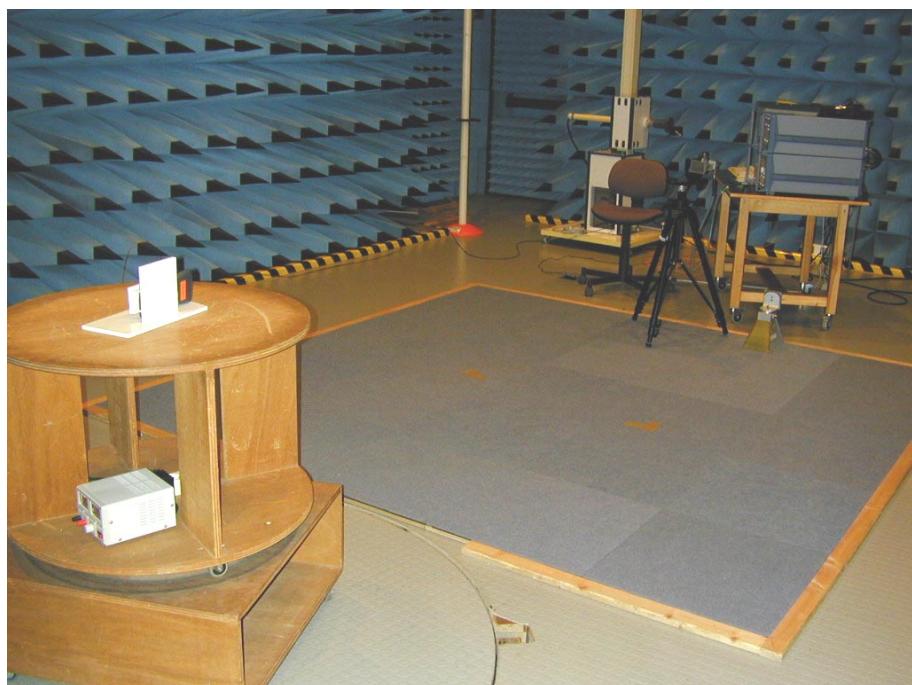

## 6. List of Measurements

|                              |                                       |             |                |
|------------------------------|---------------------------------------|-------------|----------------|
|                              |                                       |             |                |
| <b>FCC Part 15 Subpart C</b> |                                       |             |                |
| <b>Section(s):</b>           | <b>Test</b>                           | <b>Page</b> | <b>Result</b>  |
|                              |                                       |             |                |
| :                            |                                       |             |                |
| <b>15.107.a</b>              | Conducted emissions                   |             | Not applicable |
| <b>15.109</b>                | Field strength of emissions (RX Mode) |             | Passed         |
| <b>15.249.c</b>              | Field strength of emissions (TX Mode) |             | Passed         |
|                              |                                       |             |                |

## List of Measurements according To Industry Canada RSS-210

|  |   |                |                |
|--|---|----------------|----------------|
|  |   |                |                |
| <b>Industry Canada RSS-210 Issue 2</b> |   |                |                |
| <b>Section(s):</b>                     | <b>Test</b>                                 | <b>Page(s)</b> | <b>Result</b>  |
|  |   |                |                |
| <b>7.4</b>                             | Conducted emission test<br>450 kHz - 30 MHz |                | Not Applicable |
| <b>7.3</b>                             | Radiated emission test<br>30 MHz - 25 GHz   |                | Passed         |
| <b>7.2</b>                             | Antenna power conducted emissions           |                | Not Applicable |
|  |   |                |                |

## 7. Test Results

**Field Strength of Emissions according to FCC Rules,  
Part 15, Subpart C, Section 15.249  
Frequency Band > 30 MHz, TX Mode**

|               |   |  |  |  |  |  |  |
|---------------|---|--|--|--|--|--|--|
| Model:        | OM9401 US (LEO)                             |  |  |  |  |  |  |
| Type:         | Handheld Transceiver                        |  |  |  |  |  |  |
| Serial No.    | ---   |  |  |  |  |  |  |
| Applicant:    | think dig High Tech Solutions GmbH          |  |  |  |  |  |  |
| Test Site:    | Open Field Test Site / Semianechoic Chamber |  |  |  |  |  |  |
| Distance:     | 3 Meter                                     |  |  |  |  |  |  |
| Date of Test: | January 30, 2001                            |  |  |  |  |  |  |

| Frequency (MHz) | Detector | Antenna Polarization | Analyzer Reading (dB $\mu$ V) | Correction Factor (dB) | Field Strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|----------|----------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 902.2           | Q.P      | Horizontal           | 59.8                          | 33.9                   | 93.7                          | 94                   | <b>0.3</b>  |
| 903.7           | Q.P.     | Horizontal           | 59.7                          | 33.9                   | 93.6                          | 94                   | <b>0.4</b>  |
| 905.45          | Q.P.     | Horizontal           | 59.6                          | 34                     | 93.6                          | 94                   | <b>0.4</b>  |
| 1801.1          | Peak     | Horizontal           | 19.8                          | 21                     | 40.8                          | 54                   | <b>13.2</b> |
| 2711.1          | Peak     | Horizontal           | 26.1                          | 24.1                   | 50.2                          | 54                   | <b>3.8</b>  |
|                 |          |                      |                               |                        |                               |                      |             |
|                 |          |                      |                               |                        |                               |                      |             |
|                 |          |                      |                               |                        |                               |                      |             |
|                 |          |                      |                               |                        |                               |                      |             |
|                 |          |                      |                               |                        |                               |                      |             |

\*\*\* = No emissions above noise floor detected

**Sample calculation of field strength values:**

Field Strength (dB $\mu$ V/m) = Analyzer Reading (dB $\mu$ V) + Correction Factor (dB)  
 Correction Factor includes Antenna conversion and cable loss

Test equipment used (see equipment list for details):  
 02, 13, 14, 16, 38, 40, 42, 57, 64, 67

**Field Strength of Emissions according to FCC Rules,  
Part 15, Subpart C, Section 15.249  
Frequency Band > 30 MHz, RX Mode**

|               |  |
|---------------|--|
| Model:        | <b>OM9401 US (LEO)</b>                             |
| Type:         | <b>Handheld Transceiver</b>                        |
| Serial No.    | <b>---</b>   |
| Applicant:    | <b>think dig High Tech Solutions GmbH</b>          |
| Test Site:    | <b>Open Field Test Site / Semianechoic Chamber</b> |
| Distance:     | <b>3 Meter</b>                                     |
| Date of Test: | <b>January 30, 2001</b>                            |

\*\*\* = No emissions above noise floor detected

## Sample calculation of field strength values:

Field Strength (dB $\mu$ V/m) = Analyzer Reading (dB $\mu$ V) + Correction Factor (dB)  
Correction Factor includes Antenna conversion and cable loss

Test equipment used (see equipment list for details):  
02, 13, 14, 16, 38, 40, 42, 57, 64, 67

## 8. Equipment List

To facilitate reference to test equipment used for related tests, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory.

| No. | Type                 | Model        | Serial Number | Manufacturer    |
|-----|----------------------|--------------|---------------|-----------------|
| 01  | Spectrum Analyzer    | R 3261 A     | 91720155      | Advantest       |
| 02  | Spectrum Analyzer    | R 3271       | 05050023      | Advantest       |
| 03  | Test Receiver        | ESH 3        | 880112/032    | Rohde & Schwarz |
| 04  | Test Receiver        | ESHS 10      | 860043/016    | Rohde & Schwarz |
| 05  | Test Receiver        | ESV          | 881414/009    | Rohde & Schwarz |
| 06  | Test Receiver        | ESVP         | 881120/024    | Rohde & Schwarz |
| 07  | Audio Analyzer       | UPA          | 862954        | Rohde & Schwarz |
| 08  | Power Meter          | NRVS         | 836856/015    | Rohde & Schwarz |
| 09  | Power Sensor         | NRV-Z52      | 837901/030    | Rohde & Schwarz |
| 10  | Power Sensor         | NRV-Z4       | 863828/015    | Rohde & Schwarz |
| 11  | Preamplifier         | ESV-Z3       | 860907/004    | Rohde & Schwarz |
| 12  | Preamplifier         | R14601       |               | Advantest       |
| 13  | Preamplifier         | ACX/080-3030 | 32640         | CTT             |
| 14  | Preamplifier         | ACO/180-3530 | 32641         | CTT             |
| 15  | Signal Generator     | SMS          | 872166/039    | Rohde & Schwarz |
| 16  | Signal Generator     | HP 8673 D    | 2930A00966    | Hewlett Packard |
| 17  | Waveform Generator   | HP 33120 A   | US34005375    | Hewlett Packard |
| 18  | UHF Attenuator Set   | DPU          | 300771/075    | Rohde & Schwarz |
| 19  | UHF Attenuator Set   | DPU          | 300788/006    | Rohde & Schwarz |
| 20  | Pulse Limiter        | ESH 3-Z2     | 1144          | Rohde & Schwarz |
| 21  | Pulse Limiter        | 11947 A      | 3107A00566    | Hewlett Packard |
| 22  | V-Network            | ESH 3-Z5     | 862770/018    | Rohde & Schwarz |
| 23  | V-Network            | ESH 3-Z5     | 894785/005    | Rohde & Schwarz |
| 24  | V-Network            | ESH 3-Z5     | 830952/025    | Rohde & Schwarz |
| 25  | V-Network            | ESH 3-Z6     | 830722/010    | Rohde & Schwarz |
| 26  | V-Network            | NSLK 8127    | 8127152       | Schwarzbeck     |
| 27  | V-Network            | NNLA 8119    | 8119148       | Schwarzbeck     |
| 28  | V-Network            | SE 01        | 01            | Senton          |
| 29  | T-Network            | ESH 3-Z4     | 890602/011    | Rohde & Schwarz |
| 30  | T-Network            | ESH 3-Z4     | 890602/012    | Rohde & Schwarz |
| 31  | High Impedance Probe | TK 9416      | 01            | Schwarzbeck     |
| 32  | High Impedance Probe | TK 9416      | 02            | Schwarzbeck     |
| 33  | Current Probe        | ESH 2-Z1     | 863366/18     | Rohde & Schwarz |
| 34  | Current Probe        | ESV-Z1       | 862553/3      | Rohde & Schwarz |


| No. | Type                     | Model      | Serial Number | Manufacturer    |
|-----|--------------------------|------------|---------------|-----------------|
| 35  | Absorbing Clamp          | MDS 21     | 80911         | Lüthi           |
| 36  | Absorbing Clamp          | MDS 21     | 79690         | Lüthi           |
| 37  | Loop Antenna             | HFH2-Z2    | 882964/1      | Rohde & Schwarz |
| 38  | Biconical Antenna        | HK 116     | 836239/02     | Rohde & Schwarz |
| 39  | Biconical Antenna        | BBA 9106   | A0379 324     | Schwarzbeck     |
| 40  | Log. Periodic Antenna    | HL 223     | 834408/12     | Rohde & Schwarz |
| 41  | Log. Periodic Antenna    | UHALP 9107 | 9107150       | Schwarzbeck     |
| 42  | Horn Antenna             | 3115       | 9508-4553     | Emco            |
| 43  | Horn Antenna             | 3160-03    | 9112-1003     | Emco            |
| 44  | Horn Antenna             | 3160-04    | 9112-1001     | Emco            |
| 45  | Horn Antenna             | 3160-05    | 9112-1001     | Emco            |
| 46  | Horn Antenna             | 3160-06    | 9112-1001     | Emco            |
| 47  | Horn Antenna             | 3160-07    | 9112-1008     | Emco            |
| 48  | Horn Antenna             | 3160-08    | 9112-1002     | Emco            |
| 49  | Horn Antenna             | 3160-09    | 9403-1025     | Emco            |
| 50  | Digital multimeter       | 199        | 463386        | Keithley        |
| 51  | DC Power Supply          | NGSM 32/10 | 203           | Rohde & Schwarz |
| 52  | DC Power Supply          | NGB        | 2455          | Rohde & Schwarz |
| 53  | DC Power Supply          | NGA        | 386           | Rohde & Schwarz |
| 54  | Temperature Test Chamber | HT4010     | 07065550      | Heraeus         |
| 55  | Cable                    | RG214      | 1309          | Senton          |
| 56  | Cable                    | 150CM_001  | 1479          | Rosenberger     |
| 57  | Cable                    | 150CM_002  | 1480          | Rosenberger     |
| 58  | Cable Set EG1            | RG214      | 1189 - 1191   | Senton          |
| 59  | Cable Set Cabine 1       | RG214      |               | Senton          |
| 60  | Cable Set Cabine 2       | RG214      |               | Senton          |
| 61  | Cable Set Cabine 3       | RG214      |               | Senton          |
| 62  | Shielded Room            | Nr. 1      | 1451          | Senton          |
| 63  | Shielded Room            | Nr. 2      | 1452          | Senton          |
| 64  | Semi-anechoic Chamber    | Nr. 3      | 1453          | Siemens         |
| 65  | Shielded Room            | Nr. 4      | 1454          | Euroshield      |
| 66  | Open Area Test Site      | EG 1       |               | Senton          |
| 67  | High pass filter         |            |               | AT & T          |

## 9. Charts taken during Testing

# Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

|   |                    |
|---|--------------------|
| Model:<br>ORDERMAN Leo  |                    |
| Serial no.:<br>Modified Sample                                  |                    |
| Applicant:<br>think dig High Tech Solutions GmbH                |                    |
| Test site:<br>Semi anechoic room, cabin no. 3                   |                    |
| Tested on:<br>Test distance 3 meters<br>Horizontal Polarization |                    |
| Date of test: 02/04/2001  | Operator: J. Roidt |
| Test performed: automatically                                   | File name:         |

|                                    |
|------------------------------------|
| Mode:<br>TX on Channel 05 (lowest) |
| Flat on Table                      |
|                                    |

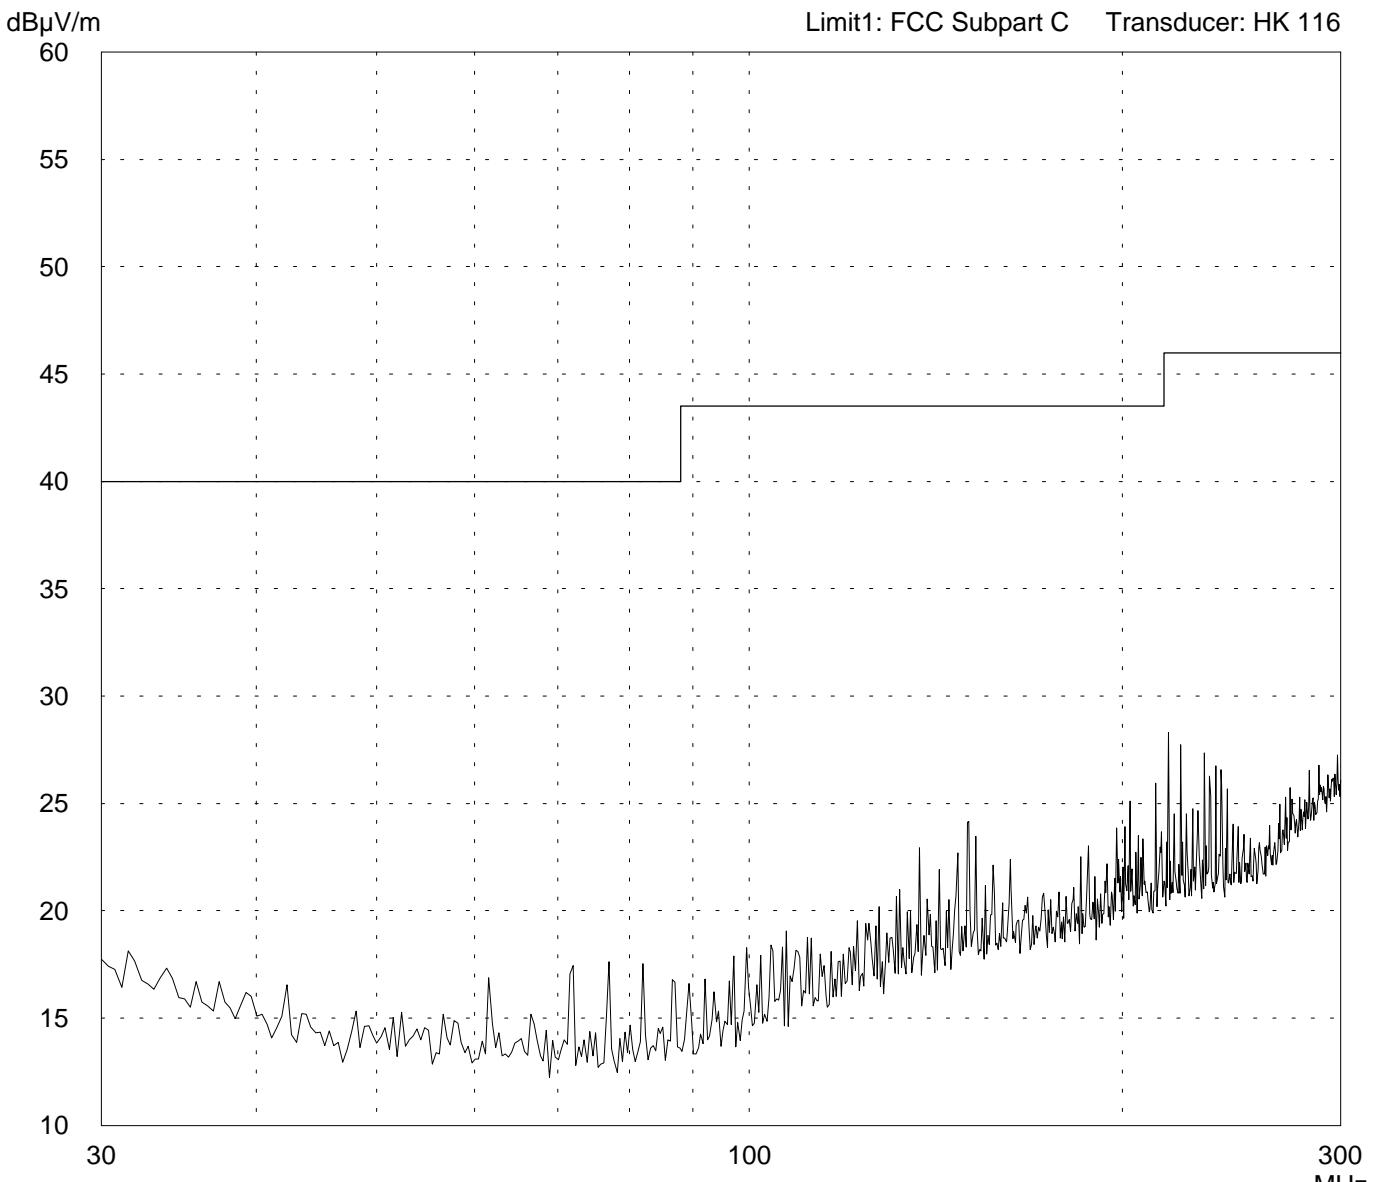


|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                                |
|--------------------------------|
| Project file:<br>55416-10031-1 |
| Page of Pages                  |

# Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

|   |                    |
|---|--------------------|
| Model:<br>ORDERMAN Leo  |                    |
| Serial no.:<br>Modified Sample                                |                    |
| Applicant:<br>think dig High Tech Solutions GmbH              |                    |
| Test site:<br>Semi anechoic room, cabin no. 3                 |                    |
| Tested on:<br>Test distance 3 meters<br>Vertical Polarization |                    |
| Date of test: 02/04/2001                                      | Operator: J. Roidt |
| Test performed: automatically                                 | File name:         |

|                                    |
|------------------------------------|
| Mode:<br>TX on Channel 05 (lowest) |
| Flat on Table                      |
|                                    |

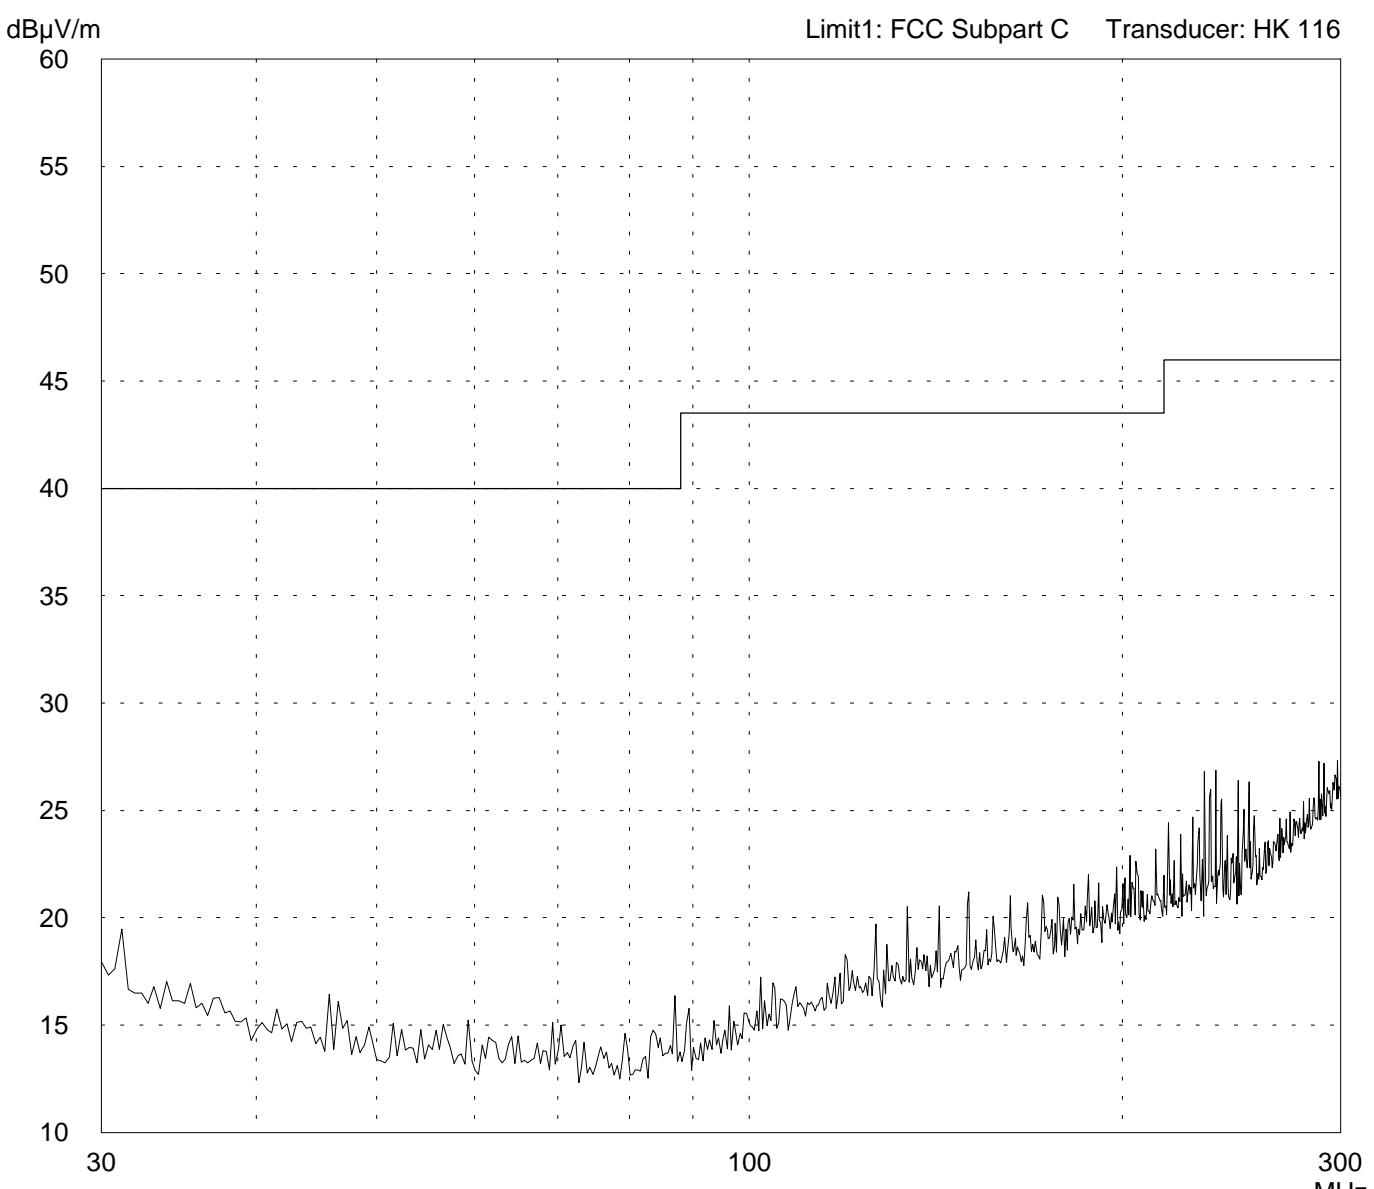

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                                |
|--------------------------------|
| Project file:<br>55416-10031-1 |
| Page of Pages                  |

# Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:  
ORDERMAN Leo

Serial no.:  
Modified Sample

Applicant:  
think dig High Tech Solutions GmbH

Test site:  
Semi anechoic room, cabin no. 3

Tested on:  
Test distance 3 meters  
Horizontal Polarization

Date of test: 02/04/2001      Operator: J. Roidt


Test performed: automatically      File name:

Mode:  
RX on Channel 05 (lowest)

Flat on Table

Detector:  
Peak

List of values:  
10 dB Margin      50 Subranges

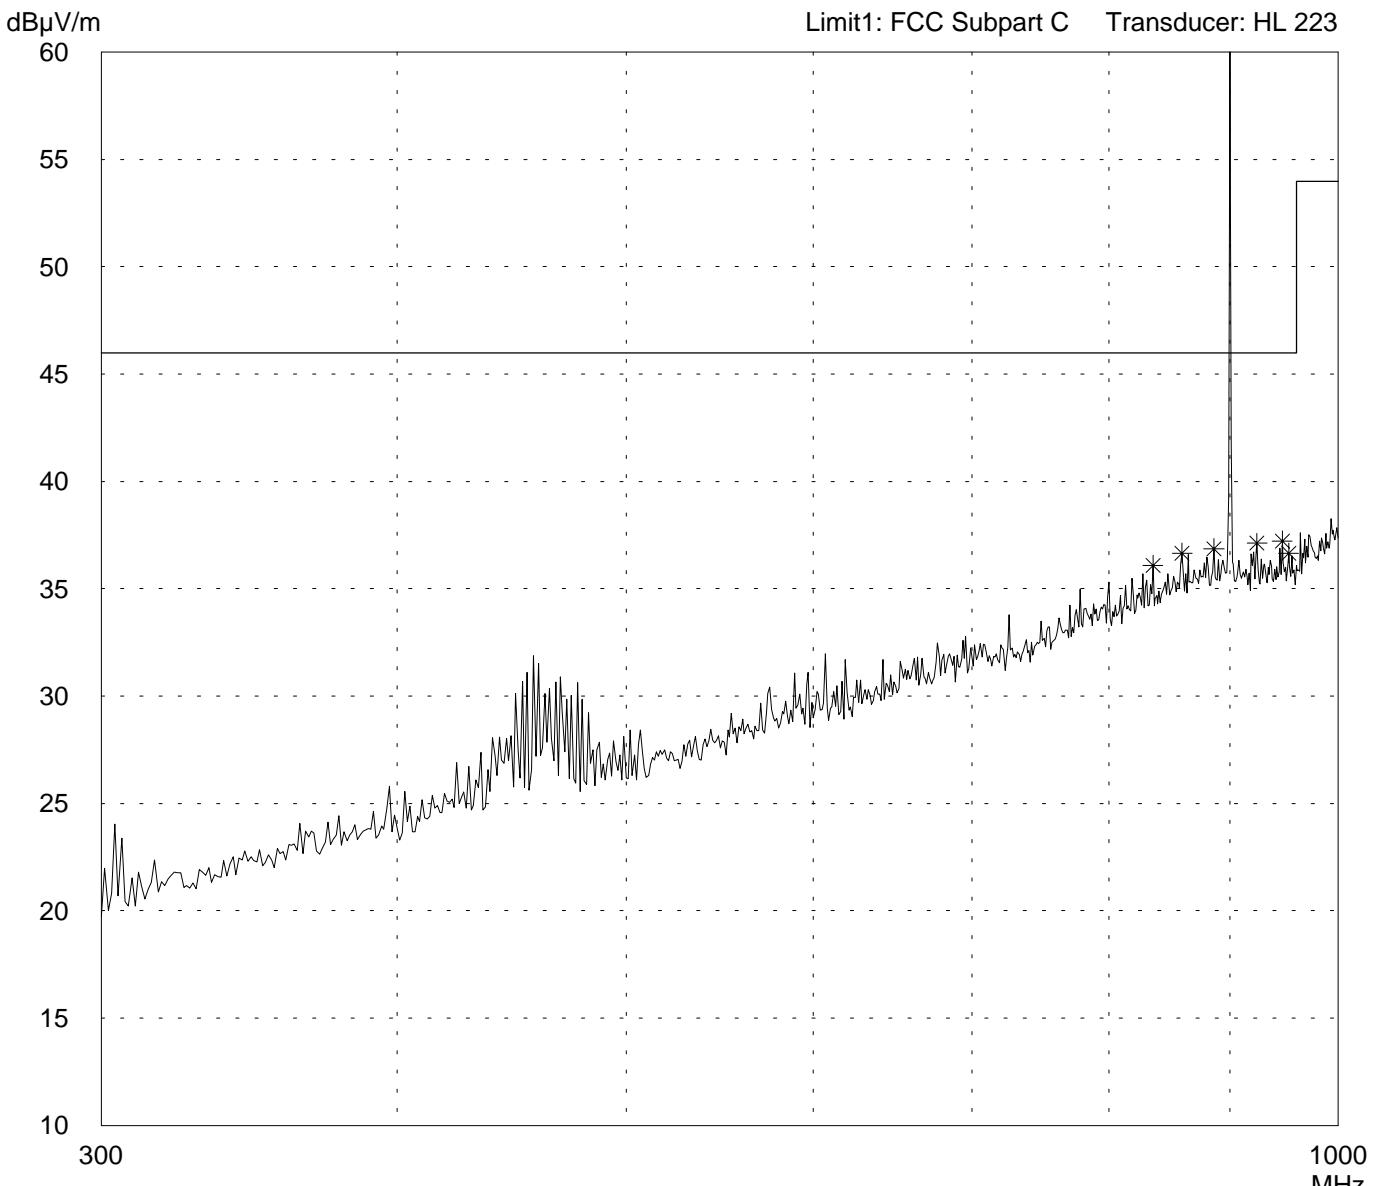

Result:  
Prescan

Project file:  
55416-10031-1

Page      of      Pages


# Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

|   |                    |
|---|--------------------|
| Model:<br>ORDERMAN Leo  |                    |
| Serial no.:<br>Modified Sample                                |                    |
| Applicant:<br>think dig High Tech Solutions GmbH              |                    |
| Test site:<br>Semi anechoic room, cabin no. 3                 |                    |
| Tested on:<br>Test distance 3 meters<br>Vertical Polarization |                    |
| Date of test: 02/04/2001                                      | Operator: J. Roidt |
| Test performed: automatically                                 | File name:         |

|                                    |
|------------------------------------|
| Mode:<br>TX on Channel 05 (lowest) |
| Flat on Table                      |
|                                    |

Detector: Peak

List of values:  
10 dB Margin 50 Subranges

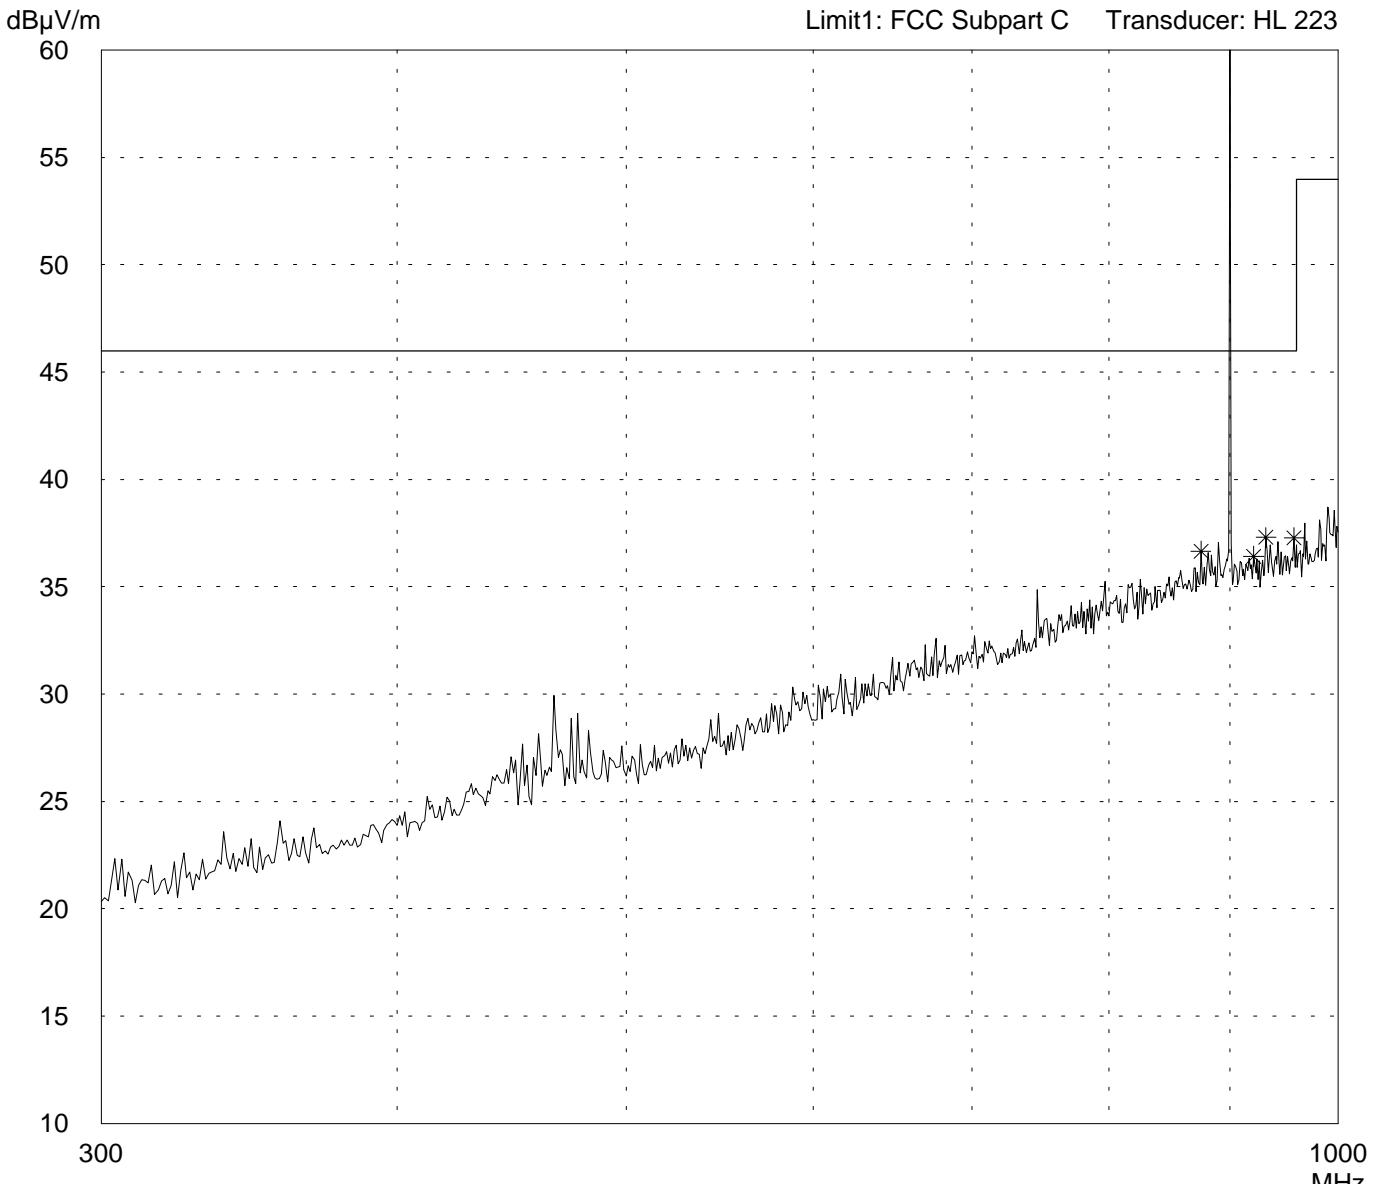

Result:  
Prescan

Project file:  
55416-10031-1

Page of Pages

## Spurious emissions measurement according to FCC Rules

Model:  
Orderman LEO

Serial No.:  
Modified Sample

Applicant:  
think dig High Solutions GmbH

Mode:  
Radiated Measurement


Horizontal Polarisation

Transmit at channel 05

Ref.Level 45.1 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

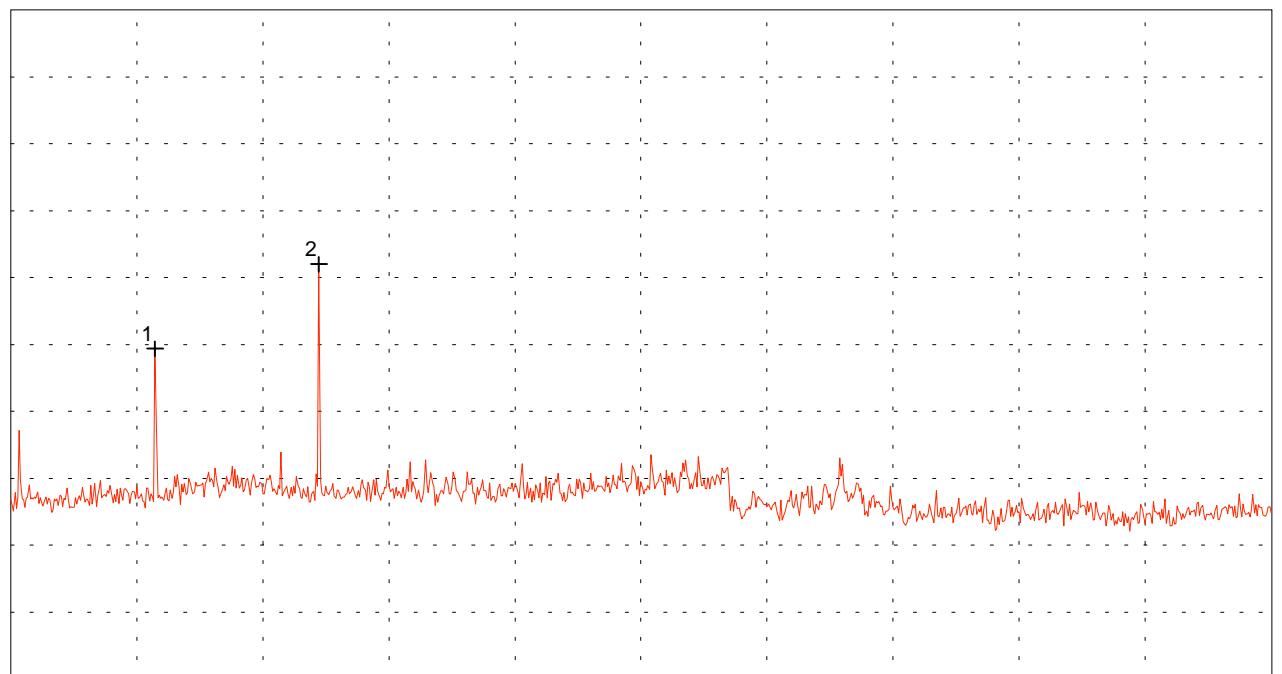

### Multi Marker List

|       |              |                  |
|-------|--------------|------------------|
| No. 1 | 1.801111 GHz | 19.79 dB $\mu$ V |
| No. 2 | 2.711111 GHz | 26.11 dB $\mu$ V |

Tested by:  
Johann Roidt

Date:  
February 10, 2001

Project-No.:

Page      of      pages

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Vertical Polarisation         |
| Transmit at channel 05        |
|                               |
|                               |

Ref.Level 45.1 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

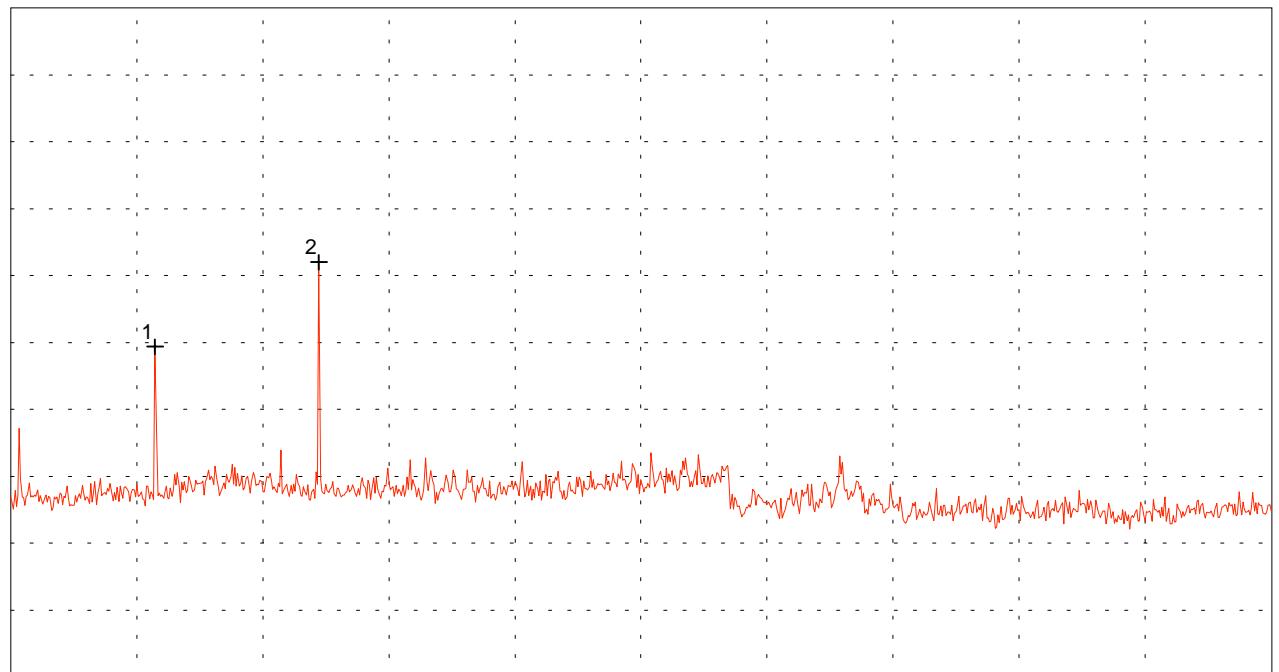

Start 1.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz  
SWP 40 ms

### Multi Marker List

|       |              |                  |
|-------|--------------|------------------|
| No. 1 | 1.801111 GHz | 19.79 dB $\mu$ V |
| No. 2 | 2.711111 GHz | 26.11 dB $\mu$ V |

Tested by:  
Johann Roidt

Date:  
February 10, 2001

Project-No.:

Page of pages

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Horizontal Polarisation       |
| Transmit at channel 05        |
|                               |
|                               |

Ref.Level 40.6 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

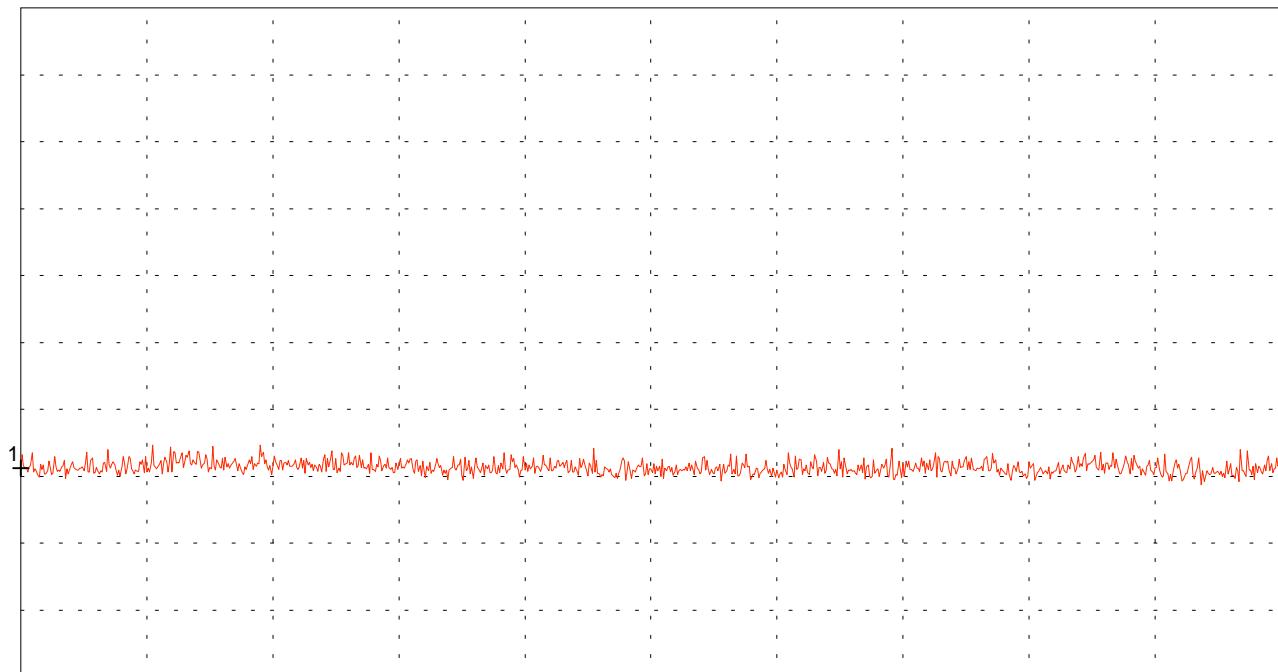

Start 8.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz  
SWP 20 ms

### Multi Marker List

No. 1 8.000000 GHz 6.21 dB $\mu$ V

|                            |
|----------------------------|
| Tested by:<br>Johann Roidt |
| Date:<br>February 10, 2001 |

|               |
|---------------|
| Project-No.:  |
| Page of pages |

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Vertical Polarisation         |
| Transmit at channel 05        |
|                               |
|                               |

Ref.Level 40.6 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

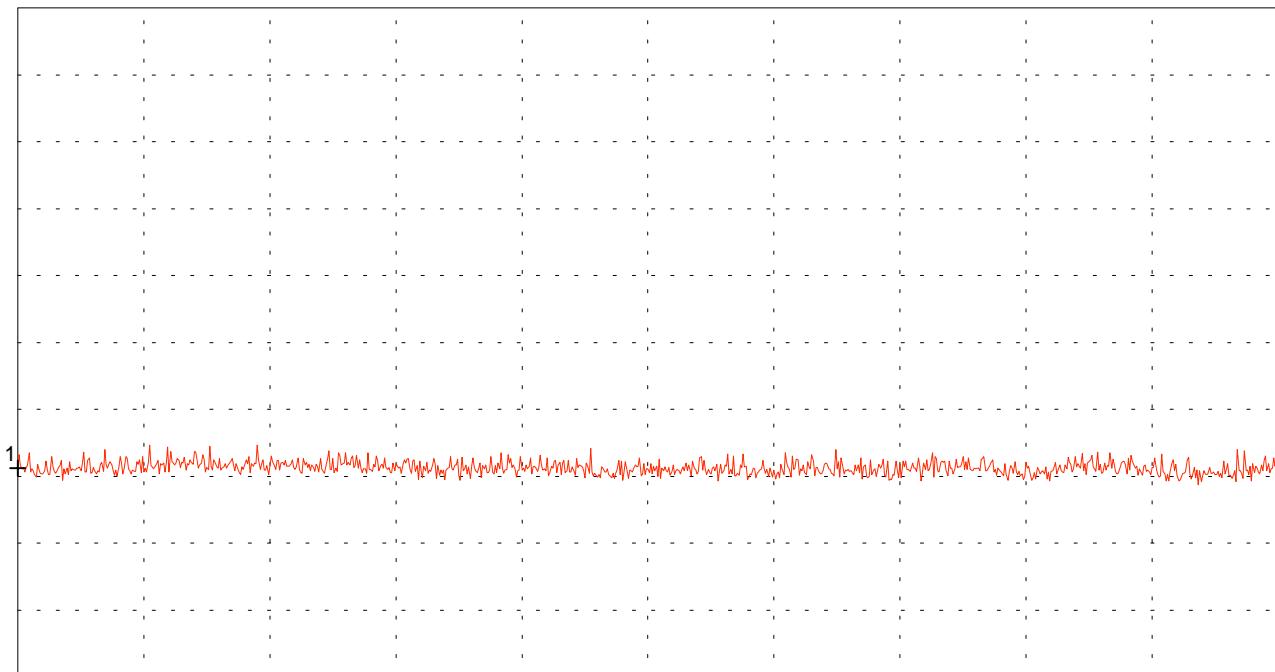

Start 8.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz  
SWP 20 ms

### Multi Marker List

No. 1 8.000000 GHz 6.21 dB $\mu$ V

Tested by:  
Johann Roidt

Date:  
February 10, 2001

Project-No.:

Page of pages


# Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

|   |                    |
|---|--------------------|
| Model:<br>ORDERMAN Leo  |                    |
| Serial no.:<br>Modified Sample                                  |                    |
| Applicant:<br>think dig High Tech Solutions GmbH                |                    |
| Test site:<br>Semi anechoic room, cabin no. 3                   |                    |
| Tested on:<br>Test distance 3 meters<br>Horizontal Polarization |                    |
| Date of test: 02/04/2001  | Operator: J. Roidt |
| Test performed: automatically                                   | File name:         |

|                                     |
|-------------------------------------|
| Mode:<br>TX on Channel 70 (highest) |
| Flat on Table                       |

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                 |              |
|---------------------------------|--------------|
| List of values:<br>10 dB Margin | 50 Subranges |
|---------------------------------|--------------|

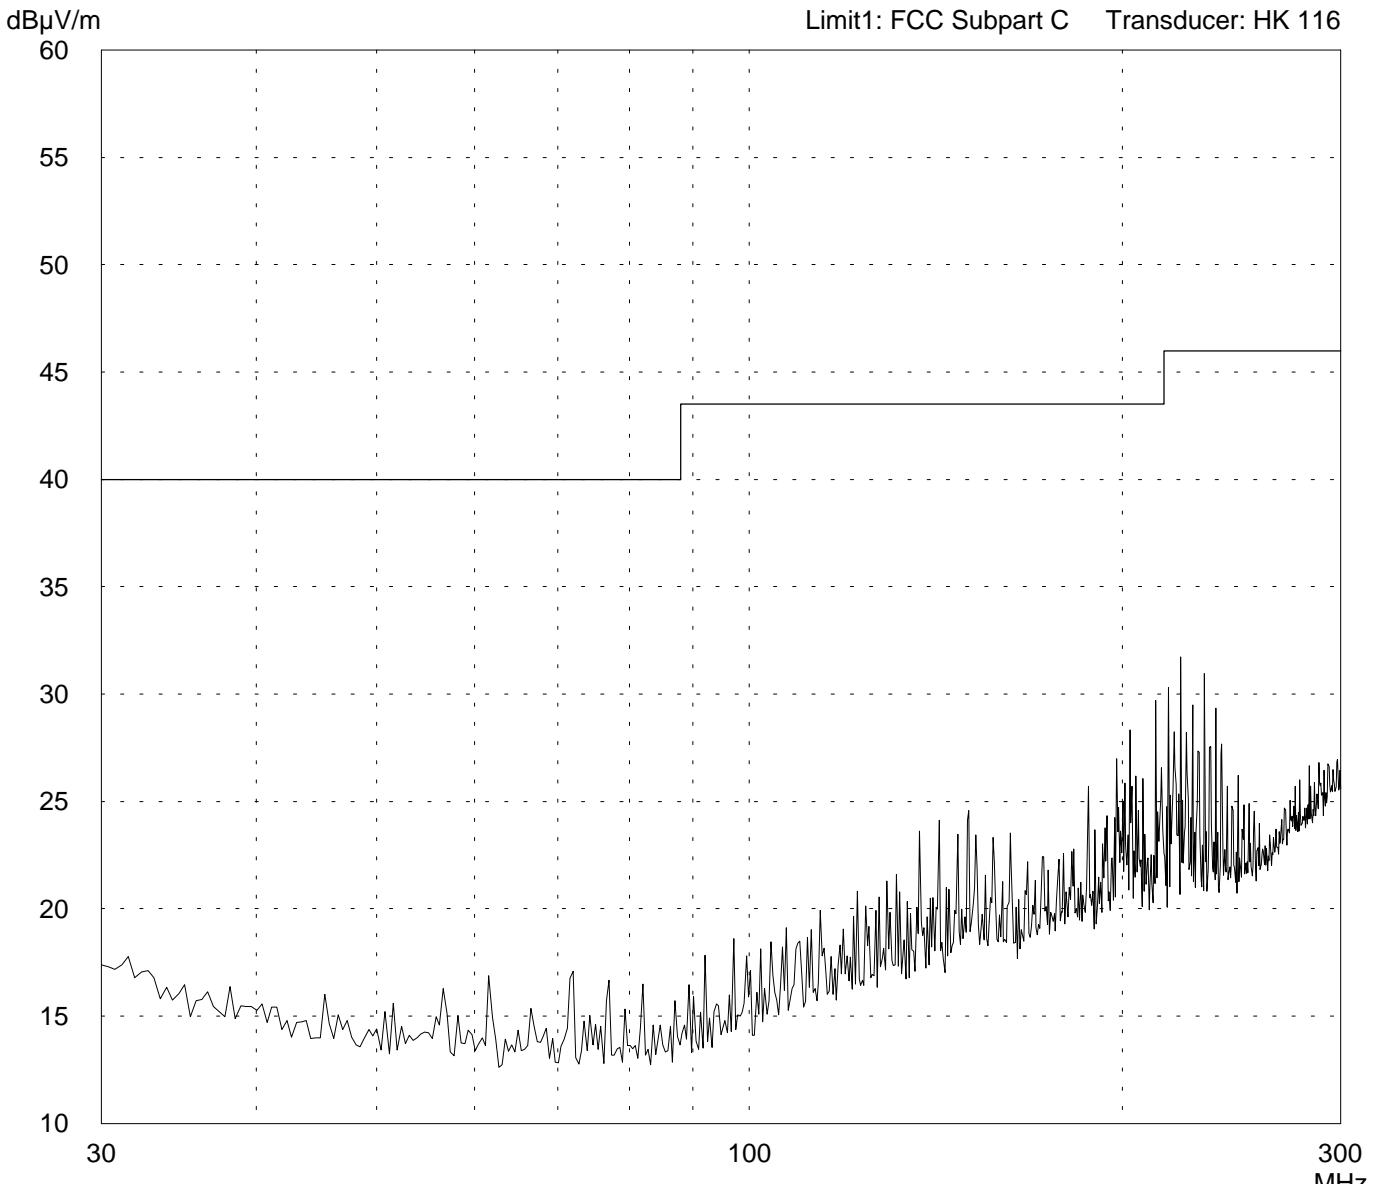

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                                |      |    |       |
|--------------------------------|------|----|-------|
| Project file:<br>55416-10031-1 | Page | of | Pages |
|--------------------------------|------|----|-------|

# Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:  
ORDERMAN Leo

Serial no.:  
Modified Sample

Applicant:  
think dig High Tech Solutions GmbH

Test site:  
Semi anechoic room, cabin no. 3

Tested on:  
Test distance 3 meters  
Vertical Polarization

Date of test: 02/04/2001      Operator: J. Roidt


Test performed: automatically      File name:

Mode:  
TX on Channel 70 (highest)

Flat on Table

Detector:  
Peak

List of values:  
10 dB Margin      50 Subranges

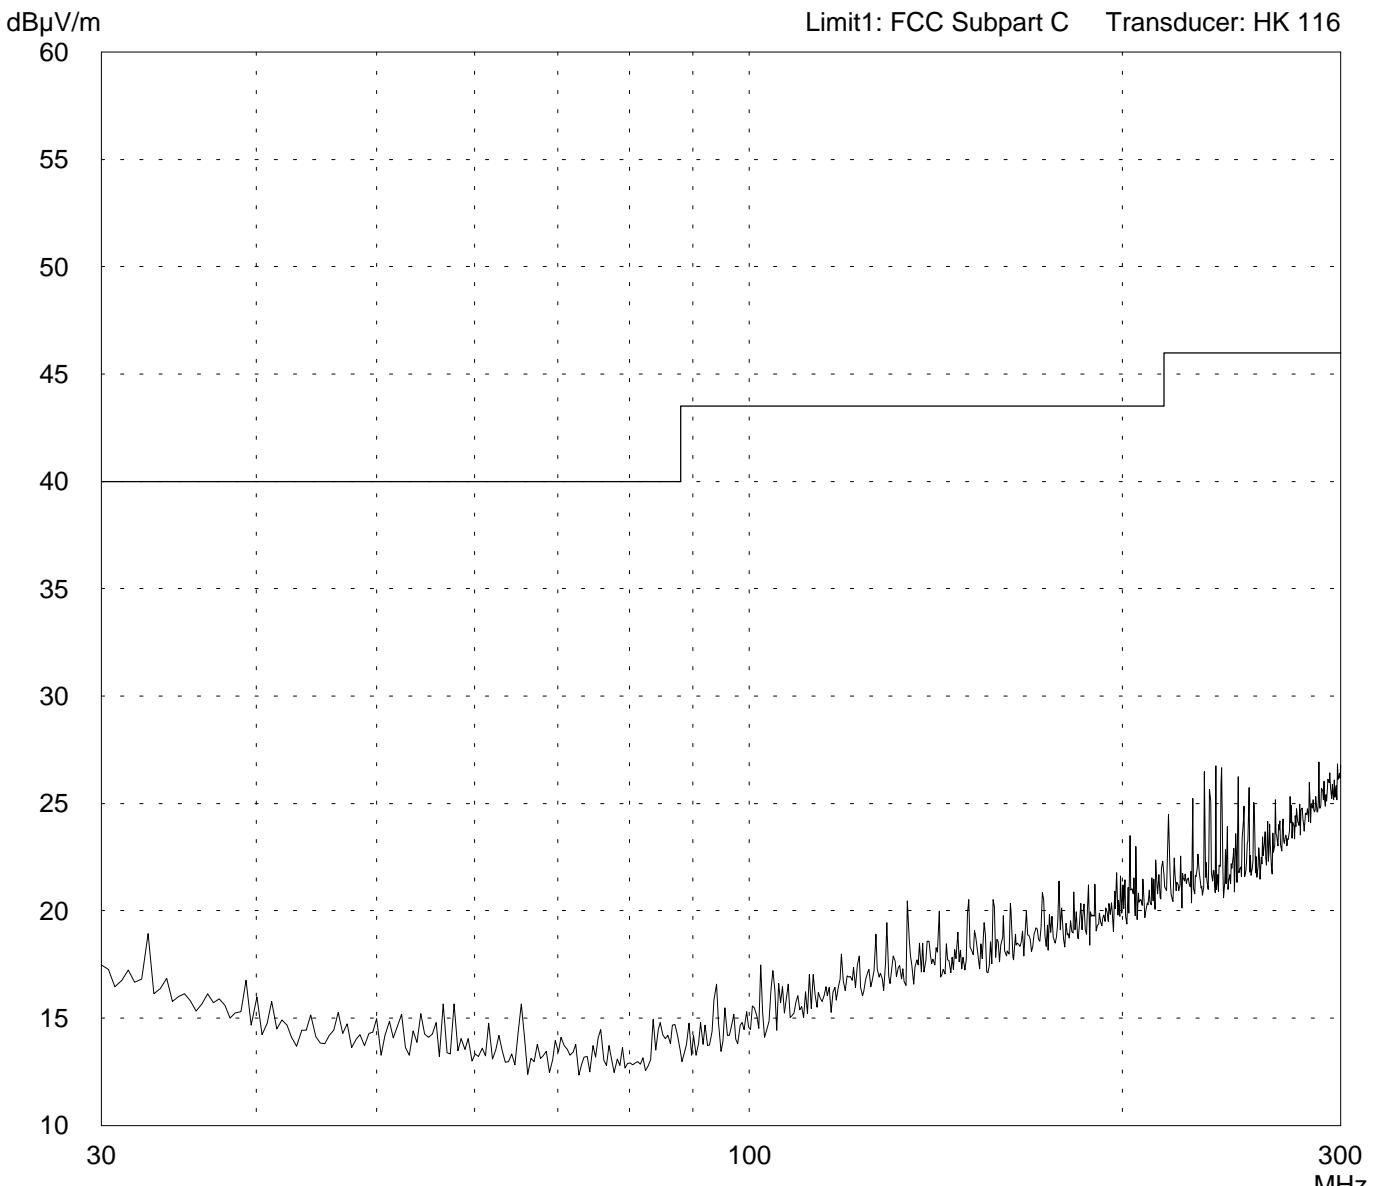

Result:  
Prescan


Project file:  
55416-10031-1

Page      of      Pages

# Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

|   |                    |
|---|--------------------|
| Model:<br>ORDERMAN Leo  |                    |
| Serial no.:<br>Modified Sample                                  |                    |
| Applicant:<br>think dig High Tech Solutions GmbH                |                    |
| Test site:<br>Semi anechoic room, cabin no. 3                   |                    |
| Tested on:<br>Test distance 3 meters<br>Horizontal Polarization |                    |
| Date of test: 02/04/2001  | Operator: J. Roidt |
| Test performed: automatically                                   | File name:         |

|                                     |
|-------------------------------------|
| Mode:<br>TX on Channel 70 (highest) |
| Flat on Table                       |
|                                     |

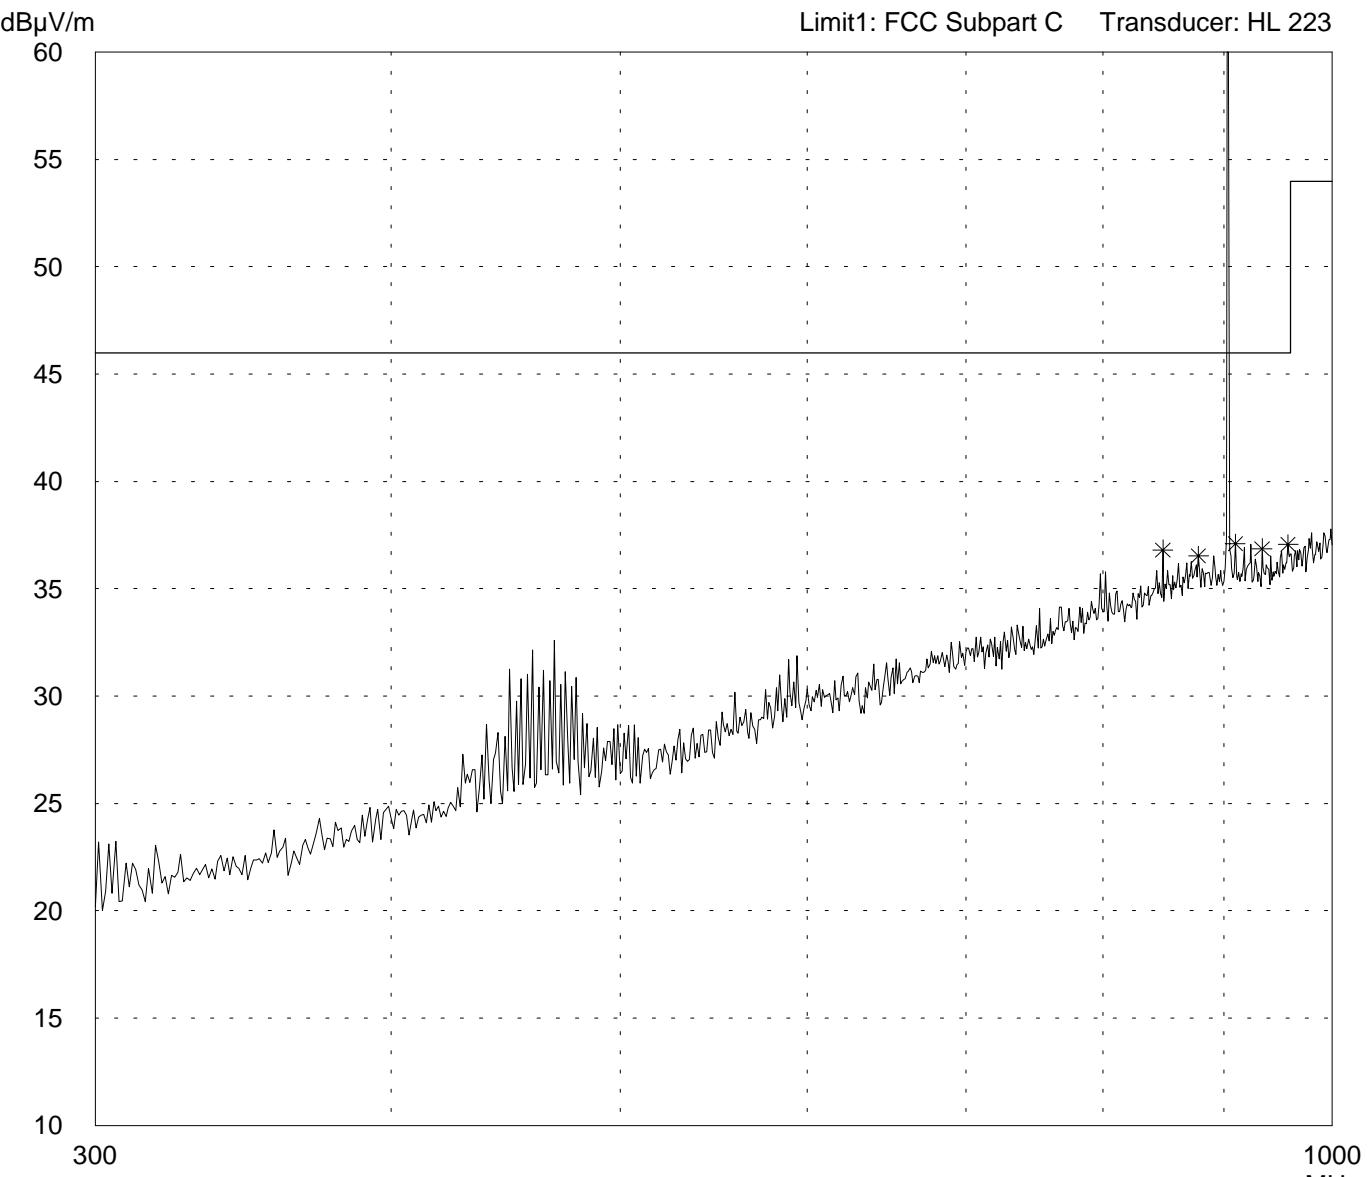


|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                                |
|--------------------------------|
| Project file:<br>55416-10031-1 |
| Page of Pages                  |

# Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

|   |                    |
|---|--------------------|
| Model:<br>ORDERMAN Leo  |                    |
| Serial no.:<br>Modified Sample                                |                    |
| Applicant:<br>think dig High Tech Solutions GmbH              |                    |
| Test site:<br>Semi anechoic room, cabin no. 3                 |                    |
| Tested on:<br>Test distance 3 meters<br>Vertical Polarization |                    |
| Date of test: 02/04/2001                                      | Operator: J. Roidt |
| Test performed: automatically                                 | File name:         |

|                                     |
|-------------------------------------|
| Mode:<br>TX on Channel 70 (highest) |
| Flat on Table                       |
|                                     |

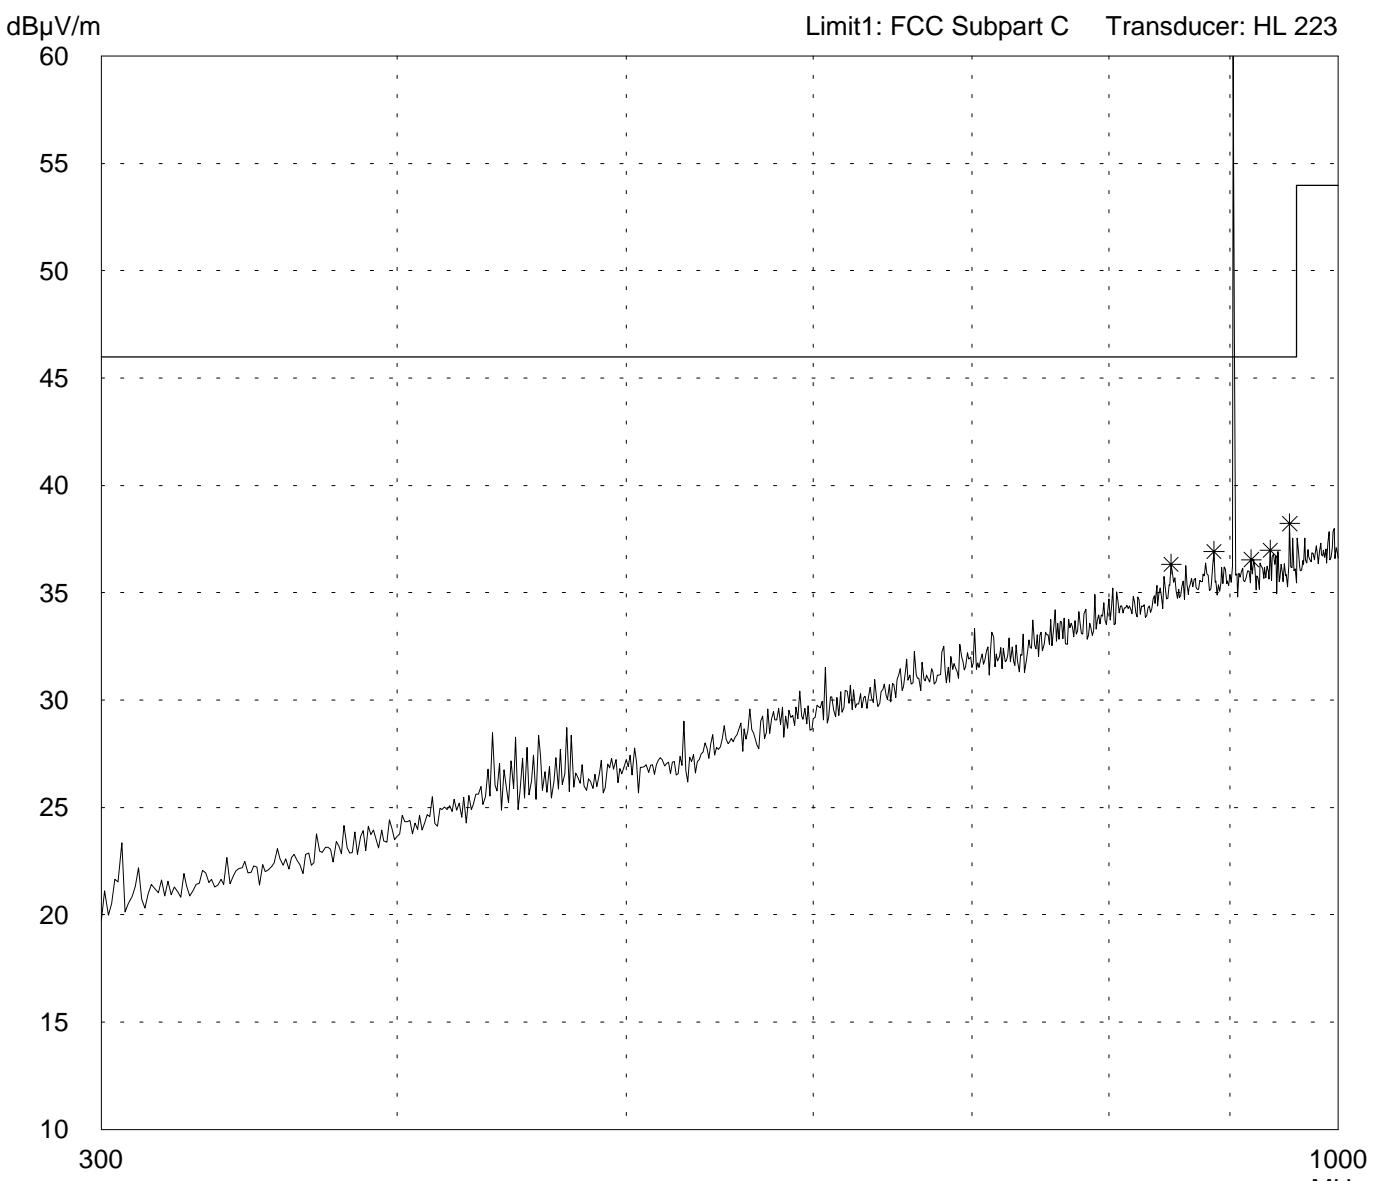

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                                |
|--------------------------------|
| Project file:<br>55416-10031-1 |
| Page of Pages                  |

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Horizontal Polarisation       |
| Receive at channel 70         |
|                               |
|                               |

Ref.Level 45.1 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

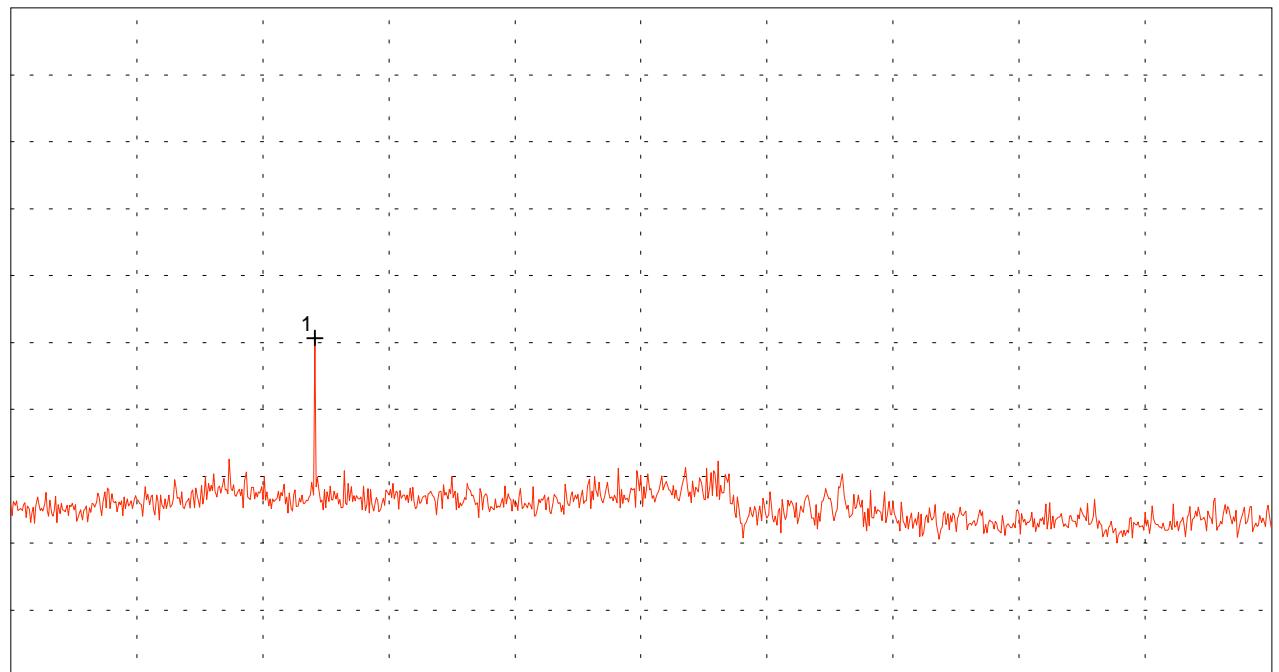

Start 1.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz  
SWP 40 ms

### Multi Marker List

No. 1 2.687778 GHz 20.44 dB $\mu$ V

|                            |
|----------------------------|
| Tested by:<br>Johann Roidt |
| Date:<br>February 10, 2001 |

|               |
|---------------|
| Project-No.:  |
| Page of pages |

## Spurious emissions measurement according to FCC Rules

Model:  
Orderman LEO

Serial No.:  
Modified Sample

Applicant:  
think dig High Solutions GmbH

Mode:  
Radiated Measurement


Horizontal Polarisation

Receive at channel 70

Ref.Level 45.1 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

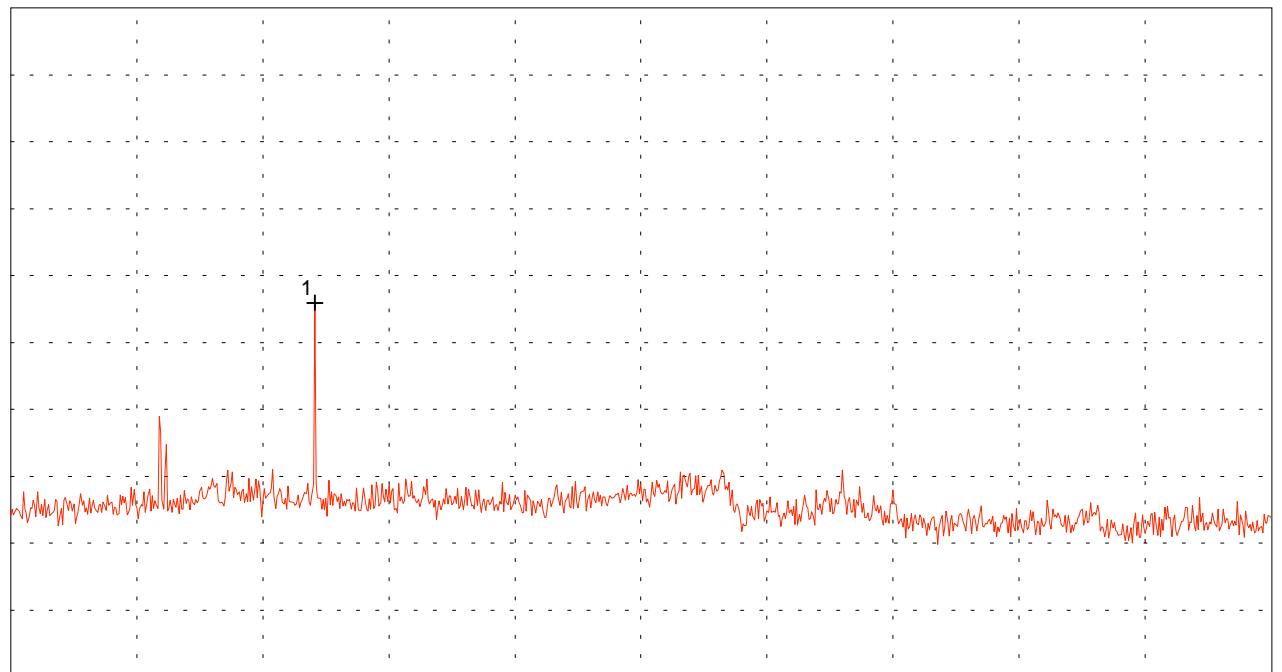

Start 1.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz  
SWP 40 ms

### Multi Marker List

No. 1 2.687778 GHz 23.06 dB $\mu$ V

Tested by:  
Johann Roidt

Date:  
February 10, 2001

Project-No.:

Page of pages

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Horizontal Polarisation       |
| Transmit at channel 70        |

Ref.Level 40.6 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

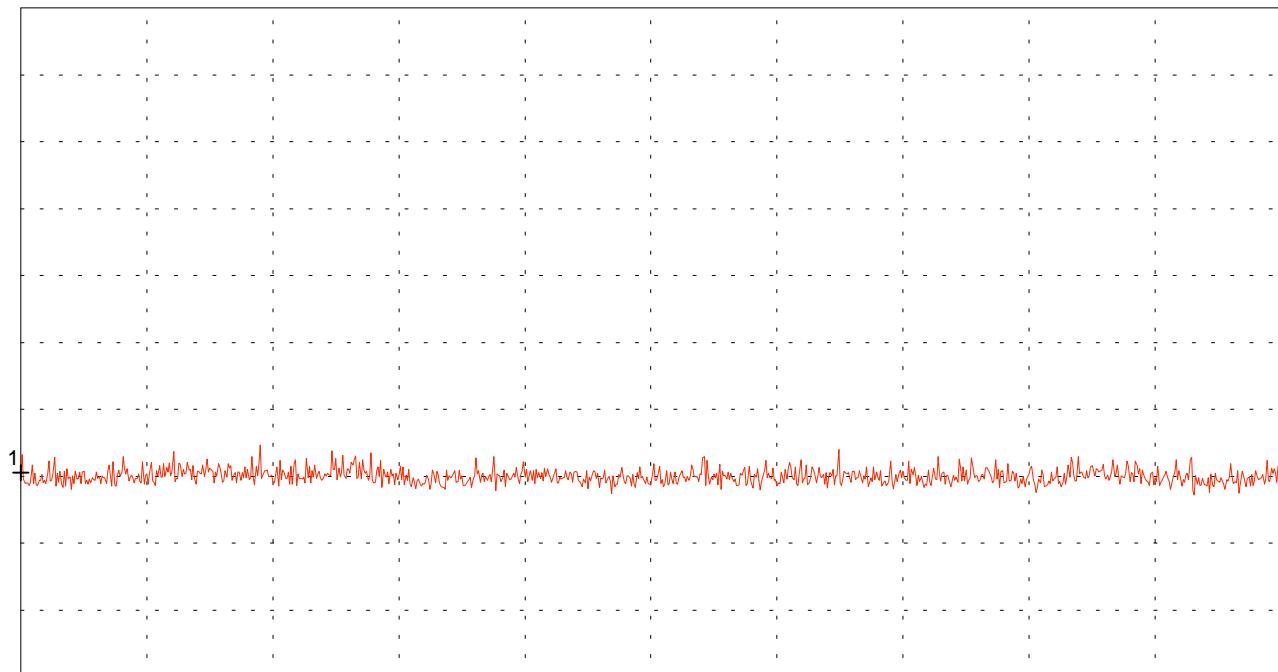

Start 8.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz  
SWP 20 ms

### Multi Marker List

|       |              |                 |
|-------|--------------|-----------------|
| No. 1 | 8.000000 GHz | 5.87 dB $\mu$ V |
|-------|--------------|-----------------|

|                            |
|----------------------------|
| Tested by:<br>Johann Roidt |
| Date:<br>February 10, 2001 |

|               |
|---------------|
| Project-No.:  |
| Page of pages |

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Vertical Polarisation         |
| Transmit at channel 70        |
|                               |
|                               |

Ref.Level 40.6 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

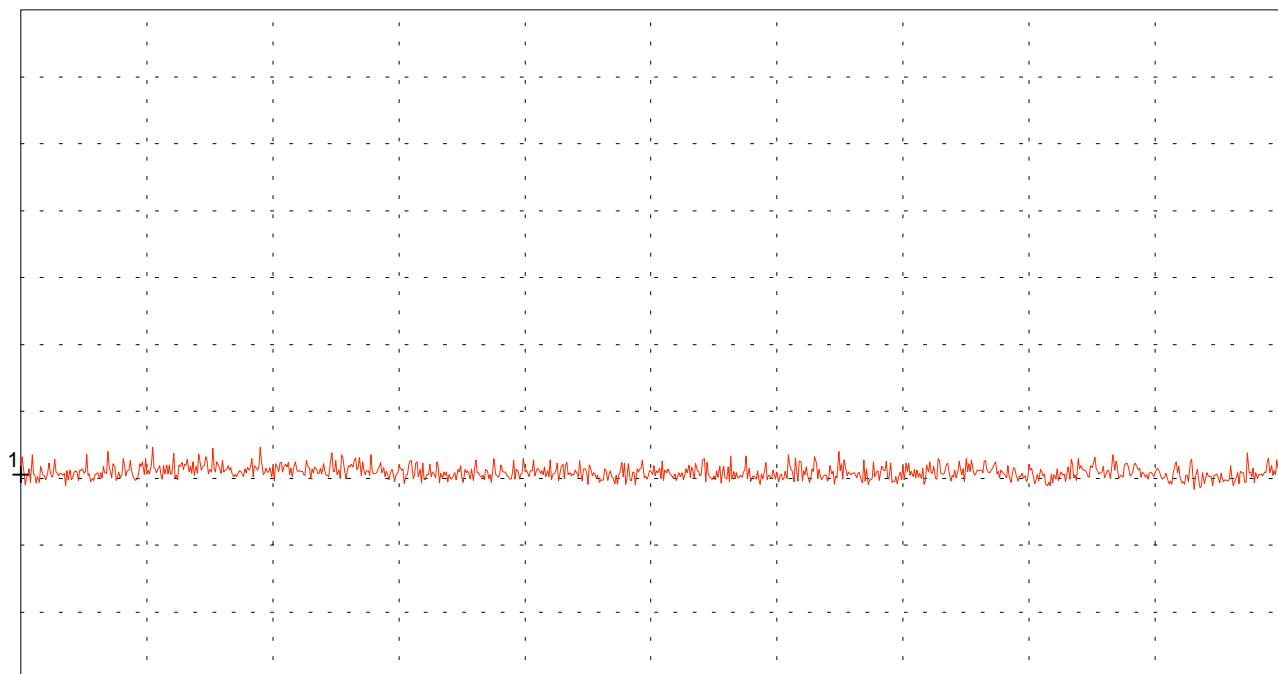

Start 8.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz  
SWP 20 ms

### Multi Marker List

No. 1 8.000000 GHz 5.87 dB $\mu$ V


|                            |
|----------------------------|
| Tested by:<br>Johann Roidt |
| Date:<br>February 10, 2001 |

|               |
|---------------|
| Project-No.:  |
| Page of pages |

# Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

|   |                    |
|---|--------------------|
| Model:<br>ORDERMAN Leo  |                    |
| Serial no.:<br>Modified Sample                                  |                    |
| Applicant:<br>think dig High Tech Solutions GmbH                |                    |
| Test site:<br>Semi anechoic room, cabin no. 3                   |                    |
| Tested on:<br>Test distance 3 meters<br>Horizontal Polarization |                    |
| Date of test: 02/04/2001  | Operator: J. Roidt |
| Test performed: automatically                                   | File name:         |

|                                    |
|------------------------------------|
| Mode:<br>RX on Channel 05 (lowest) |
| Flat on Table                      |
|                                    |

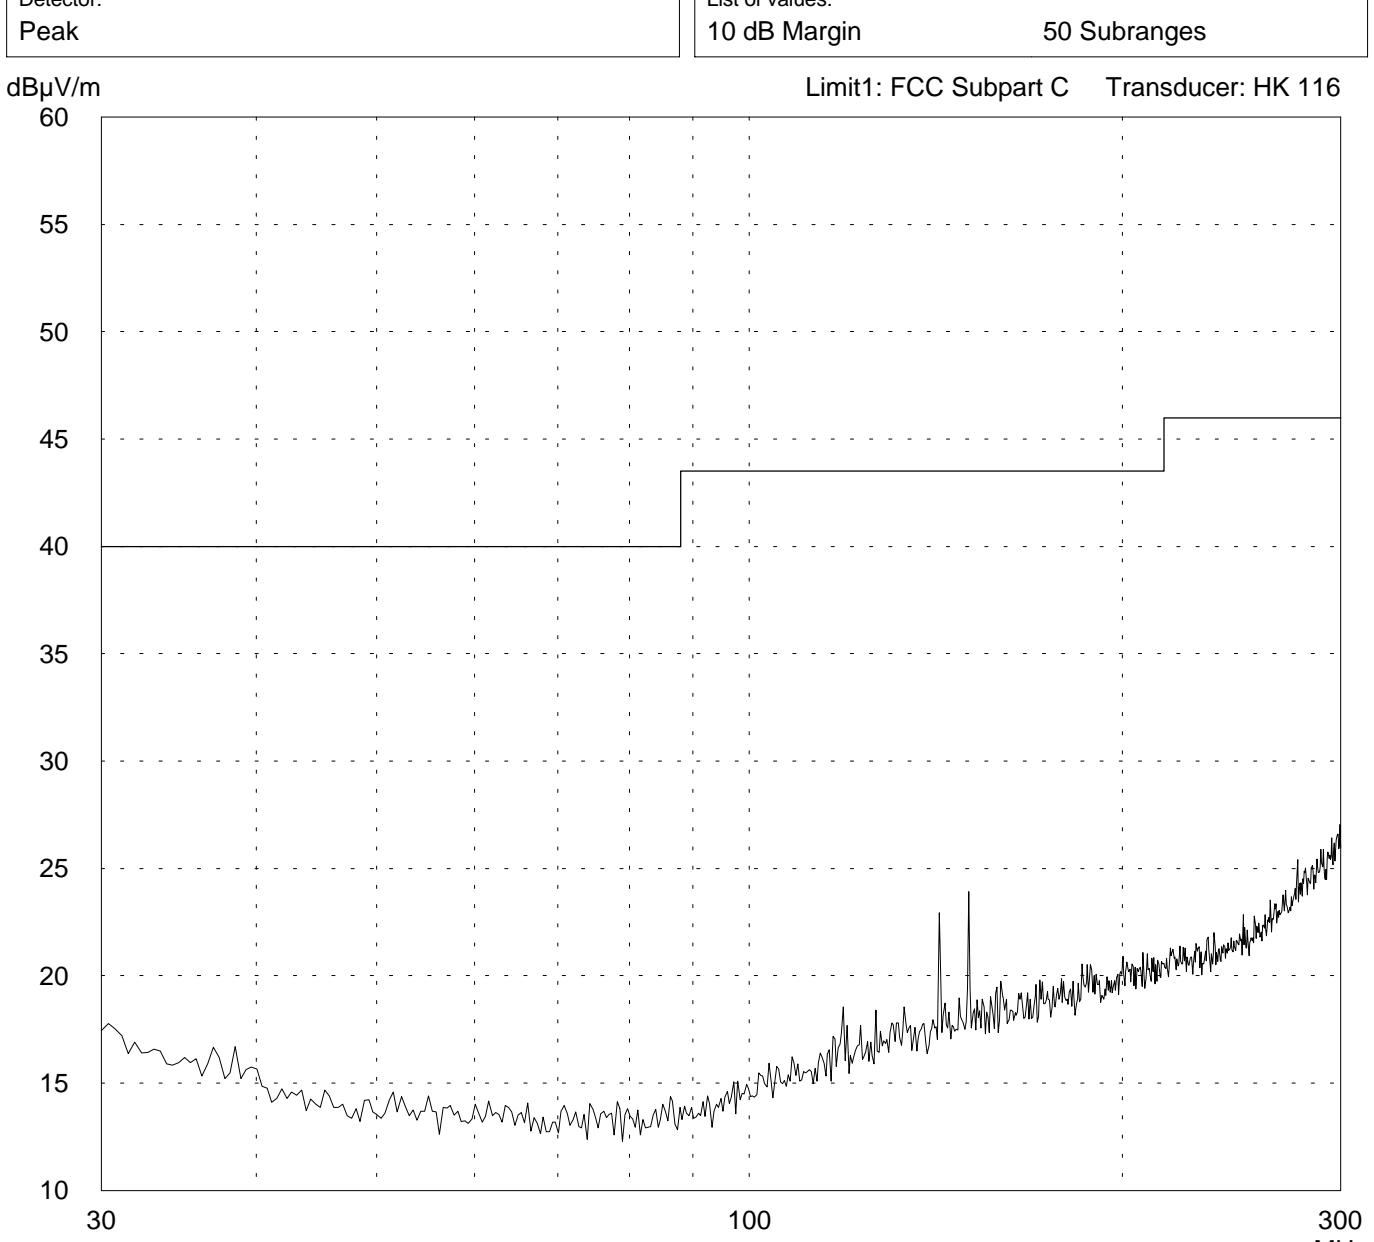


|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                                |
|--------------------------------|
| Project file:<br>55416-10031-1 |
| Page of Pages                  |

# Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

|   |                    |
|---|--------------------|
| Model:<br>ORDERMAN Leo  |                    |
| Serial no.:<br>Modified Sample                                |                    |
| Applicant:<br>think dig High Tech Solutions GmbH              |                    |
| Test site:<br>Semi anechoic room, cabin no. 3                 |                    |
| Tested on:<br>Test distance 3 meters<br>Vertical Polarization |                    |
| Date of test: 02/04/2001                                      | Operator: J. Roidt |
| Test performed: automatically                                 | File name:         |

|                                    |
|------------------------------------|
| Mode:<br>RX on Channel 05 (lowest) |
| Flat on Table                      |
|                                    |

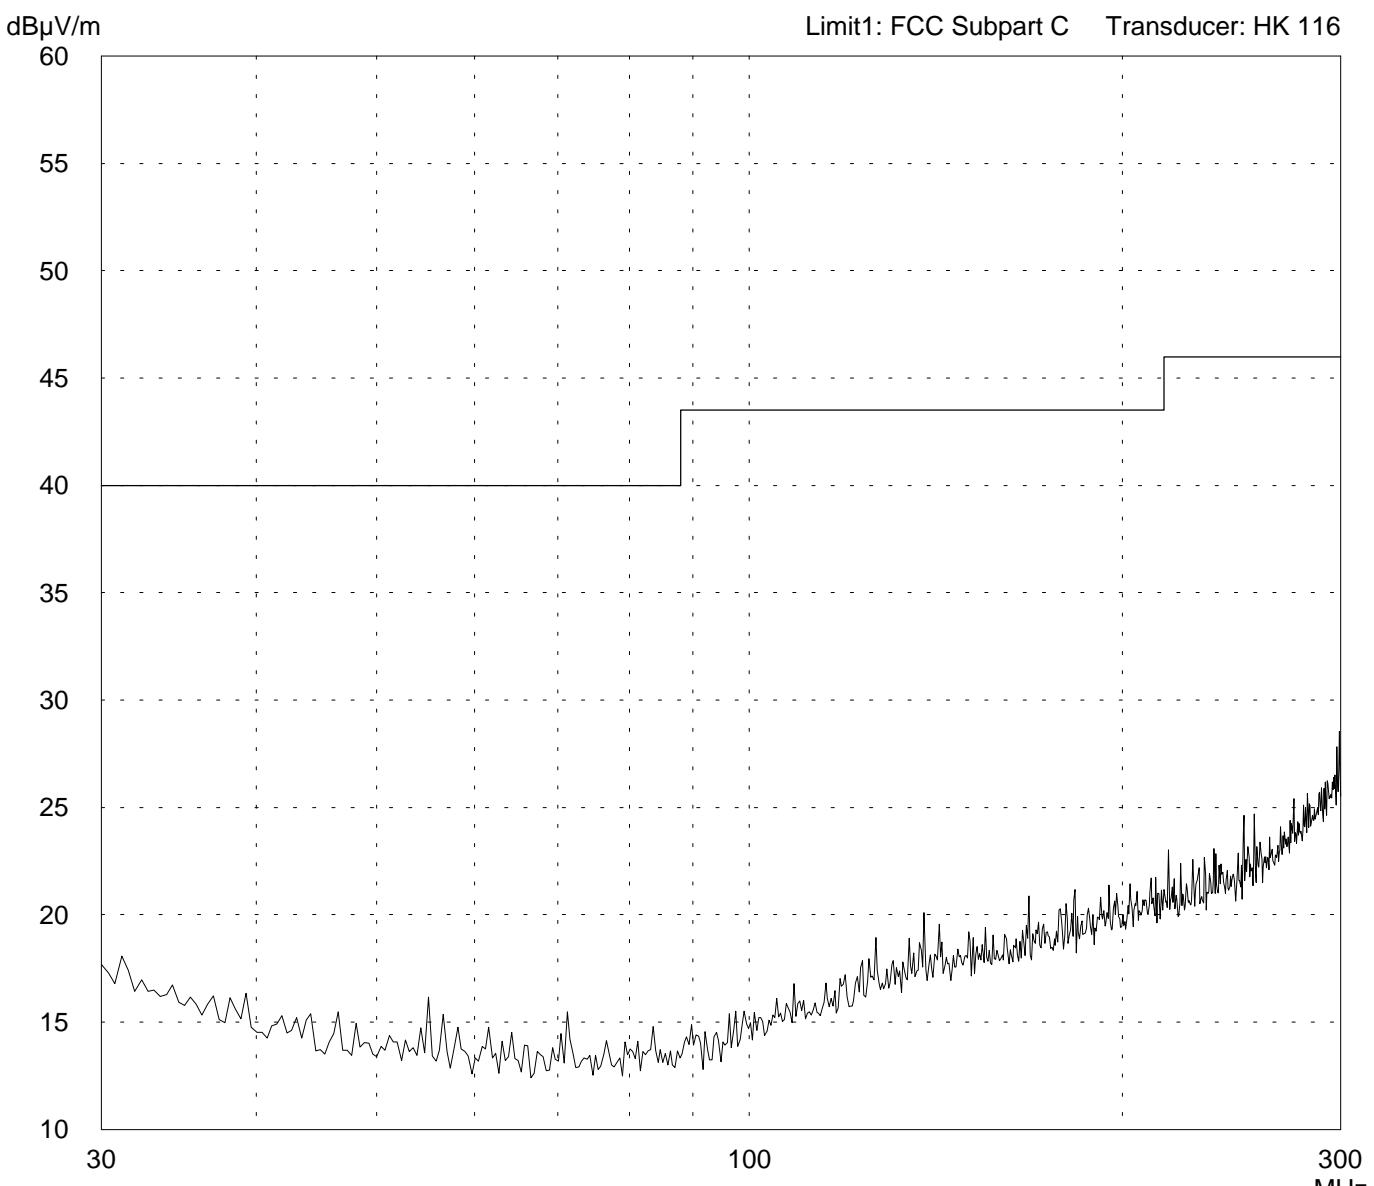


|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                                |
|--------------------------------|
| Project file:<br>55416-10031-1 |
| Page of Pages                  |

# Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

|   |                    |
|---|--------------------|
| Model:<br>ORDERMAN Leo  |                    |
| Serial no.:<br>Modified Sample                                  |                    |
| Applicant:<br>think dig High Tech Solutions GmbH                |                    |
| Test site:<br>Semi anechoic room, cabin no. 3                   |                    |
| Tested on:<br>Test distance 3 meters<br>Horizontal Polarization |                    |
| Date of test: 02/04/2001  | Operator: J. Roidt |
| Test performed: automatically                                   | File name:         |

|                                    |
|------------------------------------|
| Mode:<br>RX on Channel 05 (lowest) |
| Flat on Table                      |

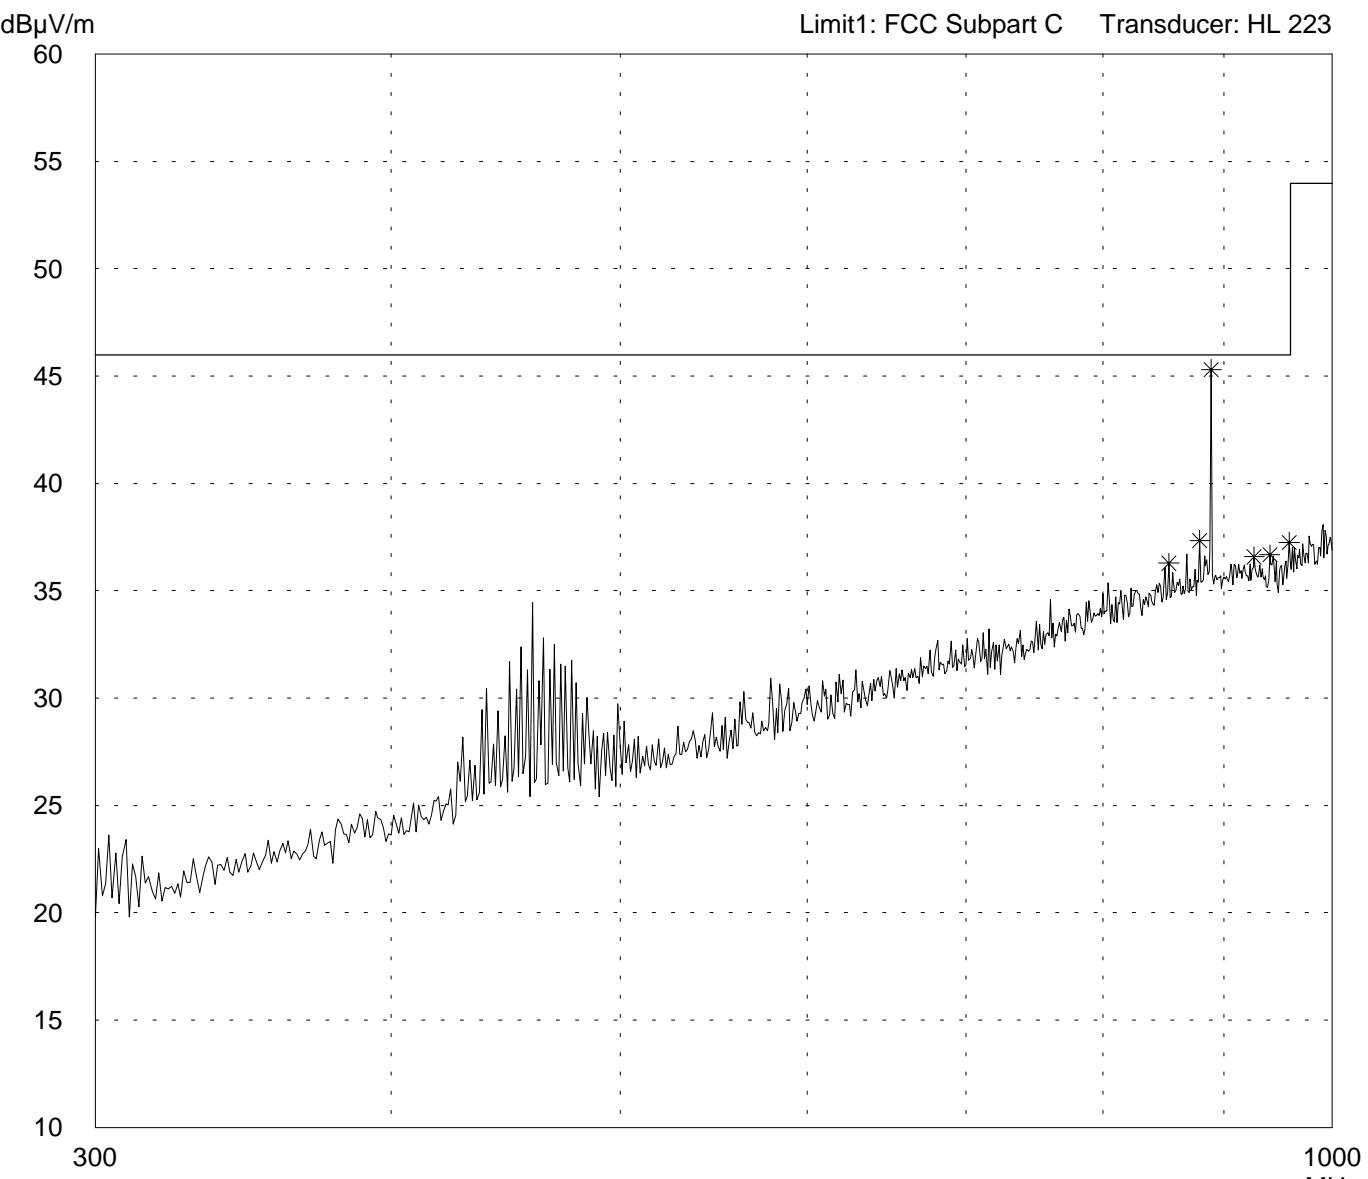

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                                |
|--------------------------------|
| Project file:<br>55416-10031-1 |
| Page of Pages                  |

# Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:  
ORDERMAN Leo

Serial no.:  
Modified Sample

Applicant:  
think dig High Tech Solutions GmbH

Test site:  
Semi anechoic room, cabin no. 3

Tested on:  
Test distance 3 meters  
Vertical Polarization

Date of test: 02/04/2001      Operator: J. Roidt


Test performed: automatically      File name:

Mode:  
RX on Channel 05 (lowest)

Flat on Table

Detector:  
Peak

List of values:  
10 dB Margin      50 Subranges

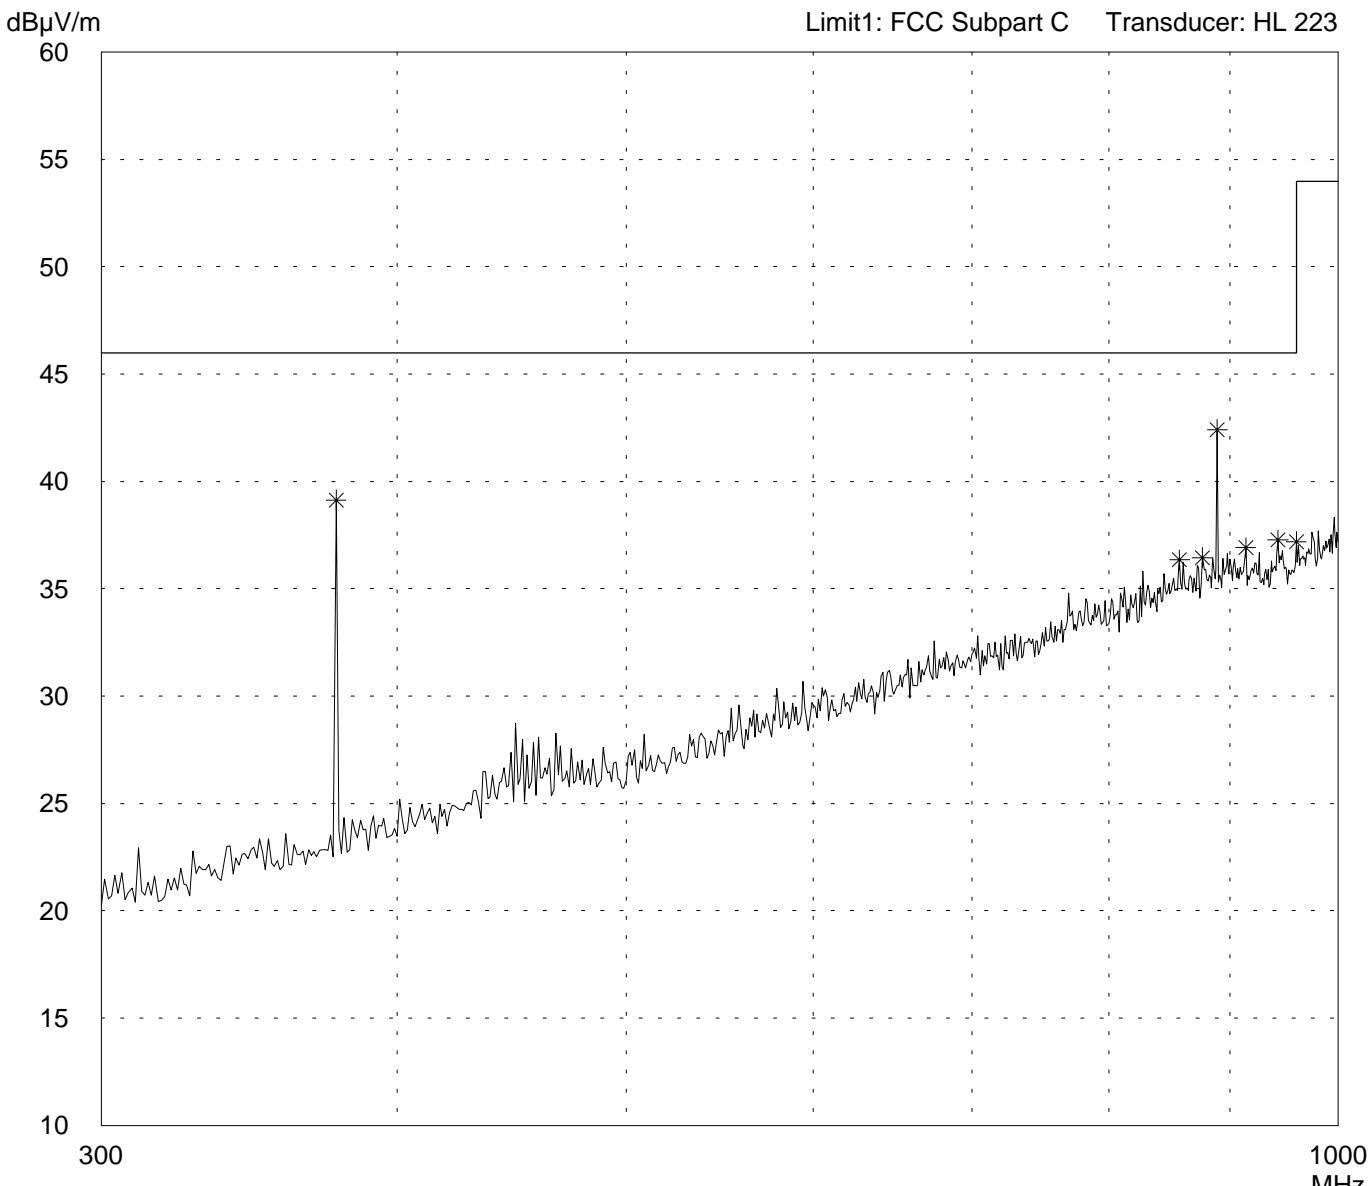

Result:  
Prescan

Project file:  
55416-10031-1

Page      of      Pages

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Horizontal Polarisation       |
| Receive at channel 05         |
|                               |
|                               |

Ref.Level 45.1 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

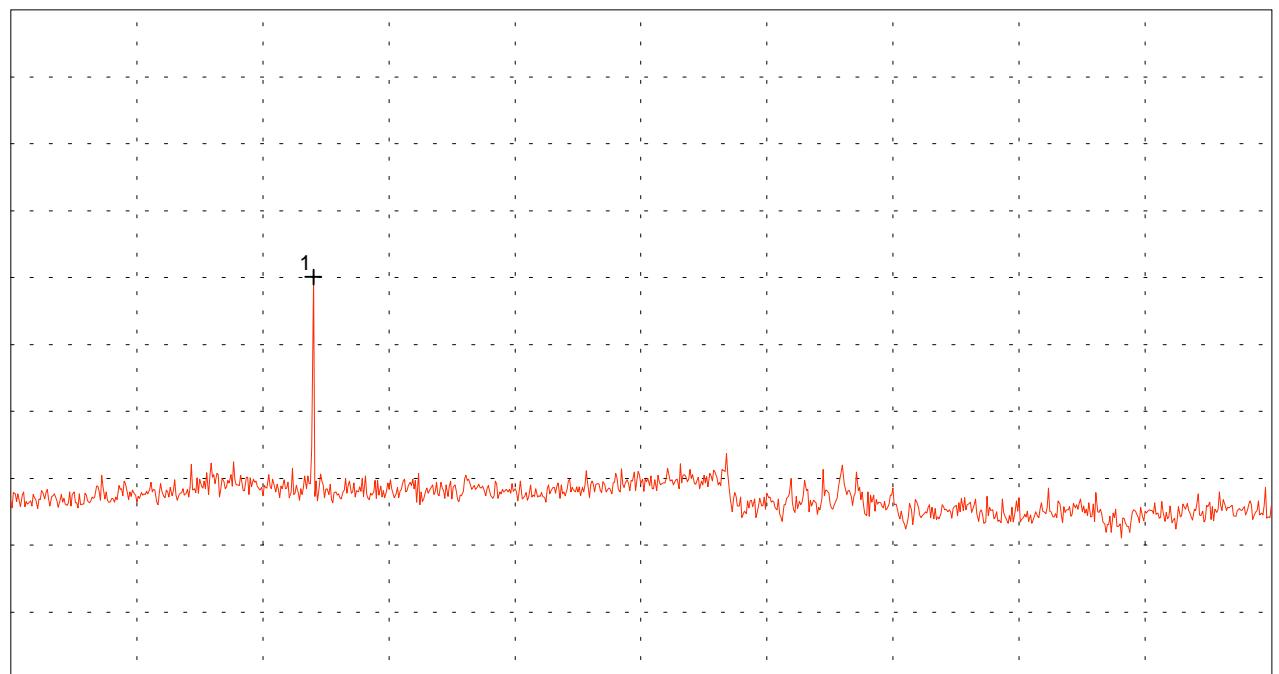

Start 1.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz  
SWP 40 ms

### Multi Marker List

No. 1 2.680000 GHz 25.15 dB $\mu$ V

Tested by:  
Johann Roidt

Date:  
February 10, 2001

Project-No.:

Page of pages

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Horizontal Polarisation       |
| Receive at channel 05         |
|                               |
|                               |

Ref.Level 45.1 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

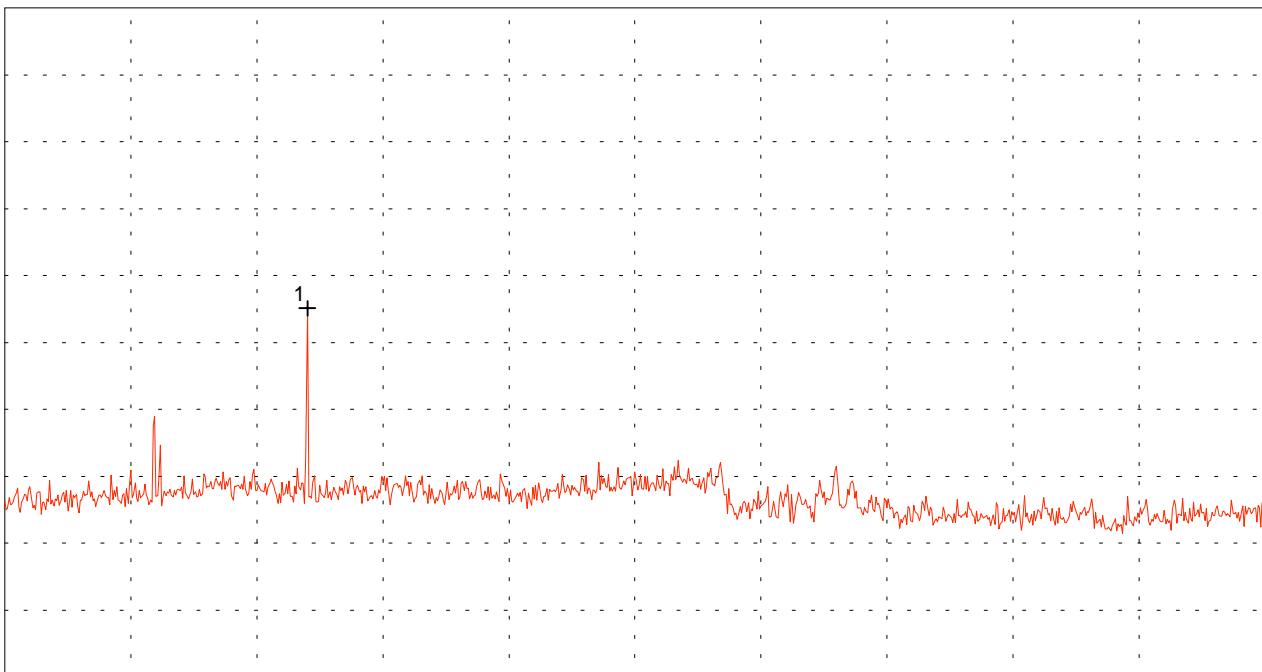

Start 1.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz  
SWP 40 ms

### Multi Marker List

No. 1 2.680000 GHz 22.66 dB $\mu$ V

|                            |
|----------------------------|
| Tested by:<br>Johann Roidt |
| Date:<br>February 10, 2001 |

|               |
|---------------|
| Project-No.:  |
| Page of pages |

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Horizontal Polarisation       |
| Receive at channel 05         |
|                               |
|                               |

Ref.Level 40.6 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

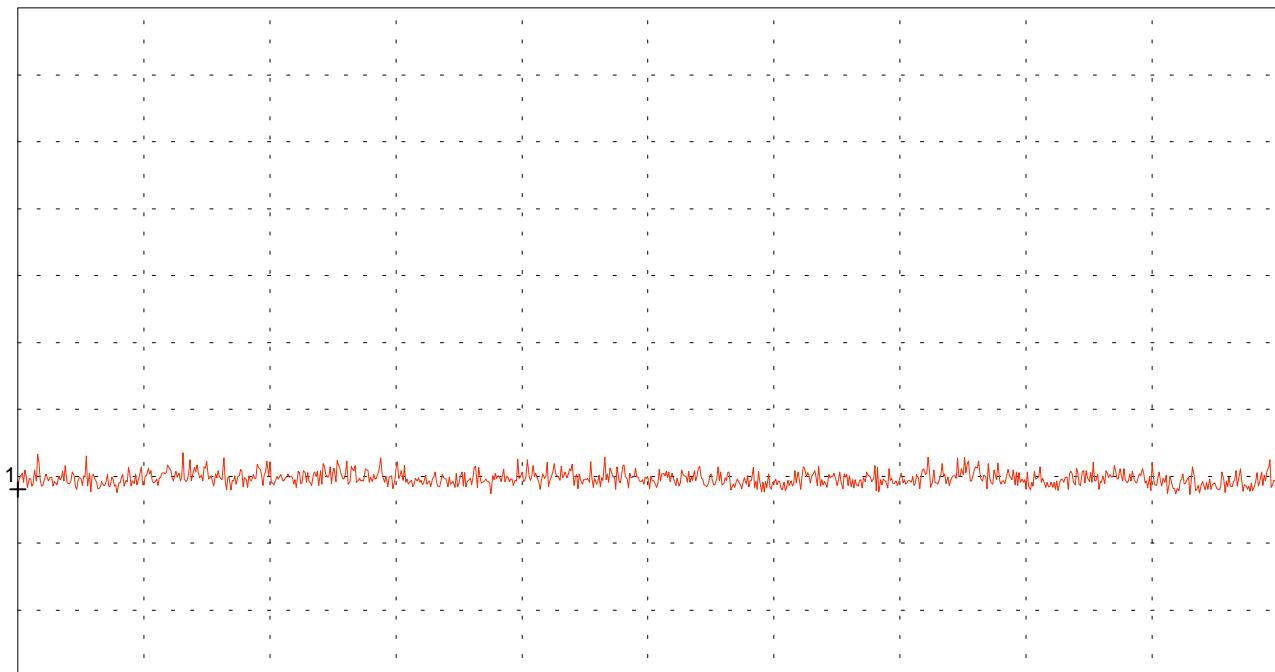

Start 8.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz  
SWP 20 ms

### Multi Marker List

No. 1 8.000000 GHz 4.61 dB $\mu$ V

Tested by:  
Johann Roidt

Date:  
February 10, 2001

Project-No.:

Page of pages

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Vertical Polarisation         |
| Receive at channel 05         |
|                               |
|                               |

Ref.Level 40.6 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

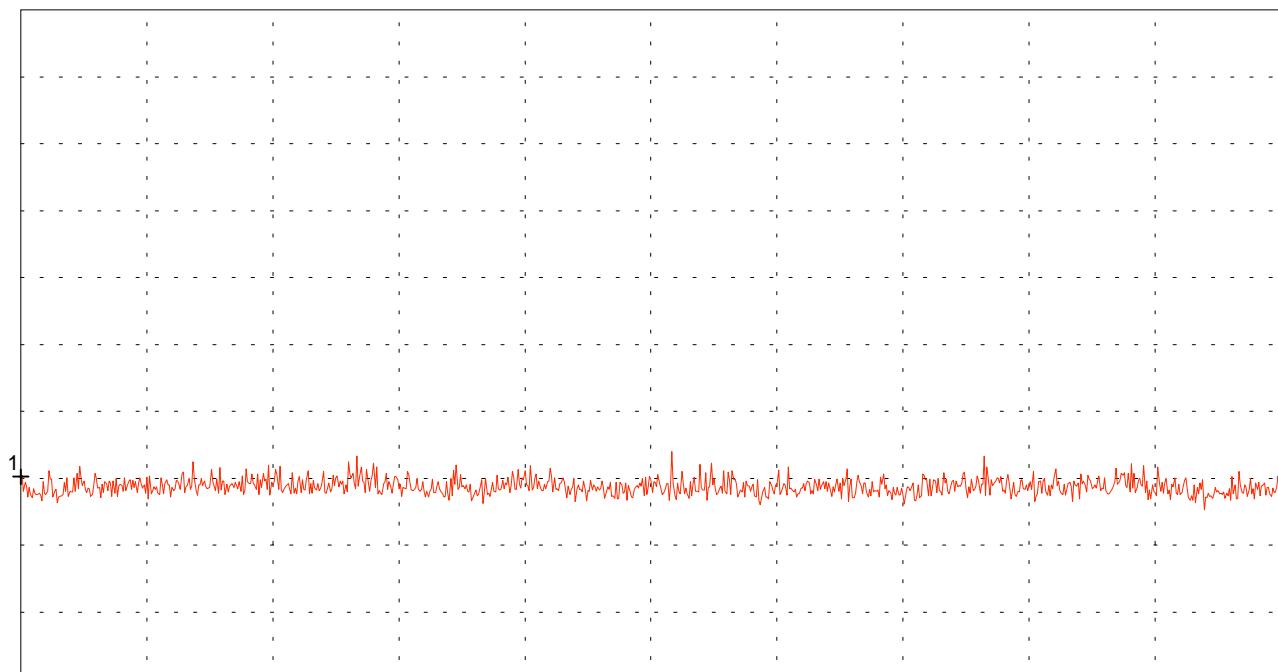

Start 8.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz  
SWP 20 ms

### Multi Marker List

No. 1 8.000000 GHz 5.70 dB $\mu$ V

|                            |
|----------------------------|
| Tested by:<br>Johann Roidt |
| Date:<br>February 10, 2001 |

|               |
|---------------|
| Project-No.:  |
| Page of pages |

# Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:  
ORDERMAN Leo

Serial no.:  
Modified Sample

Applicant:  
think dig High Tech Solutions GmbH

Test site:  
Semi anechoic room, cabin no. 3

Tested on:  
Test distance 3 meters  
Horizontal Polarization

Date of test: 02/04/2001      Operator: J. Roidt


Test performed: automatically      File name:

Mode:  
RX on Channel 70 (highest)

Flat on Table

Detector:  
Peak

List of values:  
10 dB Margin      50 Subranges

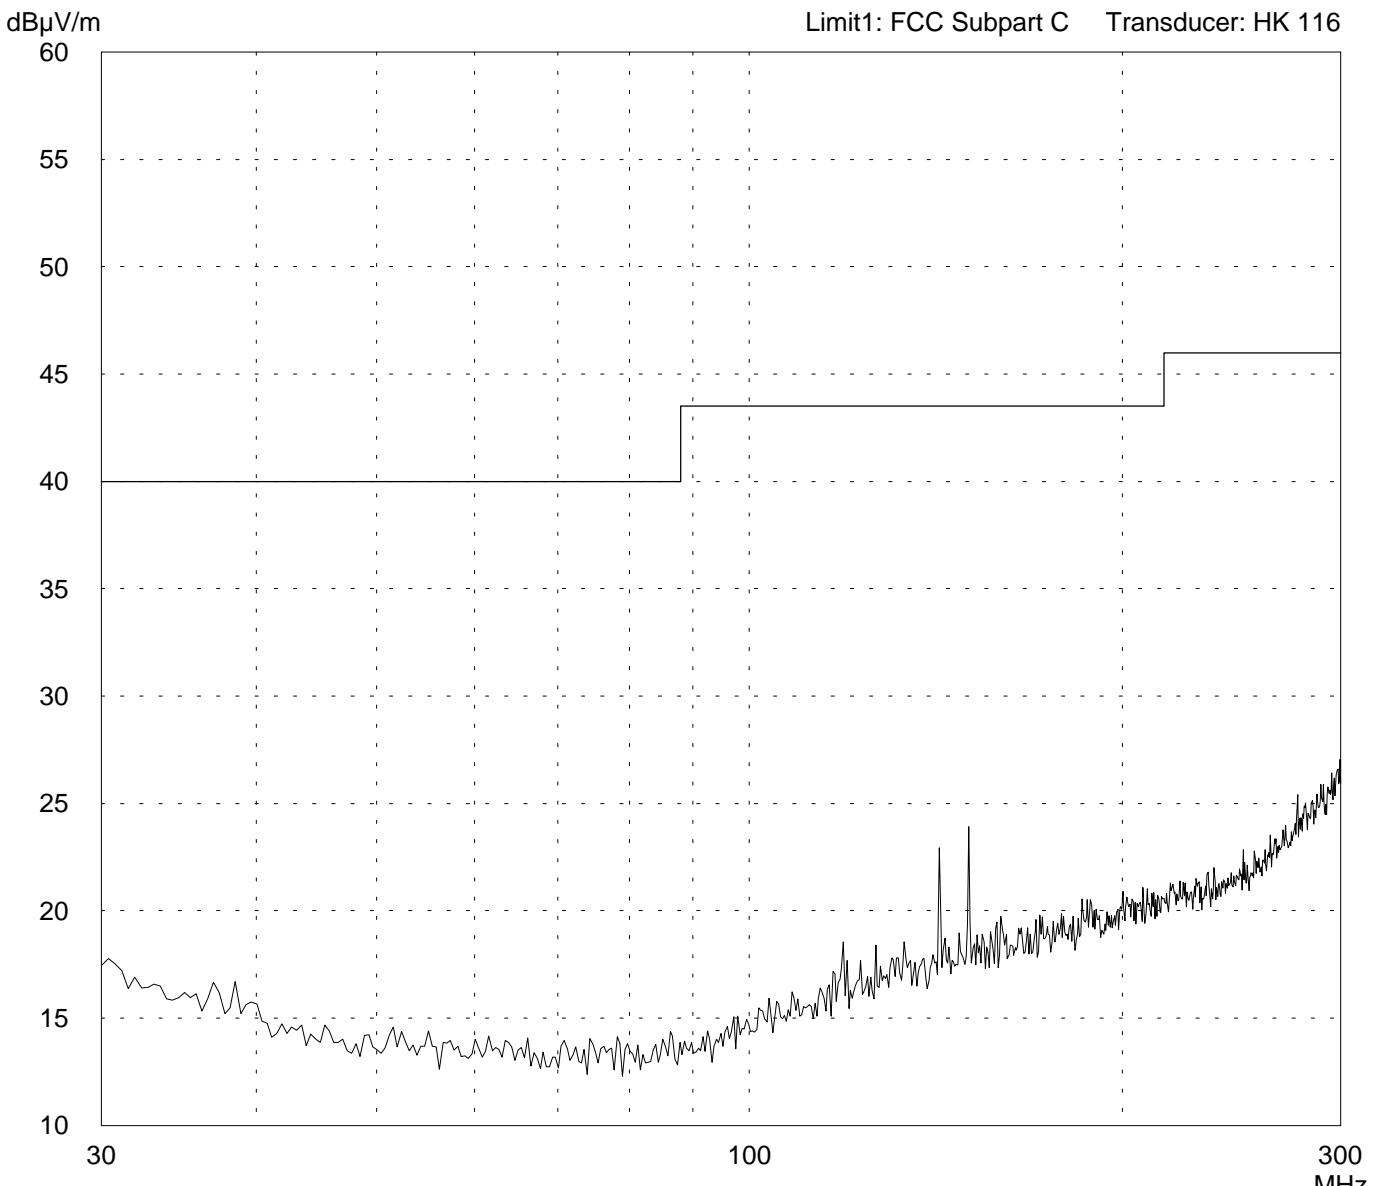

Result:  
Prescan


Project file:  
55416-10031-1

Page      of      Pages

# Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

|   |                    |
|---|--------------------|
| Model:<br>ORDERMAN Leo  |                    |
| Serial no.:<br>Modified Sample                                |                    |
| Applicant:<br>think dig High Tech Solutions GmbH              |                    |
| Test site:<br>Semi anechoic room, cabin no. 3                 |                    |
| Tested on:<br>Test distance 3 meters<br>Vertical Polarization |                    |
| Date of test: 02/04/2001                                      | Operator: J. Roidt |
| Test performed: automatically                                 | File name:         |

|                                     |
|-------------------------------------|
| Mode:<br>RX on Channel 70 (highest) |
| Flat on Table                       |
|                                     |

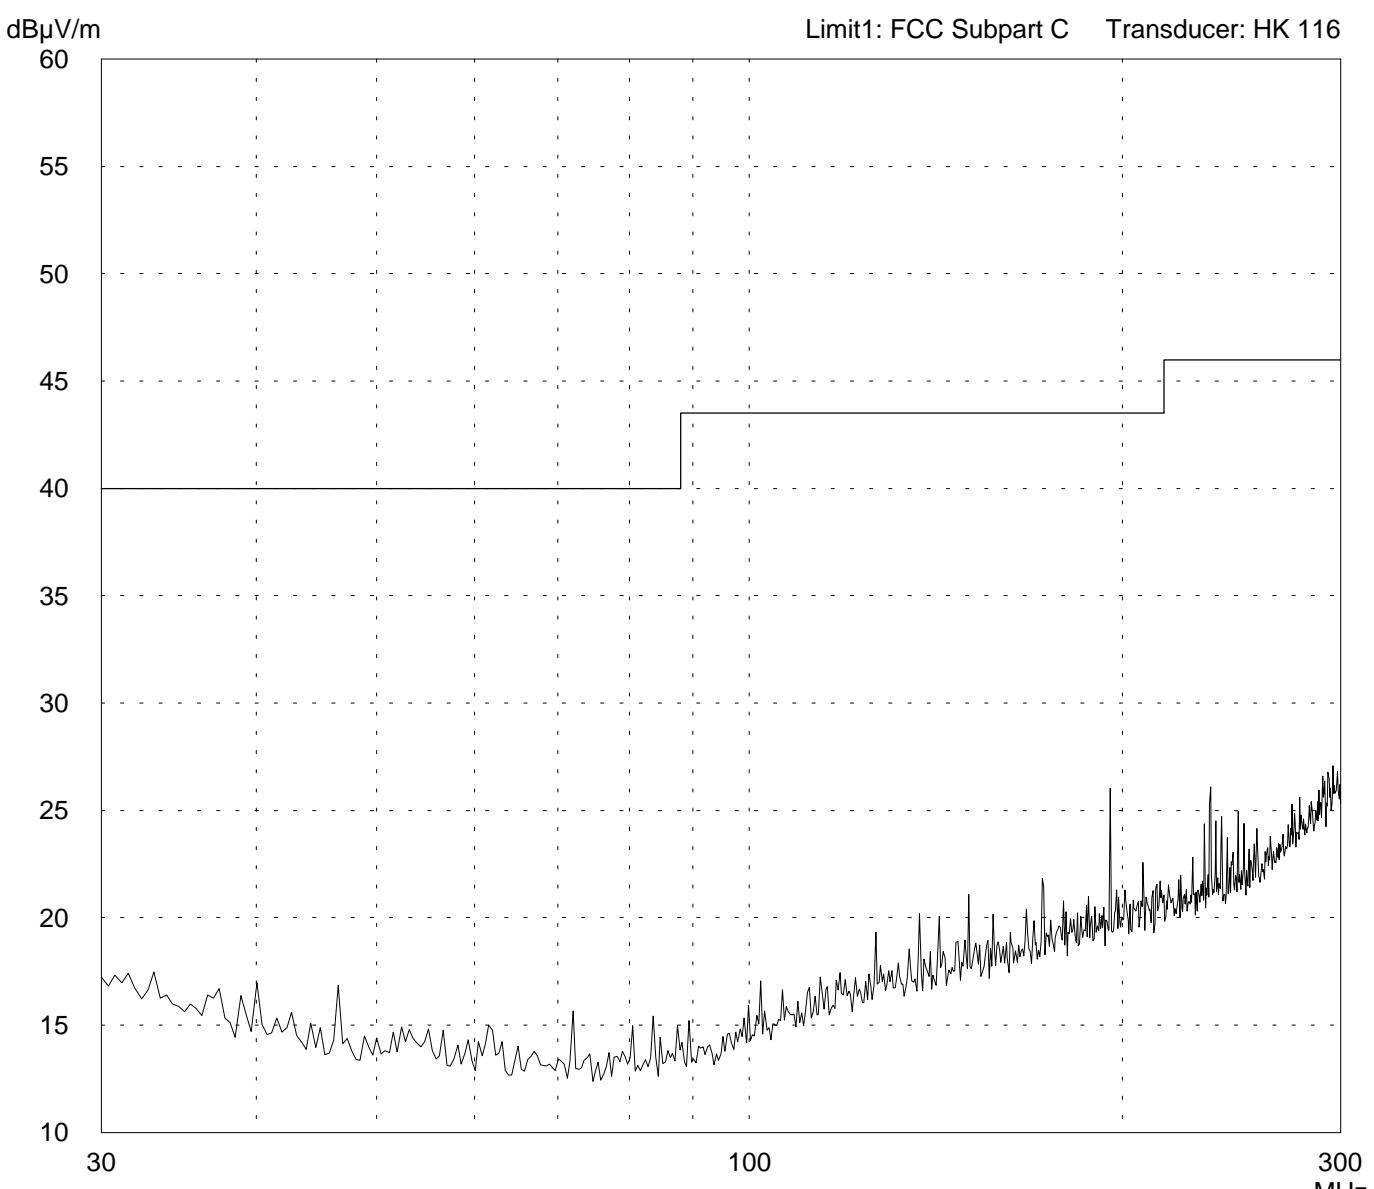

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                                |
|--------------------------------|
| Project file:<br>55416-10031-1 |
| Page of Pages                  |

# Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:  
ORDERMAN Leo

Serial no.:  
Modified Sample

Applicant:  
think dig High Tech Solutions GmbH

Test site:  
Semi anechoic room, cabin no. 3

Tested on:  
Test distance 3 meters  
Horizontal Polarization

Date of test: 02/04/2001      Operator: J. Roidt


Test performed: automatically      File name:

Mode:  
RX on Channel 70 (highest)

Flat on Table

Detector:  
Peak

List of values:  
10 dB Margin      50 Subranges

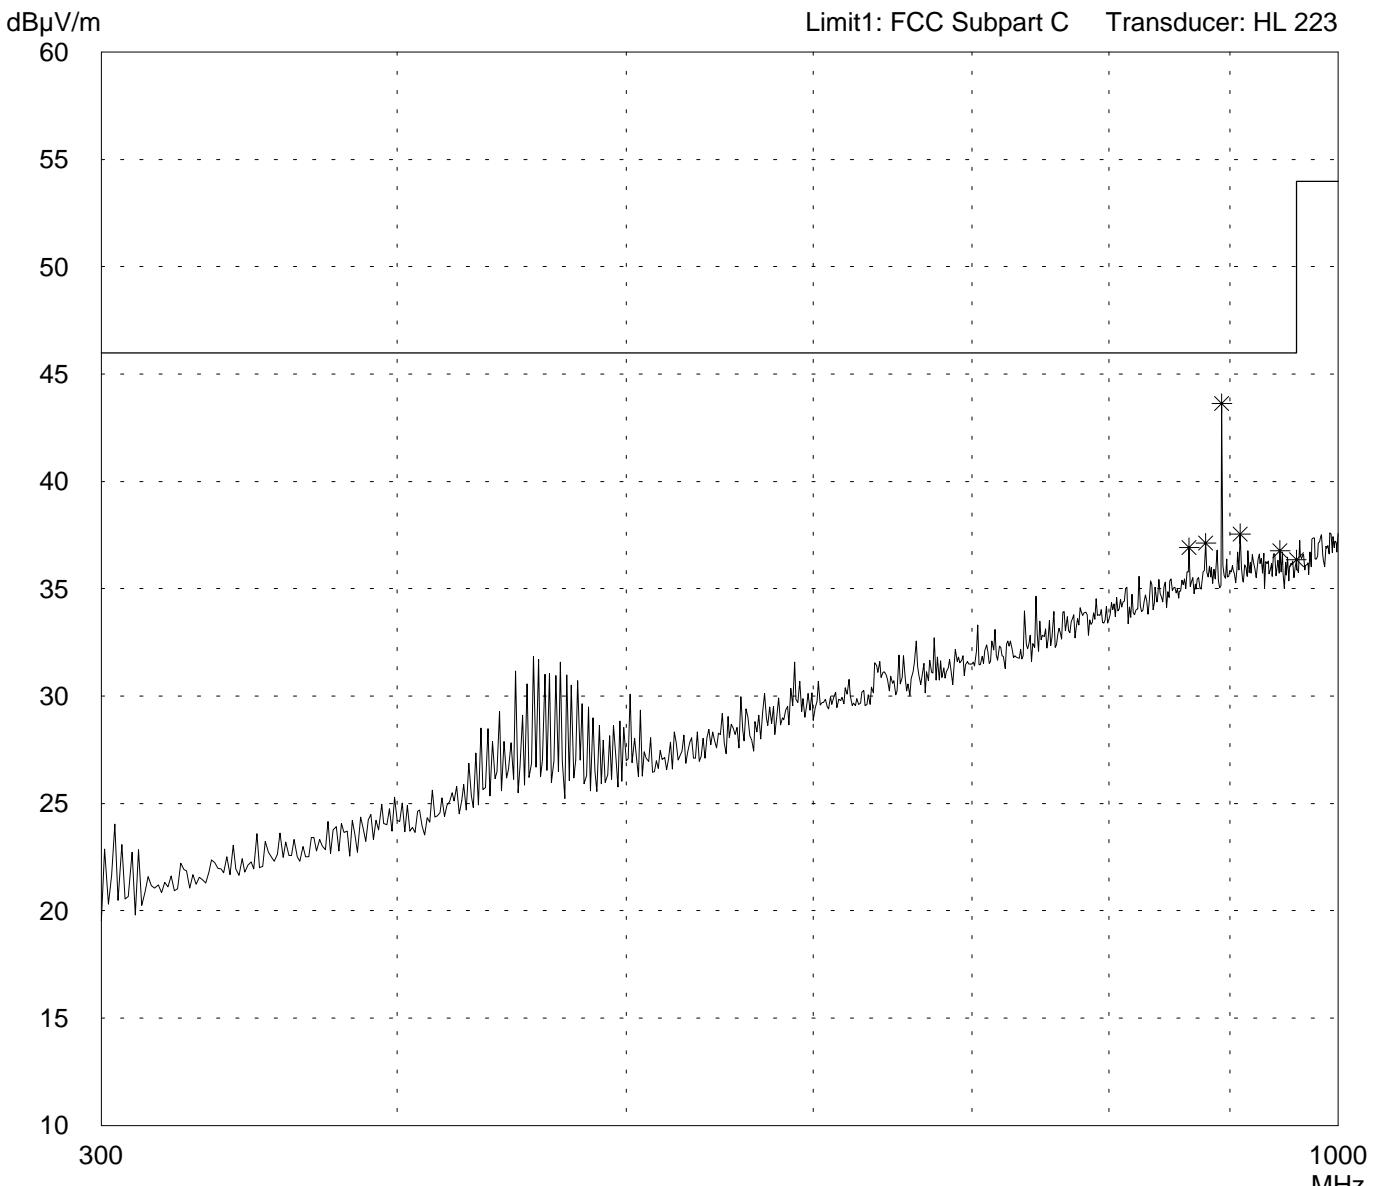

Result:  
Prescan

Project file:  
55416-10031-1

Page      of      Pages


# Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

|   |                    |
|---|--------------------|
| Model:<br>ORDERMAN Leo  |                    |
| Serial no.:<br>Modified Sample                                |                    |
| Applicant:<br>think dig High Tech Solutions GmbH              |                    |
| Test site:<br>Semi anechoic room, cabin no. 3                 |                    |
| Tested on:<br>Test distance 3 meters<br>Vertical Polarization |                    |
| Date of test: 02/04/2001                                      | Operator: J. Roidt |
| Test performed: automatically                                 | File name:         |

|                                     |
|-------------------------------------|
| Mode:<br>RX on Channel 70 (highest) |
| Flat on Table                       |

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                 |              |
|---------------------------------|--------------|
| List of values:<br>10 dB Margin | 50 Subranges |
|---------------------------------|--------------|

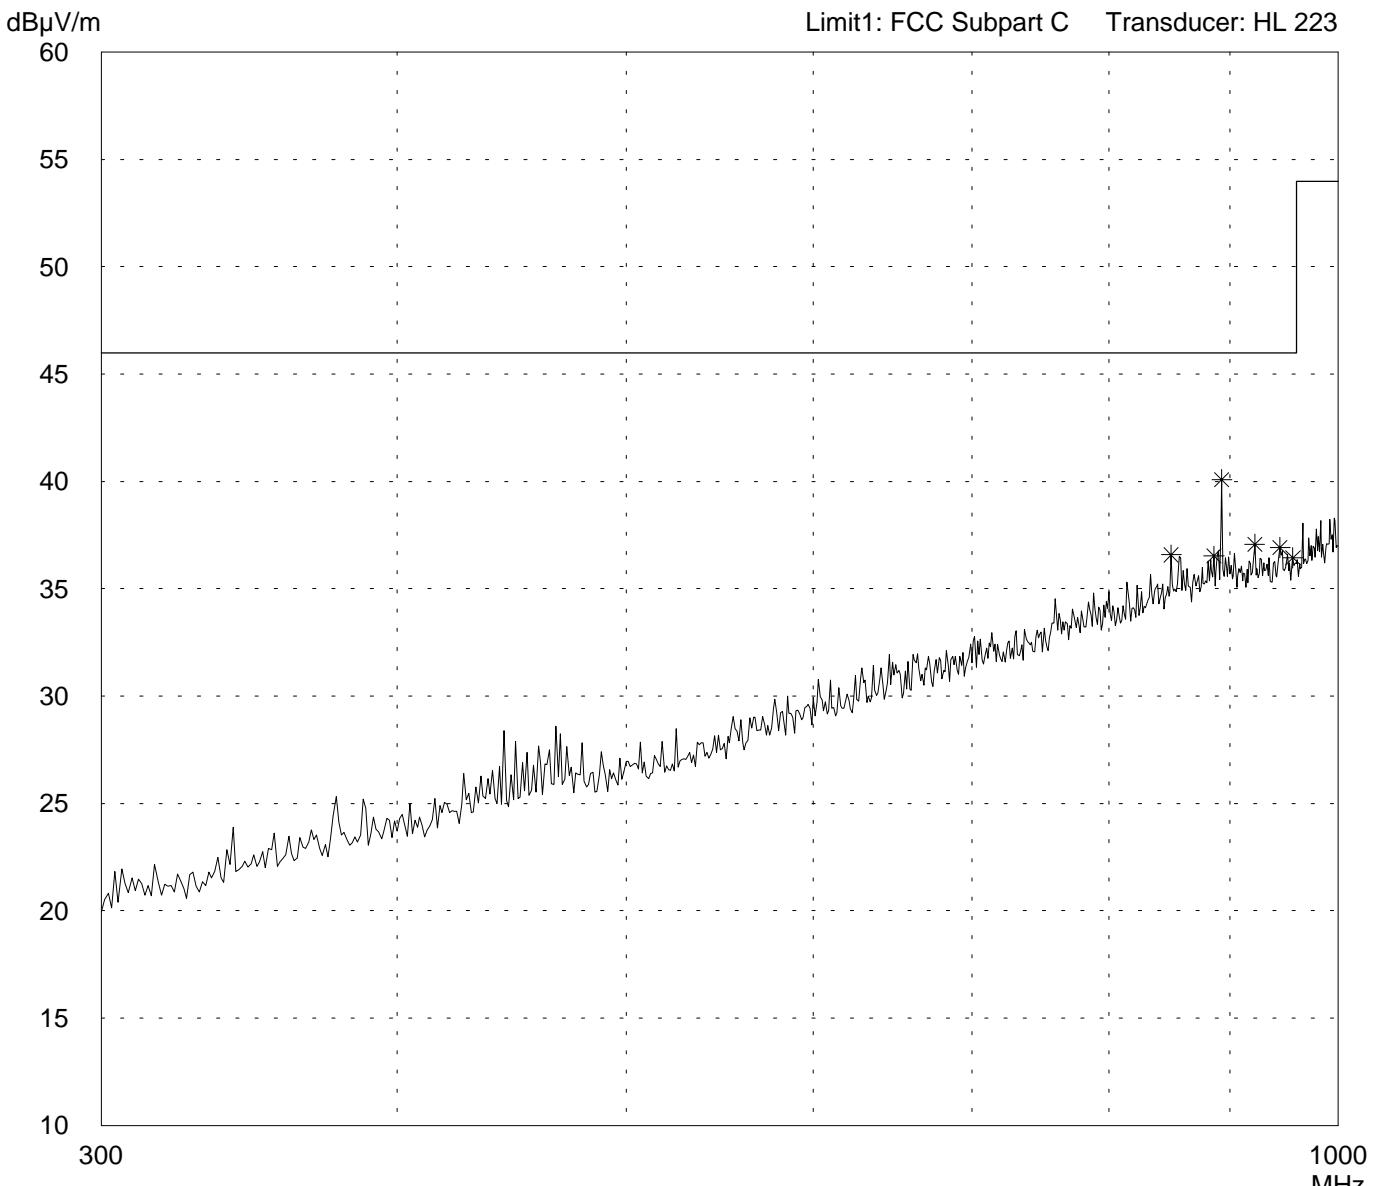

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                                |      |    |       |
|--------------------------------|------|----|-------|
| Project file:<br>55416-10031-1 | Page | of | Pages |
|--------------------------------|------|----|-------|

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Horizontal Polarisation       |
| Receive at channel 70         |
|                               |
|                               |

Ref.Level 45.1 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

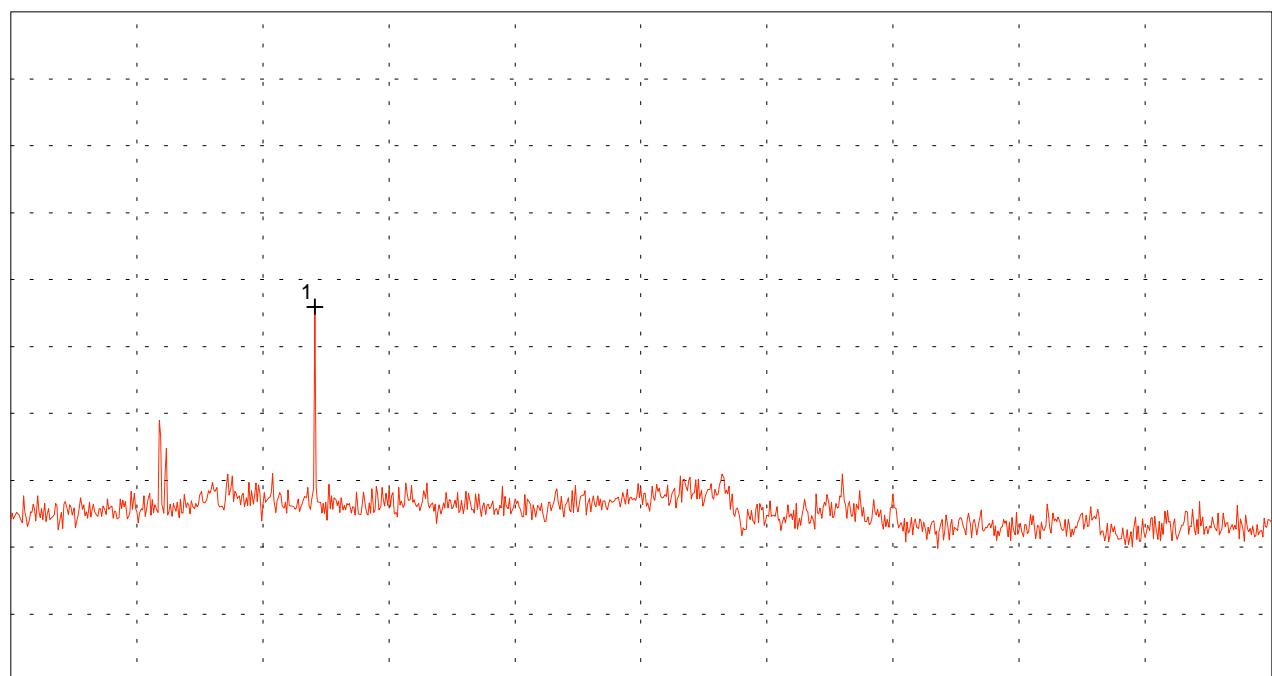

Start 1.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz  
SWP 40 ms

### Multi Marker List

No. 1 2.687778 GHz 23.06 dB $\mu$ V

|                            |
|----------------------------|
| Tested by:<br>Johann Roidt |
| Date:<br>February 10, 2001 |

|               |
|---------------|
| Project-No.:  |
| Page of pages |

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Vertical Polarisation         |
| Receive at channel 70         |

Ref.Level 45.1 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

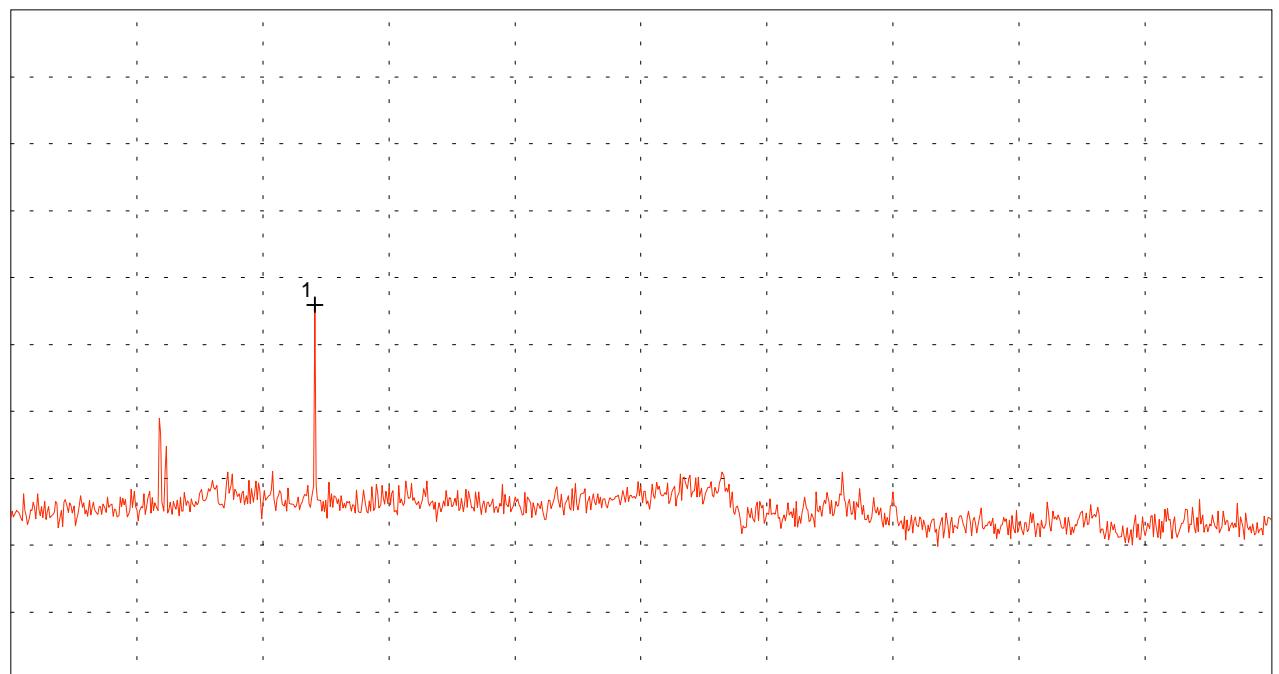

Start 1.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz  
SWP 40 ms

### Multi Marker List

No. 1 2.687778 GHz 23.06 dB $\mu$ V

Tested by:  
Johann Roidt

Date:  
February 10, 2001

Project-No.:

Page of pages

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Horizontal Polarisation       |
| Receive at channel 70         |

Ref.Level 40.6 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

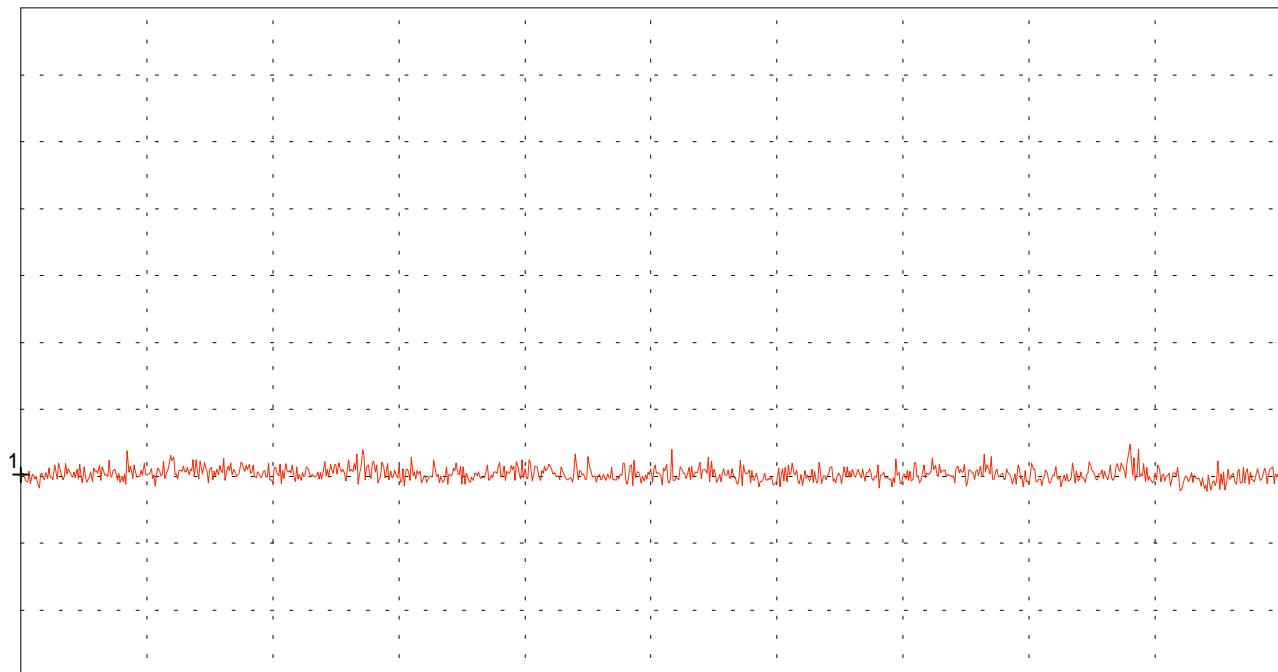

Start 8.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz  
SWP 20 ms

### Multi Marker List

No. 1 8.000000 GHz 5.70 dB $\mu$ V

|                            |
|----------------------------|
| Tested by:<br>Johann Roidt |
| Date:<br>February 10, 2001 |

|               |
|---------------|
| Project-No.:  |
| Page of pages |

## Spurious emissions measurement according to FCC Rules


|   |
|---|
| Model:<br>Orderman LEO                      |
| Serial No.:<br>Modified Sample              |
| Applicant:<br>think dig High Solutions GmbH |
|   |
|   |
|   |
|   |

|                               |
|-------------------------------|
| Mode:<br>Radiated Measurement |
| Vertical Polarisation         |
| Receive at channel 70         |

Ref.Level 40.6 dB $\mu$ V  
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

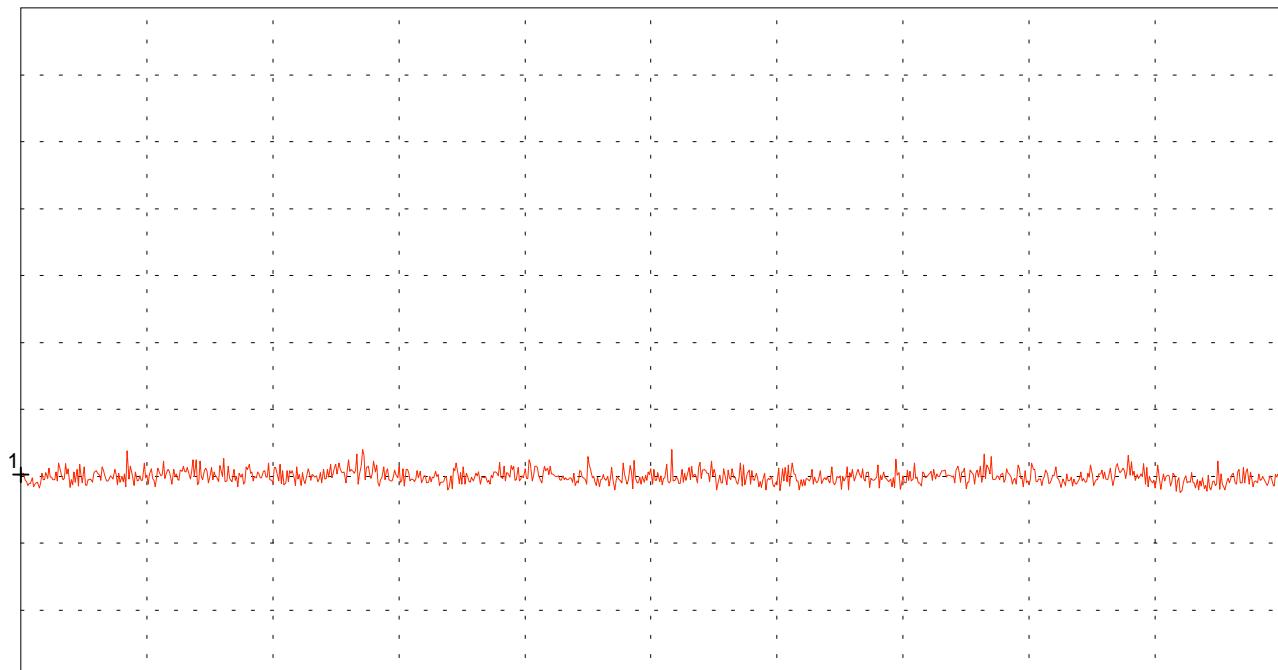

Start 8.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz  
SWP 20 ms

### Multi Marker List

No. 1 8.000000 GHz 5.70 dB $\mu$ V

Tested by:  
Johann Roidt

Date:  
February 10, 2001

Project-No.:

Page of pages