

TEST-REPORT No. 50305-10056-2

Product Description	Transceiver
Brand	Orderman Base Unit
Model / Type	OMB 9400 US
Serial No.	---

Applicant	think dig High Tech Solutions GmbH Bachstrasse 59 A-5023 Salzburg
Contact	Klaus Strasser

Order / Date	January 18, 2001
Test sample received	January 18, 2001

Test Specification	FCC Rules Part 15, Subpart C, Section 15.249 Industry Canada RSS 210, Issue 2,
--------------------	---

Test Result	The tested sample complies with the test specifications
-------------	--

Tested by		March 08, 2001
	Johann Roidt	Date

Checked		March 08, 2001
	Johann Roidt	Date

Note	The test data of this report relate only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.
------	--

Table of Contents

1. Operation Mode of EUT	3
2. Changes made to the EUT during this certification test.....	4
3. Configuration of EUT and periperal devices.....	5
4. Measuring Methods	6
Transmitter Parameter TestS (§15.209).....	6
Radiated Emissions 0.009 – 30 MHz	7
Radiated Emissions 30 MHz – 1 GHz	8
Radiated Emissions above 1 GHz	9
Procedure for preliminary Radiated Emission Tests	10
Method for comparing spectrum analyzer output to the limit.....	11
Spectrum analyzer setting for final test	11
5. Photographs taken during testing.....	12
6. List of Measurements.....	16
7. Test Results.....	17
8. Equipment List	21
9. Charts taken during Testing	23

1. Operation Mode of EUT

The EUT was equipped with a test software which allowed independent access to individual RF channels as well as transmit and receive mode. All tests were performed at lowest and highest RF-channel.

2. Changes made to the EUT during this certification test

No changes have been made to the EUT during this certification test.

3. Configuration of EUT and peripheral devices

Configuration of cables connected to the EUT

Every port of the EUT was loaded with unshielded cables

Configuration of peripheral devices connected to the EUT

The EUT received power from the dedicated AC adapter supplied with the unit.


4. Measuring Methods

Transmitter Parameter TestS (§15.209)

All transmitter parameter radiated tests are performed at a test distance of 3 meters in a semianechoic chamber. During the tests the EUT will be rotated all around and the receiving antenna will be raised and lowered from 1 meter to 4 meter to find the maximum levels of emission. Cables and equipment will be placed and moved within the position likely to find their maximum emissions. Measurements will be made in horizontal and vertical polarization of the receiving antenna.

The EUT was operating in transmit mode with its internal modulation.

The bandwidth of the emission will be measured with a spectrum analyzer. Resolution Bandwidth and Video Bandwidth will be set to 10 kHz.

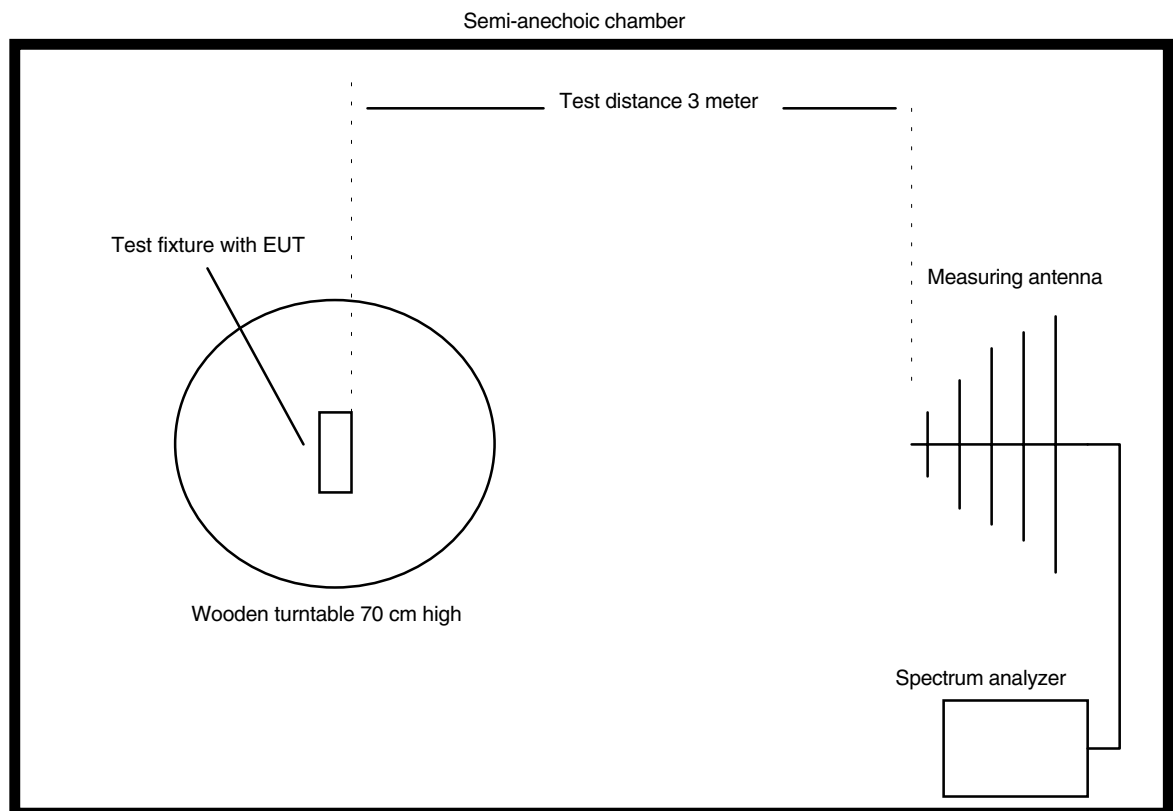

Radiated Emissions 0.009 – 30 MHz

Radiated emissions in the frequency range 0.009 – 30 MHz will be measured initially at a distance of 3 meters. A prescan at 3 meter distance will be performed in a shielded room with the detector of the spectrum analyzer or EMI Receiver set to peak. Final measurement is then performed at 30 meter distance. In case the regulation requires testing at other distances, the result will be extrapolated. The extrapolation factor will be determined by making a second measurement at 10 meter distance. The provisions of 15.31 (d) apply.

According to section 15.209 (d) final measurement is performed with the detector set to Quasi Peak except for the frequency bands 9 – 90 kHz and 110 – 490 kHz where average detector is employed.


Radiated Emissions 30 MHz – 1 GHz (FCC §15.109, RSS-210 Section 7.3)

Radiated emissions in the frequency range 30 – 1000 MHz will be measured at a distance of 3 meter. The bandwidth of the spectrum analyzer will be set to 100 kHz and the detector function set to Quasi Peak.

The test setup will be made in accordance with ANSI C.63.4-1992.

Measurements will be made in horizontal and vertical polarization of the receiving antenna. Prescans will be taken in a semianechoic chamber using a spectrum analyzer with the detector function set to peak. All tests will be performed at a test distance of 3 meters. For final testing an open field test site will be used. During the tests the EUT will be rotated all around and the receiving antenna will be raised and lowered from 1 meter to 4 meter to find maximum levels of emissions.

For handheld equipment the tests will be performed in three orthogonal axes.

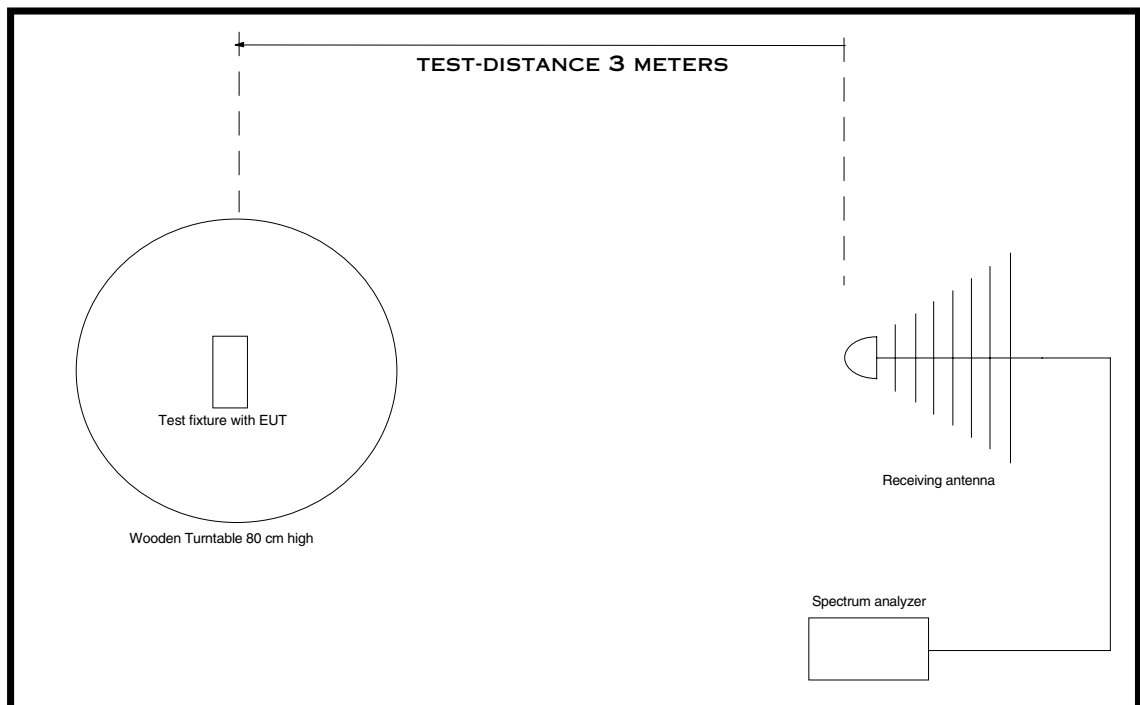


Radiated Emissions above 1 GHz (FCC §15.109, RSS-210 Section 7.3)

Radiated emissions were measured in the frequency range 1 GHz to 3.15 GHz in transmit mode. The resolution bandwidth and the video bandwidth of the spectrum analyzer was set to 1 MHz. Prescans with video bandwidth 1 MHz (peak mode) were taken to check out the highest levels (with reference to the limits), see 6.4 for details to prescan procedure. Final measurements were performed at the three highest emissions per band. EUT was rotated all around and receiving antenna was raised and lowered to find the maximum levels of emission. Cables and equipment were placed and moved within the range of position likely to find their maximum emissions. Measurements were made in horizontal and vertical polarization. All tests were performed in a semi-anechoic chamber with a test-distance of 3 meters. For handheld equipment the tests will be performed in three orthogonal axes.

To avoid overload in transmit mode a high pass filter was connected to the input of the preamplifier (in case when a preamplifier was necessary)). In this case a signal generator was used for substitution to eliminate the influence of filter and preamplifier.

Substitution was performed in the following steps:

- antenna cable was disconnected from receiving antenna and connected to signal generator output
- level of signal generator was increased until the reading value of the analyzer was the same as caused by EUT
- level of signal generator was noted
- final value was calculated by converting the signal generator level to dB μ V/m and adding the antenna correction factor.

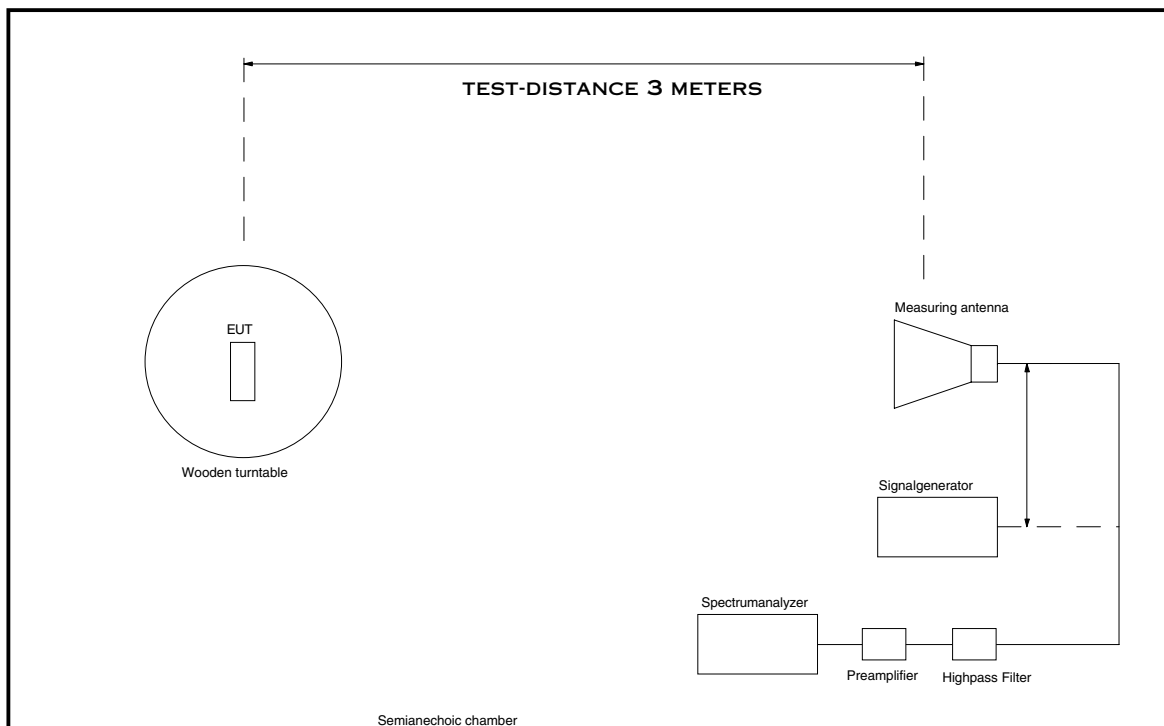

Procedure for preliminary Radiated Emission Tests

The procedure for preliminary radiated emission tests follows section 13.4.1 of ANSI C63.4-1992.

In case the EUT is a handheld device preliminary emission measurements will be performed in three orthogonal axes of the EUT.

Prescans are made in the following frequency range:

0.009 – 30 MHz
30 – 230 MHz
230 – 1000 MHz
1000 – 2600 MHz
2600 – 3950 MHz
3950 – 5850 MHz
5850 – 8200 MHz
8200 – 12400 MHz
12400 – 18000 MHz
18000 – 26500 MHz
26500 – 40000 MHz

with the receiving antenna set to horizontal and vertical polarization.

The following step-by-step procedure will be used:

Monitor the frequency range at a fixed antenna height and EUT azimuth

Rotate the EUT by 360 degrees to maximize the suspected highest azimuth signals. Note the amplitude and frequency of the signals. Orient the EUT azimuth for maximum emission.

Move the antenna over its full allowed range of travel to maximize the emission. If the signal or another one at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to step 2) with the antenna fixed at this height. Otherwise move the antenna to the height that repeats the highest amplitude observation and proceed.

Identify at least the three highest emissions per band by using the multimarker function of the spectrum analyzer. Make a hardcopy of the spectrum.

Repeat steps 1) through 4) for the other orthogonal axes of the EUT.

Repeat steps 1) through 5) for other orthogonal antenna polarization.

Method for comparing spectrum analyzer output to the limit

The following procedure will be used:

Maximize the emission according to 6.4.

Set the spectrum analyzer to **Max Hold**

Wait until the noise is fully maximized.

Put the marker on top of the investigated signal.

Note frequency and level of the investigated signal

Add antenna correction and cable loss to this level and compare it with the limit.

Spectrum analyzer setting for final test


Frequency range	Detector	Resolution Bandwidth	Video Bandwidth	Trace Mode
0.009 – 30 MHz	Quasi Peak	10 kHz	10 kHz	Max Hold
9 – 90 kHz 110 – 490 kHz	Average	10 kHz	100 Hz	Max Hold
30 – 1000 MHz	Quasi Peak	100 kHz	1 MHz	Max Hold
> 1000 MHz	Peak	1 MHz	1 MHz	Max Hold
> 1000 MHz	Average	1 MHz	1 kHz	Max Hold

5. Photographs taken during testing



Conducted Emission Measurement 450 kHz – 30 MHz



**Radiated Emission Measurement >30 MHz
- Semianechoic Chamber -**

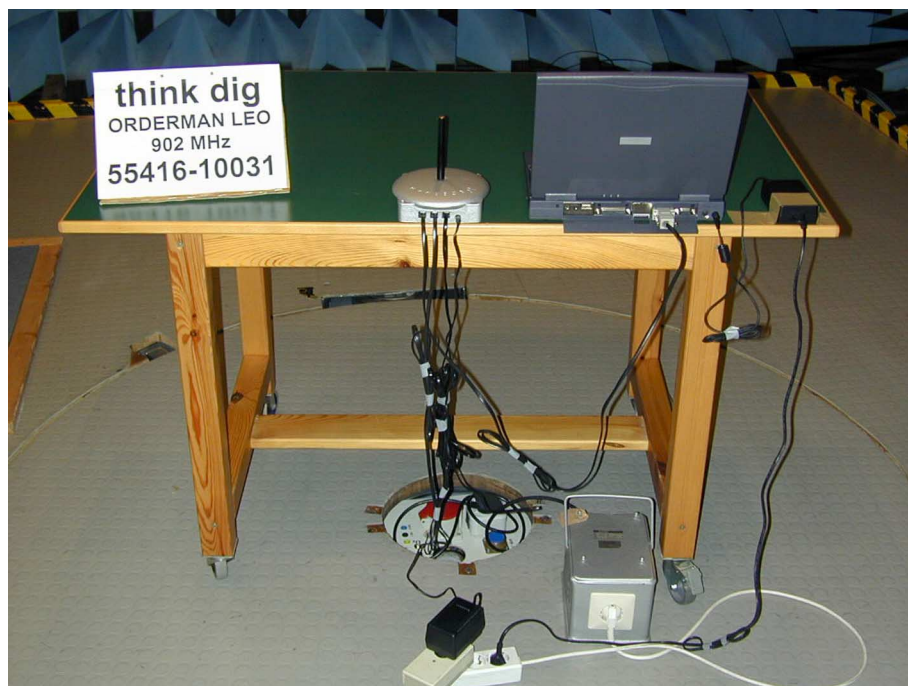

**Radiated Emission Measurement >30 MHz
- Open Area Test Site -**

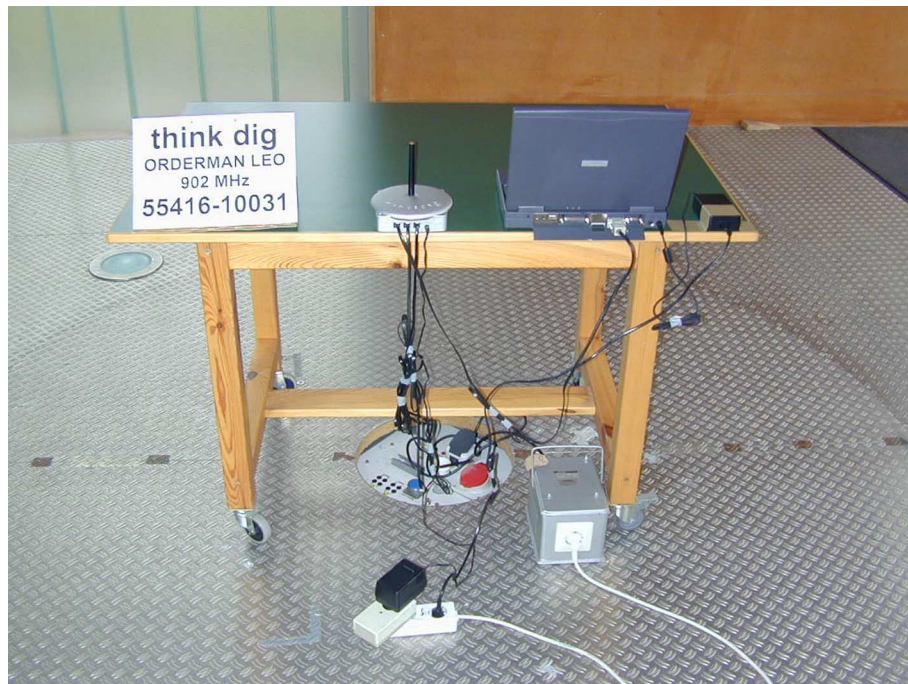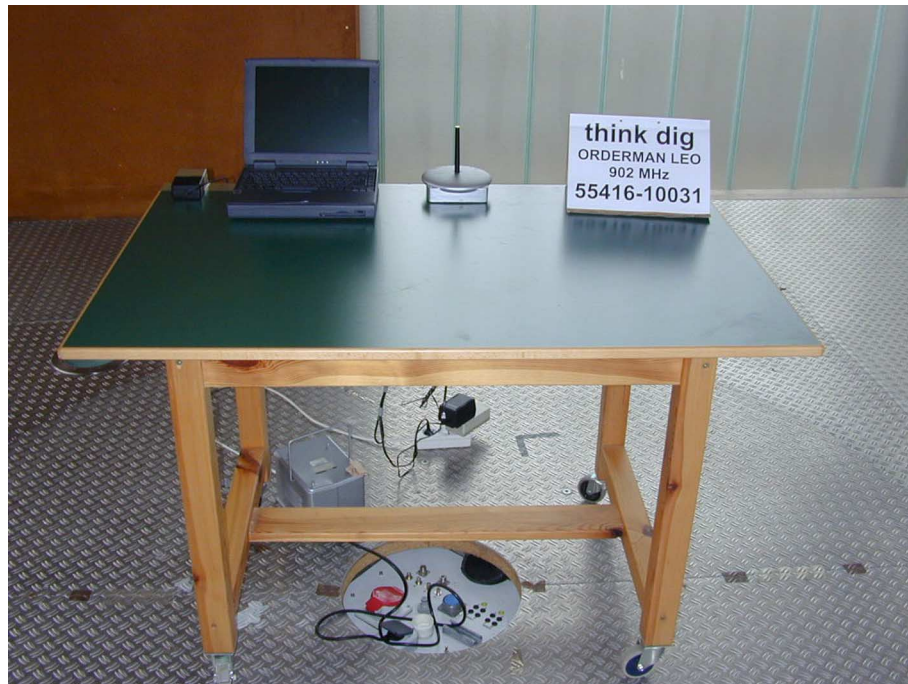

6. List of Measurements

FCC Part 15 Subpart C			
Section(s):	Test	Page	Result
	:		
15.107.a	Conducted emissions		Passed
15.109	Field strength of emissions (RX Mode)		Passed
15.249.c	Field strength of emissions (TX Mode)		Passed

List of Measurements according To Industry Canada RSS-210

Industry Canada RSS-210 Issue 2			
Section(s):	Test	Page(s)	Result
7.4	Conducted emission test 450 kHz - 30 MHz		Passed
7.3	Radiated emission test 30 MHz - 25 GHz		Passed
7.2	Antenna power conducted emissions		Passed

7. Test Results

**Conducted Emissions according to FCC Rules,
 Part 15, Subpart C, Section 15.107
 0.45 – 30 MHz**

Model:	OMB9400 US (OMB)
Type:	Base Unit
Serial No.	---
Applicant:	think dig High Tech Solutions GmbH
Test Site:	Open Field Test Site / Semianechoic Chamber
Mode	TX-RX
Date of Test:	January 30, 2001

Frequency (MHz)	Detector	Analyzer Reading (dBμV)	Correction Factor (dB)	Final Value (dBμV)	Limit dBμV	Margin dB
24.00	Q.P.	29.7	0	29.7	48.0	18.3

*** = No emissions above noise floor detected

Test equipment used (see equipment list for details):
 02, 13, 14, 16, 38, 40 ,42, 57, 64, 67

**Field Strength of Emissions according to FCC Rules,
Part 15, Subpart C, Section 15.249
Frequency Band > 30 MHz, TX Mode**

Model:	OMB9400 US (OMB)
Type:	Base Station
Serial No.	---
Applicant:	think dig High Tech Solutions GmbH
Test Site:	Open Field Test Site / Semianechoic Chamber
Distance:	3 Meter
Date of Test:	January 30, 2001

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit dBμV/m	Margin dB
101.74	Q.P.	Vertical	17.5	16.7	34.2	43.5	9.3
597.0	Peak	Horizontal	8.6	29.6	38.2	46.0	7.8
902.2	Q.P.	Vertical	57.8	33.9	91.7	94.0	2.3
903.7	Q.P.	Vertical	57.5	33.9	91.4	94.0	2.6
905.4	Q.P.	Vertical	57.8	34.0	91.8	94.0	2.2
1801.1	Peak	Vertical	14.7	21.0	35.7	54.0	18.3
2711.1	Peak	Vertical	20.8	24.3	45.1	54.0	8.9

*** = No emissions above noise floor detected

Sample calculation of field strength values:

Field Strength (dBμV/m) = Analyzer Reading (dBμV) + Correction Factor (dB)
Correction Factor includes Antenna conversion and cable loss

Test equipment used (see equipment list for details):
02, 13, 14, 16, 38, 40, 42, 57, 64, 67

**Field Strength of Emissions according to FCC Rules,
Part 15, Subpart C, Section 15.249
Frequency Band > 30 MHz, RX Mode**

Model:	OMB9400 US (OMB)
Type:	Base Station
Serial No.	---
Applicant:	think dig High Tech Solutions GmbH
Test Site:	Open Field Test Site / Semianechoic Chamber
Distance:	3 Meter
Date of Test:	January 30, 2001

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit dBμV/m	Margin dB
125.66	Q.P	Horizontal	18.3	18.4	36.7	43.5	6.8
131.88	Q.P	Horizontal	15.9	18.8	34.7	43.5	8.8
941.00	Q.P	Horizontal	4.5	34.6	39.1	46.0	6.9
1801.1	Peak	Vertical	14.8	21.0	35.8	54.0	18.2
2711.1	Peak	Vertical	20.8	24.3	45.1	54.0	8.9
5845.5	Peak	Vertical	16.3	28.4	44.7	54.0	9.3

*** = No emissions above noise floor detected

Sample calculation of field strength values:

Field Strength (dBμV/m) = Analyzer Reading (dBμV) + Correction Factor (dB)
Correction Factor includes Antenna conversion and cable loss

Test equipment used (see equipment list for details):
02, 13, 14, 16, 38, 40 ,42, 57, 64, 67

8. Equipment List

To facilitate reference to test equipment used for related tests, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory.

No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	R 3261 A	91720155	Advantest
02	Spectrum Analyzer	R 3271	05050023	Advantest
03	Test Receiver	ESH 3	880112/032	Rohde & Schwarz
04	Test Receiver	ESHS 10	860043/016	Rohde & Schwarz
05	Test Receiver	ESV	881414/009	Rohde & Schwarz
06	Test Receiver	ESVP	881120/024	Rohde & Schwarz
07	Audio Analyzer	UPA	862954	Rohde & Schwarz
08	Power Meter	NRVS	836856/015	Rohde & Schwarz
09	Power Sensor	NRV-Z52	837901/030	Rohde & Schwarz
10	Power Sensor	NRV-Z4	863828/015	Rohde & Schwarz
11	Preamplifier	ESV-Z3	860907/004	Rohde & Schwarz
12	Preamplifier	R14601		Advantest
13	Preamplifier	ACX/080-3030	32640	CTT
14	Preamplifier	ACO/180-3530	32641	CTT
15	Signal Generator	SMS	872166/039	Rohde & Schwarz
16	Signal Generator	HP 8673 D	2930A00966	Hewlett Packard
17	Waveform Generator	HP 33120 A	US34005375	Hewlett Packard
18	UHF Attenuator Set	DPU	300771/075	Rohde & Schwarz
19	UHF Attenuator Set	DPU	300788/006	Rohde & Schwarz
20	Pulse Limiter	ESH 3-Z2	1144	Rohde & Schwarz
21	Pulse Limiter	11947 A	3107A00566	Hewlett Packard
22	V-Network	ESH 3-Z5	862770/018	Rohde & Schwarz
23	V-Network	ESH 3-Z5	894785/005	Rohde & Schwarz
24	V-Network	ESH 3-Z5	830952/025	Rohde & Schwarz
25	V-Network	ESH 3-Z6	830722/010	Rohde & Schwarz
26	V-Network	NSLK 8127	8127152	Schwarzbeck
27	V-Network	NNLA 8119	8119148	Schwarzbeck
28	V-Network	SE 01	01	Senton
29	T-Network	ESH 3-Z4	890602/011	Rohde & Schwarz
30	T-Network	ESH 3-Z4	890602/012	Rohde & Schwarz
31	High Impedance Probe	TK 9416	01	Schwarzbeck
32	High Impedance Probe	TK 9416	02	Schwarzbeck
33	Current Probe	ESH 2-Z1	863366/18	Rohde & Schwarz
34	Current Probe	ESV-Z1	862553/3	Rohde & Schwarz

No.	Type	Model	Serial Number	Manufacturer
35	Absorbing Clamp	MDS 21	80911	Lüthi
36	Absorbing Clamp	MDS 21	79690	Lüthi
37	Loop Antenna	HFH2-Z2	882964/1	Rohde & Schwarz
38	Biconical Antenna	HK 116	836239/02	Rohde & Schwarz
39	Biconical Antenna	BBA 9106	A0379 324	Schwarzbeck
40	Log. Periodic Antenna	HL 223	834408/12	Rohde & Schwarz
41	Log. Periodic Antenna	UHALP 9107	9107150	Schwarzbeck
42	Horn Antenna	3115	9508-4553	Emco
43	Horn Antenna	3160-03	9112-1003	Emco
44	Horn Antenna	3160-04	9112-1001	Emco
45	Horn Antenna	3160-05	9112-1001	Emco
46	Horn Antenna	3160-06	9112-1001	Emco
47	Horn Antenna	3160-07	9112-1008	Emco
48	Horn Antenna	3160-08	9112-1002	Emco
49	Horn Antenna	3160-09	9403-1025	Emco
50	Digital multimeter	199	463386	Keithley
51	DC Power Supply	NGSM 32/10	203	Rohde & Schwarz
52	DC Power Supply	NGB	2455	Rohde & Schwarz
53	DC Power Supply	NGA	386	Rohde & Schwarz
54	Temperature Test Chamber	HT4010	07065550	Heraeus
55	Cable	RG214	1309	Senton
56	Cable	150CM_001	1479	Rosenberger
57	Cable	150CM_002	1480	Rosenberger
58	Cable Set EG1	RG214	1189 - 1191	Senton
59	Cable Set Cabine 1	RG214		Senton
60	Cable Set Cabine 2	RG214		Senton
61	Cable Set Cabine 3	RG214		Senton
62	Shielded Room	Nr. 1	1451	Senton
63	Shielded Room	Nr. 2	1452	Senton
64	Semi-anechoic Chamber	Nr. 3	1453	Siemens
65	Shielded Room	Nr. 4	1454	Euroshield
66	Open Area Test Site	EG 1		Senton
67	High pass filter			AT & T

9. Charts taken during Testing

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB

Serial no.:
Modified Sample

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
**Test distance 3 meters
Horizontal Polarization**

Date of test: 02/04/2001 Operator: J. Roidt

Test performed: automatically File name:


Mode:
TX on Channel 05 (lowest)

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HK 116

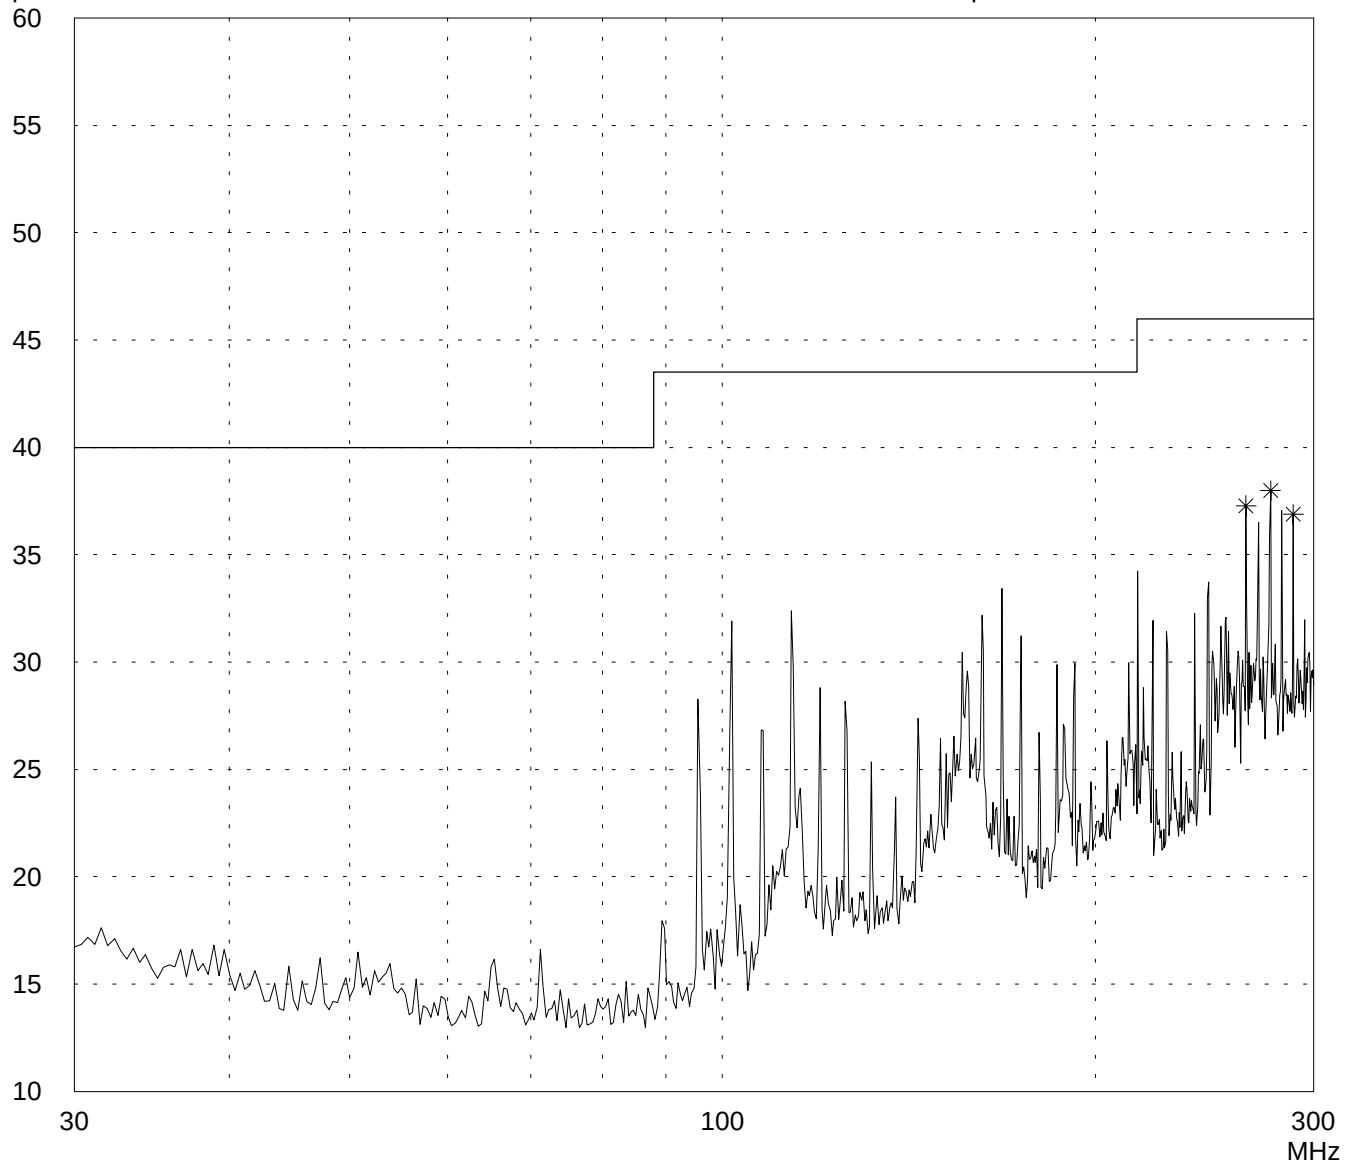

Result:
Prescan

Project file:
55416-10031-1

Page 24 of 55 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB

Serial no.:
Modified Sample

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
**Test distance 3 meters
Vertical Polarization**

Date of test: 02/04/2001 Operator:
J. Roidt

Test performed: by hand File name:


Mode:
TX on Channel 05 (lowest)

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HK 116

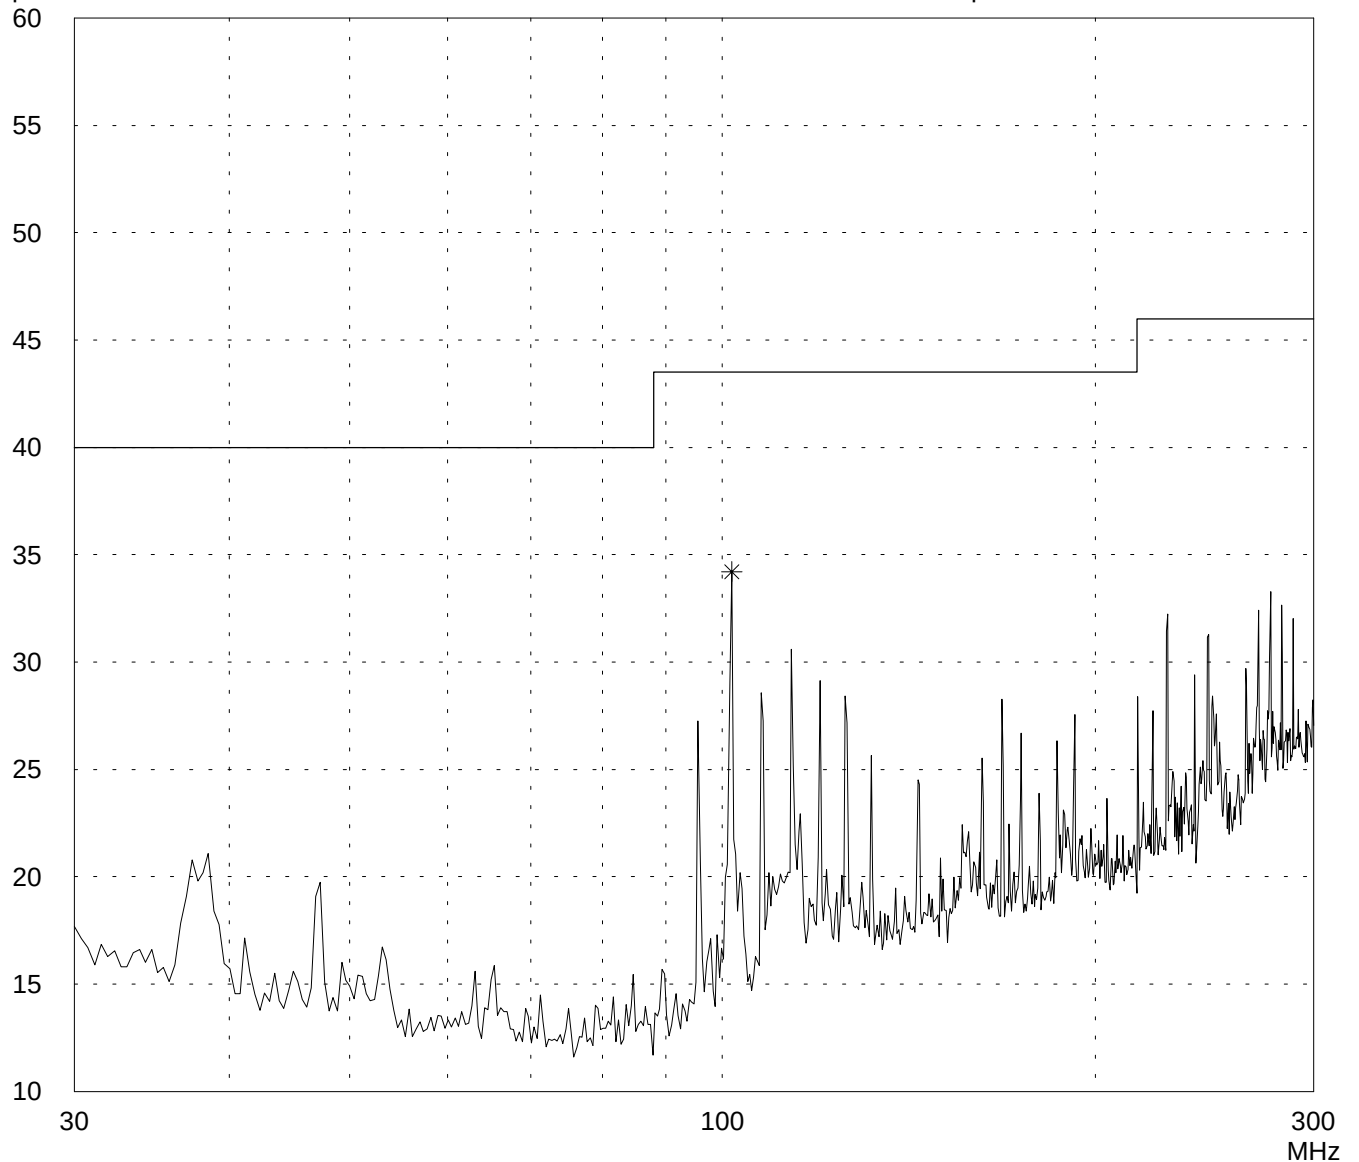

Result:
Prescan

Project file:
55416-10031-1

Page 25 of 55 Pages

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB

Serial no.:
Modified Sample

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
**Test distance 3 meters
Horizontal Polarization**


Date of test: Operator:
02/04/2001 J. Roidt

Test performed: File name:
automatically

Mode:
TX on Channel 05 (lowest)

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

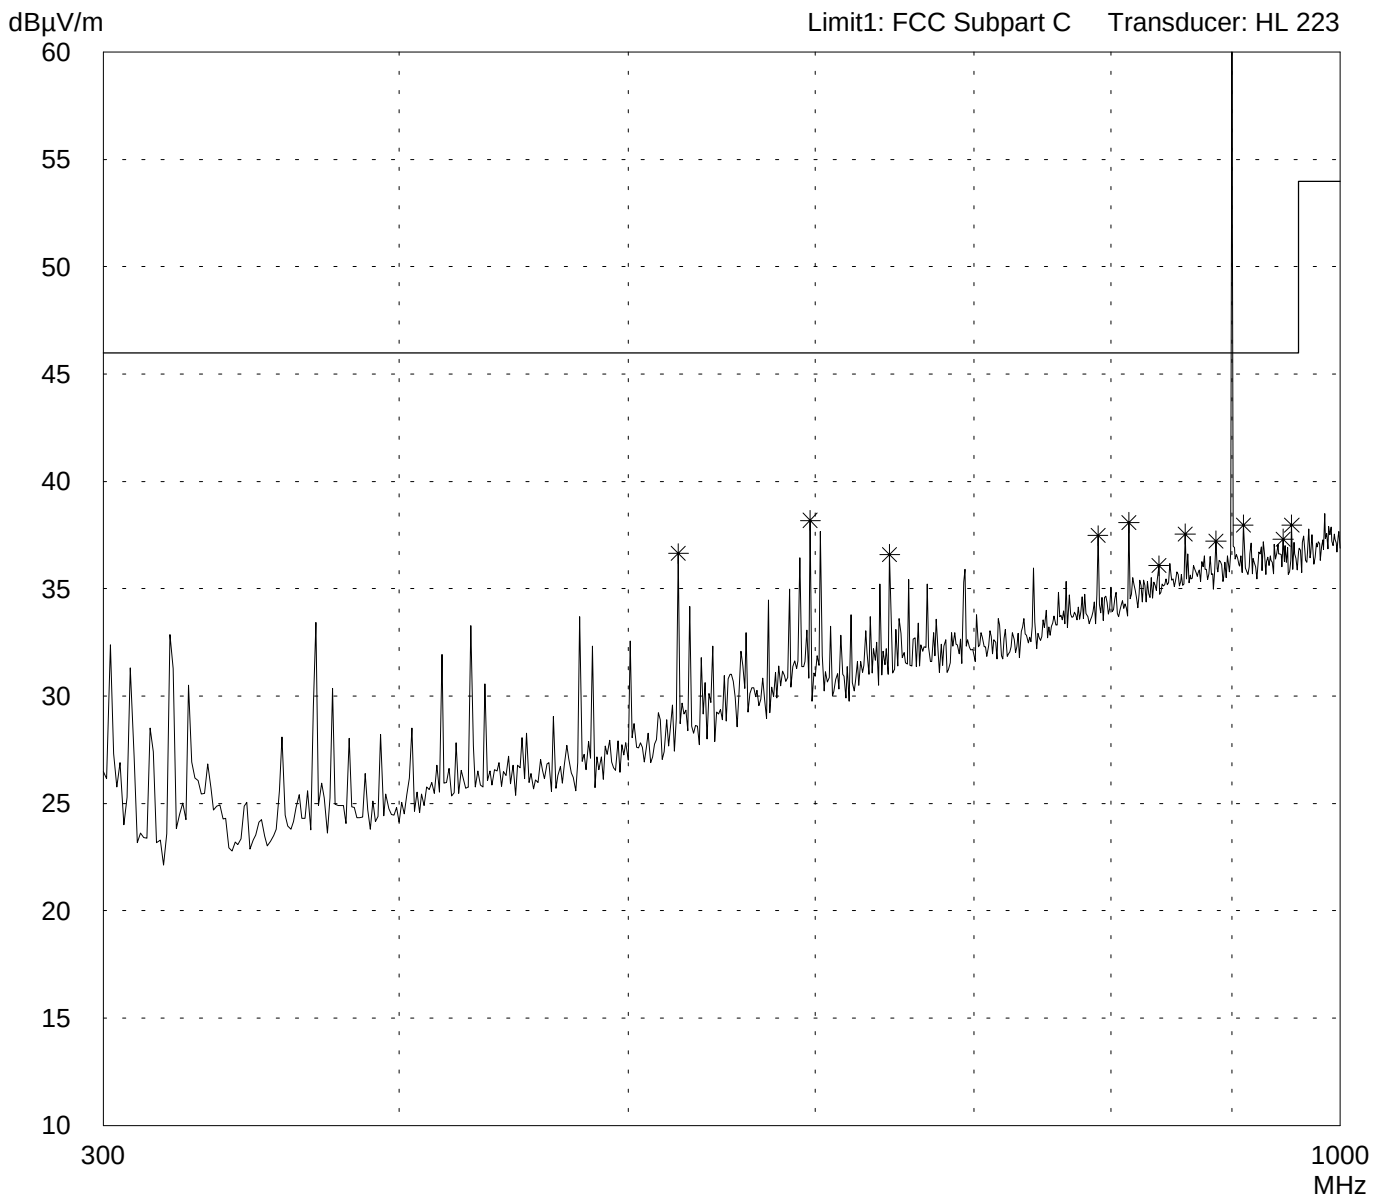

Result:
Prescan

Project file:
55416-10031-1

Page 26 of 55 Pages

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB

Serial no.:
Modified Sample

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
**Test distance 3 meters
Vertical Polarization**

Date of test: Operator:
02/04/2001 J. Roidt

Test performed: File name:
automatically


Mode:
TX on Channel 05 (lowest)

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HL 223

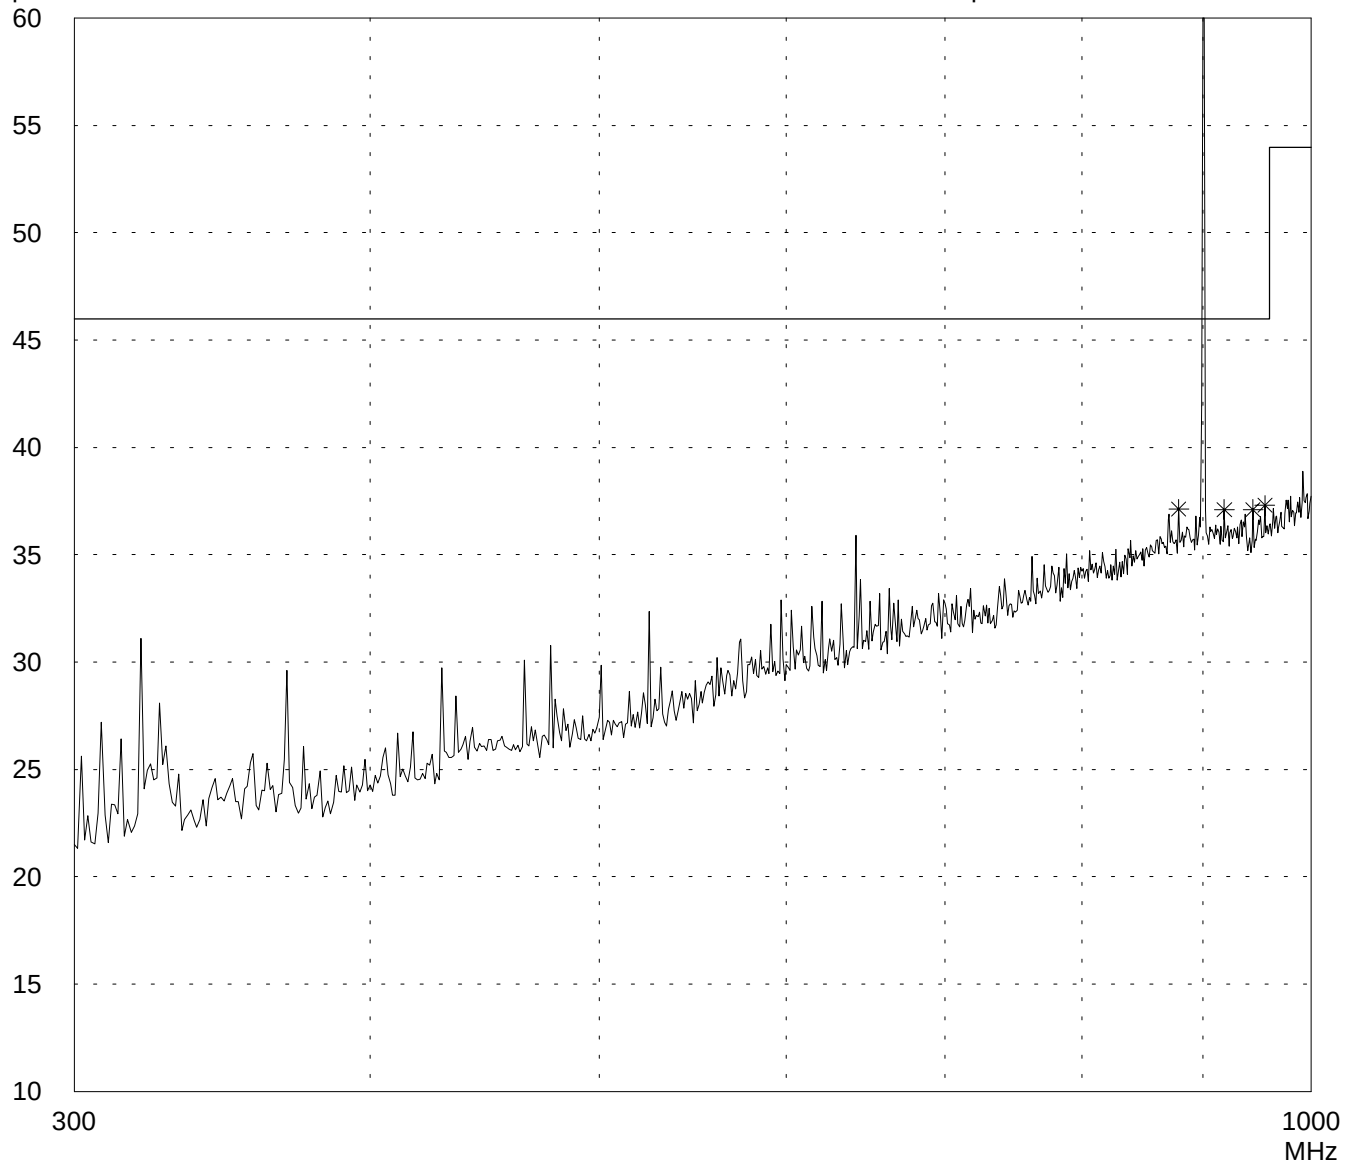

Result:
Prescan

Project file:
55416-10031-1

Page 27 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Horizontal Polarisation

Transmit at channel 05

Ref.Level 45.1 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

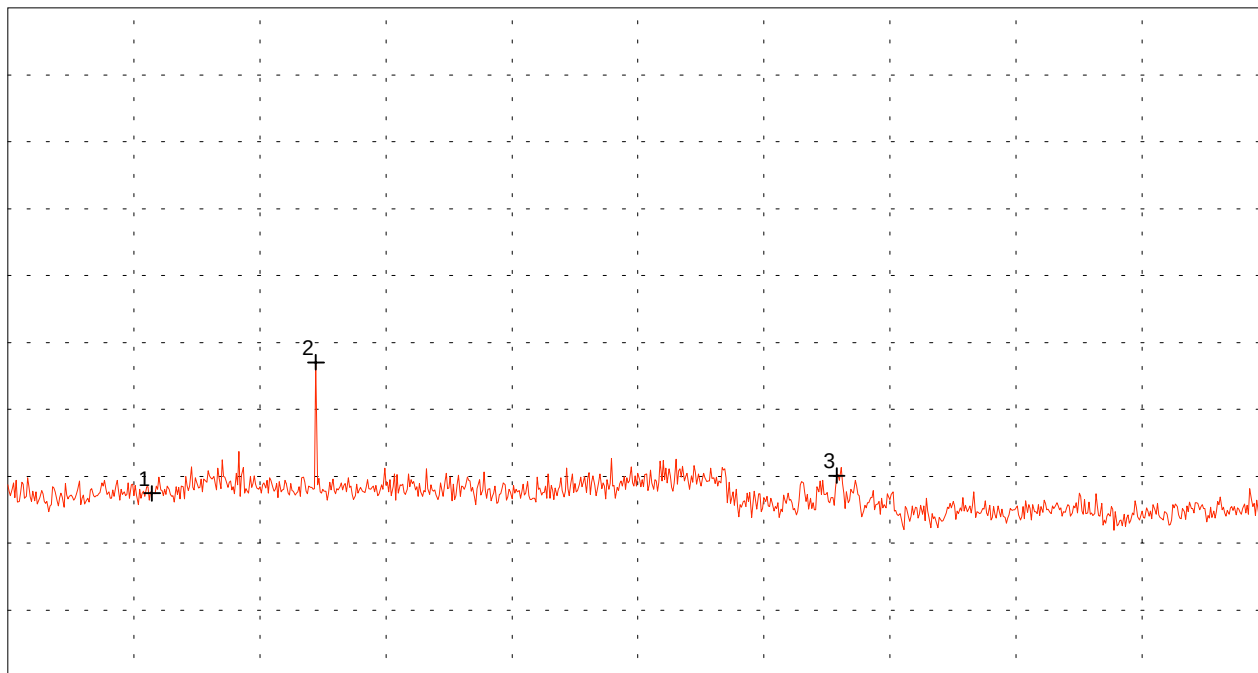

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz
SWP 40 ms

Multi Marker List

No. 1	1.801111 GHz	8.83 dB μ V
No. 2	2.711111 GHz	18.62 dB μ V
No. 3	5.604444 GHz	10.15 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 28 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Vertical Polarisation

Transmit at channel 05

Ref.Level 45.1 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

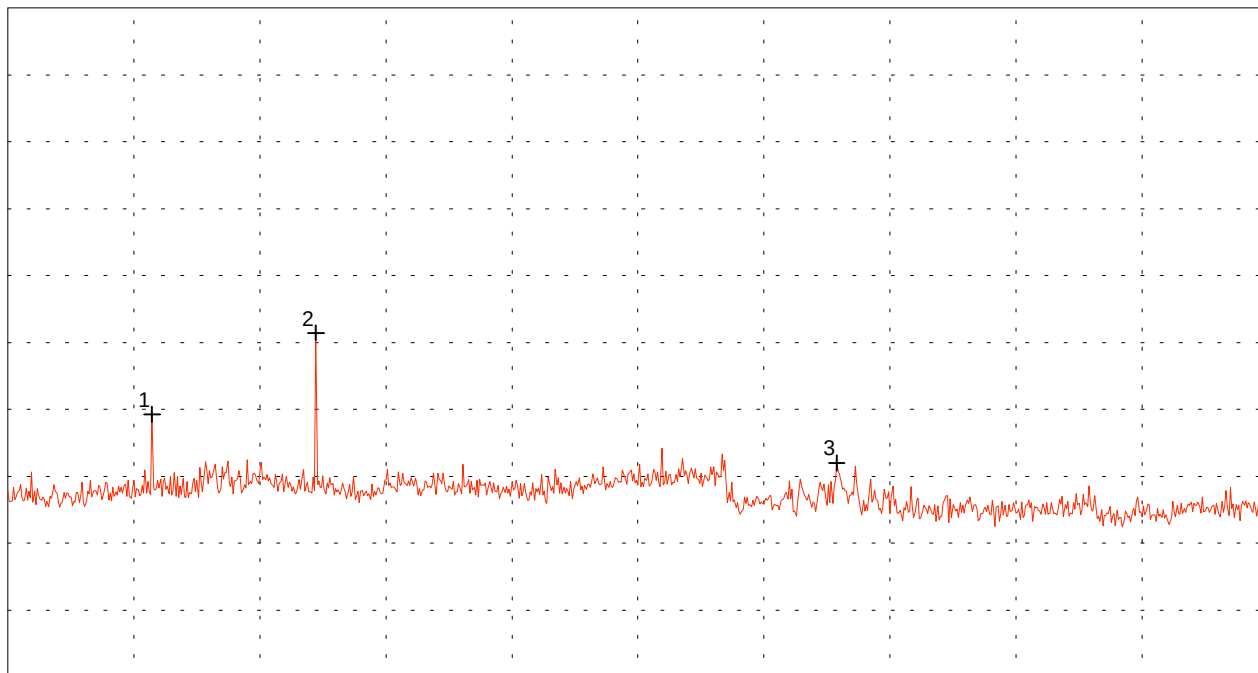

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz
SWP 40 ms

Multi Marker List

No. 1	1.801111 GHz	14.72 dB μ V
No. 2	2.711111 GHz	20.82 dB μ V
No. 3	5.604444 GHz	11.08 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 29 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Horizontal Polarisation

Transmit at channel 05

Ref.Level 40.6 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

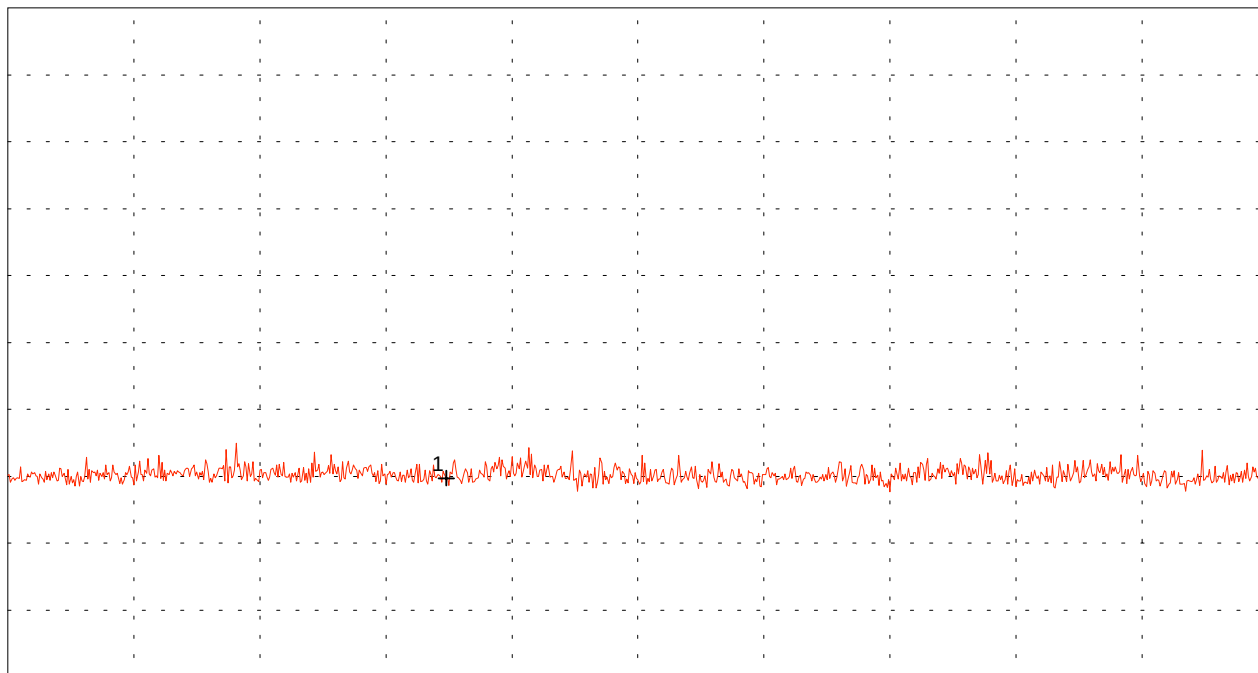

Start 8.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz
SWP 20 ms

Multi Marker List

No.	Frequency (GHz)	Power (dB μ V)
No. 1	8.695556 GHz	5.46 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 30 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Vertical Polarisation

Transmit at channel 05

Ref.Level 40.6 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

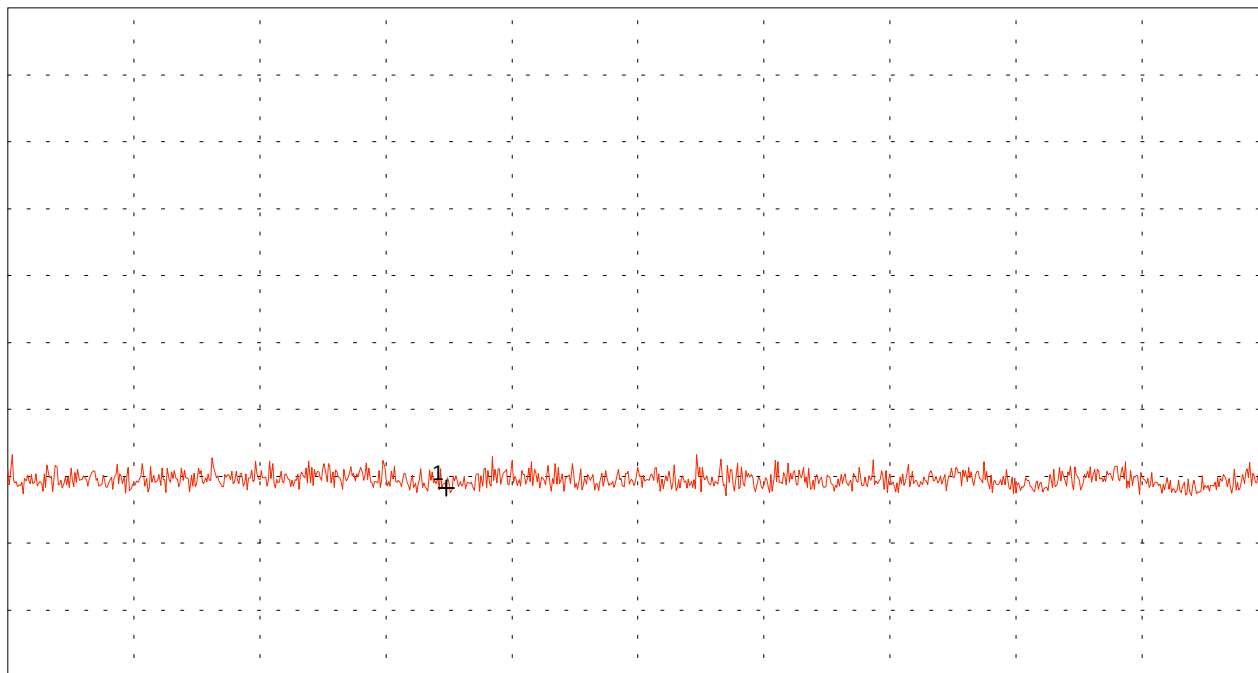

Start 8.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz
SWP 20 ms

Multi Marker List

No.	Frequency (GHz)	Power (dB μ V)
No. 1	8.695556 GHz	4.72 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 31 of 55 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB

Serial no.:
Modified Sample

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
**Test distance 3 meters
Horizontal Polarization**

Date of test: Operator:
02/04/2001 J. Roidt

Test performed: File name:
automatically


Mode:
TX on Channel 70 (highest)

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HK 116

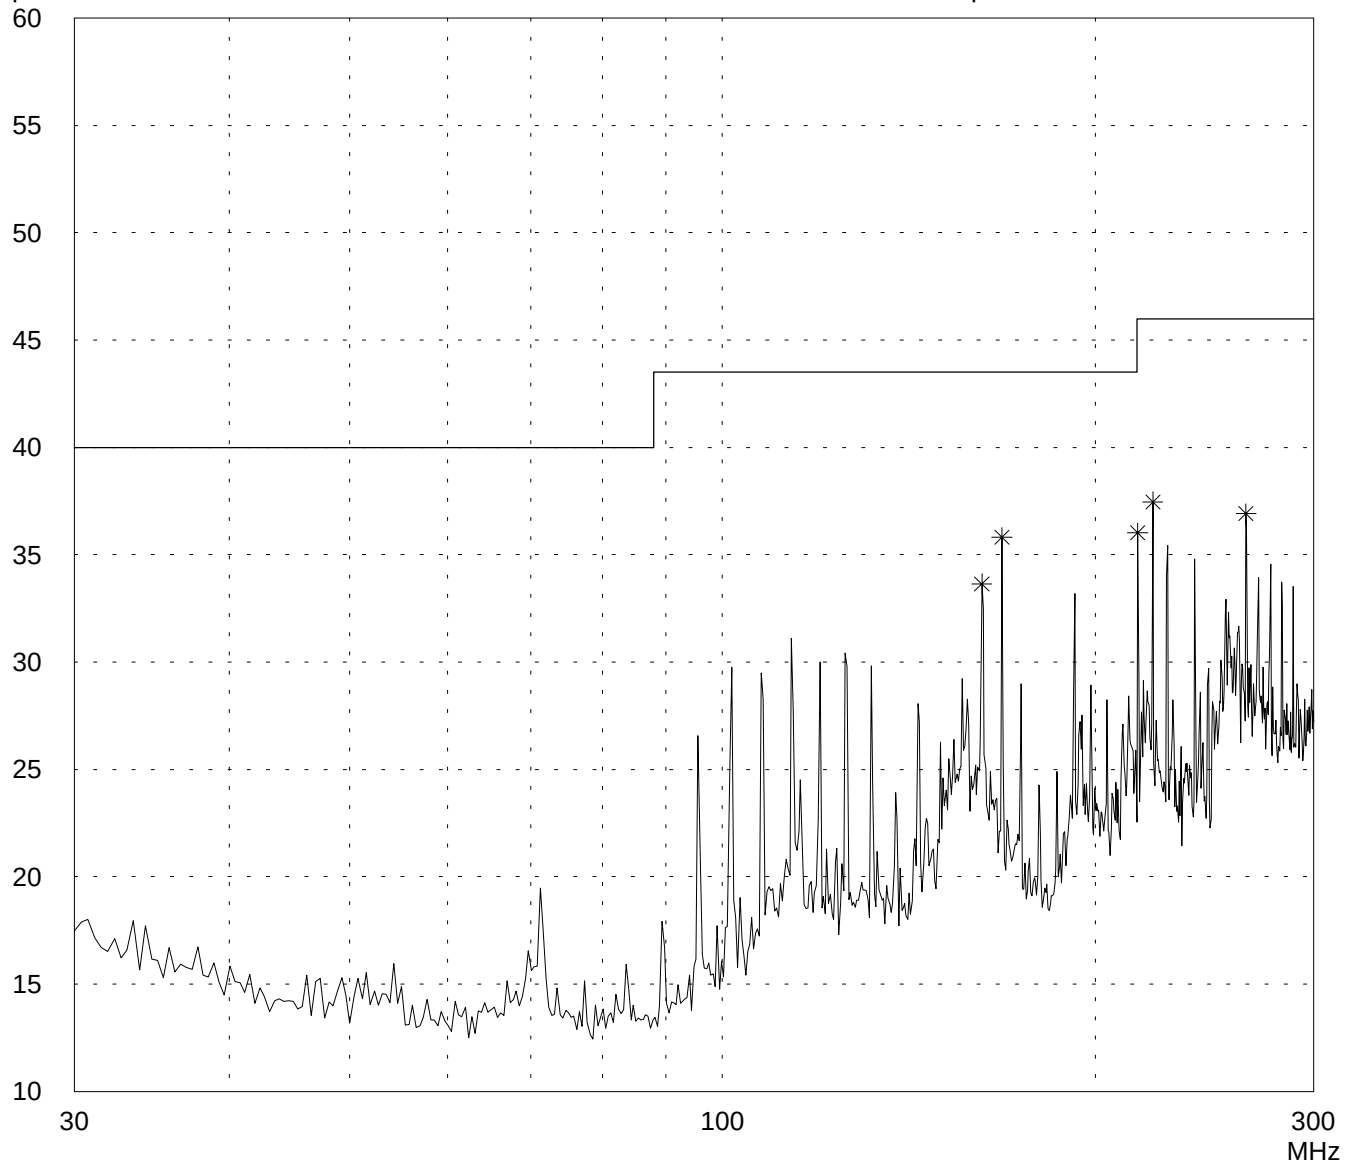

Result:
Prescan

Project file:
55416-10031-1

Page 32 of 55 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB

Serial no.:
Modified Sample

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
**Test distance 3 meters
Vertical Polarization**

Date of test: 02/04/2001 Operator:
J. Roidt

Test performed: automatically File name:


Mode:
TX on Channel 70 (highest)

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HK 116

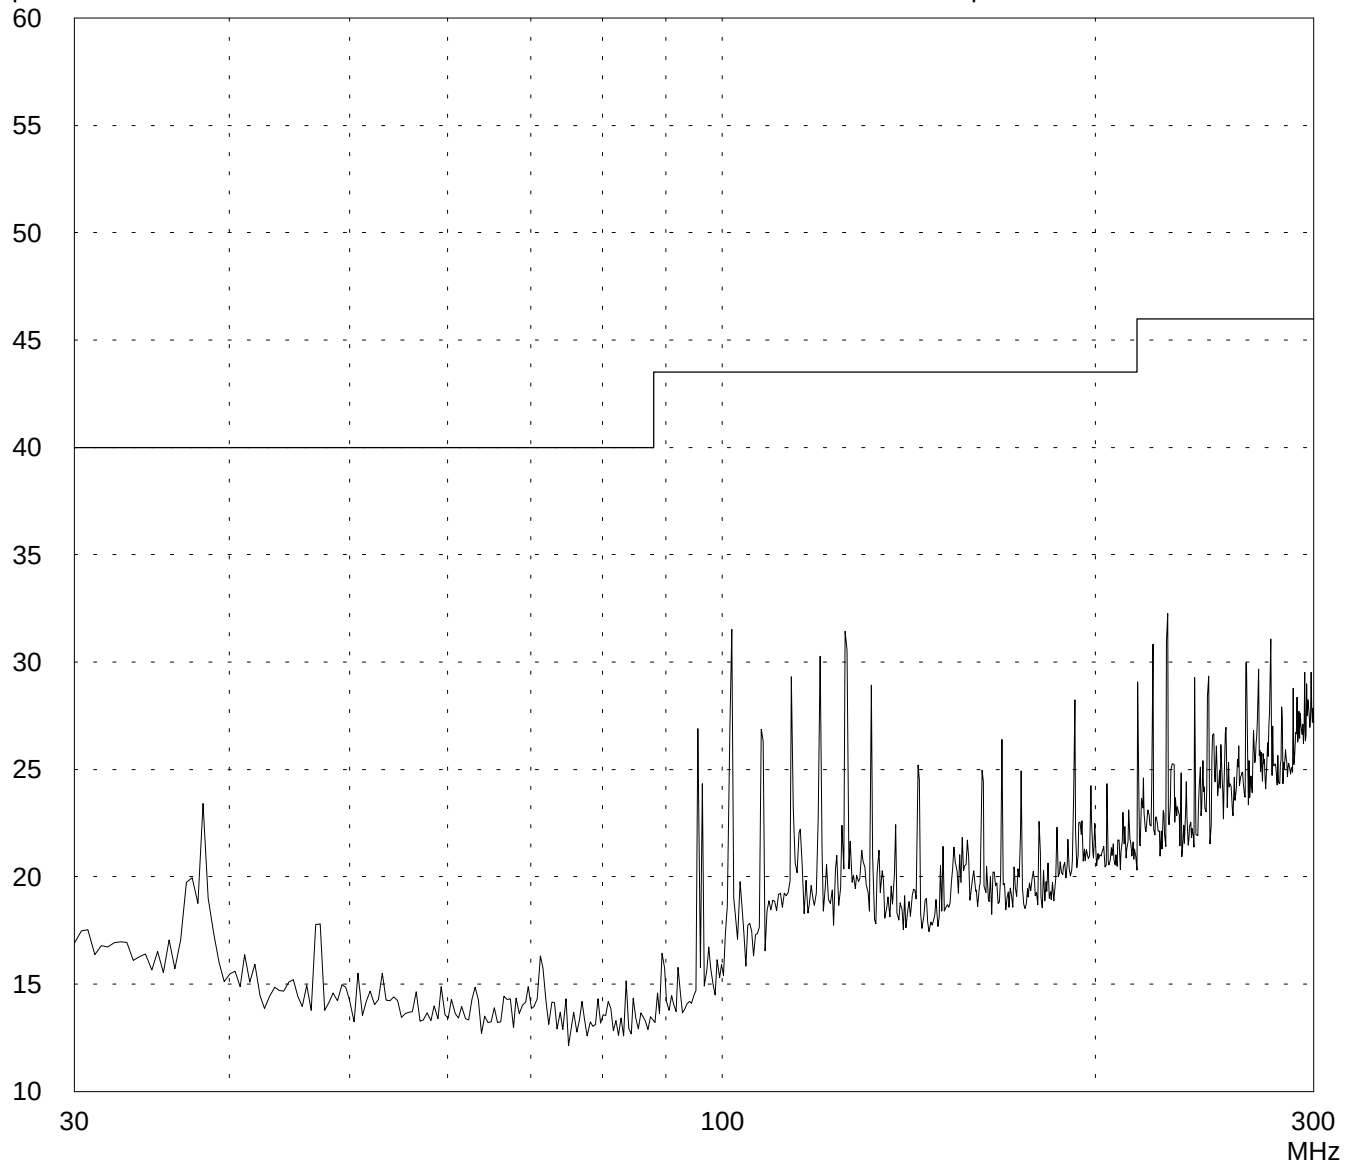

Result:
Prescan

Project file:
55416-10031-1

Page 33 of 55 Pages

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB

Serial no.:
Modified Sample

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
**Test distance 3 meters
Horizontal Polarization**

Date of test: 02/04/2001 Operator:
J. Roidt

Test performed: automatically File name:


Mode:
TX on Channel 70 (highest)

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HL 223

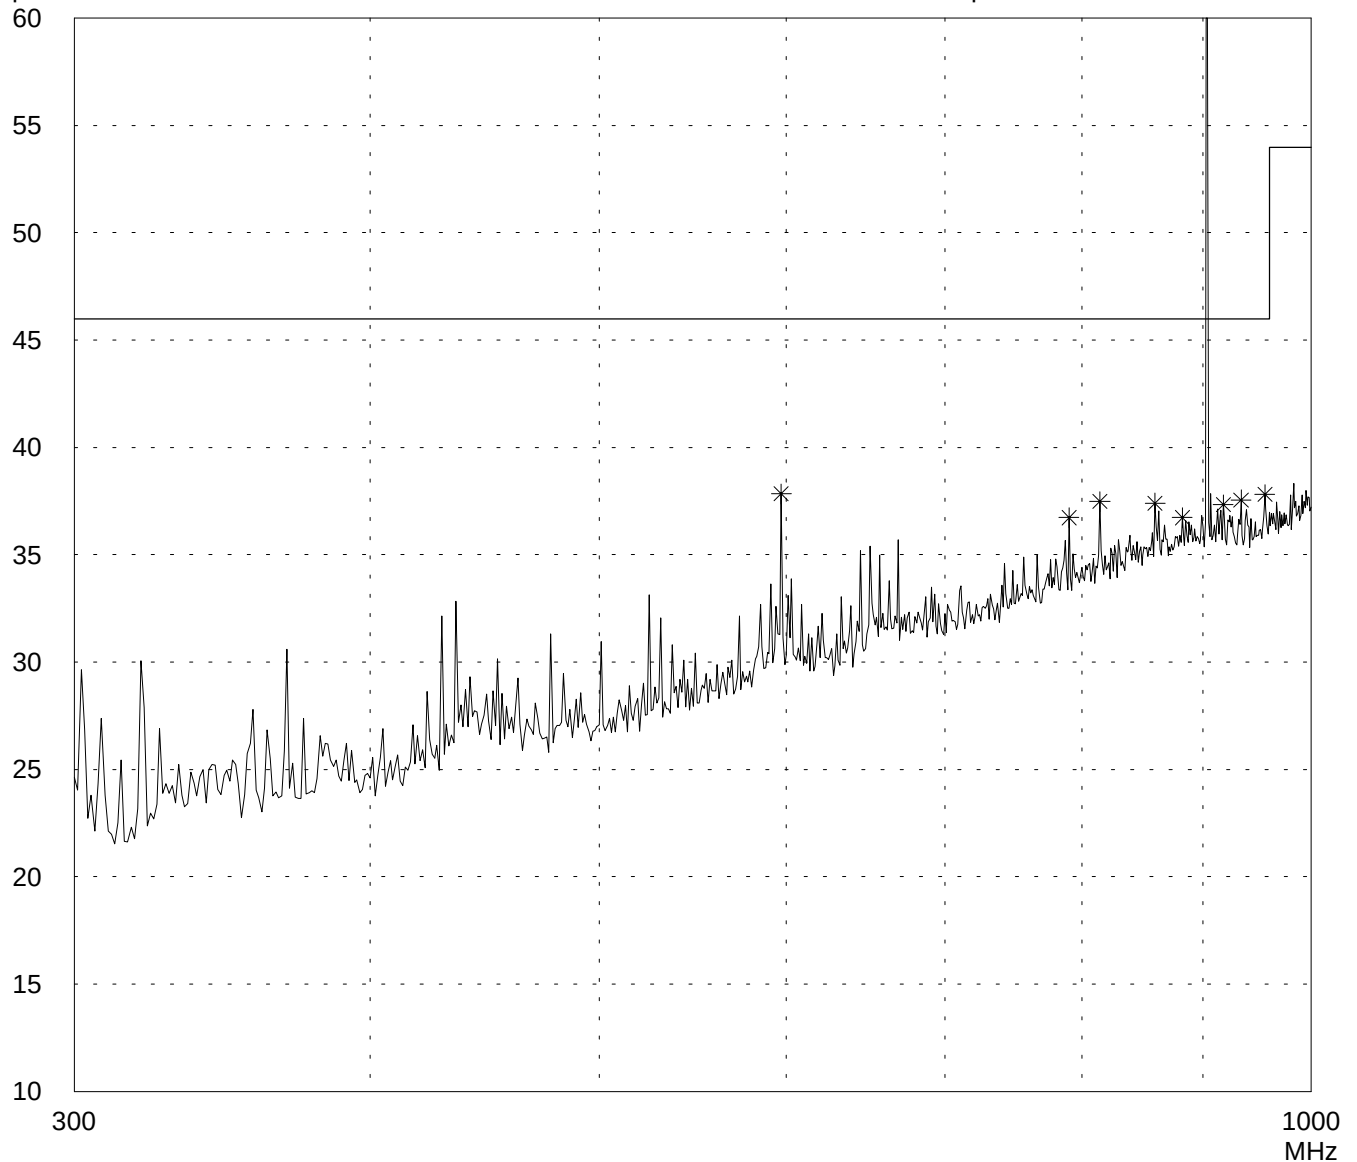

Result:
Prescan

Project file:
55416-10031-1

Page 34 of 55 Pages

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB

Serial no.:
Modified Sample

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization


Date of test: 02/04/2001 Operator: J. Roidt

Test performed: automatically File name:

Mode:
TX on Channel 70 (highest)

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

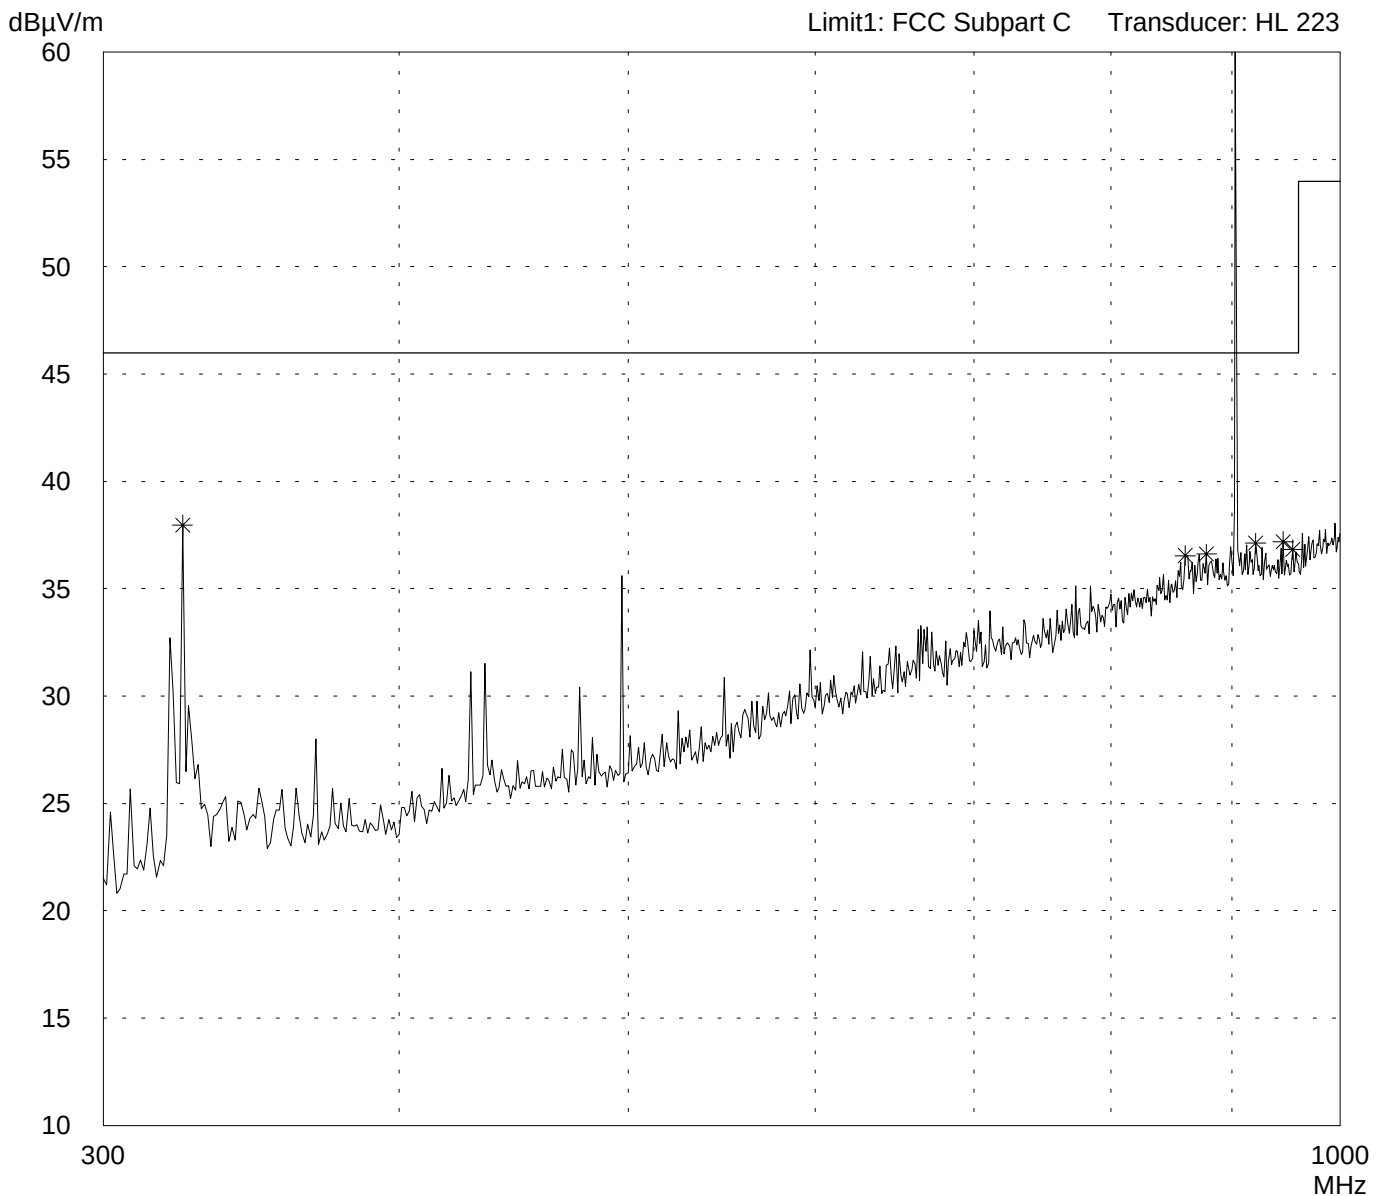

Result:
Prescan

Project file:
55416-10031-1

Page 35 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Horizontal Polarisation

Transmit at channel 70

Ref.Level 45.1 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

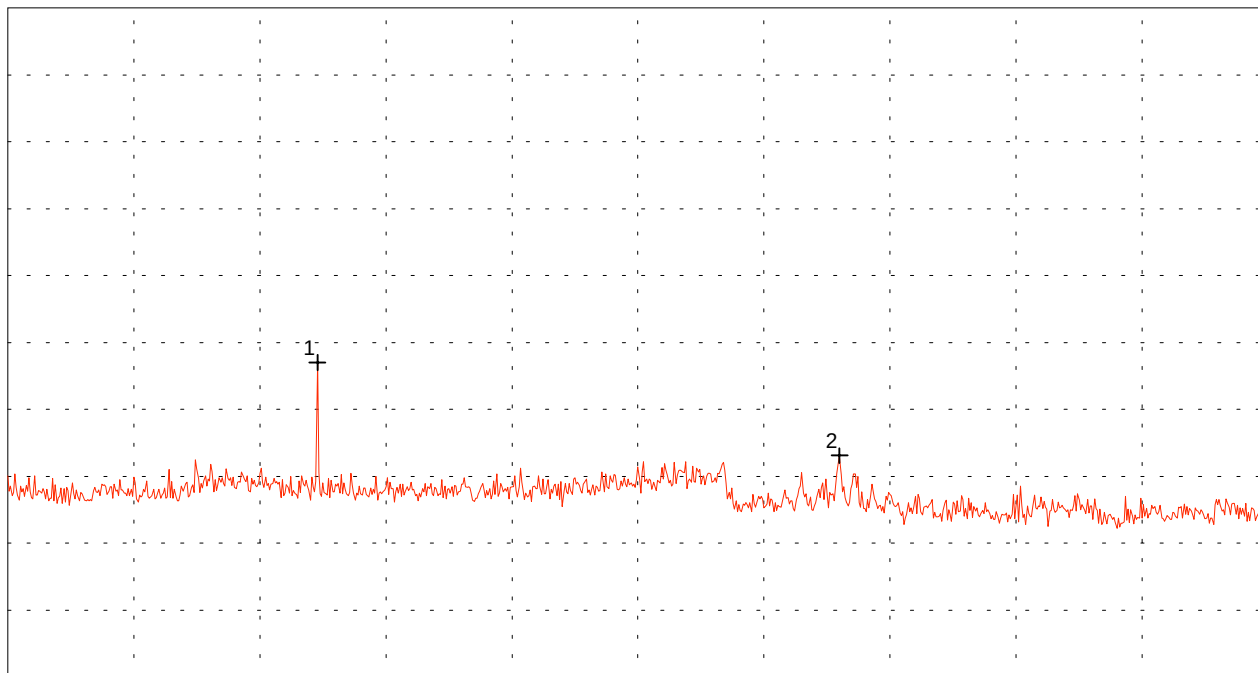

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz
SWP 40 ms

Multi Marker List

No. 1	2.718889 GHz	18.61 dB μ V
No. 2	5.620000 GHz	11.64 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 36 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Vertical Polarisation

Transmit at channel 70

Ref.Level 40.6 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

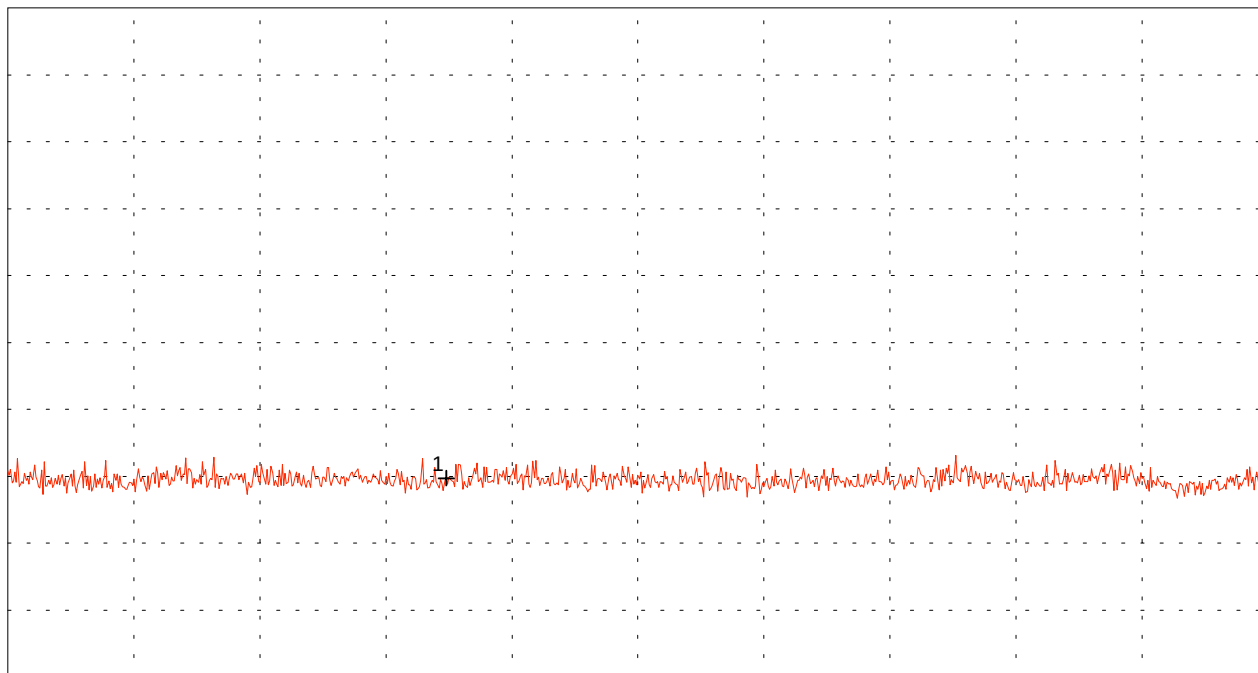

Start 8.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz
SWP 20 ms

Multi Marker List

No.	Frequency (GHz)	Power (dB μ V)
No. 1	8.695556 GHz	5.45 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 37 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Horizontal Polarisation

Transmit at channel 70

Ref.Level 40.6 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

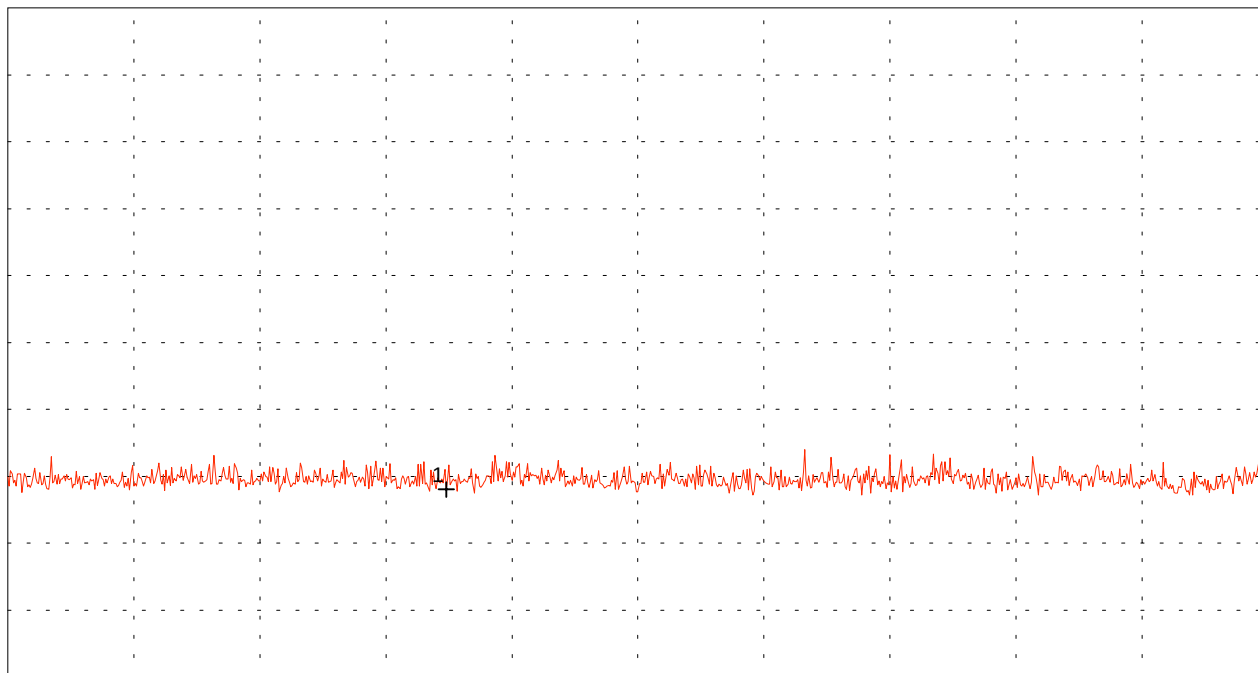

Start 8.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz
SWP 20 ms

Multi Marker List

No.	Frequency	Amplitude
1	8.695556 GHz	4.61 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 38 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Vertical Polarisation

Transmit at channel 70

Ref.Level 40.6 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -35 dB

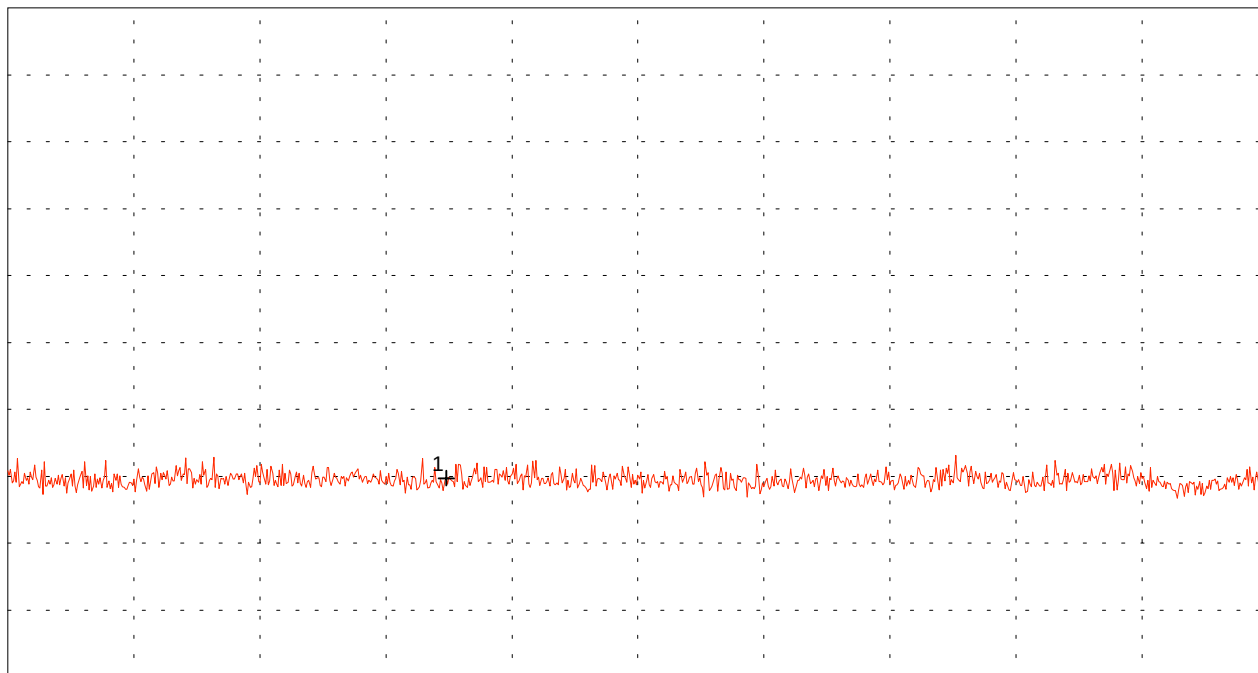

Start 8.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz
SWP 20 ms

Multi Marker List

No.	Frequency (GHz)	Power (dB μ V)
No. 1	8.695556 GHz	5.45 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 39 of 55 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB-0401

Serial no.:
R 52456 SB (modified)

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization


Date of test: 01/31/2001 Operator: J. Roidt

Test performed: automatically File name:

Mode:
RX Mode on channel 5

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

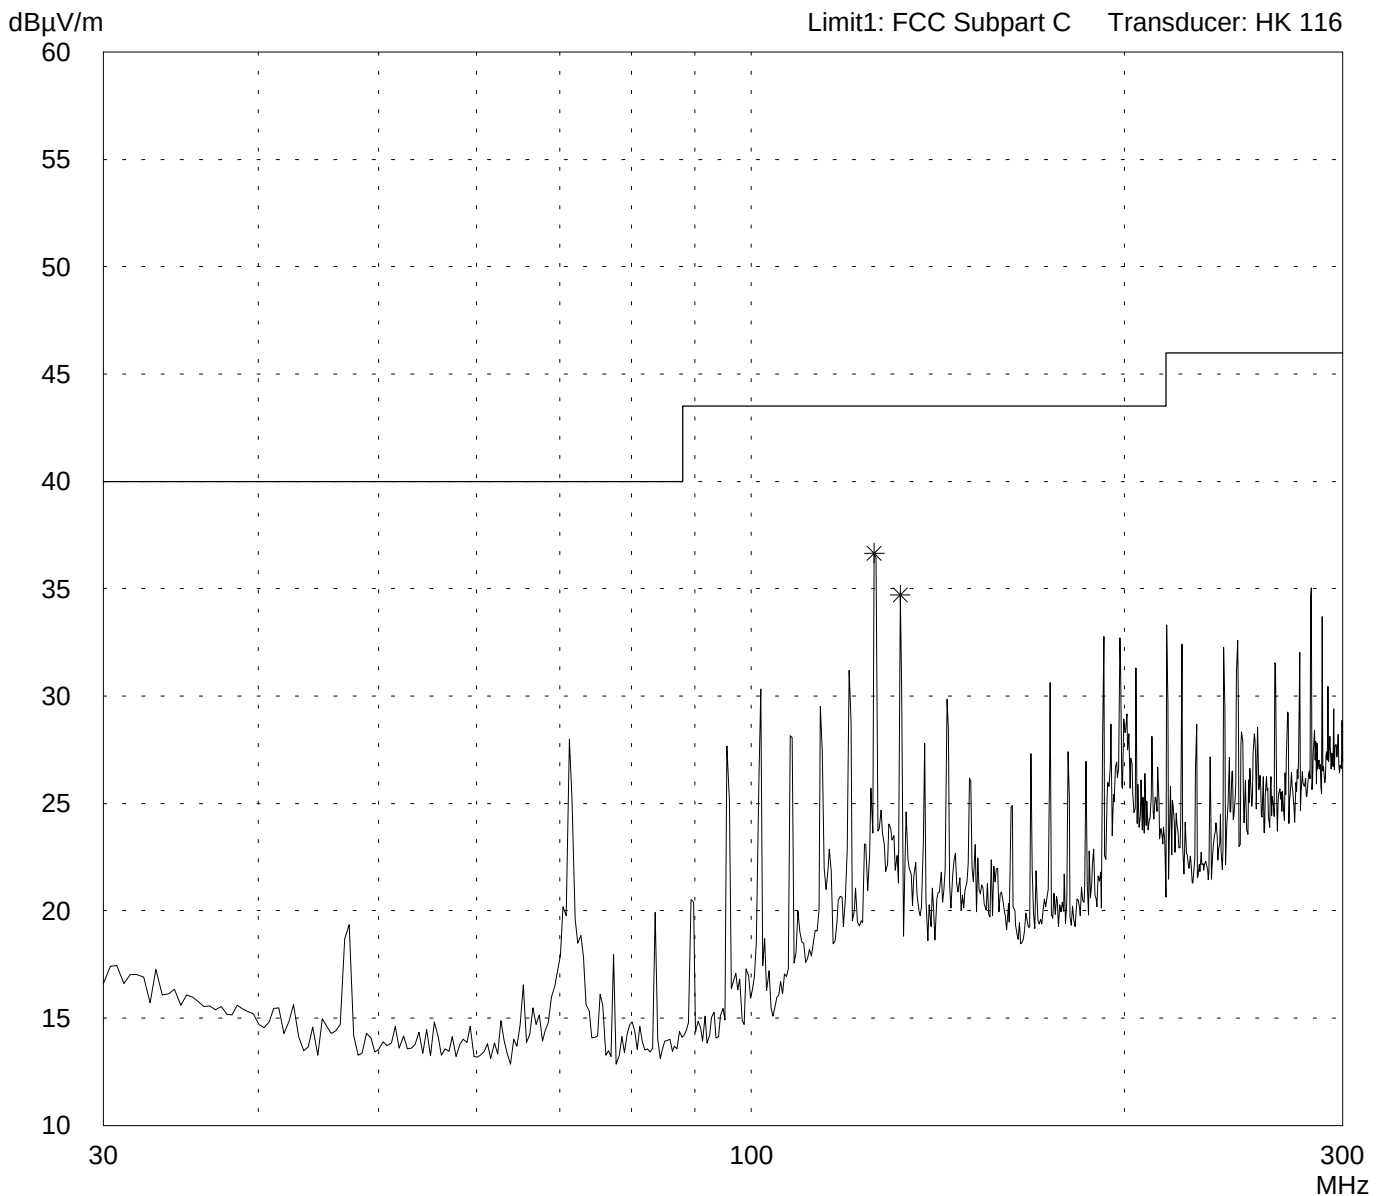

Result:
Prescan

Project file:
55416-10031-1

Page 40 of 55 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB-0401

Serial no.:
R 52456 SB (modified)

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization


Date of test: 01/31/2001 Operator: J. Roidt

Test performed: automatically File name:

Mode:
RX Mode on channel 5

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

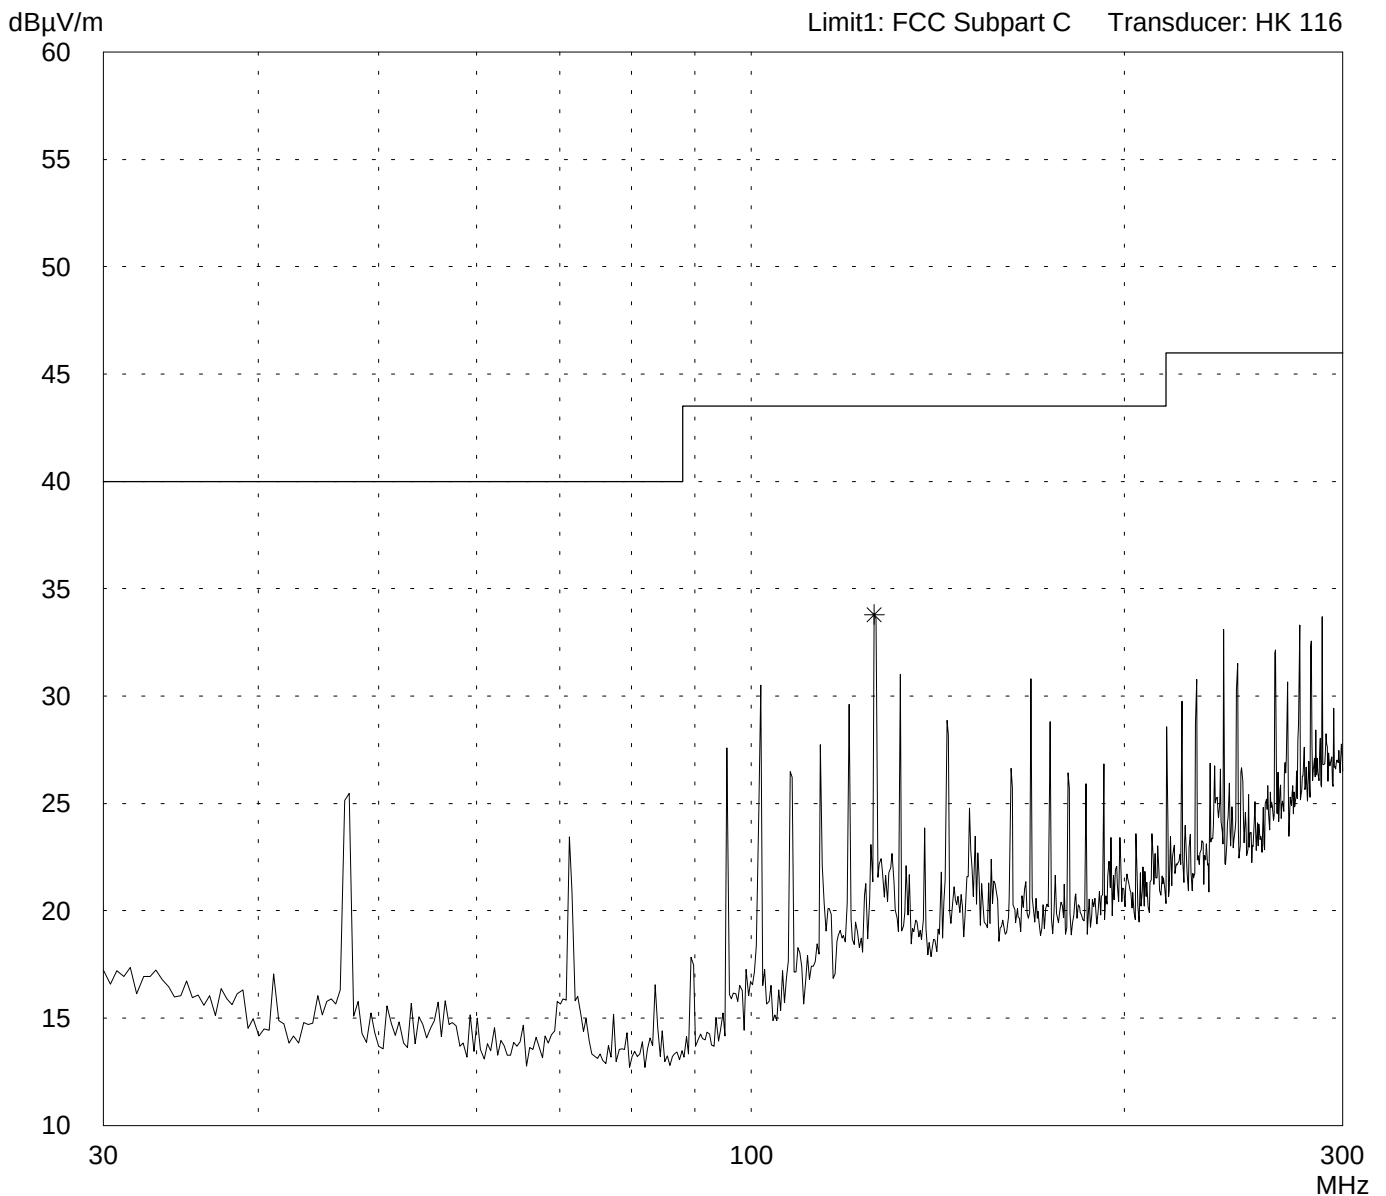

Result:
Prescan

Project file:
55416-10031-1

Page 41 of 55 Pages

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB-0401

Serial no.:
R 52456 SB (modified)

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: 01/31/2001 Operator: J. Roidt

Test performed: automatically File name:


Mode:
RX Mode on channel 5

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HL 223

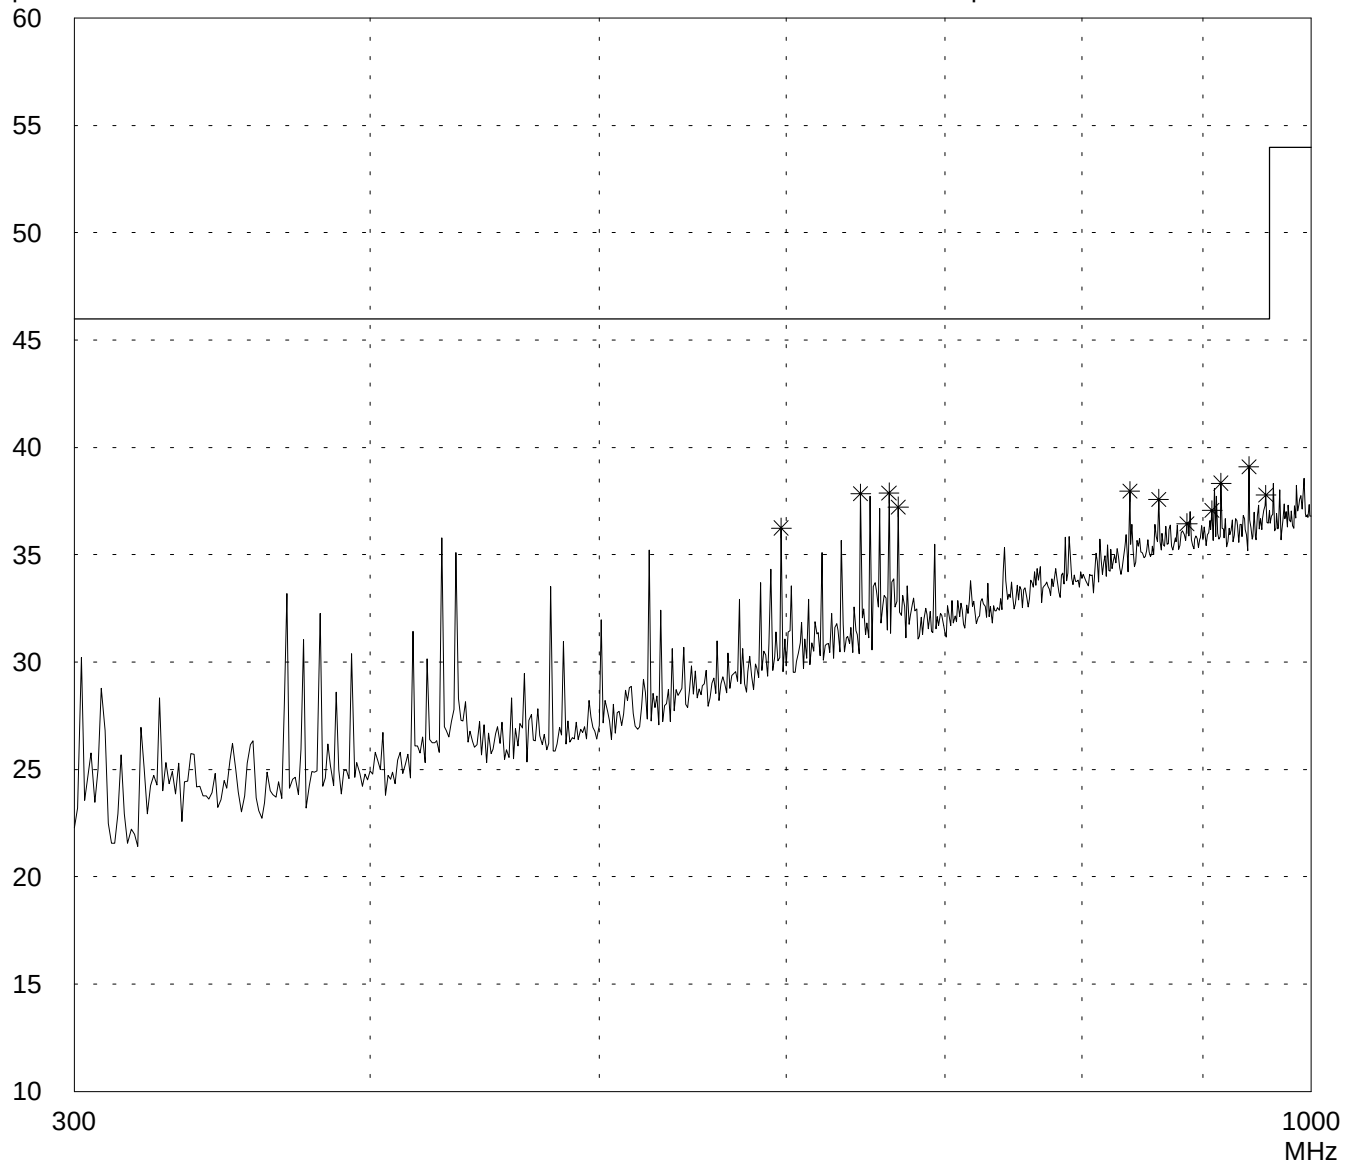

Result:
Prescan

Project file:
55416-10031-1

Page 42 of 55 Pages

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB-0401

Serial no.:
R 52456 SB (modified)

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization

Date of test: 01/31/2001 Operator: J. Roidt

Test performed: automatically File name:


Mode:
RX Mode on channel 5

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HL 223

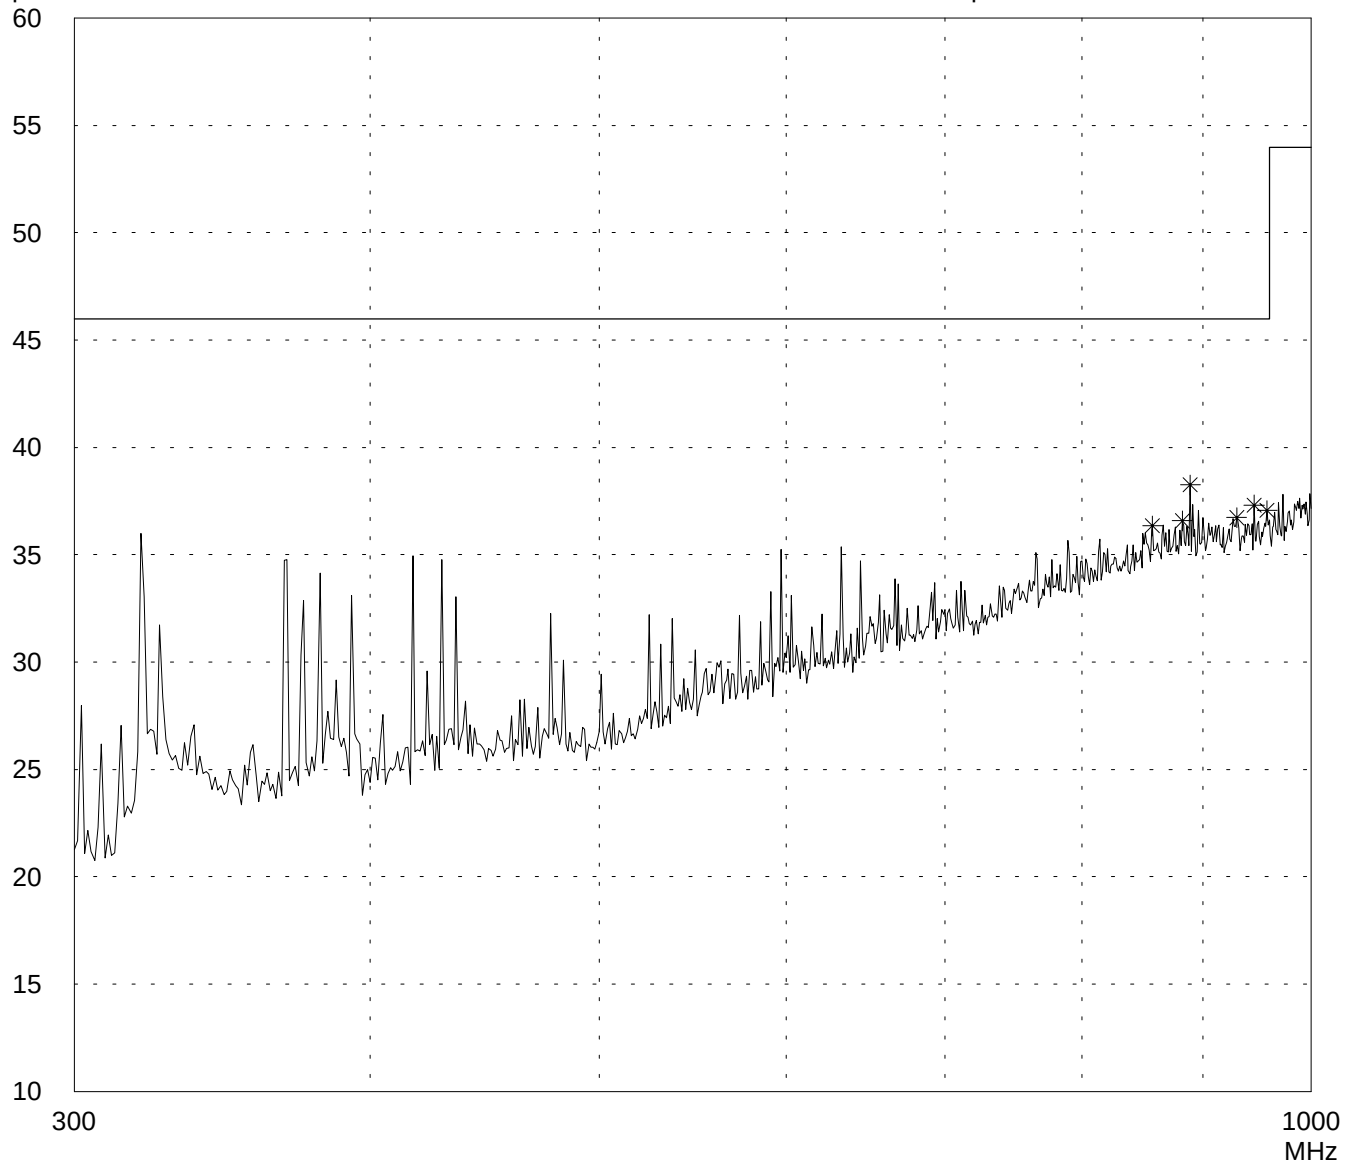

Result:
Prescan

Project file:
55416-10031-1

Page 43 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Horizontal Polarisation

Receive at channel 05

Ref.Level 45.1 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

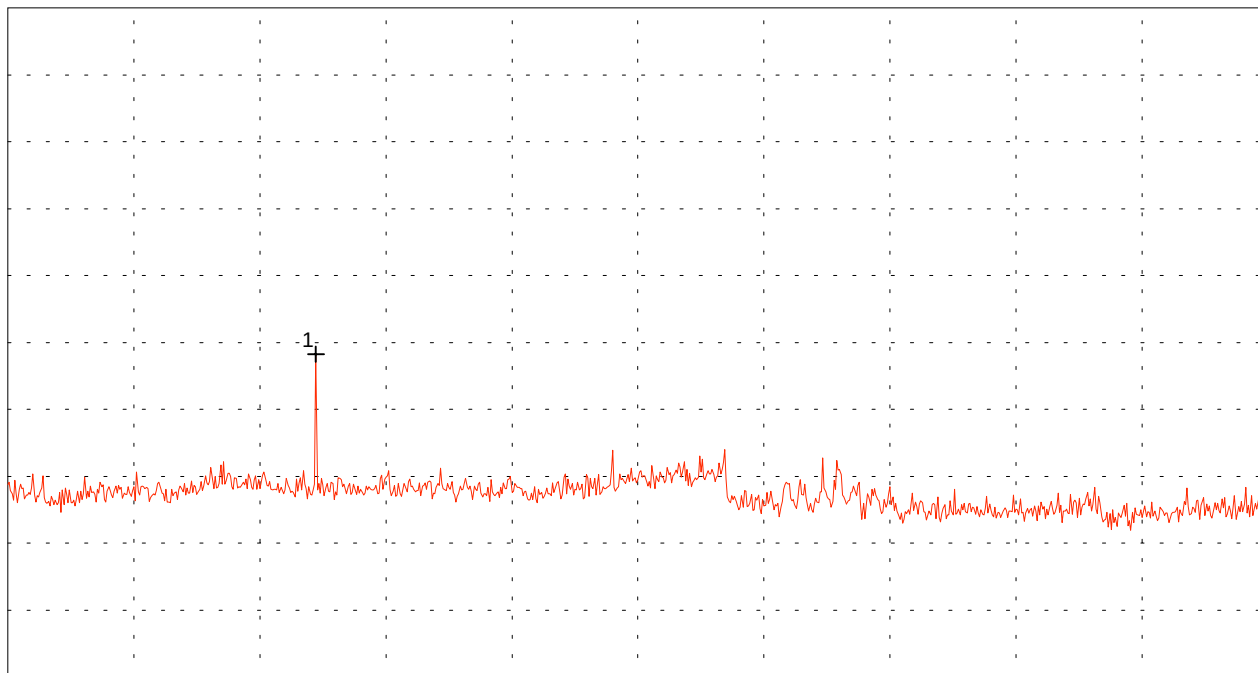

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz
SWP 40 ms

Multi Marker List

No.	Frequency (GHz)	Power (dB μ V)
No. 1	2.711111 GHz	19.22 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 44 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Vertical Polarisation

Receive at channel 05

Ref.Level 45.1 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

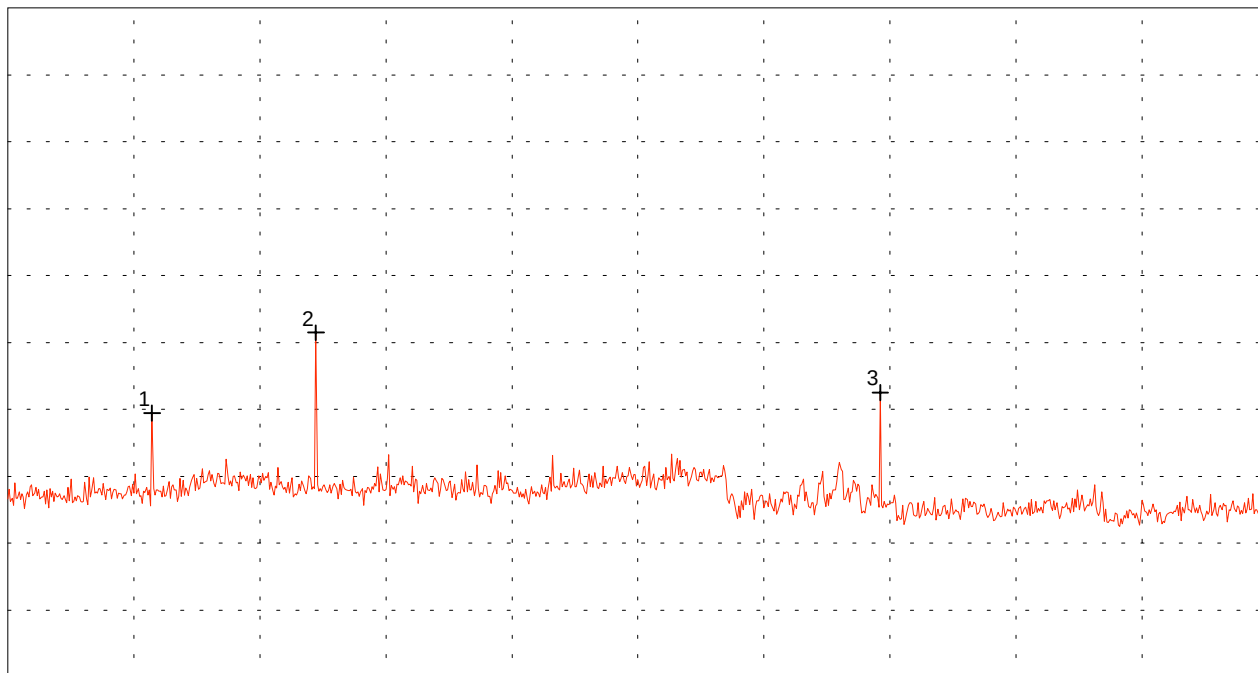

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz
SWP 40 ms

Multi Marker List

No. 1	1.801111 GHz	14.82 dB μ V
No. 2	2.711111 GHz	20.84 dB μ V
No. 3	5.845556 GHz	16.35 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 45 of 55 Pages

Spurious emissions measurement according to FCC Rules

Modell:
Orderman OMB 902 MHz

Geräte-Nummer:
Modified Sample

Auftraggeber:
think dig High Tech Solutions GmbH

Kommentar:
Radiated Measurement


Horizontal Polarization

Receive at Channel 05

Ref.Level 40.6 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -35 dB

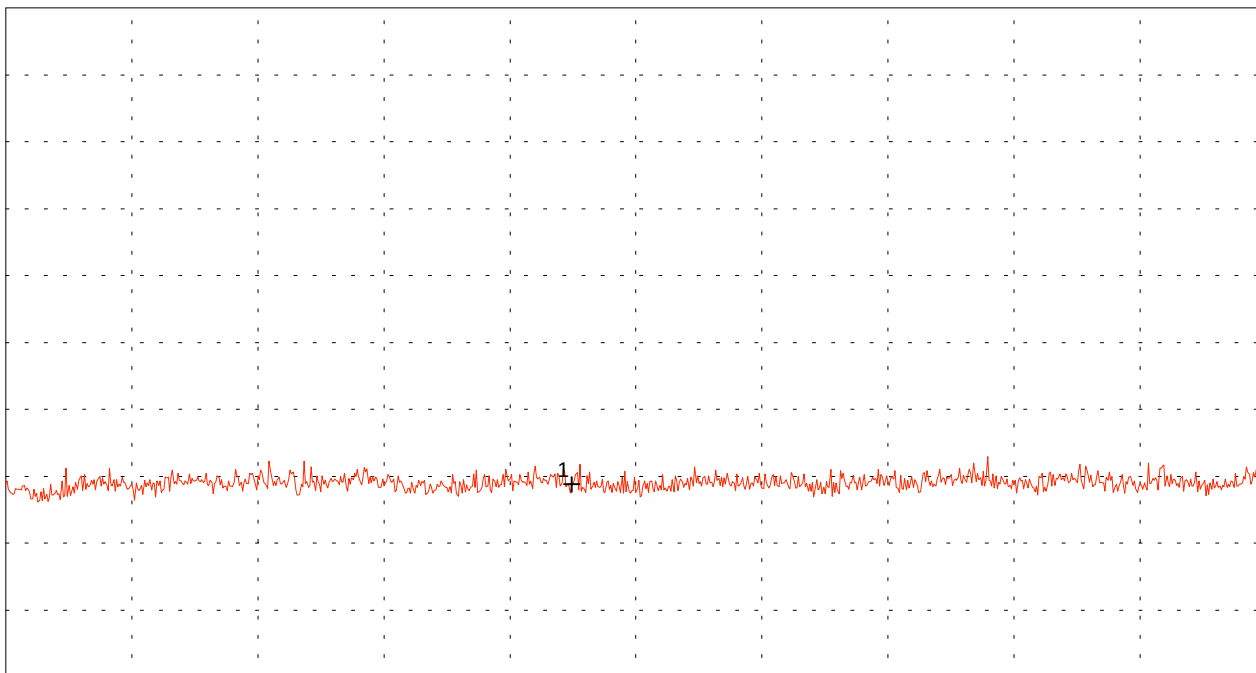

Start 8.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz
SWP 20 ms

Multi-Marker-Liste

Nr.	Frequency (GHz)	Power (dB μ V)
1	8.897778	4.99

Prüfer:
Johann Roidt

Datum:

Projekt-Nr.:

Page 46 of 55 Pages

Spurious emissions measurement according to FCC Rules

Modell:
Orderman OMB 902 MHz

Geräte-Nummer:
Modified Sample

Auftraggeber:
think dig High Tech Solutions GmbH

Kommentar:
Radiated Measurement


Vertical Polarization

Receive at Channel 05

Ref.Level 40.6 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -35 dB

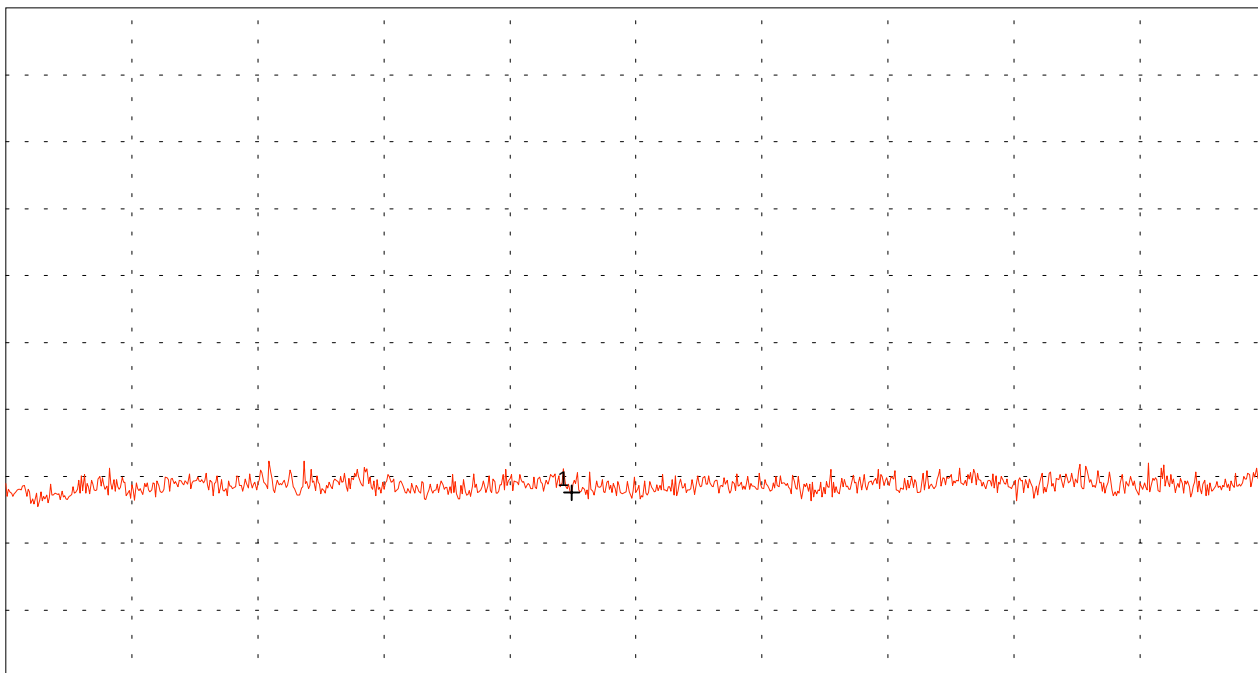

Start 8.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz
SWP 20 ms

Multi-Marker-Liste

Nr.	Frequency	Amplitude
1	8.897778 GHz	4.37 dB μ V

Prüfer:
Johann Roidt

Datum:

Projekt-Nr.:

Page 47 of 55 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB-0401

Serial no.:
R 52456 SB (modified)

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization


Date of test: 01/31/2001 Operator: J. Roidt

Test performed: automatically File name:

Mode:
RX Mode on channel 70

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

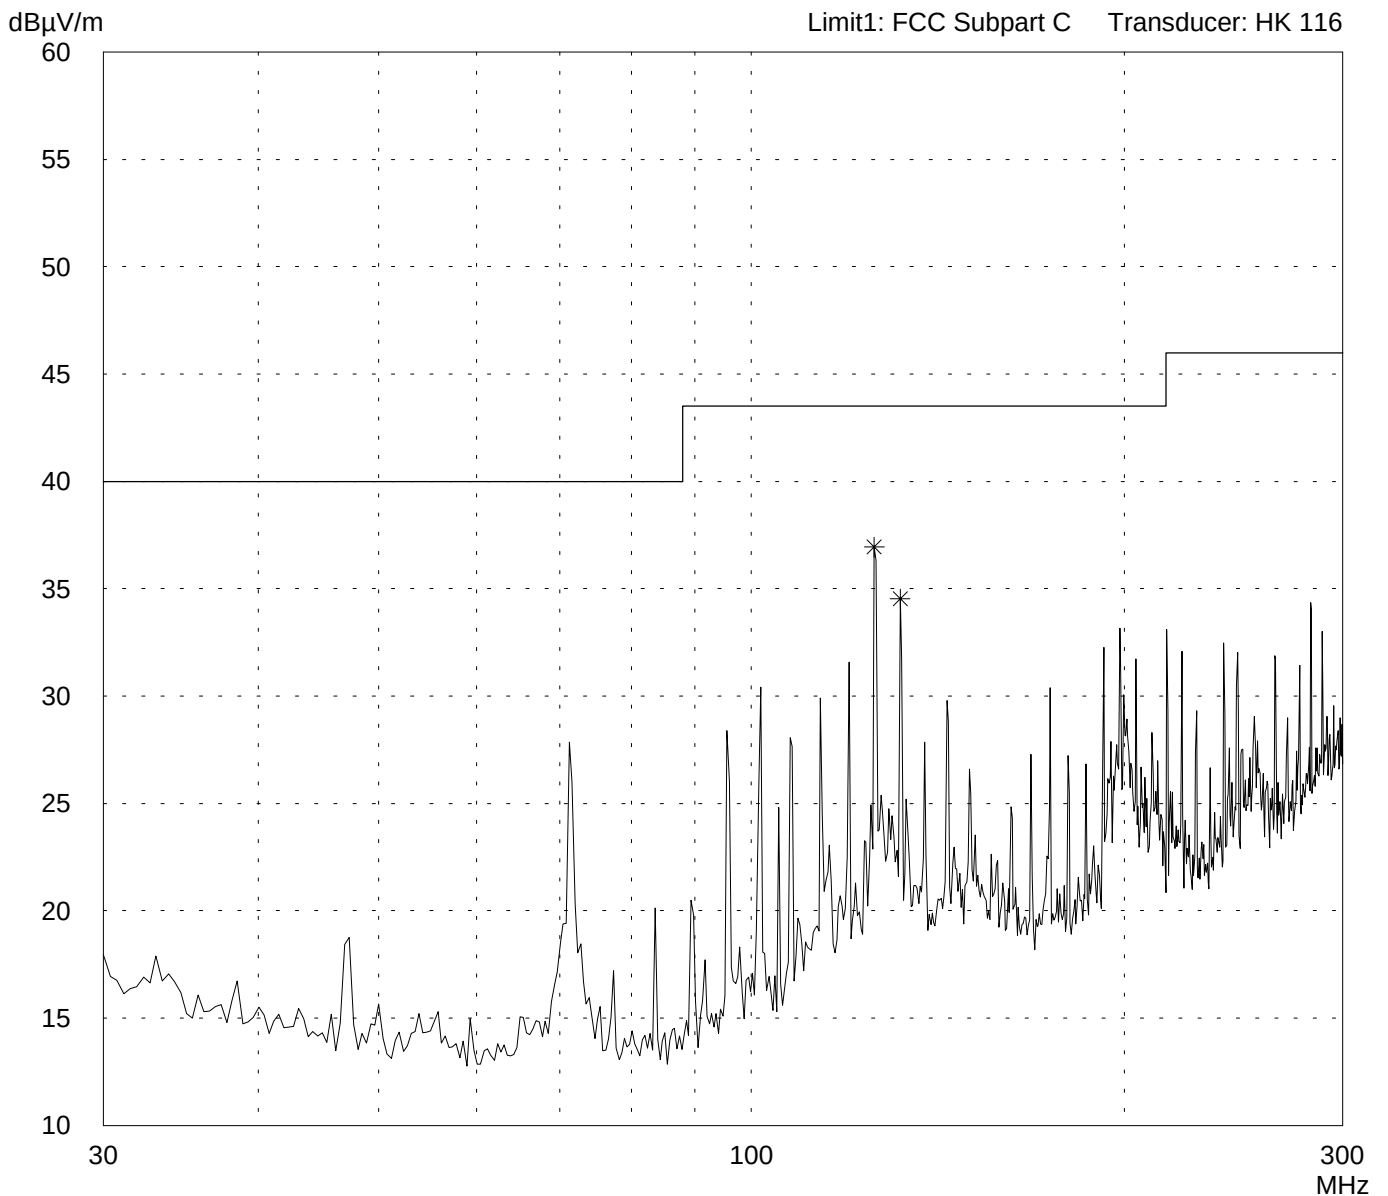

Result:
Limit kept

Project file:
55416-10031-1

Page 48 of 55 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB-0401

Serial no.:
R 52456 SB (modified)

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization


Date of test: 01/31/2001 Operator: J. Roidt

Test performed: automatically File name:

Mode:
RX Mode on channel 70

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

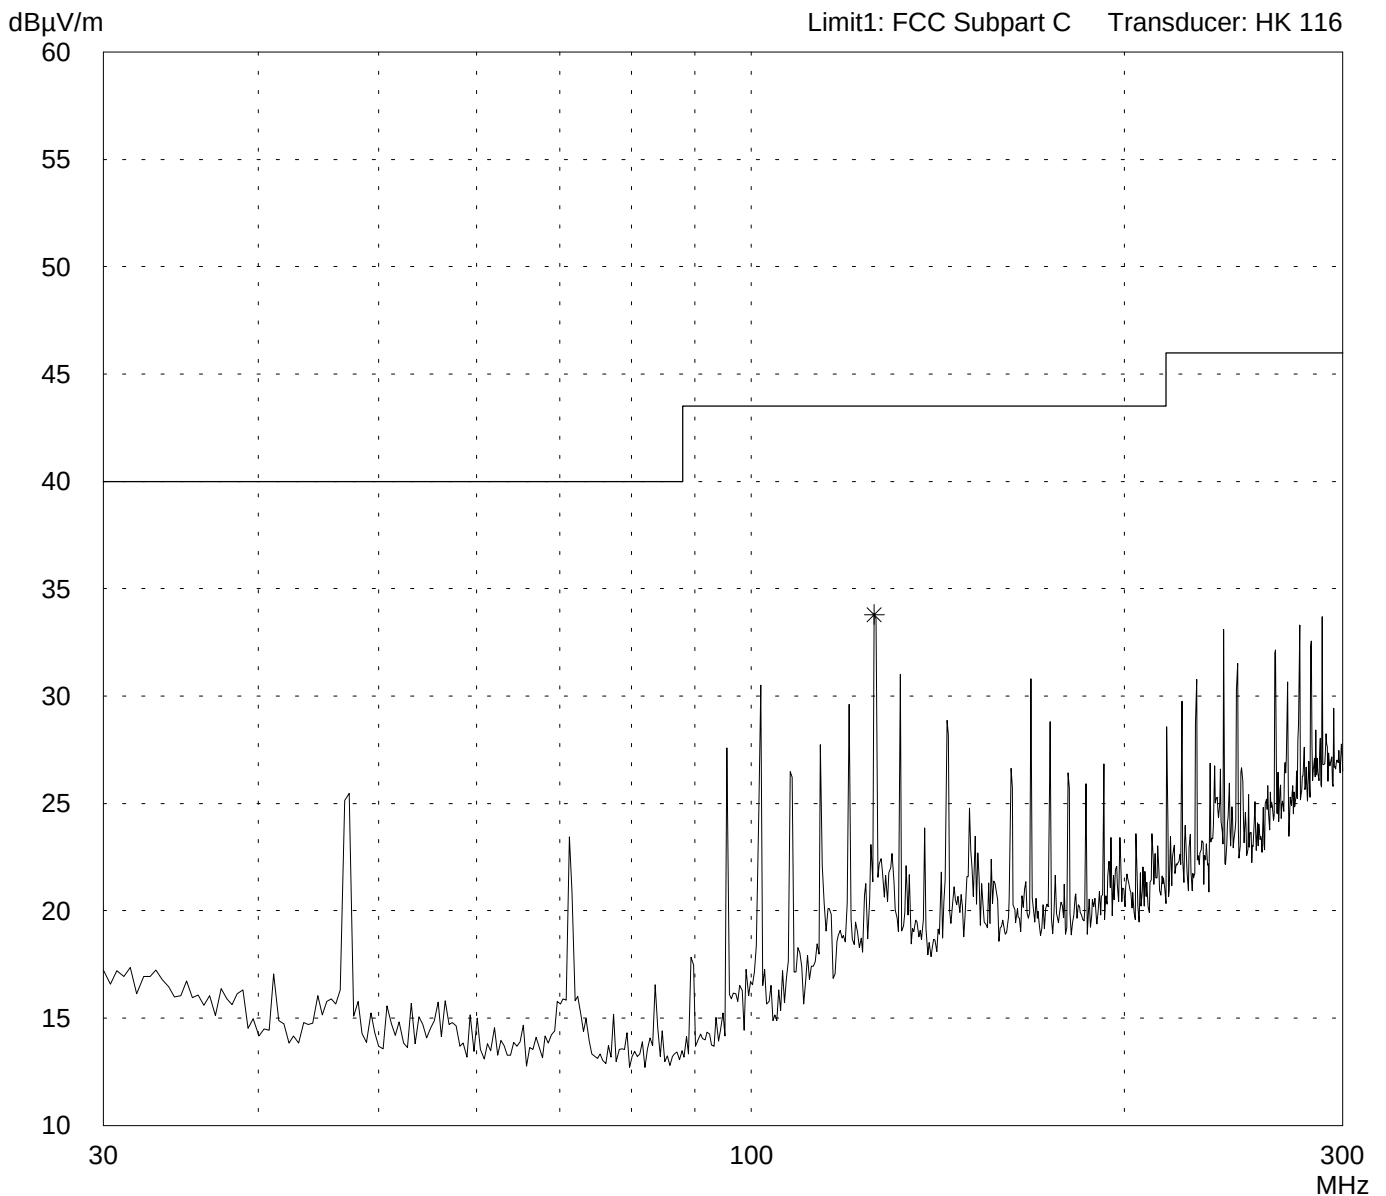

Result:
Prescan

Project file:
55416-10031-1

Page 49 of 55 Pages

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB-0401

Serial no.:
R 52456 SB (modified)

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: 01/31/2001
Operator: J. Roidt

Test performed: automatically
File name:


Mode:
RX Mode on channel 70

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HL 223

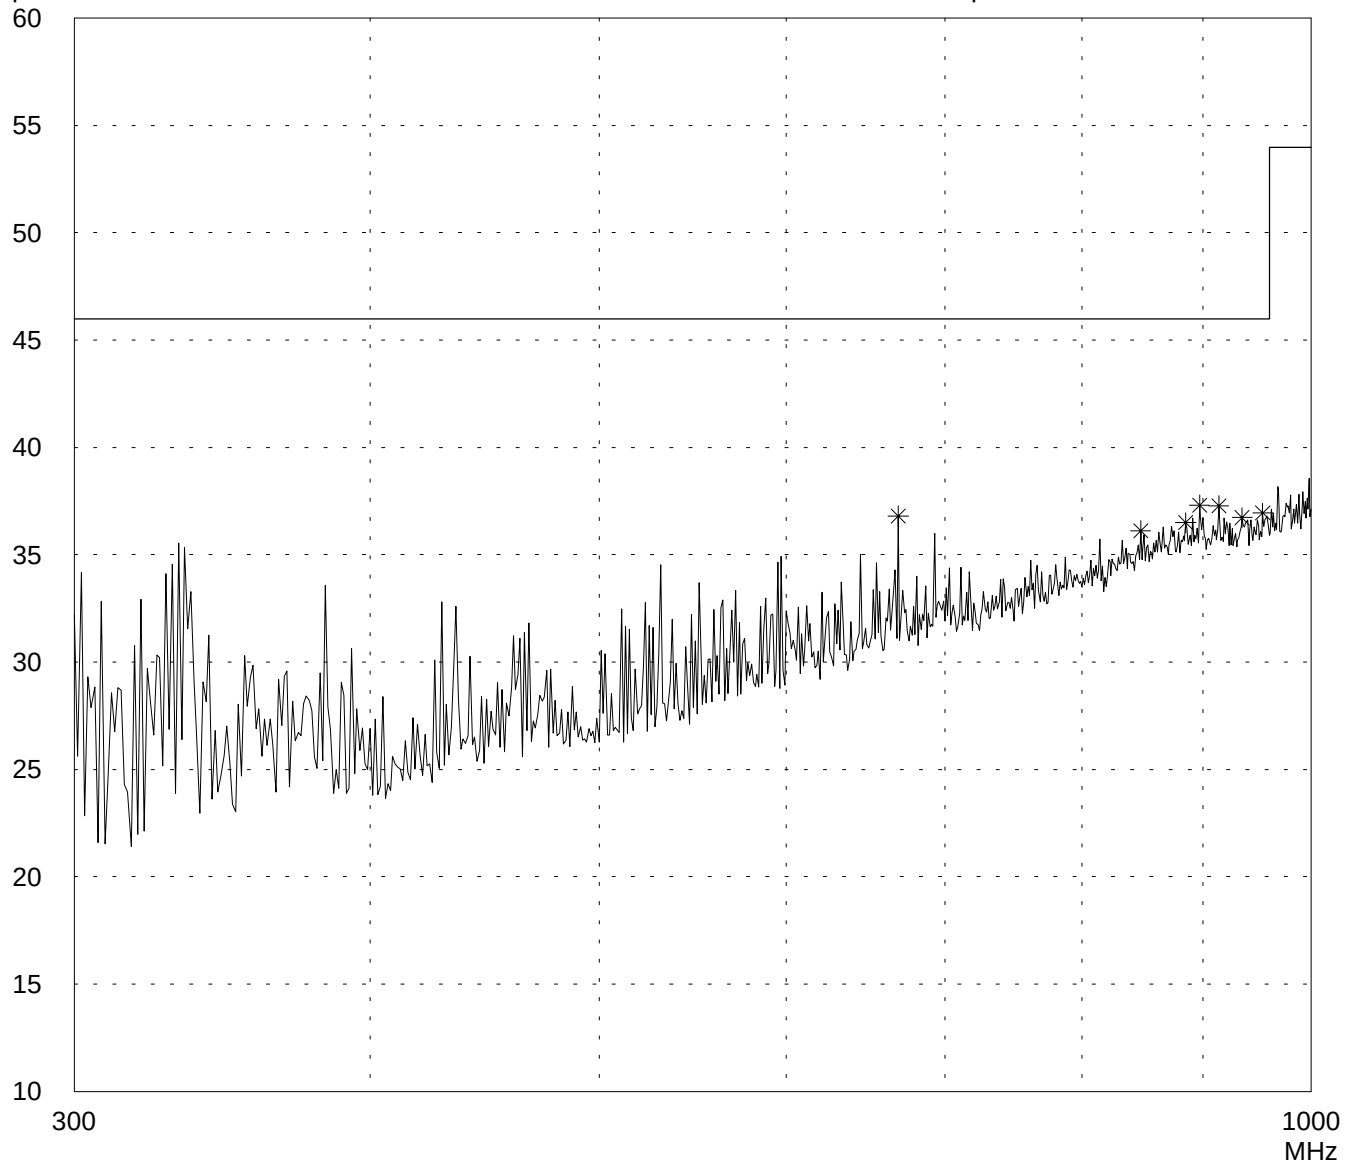

Result:
Prescan

Project file:
55416-10031-1

Page 50 of 55 Pages

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ORDERMAN OMB-0401

Serial no.:
R 52456 SB (modified)

Applicant:
think dig High Tech Solutions GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization


Date of test: 01/31/2001 Operator: J. Roidt

Test performed: automatically File name:

Mode:
RX Mode on channel 70

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

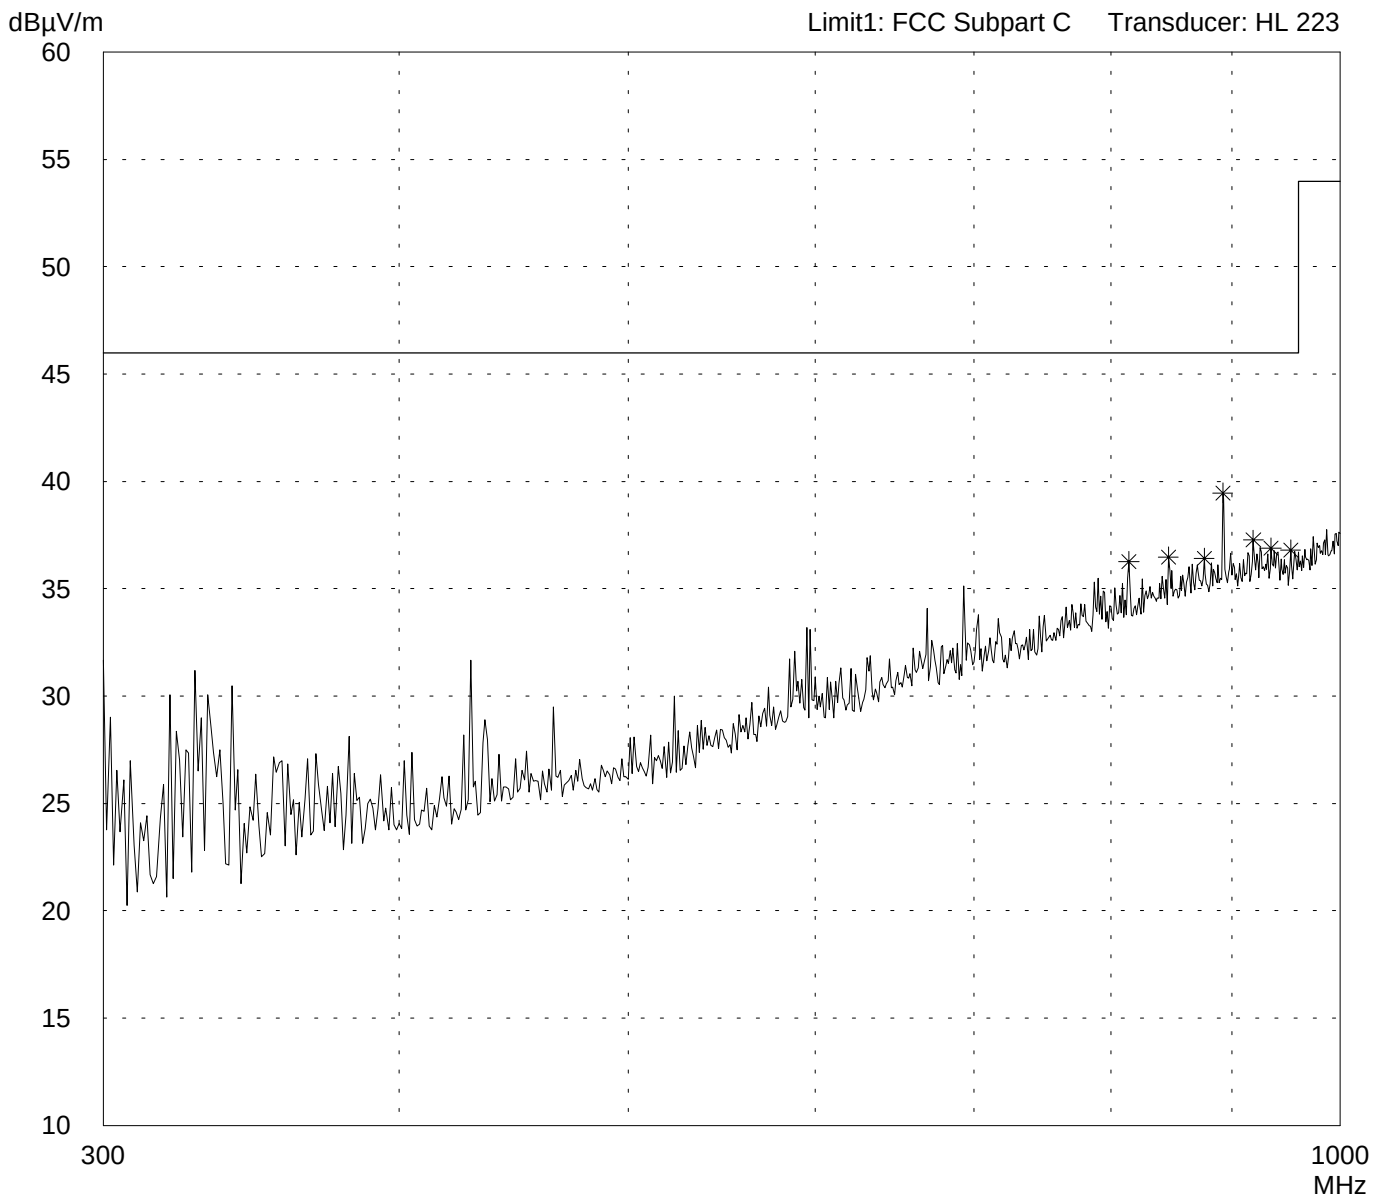

Result:
Prescan

Project file:
55416-10031-1

Page 51 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Horizontal Polarisation

Receive at channel 70

Ref.Level 45.1 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

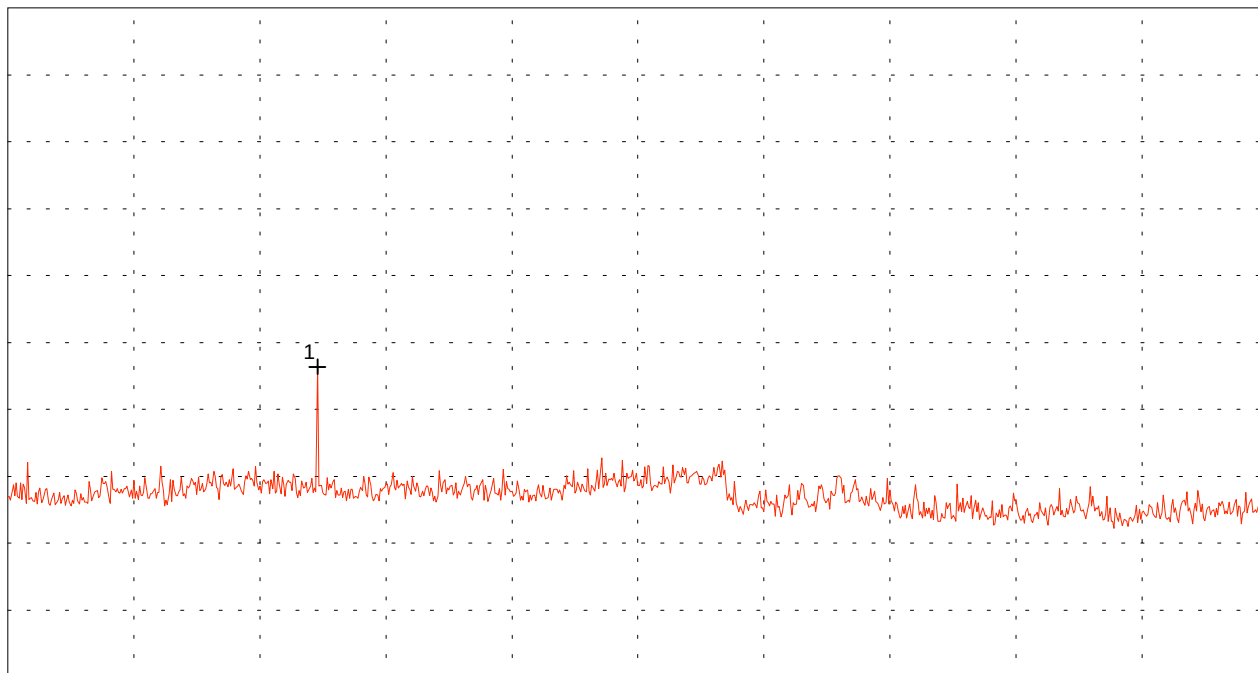

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz
SWP 40 ms

Multi Marker List

No.	Frequency (GHz)	Amplitude (dB μ V)
No. 1	2.718889 GHz	18.29 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 52 of 55 Pages

Spurious emissions measurement according to FCC Rules

Model:
Orderman OMB 9401

Serial No.:
Modified Sample

Applicant:
think dig High Solutions GmbH

Mode:
Radiated Measurement


Vertical Polarisation

Receive at channel 70

Ref.Level 45.1 dB μ V
5 dB/Div.

ATT 10 dB

Ref. Offset -30.5 dB

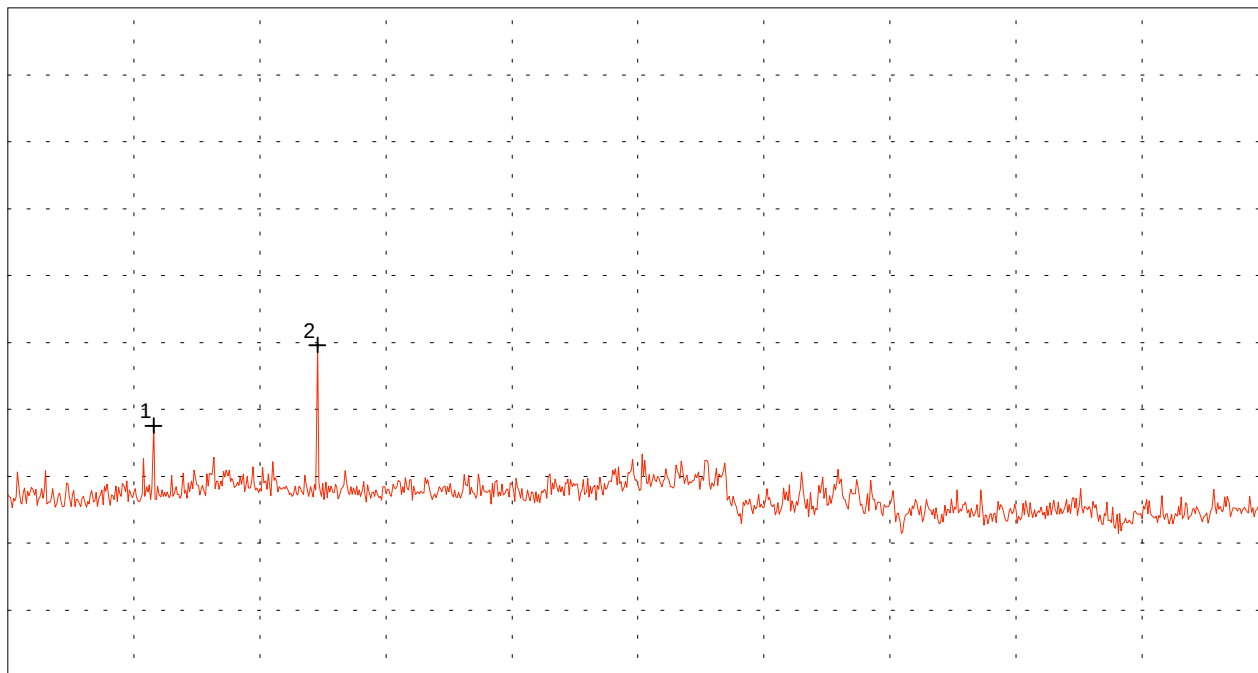

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz
SWP 40 ms

Multi Marker List

No. 1	1.808889 GHz	13.88 dB μ V
No. 2	2.718889 GHz	19.91 dB μ V

Tested by:
Johann Roidt

Date:
February 10, 2001

Project-No.:

Page 53 of 55 Pages

Spurious emissions measurement according to FCC Rules

Modell:
Orderman OMB 902 MHz

Geräte-Nummer:
Modified Sample

Auftraggeber:
think dig High Tech Solutions GmbH

Kommentar:
Radiated Measurement


Horizontal Polarization

Receive at Channel 70

Ref.Level 40.6 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -35 dB

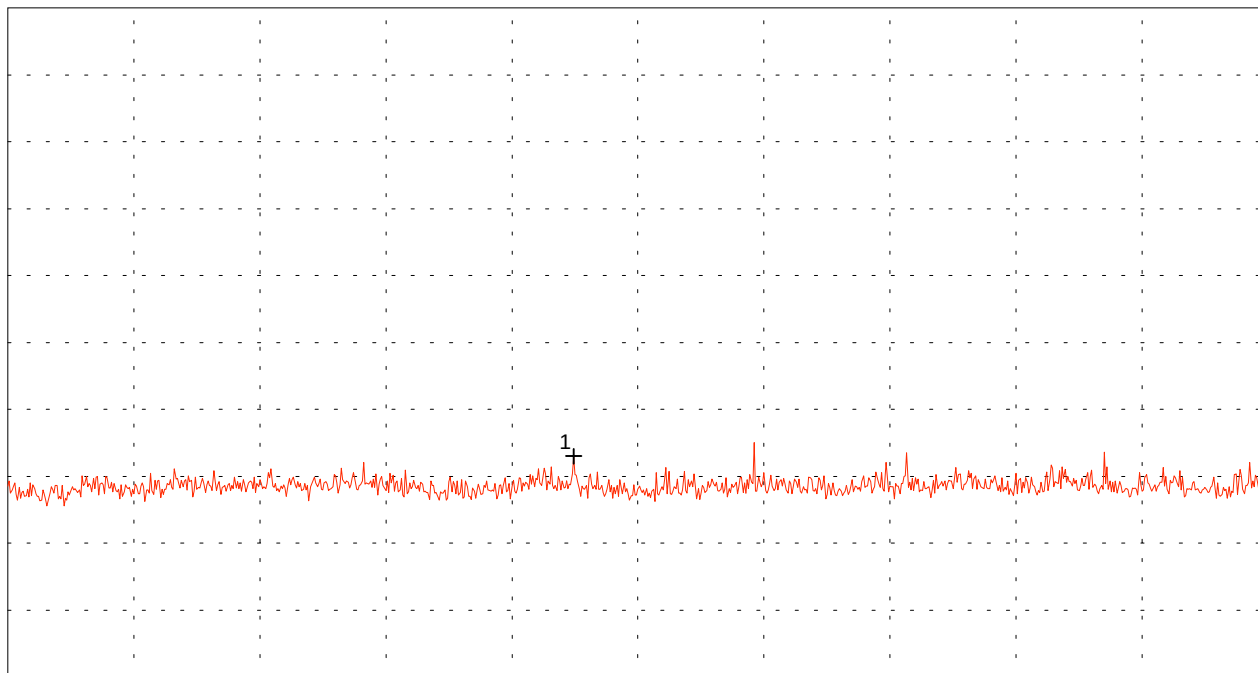

Start 8.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz
SWP 20 ms

Multi-Marker-Liste

Nr. 1	8.897778 GHz	7.10 dB μ V
-------	--------------	-----------------

Prüfer:
Johann Roidt

Datum:

Projekt-Nr.:

Page 54 of 55 Pages

Spurious emissions measurement according to FCC Rules

Modell:
Orderman OMB 902 MHz

Geräte-Nummer:
Modified Sample

Auftraggeber:
think dig High Tech Solutions GmbH

Kommentar:
Radiated Measurement


Vertical Polarization

Receive at Channel 70

Ref.Level 40.6 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -35 dB

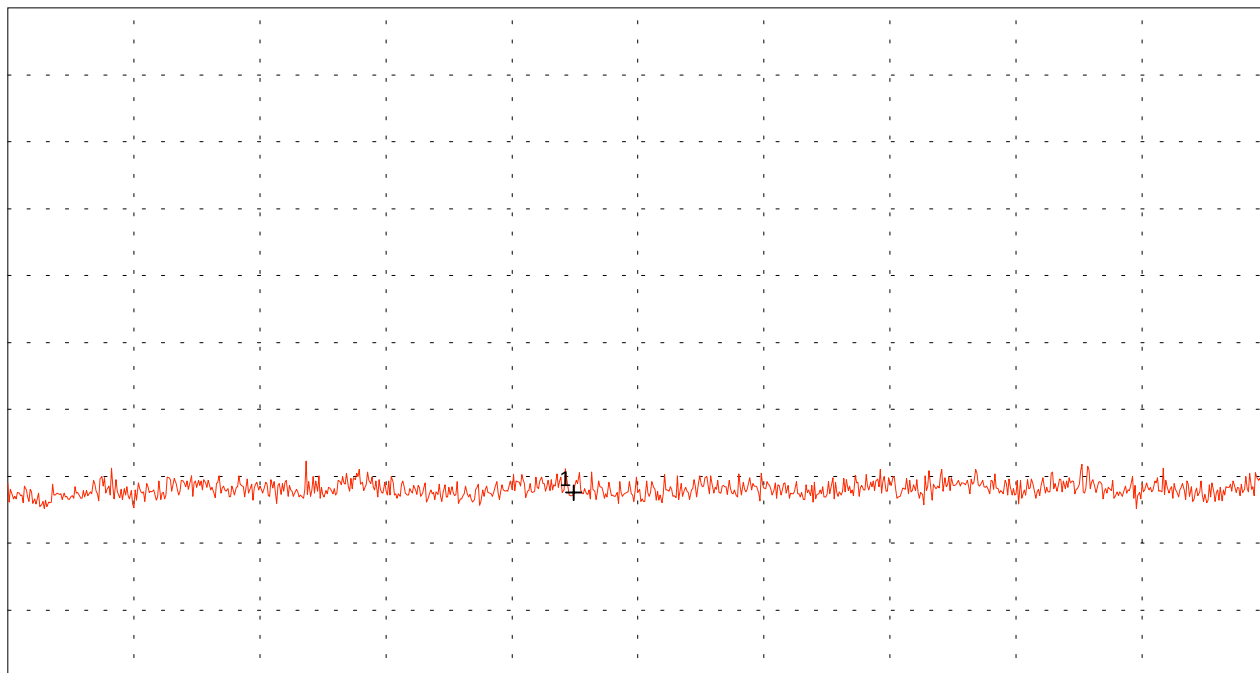

Start 8.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 10.000 GHz
SWP 20 ms

Multi-Marker-Liste

Nr.	Frequency	Amplitude
1	8.897778 GHz	4.37 dB μ V

Prüfer:
Johann Roidt

Datum:

Projekt-Nr.:

Page 55 of 55 Pages