

Straubing, 19 March 2007

T E S T - R E P O R T

No. 55416-070159 (Edition 1)

for

Orderman OM-TT

Point-of-sale terminal with inductive reader

Applicant: think dig High Tech Solutions GmbH

Test Specifications: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207 and 15.209

Industry Canada Radio Standards Specifications
RSS-Gen Issue 1, Section 7.2.2 and
RSS-210 Issue 6, Sections 2.2, 2.6
(Category I Equipment)

Table of Contents

| | | |
|-----|--|----|
| 1 | Description of the Equipment Under Test (EUT) | 3 |
| 2 | Administrative Data..... | 4 |
| 3 | Identification of the Test Laboratory | 5 |
| 4 | Summary | 6 |
| 5 | Operation Mode and Configuration of EUT | 7 |
| 6 | Measurement Procedures | 8 |
| 6.1 | Bandwidth Measurements | 8 |
| 6.2 | Conducted AC Powerline Emission..... | 9 |
| 6.3 | Radiated Emission Measurement 9 kHz to 30 MHz | 11 |
| 6.4 | Radiated Emission in Fully or Semi Anechoic Room | 13 |
| 6.5 | Radiated Emission at Open Field Test Site..... | 15 |
| 7 | Photographs Taken During Testing | 17 |
| 8 | Test Results..... | 23 |
| 8.1 | Occupied Bandwidth | 25 |
| 8.2 | Designation of Emissions | 29 |
| 8.3 | Restricted Bands of Operation | 30 |
| 8.4 | Conducted Powerline Emission Measurement 150 kHz to 30 MHz | 31 |
| 8.5 | Radiated Emission Measurement 9 kHz to 30 MHz | 35 |
| 8.6 | Radiated Emission Measurement 30 MHz to 1 GHz | 38 |
| 8.7 | Exposure of Humans to RF Fields..... | 40 |
| 9 | Referenced Regulations | 42 |
| 10 | Charts taken during testing | 44 |

1 Description of the Equipment Under Test (EUT)

| General data of EUT | |
|---------------------------------|--|
| Type designation ¹ : | Orderman OM-TT |
| Parts ² : | |
| Serial number(s): | |
| Manufacturer: | think dig High Tech Solutions GmbH |
| Type of equipment: | Point-of-sale terminal with inductive reader |
| Version: | With new cassis |
| FCC ID: | |
| Additional parts/accessories: | |

| Technical data of EUT | |
|---|--|
| Application frequency range: | 119 - 135 kHz |
| Frequency range: | 125 kHz |
| Operating frequency: | 125 kHz |
| Type of modulation: | ASK |
| Pulse train: | Not applicable |
| Pulse width: | Not applicable |
| Number of RF-channels: | 1 |
| Channel spacing: | Not applicable |
| Designation of emissions ³ : | 10K0A1D |
| Type of antenna: | Integrated coil |
| Size/length of antenna: | 1 x 1 cm |
| Connection of antenna: | <input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable |
| Type of power supply: | AC supply |
| Specifications for power supply: | nominal voltage: 115 V nominal frequency: 60 Hz |

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

| Application details | |
|----------------------------|--|
| Applicant (full address): | think dig High Tech Solutions GmbH Bachstraße 59 A-5023 Salzburg |
| Contact person: | Mr. Martin Brandauer |
| Contract identification: | |
| Receipt of EUT: | 23 February 2007 new cassis: 6 March 2007 |
| Date(s) of test: | March 2007 |
| Note(s): | |

| Report details | |
|-----------------------|---------------|
| Report number: | 55416-070159 |
| Edition: | 1 |
| Issue date: | 19 March 2007 |

3 Identification of the Test Laboratory

| Details of the Test Laboratory | |
|---|---|
| Company name: | Senton GmbH EMI/EMC Test Center |
| Address: | Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany |
| Laboratory accreditation: | DAR-Registration No. DAT-P-171/94-02 |
| FCC test site registration number | 90926 |
| Industry Canada test site registration: | IC 3050 |
| Contact person: | Mr. Johann Roidt Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99 |

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the
Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207 and 15.209
of the Federal Communication Commission (FCC) and the
**Radio Standards Specifications
RSS-Gen Issue 1, Section 7.2.2 and
RSS-210 Issue 6, Sections 2.2, 2.6 (Category I Equipment)**
of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

5 Operation Mode and Configuration of EUT

Operation Modes

Transmitting continuously with and without tag

Configuration of EUT

The EUT was configurated as stand alone device.

List of ports and cables

| Port | Description | Classification ⁴ | Cable type | Cable length |
|------|------------------------------|-----------------------------|------------|----------------|
| 1 | AC supply of AC/DC convertor | ac power | Unshielded | Direct contact |
| 2 | DC supply of EUT | dc power | Unshielded | 2 m |
| 3 | COM1 | signal/control port | Unshielded | 2 m |
| 4 | COM2 | signal/control port | Unshielded | 2 m |
| 5 | COM3 | signal/control port | Unshielded | 2 m |
| 6 | COM4 | signal/control port | Unshielded | 2 m |
| 7 | Ethernet | signal/control port | Shielded | 2 m |

List of devices connected to EUT

| Item | Description | Type Designation | Serial no. or ID | Manufacturer |
|------|----------------|------------------|------------------|--------------|
| | Not applicable | | | |

List of support devices

| Item | Description | Type Designation | Serial no. or ID | Manufacturer |
|------|----------------|------------------|------------------|--------------|
| | Not applicable | | | |

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures

6.1 Bandwidth Measurements

| Measurement Procedure: | |
|--|---|
| Rules and specifications: | CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 1, sections 4.4.1 and 4.4.2 IC RSS-210 Issue 6, section A1.1.3 ANSI C63.4, annex H.6 |
| Guide: | ANSI C63.4 / IC RSS-Gen Issue 1, sections 4.4.1 and 4.4.2 |
| Measurement setup: | <input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.3) |
| <p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p> | |

6.2 Conducted AC Powerline Emission

Measurement Procedure:

| | |
|---------------------------|---|
| Rules and specifications: | CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 1, section 7.2.2 |
| Guide: | ANSI C63.4 / CISPR 22 |


Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:

First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.

If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.

According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.

Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.

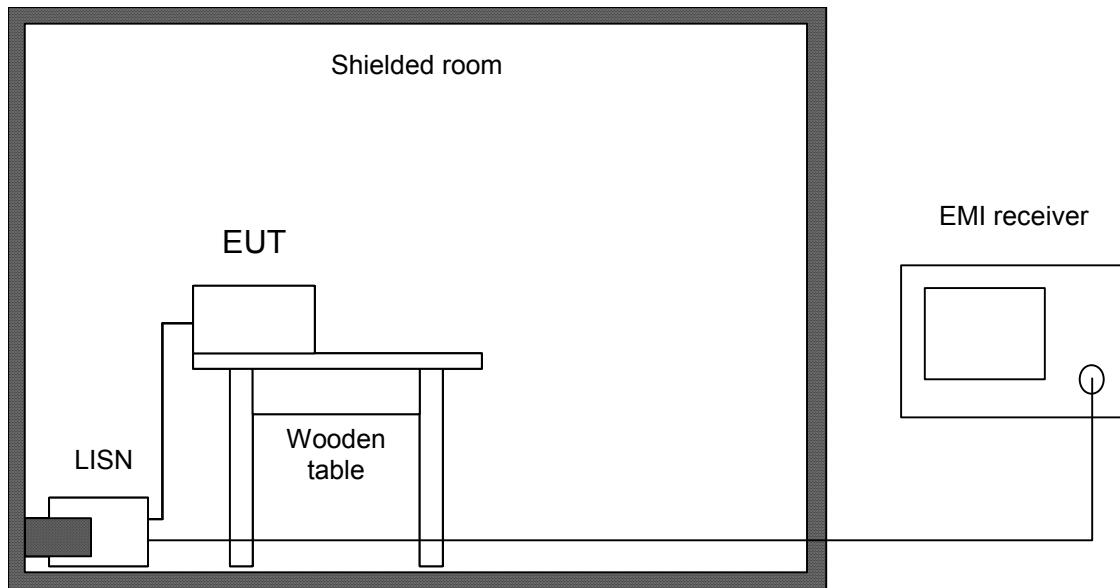

Test instruments used:

| Used | Type | Model | Serial No. or ID | Manufacturer |
|-------------------------------------|--------------------------|----------|------------------|--------------------|
| <input checked="" type="checkbox"/> | EMI receiver | ESHS 10 | 860043/016 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | LISN | ESH3-Z5 | 862770/021 | Rohde & Schwarz |
| <input type="checkbox"/> | LISN | ESH3-Z5 | 830952/025 | Rohde & Schwarz |
| <input type="checkbox"/> | Artificial mains network | ESH 2-Z5 | 842966/004 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Shielded room | No. 1 | 1451 | Albatross Projects |
| <input type="checkbox"/> | Shielded room | No. 4 | 3FD-100 544 | Euroshield |

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, sections 15.205 and 15.209
IC RSS-210 Issue 6, sections 2.2 and 2.6

Guide: ANSI C63.4

Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.


Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).

Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

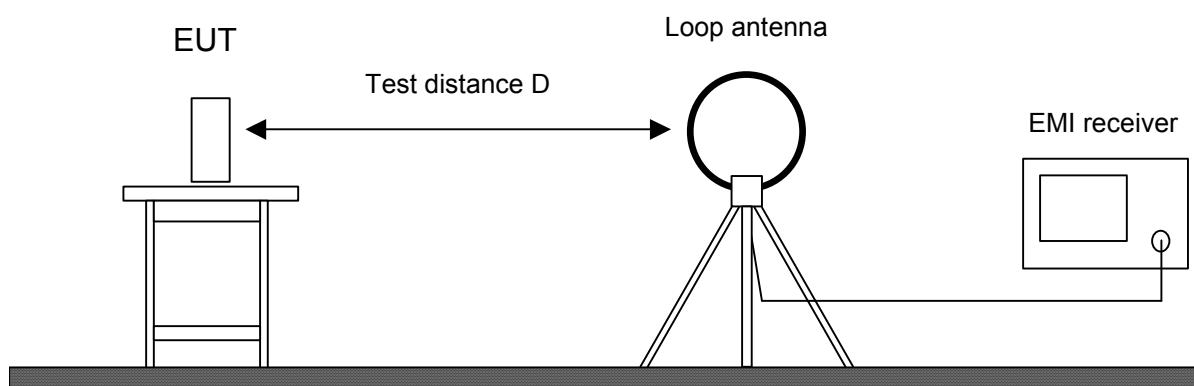


Test instruments used:

| Used | Type | Model | Serial No. or ID | Manufacturer |
|-------------------------------------|----------------------|----------|--------------------------|--------------------|
| <input checked="" type="checkbox"/> | Spectrum Analyzer | FSP 30 | 100063 | Rohde & Schwarz |
| <input type="checkbox"/> | EMI test receiver | ESMI | 839379/013 839587/006 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Test receiver | ESHS 10 | 860043/016 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Preamplifier | CPA9231A | 3393 | Schaffner |
| <input checked="" type="checkbox"/> | Loop antenna | HFH2-Z2 | 882964/1 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Fully anechoic room | No. 2 | 1452 | Albatross Projects |
| <input type="checkbox"/> | Semi-anechoic room | No. 3 | 1453 | Siemens |
| <input checked="" type="checkbox"/> | Open field test site | EG 1 | 1450 | Senton |

6.4 Radiated Emission in Fully or Semi Anechoic Room

| Measurement Procedure: | |
|--|---|
| Rules and specifications: | CFR 47 Part 15, section 15.209 IC RSS-210 Issue 6, section 2.6 |
| Guide: | ANSI C63.4 |
| Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33. | |
| Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz). | |
| Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used. | |
| All tests below 18 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance is reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary. | |
| If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value. | |
| Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. | |
| During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. | |
| For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully or semi anechoic room are indicated as prescans. | |

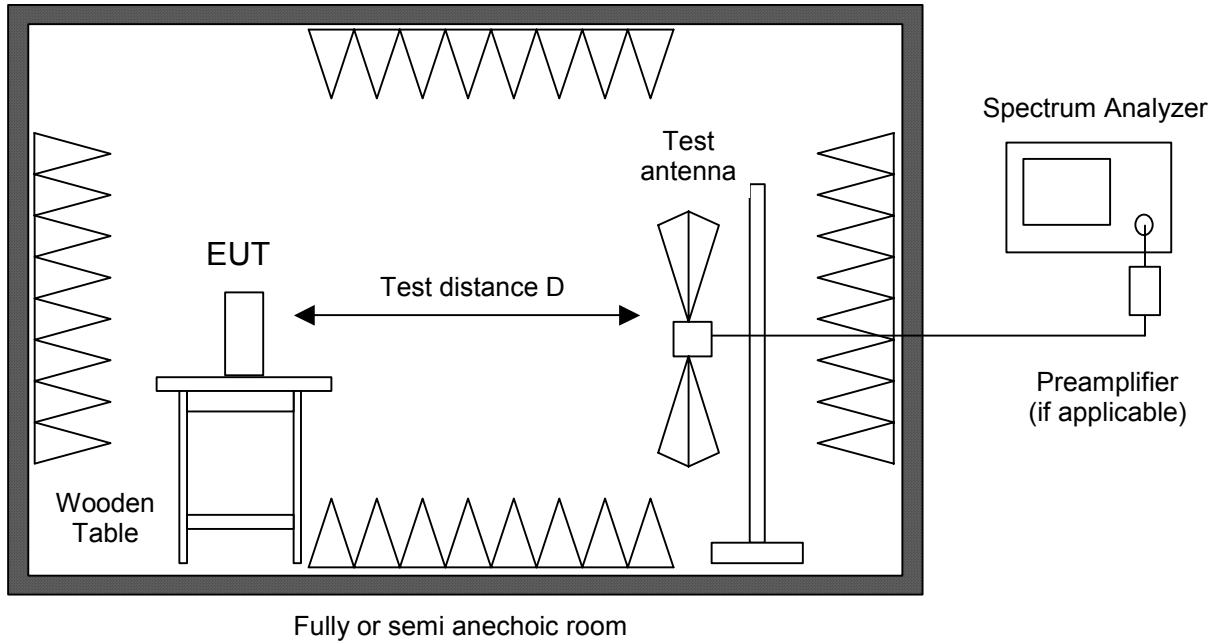

Test instruments used:

| Used | Type | Model | Serial No. or ID | Manufacturer |
|-------------------------------------|--------------------------|----------------------|--------------------------|--------------------|
| <input checked="" type="checkbox"/> | Spectrum Analyzer | FSP 30 | 100063 | Rohde & Schwarz |
| <input type="checkbox"/> | Spectrum analyzer | R 3271 | 05050023 | Advantest |
| <input type="checkbox"/> | EMI test receiver | ESMI | 839379/013 839587/006 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Preamplifier | CPA9231A | 3393 | Schaffner |
| <input type="checkbox"/> | Preamplifier | R14601 | | Advantest |
| <input type="checkbox"/> | Preamplifier 1-8 GHz | AFS3-00100800-32-LN | 847743 | Miteq |
| <input type="checkbox"/> | Preamplifier 0.5-8 GHz | AMF-4D-005080-25-13P | 860149 | Miteq |
| <input type="checkbox"/> | Preamplifier 8-18 GHz | ACO/180-3530 | 32641 | CTT |
| <input type="checkbox"/> | External Mixer | WM782A | 845881/005 | Tektronix |
| <input type="checkbox"/> | Harmonic Mixer | FS-Z30 | 843389/007 | Rohde & Schwarz |
| | Accessories | | | |
| <input checked="" type="checkbox"/> | Trilog broadband antenna | VULB 9163 | 9163-188 | Schwarzbeck |
| <input type="checkbox"/> | Horn antenna | 3115 | 9508-4553 | EMCO |
| <input type="checkbox"/> | Horn antenna | 3160-03 | 9112-1003 | EMCO |
| <input type="checkbox"/> | Horn antenna | 3160-04 | 9112-1001 | EMCO |
| <input type="checkbox"/> | Horn antenna | 3160-05 | 9112-1001 | EMCO |
| <input type="checkbox"/> | Horn antenna | 3160-06 | 9112-1001 | EMCO |
| <input type="checkbox"/> | Horn antenna | 3160-07 | 9112-1008 | EMCO |
| <input type="checkbox"/> | Horn antenna | 3160-08 | 9112-1002 | EMCO |
| <input type="checkbox"/> | Horn antenna | 3160-09 | 9403-1025 | EMCO |
| <input type="checkbox"/> | Horn antenna | 3160-10 | 399185 | EMCO |
| <input checked="" type="checkbox"/> | Fully anechoic room | No. 2 | 1452 | Albatross Projects |
| <input type="checkbox"/> | Semi-anechoic room | No. 3 | 1453 | Siemens |

6.5 Radiated Emission at Open Field Test Site

Measurement Procedure:


| | |
|---------------------------|---|
| Rules and specifications: | CFR 47 Part 15, section 15.209 IC RSS-210 Issue 6, section 2.6 |
| Guide: | ANSI C63.4 |

Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.

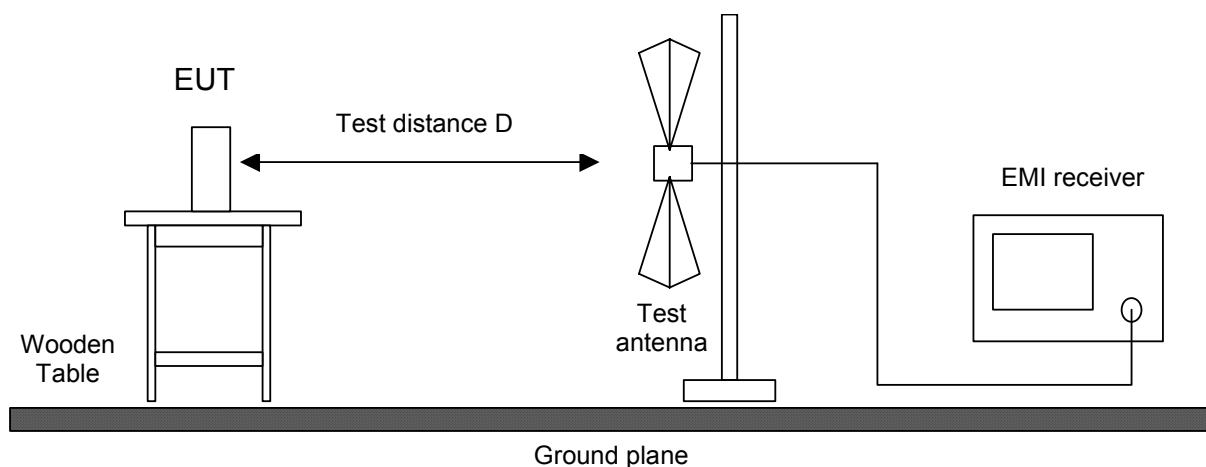

Test instruments used:

| Used | Type | Model | Serial No. or ID | Manufacturer |
|-------------------------------------|----------------------|-------|------------------|-----------------|
| <input checked="" type="checkbox"/> | EMI receiver | ESVP | 881120/024 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Biconical antenna | EG 1 | HK 116 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Log. per. antenna | EG 1 | HL 223 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Open field test site | | EG 1 | Senton |

7 Photographs Taken During Testing



Test setup for conducted AC powerline emission measurement




Test setup for radiated emission measurement 9 kHz – 30 MHz



**Test setup for radiated emission measurement
(fully anechoic room)**

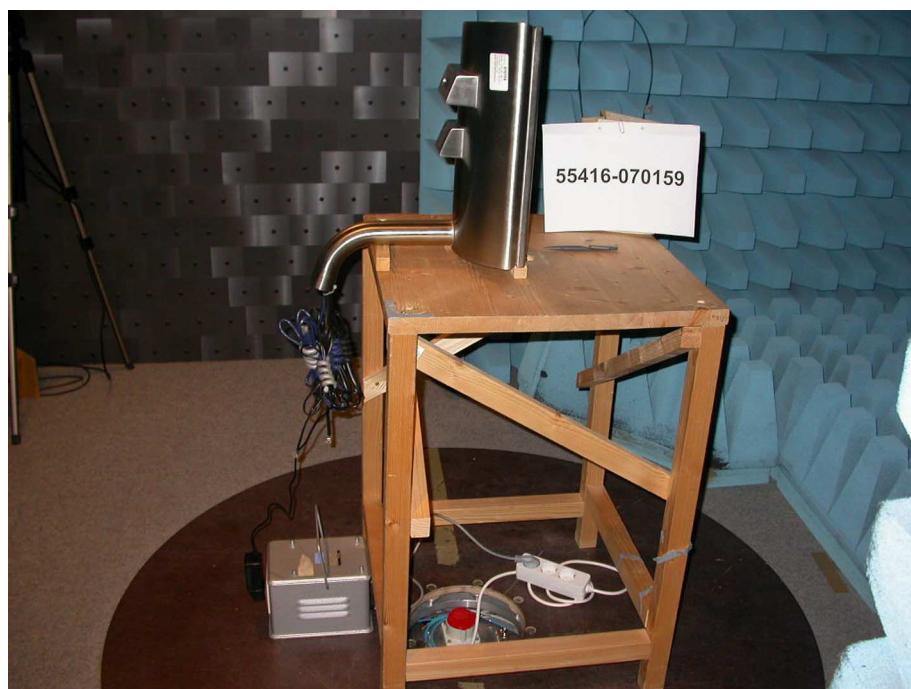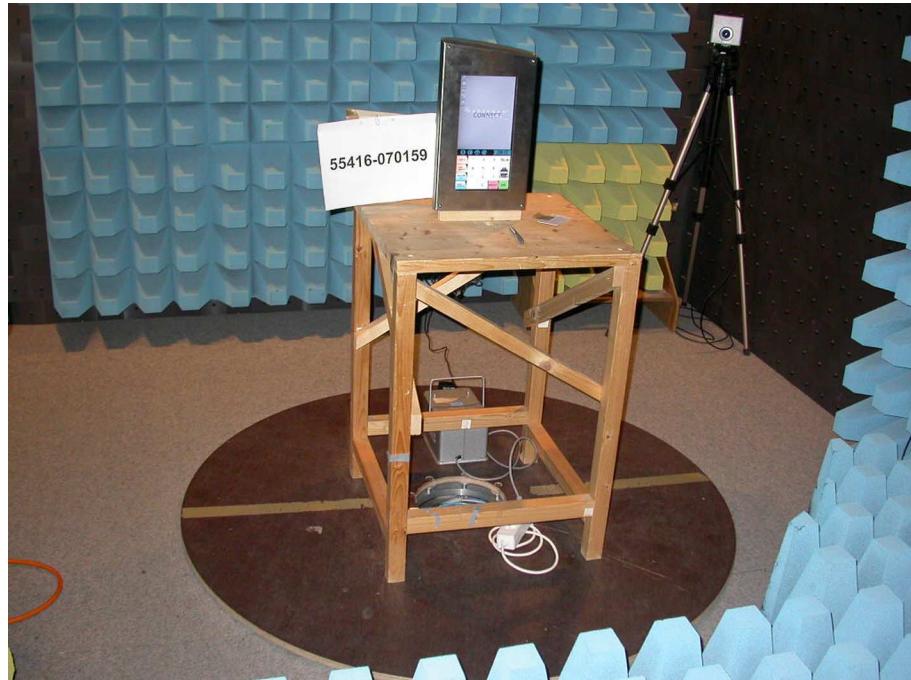

**Test setup for radiated emission measurement
(open field test site)**

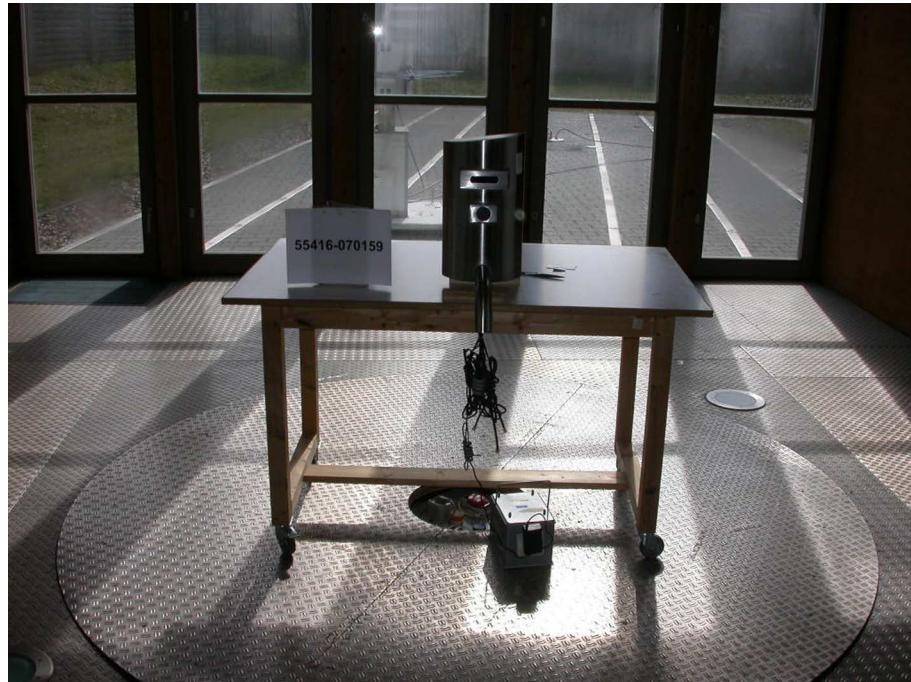

**Test setup for radiated emission measurement
(open field test site) - continued -**



8 Test Results

| FCC CFR 47 Parts 2 and 15 | | | |
|----------------------------------|--|-------------|----------------|
| <i>Section(s)</i> | <i>Test</i> | <i>Page</i> | <i>Result</i> |
| 2.1046(a) | Conducted output power | --- | Not applicable |
| 2.202(a) | Occupied bandwidth | 25 | Recorded |
| 2.201, 2.202 | Class of emission | 29 | Calculated |
| 15.35(c) | Pulse train measurement for pulsed operation | --- | Not applicable |
| 15.205(a) | Restricted bands of operation | 30 | Test passed |
| 15.207 | Conducted AC powerline emission 150 kHz to 30 MHz | 31 | Test passed |
| 15.205(b) 15.209 | Radiated emission 9 kHz to 30 MHz | 35 | Test passed |
| 15.205(b) 15.209 | Radiated emission 30 MHz to 1 GHz | 38 | Test passed |

IC RSS-Gen Issue 1

| <i>Section(s)</i> | <i>Test</i> | <i>Page</i> | <i>Result</i> |
|-------------------|---|-------------|---|
| 4.6 | Transmitter output power (conducted) | --- | Not applicable |
| 4.4.1 | Occupied Bandwidth | 25 | Recorded |
| 3.2(h), 8 | Designation of emissions | 29 | Calculated |
| 4.3 | Pulsed operation | --- | Not applicable |
| 7.2.2 | Transmitter AC power lines conducted emissions 150 kHz to 30 MHz | 31 | Test passed |
| 5.5 | Exposure of Humans to RF Fields | 40 | Exempted from SAR and RF evaluation |

IC RSS-210 Issue 6


| <i>Section(s)</i> | <i>Test</i> | <i>Page</i> | <i>Result</i> |
|-------------------|--|-------------|---------------|
| 2.2(a) | Restricted bands and unwanted emission frequencies | 30 | Test passed |
| 2.2(b)(c) 2.6 | Unwanted emissions 9 kHz to 30 MHz | 35 | Test passed |
| 2.2(b)(c) 2.6 | Unwanted emissions 30 MHz to 1 GHz | 38 | Test passed |

8.1 Occupied Bandwidth

| Rules and specifications: | CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6 | | | | | | | | |
|---------------------------|---|-----------------------|------------------------------|-----------------|-------|--------------------|--------|--------------------|---------|
| Guide: | ANSI C63.4 | | | | | | | | |
| Description: | <p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p> <table border="1"><thead><tr><th>Fundamental frequency</th><th>Minimum resolution bandwidth</th></tr></thead><tbody><tr><td>9 kHz to 30 MHz</td><td>1 kHz</td></tr><tr><td>30 MHz to 1000 MHz</td><td>10 kHz</td></tr><tr><td>1000 MHz to 40 GHz</td><td>100 kHz</td></tr></tbody></table> <p>The video bandwidth shall be at least three times greater than the resolution bandwidth.</p> | Fundamental frequency | Minimum resolution bandwidth | 9 kHz to 30 MHz | 1 kHz | 30 MHz to 1000 MHz | 10 kHz | 1000 MHz to 40 GHz | 100 kHz |
| Fundamental frequency | Minimum resolution bandwidth | | | | | | | | |
| 9 kHz to 30 MHz | 1 kHz | | | | | | | | |
| 30 MHz to 1000 MHz | 10 kHz | | | | | | | | |
| 1000 MHz to 40 GHz | 100 kHz | | | | | | | | |
| Measurement procedure: | Bandwidth Measurements (6.1) | | | | | | | | |

| | |
|---------------|----------------------------------|
| Comment: | |
| Date of test: | 6 March 2007 |
| Test site: | Fully anechoic room, cabin no. 2 |

Occupied Bandwidth (99 %):

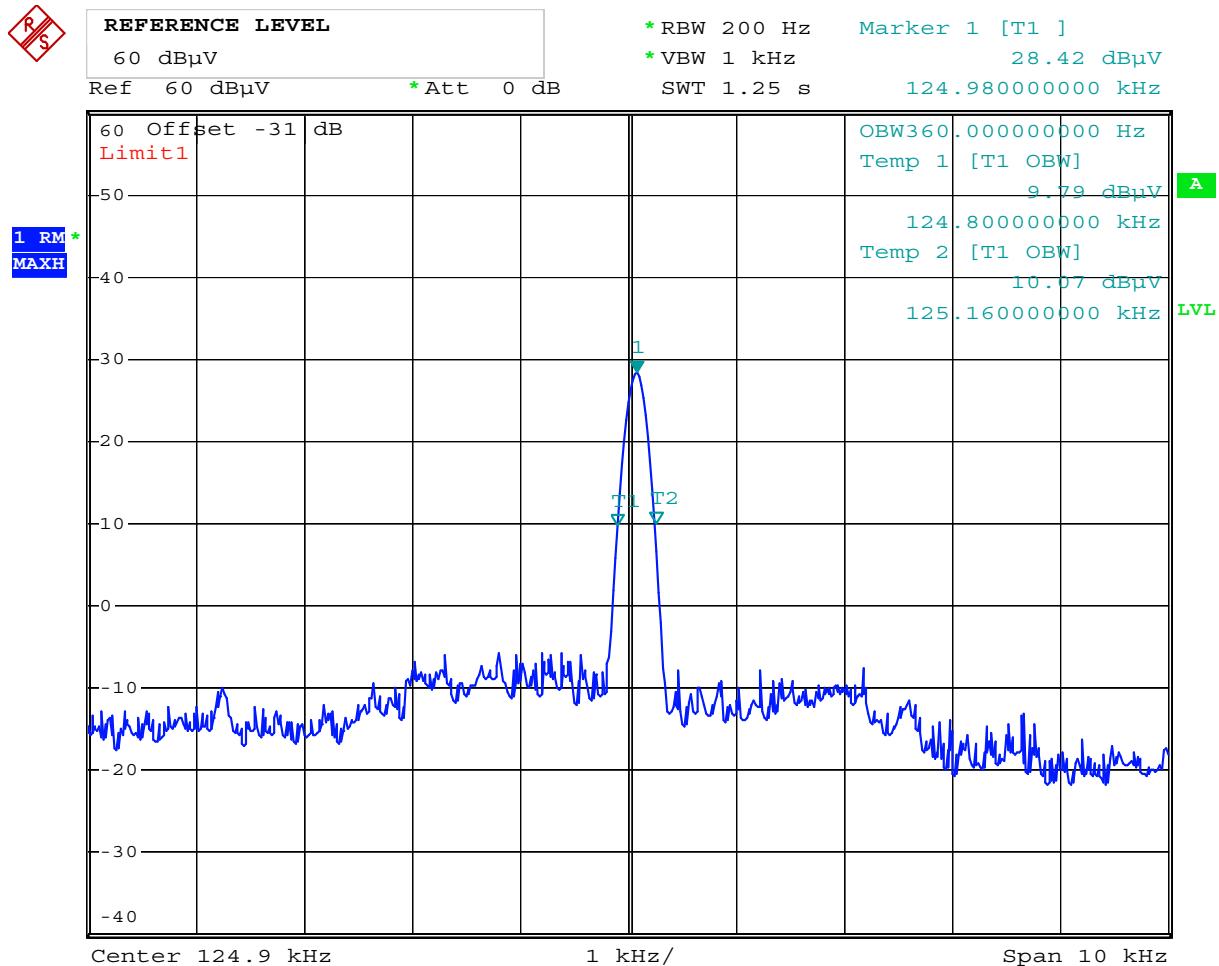

Date: 6.MAR.2007 11:10:30


Occupied Bandwidth (99 %): **0.36 Hz**

Occupied Bandwidth (continued)

| | |
|---------------------------|---|
| Rules and specifications: | IC RSS-Gen Issue 1, section 4.4.1 |
| Guide: | IC RSS-Gen Issue 1, section 4.4.1 |
| Description: | <p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p> |
| Measurement procedure: | Bandwidth Measurements (6.1) |

| | |
|---------------|----------------------------------|
| Comment: | |
| Date of test: | 6 March 2007 |
| Test site: | Fully anechoic room, cabin no. 2 |

Occupied Bandwidth (99 %):

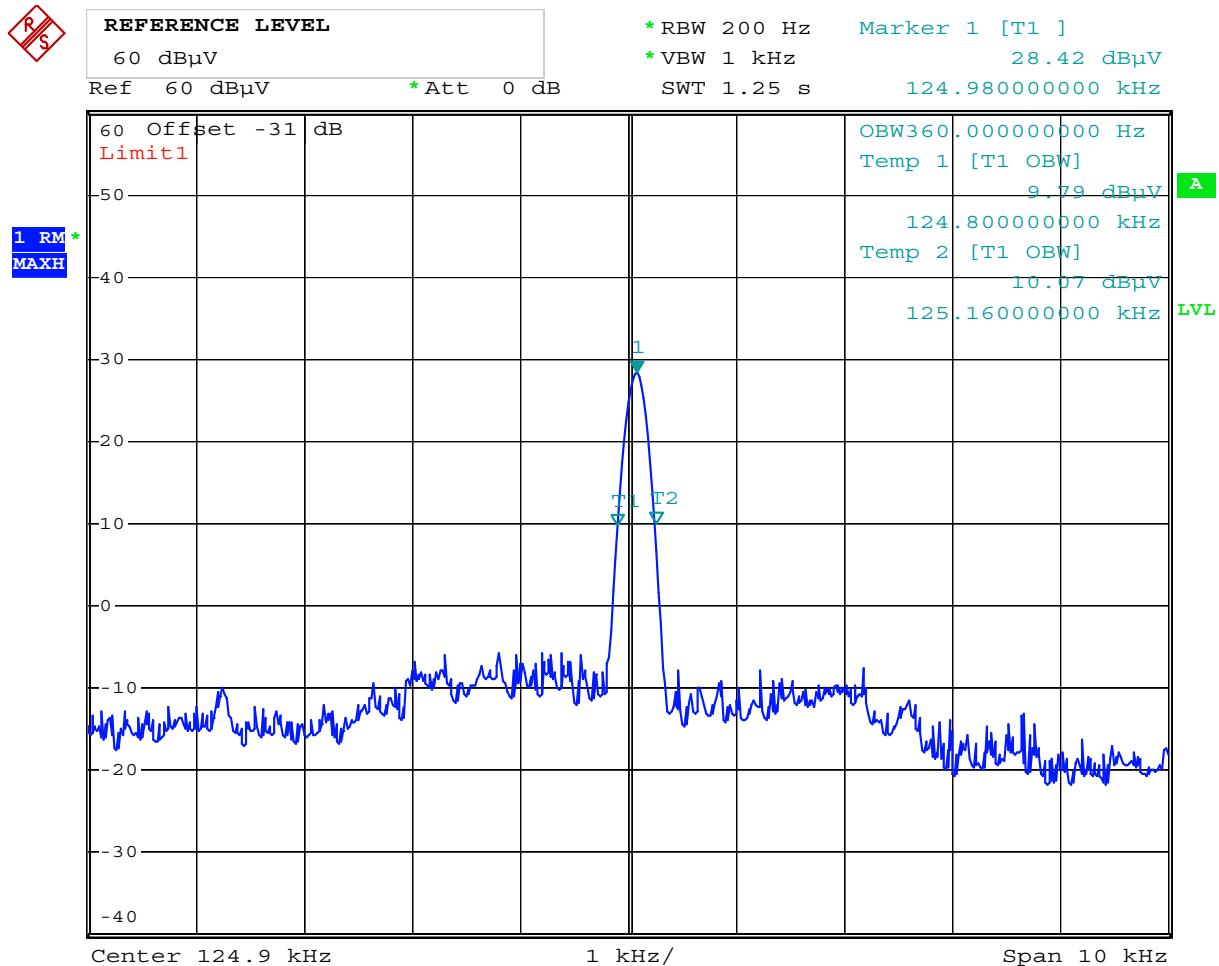

Date: 6.MAR.2007 11:10:30

Occupied Bandwidth (99 %): **0.36**

8.2 Designation of Emissions

| | |
|---------------------------|--|
| Rules and specifications: | CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 1, sections 3.2(h) and 8 |
| Guide: | ANSI C63.4 / TRC-43 |

| | |
|---------------------|----------------------|
| Type of modulation: | Amplitude Modulation |
|---------------------|----------------------|


| | |
|---------------------------------------|--|
| $B_n = \text{Necessary Bandwidth}$ | $B_n = 2BK$ |
| $B = \text{Modulation rate}$ | $B = 5\text{kHz}$ |
| $K = \text{Overall numerical factor}$ | $K = 1$ |
| Calculation: | $B_n = 2 \cdot (5 \text{ kHz}) \cdot 1 = 10 \text{ kHz}$ |

| | |
|---------------------------|----------------|
| Designation of Emissions: | 10K0A1D |
|---------------------------|----------------|

8.3 Restricted Bands of Operation

| | |
|---------------------------|--|
| Rules and specifications: | CFR 47 Part 15, section 15.205(a) IC RSS-210 Issue 6, section 2.2(a) |
| Guide: | ANSI C63.4 |
| Limit: | Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 6, section 2.2(a). |
| Measurement procedure: | Radiated Emission Measurement 9 kHz to 30 MHz (6.3) |

| | |
|----------------|----------------------------------|
| Comment: | |
| Date of test: | 6 March 2007 |
| Test site: | Fully anechoic room, cabin no. 2 |
| Test distance: | 3 meters |

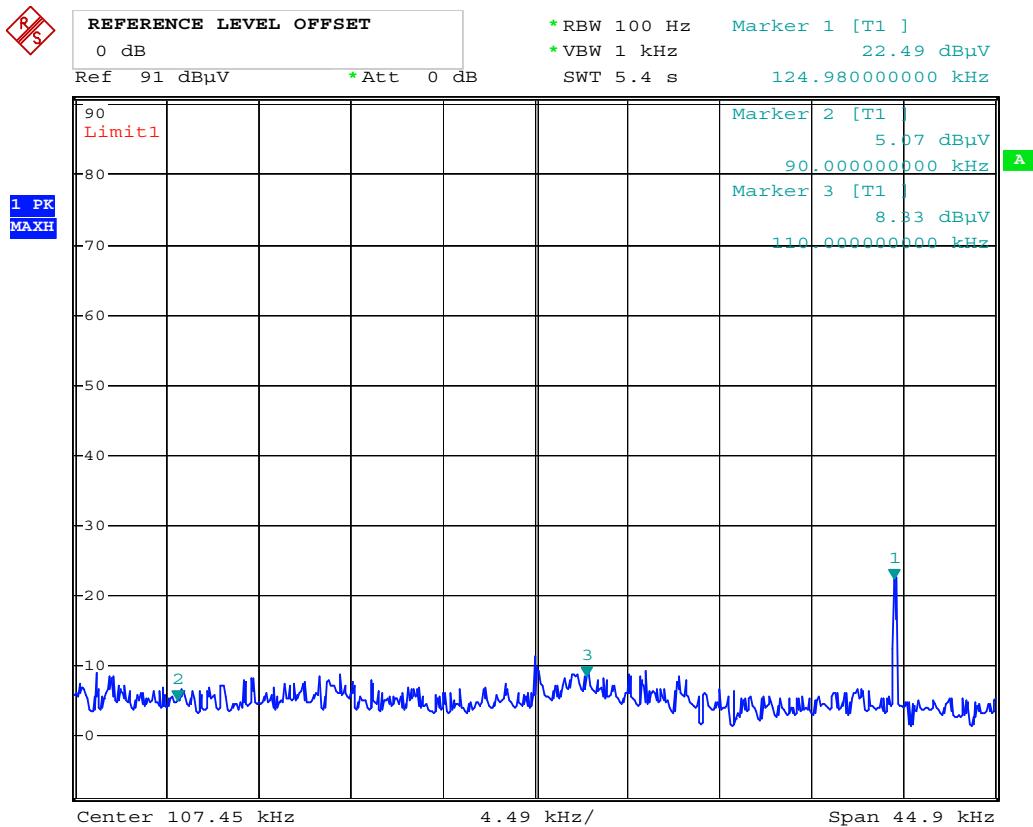

Date: 6.MAR.2007 11:19:04

| | |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

8.4 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

| | | | |
|---------------------------|---|---------------------------------|----------------------|
| Rules and specifications: | CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 1, section 7.2.2 | | |
| Guide: | ANSI C63.4 / CISPR 22 | | |
| Limit: | Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
| | | Quasi-peak | Average |
| | | 0.15 - 0.5 0.5 - 5 5 - 30 | 66 to 56 56 60 |
| Measurement procedure: | Conducted AC Powerline Emission (6.2) | | |

| | |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

| | |
|---------------|---------------------------------------|
| Comment: | |
| Date of test: | 8 March 2007 |
| Mode | Transmitting continuously without tag |
| Test site: | Shielded room, cabin no. 1 |

| | |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

| | |
|------------|----|
| Tested on: | L1 |
|------------|----|

| Frequency (MHz) | Detector | Reading Value (dB μ V) | Correction Factor (dB) | Final Value (dB μ V) | Limit (dB μ V) | Margin (dB) |
|--------------------|------------|----------------------------------|------------------------------|--------------------------------|-----------------------|----------------|
| 0.210 | Quasi-Peak | 46.9 | 0.0 | 46.9 | 63.2 | 16.3 |
| 0.315 | Quasi-Peak | 43.0 | 0.0 | 43.0 | 59.8 | 16.8 |
| 0.425 | Quasi-Peak | 39.0 | 0.0 | 39.0 | 57.3 | 18.3 |
| 0.530 | Quasi-Peak | 36.4 | 0.0 | 36.4 | 56.0 | 19.6 |
| 0.635 | Quasi-Peak | 36.2 | 0.0 | 36.2 | 56.0 | 19.8 |
| 0.740 | Quasi-Peak | 36.2 | 0.0 | 36.2 | 56.0 | 19.8 |
| 2.010 | Quasi-Peak | 31.5 | 0.0 | 31.5 | 56.0 | 24.5 |
| 2.535 | Quasi-Peak | 33.7 | 0.0 | 33.7 | 56.0 | 22.3 |
| 3.420 | Quasi-Peak | 33.8 | 0.0 | 33.8 | 56.0 | 22.2 |
| 3.695 | Quasi-Peak | 32.8 | 0.0 | 32.8 | 56.0 | 23.2 |
| 4.645 | Quasi-Peak | 31.2 | 0.0 | 31.2 | 56.0 | 24.8 |

Tested on:

N

| Frequency (MHz) | Detector | Reading Value (dB μ V) | Correction Factor (dB) | Final Value (dB μ V) | Limit (dB μ V) | Margin (dB) |
|--------------------|------------|----------------------------------|------------------------------|--------------------------------|-----------------------|----------------|
| 0.210 | Quasi-Peak | 44.8 | 0.0 | 44.8 | 63.2 | 18.4 |
| 0.315 | Quasi-Peak | 40.3 | 0.0 | 40.3 | 59.8 | 19.5 |
| 0.424 | Quasi-Peak | 36.7 | 0.0 | 36.7 | 57.4 | 20.7 |
| 0.631 | Quasi-Peak | 35.1 | 0.0 | 35.1 | 56.0 | 20.9 |
| 0.740 | Quasi-Peak | 35.1 | 0.0 | 35.1 | 56.0 | 20.9 |
| 0.950 | Quasi-Peak | 35.0 | 0.0 | 35.0 | 56.0 | 21.0 |
| 1.055 | Quasi-Peak | 35.5 | 0.0 | 35.5 | 56.0 | 20.5 |
| 1.370 | Quasi-Peak | 35.5 | 0.0 | 35.5 | 56.0 | 20.5 |
| 1.580 | Quasi-Peak | 36.5 | 0.0 | 36.5 | 56.0 | 19.5 |
| 2.320 | Quasi-Peak | 37.2 | 0.0 | 37.2 | 56.0 | 18.8 |
| 2.540 | Quasi-Peak | 37.5 | 0.0 | 37.5 | 56.0 | 18.5 |
| 3.378 | Quasi-Peak | 38.7 | 0.0 | 38.7 | 56.0 | 17.3 |
| 3.800 | Quasi-Peak | 37.8 | 0.0 | 37.8 | 56.0 | 18.2 |
| 4.740 | Quasi-Peak | 35.8 | 0.0 | 35.8 | 56.0 | 20.2 |

Sample calculation of final values:

Final Value (dB μ V) = Reading Value (dB μ V) + Correction Factor (dB)

| | |
|---------------|------------------------------------|
| Comment: | |
| Date of test: | 8 March 2007 |
| Mode | Transmitting continuously with tag |
| Test site: | Shielded room, cabin no. 1 |

| | |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

| | |
|------------|----|
| Tested on: | L1 |
|------------|----|

| Frequency (MHz) | Detector | Reading Value (dB μ V) | Correction Factor (dB) | Final Value (dB μ V) | Limit (dB μ V) | Margin (dB) |
|--------------------|------------|----------------------------------|------------------------------|--------------------------------|-----------------------|----------------|
| 0.214 | Quasi-Peak | 40.2 | 0.0 | 40.2 | 63.0 | 22.8 |
| 0.315 | Quasi-Peak | 39.0 | 0.0 | 39.0 | 59.8 | 20.8 |
| 0.525 | Quasi-Peak | 33.5 | 0.0 | 33.5 | 56.0 | 22.5 |
| 0.630 | Quasi-Peak | 34.7 | 0.0 | 34.7 | 56.0 | 21.3 |
| 0.740 | Quasi-Peak | 35.2 | 0.0 | 35.2 | 56.0 | 20.8 |
| 2.640 | Quasi-Peak | 34.9 | 0.0 | 34.9 | 56.0 | 21.1 |
| 3.150 | Quasi-Peak | 33.9 | 0.0 | 33.9 | 56.0 | 22.1 |
| 3.775 | Quasi-Peak | 32.2 | 0.0 | 32.2 | 56.0 | 23.8 |
| 4.630 | Quasi-Peak | 31.7 | 0.0 | 31.7 | 56.0 | 24.3 |

| | |
|------------|---|
| Tested on: | N |
|------------|---|

| Frequency (MHz) | Detector | Reading Value (dB μ V) | Correction Factor (dB) | Final Value (dB μ V) | Limit (dB μ V) | Margin (dB) |
|--------------------|------------|----------------------------------|------------------------------|--------------------------------|-----------------------|----------------|
| 0.210 | Quasi-Peak | 40.9 | 0.0 | 40.9 | 63.2 | 22.3 |
| 0.315 | Quasi-Peak | 38.3 | 0.0 | 38.3 | 59.8 | 21.5 |
| 0.740 | Quasi-Peak | 35.0 | 0.0 | 35.0 | 56.0 | 21.0 |
| 1.055 | Quasi-Peak | 34.3 | 0.0 | 34.3 | 56.0 | 21.7 |
| 1.480 | Quasi-Peak | 34.9 | 0.0 | 34.9 | 56.0 | 21.1 |
| 1.795 | Quasi-Peak | 34.9 | 0.0 | 34.9 | 56.0 | 21.1 |
| 2.000 | Quasi-Peak | 34.2 | 0.0 | 34.2 | 56.0 | 21.8 |
| 2.425 | Quasi-Peak | 36.7 | 0.0 | 36.7 | 56.0 | 19.3 |
| 3.370 | Quasi-Peak | 35.5 | 0.0 | 35.5 | 56.0 | 20.5 |
| 3.775 | Quasi-Peak | 35.7 | 0.0 | 35.7 | 56.0 | 20.3 |
| 4.630 | Quasi-Peak | 34.6 | 0.0 | 34.6 | 56.0 | 21.4 |

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

8.5 Radiated Emission Measurement 9 kHz to 30 MHz

| | | | | |
|---------------------------|---|-----------------------------|-------------------------------|---------------------------------|
| Rules and specifications: | CFR 47 Part 15, sections 15.205 and 15.209 IC RSS-210 Issue 6, sections 2.2 and 2.6 | | | |
| Guide: | ANSI C63.4 | | | |
| Limit: | Frequency of Emission (MHz) | Field Strength (μ V/m) | Field Strength (dB μ V/m) | Measurement Distance d (meters) |
| | 0.009 - 0.490 | 2400/F(kHz) | 67.6 - 20 · log(F(kHz)) | 300 |
| | 0.490 - 1.705 | 24000/F(kHz) | 87.6 - 20 · log(F(kHz)) | 30 |
| | 1.705 - 30.000 | 30 | 29.5 | 30 |
| | Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission. | | | |
| Measurement procedure: | Radiated Emission Measurement 9 kHz to 30 MHz (6.3) | | | |

| | |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

| | |
|---------------|---------------------------------------|
| Comment: | Transmitting continuously without tag |
| Date of test: | 7 March 2007 |
| Test site: | Open field test site |

| | |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

| Extrapolation factor: -40 dB/decade | | | | | | | | | | |
|-------------------------------------|------------|-----------------------|----------------------|----------------------------------|--------------------------------|---------------------------------|-----------------------------------|----------------------------------|-------------------------|----------------|
| Frequency (MHz) | Detector | Distance d1 (m) | Distance d (m) | Reading Value (dB μ V) | Correction Factor (dB/m) | Extrapolation Factor (dB) | Pulse Train Correction (dB) | Final Value (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
| 0.12499 | Quasi-Peak | 10 | 300 | 7.1 | 20.0 | -59.1 | | -32.0 | 25.7 | 57.7 |

Sample calculation of final values:

$$\begin{aligned}\text{Extrapolation Factor (dB)} &= (\log(d) - \log(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dB}\mu\text{V/m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}\end{aligned}$$

Note: Extrapolation factor (dB) and final value (dB μ V/m) are relating to distance d.

| | |
|---------------|------------------------------------|
| Comment: | Transmitting continuously with tag |
| Date of test: | 7 March 2007 |
| Test site: | Open field test site |

| | |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

| Extrapolation factor: -40 dB/decade | | | | | | | | | | |
|-------------------------------------|------------|-----------------------|----------------------|----------------------------------|--------------------------------|---------------------------------|-----------------------------------|----------------------------------|-------------------------|----------------|
| Frequency (MHz) | Detector | Distance d1 (m) | Distance d (m) | Reading Value (dB μ V) | Correction Factor (dB/m) | Extrapolation Factor (dB) | Pulse Train Correction (dB) | Final Value (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
| 0.12499 | Quasi-Peak | 10 | 300 | 7.0 | 20.0 | -59.1 | | -32.1 | 25.7 | 57.8 |

Sample calculation of final values:

$$\begin{aligned}\text{Extrapolation Factor (dB)} &= (\log(d) - \log(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dB}\mu\text{V/m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}\end{aligned}$$

Note: Extrapolation factor (dB) and final value (dB μ V/m) are relating to distance d.

8.6 Radiated Emission Measurement 30 MHz to 1 GHz

| | | | |
|---------------------------|---|--------------------------------|----------------------------------|
| Rules and specifications: | CFR 47 Part 15, section 15.209 IC RSS-210 Issue 6, section 2.6 | | |
| Guide: | ANSI C63.4 | | |
| Limit: | Frequency of Emission (MHz) | Field Strength (μ V/m) | Field Strength (dB μ V/m) |
| | 30 - 88 | 100 | 40.0 |
| | 88 - 216 | 150 | 43.5 |
| | 216 - 960 | 200 | 46.0 |
| | Above 960 | 500 | 54.0 |
| | Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission. | | |
| Measurement procedures: | Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Open Field Test Site (6.5) | | |

| | |
|----------------|---|
| Comment: | Test was performed as "worst case" of prescans. |
| Date of test: | 6 March 2007 |
| Test site: | Frequencies \leq 1 GHz: Open field test site Frequencies $>$ 1 GHz: Fully anechoic room, cabin no. 2 |
| Test distance: | 3 meters |

| | |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

| Frequency (MHz) | Antenna Polarization | Detector | Receiver Reading (dB μ V) | Correction Factor (dB/m) | Pulse Train Correction (dB) | Final Value (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--------------------|-------------------------|------------|-------------------------------------|--------------------------------|-----------------------------------|----------------------------------|-------------------------|----------------|
| 44.180 | vertical | Quasi-Peak | 20.7 | 11.1 | | 31.8 | 40.0 | 8.2 |
| 70.860 | vertical | Quasi-Peak | 18.4 | 9.5 | | 27.9 | 40.0 | 12.1 |
| 72.860 | vertical | Quasi-Peak | 20.0 | 9.4 | | 29.4 | 40.0 | 10.6 |
| 73.860 | vertical | Quasi-Peak | 21.0 | 9.4 | | 30.4 | 40.0 | 9.6 |
| 74.610 | vertical | Quasi-Peak | 18.0 | 9.4 | | 27.4 | 40.0 | 12.6 |
| 77.360 | vertical | Quasi-Peak | 16.3 | 9.4 | | 25.7 | 40.0 | 14.3 |
| 80.360 | vertical | Quasi-Peak | 16.3 | 9.5 | | 25.8 | 40.0 | 14.2 |
| 99.500 | vertical | Quasi-Peak | 21.4 | 10.7 | | 32.1 | 43.5 | 11.4 |
| 103.230 | vertical | Quasi-Peak | 21.5 | 10.9 | | 32.4 | 43.5 | 11.1 |
| 148.960 | vertical | Quasi-Peak | 10.5 | 13.8 | | 24.3 | 43.5 | 19.2 |
| 149.280 | horizontal | Quasi-Peak | 12.7 | 13.9 | | 26.6 | 43.5 | 16.9 |
| 149.290 | vertical | Quasi-Peak | 13.2 | 13.9 | | 27.1 | 43.5 | 16.4 |
| 160.360 | vertical | Quasi-Peak | 7.7 | 14.4 | | 22.1 | 43.5 | 21.4 |
| 185.910 | vertical | Quasi-Peak | 5.0 | 15.8 | | 20.8 | 43.5 | 22.7 |
| 248.800 | horizontal | Quasi-Peak | 6.8 | 17.7 | | 24.5 | 46.0 | 21.5 |
| 324.430 | horizontal | Quasi-Peak | 18.2 | 16.6 | | 34.8 | 46.0 | 11.2 |
| 368.670 | horizontal | Quasi-Peak | 18.8 | 17.9 | | 36.7 | 46.0 | 9.3 |
| 383.420 | horizontal | Quasi-Peak | 10.3 | 18.2 | | 28.5 | 46.0 | 17.5 |
| 398.160 | horizontal | Quasi-Peak | 6.8 | 18.4 | | 25.2 | 46.0 | 20.8 |
| 497.630 | horizontal | Quasi-Peak | 13.8 | 20.3 | | 34.1 | 46.0 | 11.9 |
| 497.650 | vertical | Quasi-Peak | 14.6 | 20.3 | | 34.9 | 46.0 | 11.1 |
| 547.410 | horizontal | Quasi-Peak | 9.5 | 20.9 | | 30.4 | 46.0 | 15.6 |
| 547.440 | vertical | Quasi-Peak | 10.6 | 20.9 | | 31.5 | 46.0 | 14.5 |

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

8.7 Exposure of Humans to RF Fields

| | |
|---------------------------|---------------------------------|
| Rules and specifications: | IC RSS-Gen Issue 1, section 5.5 |
| Guide: | IC RSS-102 Issue 2, section 2.5 |

| Exposure of Humans to RF Fields | | Applicable | Declared by applicant | Measured | Exemption |
|---|--|------------|-----------------------|----------|-----------|
| The antenna is | | | | | |
| <input type="checkbox"/> detachable <p>The conducted output power (CP in watts) is measured at the antenna connector:</p> $CP = \dots \text{W}$ <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input type="checkbox"/> the numerical antenna gain: $G = \dots$</p> $EIRP = G \cdot CP \Rightarrow EIRP = \dots \text{W}$ <p><input type="checkbox"/> the field strength⁵ in V/m: $FS = \dots \text{V/m}$</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots \text{W}$ <p>with:</p> <p>Distance between the antennas in m: $D = \dots \text{m}$</p> | | | | | |
| <input checked="" type="checkbox"/> not detachable <p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by⁵:</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = 1.71 \text{ nW}$ <p>with:</p> <p>Field strength in V/m: $FS = 27.1 \text{ dB}\mu\text{V/m}$ $= 22.65 \mu\text{V/m}$</p> <p>Distance between the two antennas in m: $D = 10 \text{ m}$</p> | | | | | |
| Selection of output power | | | | | |
| <p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> $TP = 1.71 \text{ nW}$ | | | | | |

⁵ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses.
 If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

| Exposure of Humans to RF Fields (continued) | | Applicable | Declared by applicant | Measured | Exemption |
|---|--|------------|-------------------------------------|----------|-------------------------------------|
| Separation distance between the user and the transmitting device is | | | | | |
| <input type="checkbox"/> less than or equal to 20 cm <input checked="" type="checkbox"/> greater than 20 cm | | | <input checked="" type="checkbox"/> | | |
| Transmitting device is | | | | | |
| <input type="checkbox"/> in the vicinity of the human head <input type="checkbox"/> body-worn | | | <input checked="" type="checkbox"/> | | |
| SAR evaluation | | | | | |
| SAR evaluation is required if the separation distance between the user and the device is less than or equal to 20 cm. | | | | | <input type="checkbox"/> |
| <input type="checkbox"/> The device operates from 3 kHz up to 1 GHz inclusively and its source-based time-averaged output power is less than, or equal to 200 mW for General Public Use and 1000 mW for Controlled Use. | | | | | <input type="checkbox"/> |
| <input type="checkbox"/> The device operates above 1 GHz up to 2.2 GHz inclusively and its source-based time-averaged output power is less than, or equal to 100 mW for General Public Use and 500 mW for Controlled Use. | | | | | <input type="checkbox"/> |
| <input type="checkbox"/> The device operates above 2.2 GHz up to 3 GHz inclusively and its source-based time-averaged output power is less than, or equal to 20 mW for General Public Use and 100 mW for Controlled Use. | | | | | <input type="checkbox"/> |
| <input type="checkbox"/> The device operates above 3 GHz up to 6 GHz inclusively and its source-based time-averaged output power) is less than, or equal to 10 mW for General Public Use and 50 mW for Controlled Use. | | | | | <input type="checkbox"/> |
| <input type="checkbox"/> SAR evaluation is documented in test report no. | | | | | |
| RF exposure evaluation | | | | | |
| RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm. | | | | | <input checked="" type="checkbox"/> |
| <input checked="" type="checkbox"/> The device operates below 1.5 GHz and its e.i.r.p. is equal to or less than 2.5 W. | | | | | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> The device operates at or above 1.5 GHz and the e.i.r.p. of the device is equal to or less than 5 W. | | | | | <input type="checkbox"/> |
| <input type="checkbox"/> RF exposure evaluation is documented in test report no. | | | | | |

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

| | | | |
|-------------------------------------|--------------------------|---|--|
| <input checked="" type="checkbox"/> | CFR 47 Part 2 | Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC) | October 1, 2006 |
| <input checked="" type="checkbox"/> | CFR 47 Part 15 | Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC) | August 14, 2006 |
| <input checked="" type="checkbox"/> | ANSI C63.4 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz | December 11, 2003 (published on January 30, 2004) |
| <input checked="" type="checkbox"/> | RSS-Gen | Radio Standards Specification RSS-Gen Issue 1 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada | September 2005 |
| <input checked="" type="checkbox"/> | RSS-210 | Radio Standards Specification RSS-210 Issue 6 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada | September 2005 |
| <input type="checkbox"/> | RSS-310 | Radio Standards Specification RSS-310 Issue 1 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada | September 2005 |
| <input checked="" type="checkbox"/> | RSS-102 | Radio Standards Specification RSS-102 Issue 2: Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) | November 2005 |
| <input type="checkbox"/> | ICES-003 | Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada | February 7, 2004 |
| <input checked="" type="checkbox"/> | CISPR 22 | Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement" | 1997 |
| <input type="checkbox"/> | CAN/CSA-CEI/IEC CISPR 22 | Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment | 2002 |
| <input checked="" type="checkbox"/> | TRC-43 | Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada | October 9, 1982 |

10 Revision History

| Revision | Date | Issued by | Note |
|--------------------|---------------|------------|---------------|
| 000 | 19 March 2007 | M. Steindl | First edition |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| Aktuelle Revision: | 000 | | |

11 Charts taken during testing


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

| | |
|--|--------------------------|
| Model: Orderman OM-TT | |
| Serial no.: new cassis | |
| Applicant: think dig High Tech Solutions GmbH | |
| Test site: Shielded room, cabin no. 1 | |
| Tested on: Linecord AC 115 V power supply Phase L1 | |
| Date of test: 03/08/2007 | Operator: W. Straubinger |
| Test performed: semi automatically | File name: |

| |
|---|
| Mode: - Demo programm running transmitting continuously without tag |
|---|

| |
|---------------------------------------|
| Detector: Peak / Final Results: QP |
|---------------------------------------|

| | |
|--------------------------------|--------------|
| Final results: 20 dB Margin | 25 Subranges |
|--------------------------------|--------------|

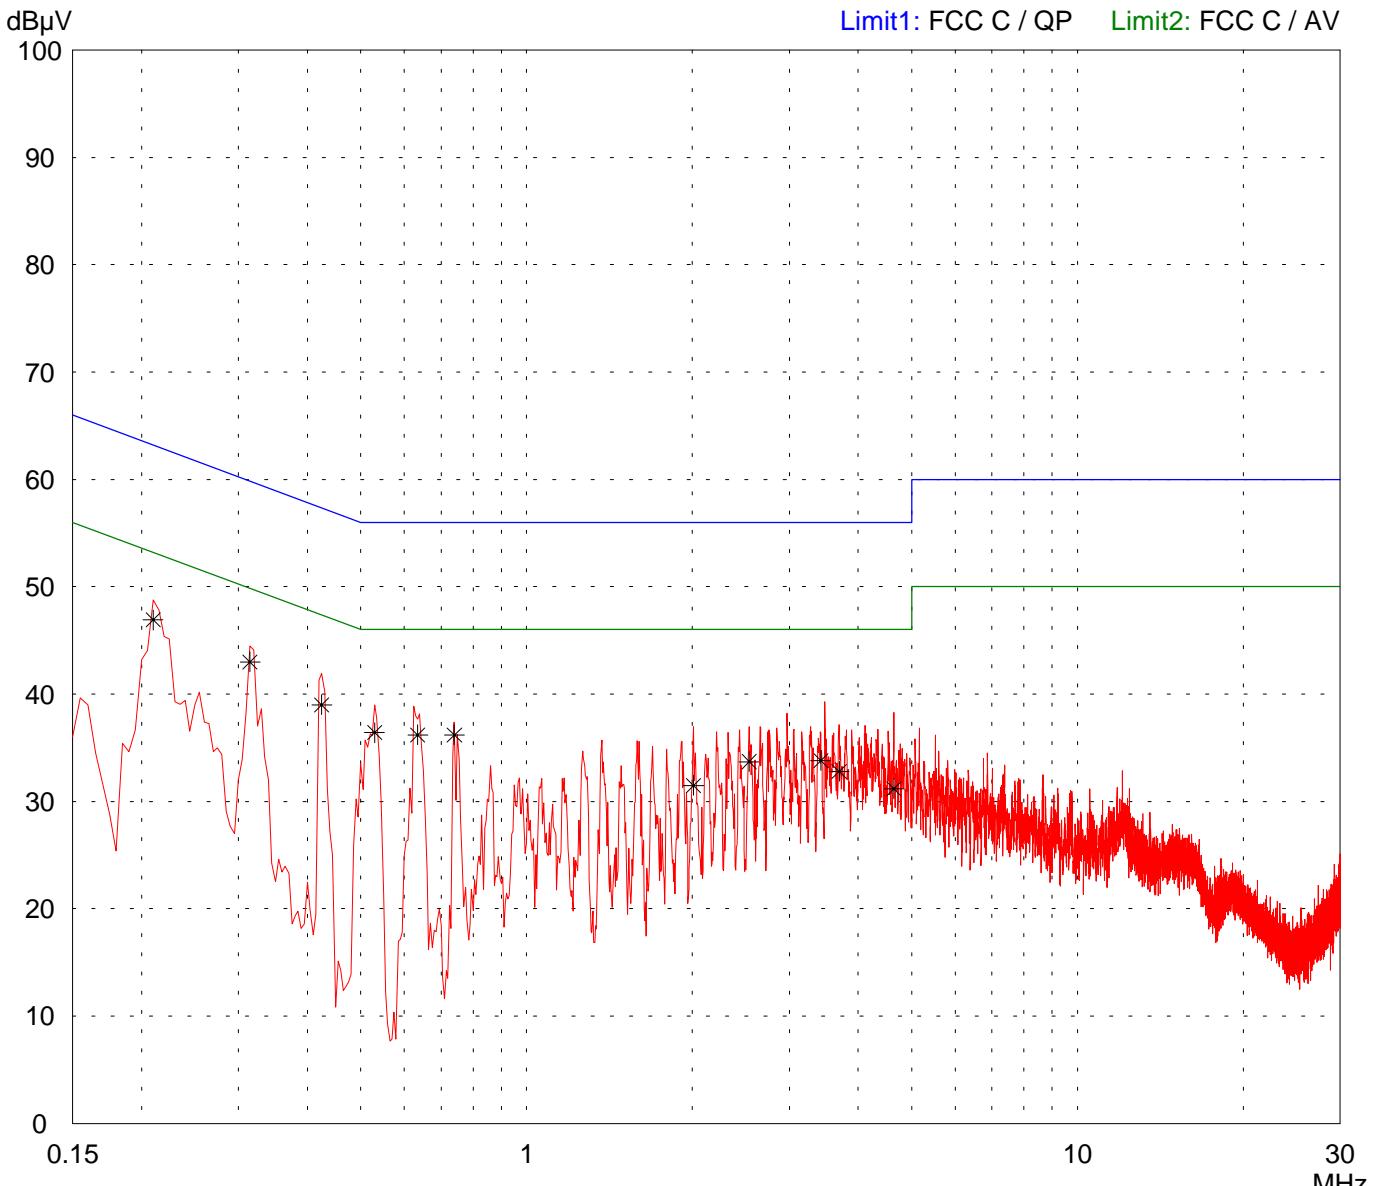

| |
|-----------------------|
| Result: Limit kept |
|-----------------------|

| |
|-------------------------------|
| Project file: 55416-070159 |
|-------------------------------|


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

| | |
|---|-----------------------------|
| Model: Orderman OM-TT | |
| Serial no.: new cassis | |
| Applicant: think dig High Tech Solutions GmbH | |
| Test site: Shielded room, cabin no. 1 | |
| Tested on: Linecord AC 115 V power supply Phase N | |
| Date of test: 03/08/2007 | Operator: W. Straubinger |
| Test performed: semi automatically | File name: |

| |
|--|
| Mode: |
| - Demo programm running transmitting continuously without tag |

| |
|---------------------------------------|
| Detector: Peak / Final Results: QP |
|---------------------------------------|

| |
|----------------|
| Final results: |
| 20 dB Margin |
| 25 Subranges |

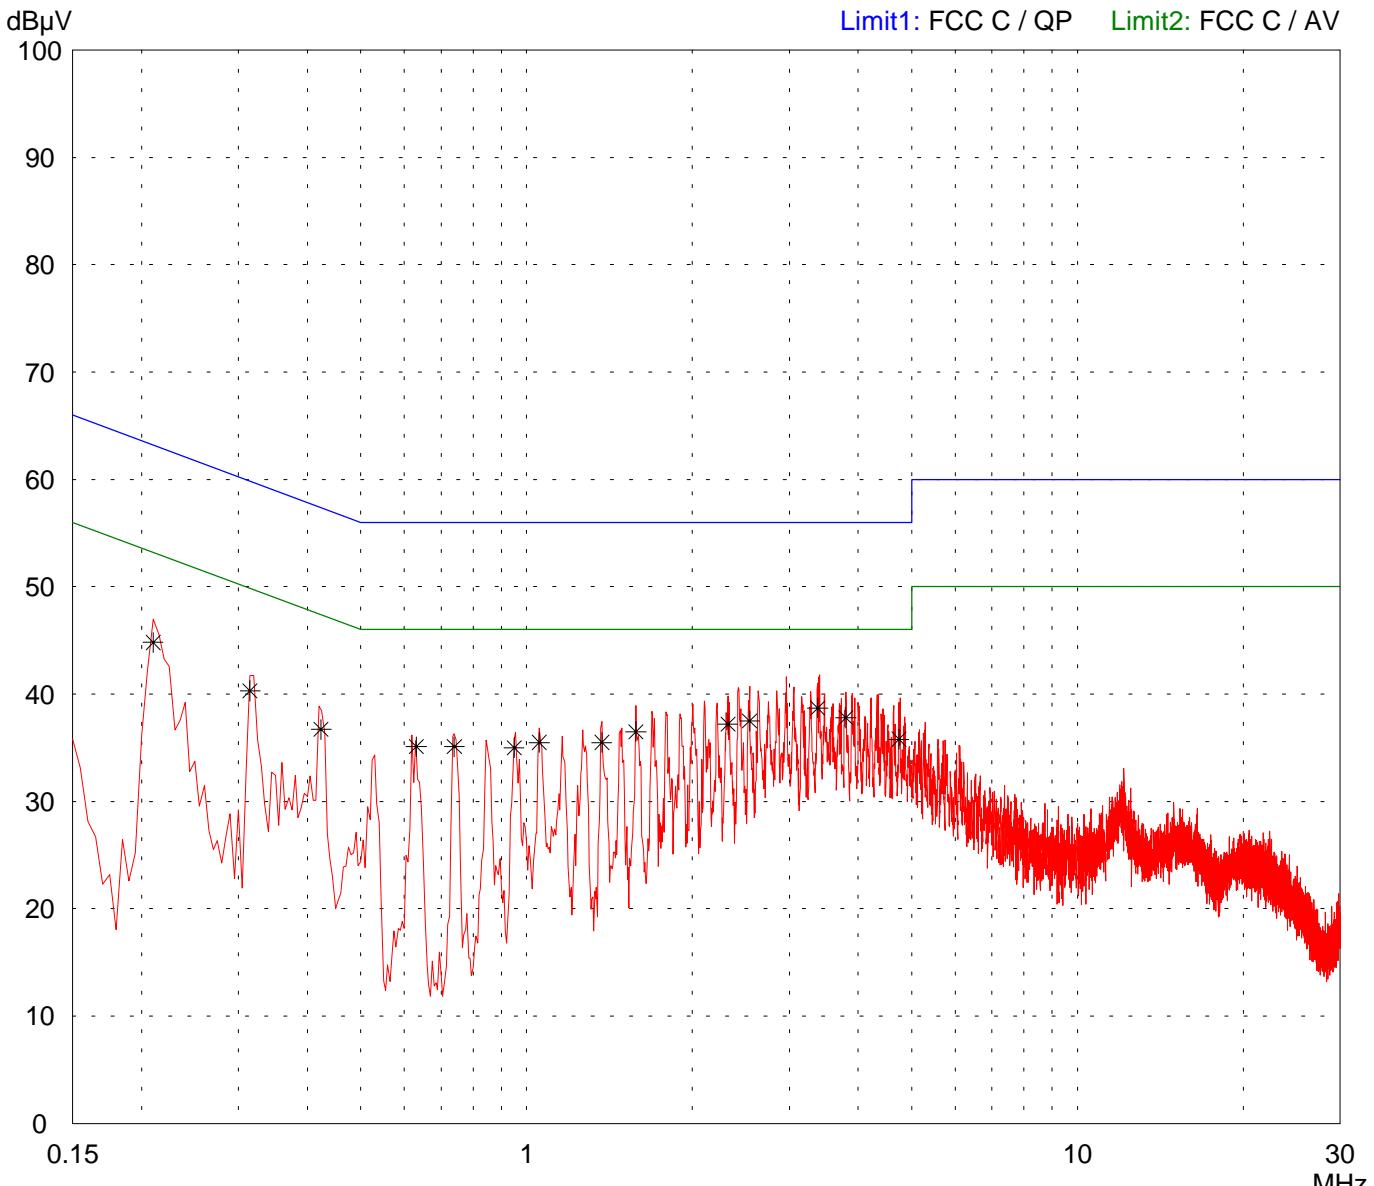

| |
|-----------------------|
| Result: Limit kept |
|-----------------------|

| |
|-------------------------------|
| Project file: 55416-070159 |
|-------------------------------|

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
Orderman OM-TT

Serial no.:
new cassis

Applicant:
think dig High Tech Solutions GmbH

Test site:
Shielded room, cabin no. 1

Tested on:
Linecord AC 115 V power supply
Phase L1

Date of test: 03/08/2007 Operator: W. Straubinger


Test performed: semi automatically File name:

Detector:
Peak / Final Results: QP

Mode:

- Demo programm running
transmitting continuously with tag

Final results:
Selected by hand

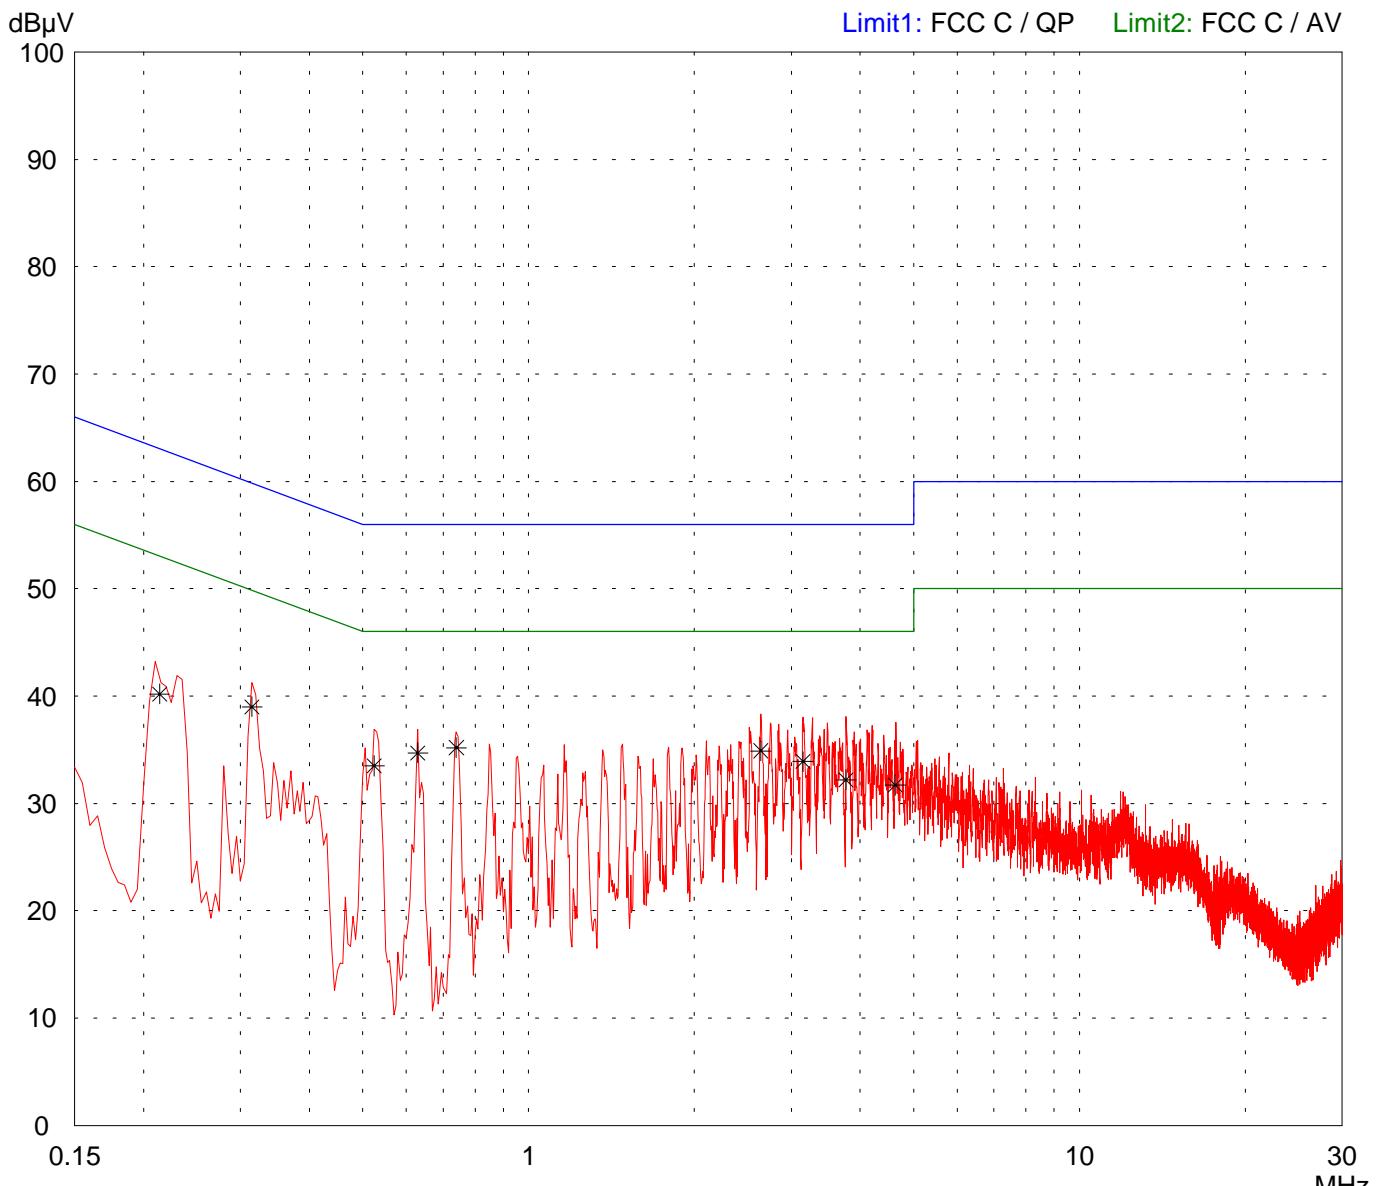

Result:
Limit kept

Project file:
55416-070159


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

| | |
|---|-----------------------------|
| Model: Orderman OM-TT | |
| Serial no.: new cassis | |
| Applicant: think dig High Tech Solutions GmbH | |
| Test site: Shielded room, cabin no. 1 | |
| Tested on: Linecord AC 115 V power supply Phase N | |
| Date of test: 03/08/2007 | Operator: W. Straubinger |
| Test performed: semi automatically | File name: |

| |
|---|
| Mode: |
| - Demo programm running transmitting continuously with tag |

| |
|---------------------------------------|
| Detector: Peak / Final Results: QP |
|---------------------------------------|

| | |
|--------------------------------|--------------|
| Final results: 20 dB Margin | 25 Subranges |
|--------------------------------|--------------|

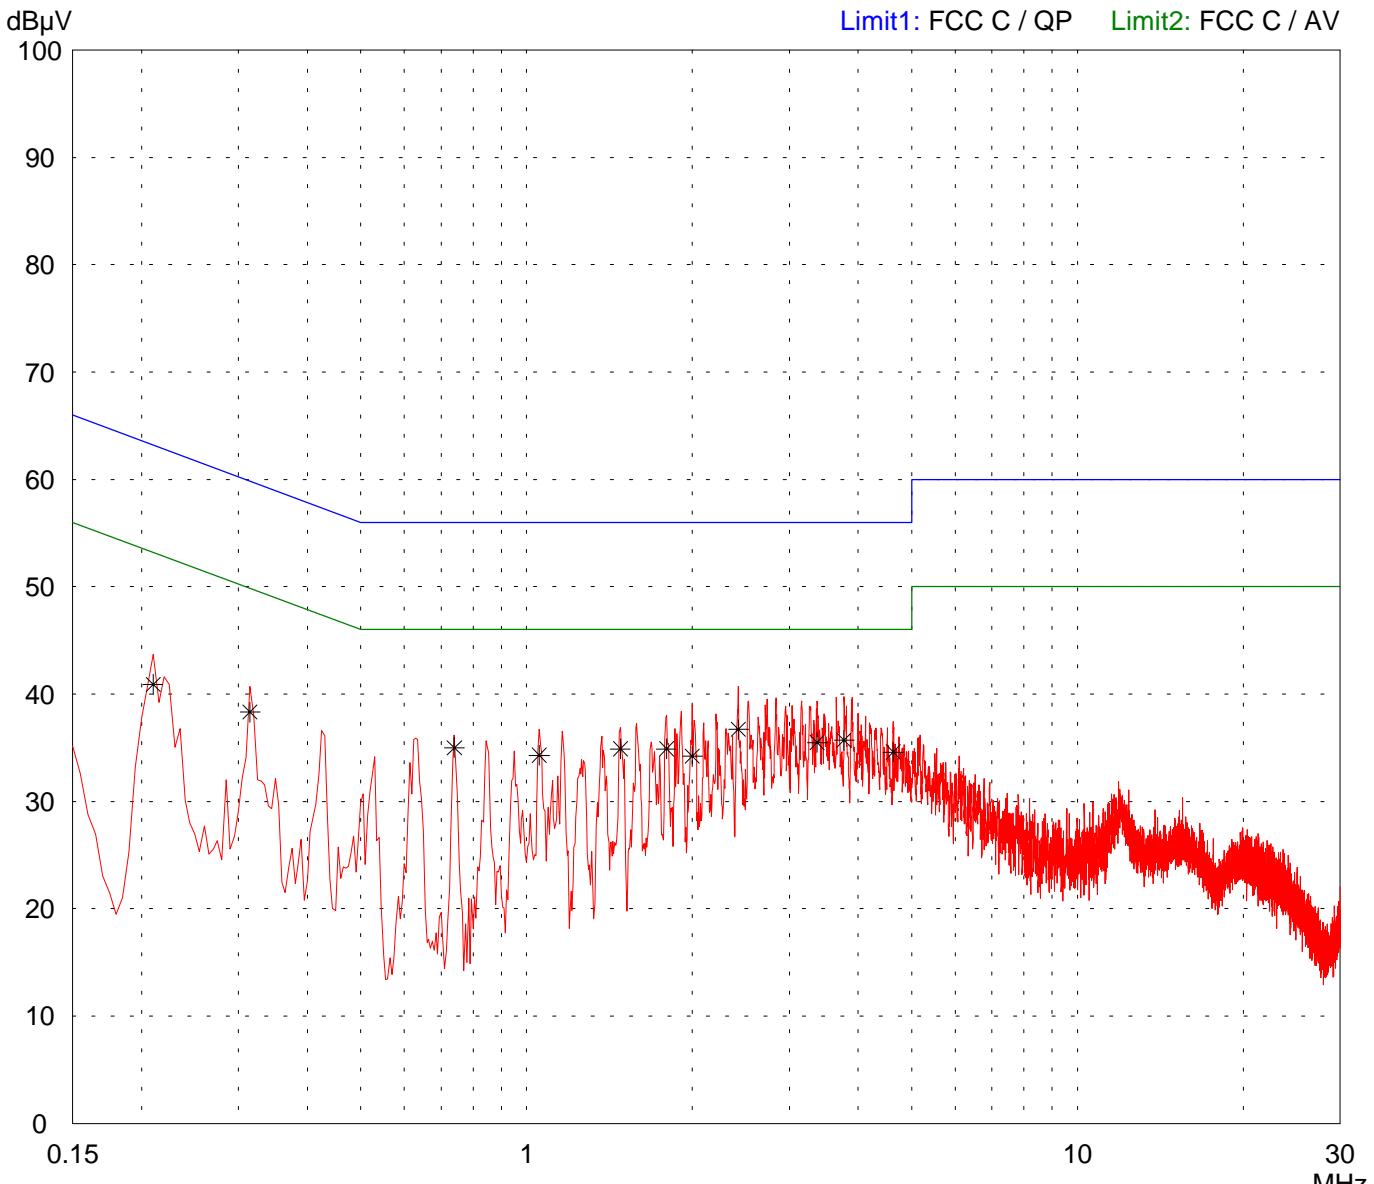

| |
|-----------------------|
| Result: Limit kept |
|-----------------------|

| |
|-------------------------------|
| Project file: 55416-070159 |
|-------------------------------|


**Radiated Emission Test 9 kHz - 30 MHz
acc. to FCC Part 15 (Fully Anechoic Chamber)**

| | |
|--|---------------------------|
| Model: Orderman OM-TT | |
| Serial no.: new cassis | |
| Applicant: think dig High Tech Solutions GmbH | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 3 metres | |
| Date of test: 03/06/2007 | Operator: M. Steindl |
| Test performed: by hand | File name: default.emi |

| | |
|---|--|
| Comment: | |
| - AC 115 V power supply | |
| - Demo program running transmitting continuously | |

| | |
|-------------------|--|
| Detector: Peak | |
|-------------------|--|

| | |
|-------------------------------------|--|
| List of values: Selected by hand | |
|-------------------------------------|--|

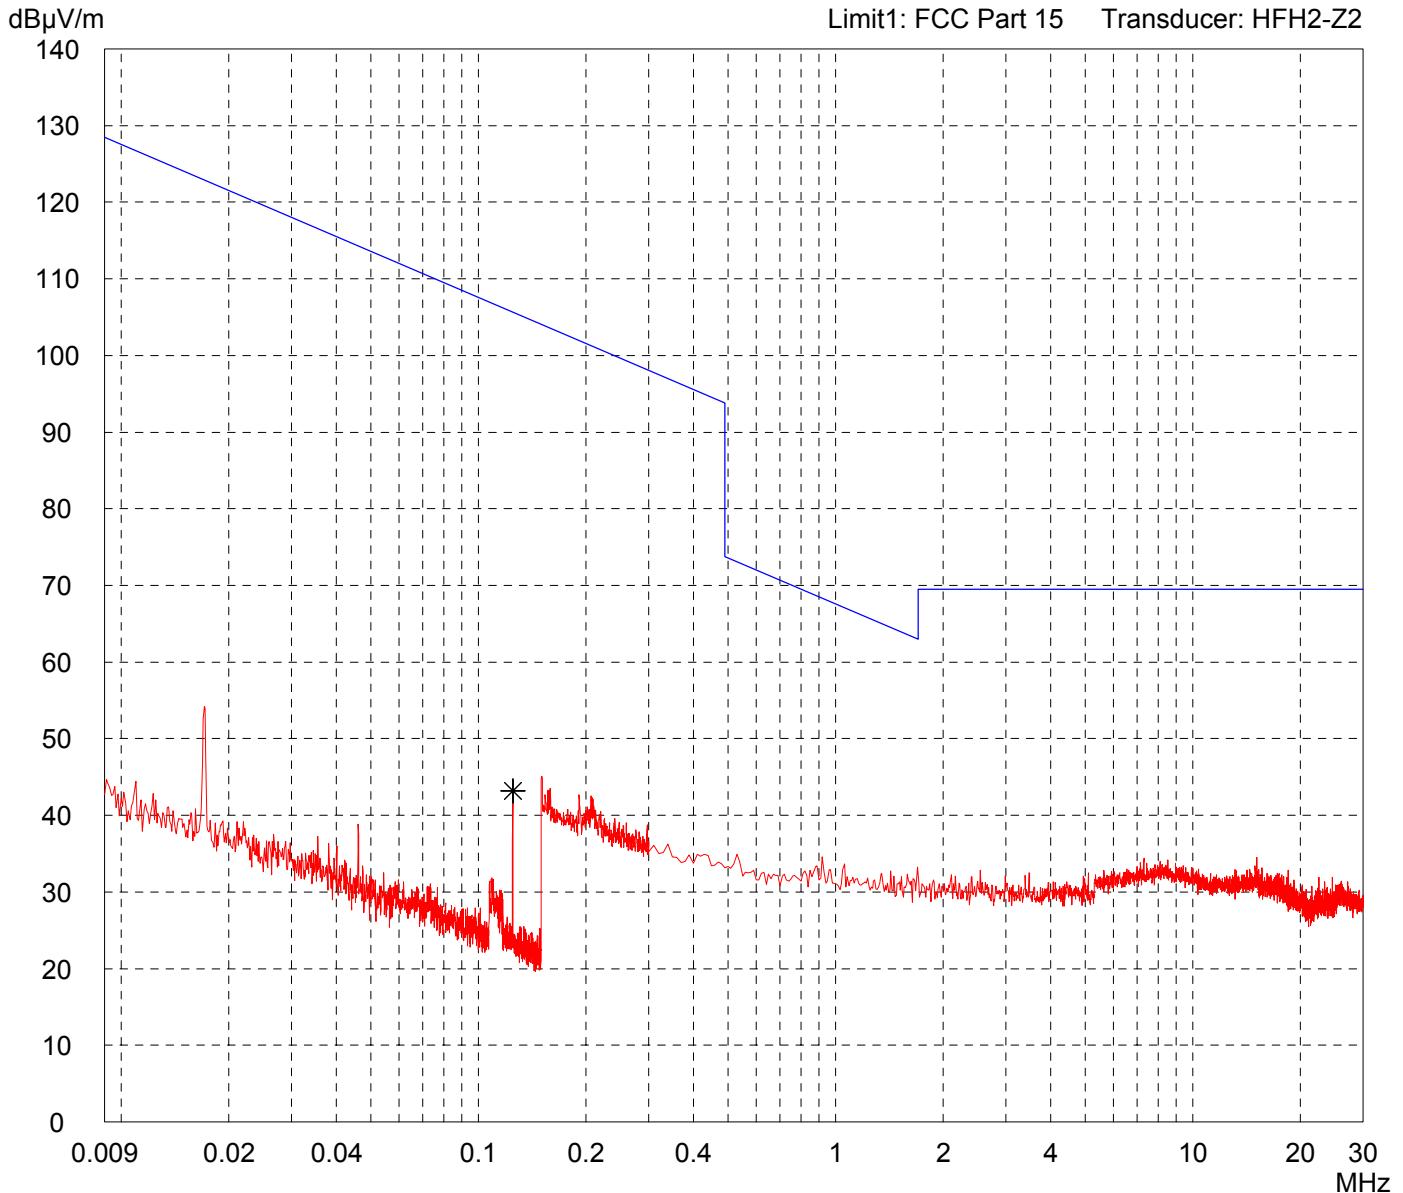

| | |
|--------------------|--|
| Result: Prescan | |
|--------------------|--|

| | |
|------------------------------|--|
| Project file: 55416-70159 | |
|------------------------------|--|

Radiated Emission Test 30 MHz - 1 GHz


acc. to FCC Part 15 (Fully Anechoic Chamber)

| | |
|---|---------------------------|
| Model: Orderman OM-TT | |
| Serial no.: new cassis | |
| Applicant: think dig High Tech Solutions GmbH | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 3 metres Horizontal Polarization | |
| Date of test: 03/06/2007 | Operator: M. Steindl |
| Test performed: automatically | File name: default.emi |

| | |
|---|--|
| Comment: | |
| - AC 115 V power supply | |
| - Demo program running transmitting continuously | |

| | |
|-------------------|--|
| Detector: Peak | |
|-------------------|--|

| | |
|-------------------------------------|--|
| List of values: Selected by hand | |
|-------------------------------------|--|

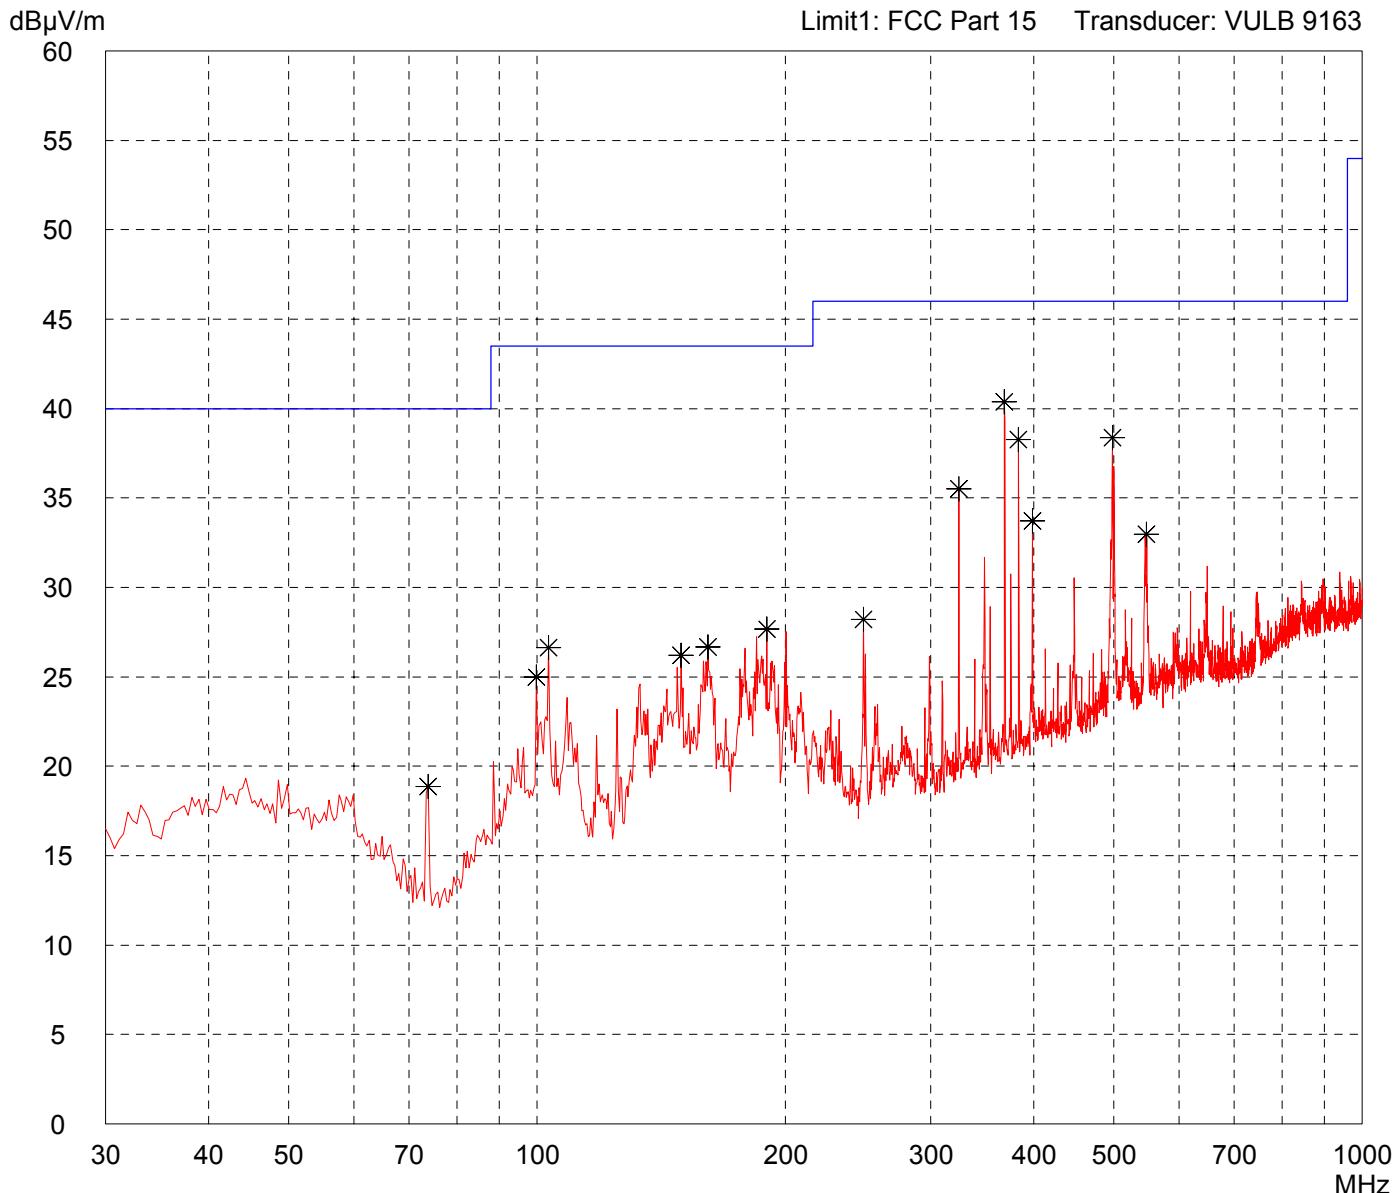

| | |
|--------------------|--|
| Result: Prescan | |
|--------------------|--|

| | |
|------------------------------|--|
| Project file: 55416-70159 | |
|------------------------------|--|


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

| | |
|---|---------------------------|
| Model: Orderman OM-TT | |
| Serial no.: new cassis | |
| Applicant: think dig High Tech Solutions GmbH | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 3 metres Vertical Polarization | |
| Date of test: 03/06/2007 | Operator: M. Steindl |
| Test performed: automatically | File name: default.emi |

| |
|--|
| Comment: |
| - AC 115 V power supply |
| - Demo program running transmitting continuously |

| |
|-------------------|
| Detector: Peak |
|-------------------|

| |
|-------------------------------------|
| List of values: Selected by hand |
|-------------------------------------|

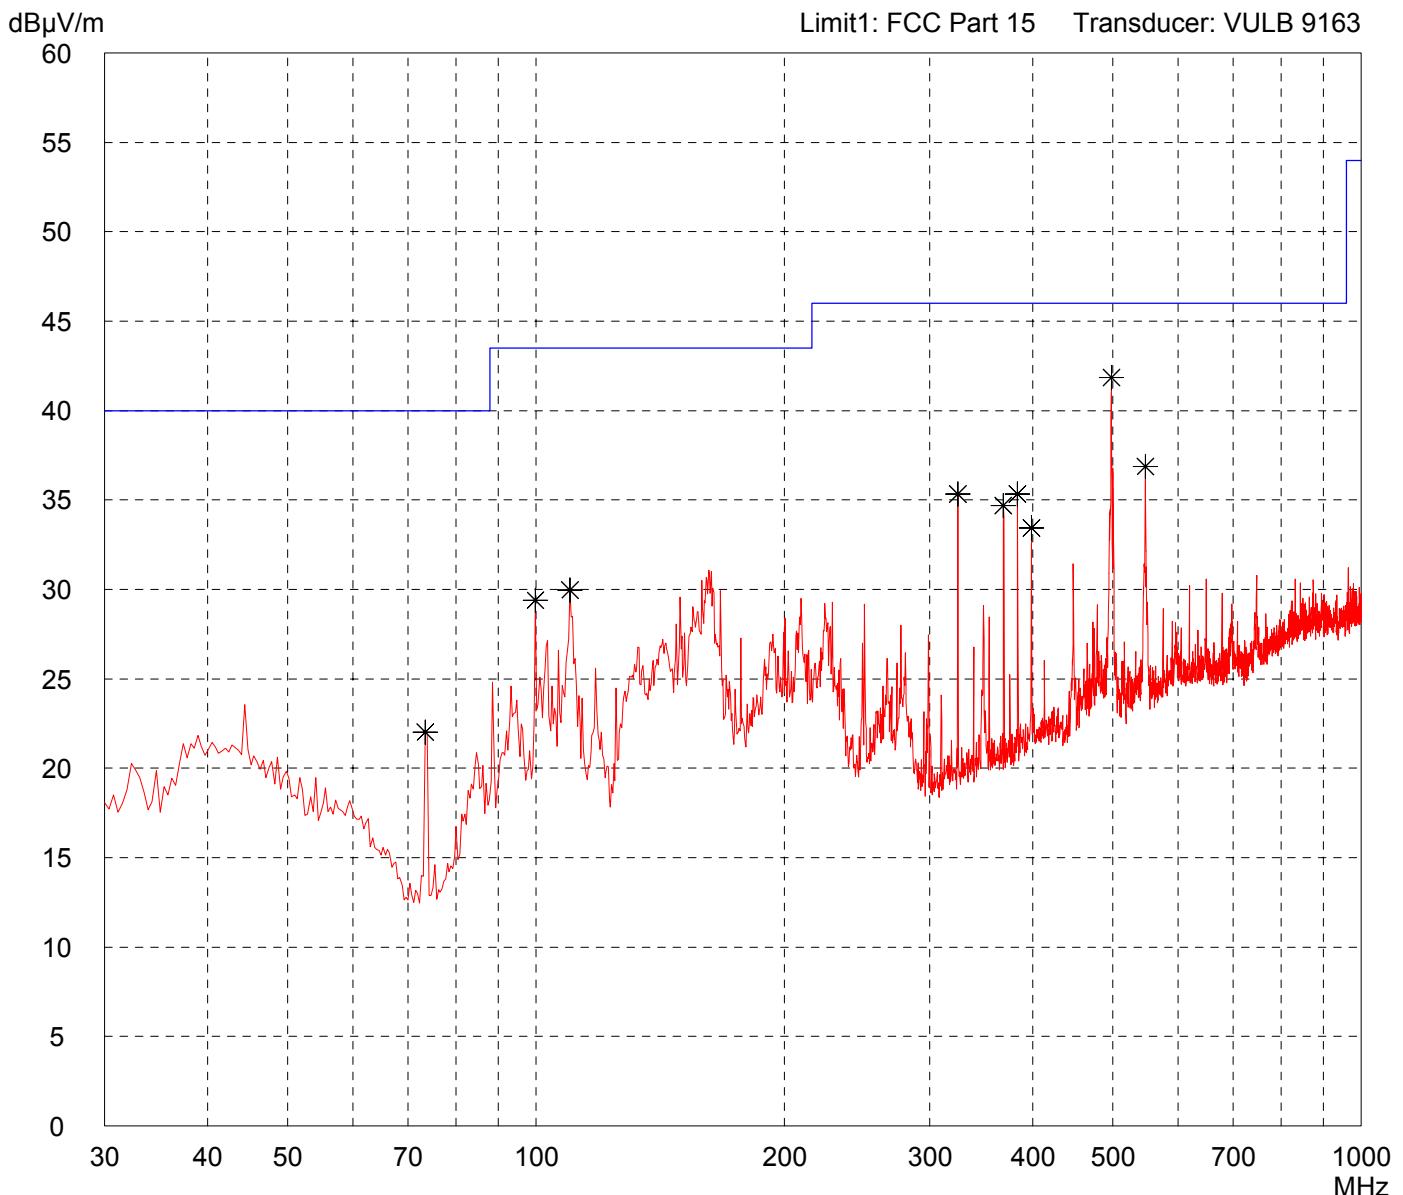

| |
|--------------------|
| Result: Prescan |
|--------------------|

| |
|------------------------------|
| Project file: 55416-70159 |
|------------------------------|


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

| | |
|---|---------------------------|
| Model: Orderman OM-TT | |
| Serial no.: new cassis | |
| Applicant: think dig High Tech Solutions GmbH | |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 3 metres Horizontal Polarization | |
| Date of test: 03/06/2007 | Operator: M. Steindl |
| Test performed: automatically | File name: default.emi |

| |
|--|
| Comment: |
| - AC 115 V power supply |
| - Demo program running transmitting continuously with tag |

| |
|-------------------|
| Detector: Peak |
|-------------------|

| |
|-------------------------------------|
| List of values: Selected by hand |
|-------------------------------------|

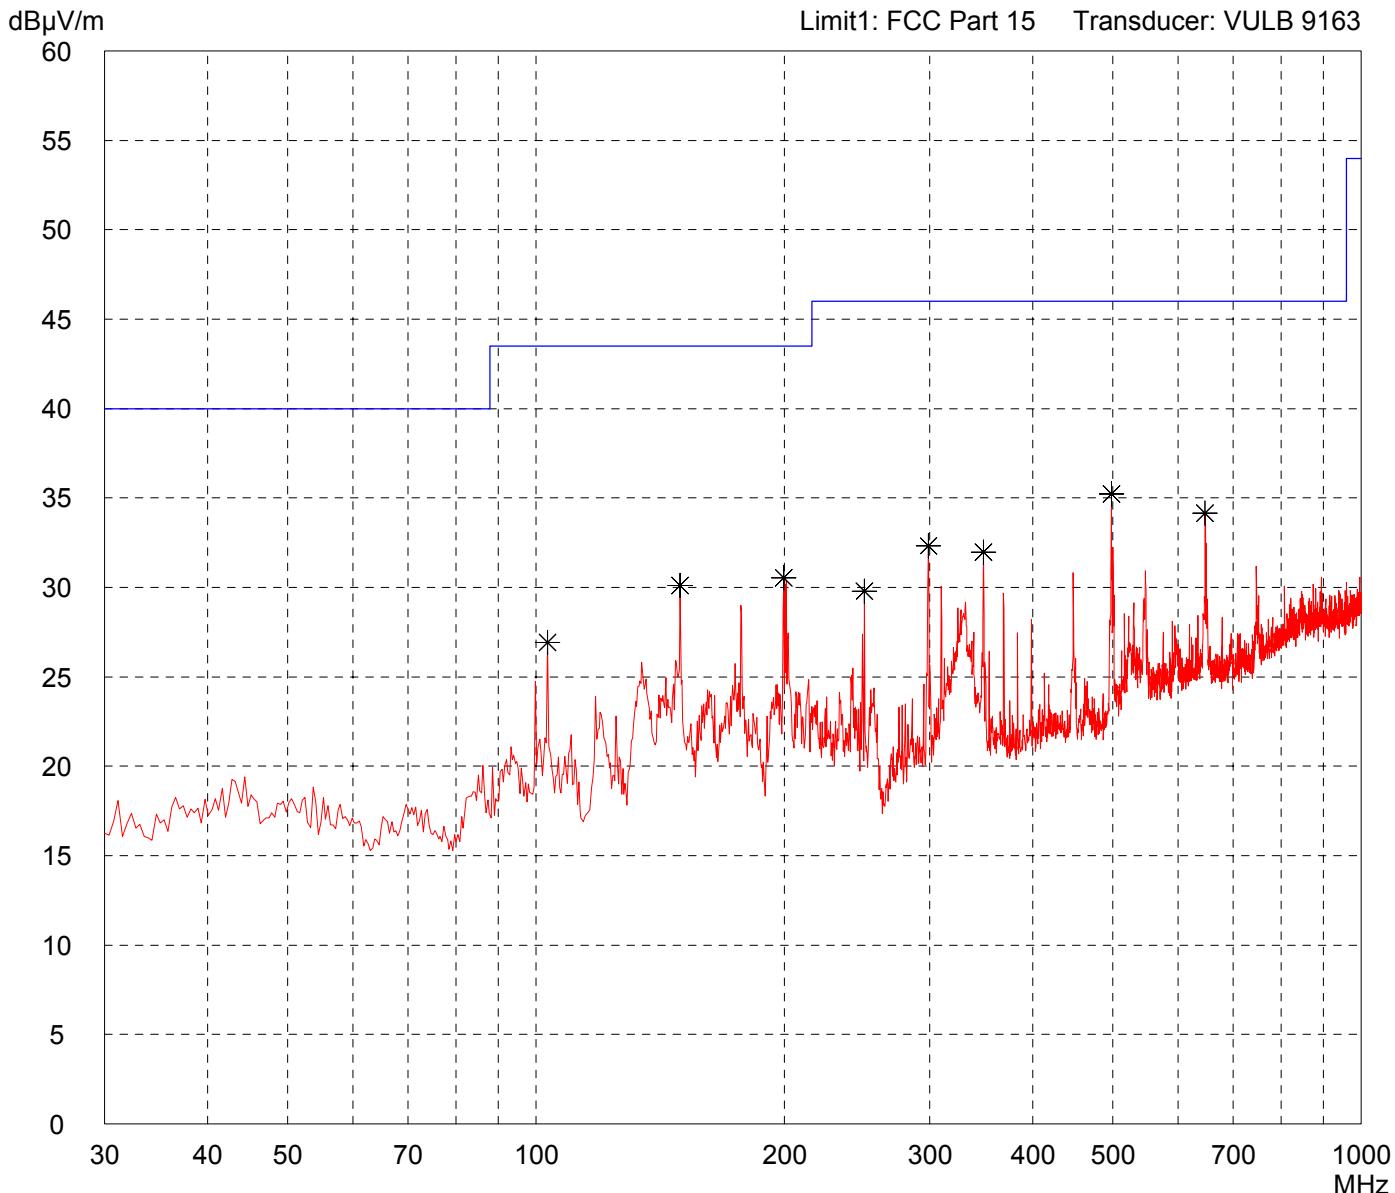

| |
|--------------------|
| Result: Prescan |
|--------------------|


| |
|------------------------------|
| Project file: 55416-70159 |
|------------------------------|

Radiated Emission Test 30 MHz - 1 GHz

acc. to FCC Part 15 (Fully Anechoic Chamber)

| | |
|---|--|
| Model: Orderman OM-TT | Comment: |
| Serial no.: new cassis | - AC 115 V power supply |
| Applicant: think dig High Tech Solutions GmbH | - Demo program running transmitting continuously with tag |
| Test site: Fully anechoic room, cabin no. 2 | |
| Tested on: Test distance 3 metres Vertical Polarization | |
| Date of test: 03/06/2007 | Operator: M. Steindl |
| Test performed: automatically | File name: default.emi |

| | |
|-------------------|--------------------------------|
| Detector: Peak | List of values: |
| | 10 dB Margin 50 Subranges |

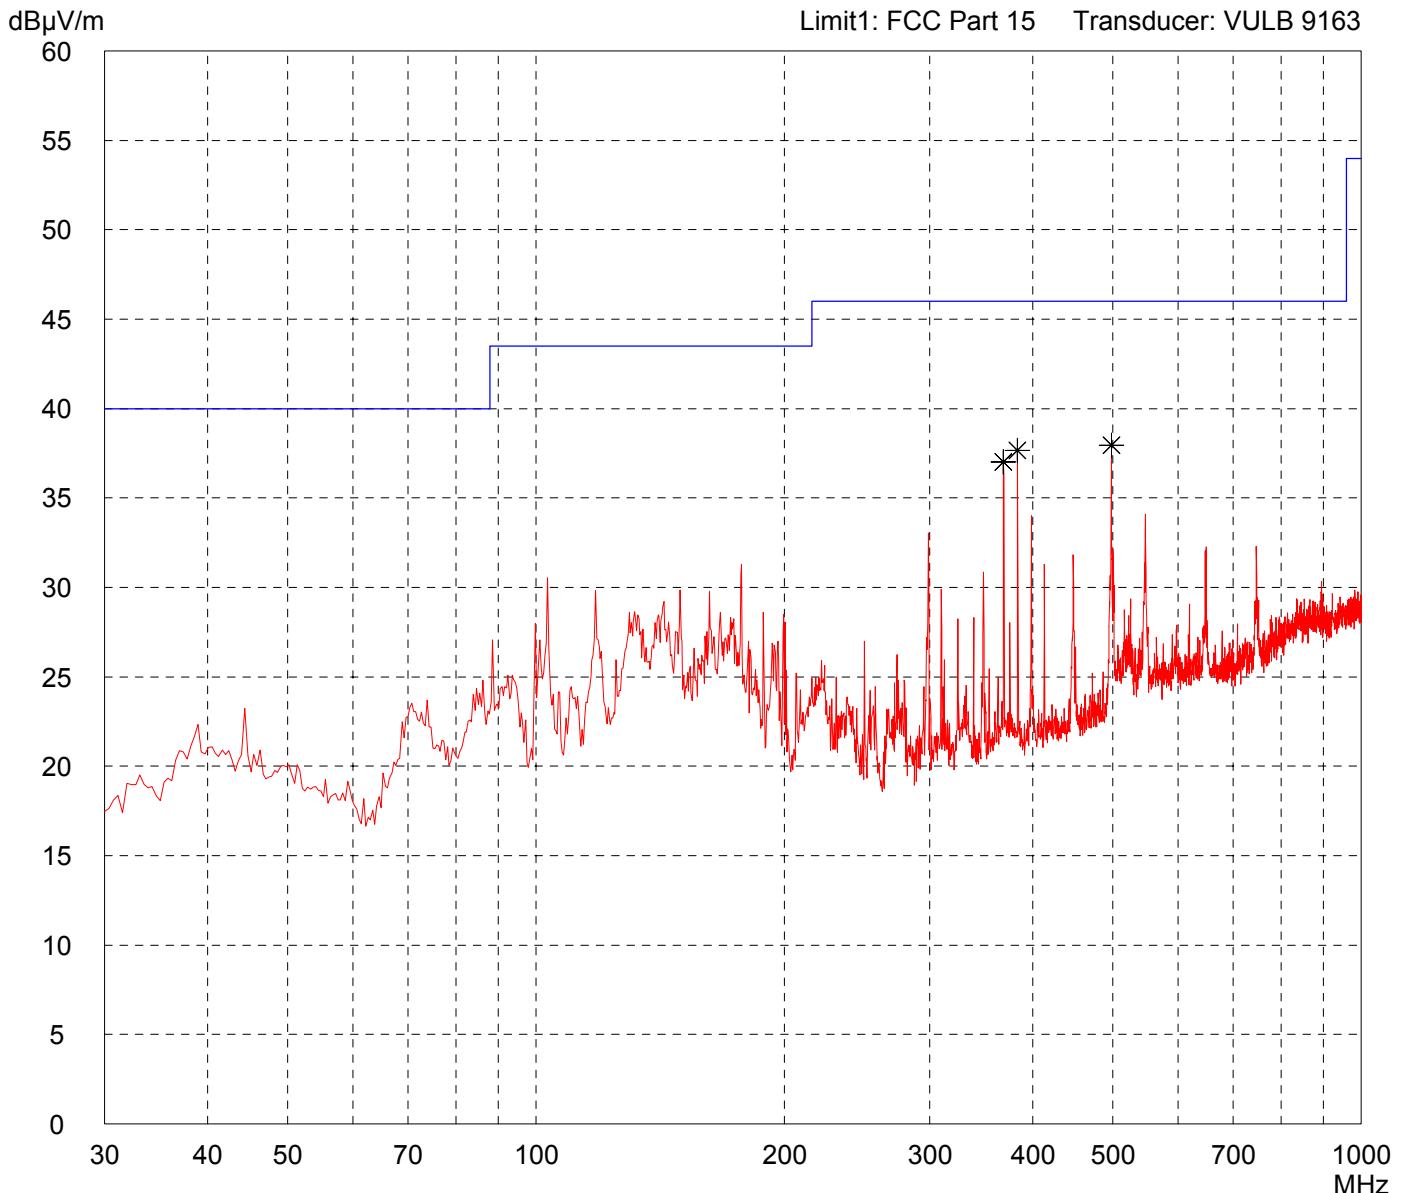

| |
|--------------------|
| Result: Prescan |
|--------------------|

| |
|------------------------------|
| Project file: 55416-70159 |
|------------------------------|