



**CONFORMANCE TEST REPORT  
FOR  
FCC 47 CFR, Part 15 Subpart C  
and  
Canada RSS-210**

**Report No.: 09-02-MAS-189-01**

Client: Ezurio Limited.  
Product: Bluetooth Intelligent Serial Module version II  
Model: TRBLU23-00300-xx-01  
FCC ID: PI401B  
IC ID: 1931B-BISMII  
Manufacturer/supplier: Sanmina-SCI (Thailand) Ltd  
Date test item received: 2009/02/23  
Date test campaign completed: 2009/03/13  
Date of issue: 2009/03/13




**The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.**

*Total number of pages of this test report: 25 pages*

*Total number of pages of photos: External photos 2 pages*

*Internal photos 3 pages*

*Setup photos 4 pages*

| Test Engineer  | Checked By   | Approved By  |
|--|--|--|
| <br>Ivan Tsai | <br>David You | <br>Joe Hsieh |

ELECTRONICS TESTING CENTER, TAIWAN  
NO.8, LANE 29, WENMING RD.,  
LESHAN TSUEN, GUISHAN SHIANG,  
TAOYUAN COUNTY, TAIWAN 33383,  
R.O.C.TAIWAN, R.O.C.

TEL: (03) 3276170~4  
INT: +886-3-3276170~4  
FAX: (03) 3276188  
INT: +886-3-3276188



Client : Ezurio Limited.  
Address : Saturn House, Mercury Park, Wycombe Lane, Wooburn Green HP10 0HH UK  
Manufacturer : Sanmina-SCI (Thailand) Ltd  
Address : 90 Moo 1 Tiwanon Road, Banmai Muang, Pathumthani 12000, Thailand  
EUT : Bluetooth Intelligent Serial Module version II  
Trade name : EZURiO  
Model No. : TRBLU23-00300-xx-01  
Power Source : DC 5V (From DC Power Supply to Test Jig)  
Regulations applied : FCC 47 CFR, Part 15 Subpart C (2008)  
Canada RSS-210 Issue 7 (2008) / RSS-Gen Issue 2 (2008)

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to believe the sellers from their legal and/or contractual obligations.

The compliance test is only certified for the test equipment and the results of the testing report relate only to the item tested. The compliance test of this report was conducted in accordance with the appropriate standards. It's not intention to assure the quality and performance of the product. This report shall not be reproduced except in full, without the approval of ETC. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Laboratory Introduction: Electronics Testing Center, Taiwan is recognized, filed and mutual recognition arrangement as following:

- ① ISO9001: TüV Product Service
- ② ISO/IEC 17025: BSMI, CNLA, DGT, NVLAP, CCIBLAC, UL, Compliance
- ③ Filing: FCC, Industry Canada, VCCI
- ④ MRA: Australia, Hong Kong, New Zealand, Singapore, USA, Japan, Korea, China, APLAC through TAF
- ⑤ FCC Registration Number: 90588, 91094, 91095



NVLAP Lab Code 200133-0

| <b>Table of Contents</b>                            | <b>Page</b> |
|---|-------------|
| <b>1 GENERAL INFORMATION .....</b>                  | <b>4</b>    |
| 1.1 Product Description .....                       | 4           |
| 1.2 Characteristics of Device .....                 | 4           |
| 1.3 Test Methodology .....                          | 4           |
| 1.4 Modification List of EUT .....                  | 4           |
| 1.5 Test Facility .....                             | 4           |
| 1.6 Test Summary .....                              | 4           |
| <b>2 PROVISIONS APPLICABLE .....</b>                | <b>5</b>    |
| 2.1 Definition .....                                | 5           |
| 2.2 Requirement for Compliance .....                | 6           |
| 2.3 Restricted Bands of Operation .....             | 7           |
| 2.4 Labeling Requirement .....                      | 7           |
| 2.5 User Information .....                          | 8           |
| <b>3. SYSTEM TEST CONFIGURATION .....</b>           | <b>9</b>    |
| 3.1 Justification .....                             | 9           |
| 3.2 Devices for Tested System .....                 | 9           |
| <b>4 RADIATED EMISSION MEASUREMENT .....</b>        | <b>10</b>   |
| 4.1 Applicable Standard .....                       | 10          |
| 4.2 Measurement Procedure .....                     | 10          |
| 4.3 Measuring Instrument .....                      | 12          |
| 4.4 Radiated Emission Data .....                    | 13          |
| 4.5 Field Strength Calculation .....                | 22          |
| <b>5 ANTENNA REQUIREMENT .....</b>                  | <b>23</b>   |
| 5.1 Standard Applicable .....                       | 23          |
| 5.2 Antenna Construction and Directional Gain ..... | 23          |
| <b>6 OUTPUT POWER MEASUREMENT .....</b>             | <b>24</b>   |
| 6.1 Standard Applicable .....                       | 24          |
| 6.2 Measurement Procedure .....                     | 24          |
| 6.3 Measurement Equipment .....                     | 24          |
| 6.4 Measurement Data .....                          | 25          |

# 1 GENERAL INFORMATION

## 1.1 Product Description

- a) Type of EUT : Bluetooth Intelligent Serial Module version II
- b) Trade Name : EZURiO
- c) Model No. : TRBLU23-00300-xx-01

※ The modification points are as follows to allow use of external antennas:

- 1. Removal of ceramic patch antenna.
- 2. Addition of U.FL connector.

New external antennas:

- (1) Ceramic Patch Antenna, Model: CABPB1240A
- (2) 1/2 Wave Coaxial Dipole Antenna, Model: WCR2400-IP04

This test report pretest some items to check the new EUT is still conform to the rule of FCC.

## 1.2 Characteristics of Device

The EUT is a Bluetooth Intelligent Serial Module version II, based on the Bluetooth technology. Bluetooth is a short-range radio link intended to be a cable replacement between portable or fixed electronic devices. Bluetooth operates in the unlicensed ISM Band at 2.4GHz.

## 1.3 Test Methodology

All testing were performed according to the procedures in ANSI C63.4 (2003) an FCC CFR 47 Part 2 and Part 15.

## 1.4 Modifiction List of EUT

N/A

## 1.5 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

## 1.6 Test Summary

| Requirement        | FCC Paragraph # | IC Paragraph # | Test Pass |
|--------------------|-----------------|----------------|-----------|
| Spurious Emissions | 15.247 (d)      | RSS-210_A8.5   | ☒         |
| Radiated Emission  | 15.247 (d)      | RSS-210_2.2    | ☒         |

## 2 PROVISIONS APPLICABLE

### 2.1 Definition

**Unintentional radiator:**

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

**Class A Digital Device:**

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

**Class B Digital Device :**

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

**Intentional radiator:**

A device that intentionally generates and emits radio frequency energy by radiation or induction.

## 2.2 Requirement for Compliance

### (1) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency<br>MHz | Distance<br>Meters | Radiated<br>dB $\mu$ V/m | Radiated<br>$\mu$ V/m |
|------------------|--------------------|--------------------------|-----------------------|
| 30 - 88          | 3                  | 40.0                     | 100                   |
| 88 - 216         | 3                  | 43.5                     | 150                   |
| 216 - 960        | 3                  | 46.0                     | 200                   |
| above 960        | 3                  | 54.0                     | 500                   |

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

According to 15.247 (d), radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

| MHz               | MHz                   | MHz           | GHz         |
|-------------------|-----------------------|---------------|-------------|
| 0.090 - 0.110     | 16.42-16.423          | 399.9-410     | 4.5-5.25    |
| 0.495 - 0.505 **  | 16.69475 - 16.69525   | 608-614       | 5.35-5.46   |
| 2.1735 - 2.1905   | 16.80425 - 16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67            | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25            | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6               | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2             | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94            | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138               | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05          | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475 - 156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9           | 2655-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17       | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2          | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285               | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4             | 3600-4400     | Above 38.6  |
| 13.36-13.41       |                       |               |             |

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

### 2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

To comply with the FCC RF exposure compliance requirement, this device and its antenna must not be co-located or operating to conjunction with any other antenna or transmitter.



### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification


For the purposes of this test report ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT during the test. Notebook PC was used to control the RF channel under the highest, middle and lowest frequency and transmit the maximum RF power. Customer would not use it. But never the less ancillary equipment can influence the test results.

#### 3.2 Devices for Tested System

| Device   | Manufacture                | Model               | Cable Description  |
|--|----------------------------|---------------------|--|
| * Bluetooth Intelligent Serial Module version II | Sanmina-SCI (Thailand) Ltd | TRBLU23-00300-xx-01 | 0.05m*1, Unshielded Signal Line/Patch antenna                        |
| Test Jig   | N/A                        | N/A                 | 1.5m Unshielded Signal Line/USB<br>1.2m Unshielded Signal Line/RS232 |
| Notebook PC                                      | HP                         | nx6320              | 3.3m*1, Unshielded Power Line  |

#### Remark

1. "\*" means equipment under test.

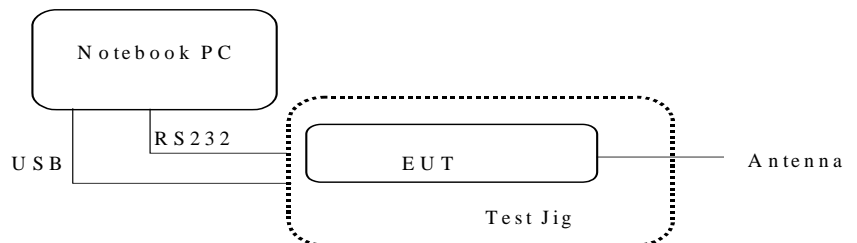

2. Software setting: Bluetest.exe  
 Power setting (Ext, Int): (255, 61)

## 4 RADIATED EMISSION MEASUREMENT

### 4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and digitally modulated, and the out band emission shall be comply with § 15.247 (c)

### 4.2 Measurement Procedure

#### A.Preliminary Measurement For Portable Devices.

For movable devices, the following procedure was performed to determine the maximum emission axis of EUT (X,Y and Z axis):

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antennna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. The axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.
4. The position in which the maximum noise occurred was “Z axis”. (Please see the test setup photos)

#### B. Final Measurement

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively. Turn on EUT and make sure that it is in continuous operating function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a semi-anechoic chamber to determine the accurate frequencies of higher emissions and then each selected frequency is precisely measured. As the same purpose, for emission measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission measured below and above 1 GHz, set the spectrum analyzer on a 120 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Figure 1 : Frequencies measured below 1 GHz configuration


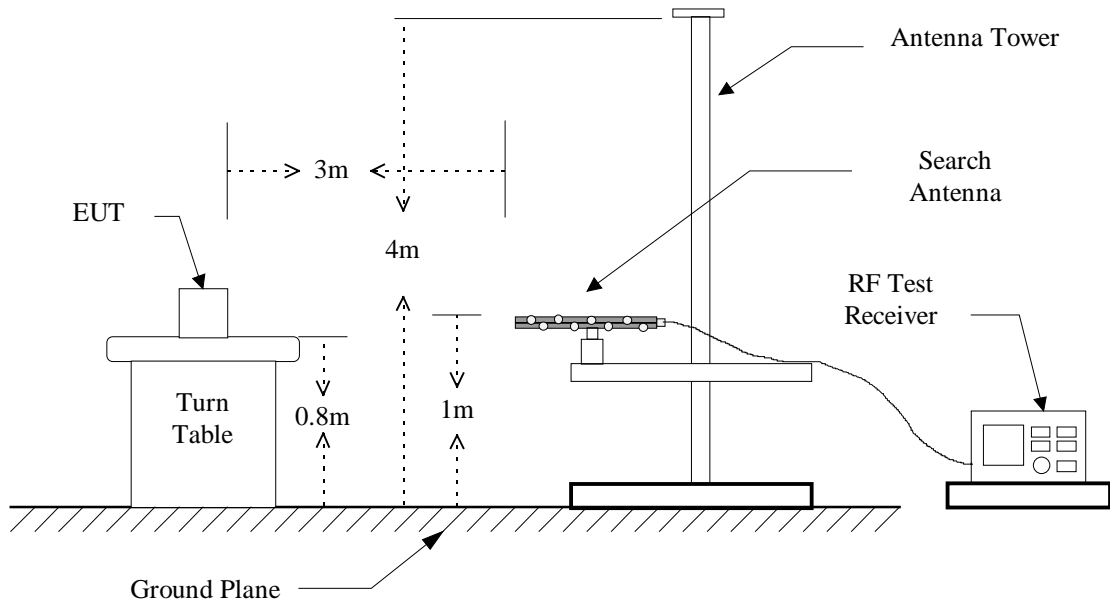


Figure 2 : Frequencies measured above 1 GHz configuration

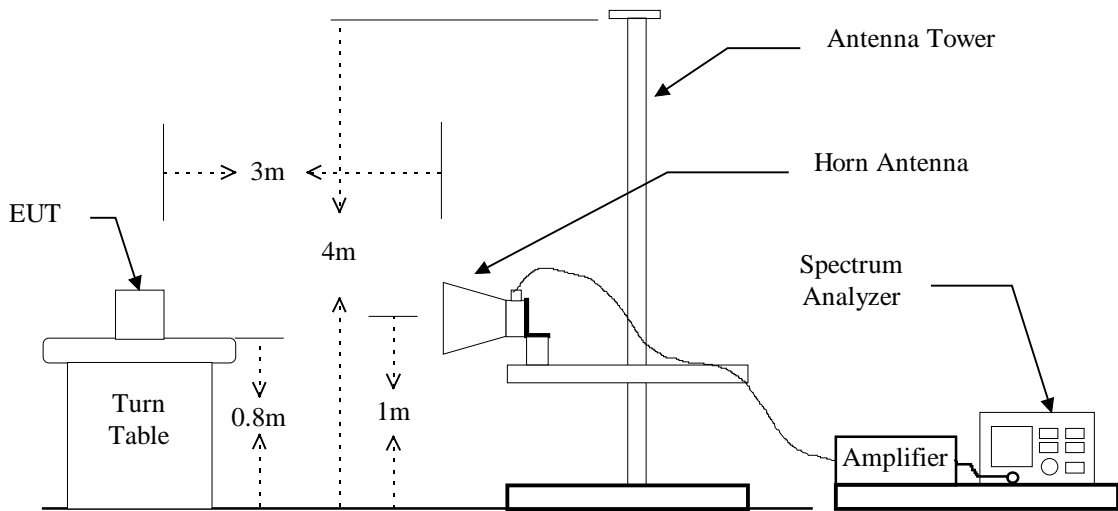

### 4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement :

| Equipment         | Manufacturer    | Model No. | Next Cal. Due |
|-------------------|-----------------|-----------|---------------|
| EMI Test Receiver | R&S             | ESIB7     | 07/17/2009    |
| Spectrum Analyzer | Rohde & Schwarz | FSU46     | 11/24/2009    |
| Horn Antenna      | EMCO            | 3115      | 06/12/2009    |
| BiLog Antenna     | Schaffner       | CBL 6112B | 07/03/2009    |
| Horn Antenna      | COM-POWER       | AH-118    | 04/20/2009    |
| Preamplifier      | Hewlett-Packard | 8449B     | 09/21/2009    |
| SYNESIZED SWEEPER | AGILENT         | 83640B    | 09/21/2009    |

Measuring instrument setup in measured frequency band when specified detector function is used :

| Frequency Band (MHz) | Instrument        | Function   | Resolution Bandwidth | Video Bandwidth |
|----------------------|-------------------|------------|----------------------|-----------------|
| 30 to 1000           | RF Test Receiver  | Quasi-Peak | 120 kHz              | 300 kHz         |
|                      | RF Test Receiver  | Peak       | 120 kHz              | 300 kHz         |
| Above 1000           | Spectrum Analyzer | Peak       | 1 MHz                | 1 MHz           |
|                      | Spectrum Analyzer | Average    | 1 MHz                | 10 Hz           |

## 4.4 Radiated Emission Data

### 4.4.1 RF Portion

#### 4.4.1.1 Patch antenna

a) Channel 0

Operation Mode : Transmitting

Fundamental Frequency : 2402 MHz

Test Date : Feb. 24, 2009 Temperature : 21°C

Humidity : 64%

| Frequency<br>(MHz) | Reading (dBUV) |     |     |     | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBUV/m)<br>Peak Ave<br>(H/V Max.) |     | Limit @3m<br>(dBUV/m)<br>Peak Ave. |      |
|--------------------|----------------|-----|-----|-----|-------------------------|--|-----|------------------------------------|------|
|                    | H              |     | V   |     |                         | Peak   | Ave | Peak                               | Ave. |
| 1201.000           | ---            | --- | --- | --- | -15.0                   | ---  | --- | 74.0                               | 54.0 |
| 4804.000           | ---            | --- | --- | --- | 0.6                     | ---  | --- | 74.0                               | 54.0 |
| 12010.000          | ---            | --- | --- | --- | 1.1                     | ---  | --- | 74.0                               | 54.0 |
| 16216.000          | ---            | --- | --- | --- | 11.2                    | ---  | --- | 74.0                               | 54.0 |

b) Channel 39

Fundamental Frequency : 2441 MHz

| Frequency<br>(MHz) | Reading (dBUV) |     |     |     | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBUV/m)<br>Peak Ave<br>(H/V Max.) |     | Limit @3m<br>(dBUV/m)<br>Peak Ave. |      |
|--------------------|----------------|-----|-----|-----|-------------------------|--|-----|------------------------------------|------|
|                    | H              |     | V   |     |                         | Peak   | Ave | Peak                               | Ave. |
| 1220.500           | ---            | --- | --- | --- | -15.0                   | ---  | --- | 74.0                               | 54.0 |
| 4882.000           | ---            | --- | --- | --- | 0.5                     | ---  | --- | 74.0                               | 54.0 |
| 7323.000           | ---            | --- | --- | --- | 2.9                     | ---  | --- | 74.0                               | 54.0 |
| 12205.000          | ---            | --- | --- | --- | 1.1                     | ---  | --- | 74.0                               | 54.0 |
| 19528.000          | ---            | --- | --- | --- | 10.7                    | ---  | --- | 74.0                               | 54.0 |

c) Channel 78

Fundamental Frequency : 2480 MHz

| Frequency<br>(MHz) | Reading (dBUV) |     |     |     | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBUV/m)<br>Peak Ave<br>(H/V Max.) |     | Limit @3m<br>(dBUV/m)<br>Peak Ave. |      |
|--------------------|----------------|-----|-----|-----|-------------------------|--|-----|------------------------------------|------|
|                    | H              |     | V   |     |                         | Peak   | Ave | Peak                               | Ave. |
| 1240.000           | ---            | --- | --- | --- | -15.0                   | ---  | --- | 74.0                               | 54.0 |
| 4960.000           | ---            | --- | --- | --- | 0.5                     | ---  | --- | 74.0                               | 54.0 |
| 7440.000           | ---            | --- | --- | --- | 2.9                     | ---  | --- | 74.0                               | 54.0 |
| 12400.000          | ---            | --- | --- | --- | 4.2                     | ---  | --- | 74.0                               | 54.0 |
| 19840.000          | ---            | --- | --- | --- | 10.7                    | ---  | --- | 74.0                               | 54.0 |
| 22320.000          | ---            | --- | --- | --- | 10.5                    | ---  | --- | 74.0                               | 54.0 |

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.
4. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.

**4.4.1.2 Dipole antenna**

b) Channel 0

Operation Mode : Transmitting

Fundamental Frequency : 2402 MHz

Test Date : Feb. 24, 2009

Temperature : 21°C

Humidity : 64%

| Frequency<br>(MHz) | Reading (dBuV) |     |     |     | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m)<br>Peak Ave<br>(H/V Max.) |     | Limit @3m<br>(dBuV/m)<br>Peak Ave. |      |
|--------------------|----------------|-----|-----|-----|-------------------------|--|-----|------------------------------------|------|
|                    | H              |     | V   |     |                         | Peak   | Ave | Peak                               | Ave. |
| 1201.000           | ---            | --- | --- | --- | -15.0                   | ---  | --- | 74.0                               | 54.0 |
| 4804.000           | ---            | --- | --- | --- | 0.6                     | ---  | --- | 74.0                               | 54.0 |
| 12010.000          | ---            | --- | --- | --- | 1.1                     | ---  | --- | 74.0                               | 54.0 |
| 16216.000          | ---            | --- | --- | --- | 11.2                    | ---  | --- | 74.0                               | 54.0 |

b) Channel 39

Fundamental Frequency : 2441 MHz

| Frequency<br>(MHz) | Reading (dBuV) |     |     |     | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m)<br>Peak Ave<br>(H/V Max.) |     | Limit @3m<br>(dBuV/m)<br>Peak Ave. |      |
|--------------------|----------------|-----|-----|-----|-------------------------|--|-----|------------------------------------|------|
|                    | H              |     | V   |     |                         | Peak   | Ave | Peak                               | Ave. |
| 1220.500           | ---            | --- | --- | --- | -15.0                   | ---  | --- | 74.0                               | 54.0 |
| 4882.000           | ---            | --- | --- | --- | 0.5                     | ---  | --- | 74.0                               | 54.0 |
| 7323.000           | ---            | --- | --- | --- | 2.9                     | ---  | --- | 74.0                               | 54.0 |
| 12205.000          | ---            | --- | --- | --- | 1.1                     | ---  | --- | 74.0                               | 54.0 |
| 19528.000          | ---            | --- | --- | --- | 10.7                    | ---  | --- | 74.0                               | 54.0 |

c) Channel 78

Fundamental Frequency : 2480 MHz

| Frequency<br>(MHz) | Reading (dBuV) |     |     |     | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m)<br>Peak Ave<br>(H/V Max.) |     | Limit @3m<br>(dBuV/m)<br>Peak Ave. |      |
|--------------------|----------------|-----|-----|-----|-------------------------|--|-----|------------------------------------|------|
|                    | H              |     | V   |     |                         | Peak   | Ave | Peak                               | Ave. |
| 1240.000           | ---            | --- | --- | --- | -15.0                   | ---  | --- | 74.0                               | 54.0 |
| 4960.000           | ---            | --- | --- | --- | 0.5                     | ---  | --- | 74.0                               | 54.0 |
| 7440.000           | ---            | --- | --- | --- | 2.9                     | ---  | --- | 74.0                               | 54.0 |
| 12400.000          | ---            | --- | --- | --- | 4.2                     | ---  | --- | 74.0                               | 54.0 |
| 19840.000          | ---            | --- | --- | --- | 10.7                    | ---  | --- | 74.0                               | 54.0 |
| 22320.000          | ---            | --- | --- | --- | 10.5                    | ---  | --- | 74.0                               | 54.0 |

Note :


1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.
4. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.

## 4.4.2 Other Emission

### 4.4.2.1 Patch antenna

#### 4.4.2.1.1 below 1GHz

File: ivan                      Data: #91                      Date: 2009/2/24                      Temperature: 21 °C  
 Time: PM 05:03:15                      Humidity: 64 %

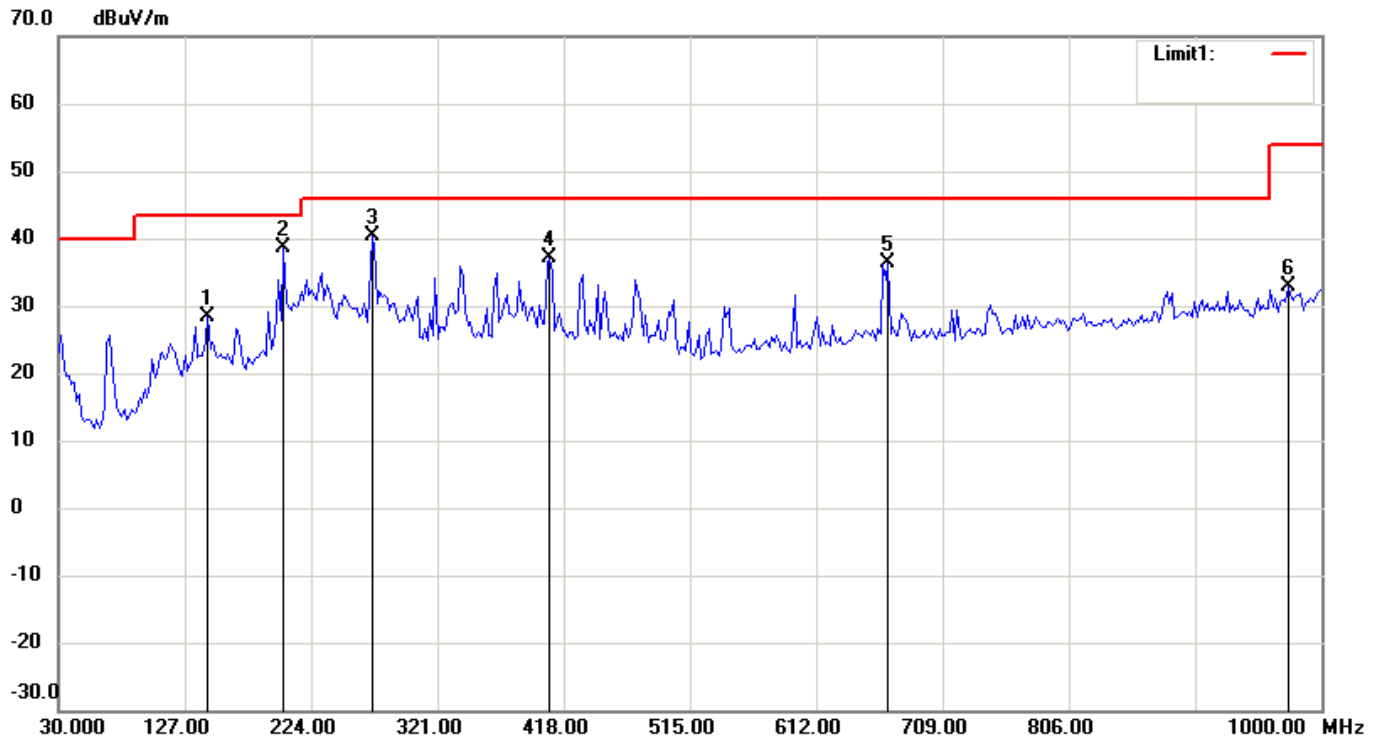

Condition: FCC Part15 RE-Class B\_30-1000MHz                      Polarization: Horizontal  
 EUT: Bluetooth Intelligent Serial Module version II                      Distance: 3m  
 Model: TRBLU23-00300-xx-01  
 Test Mode:

| No. | Frequency (MHz) | Reading (dBuV/m) | Detector | Corrected Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|------------------|----------|----------------------|-----------------|----------------|-------------|
| 1   | 144.6894        | 14.93            | peak     | 13.36                | 28.29           | 43.50          | -15.21      |
| 2   | 203.0060        | 26.09            | peak     | 12.54                | 38.63           | 43.50          | -4.87       |
| 3   | 271.0421        | 25.38            | peak     | 15.07                | 40.45           | 46.00          | -5.55       |
| 4   | 407.1142        | 17.19            | peak     | 19.86                | 37.05           | 46.00          | -8.95       |
| 5   | 667.5952        | 12.44            | peak     | 23.93                | 36.37           | 46.00          | -9.63       |
| 6   | 974.7295        | 5.87             | peak     | 27.08                | 32.95           | 54.00          | -21.05      |





**4.4.2.1.2 above 1GHz**

| Frequency<br>(MHz)  | Ant-Pol<br>H/V | Meter<br>Reading<br>(dBuV) | Corrected<br>Factor<br>(dB) | Result @3m<br>(dBuV/m) | Limit @3m<br>(dBuV/m) | Margin (dB) |
|---|----------------|----------------------------|-----------------------------|------------------------|-----------------------|-------------|
| Radiated emission frequencies above 1 GHz to 25 GHz<br>were too low to be measured. |                |                            |                             |                        |                       |             |

**4.4.2.1.3 above 1GHz (RX Mode)**

No emission found.

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "\*\*\*" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is  
 $\pm 4.6\text{dB}$  ( $30\text{MHz} \leq f < 300\text{MHz}$ ).  
 $\pm 4.4\text{dB}$  ( $300\text{MHz} \leq f < 1000\text{MHz}$ ).  
 $\pm 4.1\text{dB}$  ( $1\text{GHz} \leq f \leq 18\text{GHz}$ ).
4. Remark "---" means that the emissions level is too low to be measured.





**4.4.2.2.2 above 1GHz**

| Frequency (MHz)  | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result @3m (dBuV/m) | Limit @3m (dBuV/m) | Margin (dB) |
|--|-------------|----------------------|-----------------------|---------------------|--------------------|-------------|
| Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured. |             |                      |                       |                     |                    |             |

**4.4.2.2.3 above 1GHz (RX Mode)**

No emission found.

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "\*\*\*" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is
  - ±4.6dB (30MHz ≤ f < 300MHz).
  - ±4.4dB (300MHz ≤ f < 1000MHz).
  - ±4.1dB (1GHz ≤ f ≤ 18GHz).
4. Remark "---" means that the emissions level is too low to be measured.

### 4.4.3 Radiated Measurement at Bandedge with Fundamental Frequencies

#### 4.4.3.1 Patch antenna

(A)

Channel 0

Operation Mode : Transmitting

Fundamental Frequency : 2402 MHz

Test Date : Feb. 24, 2009

Temperature : 21°C

Humidity : 64%

| Frequency<br>(MHz) | Reading (dBuV) |      |      |      | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m)<br>Peak Ave<br>(H/V Max.) |      | Limit @3m<br>(dBuV/m)<br>Peak Ave. |      |
|--------------------|----------------|------|------|------|-------------------------|--|------|------------------------------------|------|
|                    | H              |      | V    |      |                         | Peak   | Ave  | Peak                               | Ave. |
| 2400.000           | 27.2           | 16.7 | 27.9 | 17.4 | 30.3                    | 58.2   | 47.7 | 74.0                               | 54.0 |

Note:

The result is the highest value of radiated emission from restrict band of 2310 ~2390 MHz.

(B)

Channel 78

Operation Mode : Transmitting

Fundamental Frequency : 2480 MHz

Test Date : Feb. 24, 2009

Temperature : 21°C

Humidity : 64%

| Frequency<br>(MHz) | Reading (dBuV) |      |      |      | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m)<br>Peak Ave<br>(H/V Max.) |      | Limit @3m<br>(dBuV/m)<br>Peak Ave. |      |
|--------------------|----------------|------|------|------|-------------------------|--|------|------------------------------------|------|
|                    | H              |      | V    |      |                         | Peak   | Ave  | Peak                               | Ave. |
| 2483.500           | 29.9           | 20.1 | 31.4 | 21.3 | 30.3                    | 61.7   | 51.6 | 74.0                               | 54.0 |

Note:

The result is the highest value of radiated emission from restrict band of 2483.5 ~2500 MHz.

4.4.3.2 Dipole antenna

(A)

Channel 0

Operation Mode : Transmitting

Fundamental Frequency : 2402 MHz

Test Date : Feb. 24, 2009      Temperature : 21°C      Humidity : 64%

| Frequency<br>(MHz) | Reading (dBuV) |      |      |      | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |      |
|--------------------|----------------|------|------|------|-------------------------|------------------------|------|-----------------------|------|
|                    | H              |      | V    |      |                         | Peak                   | Ave  | Peak                  | Ave. |
|                    | Peak           | Ave  | Peak | Ave  |                         | (H/V Max.)             |      |                       |      |
| 2390.000           | 25.7           | 16.4 | 28.3 | 17.3 | 30.3                    | 58.6                   | 47.6 | 74.0                  | 54.0 |

Note:

The result is the highest value of radiated emission from restrict band of 2310 ~2390 MHz.

(B)

Channel 78

Operation Mode : Transmitting

Fundamental Frequency : 2480 MHz

Test Date : Feb. 24, 2009      Temperature : 21°C      Humidity : 64%

| Frequency<br>(MHz) | Reading (dBuV) |      |      |      | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |      |
|--------------------|----------------|------|------|------|-------------------------|------------------------|------|-----------------------|------|
|                    | H              |      | V    |      |                         | Peak                   | Ave  | Peak                  | Ave. |
|                    | Peak           | Ave  | Peak | Ave  |                         | (H/V Max.)             |      |                       |      |
| 2483.500           | 27.6           | 21.4 | 30.2 | 22.3 | 30.3                    | 60.5                   | 52.6 | 74.0                  | 54.0 |

Note:

The result is the highest value of radiated emission from restrict band of 2483.5 ~2500 MHz.

## 4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

## 5 ANTENNA REQUIREMENT

### 5.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to §15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.2 Antenna Construction and Directional Gain

|   | New External Antenna    | Model        | Gain   | Connector |
|---|-------------------------|--------------|--------|-----------|
| 1 | Ceramic Patch           | CABPB1240A   | 1.9dBi | U.FL      |
| 2 | 1/2 Wave Coaxial Dipole | WCR2400-IP04 | 2.0dBi | U.FL      |

The directional gain of the antenna does not exceed 6 dBi. The power won't be reduced.

## 6 OUTPUT POWER MEASUREMENT

### 6.1 Standard Applicable


For frequency hopping systems, operating in the 2400-2483.5MHz band employing at least 75 hopping channels. The transmitter output power shall not exceed 1.0 watt. For all other frequency hopping systems in this band 2400-2483.5 MHz band, the transmitter output power shall not exceed 0.125 watt.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W.

### 6.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 3. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.
4. Measure the highest amplitude appearing on spectral display and record the level to calculate result data.
5. Repeat above procedures until all frequencies measured were complete.

Figure 3: Output Power measurement configuration.



### 6.3 Measurement Equipment

| Equipment         | Manufacturer | Model No. | Next Cal. Due |
|-------------------|--------------|-----------|---------------|
| Power Meter       | Boonton      | 4532-0102 | 05/04/2009    |
| Peak Power Sensor | Boonton      | 56518     | 05/04/2009    |



## 6.4 Measurement Data

Test Date : Feb. 24, 2009

Temperature : 21°C

Humidity : 64%

| Channel | Frequency (MHz) | Maximum Peak Output Power (dBm) | Maximum Peak Output Power (mW) | FCC Limit (mW) | Chart |
|---------|-----------------|---------------------------------|--------------------------------|----------------|-------|
| 0       | 2402            | 0.5                             | 1.12                           | 1000           | -     |
| 39      | 2441            | 2.0                             | 1.58                           | 1000           | -     |
| 78      | 2480            | 2.1                             | 1.62                           | 1000           | -     |