

TEST REPORT

ACCORDING TO: FCC 47CFR part 96

FOR:

Airspan Networks Inc.

5G NR Base Station

Model: AirSpeed 2900, 5G, 3.55-3.7GHz (n48)

FCC ID: PIDAS2900

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines	5
6.3	Support and test equipment	5
6.4	Changes made in the EUT	5
6.5	Test configuration.....	6
6.6	Transmitter characteristics	7
6.7	Table of calculations for the MAX EIRP at frequency range 3550 – 3700 MHz with different antenna configurations ..	8
7	Transmitter tests according to 47CFR part 96.....	9
7.1	Peak output power test.....	9
7.2	Peak-to-average power ratio (PAPR) test	38
7.3	Occupied bandwidth test	50
7.4	Emission mask test	65
7.5	Radiated spurious emission measurements.....	95
7.6	Spurious emissions at RF antenna connector test	107
7.7	Frequency stability test.....	163
8	APPENDIX A Test equipment and ancillaries used for tests.....	165
9	APPENDIX B Test equipment correction factors.....	167
10	APPENDIX C Measurement uncertainties	173
11	APPENDIX D Test laboratory description	174
12	APPENDIX E Specification references.....	174
13	APPENDIX F Manufacturer’s declaration of additional to be used antennas	176
14	APPENDIX G Abbreviations and acronyms	177



1 Applicant information

Client name: Airspan Networks Inc.
Address: 777 Yamato, Road Suite 310 Boca Raton, FL 33431, USA
Telephone: +1 561 893 8670
Fax: +1 561 893 8671
E-mail: zlevi@airspan.com
Contact name: Mr. Zion Levi

2 Equipment under test attributes

Product name: 5G NR Base Station
Product type: Transceiver
Model(s): AirSpeed 2900, 5G, 3.55-3.7GHz (n48)
Serial number: ED0A5A0163BE
Hardware version: 08
Software release: SR19.00
Receipt date: 28-Oct-21

3 Manufacturer information

Manufacturer name: Airspan Networks Inc.
Address: 777 Yamato, Road Suite 310 Boca Raton, FL 33431, USA
Telephone: +1 561 893 8670
Fax: +1 561 893 8671
E-Mail: zlevi@airspan.com
Contact name: Mr. Zion Levi

4 Test details

Project ID: 44746
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 01-Nov-21
Test completed: 21-Nov-21
Test specification(s): FCC 47CFR part 96

5 Tests summary

Test	Status
Transmitter characteristics	
Section 96.41(b), Maximum EIRP and maximum power spectral density	Pass
Section 96.41(g), Peak-to- average power ratio	Pass
Section 2.1049, Occupied bandwidth	Pass
Section 96.41(e), Emission mask	Pass
Section 96.41(e)(2), Radiated spurious emissions	Pass
Section 96.41(e)(3), Conducted spurious emissions	Pass
Section 2.1055, Frequency stability	Pass

The report was revised for a product that was approved by FCC under FCC ID: PIDAS2900, original granted on March 12, 2021. The test report reflects the following changes:




1. The additional specific external antennas for a Class II permissive changes certification, for use with the AirSpeed 2900.

Except outlined above, Certified product remain identical to original one.

This test report supersedes the previously issued test report identified by Doc ID: AIRRAD_FCC.44746_Rev1

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. A. Morozov, test engineer, EMC & Radio	01-Nov-21 – 21-Nov-21	
Reviewed by:	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	09-May-22	
Approved by:	Mr. M. Nikishin, Group Leader, EMC & Radio	18-May-22	



6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

EUT is a Mobile Digital station, AirSpeed 2900 3550-3700MHz (N48), is part of a 5G broadband fixed cellular wireless access system. The system provides a radio link between an end-user (a subscriber) and a network to give high-speed data access. The AirSpeed 2900's transceiver/receiver (Up to 256 QAM modulation, data rate up to 190 Mbps) equipped with a 17dBi External antenna. Advanced Antenna Techniques 2x2 MIMO are supported. The maximum RF output power (not including antenna gain) is 33.00 dBm for 17dBi and it can be reduced by software. The AirSpeed is installed outdoors. The Subscriber transmits and receives traffic to and from the base station respectively. The transceiver provides subscribers with "always-on" Internet, high speed data only, or data and voice (VoIP) services and is configured with a unique base station reference number, preventing the 5G UE from relocating to another subscriber premises without authorization.

Note: AirSpeed 2900 equipment defined as Category B CBSD (Citizens Broadband Radio Service Device) per FCC part 96 section 96.3(2).

Antennas 1/2 arrange one sector while antenna 1 is cross polarized to antenna 2 and antennas 3/4 arrange another sector while antenna 3 is cross polarized to antenna 4. The transmitter output signals are completely uncorrelated.

The sectors are either non overlapping by operation on different frequency channeles or by different sectors coverage without overlapping of antenna beams."

This device supports 5G-NR TDD n48 band and the partial n77/n78 bands matching n48 band.

According to manufacturer's declaration provided in Appendix F of the test report the following specific external antennas may be used in conjunction with this model radio at the appropriate listed power settings.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	DC power	EUT	AC/DC adapter	1	Unshielded	20
Signal	Ethernet	EUT	Laptop	1	Shielded	20
Signal*	Serial*	Not connected	Not connected	1	NA	NA
Signal	Optic Port	EUT	Laptop	1	Unshielded	20
Signal	GPS	EUT	NA	1	NA	NA

*for maintenance only


6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
Laptop	Dell	E7450	8TYRP32
USB to RS-232 convertor	ATEN	UC2324	NA
AC/DC adapter	MW	PSP-600-48	NA
SFP adapter	Finisar	FTLF1318P3BTL	NSE0AQC
GPS antenna	Tallysman	32-3010-0	01252012

6.4 Changes made in the EUT

No changes were implemented in the EUT during testing.

6.5 Test configuration

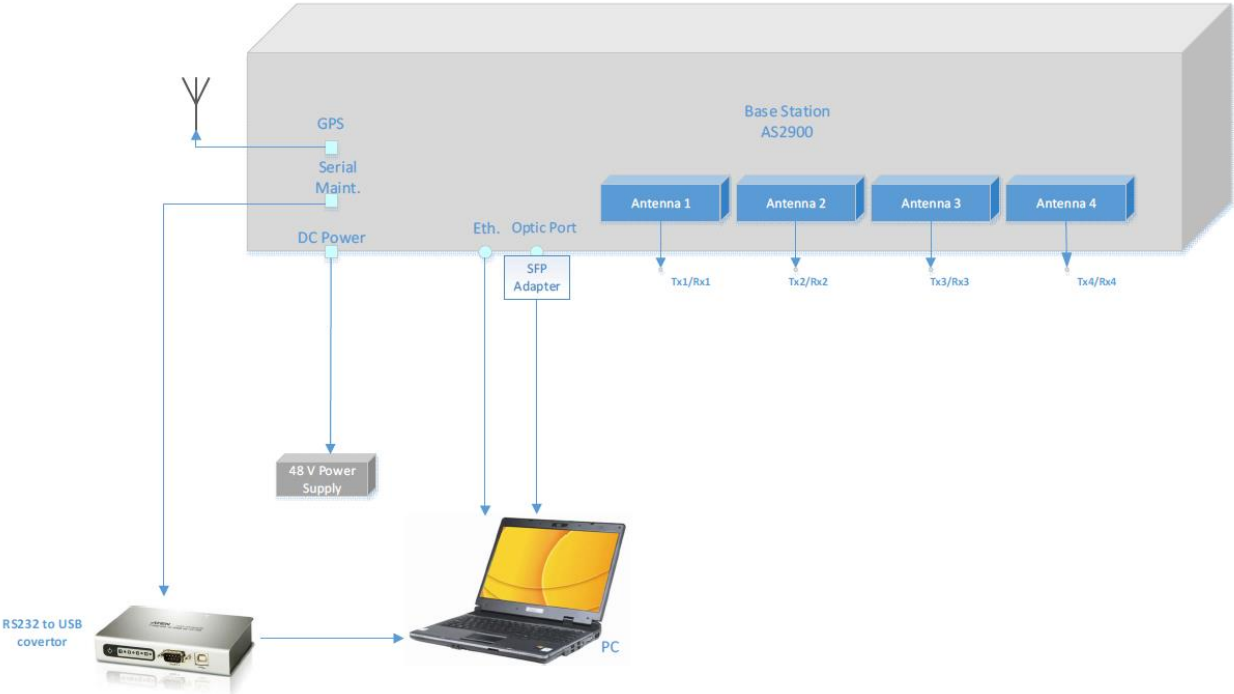



6.6 Transmitter characteristics

Type of equipment					
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)				
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
Intended use		Condition of use			
<input checked="" type="checkbox"/>	fixed	Always at a distance more than 2 m from all people			
	mobile	Always at a distance more than 20 cm from all people			
	portable	May operate at a distance closer than 20 cm to human body			
Assigned frequency range		3550.0 – 3700.0 MHz			
Operating frequency (full bands)		3560.0 – 3690.0 MHz			
RF channel spacing		20 MHz, 40 MHz			
Maximum rated output power		At transmitter 50 Ω RF output connector (per port)	33.00 dBm		
Is transmitter output power variable?					
		No			
			continuous variable		
<input checked="" type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	stepped variable with step size 0.25 dB		
			minimum RF power -30 dBm		
			maximum RF power at antenna connector dBm		
Antenna connection					
<input type="checkbox"/>	unique coupling	<input checked="" type="checkbox"/>	standard connector		
		<input type="checkbox"/>	Integral		
		<input checked="" type="checkbox"/>	with temporary RF connector without temporary RF connector		
Antenna/s technical characteristics					
Type	Manufacturer	Model number	Gain		
*External	ALPHA	AN1003-R2	17 dBi		
External	ALPHA	AW3014	18 dBi		
External	ALPHA	AW3170	20.5 dBi		
Transmitter aggregate data rate/s, Mbps					
Transmitter 26dBc power bandwidth		Type of modulation			
		QPSK	16QAM	64QAM	256QAM
20 MHz		23.4	45.4	95.0	143.0
40 MHz		46.8	90.8	190.0	285.0
Type of multiplexing		TDD			
Modulating test signal (baseband)		PRBS			
Maximum transmitter duty cycle in normal use		0.74			
Transmitter power source					
<input checked="" type="checkbox"/>	DC	Nominal rated voltage	48 VDC	Battery type	
	AC mains	Nominal rated voltage		Frequency	
Common power source for transmitter and receiver		<input checked="" type="checkbox"/>	yes	<input type="checkbox"/>	no

* - The worst case of antenna configuration delivering the highest conducted power per port was tested



6.7 Table of calculations for the MAX EIRP at frequency range 3550 – 3700 MHz with different antenna configurations

Antenna configuration	Antenna Vendor	Antenna Model Number	Antenna Peak Gain (dB)	Signal Bandwidth (MHz)	Maximum Conducted Power (dBm)	EIRP (dBm/10MHz)	EIRP per Bandwidth (dBm)	Operational Category
1*	ALPHA	AN1003-R2	17	20.0	32.23	46.63	49.23	B
				40.0	33.00	44.23	50.00	
2	ALPHA	AW3014	18.0	20.0	31.23	46.63	49.23	B
				40.0	32.00	44.23	50.00	
3	ALPHA	AW3170	20.5	20.0	28.73	46.63	49.23	B
				40.0	29.50	44.23	50.00	

* - The worst case of antenna configuration delivering the highest conducted power was tested



Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 96

7.1 Peak output power test

7.1.1 General

This test was performed to measure the maximum EIRP and maximum spectral power density at the transmitter RF antenna connector. Specification test limits are given in Table 7.1.1, Table 7.1.2.

Table 7.1.1 Maximum EIRP limits

Assigned frequency range, MHz	EIRP
	dBm/10 MHz
3550 - 3700	47.0

Table 7.1.2 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, MHz	Peak spectral power density, dBm
3550 - 3700	1.0	37.0

7.1.2 Test procedure


7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.1.2.3 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in average mode with resolution bandwidth set to 1.0 MHz, video bandwidth wider than resolution bandwidth, sweep time and sufficient number of sweeps was allowed for trace stabilization.

7.1.2.4 Spectrum analyzer was set in average mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.1.3, Table 7.1.4 and the associated plots.

Figure 7.1.1 Peak output power test setup

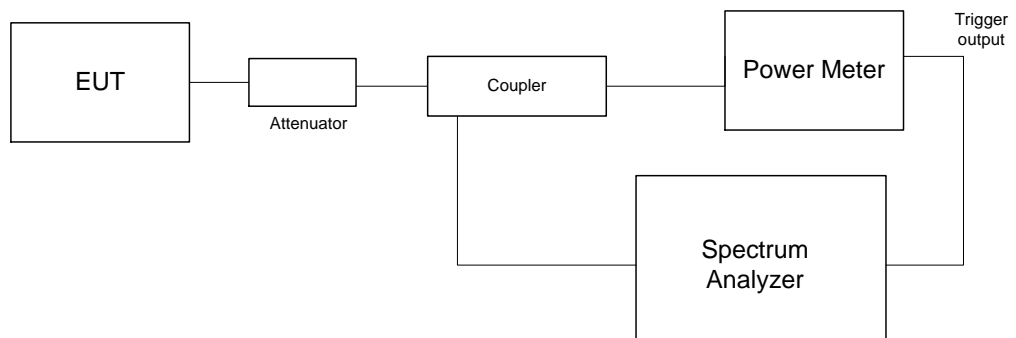



Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.3 Peak output power test results

ASSIGNED FREQUENCY RANGE: 3550.0 – 3700.0 MHz
 DETECTOR USED: Average (gated)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 CHANNEL SPACING: 20 MHz

Frequency, MHz	RF Output power				Antenna gain, dBi	EIRP*, dBm/20 MHz	EIRP*, dBm/10 MHz	Limit, dBm/10 MHz	Margin, dB**	Verdict
	Chain RF#1, dBm	Chain RF#2, dBm	Chain RF#3, dBm	Chain RF#4, dBm						
Modulation QPSK										
3560.0	31.35	31.73	32.23	31.78	17.00	49.23	46.63	47.0	-0.37	Pass
3625.0	31.31	31.87	31.43	32.15	17.00	49.15	46.55	47.0	-0.45	Pass
3690.0	30.61	31.29	30.62	31.19	17.00	48.29	45.69	47.0	-1.31	Pass
Modulation 16QAM										
3560.0	31.25	31.48	32.19	31.75	17.00	49.19	46.59	47.0	-0.41	Pass
3625.0	31.62	31.55	31.71	31.63	17.00	48.71	46.11	47.0	-0.89	Pass
3690.0	30.75	31.19	31.10	31.09	17.00	48.19	45.59	47.0	-1.41	Pass
Modulation 64QAM										
3560.0	31.38	31.41	32.10	31.81	17.00	49.10	46.50	47.0	-0.50	Pass
3625.0	31.60	31.53	31.96	31.32	17.00	48.96	46.36	47.0	-0.64	Pass
3690.0	30.76	31.10	31.07	30.88	17.00	48.10	45.50	47.0	-1.50	Pass
Modulation 256QAM										
3560.0	31.25	31.96	32.13	31.82	17.00	49.13	46.53	47.0	-0.47	Pass
3625.0	31.32	31.41	31.90	31.12	17.00	48.90	46.30	47.0	-0.70	Pass
3690.0	30.70	30.96	30.71	30.65	17.00	47.96	45.36	47.0	-1.64	Pass

* - EIRP = Max SA reading (Chains #1&2 and #3&4) - 10*log[OBW(MHz) / 10 MHz] + Antenna gain = Max SA reading – 2.6 dB + Antenna gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

** - Margin = EIRP, dBm – specification limit.



Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.4 Peak output power test results

ASSIGNED FREQUENCY RANGE:
DETECTOR USED:
VIDEO BANDWIDTH:
CHANNEL SPACING:

3550.0 – 3700.0 MHz
Average (gated)
≥ Resolution bandwidth
40 MHz

Frequency, MHz	RF Output power				Antenna gain, dBi	EIRP*, dBm/40 MHz	EIRP*, dBm/10 MHz	Limit, dBm/10 MHz	Margin, dB**	Verdict
	Chain RF#1, dBm	Chain RF#2, dBm	Chain RF#3, dBm	Chain RF#4, dBm						
Modulation QPSK										
3570.0	32.44	32.78	32.40	33.00	17.0	50.00	44.23	47.0	-2.77	Pass
3625.0	32.40	32.37	32.48	32.80	17.0	49.80	44.03	47.0	-2.97	Pass
3680.0	31.10	31.60	31.27	31.60	17.0	48.60	42.83	47.0	-4.17	Pass
Modulation 16QAM										
3570.0	32.14	32.39	32.60	32.97	17.0	49.97	44.20	47.0	-2.80	Pass
3625.0	32.02	32.36	32.45	32.91	17.0	49.91	44.14	47.0	-2.86	Pass
3680.0	30.89	31.28	31.06	31.76	17.0	48.76	42.99	47.0	-4.01	Pass
Modulation 64QAM										
3570.0	32.18	32.73	32.21	32.97	17.0	49.70	43.93	47.0	-3.07	Pass
3625.0	32.15	32.35	32.49	32.89	17.0	49.89	44.12	47.0	-2.88	Pass
3680.0	30.80	31.73	31.06	31.72	17.0	48.73	42.96	47.0	-4.04	Pass
Modulation 256QAM										
3570.0	32.19	32.76	31.94	33.00	17.0	50.00	43.93	47.0	-3.07	Pass
3625.0	32.23	32.35	32.70	32.89	17.0	49.89	44.12	47.0	-2.88	Pass
3680.0	30.79	31.58	30.99	31.99	17.0	48.99	42.96	47.0	-4.04	Pass

*- EIRP = Max SA reading (Chains #1&2 and #3&4) - $10 \cdot \log[\text{OBW}(\text{MHz}) / 10 \text{ MHz}]$ + Antenna gain =
Max SA reading – 5.77 dB + Antenna gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

** - Margin = EIRP, dBm – specification limit.



Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.5 Peak spectral power density test results

ASSIGNED FREQUENCY RANGE:

3550.0 – 3700.0 MHz

DETECTOR USED:

Average (gated)

VIDEO BANDWIDTH:

≥ Resolution bandwidth

NUMBER OF CHAINS:

4

Frequency, MHz	SA Reading, dBm/MHz				Antenna gain, dBi	Total PSD*, dBm/ MHz	Limit, dBm/MHz	Margin, dB	Verdict
	Chain RF#1,	Chain RF#2,	Chain RF#3,	Chain RF#4,					
Channel spacing 20 MHz									
Modulation QPSK									
3560.0	18.10	18.52	18.93	18.60	17.00	35.93	37.0	-1.07	Pass
3625.0	17.98	18.66	18.17	18.80	17.00	35.80	37.0	-1.20	Pass
3690.0	17.37	17.86	17.46	18.06	17.00	35.06	37.0	-1.94	Pass
Modulation 16QAM									
3560.0	18.08	18.34	18.98	18.59	17.00	35.98	37.0	-1.02	Pass
3625.0	18.43	18.37	18.51	18.41	17.00	35.51	37.0	-1.49	Pass
3690.0	17.53	18.01	17.92	18.14	17.00	35.14	37.0	-1.86	Pass
Modulation 64QAM									
3560.0	18.21	18.31	19.02	18.78	17.00	36.02	37.0	-0.98	Pass
3625.0	18.32	18.32	18.75	18.08	17.00	35.75	37.0	-1.25	Pass
3690.0	17.56	17.87	17.98	18.14	17.00	35.14	37.0	-1.86	Pass
Modulation 256QAM									
3560.0	18.08	18.85	18.90	18.67	17.00	35.90	37.0	-1.10	Pass
3625.0	18.06	18.20	18.74	17.95	17.00	35.74	37.0	-1.26	Pass
3690.0	17.40	17.71	17.60	17.99	17.00	34.99	37.0	-2.01	Pass

* - Total PSD = Max SA reading (Chains #1&2 or chains #3&4) + Antenna Gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

** - Margin = Total PSD, dBm – specification limit.



Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.6 Peak spectral power density test results

ASSIGNED FREQUENCY RANGE: 3550.0 – 3700.0 MHz
 DETECTOR USED: Average (gated)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 NUMBER OF CHAINS: 4

Frequency, MHz	SA Reading, dBm/MHz				Antenna gain, dBi	Total PSD*, dBm/ MHz	Limit, dBm/MHz	Margin, dB	Verdict
	Chain RF#1,	Chain RF#2,	Chain RF#3,	Chain RF#4,					
Channel spacing 40 MHz									
Modulation QPSK									
3570.0	16.33	16.60	16.69	15.93	17.0	33.69	37.0	-3.31	Pass
3625.0	16.16	16.37	16.45	16.51	17.0	33.51	37.0	-3.49	Pass
3680.0	14.30	15.09	14.76	15.07	17.0	32.09	37.0	-4.91	Pass
Modulation 16QAM									
3570.0	16.27	16.40	16.50	17.08	17.0	34.08	37.0	-2.92	Pass
3625.0	16.00	16.51	16.56	16.74	17.0	33.74	37.0	-3.26	Pass
3680.0	14.09	14.84	14.70	15.34	17.0	32.34	37.0	-4.66	Pass
Modulation 64QAM									
3570.0	16.30	16.84	16.12	17.15	17.0	34.15	37.0	-2.85	Pass
3625.0	16.14	16.47	16.58	16.75	17.0	33.75	37.0	-3.25	Pass
3680.0	14.10	15.38	14.69	15.33	17.0	32.38	37.0	-4.62	Pass
Modulation 256QAM									
3570.0	16.34	16.88	15.85	17.13	17.0	34.13	37.0	-2.87	Pass
3625.0	16.20	16.37	16.72	16.71	17.0	33.72	37.0	-3.28	Pass
3680.0	14.18	15.24	14.65	15.60	17.0	32.60	37.0	-4.40	Pass

* - Total PSD = Max SA reading (Chains #1&2 or chains #3&4) + Antenna Gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

** - Margin = Total PSD, dBm – specification limit.

Reference numbers of test equipment used

HL 3301	HL 4355	HL 4366	HL 5643	HL 5409	HL 5636	HL 5637	HL 5642
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.1 Peak spectral power density at low frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

20 MHz
1
Modulation: 16QAM

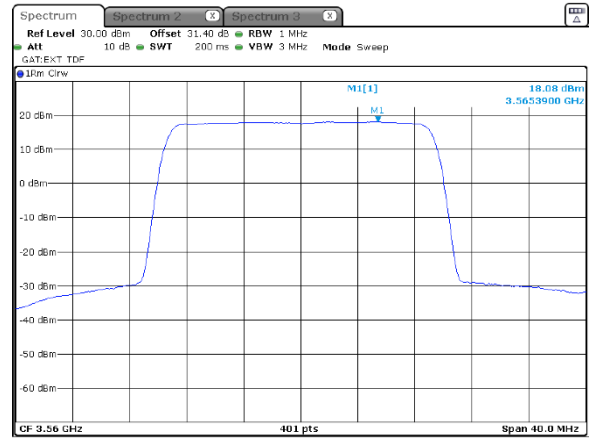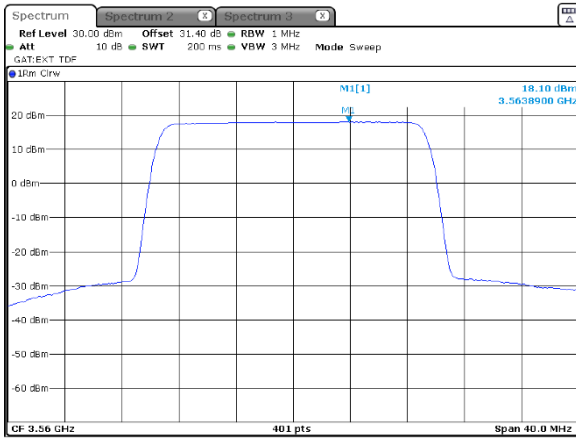

Modulation: 64QAM

Modulation: 256QAM

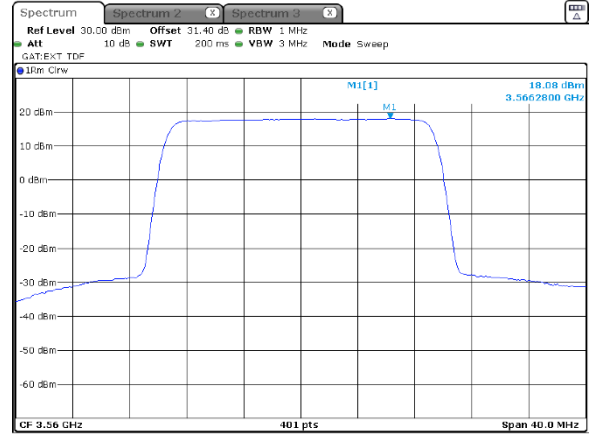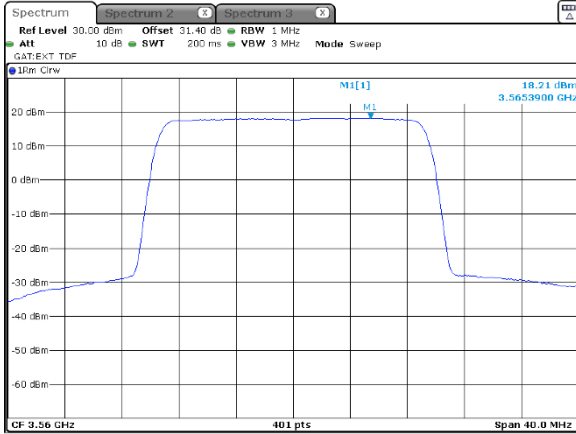




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.2 Peak spectral power density at low frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

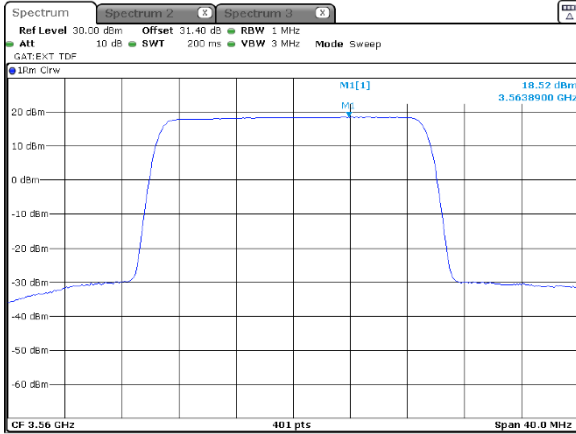


20 MHz
2
Modulation: 16QAM

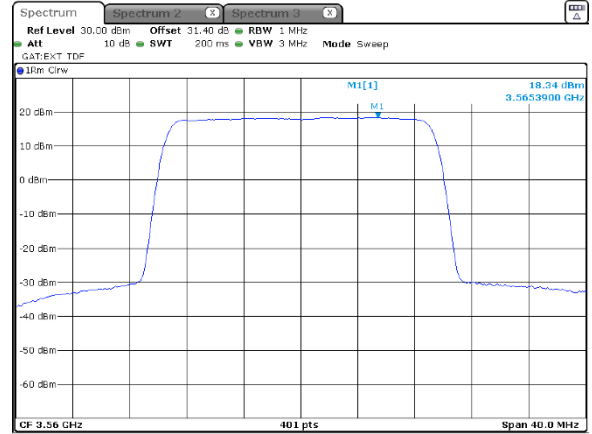

Modulation: 64QAM

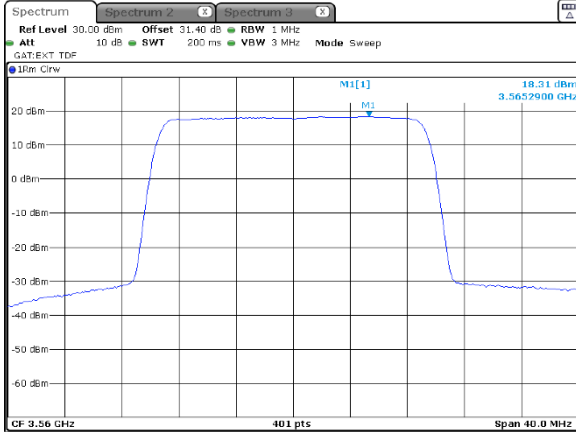

Modulation: 256QAM

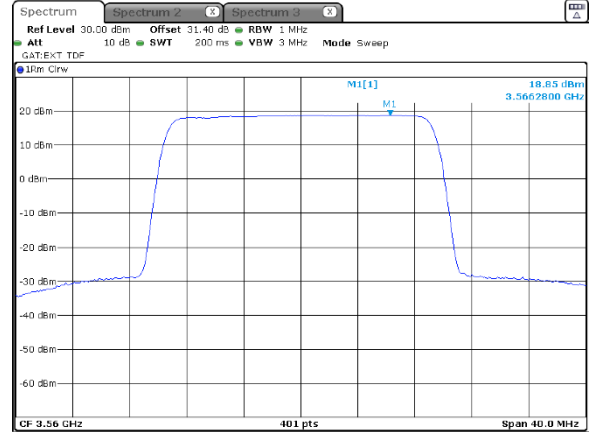




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.3 Peak spectral power density at low frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

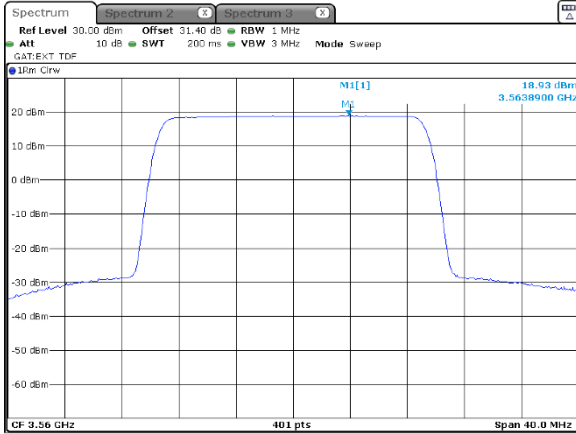


20 MHz
3
Modulation: 16QAM

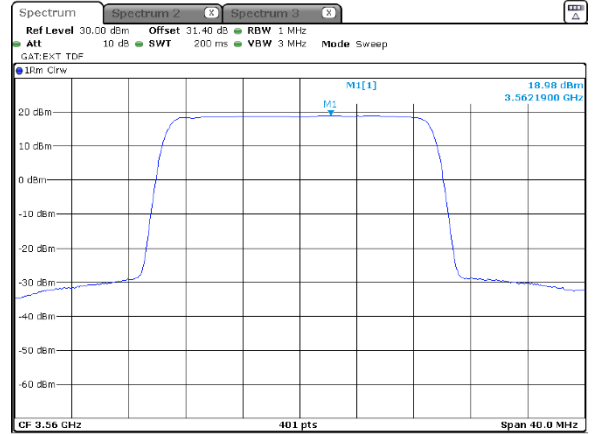

Modulation: 64QAM

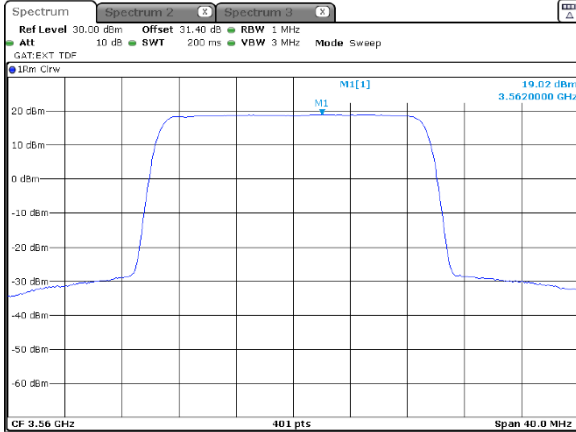

Modulation: 256QAM

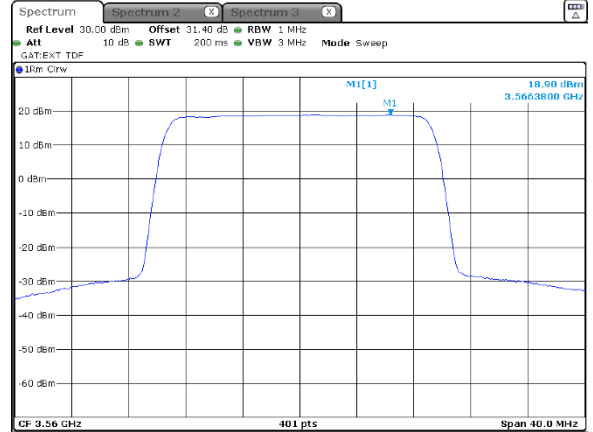




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.4 Peak spectral power density at low frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

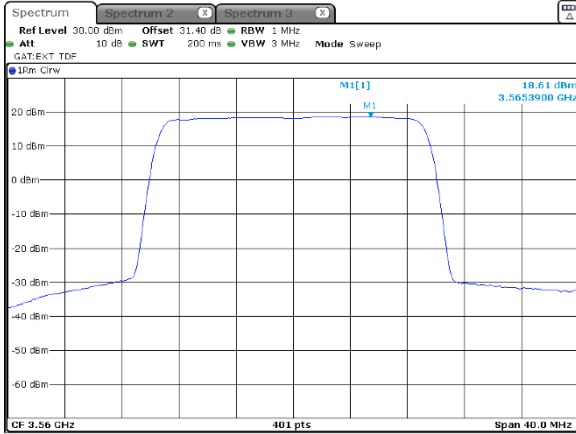


20 MHz
4
Modulation: 16QAM

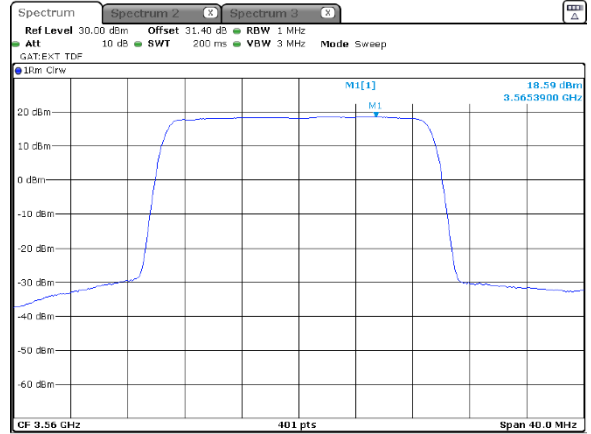

Modulation: 64QAM

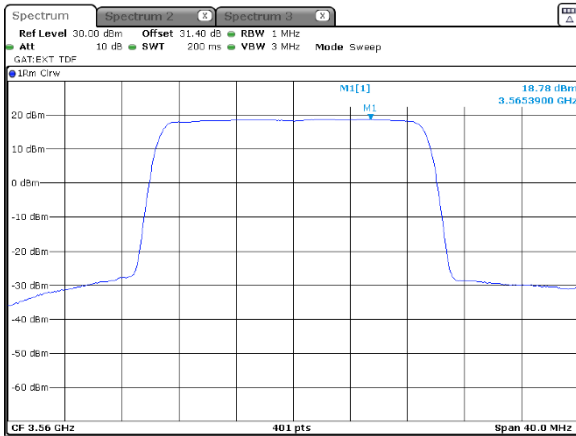

Modulation: 256QAM

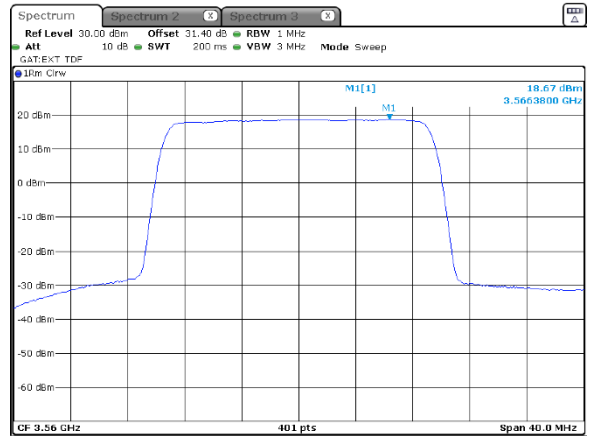




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.5 Peak spectral power density at mid frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

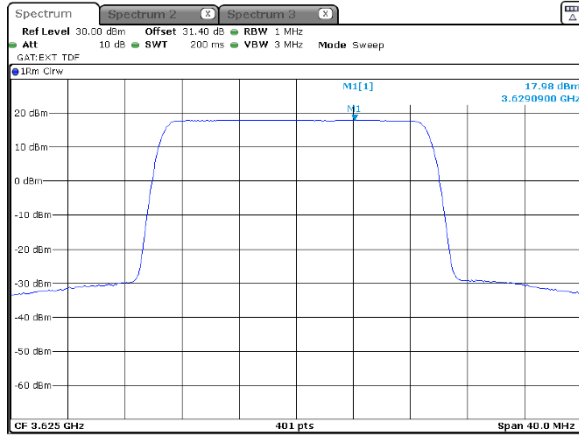


20 MHz
1
Modulation: 16QAM

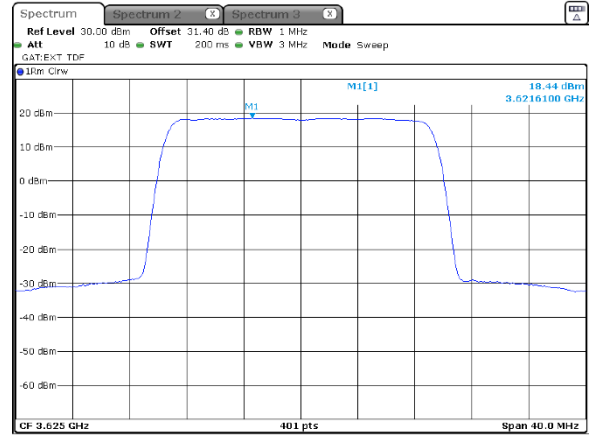

Modulation: 64QAM

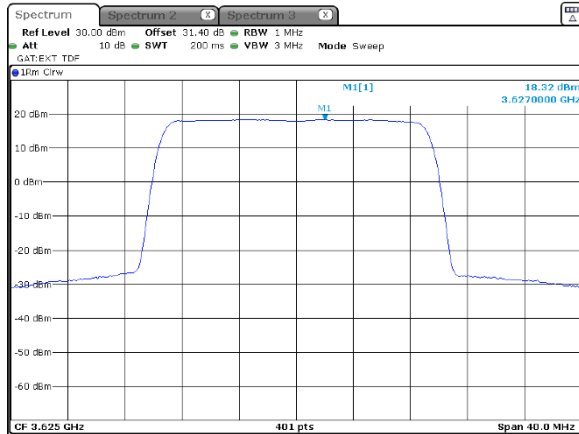

Modulation: 256QAM

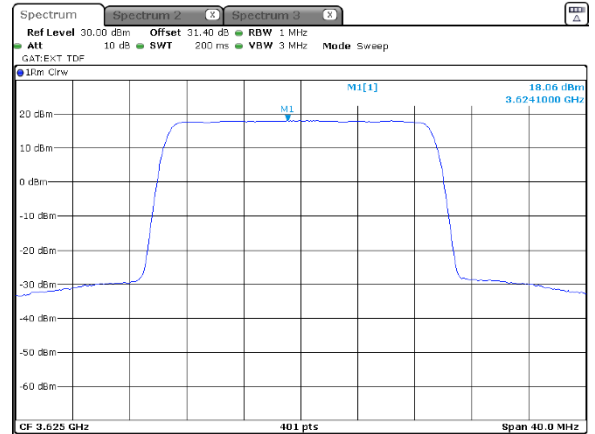





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.6 Peak spectral power density at mid frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

20 MHz
2
Modulation: 16QAM

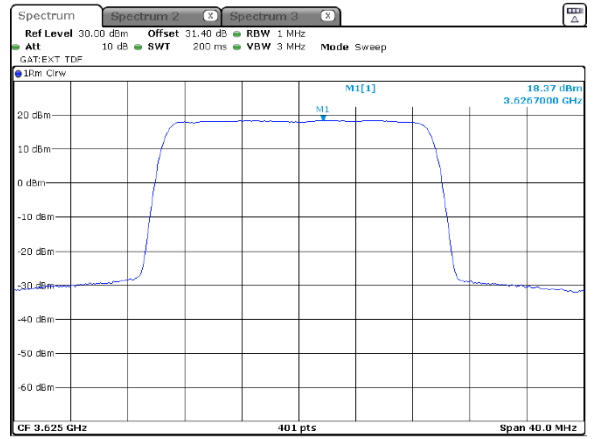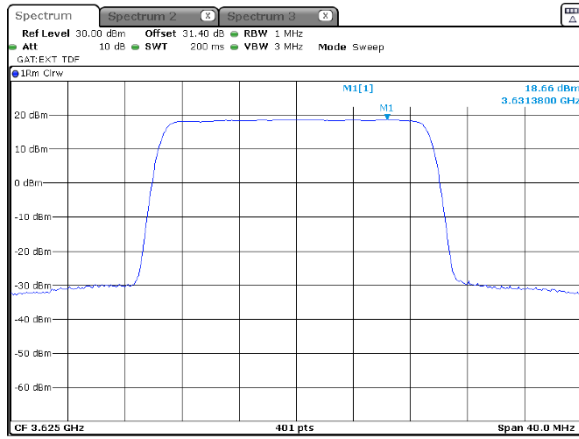

Modulation: 64QAM

Modulation: 256QAM

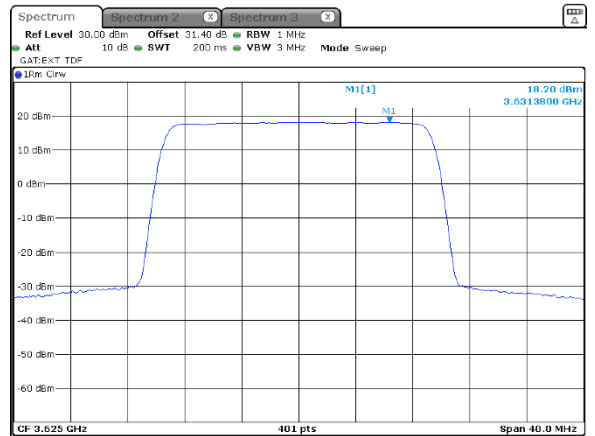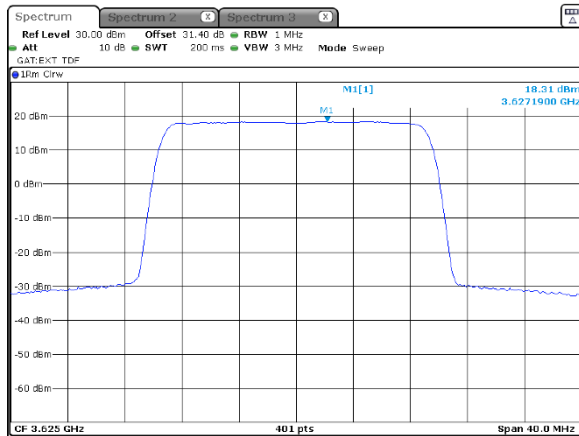





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.7 Peak spectral power density at mid frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

20 MHz
3
Modulation: 16QAM

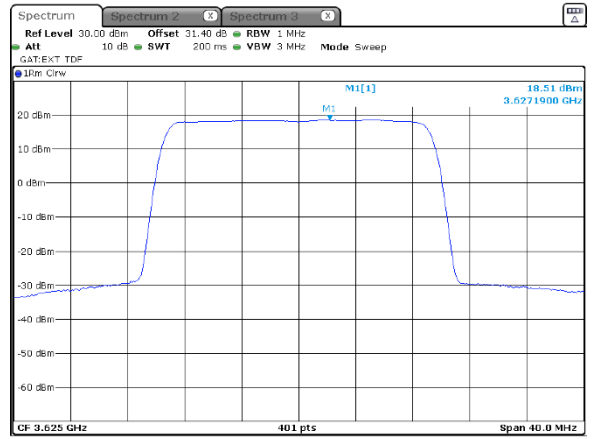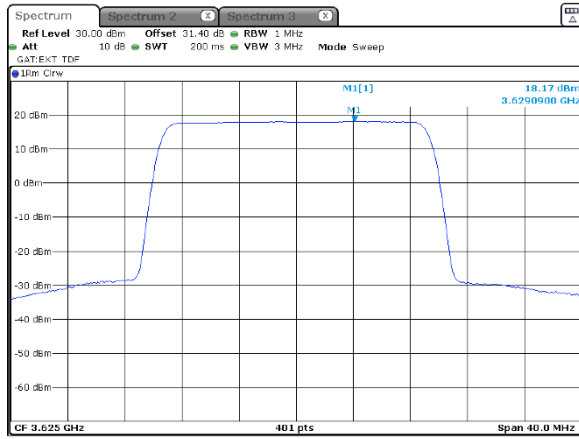

Modulation: 64QAM

Modulation: 256QAM

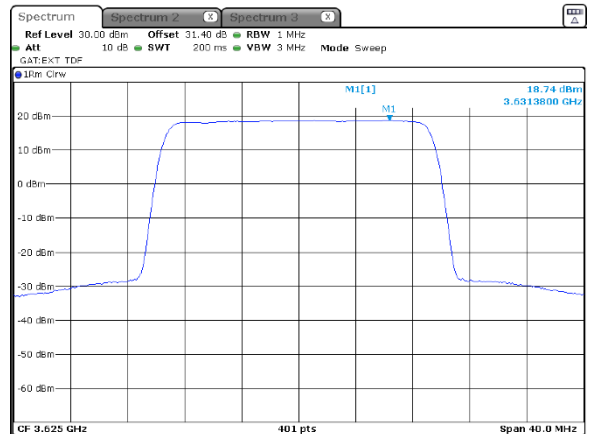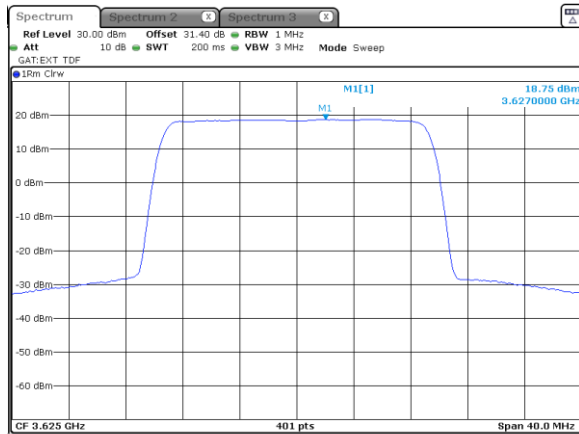





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.8 Peak spectral power density at mid frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

20 MHz
4
Modulation: 16QAM

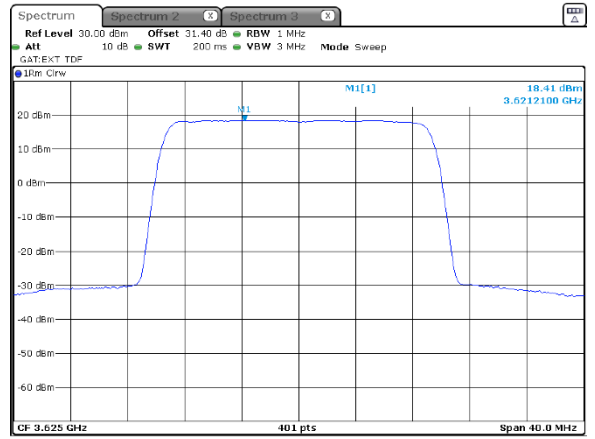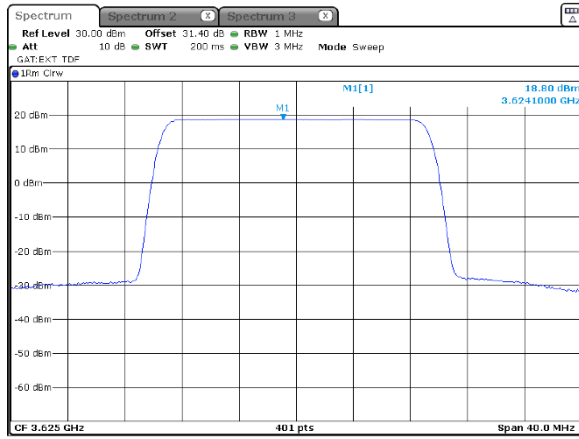

Modulation: 64QAM

Modulation: 256QAM

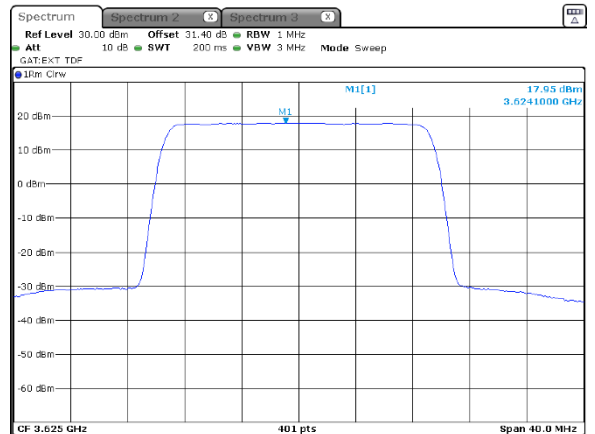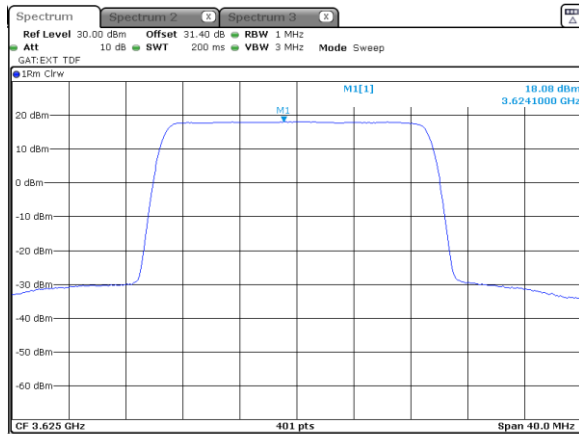





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.9 Peak spectral power density at high frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

20 MHz
1
Modulation: 16QAM

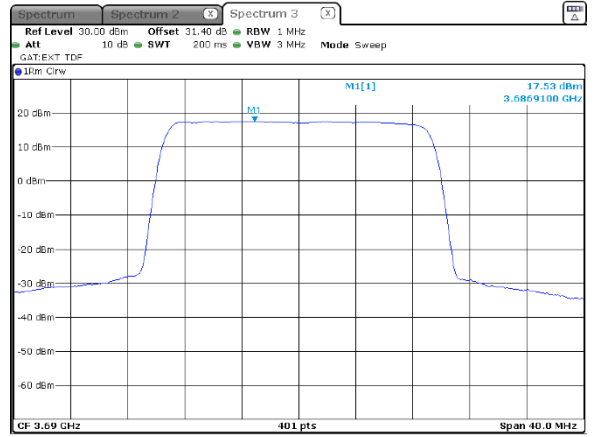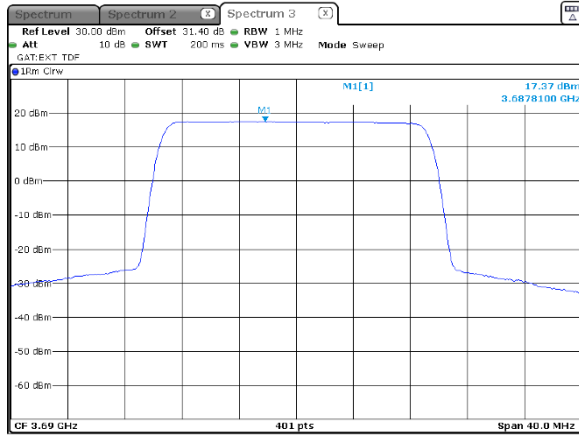

Modulation: 64QAM

Modulation: 256QAM

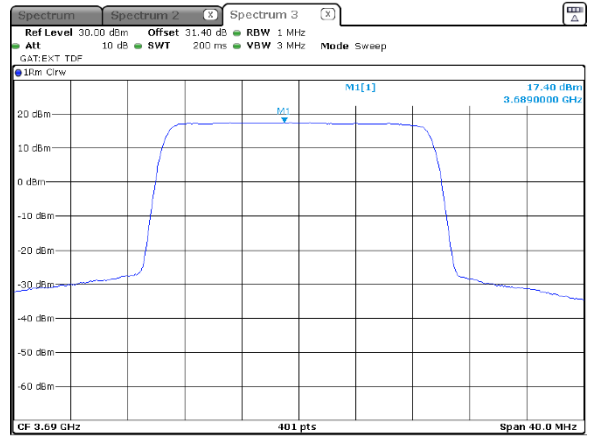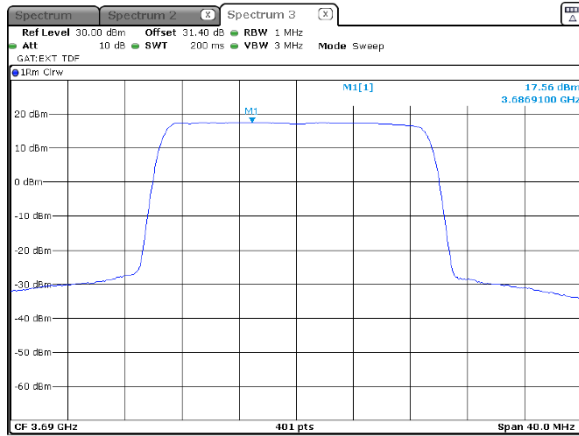





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.10 Peak spectral power density at high frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

20 MHz
2
Modulation: 16QAM

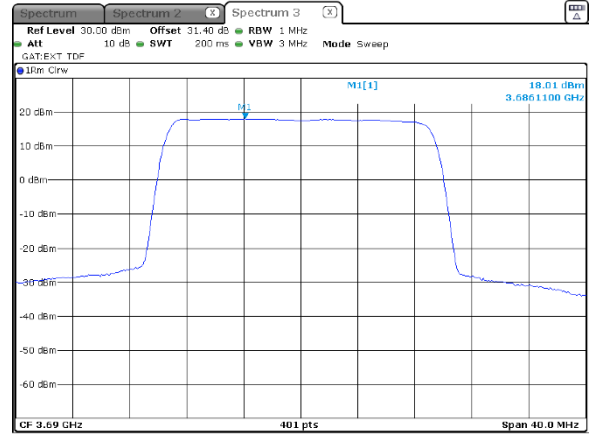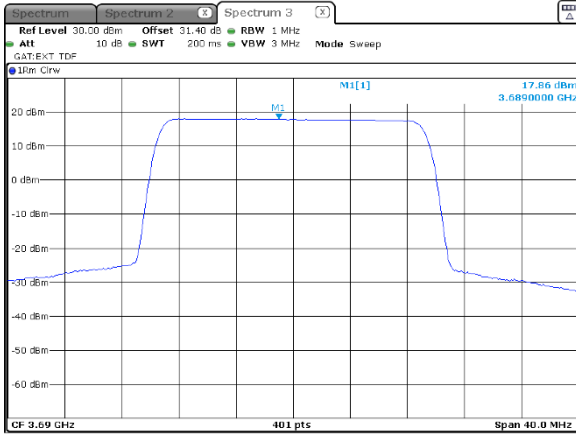

Modulation: 64QAM

Modulation: 256QAM

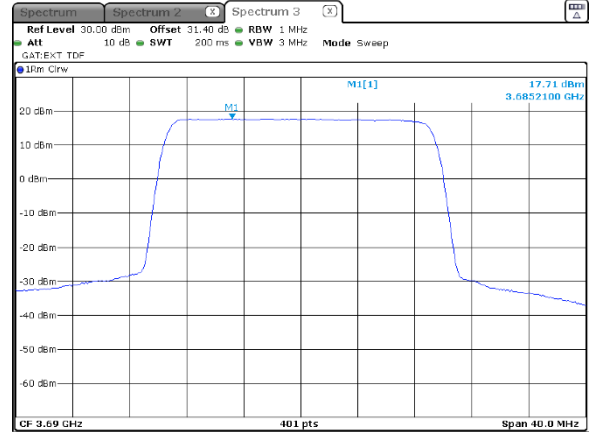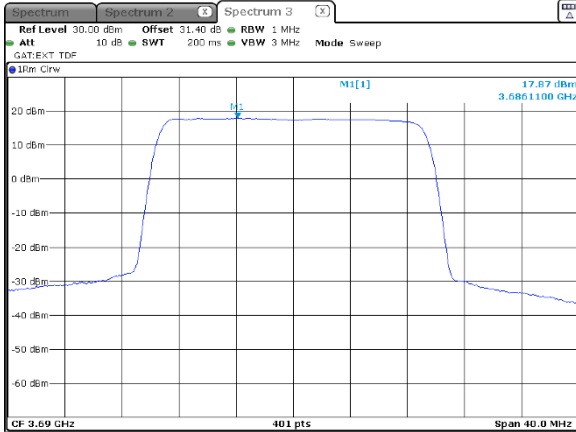





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.11 Peak spectral power density at high frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

20 MHz
3
Modulation: 16QAM

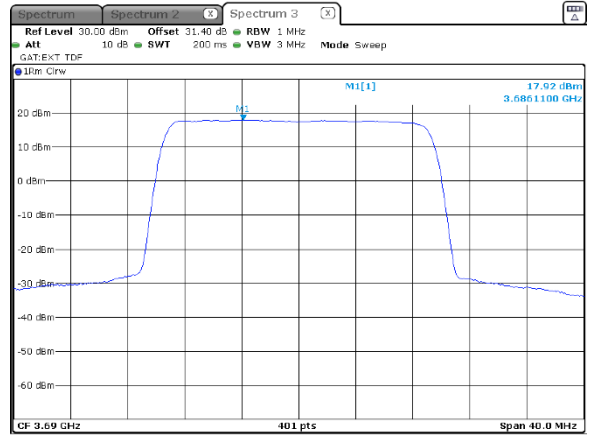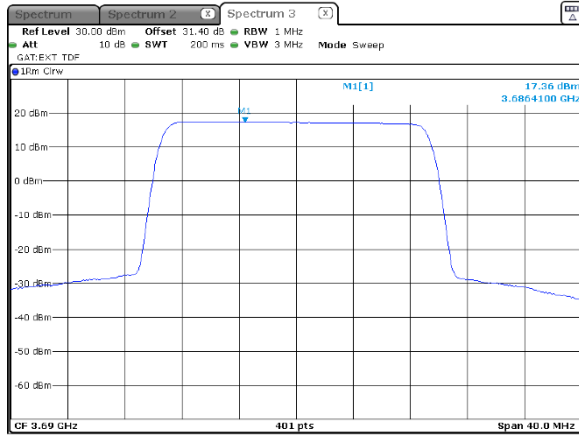

Modulation: 64QAM

Modulation: 256QAM

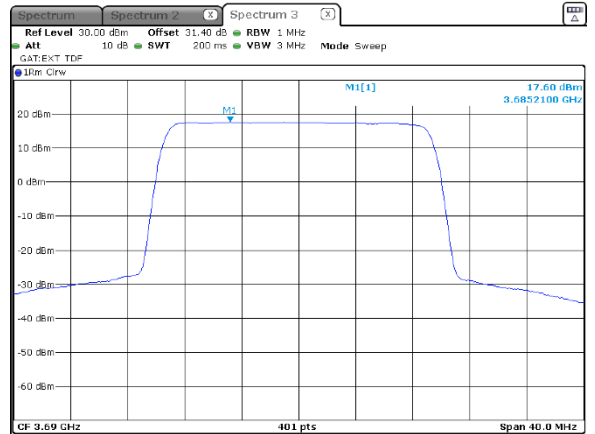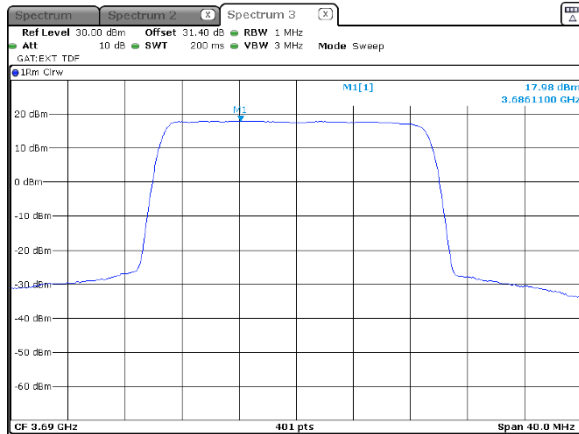





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.12 Peak spectral power density at high frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

20 MHz
4
Modulation: 16QAM

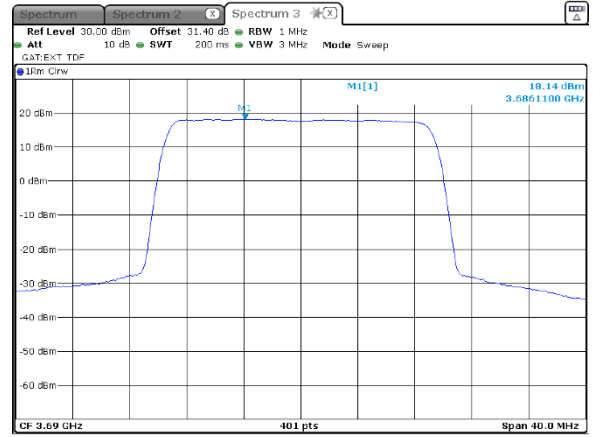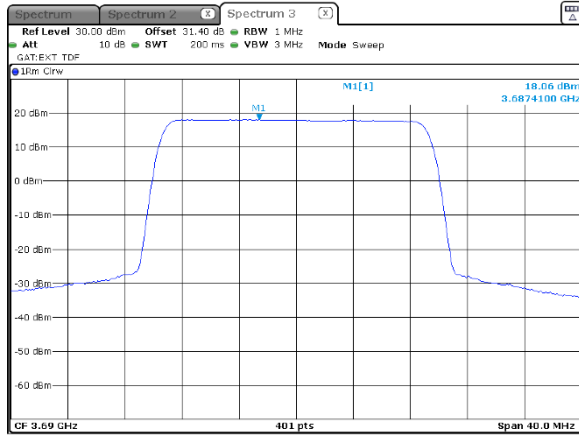

Modulation: 64QAM

Modulation: 256QAM

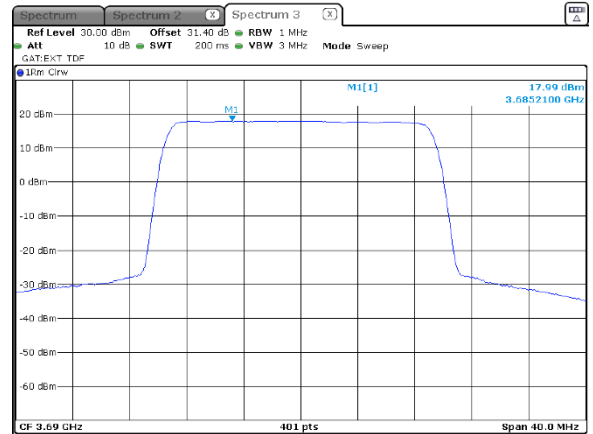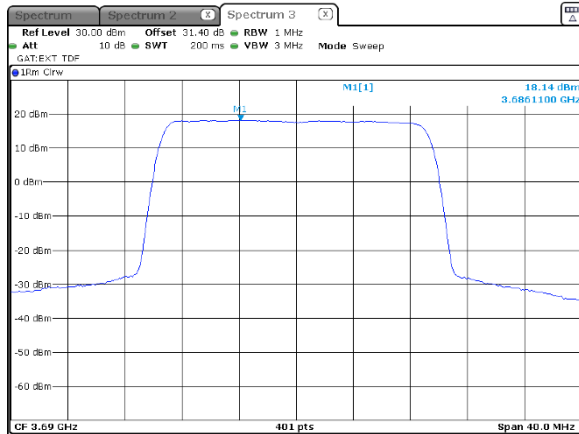




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.13 Peak spectral power density at low frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

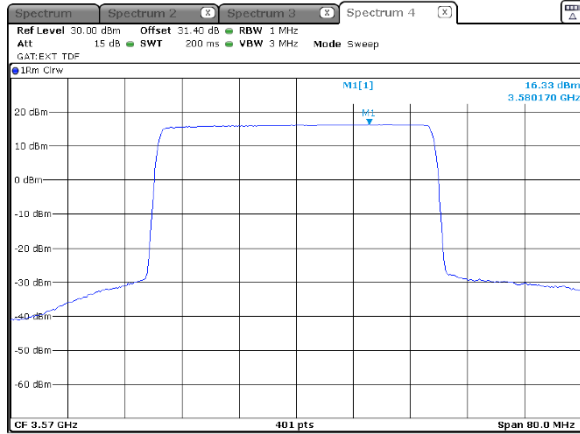


40 MHz
1
Modulation: 16QAM

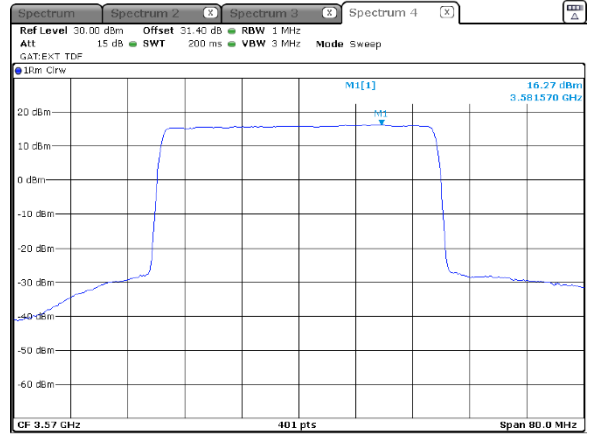

Modulation: 64QAM

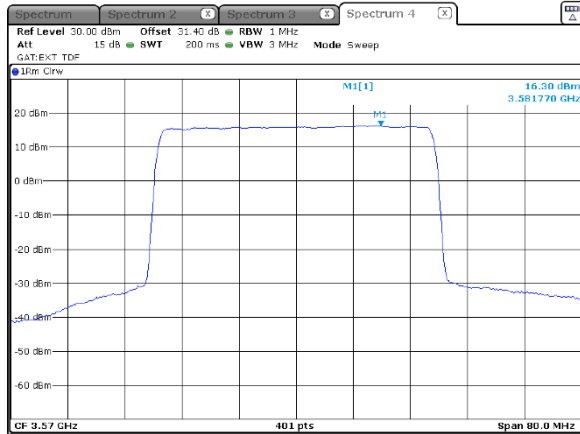

Modulation: 256QAM

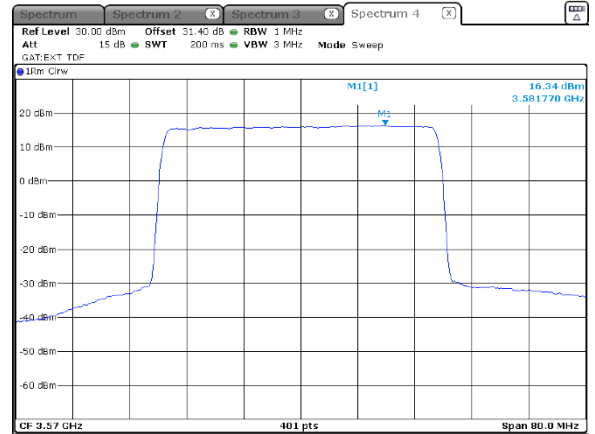




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.14 Peak spectral power density at low frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

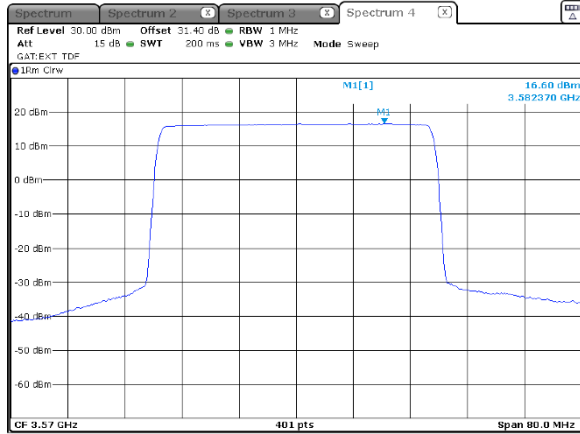


40 MHz
2
Modulation: 16QAM

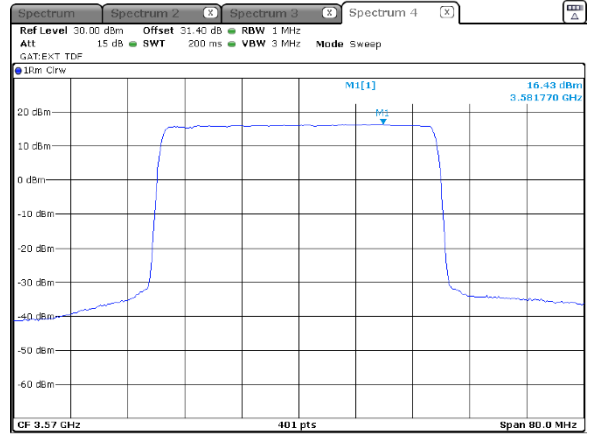

Modulation: 64QAM

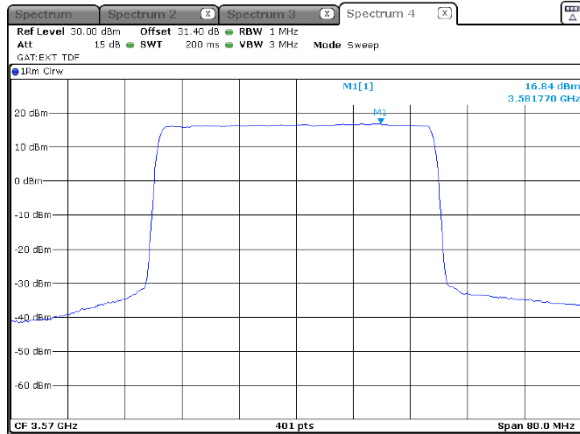

Modulation: 256QAM

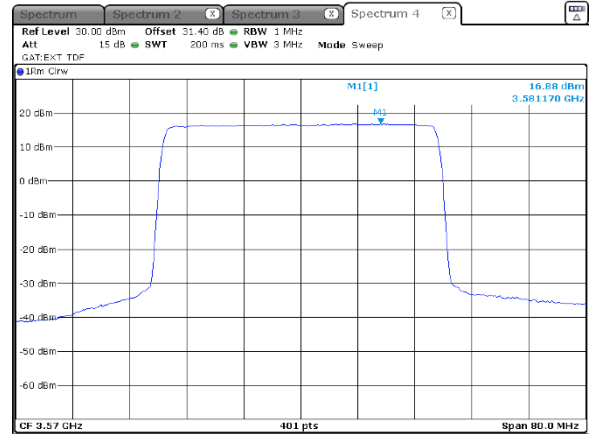




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.15 Peak spectral power density at low frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

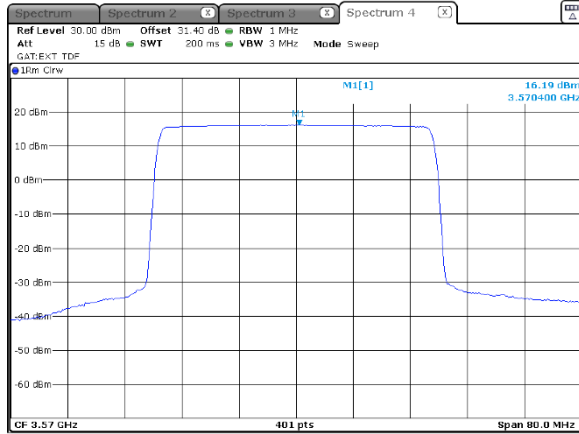


40 MHz
3
Modulation: 16QAM

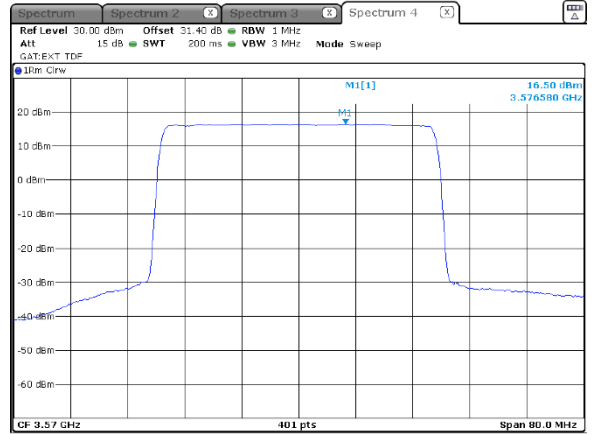

Modulation: 64QAM

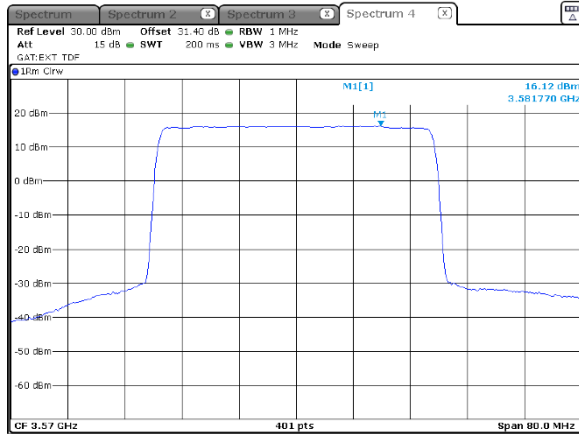

Modulation: 256QAM

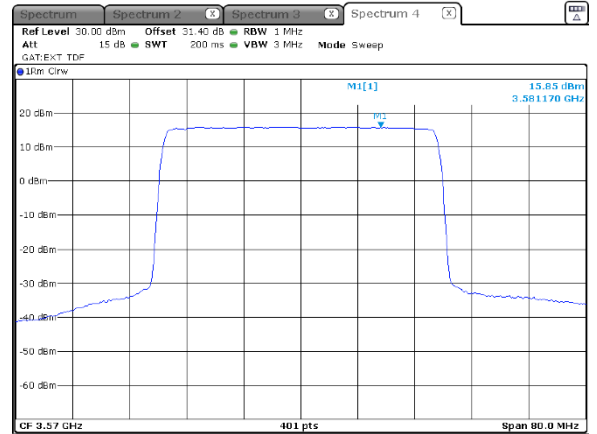




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.16 Peak spectral power density at low frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

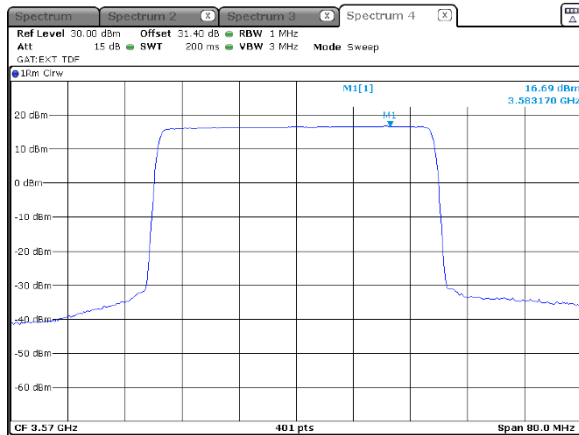


40 MHz
4
Modulation: 16QAM

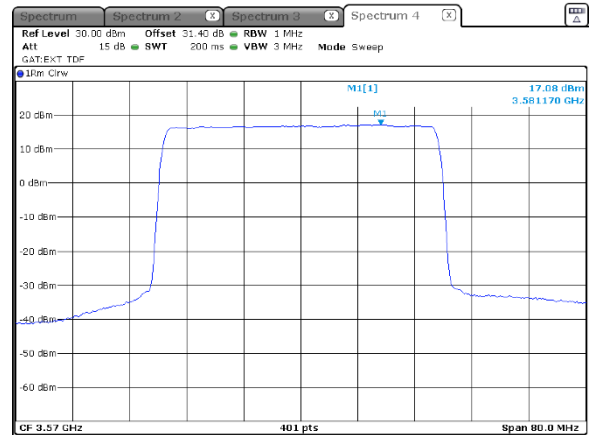

Modulation: 64QAM

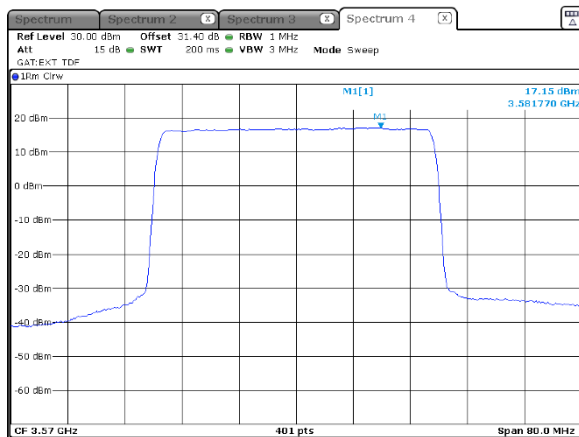

Modulation: 256QAM

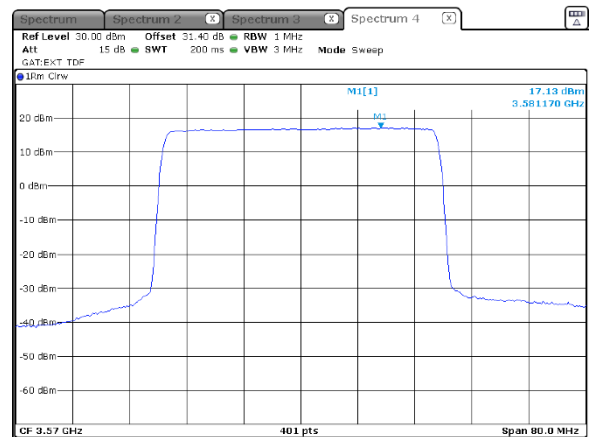





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.17 Peak spectral power density at mid frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

40 MHz
1
Modulation: 16QAM

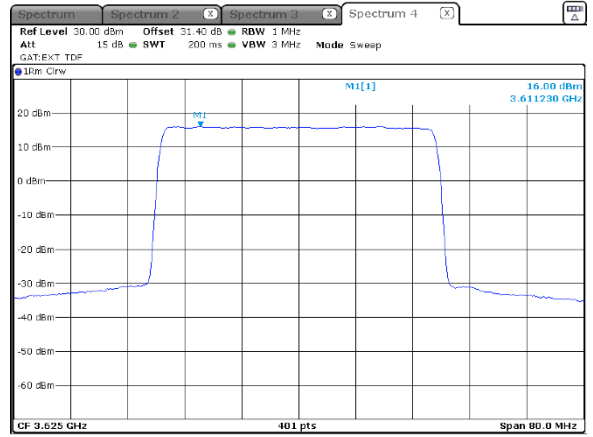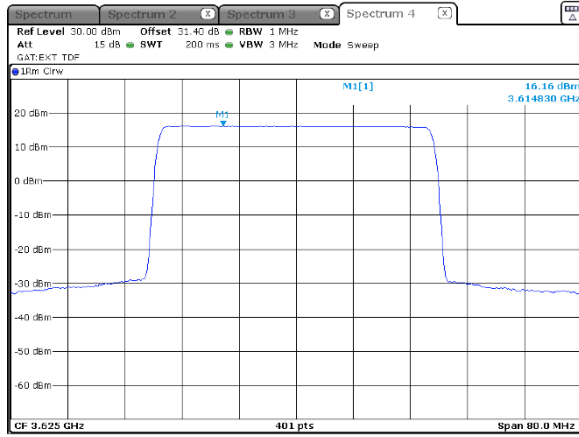

Modulation: 64QAM

Modulation: 256QAM

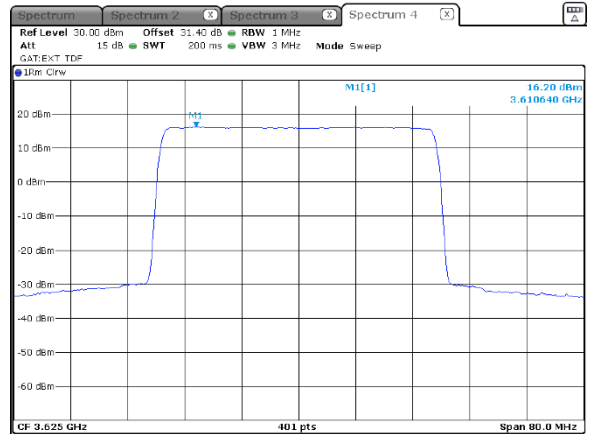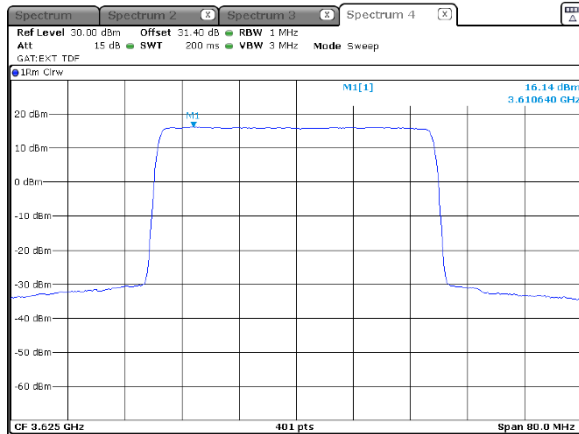




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.18 Peak spectral power density at mid frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

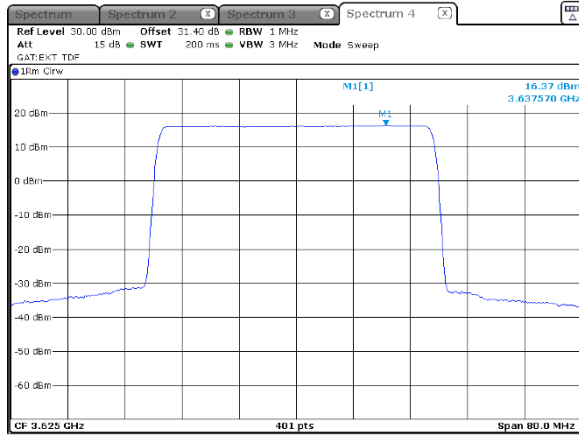


40 MHz
2
Modulation: 16QAM

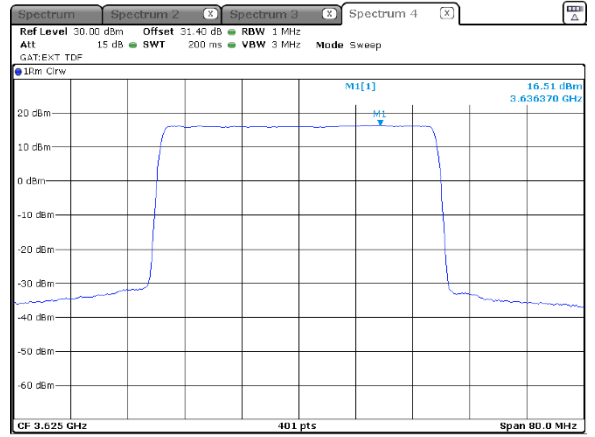

Modulation: 64QAM

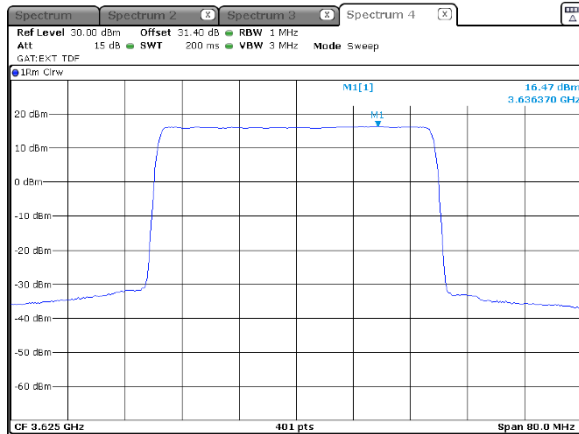

Modulation: 256QAM

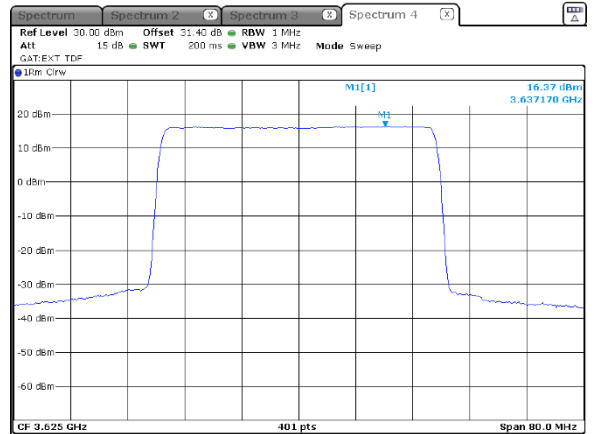




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.19 Peak spectral power density at mid frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

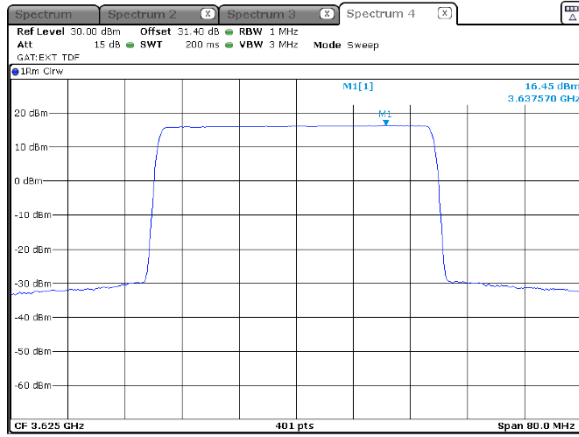


40 MHz
3
Modulation: 16QAM

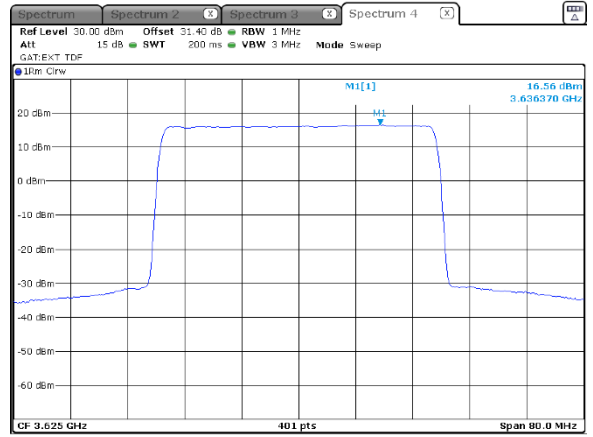

Modulation: 64QAM

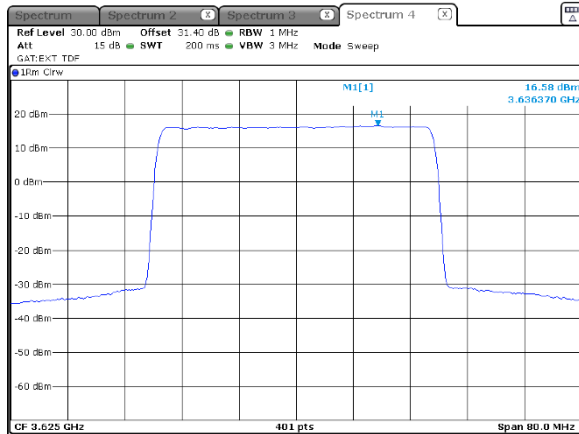

Modulation: 256QAM

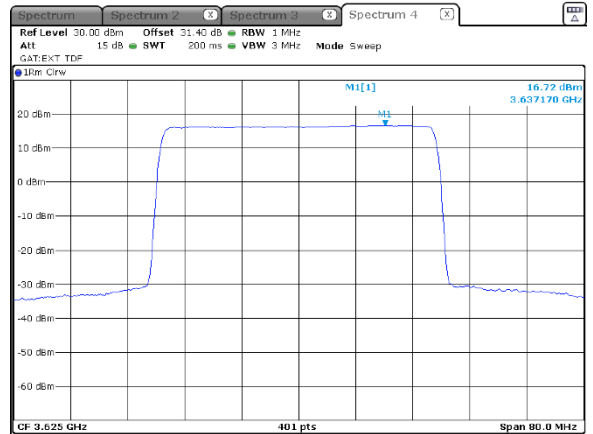





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.20 Peak spectral power density at mid frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

40 MHz
4
Modulation: 16QAM

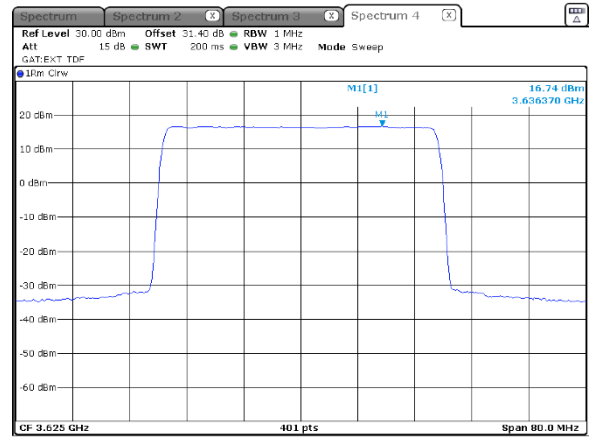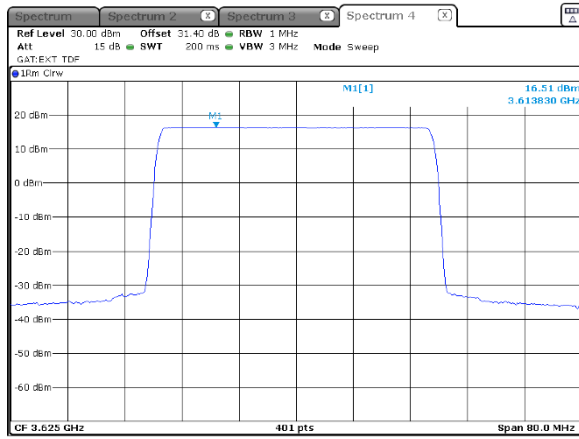

Modulation: 64QAM

Modulation: 256QAM

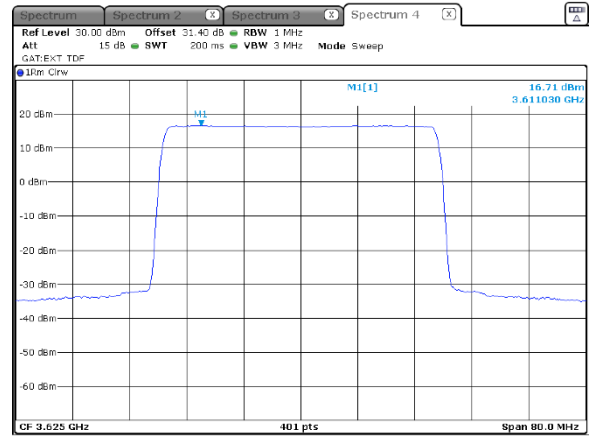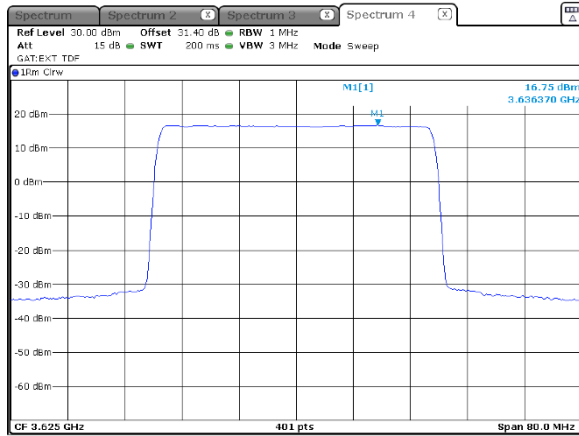





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.21 Peak spectral power density at high frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

40 MHz
1
Modulation: 16QAM

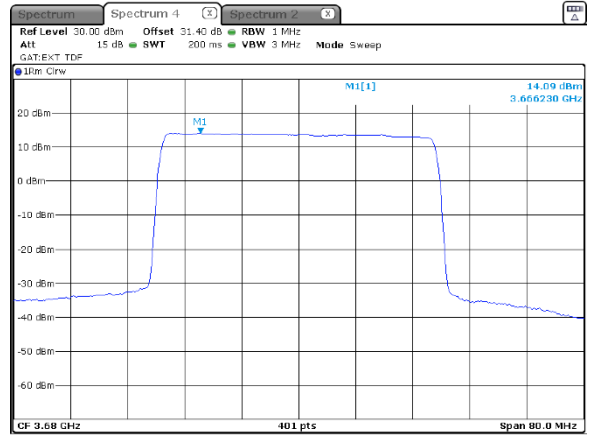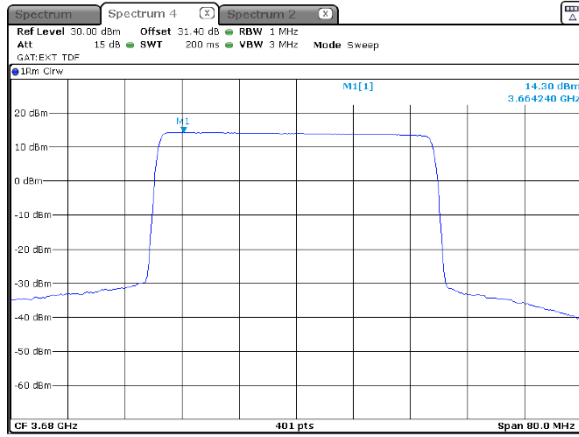

Modulation: 64QAM

Modulation: 256QAM

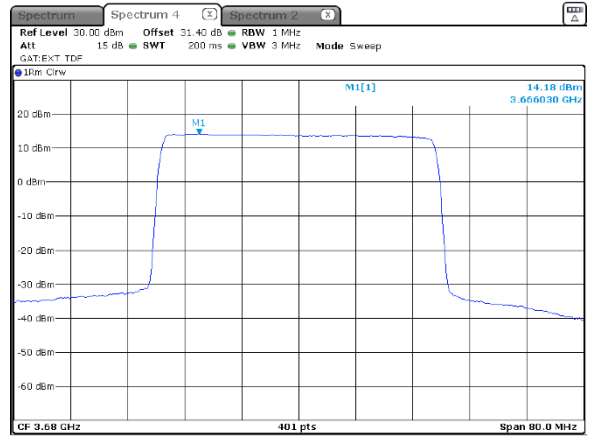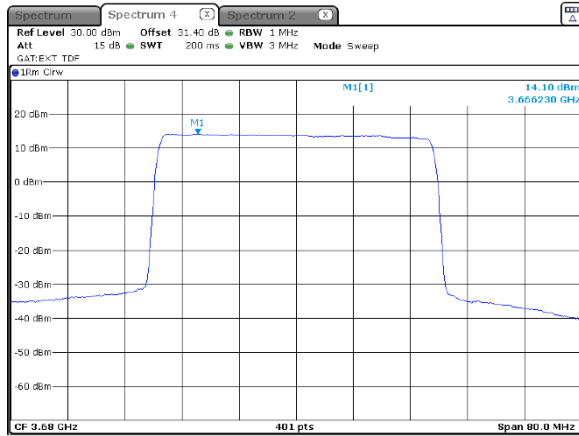




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.22 Peak spectral power density at high frequency


CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

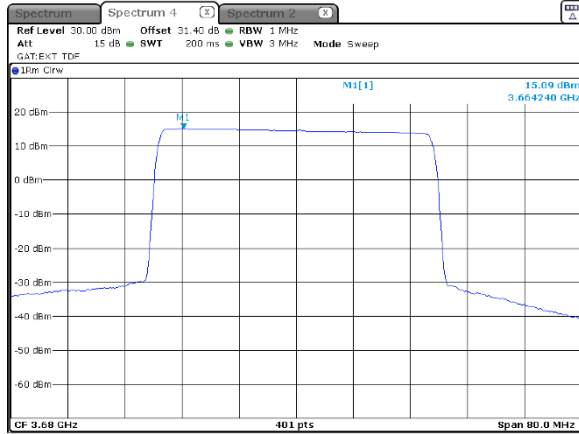


40 MHz
2
Modulation: 16QAM

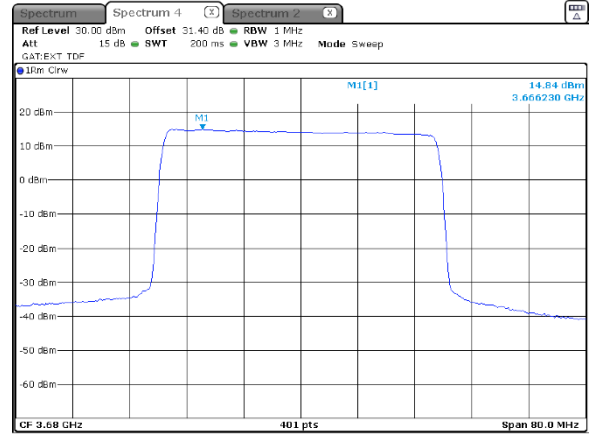

Modulation: 64QAM

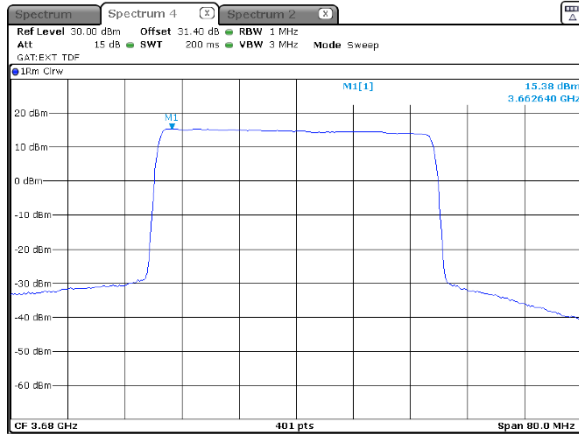

Modulation: 256QAM

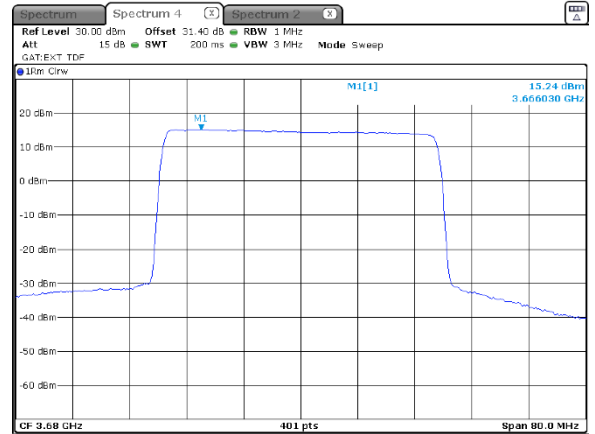





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.23 Peak spectral power density at high frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

40 MHz
3
Modulation: 16QAM

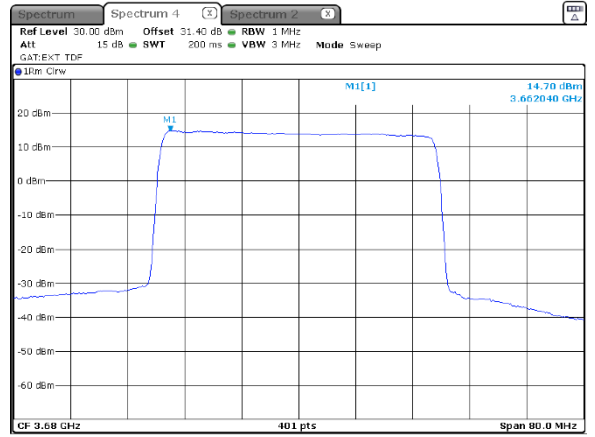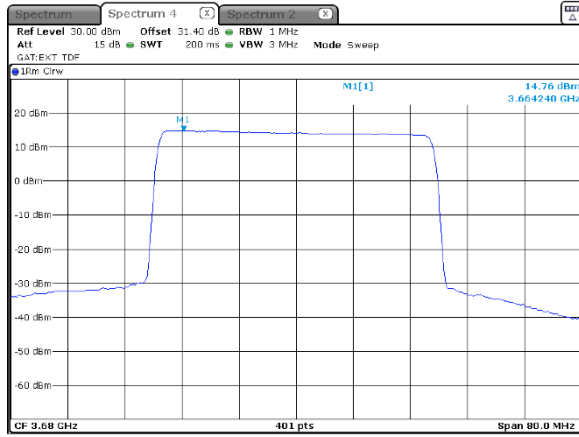

Modulation: 64QAM

Modulation: 256QAM

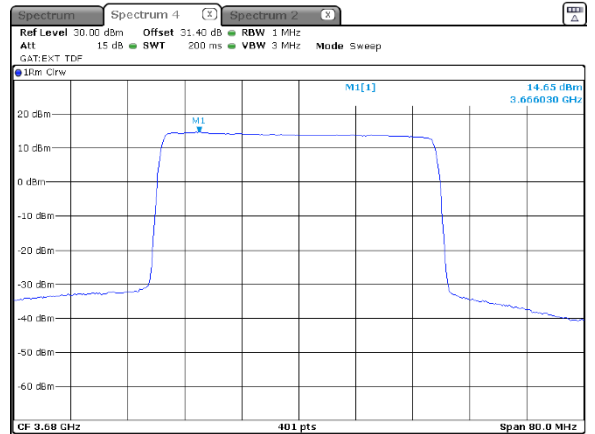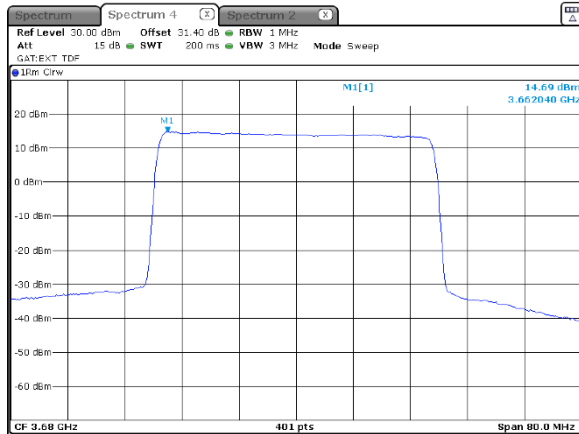





HERMON LABORATORIES

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.24 Peak spectral power density at high frequency



CHANNEL SPACING:
ANTENNA CHAIN:
Modulation: QPSK

40 MHz
4
Modulation: 16QAM

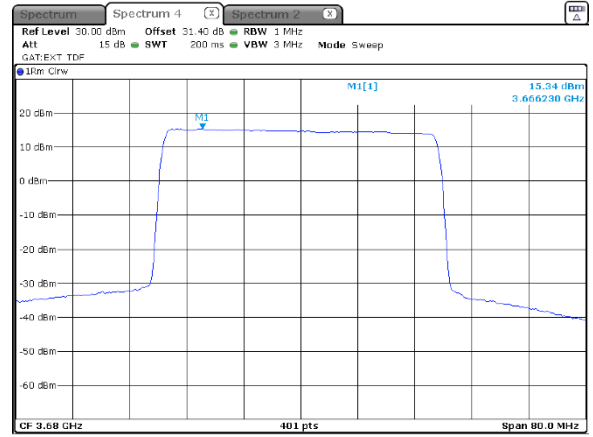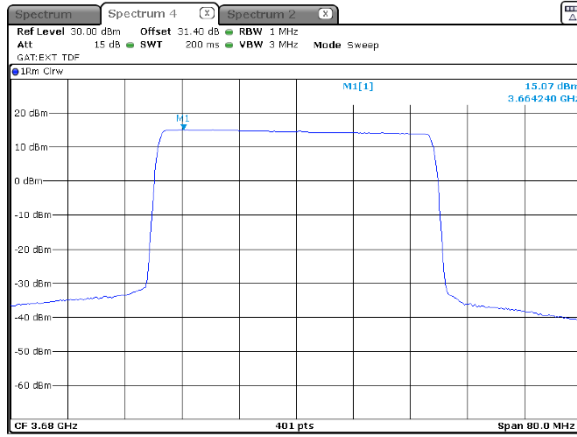

Modulation: 64QAM

Modulation: 256QAM

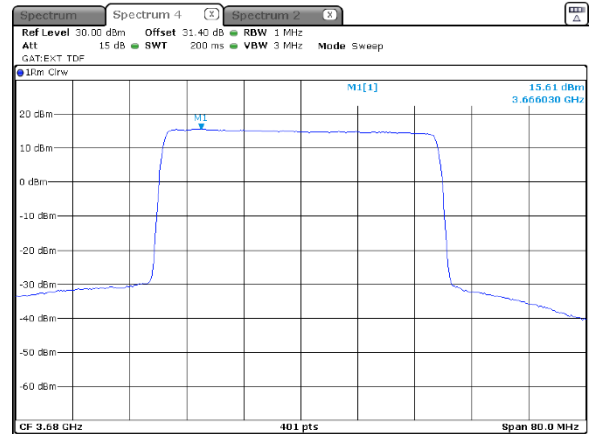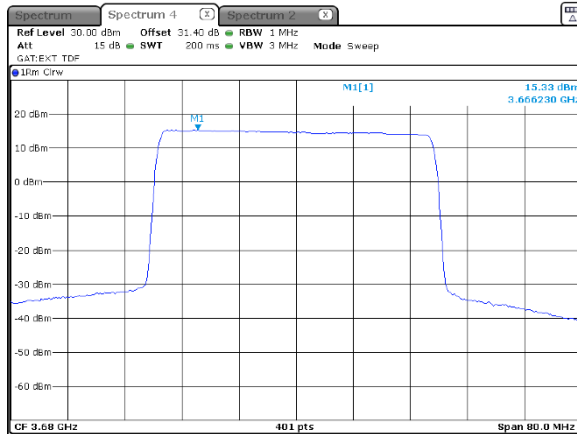



Test specification: Section 96.41(g), Peak-to- average power ratio			
Test procedure: Section 96.41(g)			
Test mode: Compliance		Verdict: PASS	
Date(s): 07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

7.2 Peak-to-average power ratio (PAPR) test

7.2.1 General

This test was performed to measure the peak to average power ratio at RF antenna connector. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak-to-average power ratio limits

Assigned frequency range, MHz	Peak to average power ratio limit	
	Probability, %	dB
3550.0 – 3700.0	0.1	13.0


7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to the end user RF output power.

7.2.2.3 The peak to average power ratio was measured with power meter as provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 Peak-to-average power ratio test setup

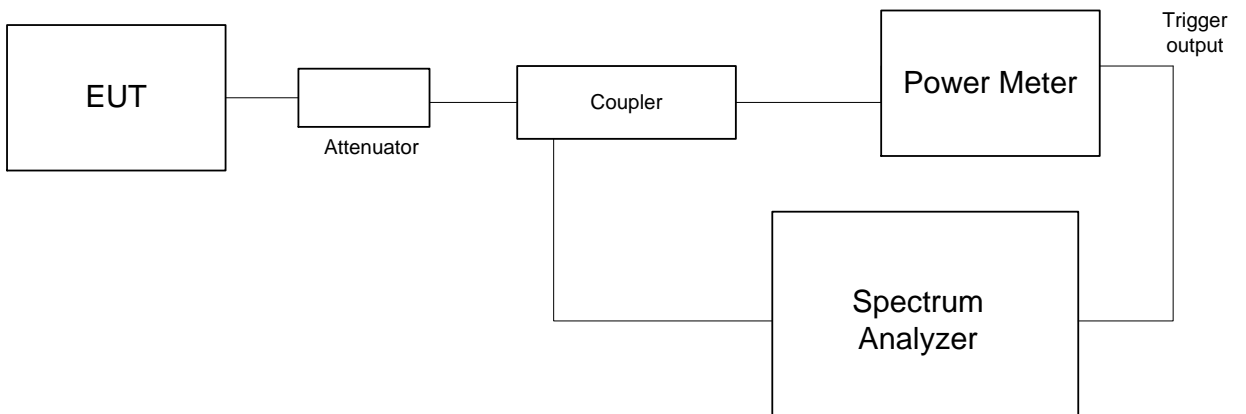



Test specification: Section 96.41(g), Peak-to- average power ratio			
Test procedure: Section 96.41(g)			
Test mode: Compliance		Verdict: PASS	
Date(s): 07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Table 7.2.2 Peak-to-average power ratio test results

OPERATING FREQUENCY RANGE: 3550 – 3700 MHz
DETECTOR USED: Peak/Average
MODULATING SIGNAL: PRBS
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Carrier frequency, MHz	Peak to average ratio, dB	Limit, dBm	Margin, dB	Verdict
Channel spacing 20 MHz				
Modulation QPSK				
3560.0	8.32	13.0	-4.68	Pass
3625.0	8.20	13.0	-4.80	Pass
3690.0	8.70	13.0	-4.30	Pass
Modulation 16QAM				
3560.0	8.29	13.0	-4.71	Pass
3625.0	8.14	13.0	-4.86	Pass
3690.0	8.41	13.0	-4.59	Pass
Modulation 64QAM				
3560.0	8.29	13.0	-4.71	Pass
3625.0	8.12	13.0	-4.88	Pass
3690.0	8.35	13.0	-4.65	Pass
Modulation 256QAM				
3560.0	8.38	13.0	-4.62	Pass
3625.0	8.14	13.0	-4.86	Pass
3690.0	8.58	13.0	-4.42	Pass



Test specification: Section 96.41(g), Peak-to- average power ratio			
Test procedure: Section 96.41(g)			
Test mode: Compliance		Verdict: PASS	
Date(s): 07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Table 7.2.3 Peak-to-average power ratio test results

OPERATING FREQUENCY RANGE: 3550 – 3700 MHz
DETECTOR USED: Peak/Average
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Carrier frequency, MHz	Peak to average ratio, dB	Limit, dBm	Margin, dB	Verdict
Channel spacing 40 MHz				
Modulation QPSK				
3570.0	9.44	13.0	-3.56	Pass
3625.0	9.62	13.0	-3.38	Pass
3680.0	9.60	13.0	-3.40	Pass
Modulation 16QAM				
3570.0	9.41	13.0	-3.59	Pass
3625.0	9.45	13.0	-3.55	Pass
3680.0	9.39	13.0	-3.61	Pass
Modulation 64QAM				
3570.0	9.45	13.0	-3.55	Pass
3625.0	9.43	13.0	-3.57	Pass
3680.0	9.39	13.0	-3.61	Pass
Modulation 256QAM				
3570.0	9.43	13.0	-3.57	Pass
3625.0	9.38	13.0	-3.62	Pass
3680.0	9.39	13.0	-3.61	Pass

Reference numbers of test equipment used

HL 3301	HL 4355	HL 5409				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES


Test specification: Section 96.41(g), Peak-to- average power ratio			
Test procedure: Section 96.41(g)			
Test mode: Compliance		Verdict: PASS	
Date(s): 07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.1 Peak-to-average power ratio test results at low frequency


CHANNEL SPACING:
ANTENNA PORT:
Modulation: QPSK

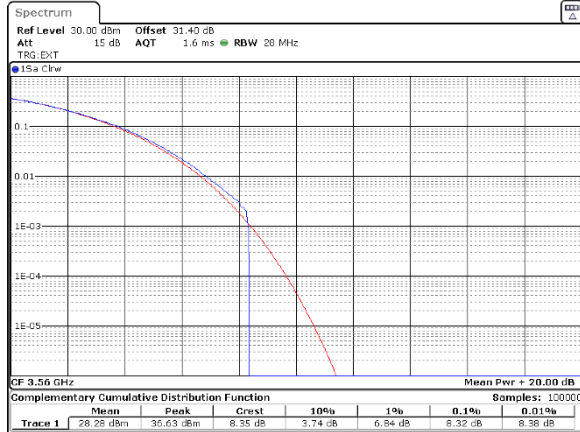

20 MHz
4
Modulation: 16QAM

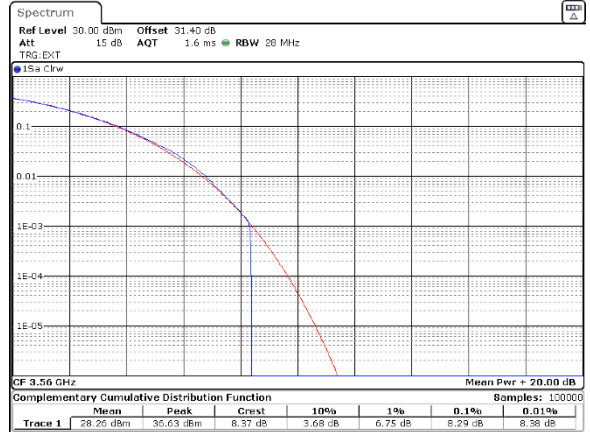

Modulation: 64QAM

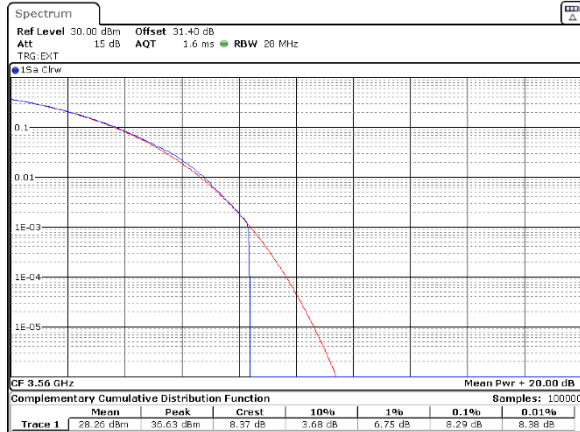

Modulation: 256QAM

