

# TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 and subpart B

FOR:

**Airspan Networks (Israel) Ltd.**  
**Terminal station**  
**Model: ProST 5.8 GHz**

This report is in conformity with ISO/IEC 17025. The A2LA logo endorsement applies only to the test methods and the standards that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information.....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines .....	5
6.3	Support and test equipment .....	5
6.4	Operating frequencies.....	5
6.5	Changes made in the EUT .....	5
6.6	Test configuration.....	6
6.7	Transmitter characteristics .....	7
7	Transmitter tests according to 47CFR part 15 subpart C requirements .....	8
7.1	Minimum 6 dB bandwidth.....	8
7.2	Peak output power .....	16
7.3	Spurious emissions at RF antenna connector.....	24
7.4	Field strength of spurious emissions .....	49
7.5	Peak spectral power density .....	78
7.6	Conducted emissions.....	86
7.7	Antenna requirements.....	89
8	Emission tests according to 47CFR part 15 subpart B requirements .....	90
8.1	Conducted emissions.....	90
8.2	Radiated emission measurements .....	93
9	APPENDIX A Test equipment and ancillaries used for tests.....	101
10	APPENDIX B Measurement uncertainties.....	103
11	APPENDIX C Test facility description .....	104
12	APPENDIX D Specification references .....	104
13	APPENDIX E Abbreviations and acronyms.....	105
14	APPENDIX F Test equipment correction factors.....	106

## 1 Applicant information

**Client name:** Airspan Networks (Israel) Ltd.  
**Address:** 1, Harava street, "Unitronics" building, POB 199, Airport City, 70100, Israel  
**Telephone:** +972 3977 7444  
**Fax:** +972 3977 7400  
**E-mail:** zlevi@Airspan.com  
**Contact name:** Mr. Zion Levi

## 2 Equipment under test attributes

**Product name:** Terminal station  
**Product type:** Transceiver  
**Model(s):** ProST 5.8GHz  
**Serial number:** 804F66C164C2  
**Software release:** V169.11  
**Hardware version:** A0  
**Receipt date:** 7/6/2006

## 3 Manufacturer information

**Manufacturer name:** Airspan Networks (Israel) Ltd.  
**Address:** 1, Harava street, "Unitronics" building, POB 199, Airport City, 70100, Israel  
**Telephone:** +972 3977 7444  
**Fax:** +972 3977 7400  
**E-Mail:** zlevi@Airspan.com  
**Contact name:** Mr. Zion Levi




## 4 Test details

**Project ID:** 17234  
**Location:** Hermon Laboratories Ltd. P.O.Box 23, Binyamina 30500, Israel  
**Test started:** 7/6/2006  
**Test completed:** 7/24/2006; 10/8/2006  
**Test specification(s):** FCC 47CFR part 15:2005, subpart C §§15.247, subpart B  
**Test suite:** FCC\_15.247\_DTS\_with\_RF\_connector (5/4/2004 10:53:46 AM, modified)

## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
Section 15.247(a)2, 6 dB bandwidth	Pass
Section 15.247(b)3, Peak output power	Pass
Section 15.247(e)(i), RF exposure	Pass, provided in Exhibit to Application
Section 15.247(c), Conducted spurious emissions	Pass
Section 15.247(c), Radiated spurious emissions	Pass
Section 15.247(d), Peak power density	Pass
Section 15.207(a), Conducted emission	Pass
Section 15.203, Antenna requirement	Pass
<b>Unintentional emissions</b>	
Section 15.107, Conducted emission at AC power port	Pass
Section 15.109, Radiated emission	Pass
Section 15.111, Conducted emission at receiver antenna port	Not required

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested.  
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. A. Adelberg, test engineer	July 24, 2006	
	Mr. A. Lane, test engineer	October 8, 2006	
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	October 12, 2006	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and Radio group leader	October 12, 2006	

## 6 EUT description

### 6.1 General information

The EUT, model name ProST, is a customer premises equipment (CPE) that connects IP-enabled devices directly to WiMAX networks providing high-speed broadband Internet access and a Fast Ethernet connection to the subscriber's local area network (LAN). It supports IP services at speeds of up to 13.1 Mbit/s over-the-air. The ProST is an outdoor unit powered from the mains via AC/DC adapter.

### 6.2 Ports and lines

Port type	Port description	Connected		Connector type	Qty.	Cable type	Cable length
		From	To				
Signal	48 V DC & Ethernet	EUT	SDA	D-type 15 pin	1	unshielded	10 m
Signal	RS232	EUT	Laptop	D-type 9 pin	1	unshielded	0.2 m
RF	Antenna	EUT	50 Ohm termination	N-type	1	NA	NA

### 6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
SDA	Airspan	NA	023-00500
Laptop	Dell	Ppx	48985
Adapter to laptop	Dell	AA20031	93640
Mouse	Microsoft	PS/2	X04-72169


### 6.4 Operating frequencies

Source	Frequency, MHz
Transmitter	5725 – 5850

### 6.5 Changes made in the EUT

No changes were implemented.

## 6.6 Test configuration

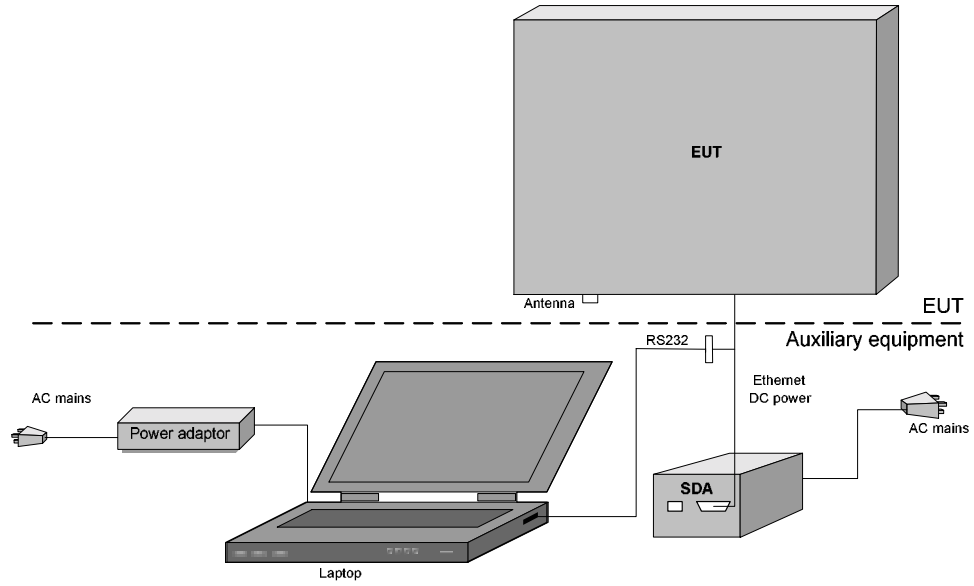

## 6.7 Transmitter characteristics

<b>Type of equipment</b>			
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)		
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)		
	Plug-in card (Equipment intended for a variety of host systems)		
<b>Intended use</b>		<b>Condition of use</b>	
<input checked="" type="checkbox"/>	Fixed	Always at a distance more than 2 m from all people	
	mobile	Always at a distance more than 20 cm from all people	
	portable	May operate at a distance closer than 20 cm to human body	
<b>Assigned frequency range</b>		5725 - 5850 MHz	
<b>Operating frequency range</b>		5730 – 5845 MHz	
<b>Maximum rated output power</b>		At transmitter 50 Ω RF output connector	19 dBm
<b>Is transmitter output power variable?</b>			
		No	
			continuous variable
<input checked="" type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	stepped variable with stepsize 1 dB
			minimum RF power -30 dBm
			maximum RF power 19 dBm
<b>Antenna connection</b>			
<input type="checkbox"/>	unique coupling	<input type="checkbox"/>	standard connector
<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	Integral
		<input checked="" type="checkbox"/>	with temporary RF connector
			without temporary RF connector
<b>Antenna/s technical characteristics</b>			
Type	Manufacturer	Model number	Gain
Vipol	MTI	MT-464008/MV	17 dBi
<b>Transmitter 99% power bandwidth</b>		5 MHz, 10 MHz	
<b>Transmitter aggregate data rate/s</b>		5 MHz BW: BPSK – 2.095 MBps, QPSK - 4.19 MBps, 16QAM – 12.565 MBps, 64QAM – 18.85 MBps	
		10 MHz BW: BPSK - 4.19 MBps, QPSK-8.38 MBps, 16QAM - 25.13 MBps, 64QAM - 37.7 MBps	
<b>Type of modulation</b>		BPSK, QPSK, 16QAM, 64QAM	
<b>Type of multiplexing</b>		OFDM	
<b>Modulating test signal (baseband)</b>		PRBS	
<b>Maximum transmitter duty cycle in normal use</b>		90%	
<b>Transmitter power source</b>			
<input checked="" type="checkbox"/>	DC	<b>Nominal rated voltage</b>	Battery type
	AC mains	<b>Nominal rated voltage</b>	Frequency Hz
		48 V	
<b>Common power source for transmitter and receiver</b>		<input checked="" type="checkbox"/>	yes no

<b>Test specification:</b>		<b>Section 15.247(a)2, 6 dB bandwidth</b>	
<b>Test procedure:</b>		FR Vol.62, page 26243, Section 15.247(a)2	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	7/11/2006 2:05:23 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 15 subpart C requirements

### 7.1 Minimum 6 dB bandwidth

#### 7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

\* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.


#### 7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 The 6 dB bandwidth test setup





<b>Test specification:</b>		<b>Section 15.247(a)2, 6 dB bandwidth</b>	
<b>Test procedure:</b>		FR Vol.62, page 26243, Section 15.247(a)2	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:05:23 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Table 7.1.2 The 6 dB bandwidth test results**

ASSIGNED FREQUENCY BAND: 5725 – 5850 MHz  
DETECTOR USED: Peak  
SWEEP MODE: Single  
SWEEP TIME: Auto  
MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc  
MODULATING SIGNAL: PRBS  
BIT RATE: Mbps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
<b>5 MHz channel spacing:</b>				
<b>BPSK:</b>				
5740	5060	500	4560	Pass
5785	5067	500	4567	Pass
5835	5066	500	4566	Pass
<b>64QAM:</b>				
5740	5067	500	4567	Pass
5785	5064	500	4564	Pass
5835	5063	500	4563	Pass
<b>10 MHz channel spacing:</b>				
<b>BPSK:</b>				
5740	9103	500	8603	Pass
5785	9100	500	8600	Pass
5835	9095	500	8595	Pass
<b>64QAM:</b>				
5740	9100	500	8600	Pass
5785	9098	500	8598	Pass
5835	9097	500	8597	Pass


**Reference numbers of test equipment used**

HL 1653	HL 2254	HL 2909						
---------	---------	---------	--	--	--	--	--	--


Full description is given in Appendix A.

<b>Test specification:</b>	<b>Section 15.247(a)2, 6 dB bandwidth</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(a)2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:05:23 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.1.1 The 6 dB bandwidth test result at low frequency, 5 MHz channel spacing, BPSK

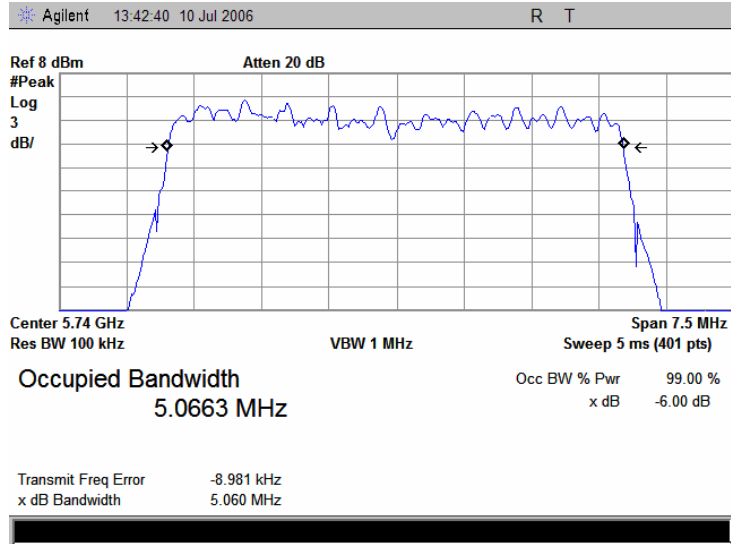


Plot 7.1.2 The 6 dB bandwidth test result at mid frequency, 5 MHz channel spacing, BPSK

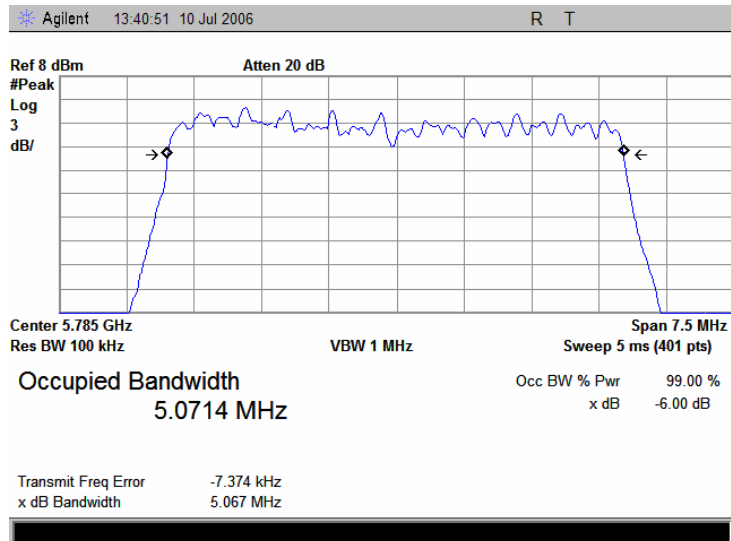


<b>Test specification:</b>	<b>Section 15.247(a)2, 6 dB bandwidth</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(a)2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:05:23 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.1.3 The 6 dB bandwidth test result at high frequency, 5 MHz channel spacing, BPSK

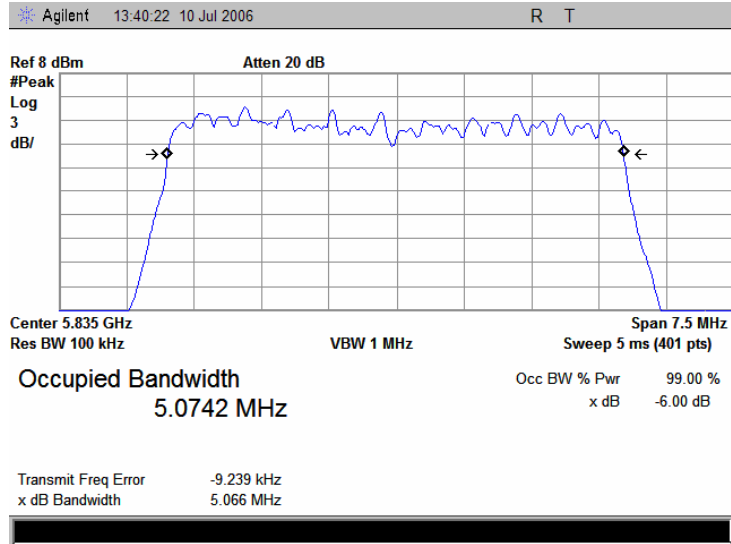


Plot 7.1.4 The 6 dB bandwidth test result at low frequency, 5 MHz channel spacing, 64QAM

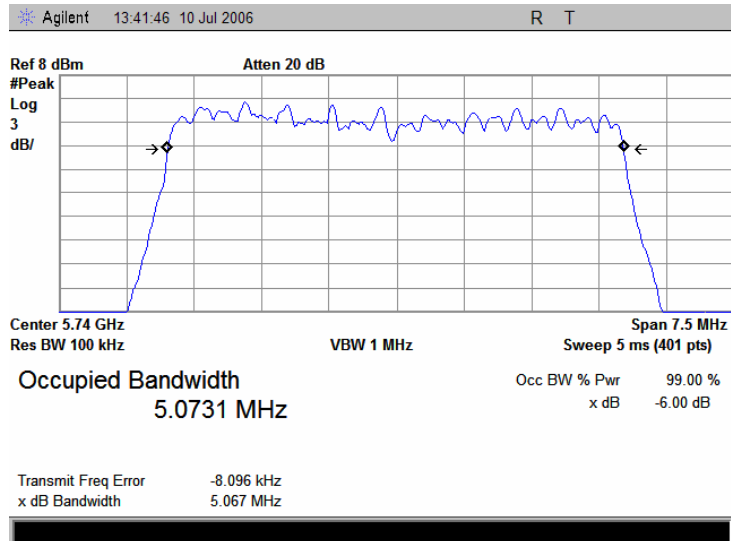


<b>Test specification:</b>	<b>Section 15.247(a)2, 6 dB bandwidth</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(a)2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:05:23 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.1.5 The 6 dB bandwidth test result at mid frequency, 5 MHz channel spacing, 64QAM

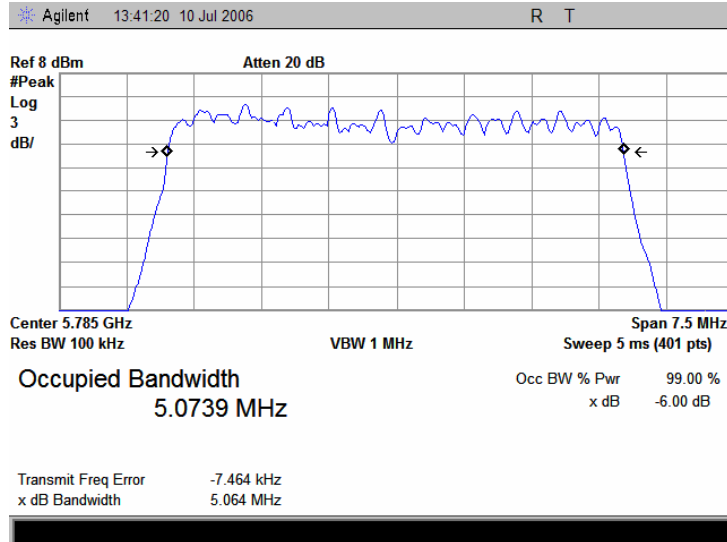


Plot 7.1.6 The 6 dB bandwidth test result at high frequency, 5 MHz channel spacing, 64QAM

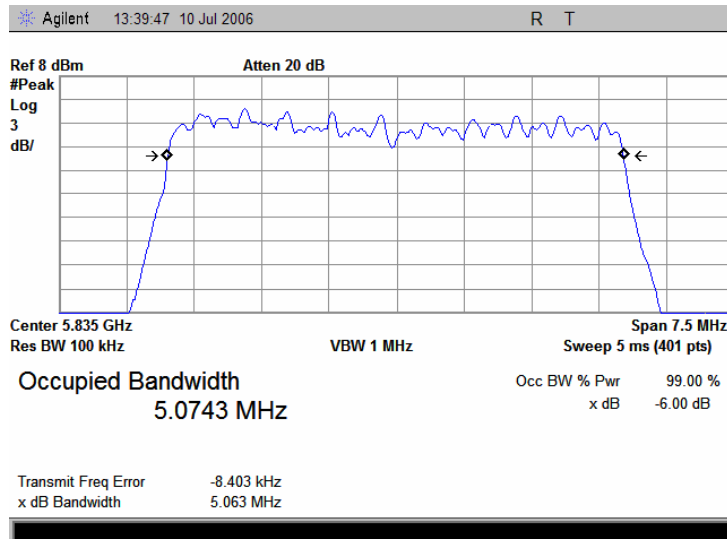


<b>Test specification:</b>	<b>Section 15.247(a)2, 6 dB bandwidth</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(a)2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:05:23 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.1.7 The 6 dB bandwidth test result at low frequency, 10 MHz channel spacing, BPSK

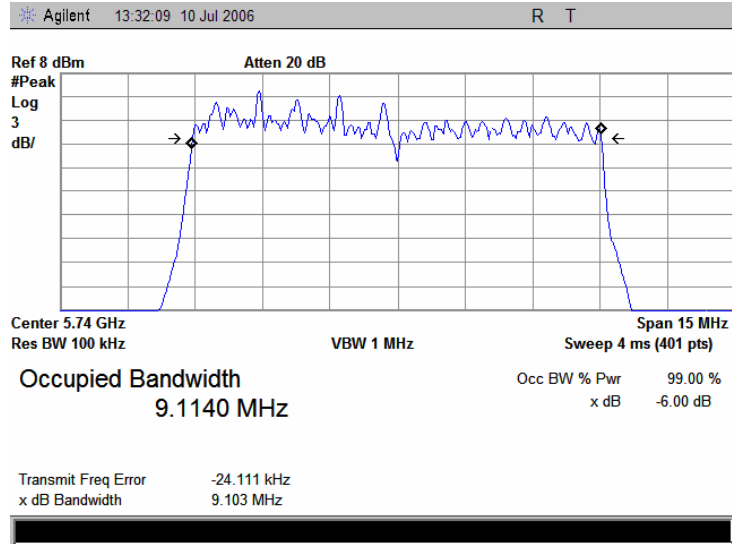


Plot 7.1.8 The 6 dB bandwidth test result at mid frequency, 10 MHz channel spacing, BPSK

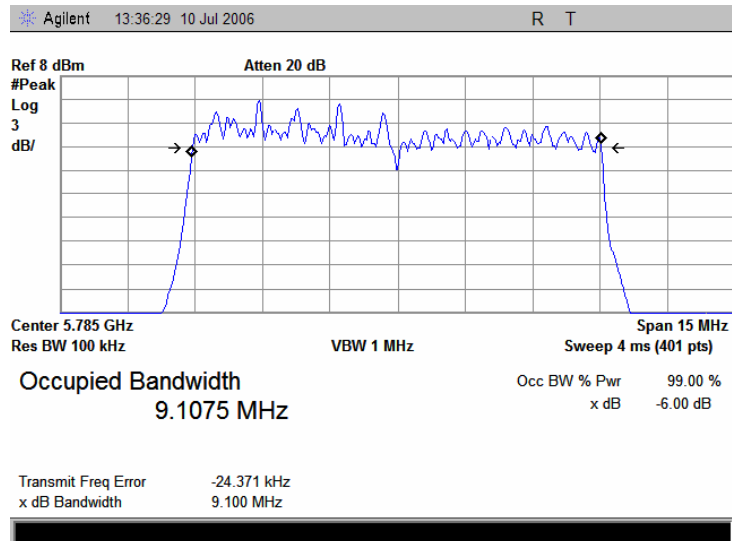


<b>Test specification:</b>	<b>Section 15.247(a)2, 6 dB bandwidth</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(a)2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:05:23 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.1.9 The 6 dB bandwidth test result at high frequency, 10 MHz channel spacing, BPSK

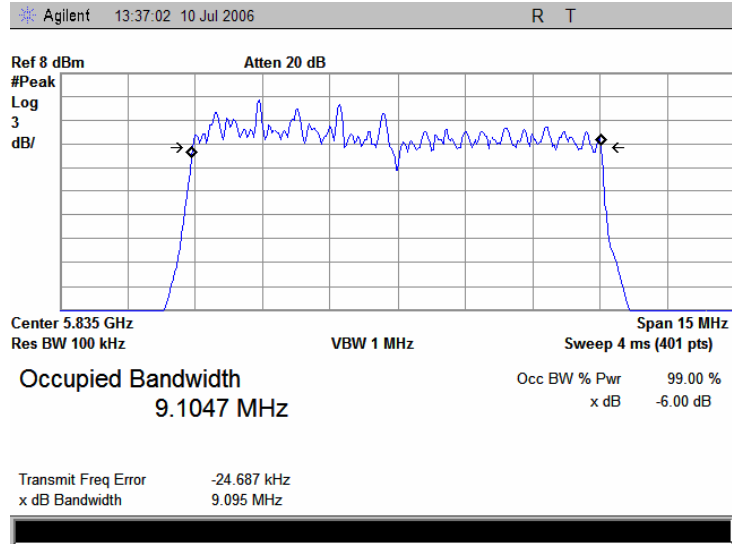


Plot 7.1.10 The 6 dB bandwidth test result at low frequency, 10 MHz channel spacing, 64QAM

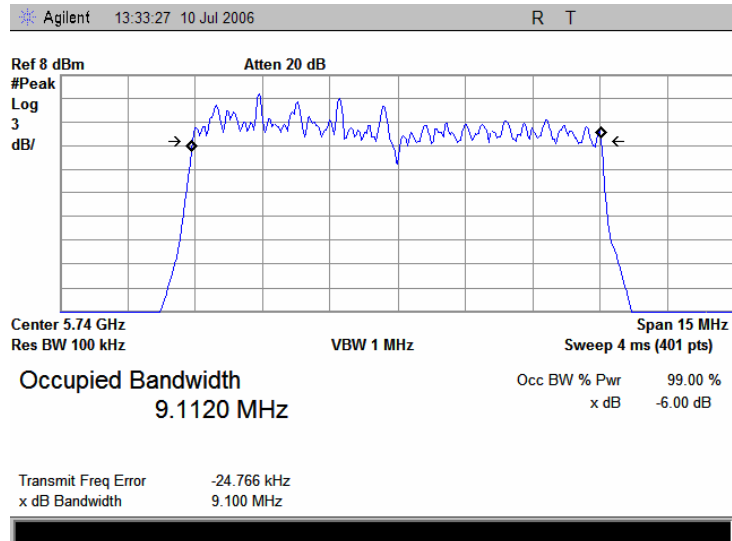


<b>Test specification:</b>	<b>Section 15.247(a)2, 6 dB bandwidth</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(a)2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:05:23 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.1.11 The 6 dB bandwidth test result at mid frequency, 10 MHz channel spacing, 64QAM

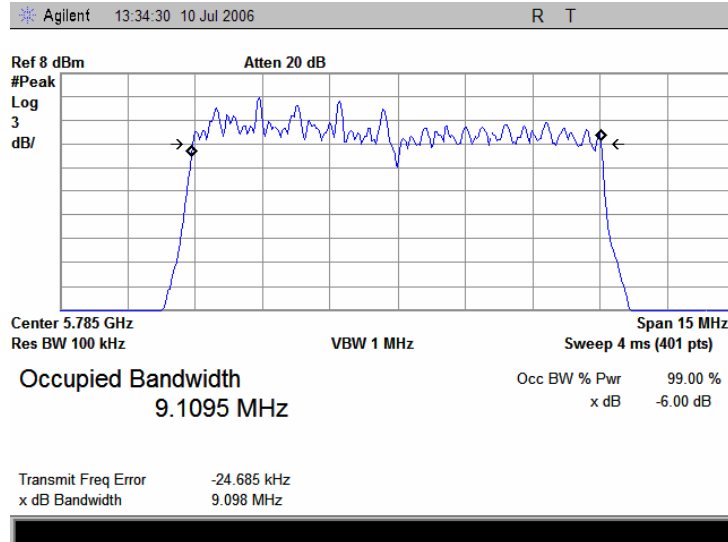

Plot 7.1.12 The 6 dB bandwidth test result at high frequency, 10 MHz channel spacing, 64QAM

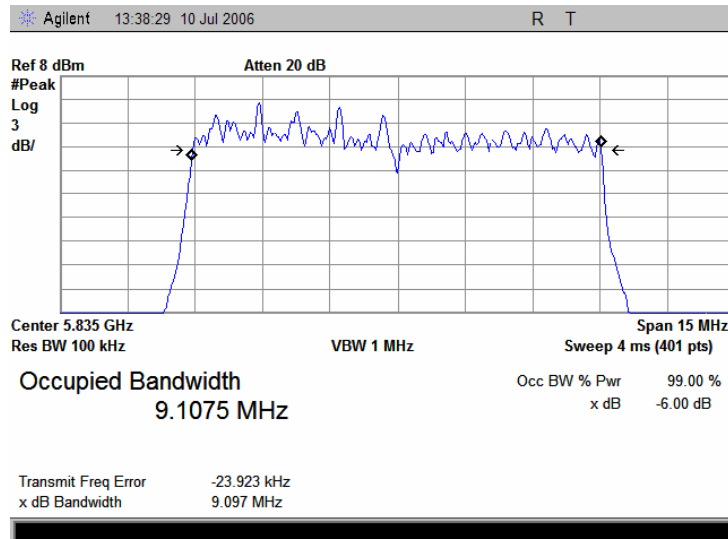

<b>Test specification:</b>		<b>Section 15.247(b)3, Peak output power</b>	
<b>Test procedure:</b> FR Vol.62, page 26243, Section 15.247(b)			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date &amp; Time:</b> 10/8/2006 3:03:06 PM			
<b>Temperature:</b> 22°C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.2 Peak output power

### 7.2.1 General

This test was performed to measure the maximum peak output power at the transmitter RF antenna connector. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*	
		W	dBm
902.0 – 928.0	6.0	1.0	30.0
2400.0 – 2483.5			
5725.0 – 5850.0			

\*- If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;

without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;

by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.


### 7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the maximum peak output power was measured as provided in Table 7.2.2 and associated plots.

Figure 7.2.1 Peak output power test setup





<b>Test specification:</b>		<b>Section 15.247(b)3, Peak output power</b>	
<b>Test procedure:</b>		FR Vol.62, page 26243, Section 15.247(b)	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	10/8/2006 3:03:06 PM		
<b>Temperature:</b> 22°C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY: 5725 – 5850 MHz  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 EUT 6 dB BANDWIDTH: 5, 10 MHz  
 RESOLUTION BANDWIDTH: 300 kHz  
 VIDEO BANDWIDTH: 3 MHz

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	Cable loss, dB	Peak output power, dBm	Limit*, dBm	Margin**, dB	Verdict
<b>5 MHz channel spacing:</b>							
<b>BPSK:</b>							
5730	18.81	included	included	18.81	19.0	-0.19	Pass
5785	17.75	included	included	17.75	19.0	-1.25	Pass
5845	18.11	included	included	18.11	19.0	-0.89	Pass
<b>64QAM:</b>							
5730	18.32	included	included	18.32	19.0	-0.68	Pass
5785	17.80	included	included	17.80	19.0	-1.20	Pass
5845	17.35	included	included	17.35	19.0	-1.65	Pass
<b>10 MHz channel spacing:</b>							
<b>BPSK:</b>							
5732.5	18.14	included	included	18.14	19.0	-0.86	Pass
5785	18.09	included	included	18.09	19.0	-0.91	Pass
5842.5	18.72	included	included	18.72	19.0	-0.28	Pass
<b>64QAM:</b>							
5732.5	18.82	included	included	18.82	19.0	-0.18	Pass
5785	18.15	included	included	18.15	19.0	-0.85	Pass
5842.5	17.68	included	included	17.68	19.0	-1.32	Pass

\* - Limit = max EIRP – Antenna gain = 36 – 17 = 19 dBm  
 \*\* - Margin = Peak output power – specification limit.


Reference numbers of test equipment used

HL 1650	HL 2254	HL 2780				
---------	---------	---------	--	--	--	--


Full description is given in Appendix A.

<b>Test specification:</b>	<b>Section 15.247(b)3, Peak output power</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(b)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	10/8/2006 3:03:06 PM		
<b>Temperature:</b> 22°C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.2.1 Peak output power at low frequency, 5 MHz channel spacing, BPSK

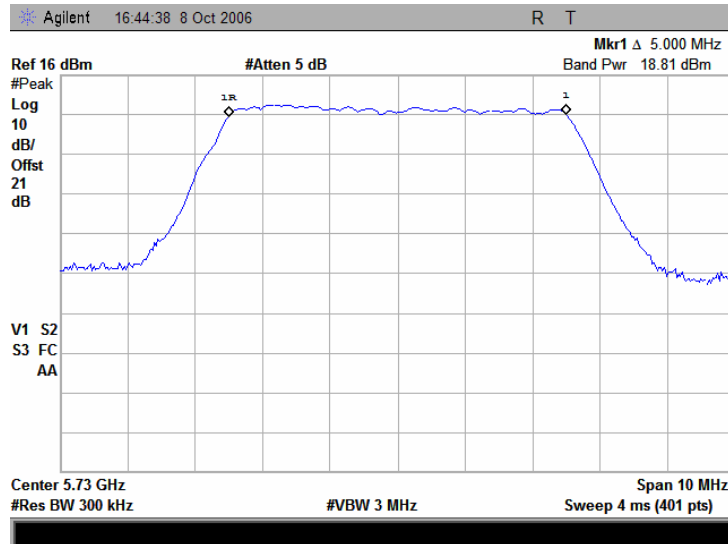


Plot 7.2.2 Peak output power at mid frequency, 5 MHz channel spacing, BPSK

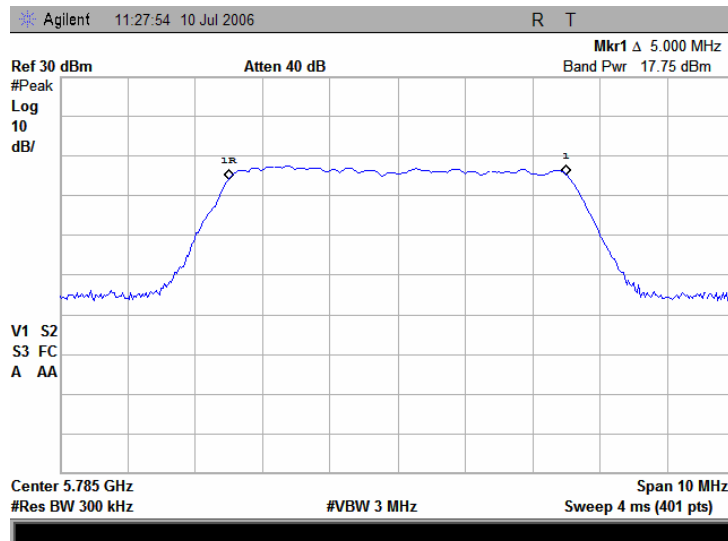


<b>Test specification:</b>	<b>Section 15.247(b)3, Peak output power</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(b)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	10/8/2006 3:03:06 PM		
<b>Temperature:</b> 22°C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.2.3 Peak output power at high frequency, 5 MHz channel spacing, BPSK

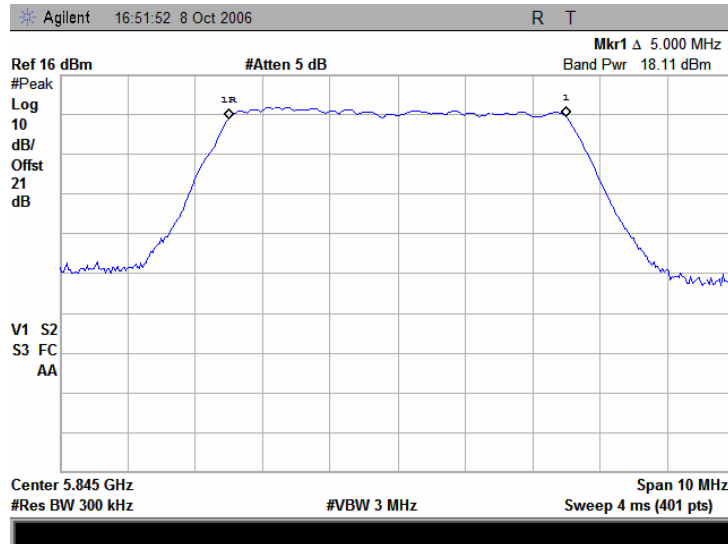


Plot 7.2.4 Peak output power at low frequency, 5 MHz channel spacing, 64QAM

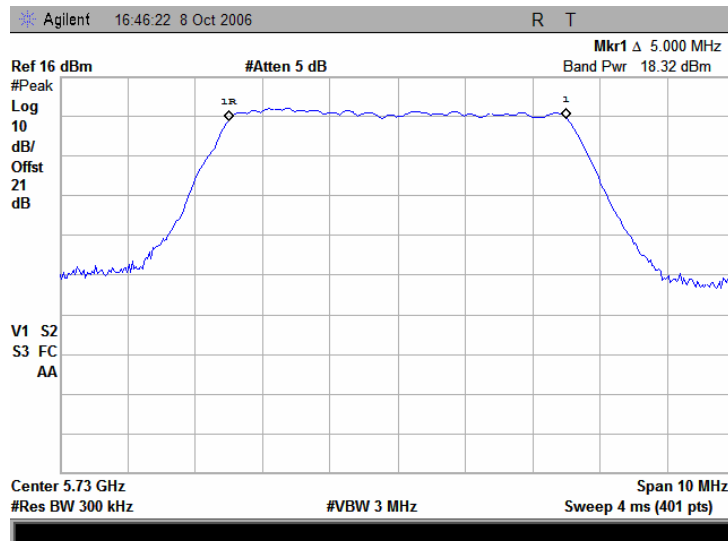


<b>Test specification:</b>	<b>Section 15.247(b)3, Peak output power</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(b)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	10/8/2006 3:03:06 PM		
<b>Temperature:</b> 22°C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.2.5 Peak output power at mid frequency, 5 MHz channel spacing, 64QAM

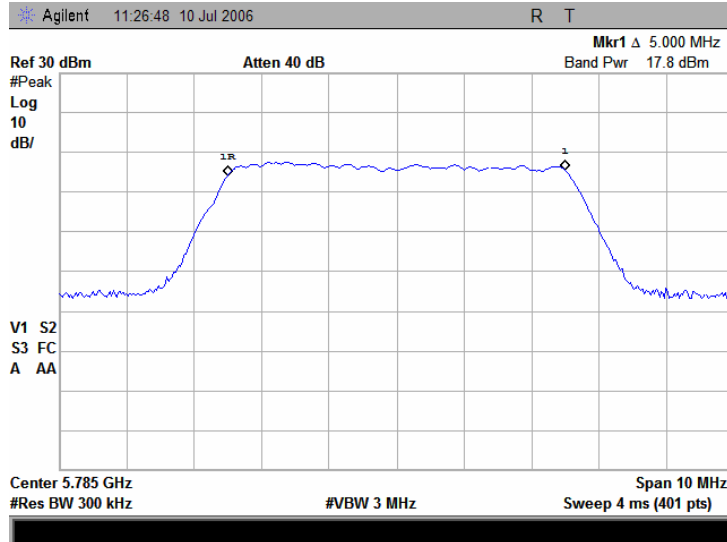


Plot 7.2.6 Peak output power at high frequency, 5 MHz channel spacing, 64QAM

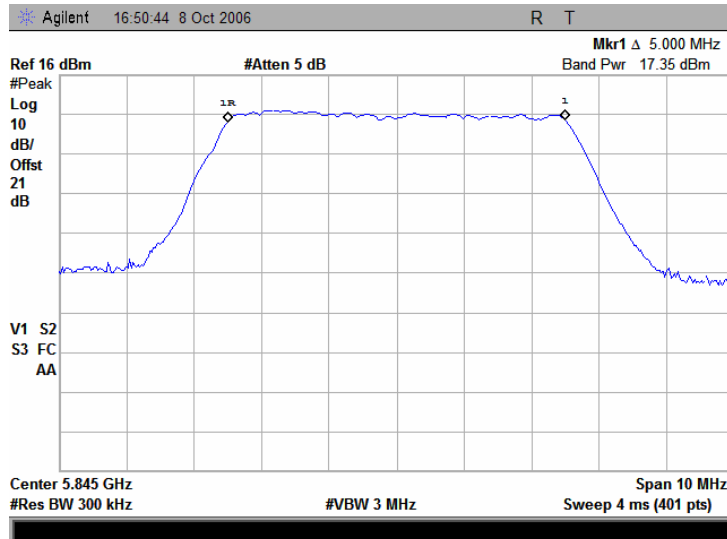


<b>Test specification:</b>	<b>Section 15.247(b)3, Peak output power</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(b)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	10/8/2006 3:03:06 PM		
<b>Temperature:</b> 22°C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.2.7 Peak output power at low frequency, 10 MHz channel spacing, BPSK

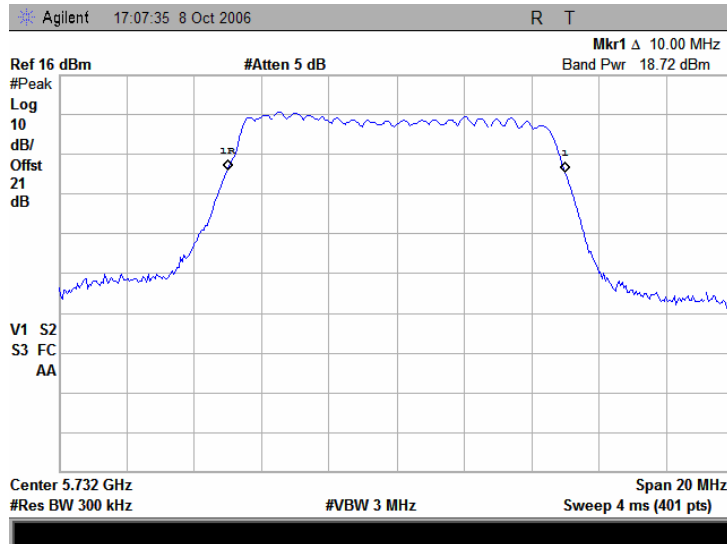


Plot 7.2.8 Peak output power at mid frequency, 10 MHz channel spacing, BPSK

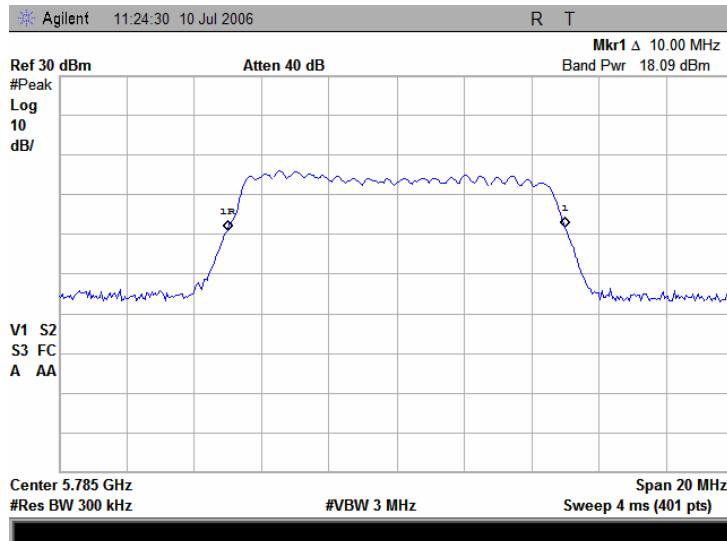


<b>Test specification:</b>	<b>Section 15.247(b)3, Peak output power</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(b)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	10/8/2006 3:03:06 PM		
<b>Temperature:</b> 22°C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.2.9 Peak output power at high frequency, 10 MHz channel spacing, BPSK

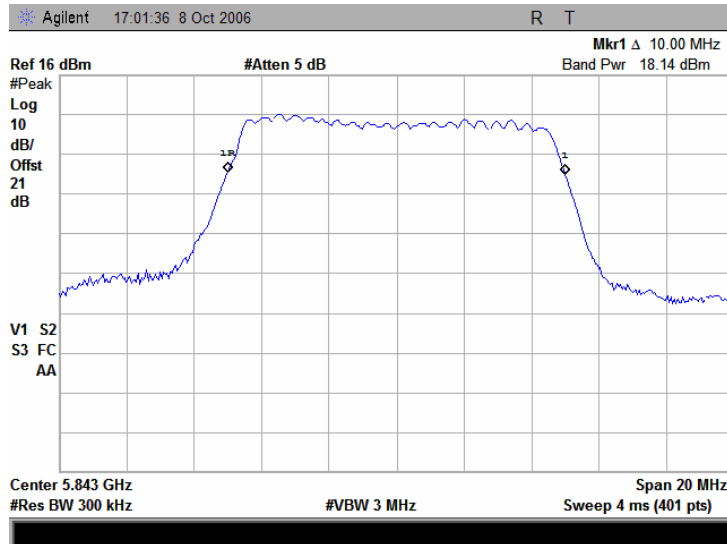


Plot 7.2.10 Peak output power at low frequency, 10 MHz channel spacing, 64QAM

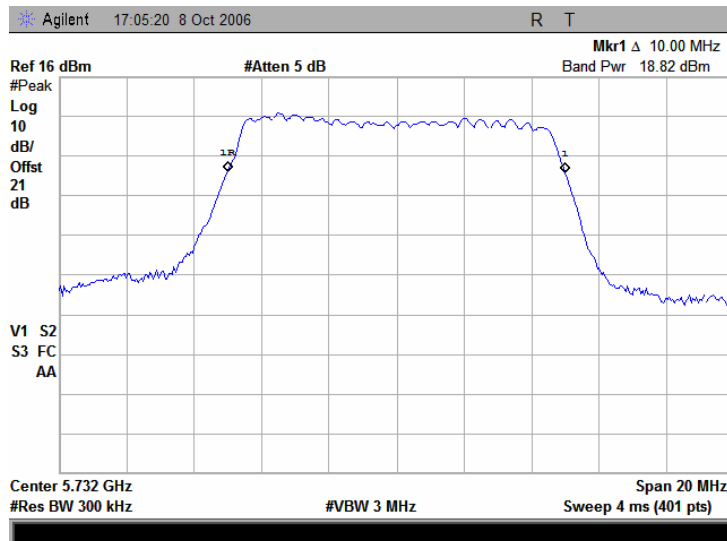


<b>Test specification:</b>	<b>Section 15.247(b)3, Peak output power</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(b)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	10/8/2006 3:03:06 PM		
<b>Temperature:</b> 22°C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.2.11 Peak output power at mid frequency, 10 MHz channel spacing, 64QAM

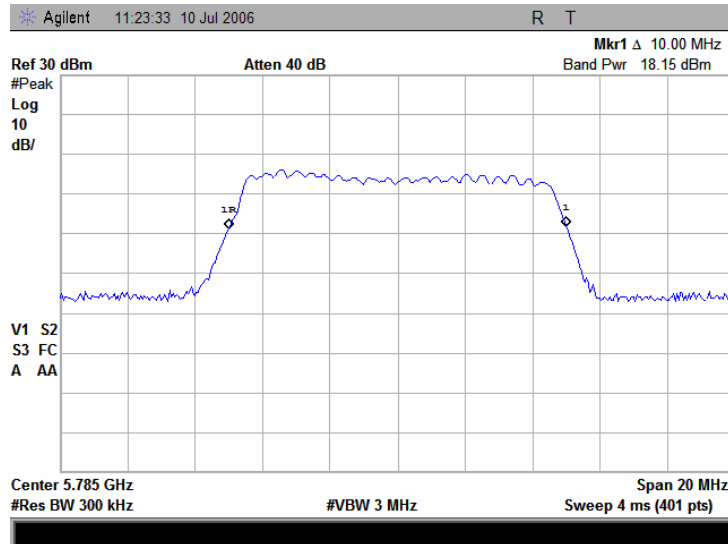

Plot 7.2.12 Peak output power at high frequency, 10 MHz channel spacing, 64QAM

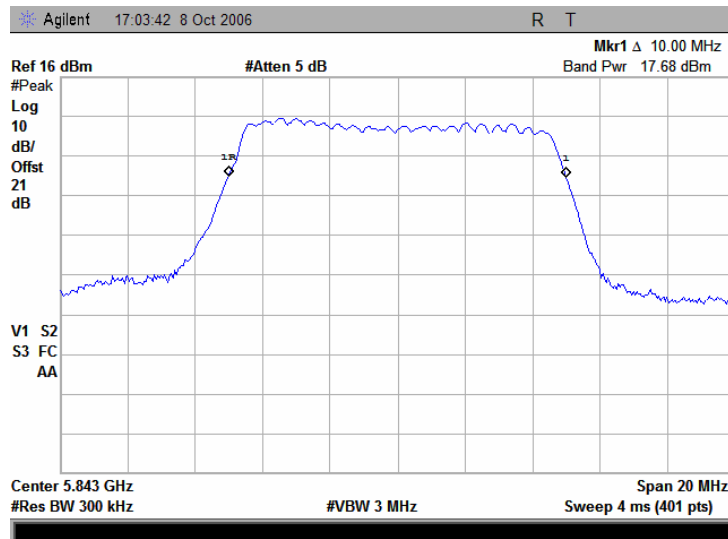

<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

### 7.3 Spurious emissions at RF antenna connector

#### 7.3.1 General

This test was performed to measure spurious emissions at RF antenna connector. Specification test limits are given in Table 7.3.1. The test results are provided in Table 7.3.2 and associated plots.

**Table 7.3.1 Spurious emission limits**

Frequency*, MHz	Attenuation below carrier*, dBc
0.009 – 10 <sup>th</sup> harmonic	20.0

\* - The above limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

\*\* - Spurious emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

#### 7.3.2 Test procedure


**7.3.2.1** The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

**7.3.2.2** The EUT was adjusted to produce maximum available to end user RF output power.

**7.3.2.3** The highest emission level within the authorized band was measured.

**7.3.2.4** The spurious emission was measured with spectrum analyzer as provided in Table 7.3.2 and associated plots and referenced to the highest emission level measured within the authorized band.

**Figure 7.3.1 Spurious emission test setup**





<b>Test specification:</b>		<b>Section 15.247(c), Conducted spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c)	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Table 7.3.2 Spurious emission test results**

ASSIGNED FREQUENCY RANGE: 5725 – 2850 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 40000 MHz  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 100 kHz  
 VIDEO BANDWIDTH: 300 kHz  
 MODULATION: BPSK  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 TRANSMITTER OUTPUT POWER: 18dBm at low carrier frequency  
 18dBm at mid carrier frequency  
 18dBm at high carrier frequency

Frequency, MHz	Spurious emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
<b>All carrier frequencies</b>						
All emissions were more than 20 dB below the limit						Pass

\*- Margin = Attenuation below carrier – specification limit.


**Reference numbers of test equipment used**

HL 1650	HL 2254	HL 2780					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.

<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.1 The highest emission level within the assigned band at low carrier frequency, 5 MHz BW

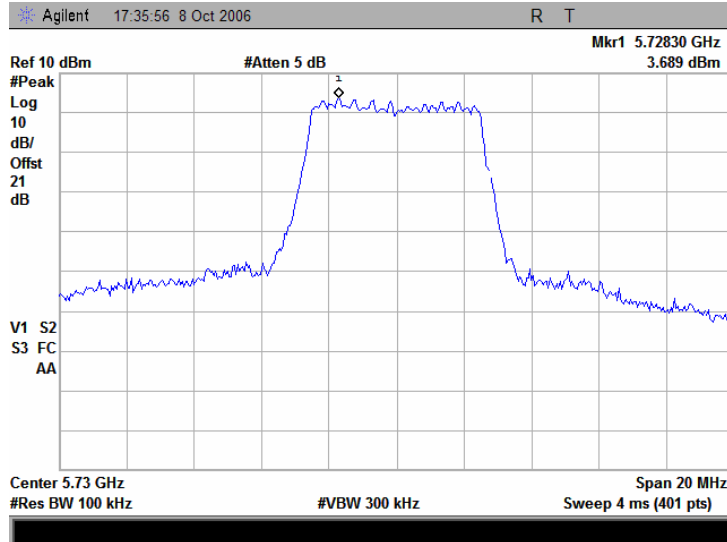


Plot 7.3.2 The highest emission level within the assigned band at mid carrier frequency, 5 MHz BW

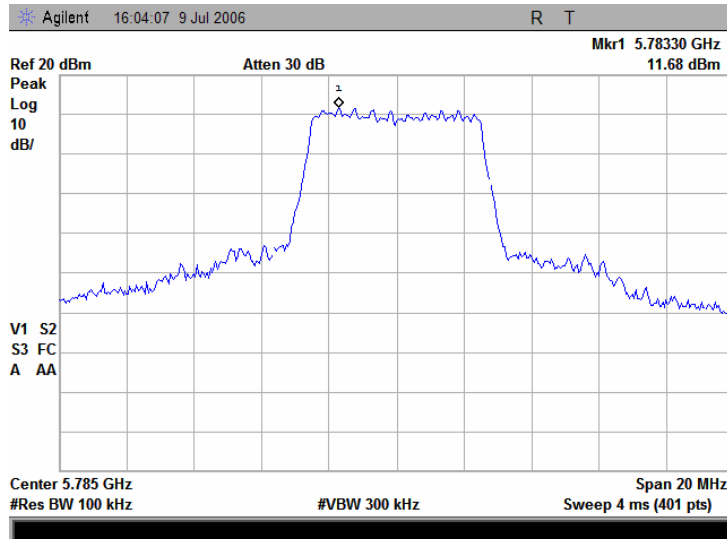


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.3 The highest emission level within the assigned band at high carrier frequency, 5 MHz BW

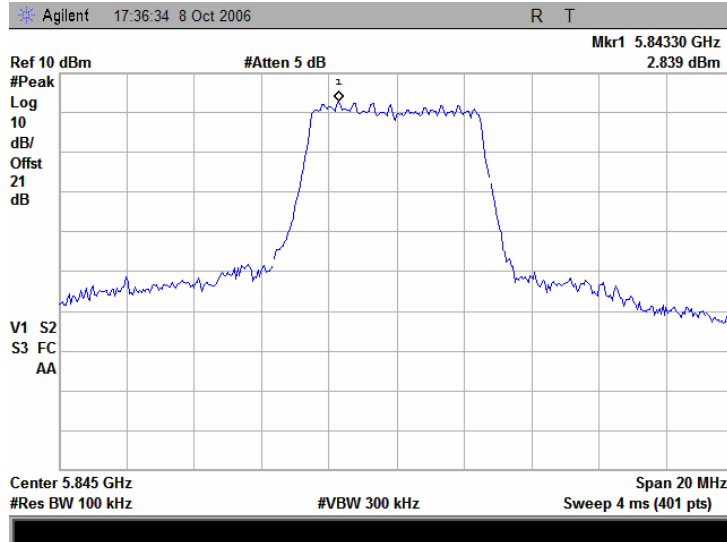


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.4 The highest emission level within the assigned band at low carrier frequency, 10 MHz BW

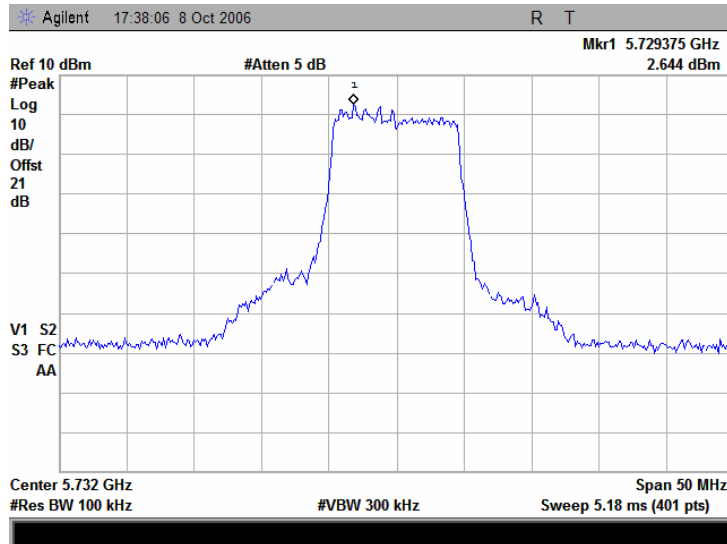


Plot 7.3.5 The highest emission level within the assigned band at high carrier frequency, 10 MHz BW

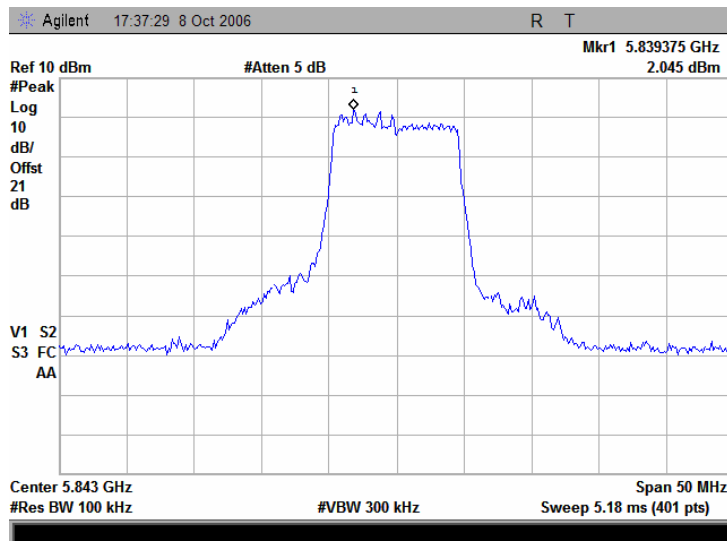


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.6 Spurious emission measurements in 9 - 150 kHz range at low carrier frequency

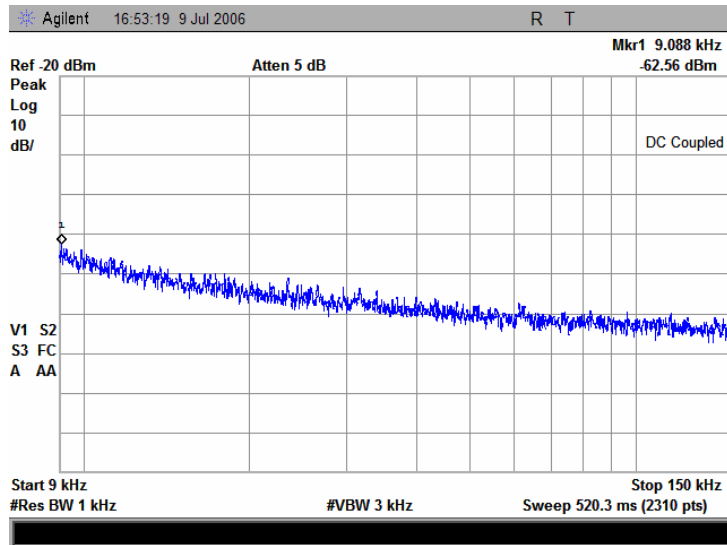


Plot 7.3.7 Spurious emission measurements in 9 - 150 kHz range at mid carrier frequency

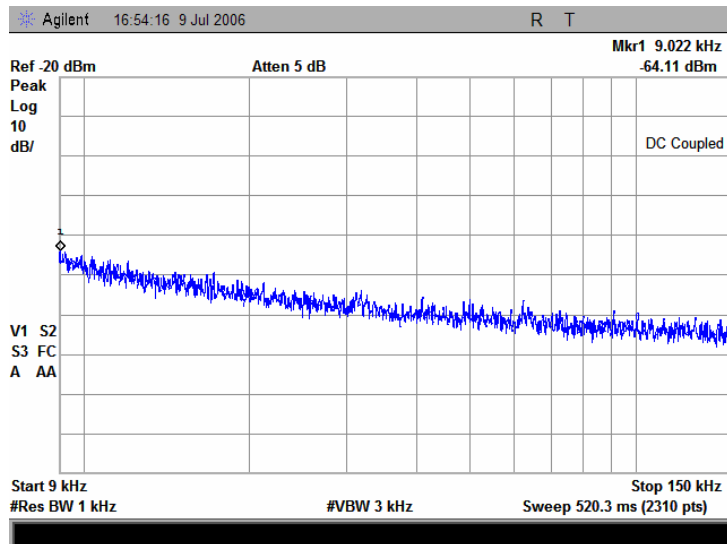


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.8 Spurious emission measurements in 9 - 150 kHz range at high carrier frequency

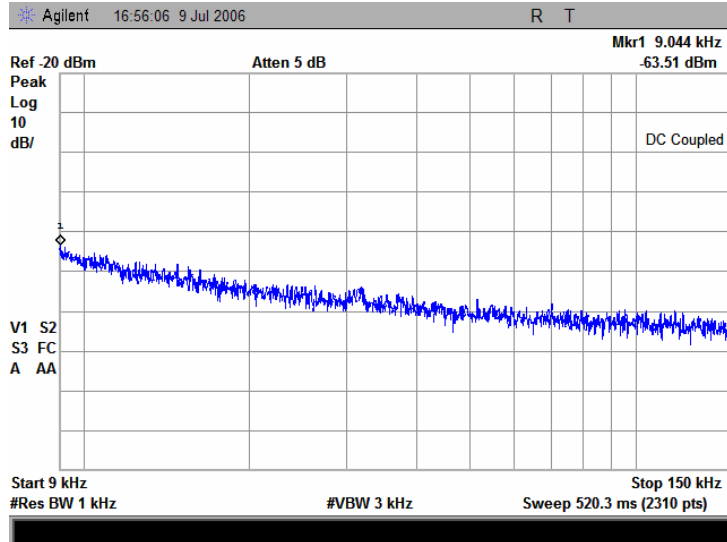


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.9 Spurious emission measurements in 0.15 - 30 MHz range at low carrier frequency

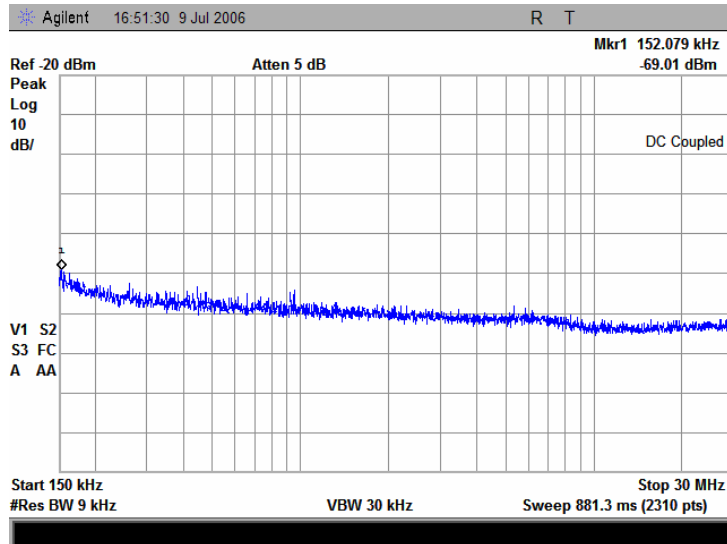


Plot 7.3.10 Spurious emission measurements in 0.15 - 30 MHz range at mid carrier frequency

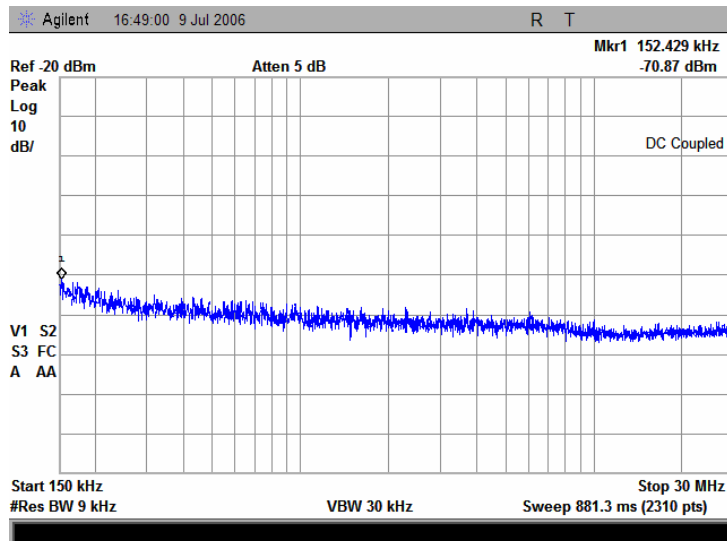

<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


Plot 7.3.11 Spurious emission measurements in 0.15 - 30 MHz range at high carrier frequency

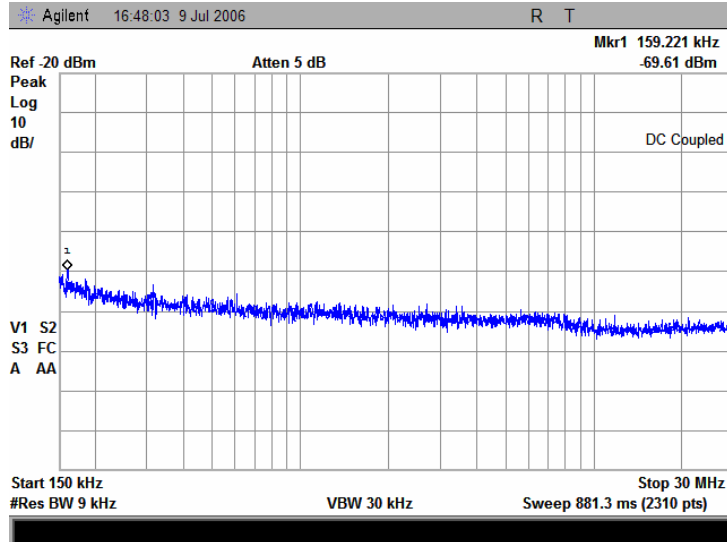




<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.12 Spurious emission measurements in 30 - 1000 MHz range at low carrier frequency

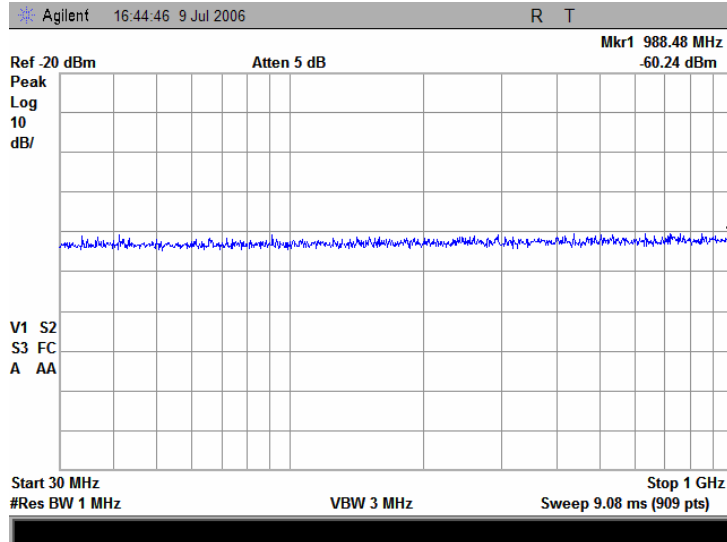


Plot 7.3.13 Spurious emission measurements in 30 - 1000 MHz range at mid carrier frequency

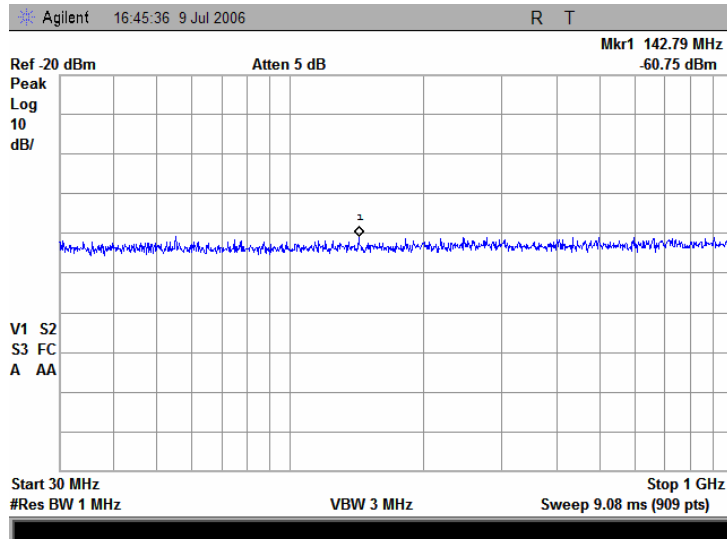


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.14 Spurious emission measurements in 30 - 1000 MHz range at high carrier frequency

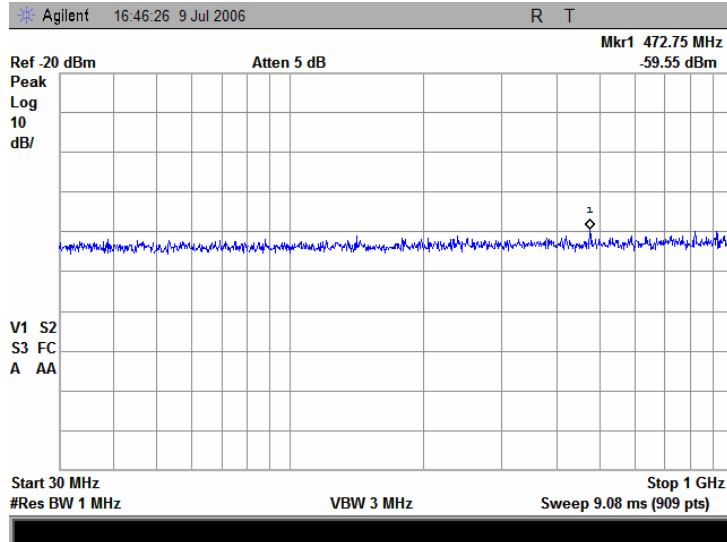


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.15 Spurious emission measurements in 1000 – 5000 MHz range at low carrier frequency

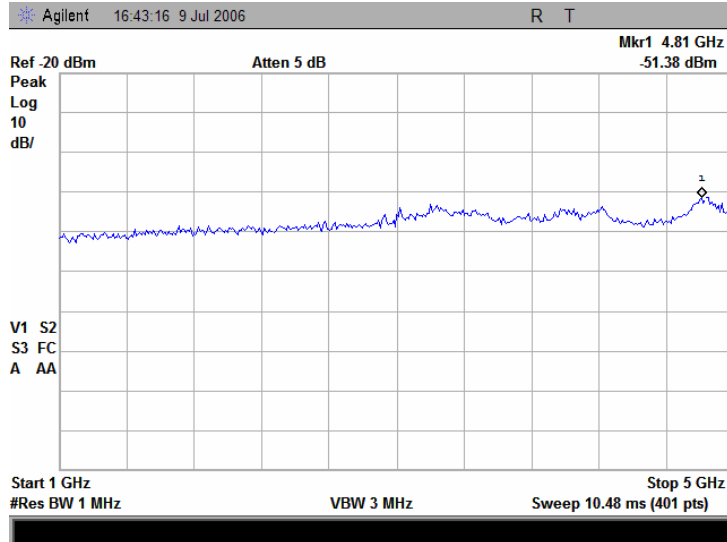


Plot 7.3.16 Spurious emission measurements in 1000 – 5000 MHz range at mid carrier frequency

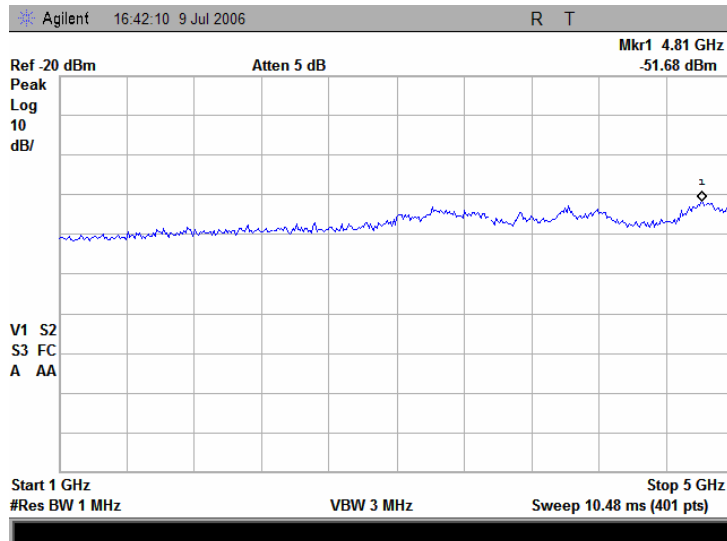


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.17 Spurious emission measurements in 1000 – 5000 MHz range at high carrier frequency

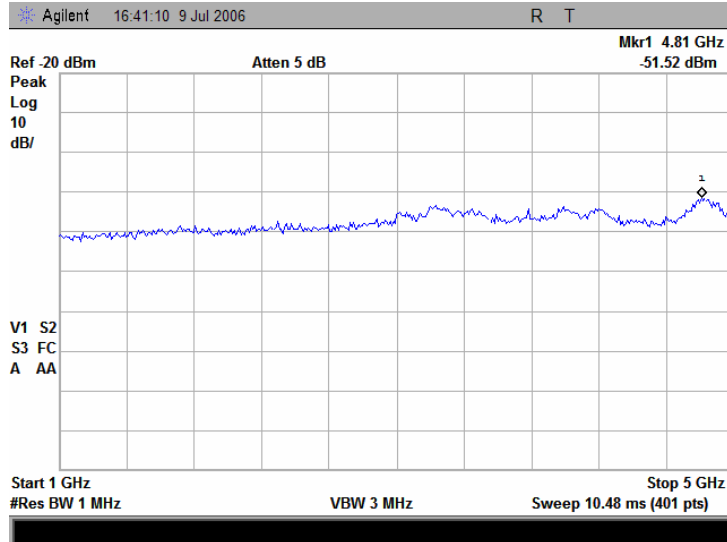


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.18 Spurious emission measurements in 5000 – 5725 MHz range at low carrier frequency, 5 MHz BW

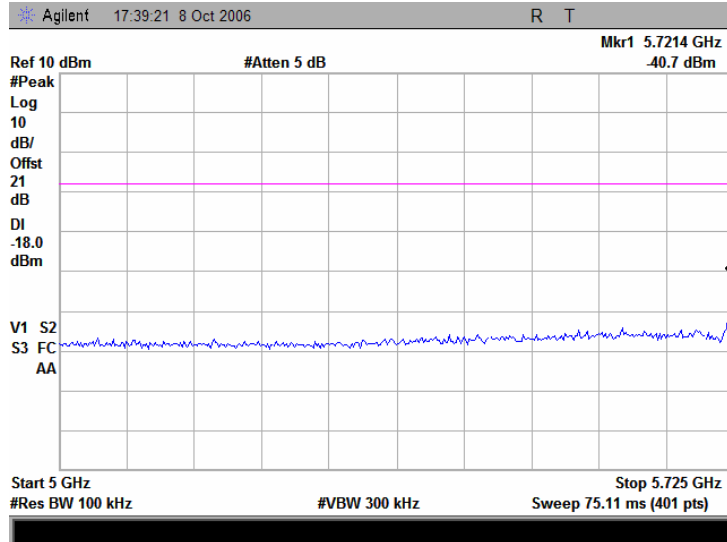


Plot 7.3.19 Spurious emission measurements in 5000 – 5725 MHz range at mid carrier frequency, 5 MHz BW

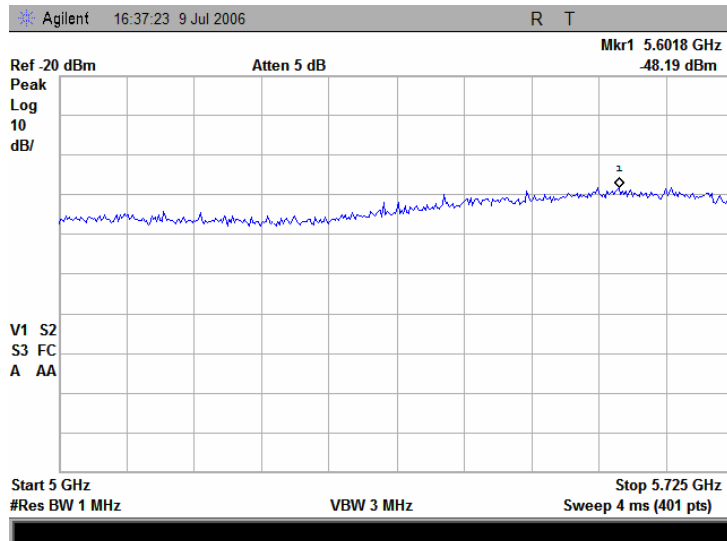


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.20 Spurious emission measurements in 5000 – 5725 MHz range at high carrier frequency, 5 MHz BW

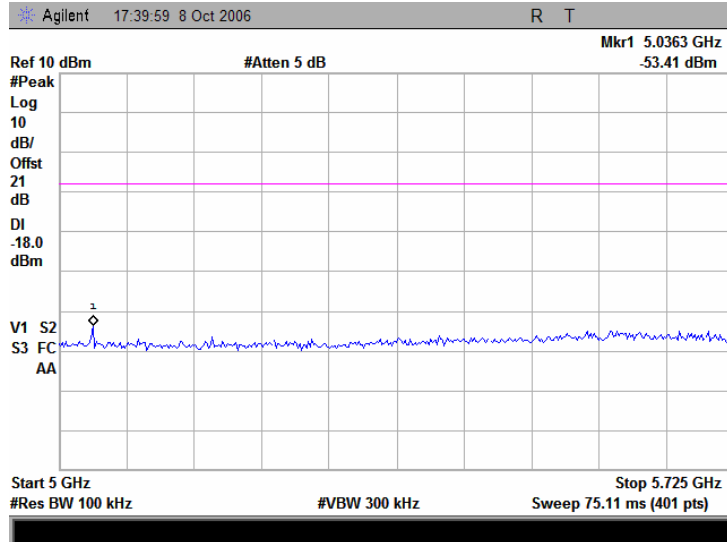


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.21 Spurious emission measurements in 5000 – 5725 MHz range at low carrier frequency, 10 MHz BW

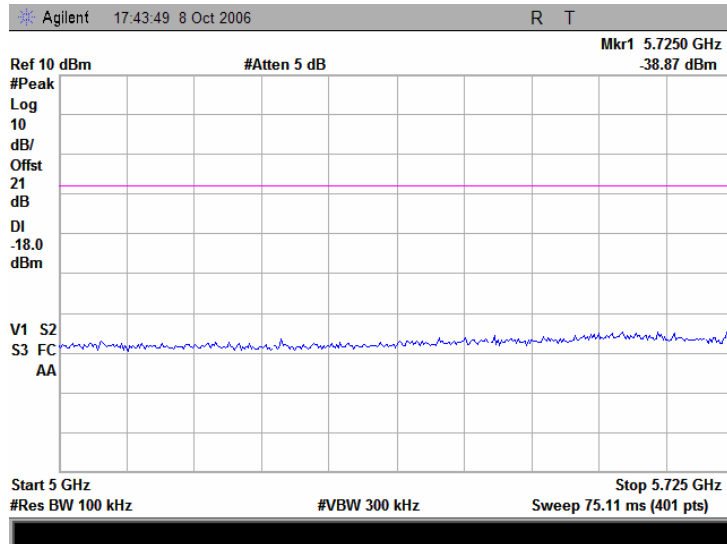


Plot 7.3.22 Spurious emission measurements in 5000 – 5725 MHz range at high carrier frequency, 10 MHz BW

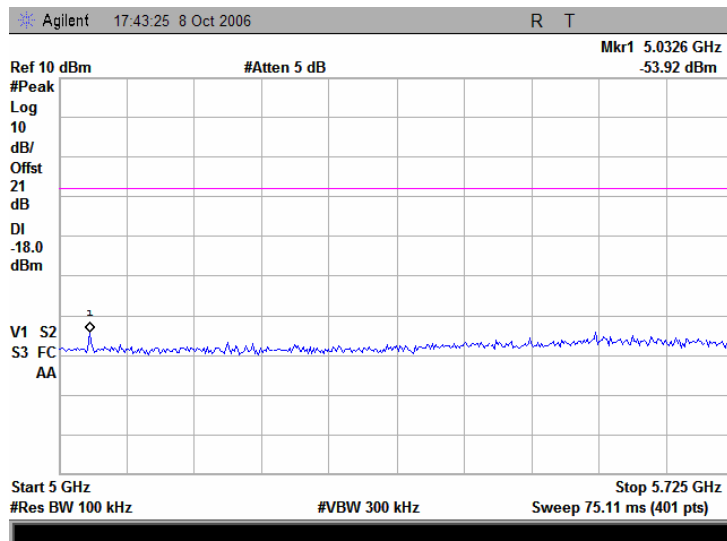


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.23 Spurious emission measurements in 5850 – 6000 MHz range at low carrier frequency, 5 MHz BW

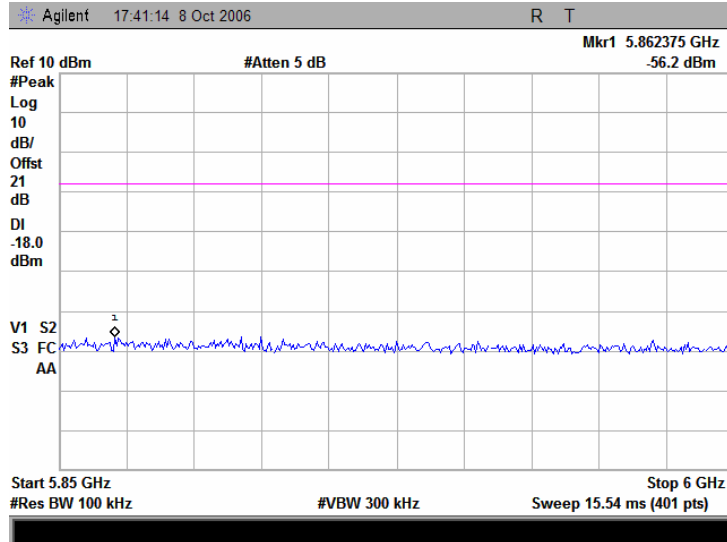


Plot 7.3.24 Spurious emission measurements in 5850 – 6000 MHz range at mid carrier frequency, 5 MHz BW

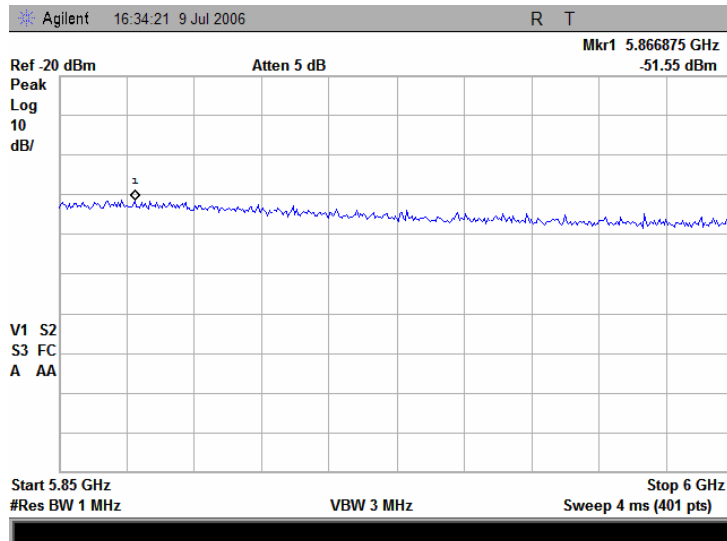




<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.25 Spurious emission measurements in 5850 – 6000 MHz range at high carrier frequency, 5 MHz BW

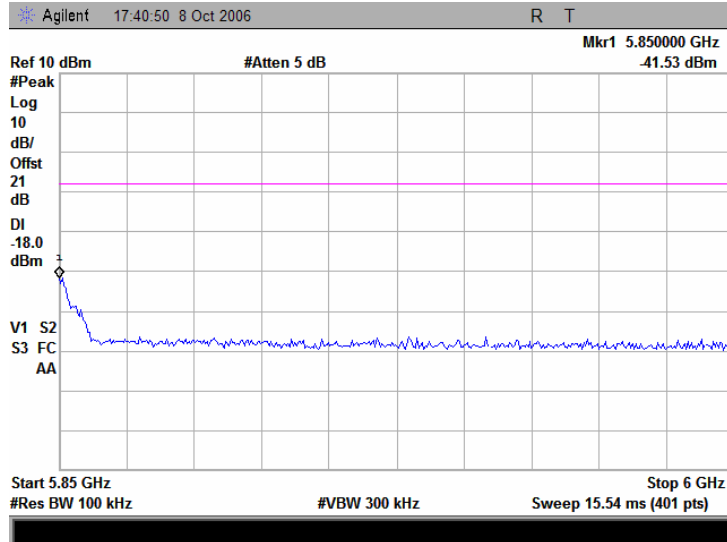


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.26 Spurious emission measurements in 5850 – 6000 MHz range at low carrier frequency, 10 MHz BW

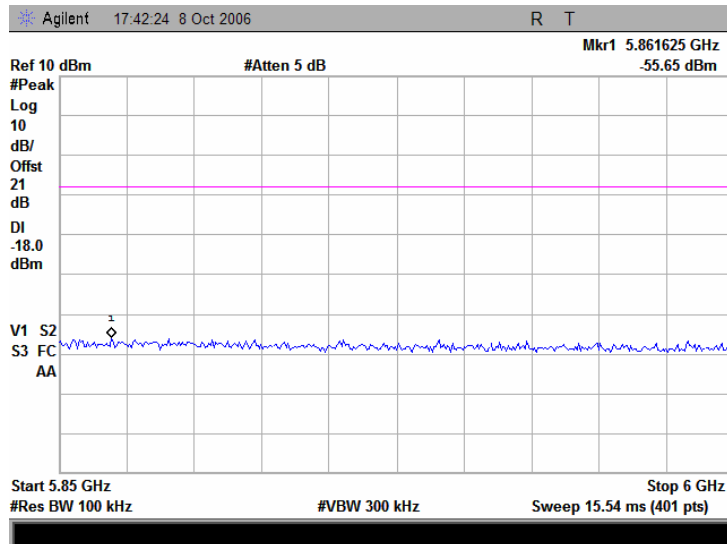


Plot 7.3.27 Spurious emission measurements in 5850 – 6000 MHz range at high carrier frequency, 10 MHz BW

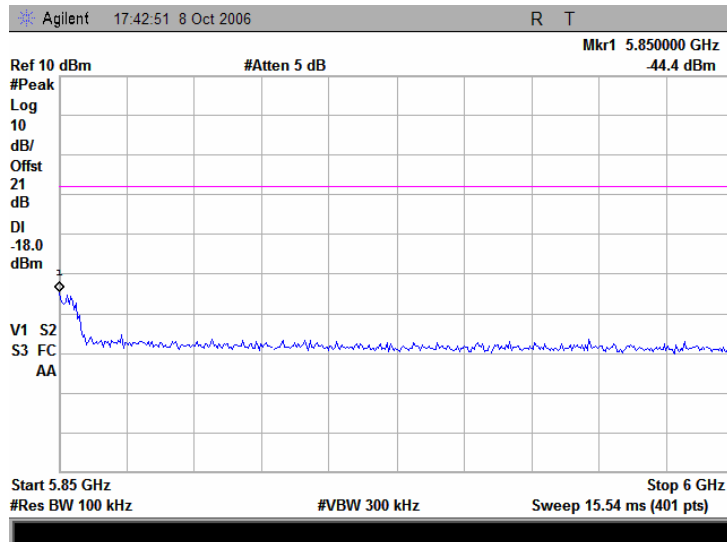


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.28 Spurious emission measurements in 6 – 10 GHz range at low carrier frequency

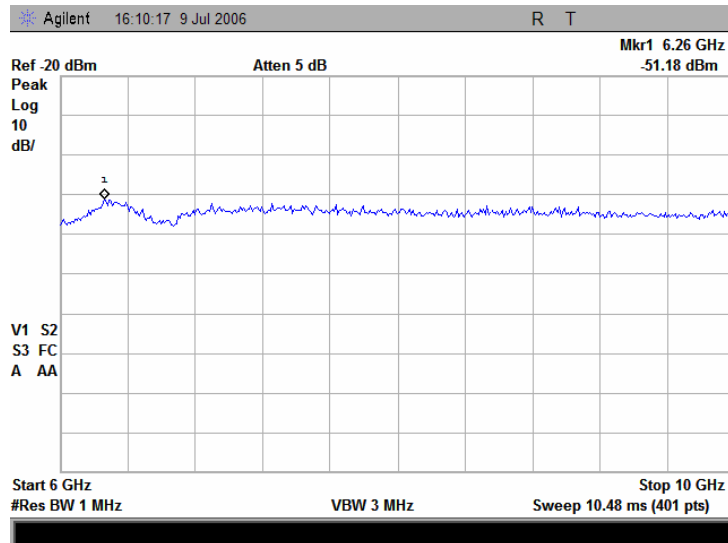


Plot 7.3.29 Spurious emission measurements in 6 – 10 GHz range at mid carrier frequency

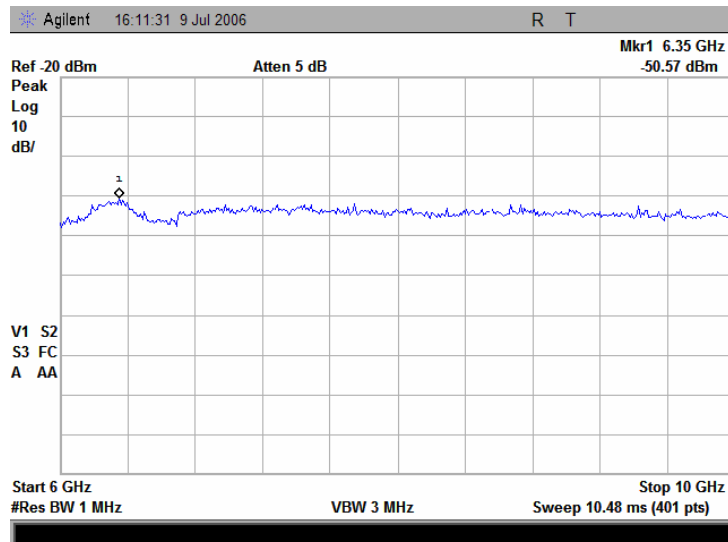


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.30 Spurious emission measurements in 6 – 10 GHz range at high carrier frequency

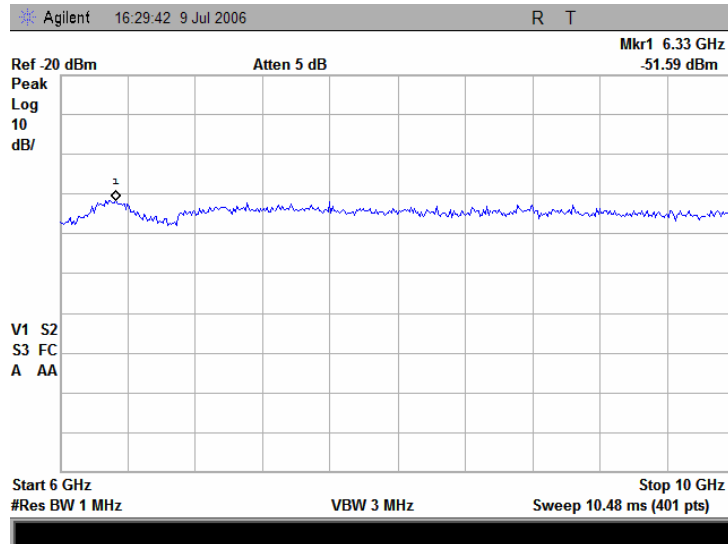


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.31 Spurious emission measurements in 10 – 26.5 GHz range at low carrier frequency

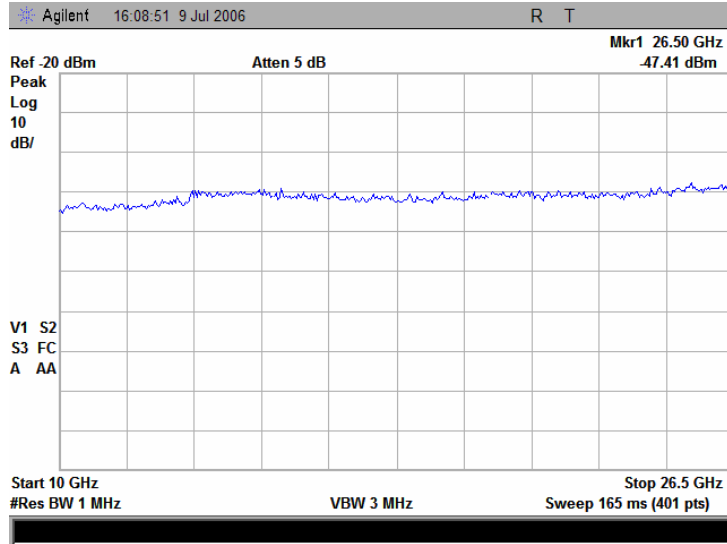


Plot 7.3.32 Spurious emission measurements in 10 – 26.5 GHz range at mid carrier frequency

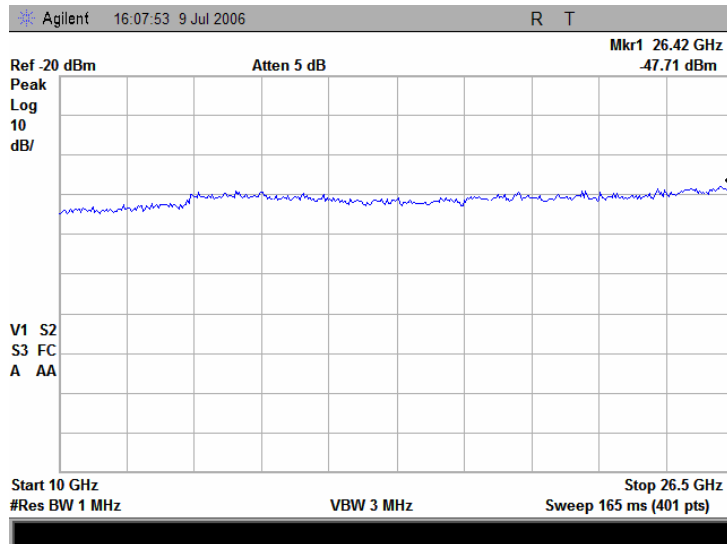


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.33 Spurious emission measurements in 10 – 26.5 GHz range at high carrier frequency

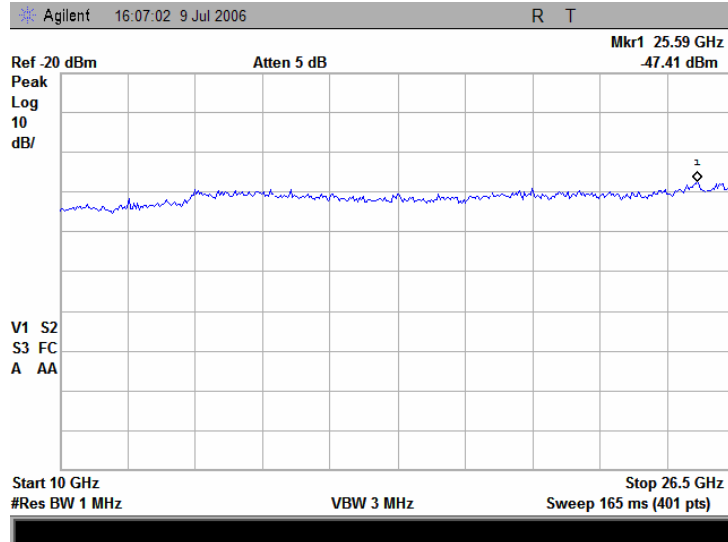


<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.34 Spurious emission measurements in 26.5 - 40 GHz range at low carrier frequency

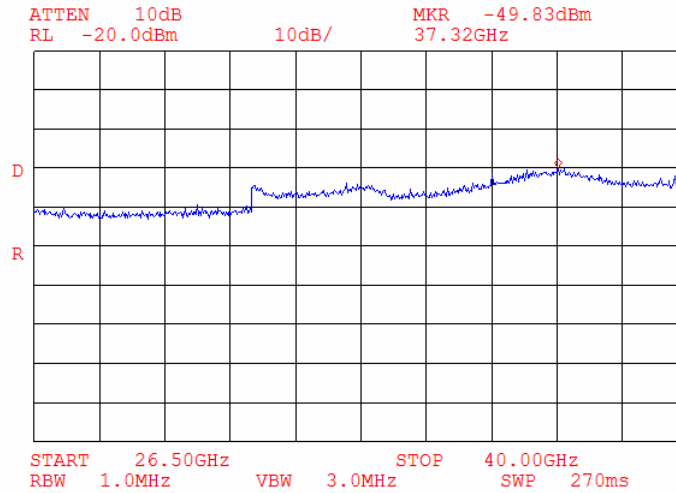


Plot 7.3.35 Spurious emission measurements in 26.5 - 40 GHz range at mid carrier frequency

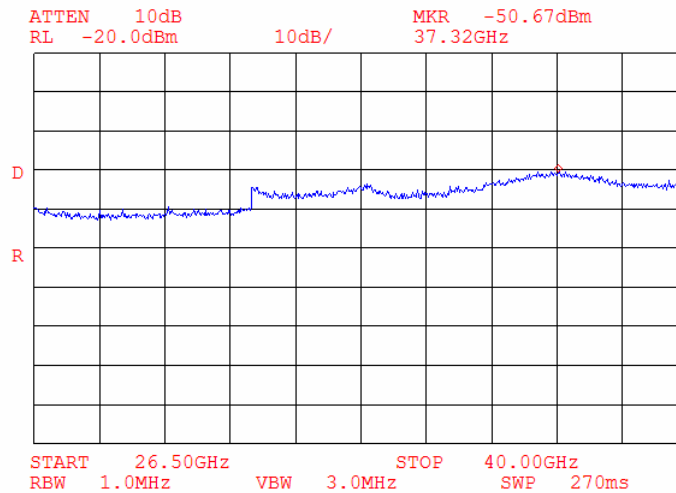

<b>Test specification:</b>	<b>Section 15.247(c), Conducted spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:12:21 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.3.36 Spurious emission measurements in 26.5 - 40 GHz range at high carrier frequency

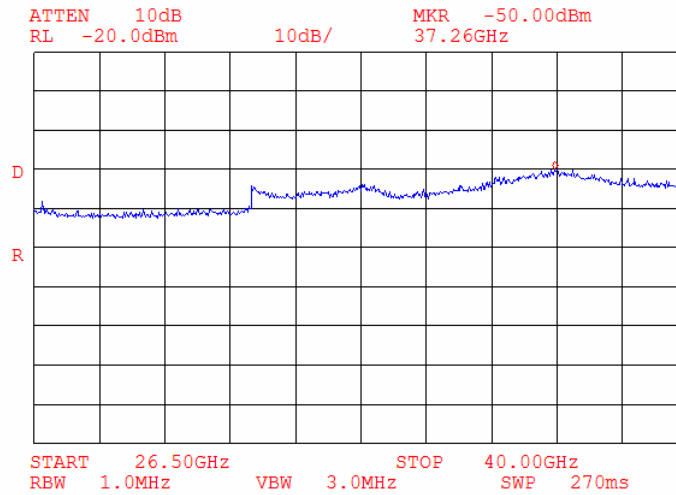



<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.4 Field strength of spurious emissions

### 7.4.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*		
	Peak	Quasi Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**
0.090 – 0.110	NA	108.5 – 106.8**	NA
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**
0.490 – 1.705	NA	73.8 – 63.0**	NA
1.705 – 30.0*		69.5	
30 – 88		40.0	
88 – 216		43.5	
216 – 960		46.0	
960 - 1000		54.0	
1000 – 10 <sup>th</sup> harmonic	74.0	NA	54.0

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\* - The limit decreases linearly with the logarithm of frequency.

\*\*\* - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

### 7.4.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.

7.4.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.4.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

### 7.4.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.4.3.1 The EUT was set up as shown in Figure 7.4.2, energized and the performance check was conducted.

7.4.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.4.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/14/2006 3:14:04 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Figure 7.4.1 Setup for spurious emission field strength measurements below 30 MHz


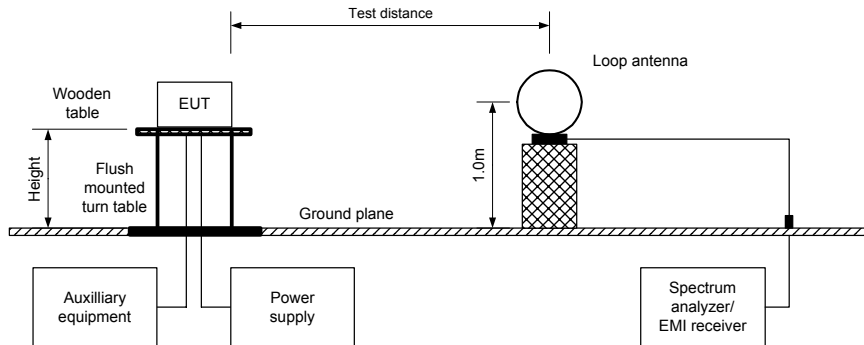


Figure 7.4.2 Setup for spurious emission field strength measurements above 30 MHz

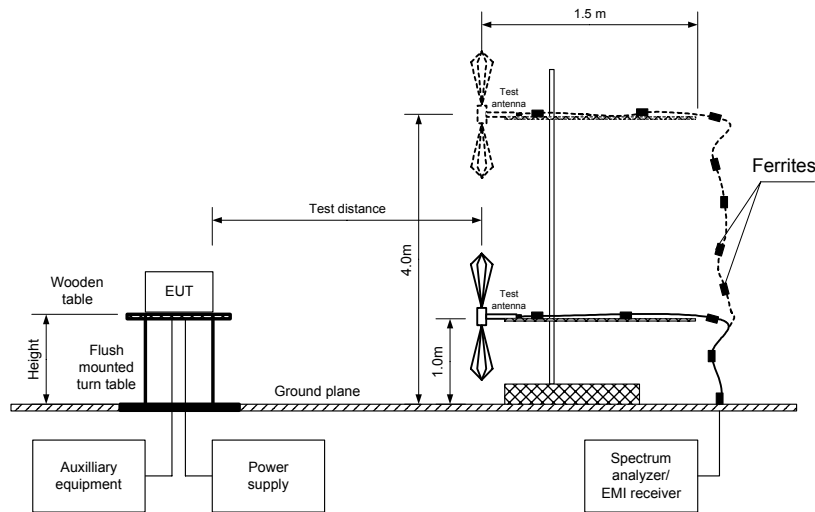

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Table 7.4.2 Field strength of spurious emissions above 1 GHz within restricted bands**

ASSIGNED FREQUENCY: 5725 – 5850 MHz  
 INVESTIGATED FREQUENCY RANGE: 1000 - 40000 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: BPSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 2.095 Mbps  
 DUTY CYCLE: 92%  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 1000 kHz  
 TEST ANTENNA TYPE: Double ridged guide(1000 – 18000 MHz)  
 Standard gain horn (above 18000 MHz)

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
<b>All carrier frequencies</b>											
No spurious emissions were found											Pass

\*- EUT front panel refers to 0 degrees position of turntable.  
 \*\*- Margin = Measured field strength - specification limit.  
 \*\*\*- Margin = Calculated field strength - specification limit,  
 where Calculated field strength = Measured field strength + average factor.

**Table 7.4.3 Average factor calculation**

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
92%					-0.8

\*- Average factor was calculated as follows  
 for pulse train shorter than 100 ms:  $Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$   
 for pulse train longer than 100 ms:  $Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Table 7.4.4 Field strength of spurious emissions below 1 GHz within restricted bands**

ASSIGNED FREQUENCY: 5725 – 5850 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: BPSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 2.095 Mbps  
 DUTY CYCLE: 92 %  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)  
 9.0 kHz (150 kHz – 30 MHz)  
 120 kHz (30 MHz – 1000 MHz)  
 VIDEO BANDWIDTH: > Resolution bandwidth  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
<b>All carrier frequency</b>								
No spurious emissions were found								Pass

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.

**Table 7.4.5 Restricted bands**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

**Reference numbers of test equipment used**


HL 0410	HL 0446	HL 0768	HL 0769	HL 1200	HL 1424	HL 1425	HL 1553
HL 1566	HL 1567	HL 2259	HL 2260	HL 2261	HL 2400	HL 2697	HL 2780

Full description is given in Appendix A.

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/14/2006 3:14:04 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.1 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

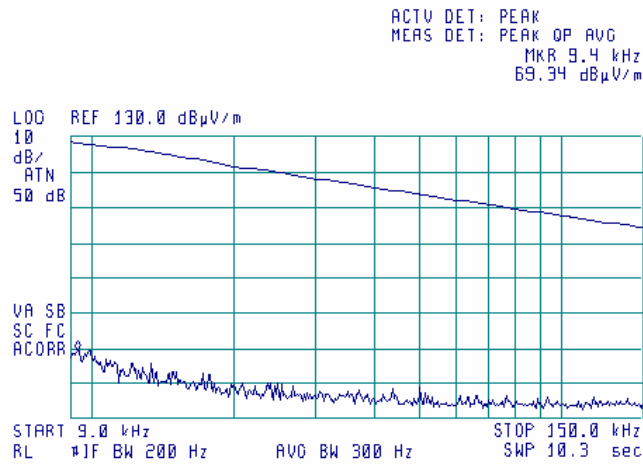

**Plot 7.4.2 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency**


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

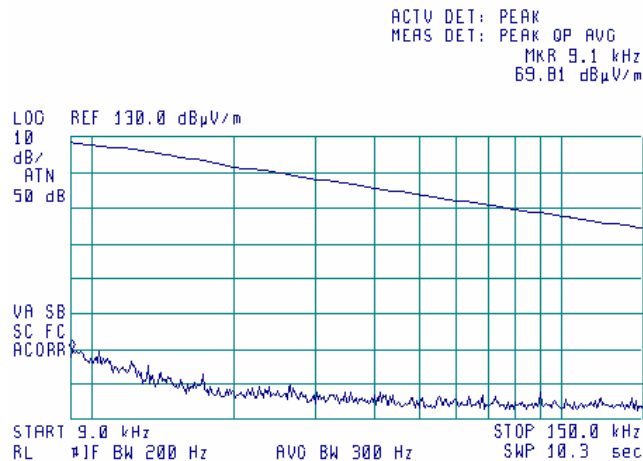

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/14/2006 3:14:04 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.3 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

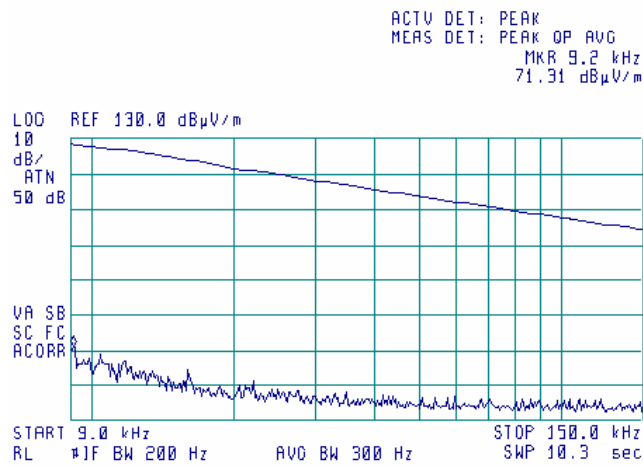

**Plot 7.4.4 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency**


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

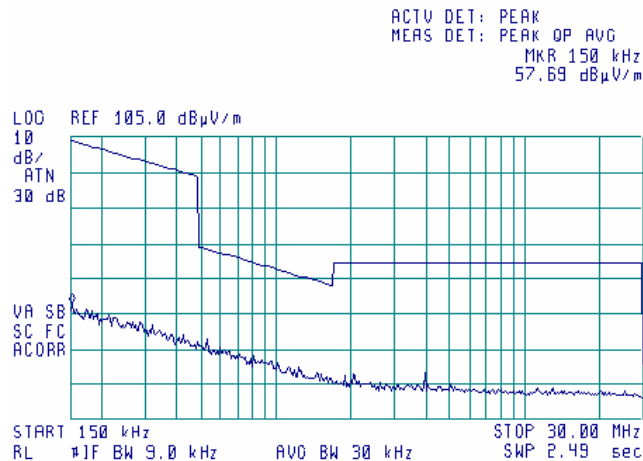

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/14/2006 3:14:04 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.5 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

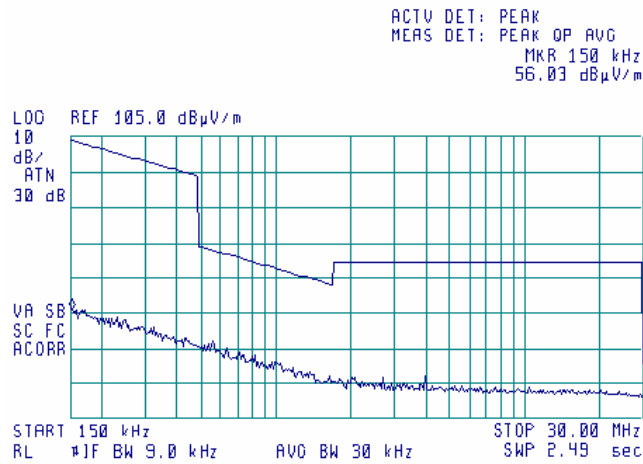

**Plot 7.4.6 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency**


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

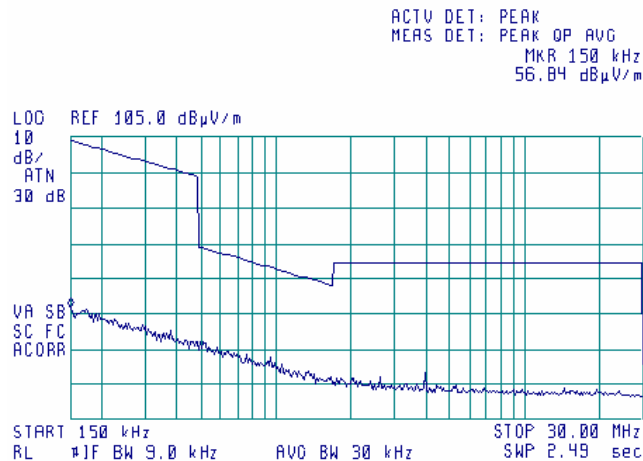

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/14/2006 3:14:04 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Plot 7.4.7 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency**


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

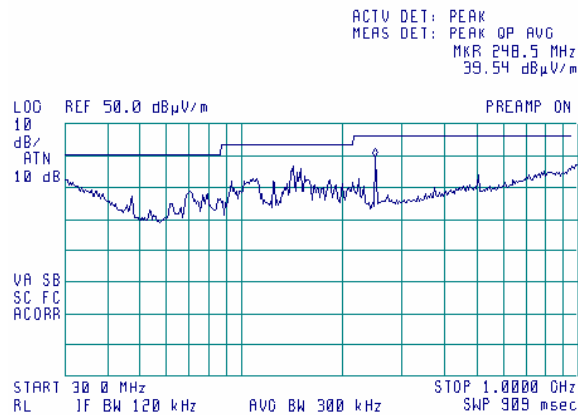

Note: Digital part emissions only

**Plot 7.4.8 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

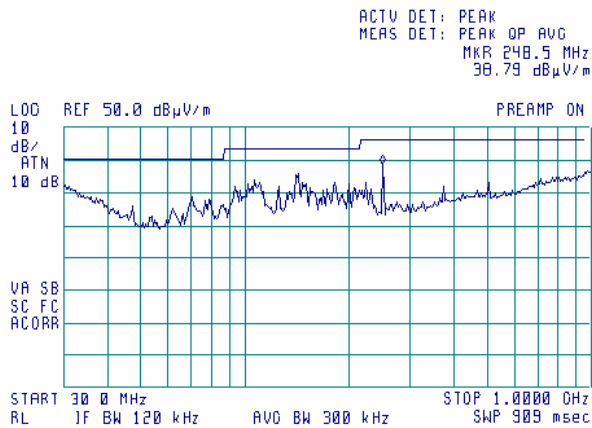


Note: Digital part emissions only



<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Plot 7.4.9 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal

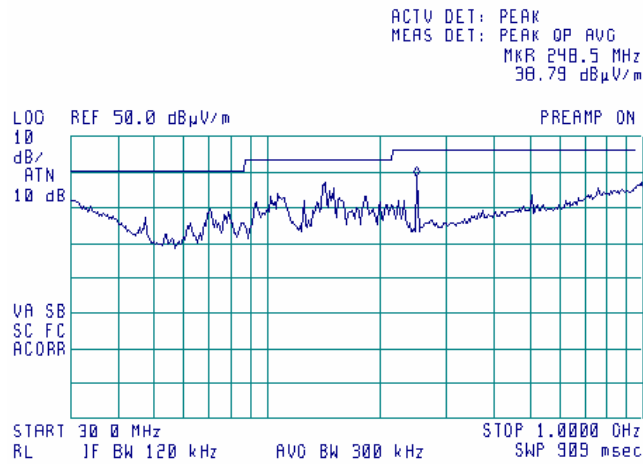


Note: Digital part emissions only

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/14/2006 3:14:04 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.10 Radiated emission measurements from 1000 to 2900 MHz at the low carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

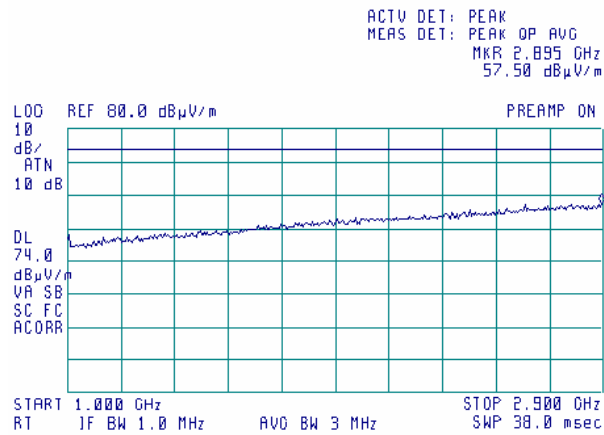

**Plot 7.4.11 Radiated emission measurements from 1000 to 2900 MHz at the low carrier frequency**


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Average

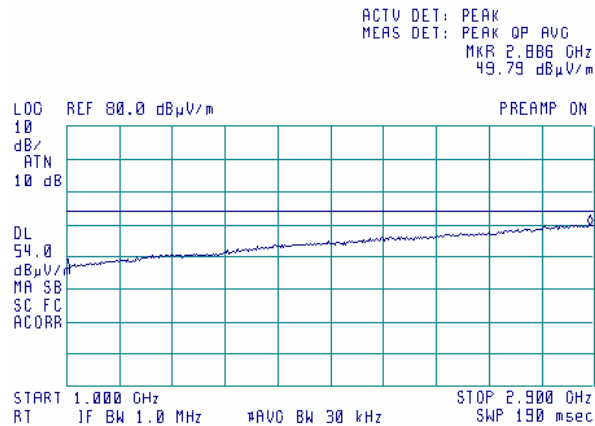

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/14/2006 3:14:04 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


Plot 7.4.12 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

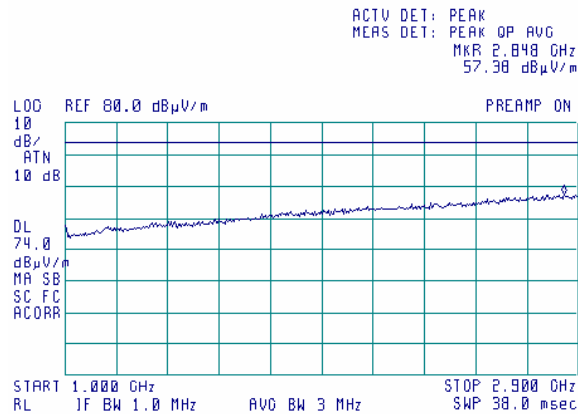

Plot 7.4.13 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Average

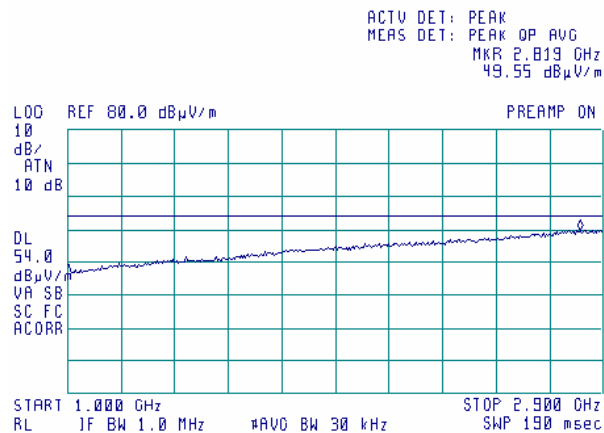

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/14/2006 3:14:04 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


Plot 7.4.14 Radiated emission measurements from 1000 to 2900 MHz at the high carrier frequency

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

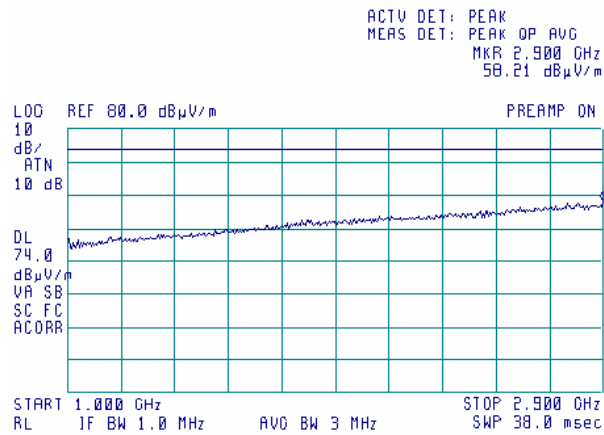

Plot 7.4.15 Radiated emission measurements from 1000 to 2900 MHz at the high carrier frequency


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Average

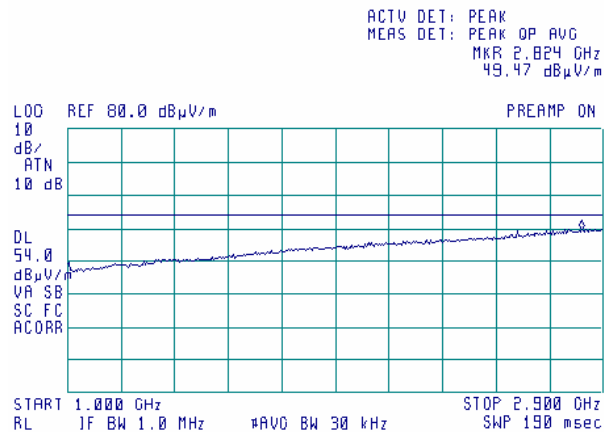

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.16 Radiated emission measurements from 2900 to 5460 MHz at the low carrier frequency, 5 MHz BW**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

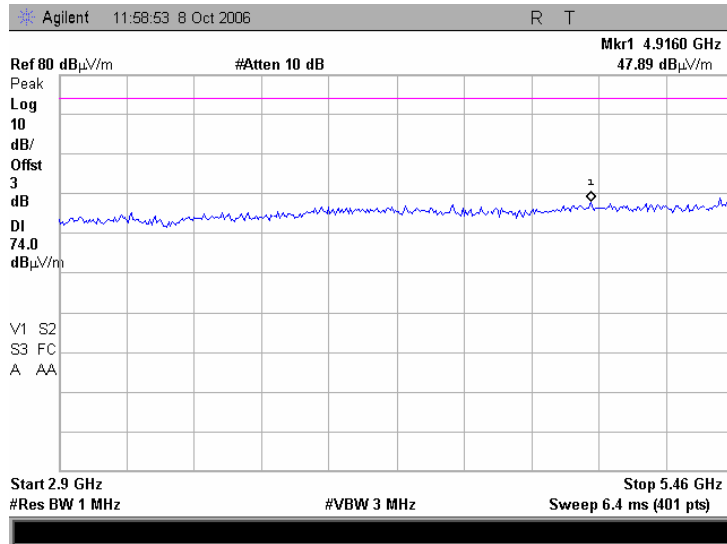

**Plot 7.4.17 Radiated emission measurements from 2900 to 5460 MHz at the low carrier frequency, 10 MHz BW**


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
DETECTOR: Peak

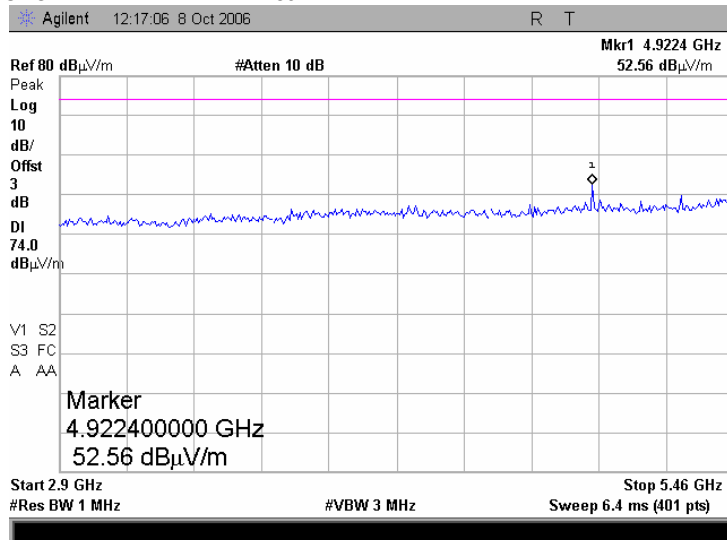

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.18 Radiated emission measurements from 2900 to 5460 MHz at the mid carrier frequency, 5 MHz BW**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

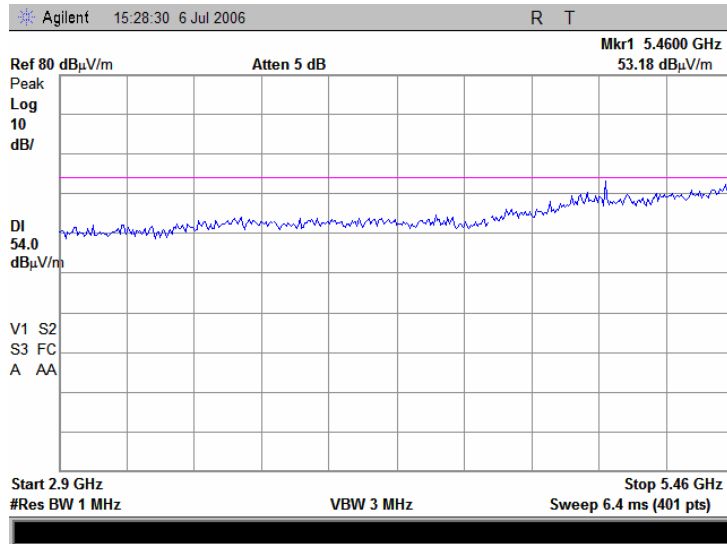

**Plot 7.4.19 Radiated emission measurements from 2900 to 5460 MHz at the mid carrier frequency, 5 MHz BW**


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
DETECTOR: Average

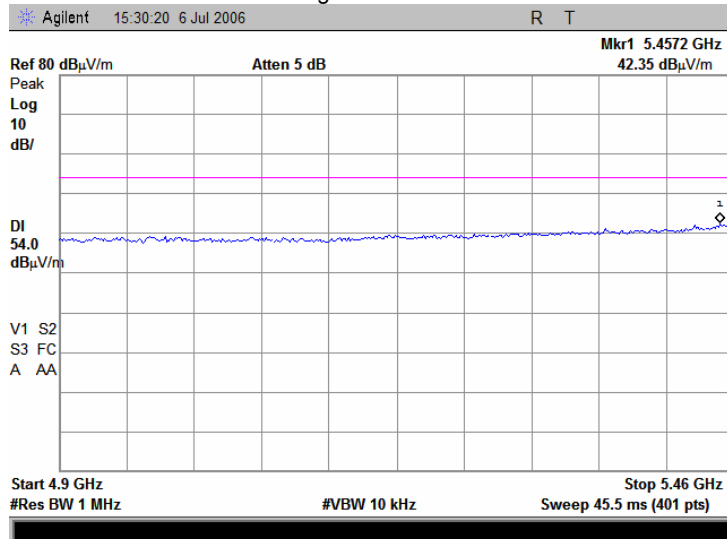

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


Plot 7.4.20 Radiated emission measurements from 2900 to 5460 MHz at the high carrier frequency, 5 MHz BW

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

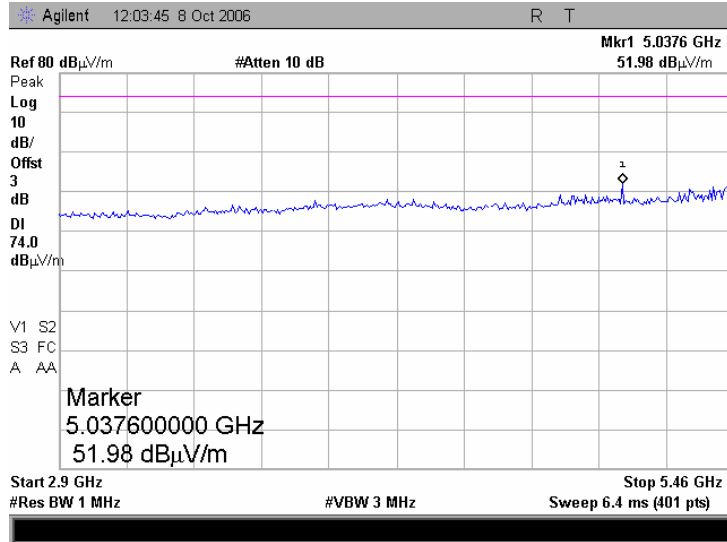

Plot 7.4.21 Radiated emission measurements from 2900 to 5460 MHz at the high carrier frequency, 10 MHz BW


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
DETECTOR: Peak

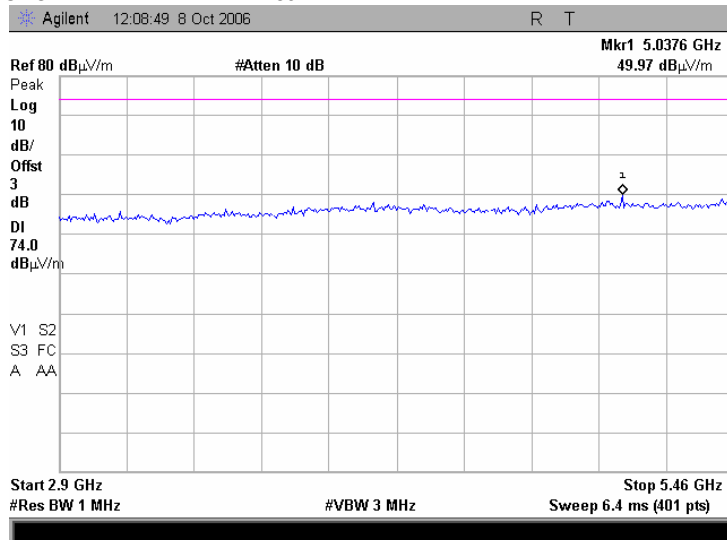

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/14/2006 3:14:04 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.22 Radiated emission measurements from 7250 to 8000 MHz at the low carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

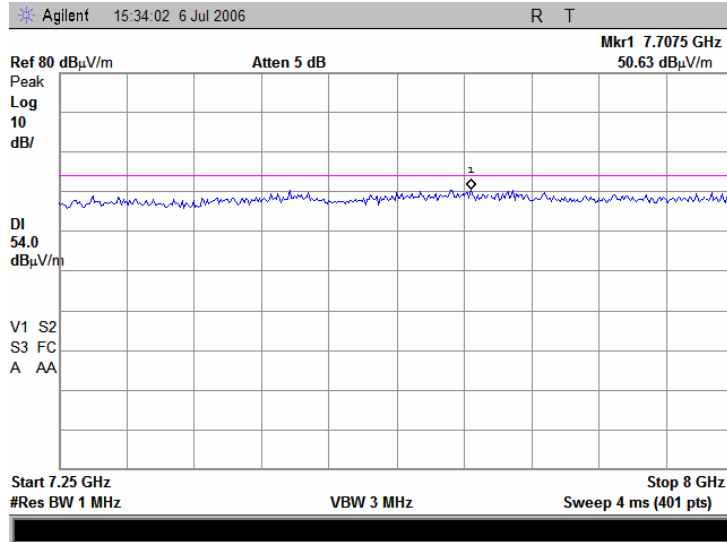

**Plot 7.4.23 Radiated emission measurements from 7250 to 8000 MHz at the mid carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

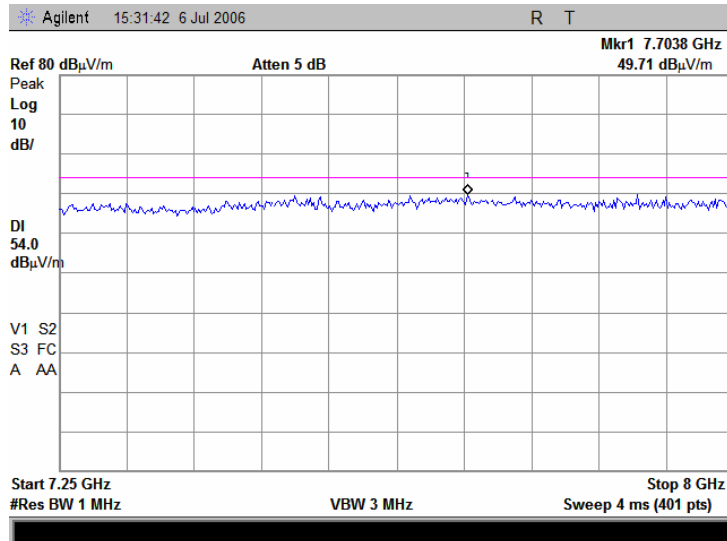




<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Plot 7.4.24 Radiated emission measurements from 7250 to 8000 MHz at the high carrier frequency**


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal

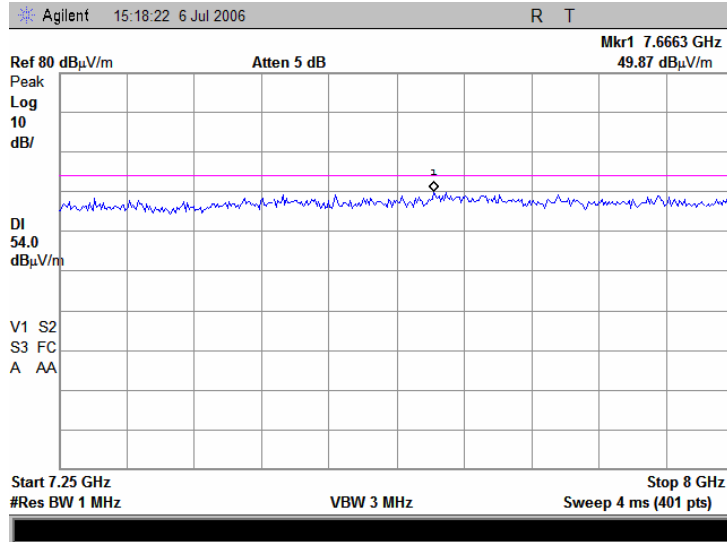

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


Plot 7.4.25 Radiated emission measurements from 8000 to 14000 MHz at the low carrier frequency

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
DETECTOR: Peak

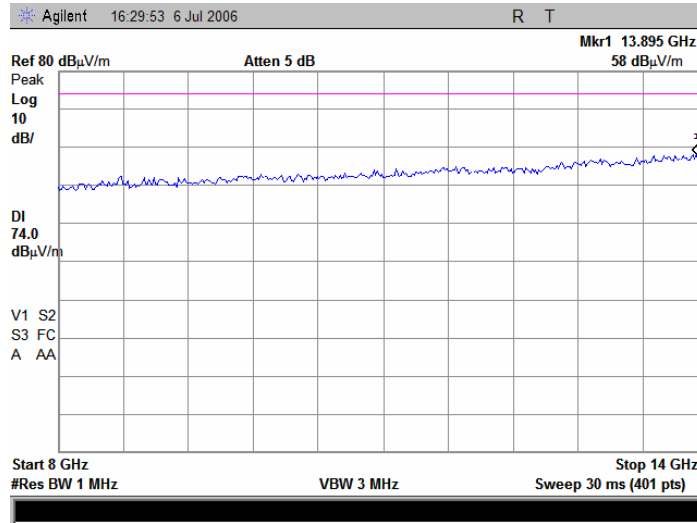

Plot 7.4.26 Radiated emission measurements from 8000 to 14000 MHz at the low carrier frequency


TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
DETECTOR: Average

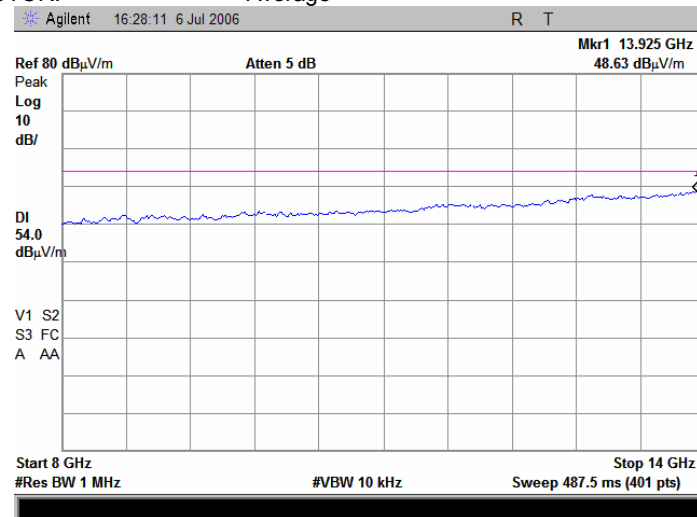

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.27 Radiated emission measurements from 8000 to 14000 MHz at the mid carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

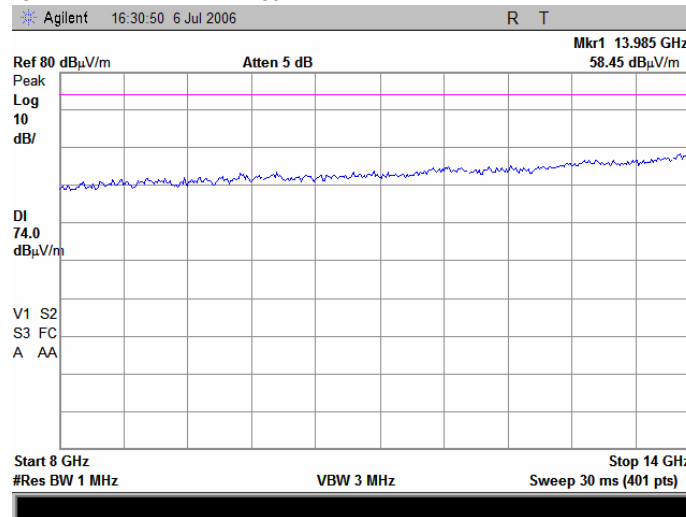

**Plot 7.4.28 Radiated emission measurements from 8000 to 14000 MHz at the mid carrier frequency**


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Average

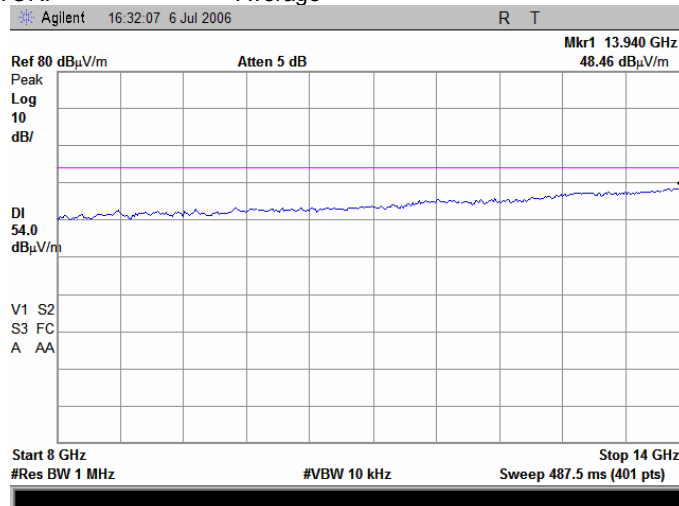

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.29 Radiated emission measurements from 8000 to 14000 MHz at the high carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

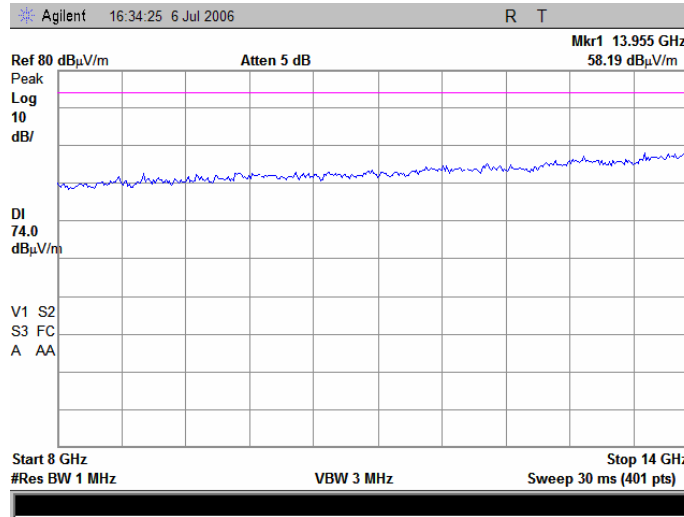

**Plot 7.4.30 Radiated emission measurements from 8000 to 14000 MHz at the high carrier frequency**


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Average

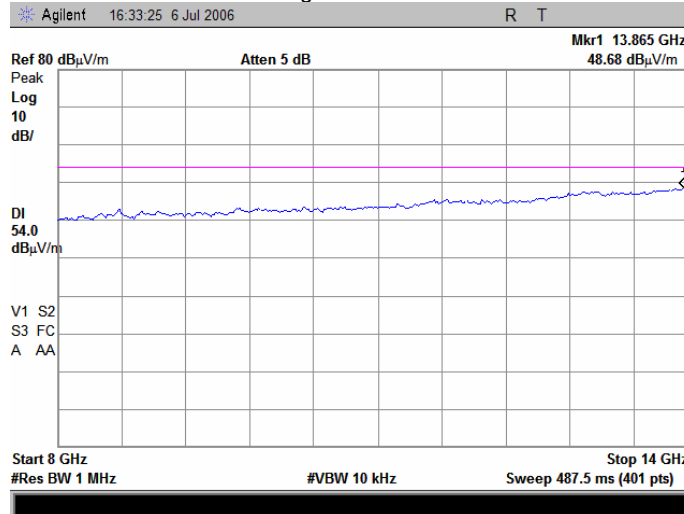

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.31 Radiated emission measurements from 14000 to 18000 MHz at the low carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

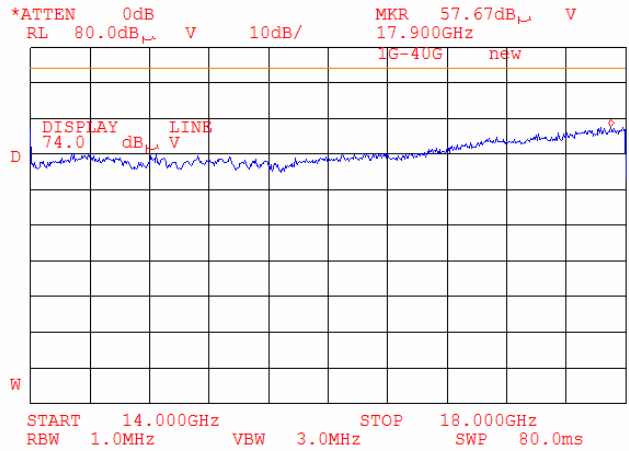

**Plot 7.4.32 Radiated emission measurements from 14000 to 18000 MHz at the low carrier frequency**


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Average

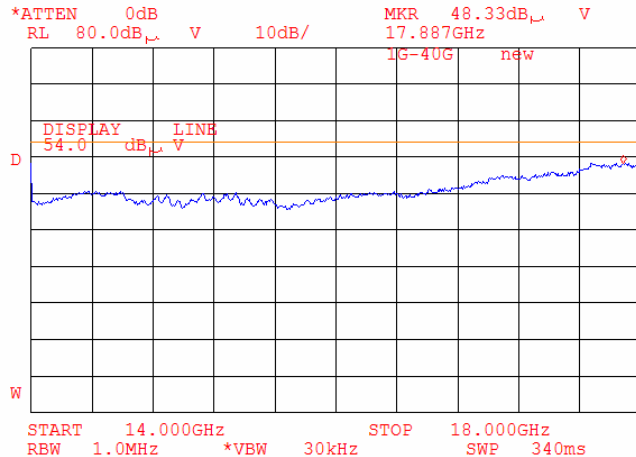

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.33 Radiated emission measurements from 14000 to 18000 MHz at the mid carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

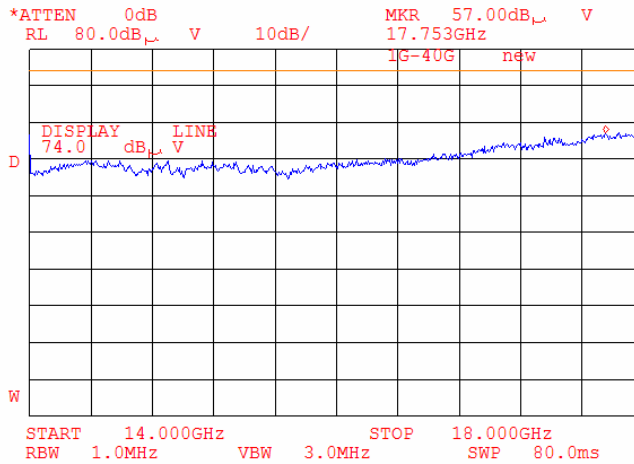

**Plot 7.4.34 Radiated emission measurements from 14000 to 18000 MHz at the mid carrier frequency**


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Average

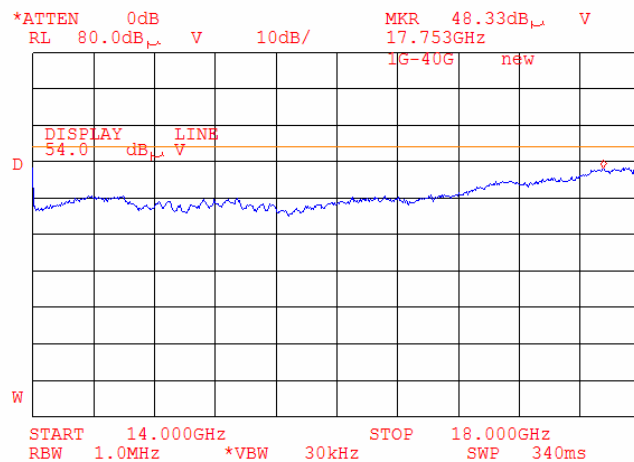

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.35 Radiated emission measurements from 14000 to 18000 MHz at the high carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

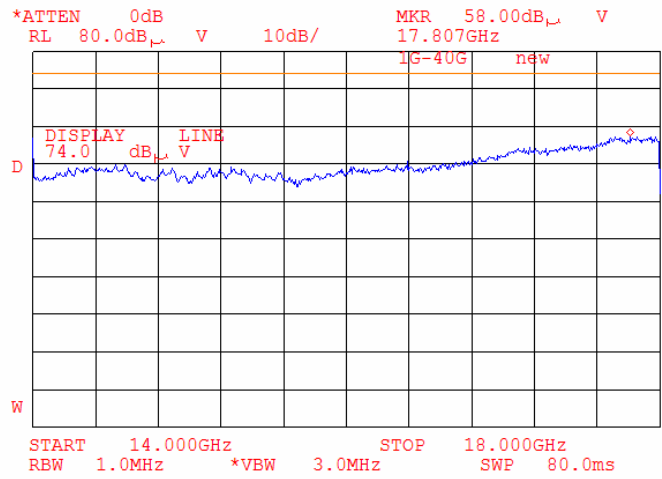

**Plot 7.4.36 Radiated emission measurements from 14000 to 18000 MHz at the high carrier frequency**


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Average

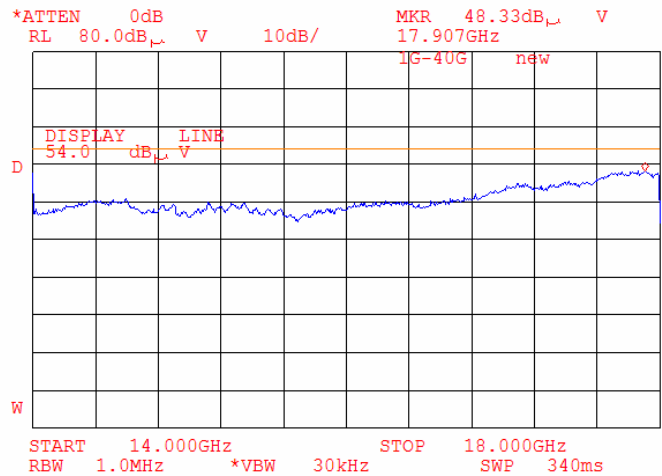

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.37 Radiated emission measurements from 18000 to 26500 MHz at the low carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

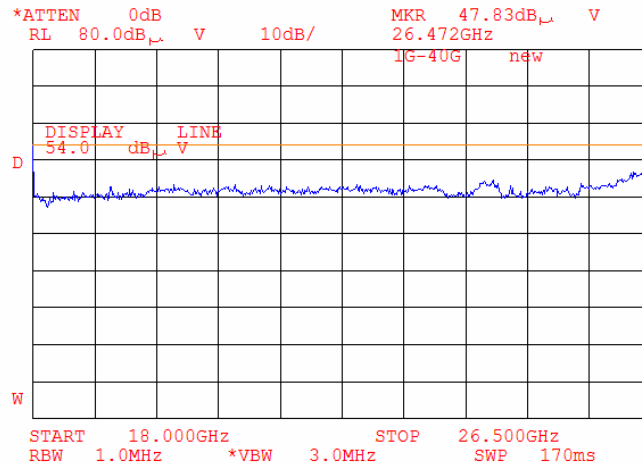

**Plot 7.4.38 Radiated emission measurements from 18000 to 26500 MHz at the mid carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

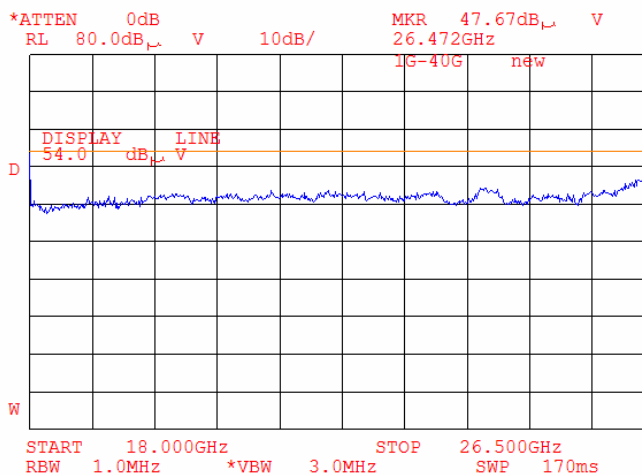




<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.39 Radiated emission measurements from 18000 to 26500 MHz at the high carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

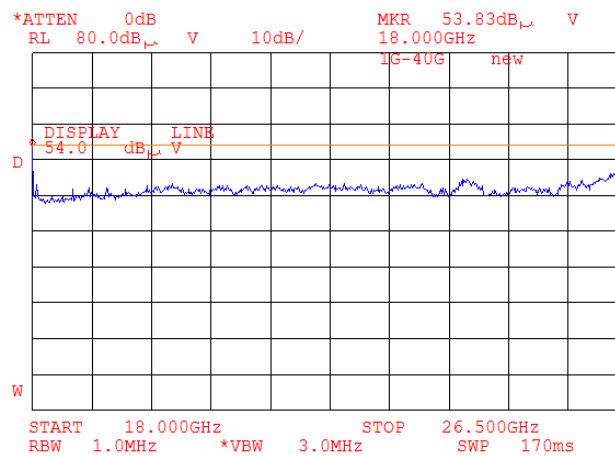

**Plot 7.4.40 Radiated emission measurements from 26500 to 33000 MHz at the low carrier frequency**


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

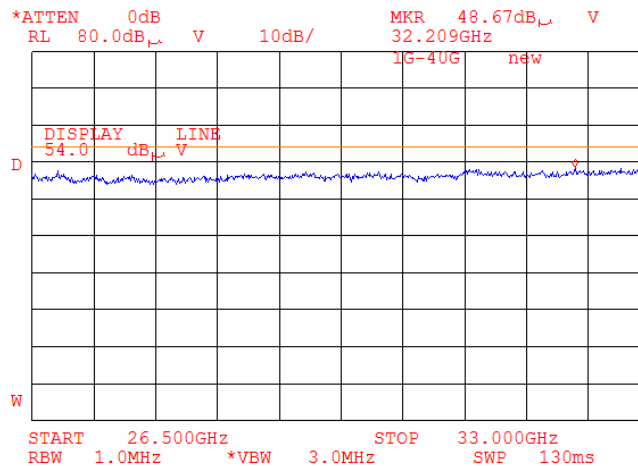

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.41 Radiated emission measurements from 26500 to 33000 MHz at the mid carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

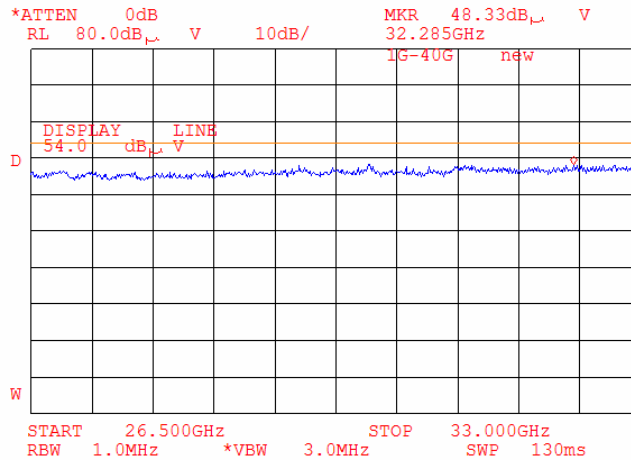

**Plot 7.4.42 Radiated emission measurements from 26500 to 33000 MHz at the high carrier frequency**


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

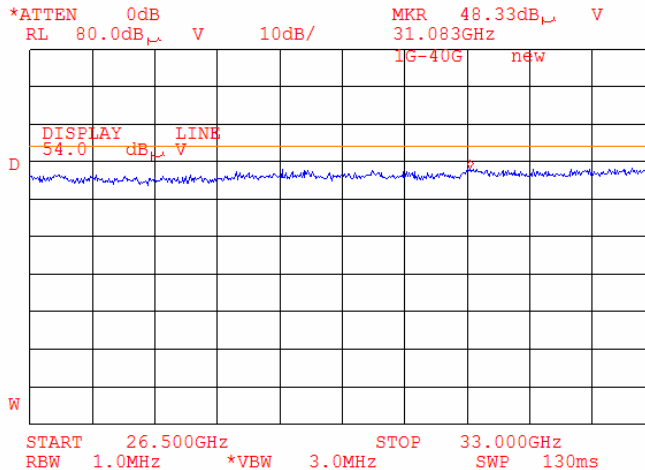

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.43 Radiated emission measurements from 33000 to 40000 MHz at the low carrier frequency**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

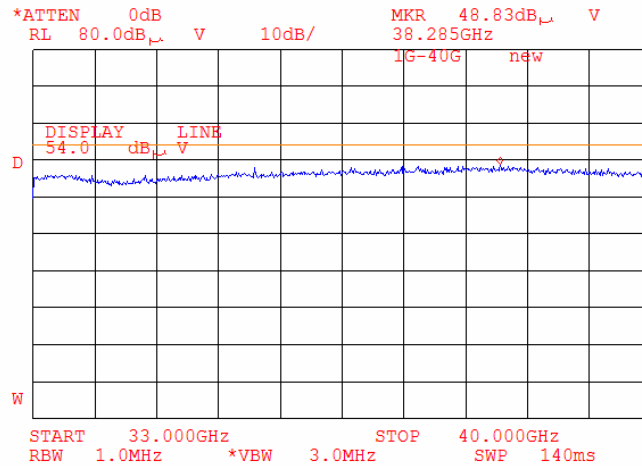

**Plot 7.4.44 Radiated emission measurements from 33000 to 40000 MHz at the mid carrier frequency**


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

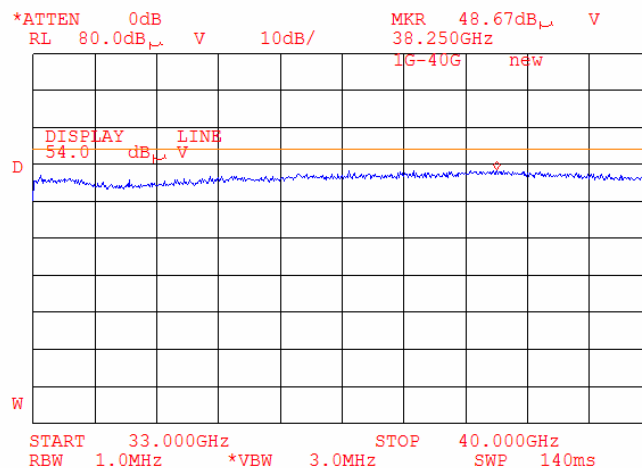

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


Plot 7.4.45 Radiated emission measurements from 33000 to 40000 MHz at the high carrier frequency

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

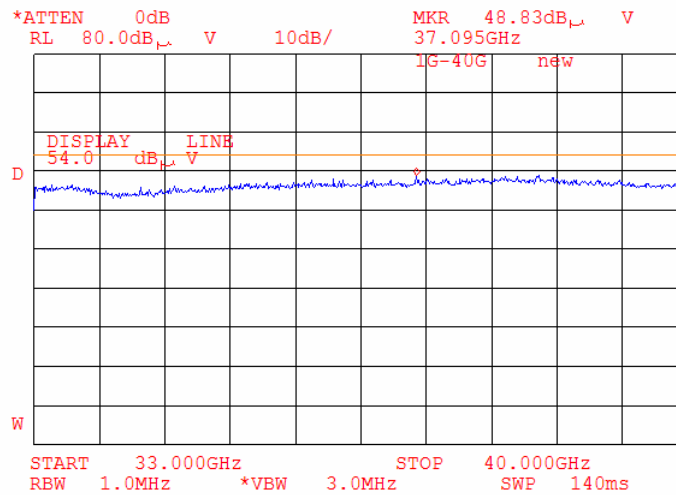


<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:14:04 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.4.46 Transmission pulse duration

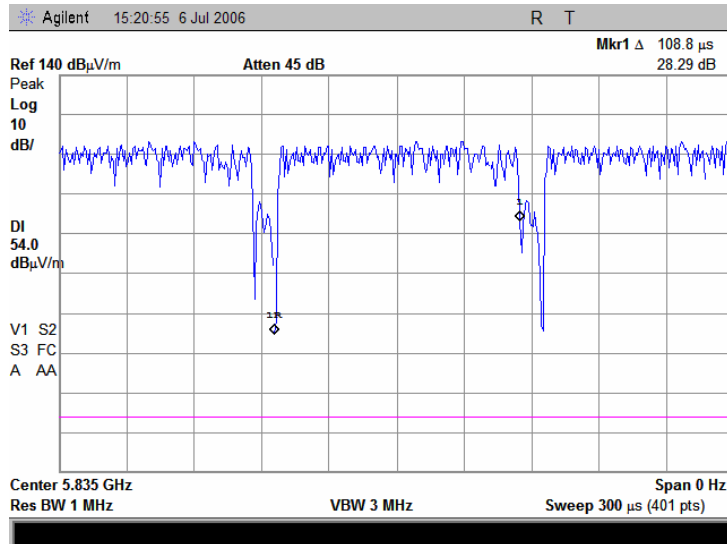

Plot 7.4.47 Transmission pulse period

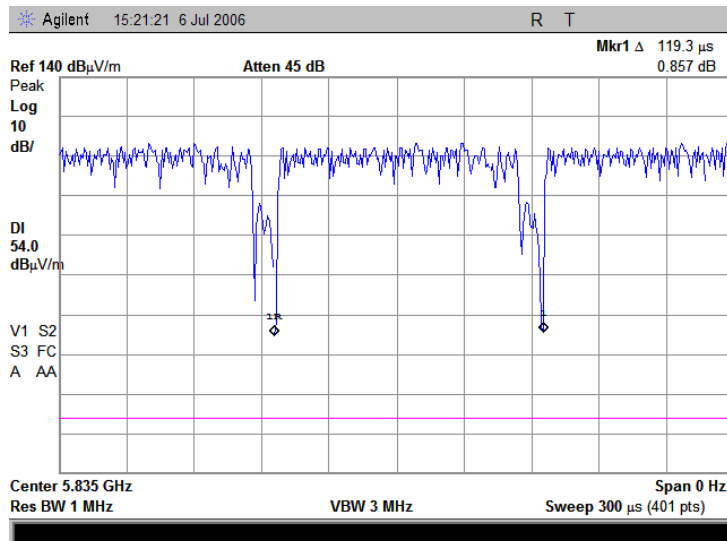

<b>Test specification:</b> Section 15.247(d), Peak power density			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(d)			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/11/2006 2:17:03 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.5 Peak spectral power density

### 7.5.1 General

This test was performed to measure the peak spectral power density at the transmitter RF antenna connector. Specification test limits are given in Table 7.5.1.


Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm
5725 – 5835	3.0	8.0

### 7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.5.2.3 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.
- 7.5.2.4 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.5.2 and associated plots.

Figure 7.5.1 Peak spectral power density test setup



<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:17:03 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Table 7.5.2 Peak spectral power density test results**

ASSIGNED FREQUENCY: 5725 – 5835 MHz  
 MODULATION: QAM  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak

Carrier frequency, MHz	Spectrum analyzer reading, dB(mW/3 kHz)	External attenuation, dB	Cable loss, dB	Peak power density*, dB(mW/3 kHz)	Limit, dBm	Margin**, dB	Verdict
<b>5 MHz channel spacing:</b>							
<b>BPSK:</b>							
5740	-48.20	included	included	-13.20	8.0	-21.20	Pass
5785	-49.06	included	included	-14.06	8.0	-22.06	Pass
5835	-49.65	included	included	-14.65	8.0	-22.65	Pass
<b>64QAM:</b>							
5740	-48.22	included	included	-13.22	8.0	-21.22	Pass
5785	-48.98	included	included	-13.98	8.0	-21.98	Pass
5835	-49.44	included	included	-14.44	8.0	-22.44	Pass
<b>10 MHz channel spacing:</b>							
<b>BPSK:</b>							
5740	-51.03	included	included	-16.03	8.0	-24.03	Pass
5785	-51.90	included	included	-16.90	8.0	-24.90	Pass
5835	-52.25	included	included	-17.25	8.0	-25.25	Pass
<b>64QAM:</b>							
5740	-51.38	included	included	-16.38	8.0	-24.38	Pass
5785	-51.88	included	included	-16.88	8.0	-24.88	Pass
5835	-52.17	included	included	-17.17	8.0	-25.17	Pass

\* - Peak power density = Spectrum analyzer reading + BW factor = SA reading + 35 dB

\*\* - Margin = Peak power density – specification limit.


**Reference numbers of test equipment used**

HL 1650	HL 2254	HL 2909					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.

<b>Test specification:</b>		<b>Section 15.247(d), Peak power density</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(d)	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	7/11/2006 2:17:03 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.5.1 Peak spectral power density at low frequency within 6 dB band, 5 MHz channel spacing, BPSK

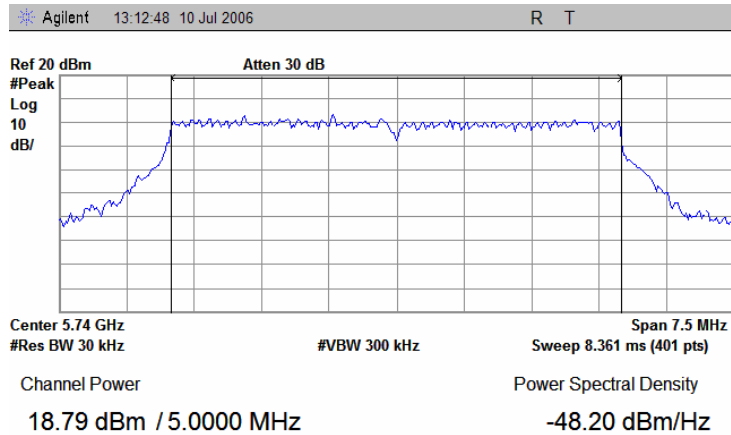


Plot 7.5.2 Peak spectral power density at mid frequency within 6 dB band, 5 MHz channel spacing, BPSK

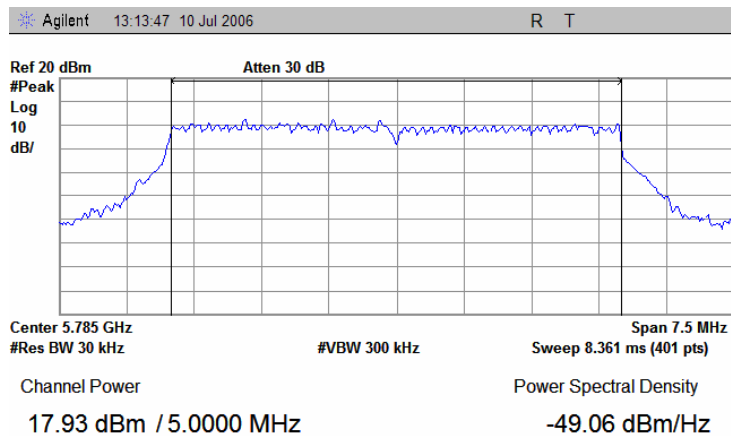




<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:17:03 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Plot 7.5.3 Peak spectral power density at high frequency within 6 dB band, 5 MHz channel spacing, BPSK**

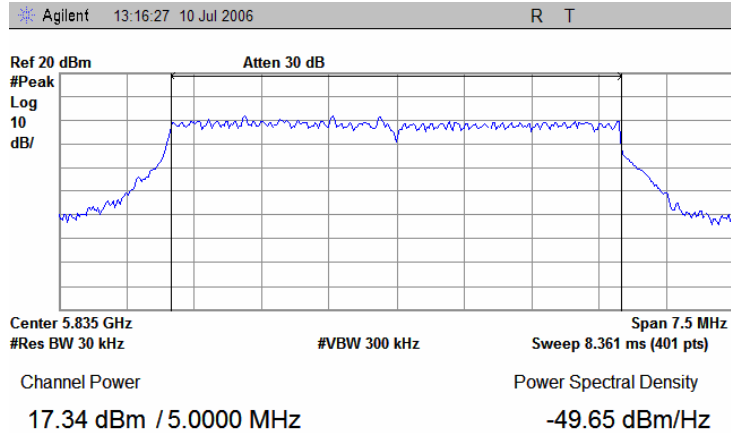


**Plot 7.5.4 Peak spectral power density at low frequency within 6 dB band, 5 MHz channel spacing, 64QAM**

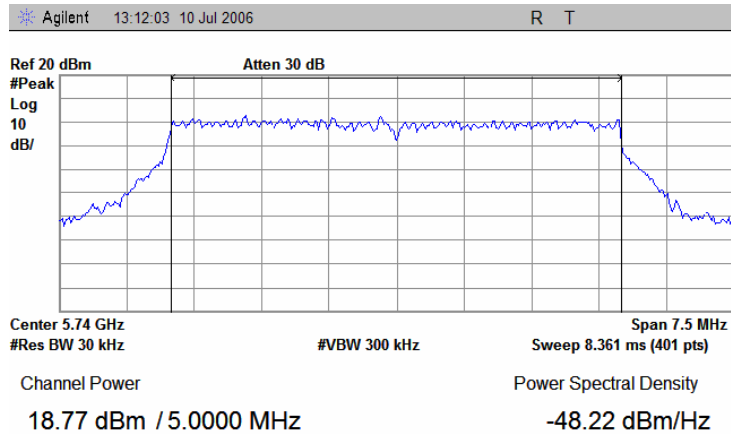


<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:17:03 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.5.5 Peak spectral power density at mid frequency within 6 dB band, 5 MHz channel spacing, 64QAM

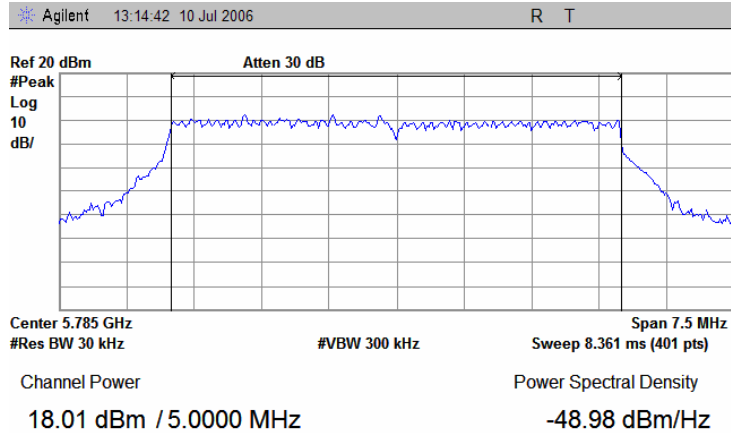


Plot 7.5.6 Peak spectral power density at high frequency within 6 dB band, 5 MHz channel spacing, 64QAM

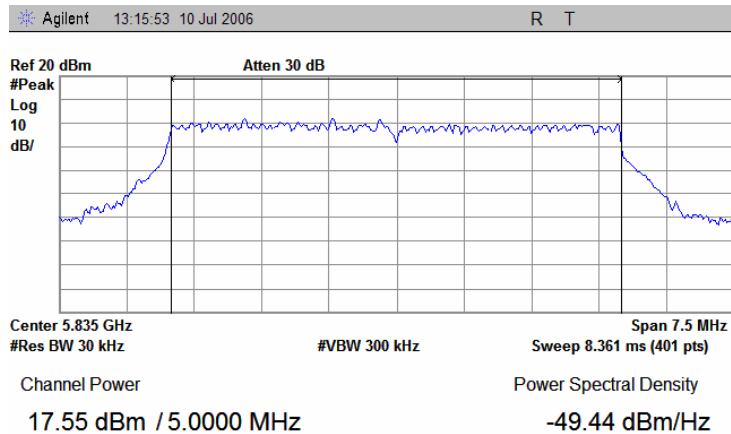


<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:17:03 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.5.7 Peak spectral power density at low frequency within 6 dB band, 10 MHz channel spacing, BPSK

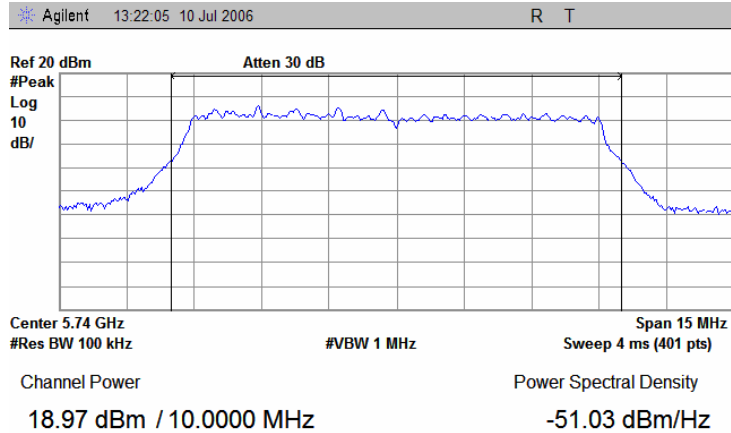


Plot 7.5.8 Peak spectral power density at mid frequency within 6 dB band, 10 MHz channel spacing, BPSK

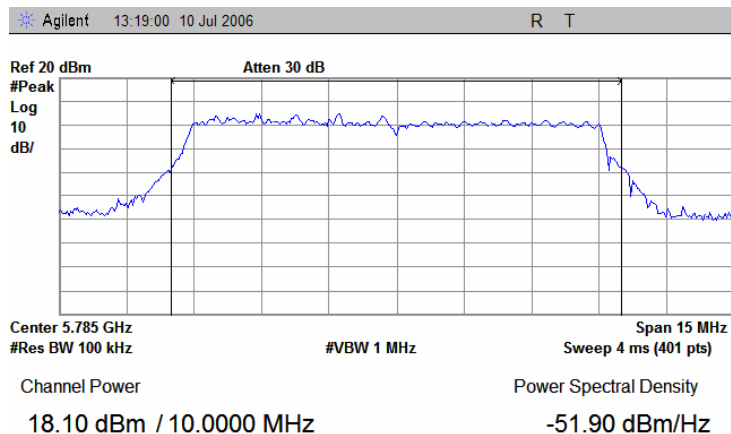


<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:17:03 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.5.9 Peak spectral power density at high frequency within 6 dB band, 10 MHz channel spacing, BPSK

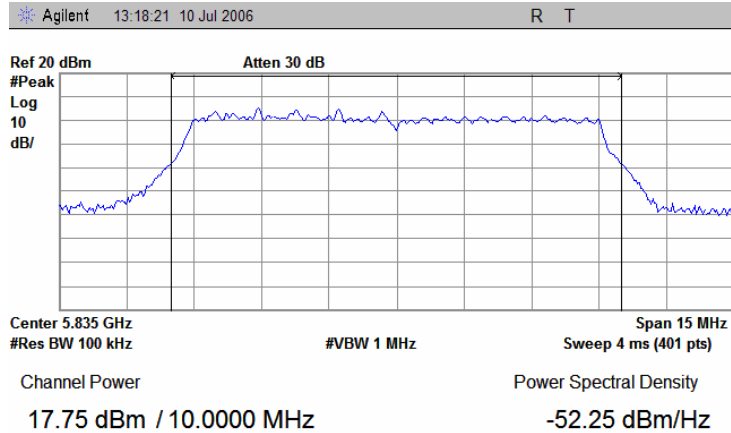


Plot 7.5.10 Peak spectral power density at low frequency within 6 dB band, 10 MHz channel spacing, 64QAM

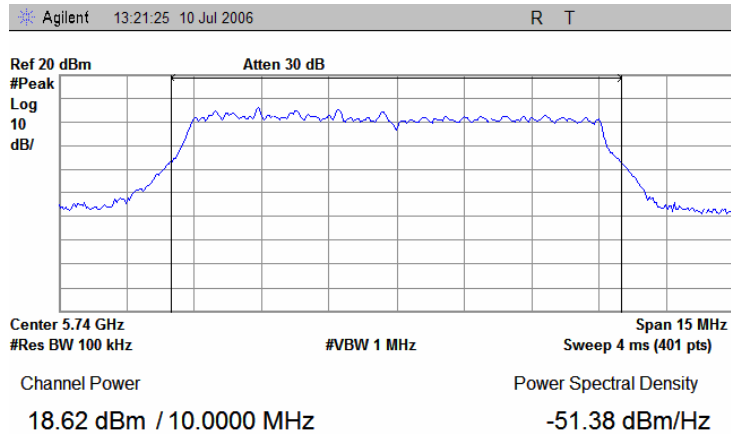


<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:17:03 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Plot 7.5.11 Peak spectral power density at mid frequency within 6 dB band, 10 MHz channel spacing, 64QAM

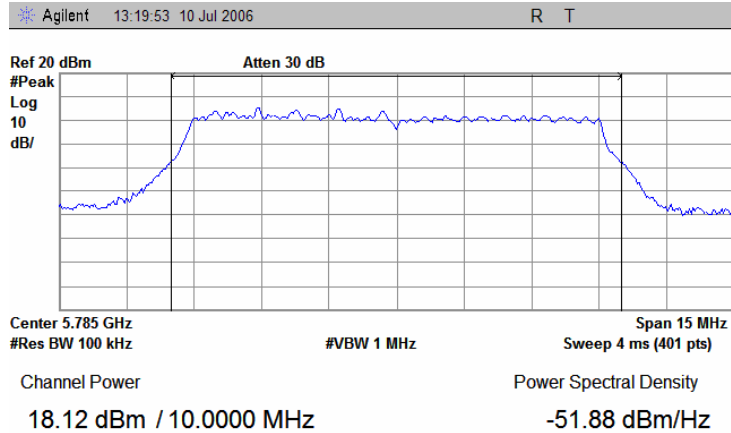

Plot 7.5.12 Peak spectral power density at high frequency within 6 dB band, 10 MHz channel spacing, 64QAM

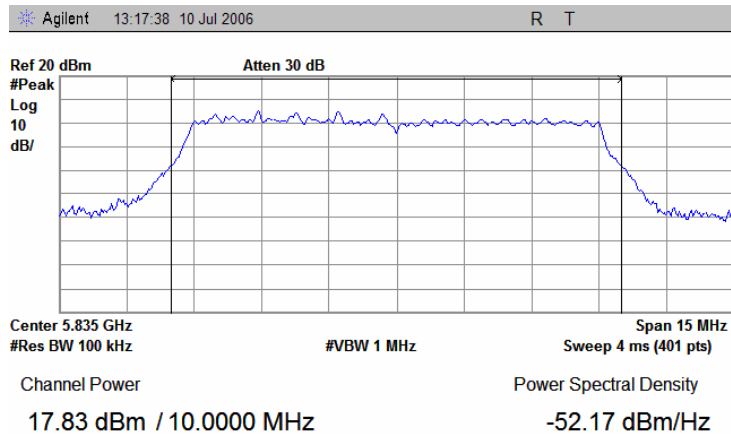

<b>Test specification:</b> Section 15.207(a), Conducted emission			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.3			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/11/2006 12:07:13 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.6 Conducted emissions

### 7.6.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.6.1. The worst test results (the lowest margins) were recorded in Table 7.6.2 and shown in the associated plots.

**Table 7.6.1 Limits for conducted emissions**

Frequency, MHz	Class B limit, dB(μV)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

\* The limit decreases linearly with the logarithm of frequency.


### 7.6.2 Test procedure

7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and the performance check was conducted.

7.6.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.6.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.

7.6.2.3 The position of the device cables was varied to determine maximum emission level.

**Figure 7.6.1 Setup for conducted emission measurements, table-top equipment**

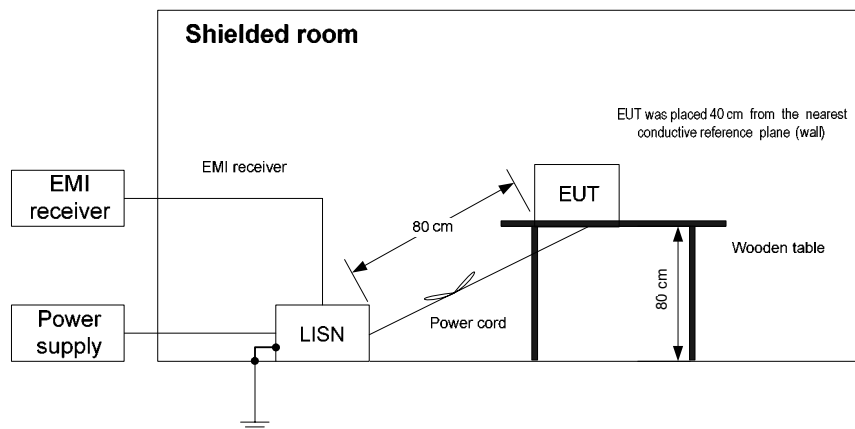

<b>Test specification:</b> Section 15.207(a), Conducted emission			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.3			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/11/2006 12:07:13 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Table 7.6.2 Conducted emission test results

LINE: AC mains  
 EUT OPERATING MODE: Transmit  
 EUT SET UP: TABLE-TOP  
 TEST SITE: SHIELDED ROOM  
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE  
 FREQUENCY RANGE: 150 kHz - 30 MHz  
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(μV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*		
0.278746	38.23	37.35	60.92	-23.57	35.29	50.92	-15.63	L1	Pass
0.556916	36.58	35.74	56.00	-20.26	33.82	46.00	-12.18		
0.835467	41.56	40.82	56.00	-15.18	39.73	46.00	-6.27		
0.973943	43.88	43.28	56.00	-12.72	42.55	46.00	-3.45		
1.112689	40.73	39.98	56.00	-16.02	39.38	46.00	-6.62		
3.753900	32.95	32.26	56.00	-23.74	32.07	46.00	-13.93		
0.279075	41.75	41.21	60.91	-19.70	40.01	50.91	-10.90	L2	Pass
0.557149	38.61	37.72	56.00	-18.28	34.58	46.00	-11.42		
0.696228	39.93	39.06	56.00	-16.94	36.99	46.00	-9.01		
0.835654	43.18	42.34	56.00	-13.66	40.15	46.00	-5.85		
0.974370	44.62	43.94	56.00	-12.06	42.85	46.00	-3.15		
1.111732	41.06	40.44	56.00	-15.56	40.13	46.00	-5.87		

\*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used


HL 0163	HL 0672	HL 0787	HL 1430	HL 1502	HL 1510		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.

<b>Test specification:</b> Section 15.207(a), Conducted emission			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.3			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/11/2006 12:07:13 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.6.1 Conducted emission measurements**

LINE: L1  
EUT OPERATING MODE: Transmit  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

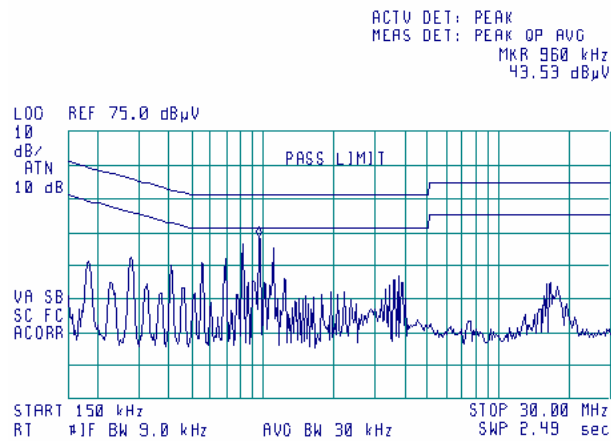

**Plot 7.6.2 Conducted emission measurements**

LINE: L2  
EUT OPERATING MODE: Transmit  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

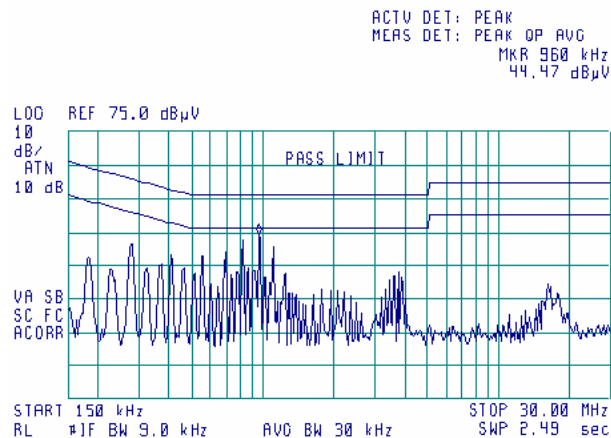



<b>Test specification:</b>	<b>Section 15.203, Antenna requirement</b>		
<b>Test procedure:</b>	Visual inspection		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/11/2006 2:00:02 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.7 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.7.1.

**Table 7.7.1 Antenna requirements**

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

<b>Test specification:</b> Section 15.107, Conducted emission at AC power port			
<b>Test procedure:</b> ANSI C63.4, Sections 11.5 and 12.1.3			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/11/2006 12:11:46 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 8 Emission tests according to 47CFR part 15 subpart B requirements

### 8.1 Conducted emissions

#### 8.1.1 General

This test was performed to measure common mode conducted emissions at the mains power port. Specification test limits are given in Table 8.1.1. The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

Table 8.1.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μV)		Class A limit, dB(μV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

\* The limit decreases linearly with the logarithm of frequency.


#### 8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1, energized and the performance check was conducted.

8.1.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 8.1.1. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.

8.1.2.3 The position of the device cables was varied to determine maximum emission level.

Figure 8.1.1 Setup for conducted emission measurements, table-top equipment

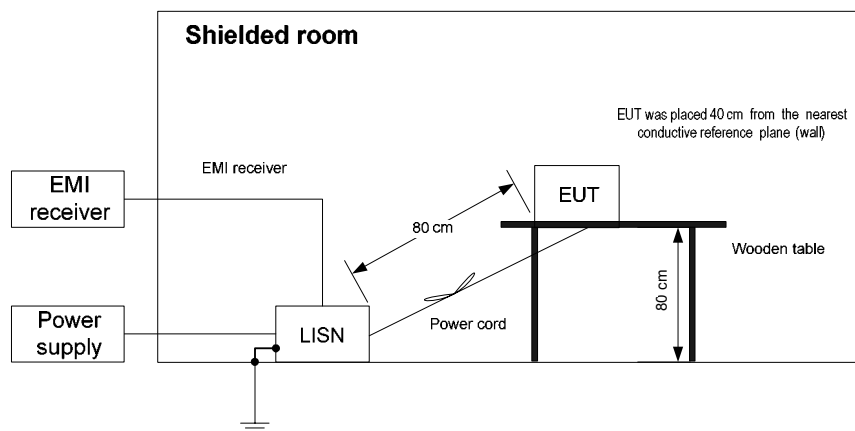

<b>Test specification:</b> Section 15.107, Conducted emission at AC power port	
<b>Test procedure:</b> ANSI C63.4, Sections 11.5 and 12.1.3	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date &amp; Time:</b> 7/11/2006 12:11:46 PM	
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa
<b>Relative Humidity:</b> 36 %	
<b>Power Supply:</b> 120 VAC	
<b>Remarks:</b>	

Table 8.1.2 Conducted emission test results

LINE: AC mains  
LIMIT: Class B  
EUT OPERATING MODE: Receive / Stand-by  
EUT SET UP: TABLE-TOP  
TEST SITE: SHIELDED ROOM  
DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE  
FREQUENCY RANGE: 150 kHz - 30 MHz  
RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(μV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*		
0.278840	41.66	41.14	60.91	-19.77	39.88	50.91	-11.03	L1	Pass
0.557690	38.62	37.90	56.00	-18.10	34.56	46.00	-11.44		
0.697002	40.19	39.49	56.00	-16.51	37.04	46.00	-8.96		
0.836708	43.51	42.84	56.00	-13.16	40.23	46.00	-5.77		
0.976301	45.13	44.68	56.00	-11.32	42.92	46.00	-3.08		
1.115331	41.37	40.74	56.00	-15.26	39.56	46.00	-6.44		
0.418895	35.10	34.21	57.52	-23.31	30.53	47.52	-16.99	L2	Pass
0.556675	36.46	35.62	56.00	-20.38	33.71	46.00	-12.29		
0.695941	37.53	36.83	56.00	-19.17	36.57	46.00	-9.43		
0.836007	41.51	40.86	56.00	-15.14	39.56	46.00	-6.44		
0.974714	43.91	43.35	56.00	-12.65	42.37	46.00	-3.63		
1.113976	40.85	40.12	56.00	-15.88	39.09	46.00	-6.91		

\*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used


HL 0163	HL 0672	HL 0787	HL 1430	HL 1502	HL 1510		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.

<b>Test specification:</b> Section 15.107, Conducted emission at AC power port			
<b>Test procedure:</b> ANSI C63.4, Sections 11.5 and 12.1.3			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/11/2006 12:11:46 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 8.1.1 Conducted emission measurements**

LINE: L1  
LIMIT: Class B  
EUT OPERATING MODE: Receive / Stand-by  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

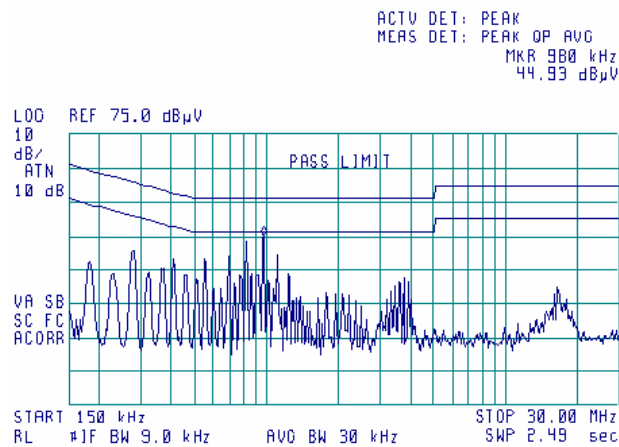

**Plot 8.1.2 Conducted emission measurements**

LINE: L2  
LIMIT: Class B  
EUT OPERATING MODE: Receive / Stand-by  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

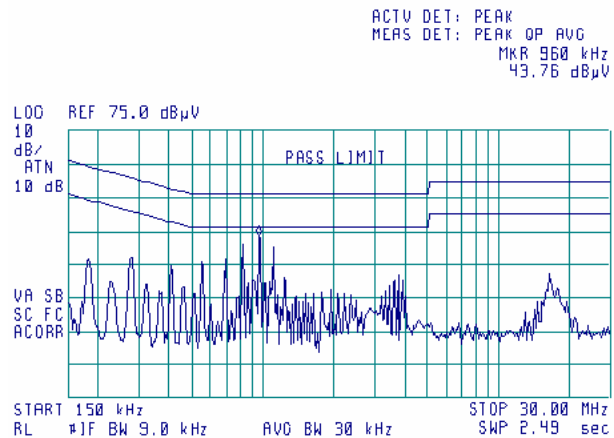

<b>Test specification:</b> Section 15.109, Radiated emission	
<b>Test procedure:</b> ANSI C63.4, Sections 11.6 and 12.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date &amp; Time:</b> 7/14/2006 3:13:53 PM	
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa
<b>Relative Humidity:</b> 48 %	
<b>Power Supply:</b> 120 VAC	
<b>Remarks:</b>	

## 8.2 Radiated emission measurements

### 8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.2.1.

Table 8.2.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

\* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows:  $Lim_{S_2} = Lim_{S_1} + 20 \log(S_1/S_2)$ , where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

### 8.2.2 Test procedure for measurements in semi-anechoic chamber

- 8.2.2.1 The EUT was set up as shown in Figure 8.2.1 and associated photograph/s, energized and the performance check was conducted.
- 8.2.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.2.2.3 The worst test results (the lowest margins) were recorded in Table 8.2.2 and shown in the associated plots.

### 8.2.3 Test procedure for measurements at OATS

- 8.2.3.1 The EUT was set up as shown in Figure 8.2.1 and associated photograph/s, energized and the performance check was conducted.
- 8.2.3.2 Preliminary measurements were performed in the anechoic chamber at 3 m test distance. The specified frequency range was investigated with biconical and log periodic antennas connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.2.3.3 The EUT was set up as shown in Figure 8.2.2, energized and the performance check was conducted.
- 8.2.3.4 Final measurements were performed at the open area test site at 10 m test distance. The EUT wires and cables were arranged to produce maximum emission as it was found during preliminary measurements. The frequencies yield the worst test results (the lowest margins) during preliminary testing were investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m and its polarization was changed from vertical to horizontal. At frequencies where high ambient noise was encountered, the final measurements were taken in the anechoic chamber at 3 m distance.
- 8.2.3.5 The worst test results (the lowest margins) were recorded in Table 8.2.2 and shown in the associated plots.

<b>Test specification:</b> Section 15.109, Radiated emission			
<b>Test procedure:</b> ANSI C63.4, Sections 11.6 and 12.1.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date &amp; Time:</b> 7/14/2006 3:13:53 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment


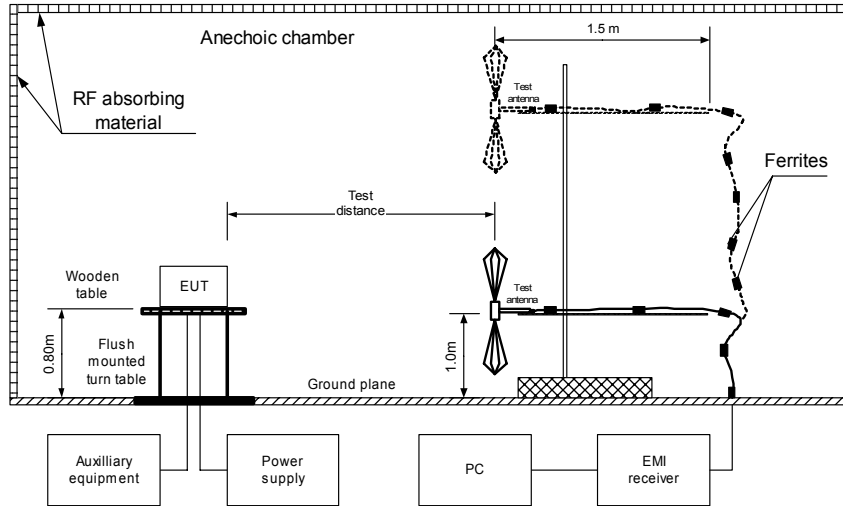


Figure 8.2.2 Setup for radiated emission measurements at OATS, table-top equipment

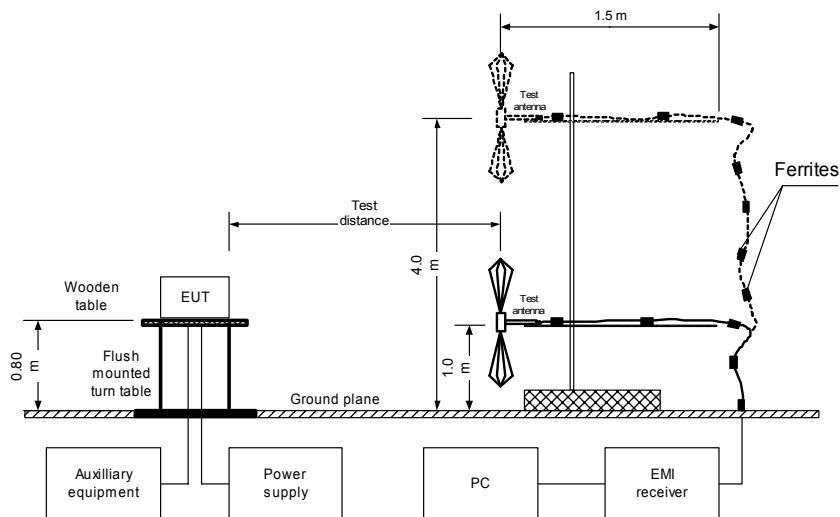

<b>Test specification:</b> Section 15.109, Radiated emission			
<b>Test procedure:</b> ANSI C63.4, Sections 11.6 and 12.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/14/2006 3:13:53 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Table 8.2.2 Radiated emission test results

EUT SET UP: TABLE-TOP  
LIMIT: Class B  
EUT OPERATING MODE: Receive / Stand-by  
TEST SITE: OATS  
TEST DISTANCE: 10 m  
DETECTORS USED: PEAK / QUASI-PEAK  
FREQUENCY RANGE: 30 MHz – 1000 MHz  
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
249.993981	35.04	32.42	35.50	-3.08	Vertical	1.0	360	Pass

TEST SITE: SEMI ANECHOIC CHAMBER  
TEST DISTANCE: 3 m  
DETECTORS USED: PEAK / AVERAGE  
FREQUENCY RANGE: 1000 MHz - 26500 MHz  
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found								Pass

\*- Margin = Measured emission - specification limit.  
\*\*- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 1425	HL 1984	HL 2697				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

<b>Test specification:</b>		<b>Section 15.109, Radiated emission</b>	
<b>Test procedure:</b>		ANSI C63.4, Sections 11.6 and 12.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	7/14/2006 3:13:53 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization**

TEST SITE: Anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive / Stand-by

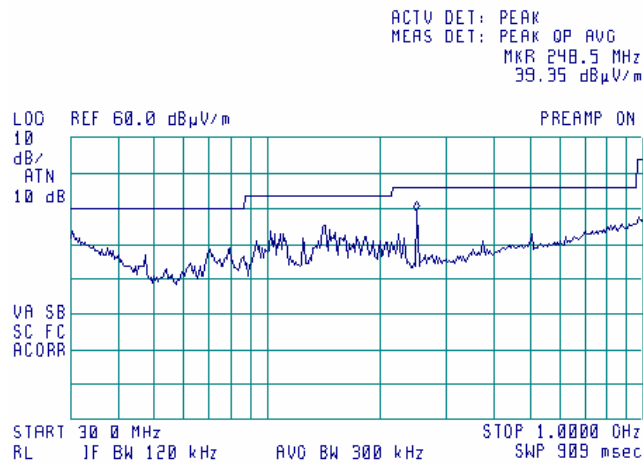




<b>Test specification:</b> Section 15.109, Radiated emission			
<b>Test procedure:</b> ANSI C63.4, Sections 11.6 and 12.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 7/14/2006 3:13:53 PM			
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Plot 8.2.2 Radiated emission measurements in 1000 - 2900 MHz range**


TEST SITE: Anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive / Stand-by  
DETECTOR: Peak

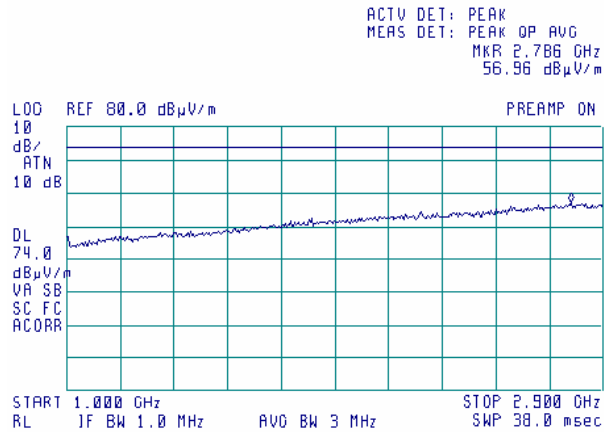

Note: according to FCC part §15.35: "...the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test."

**Plot 8.2.3 Radiated emission measurements in 1000 - 2900 MHz range**


TEST SITE: Anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive / Stand-by  
DETECTOR: Average

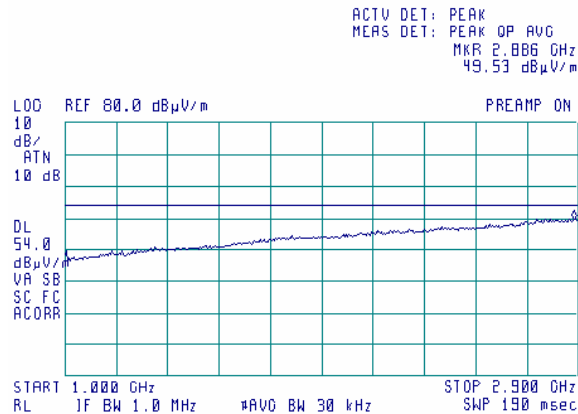

<b>Test specification:</b>	<b>Section 15.109, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:13:53 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 8.2.4 Radiated emission measurements in 2900 - 14000 MHz range**

TEST SITE: Anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive / Stand-by  
DETECTOR: Peak

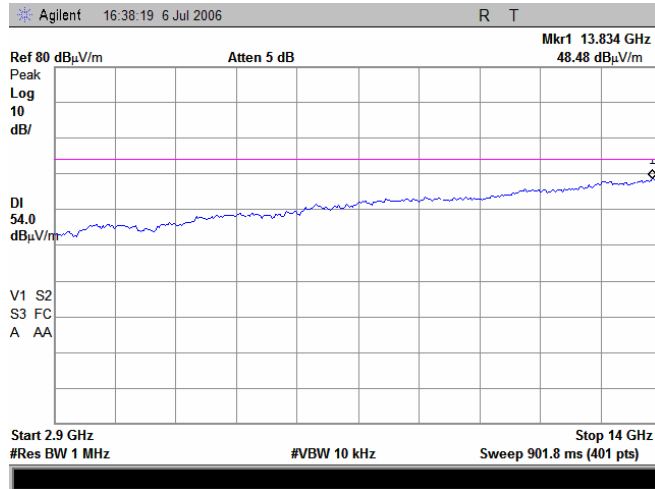

**Plot 8.2.5 Radiated emission measurements in 2900 - 14000 MHz range**


TEST SITE: Anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive / Stand-by  
DETECTOR: Average

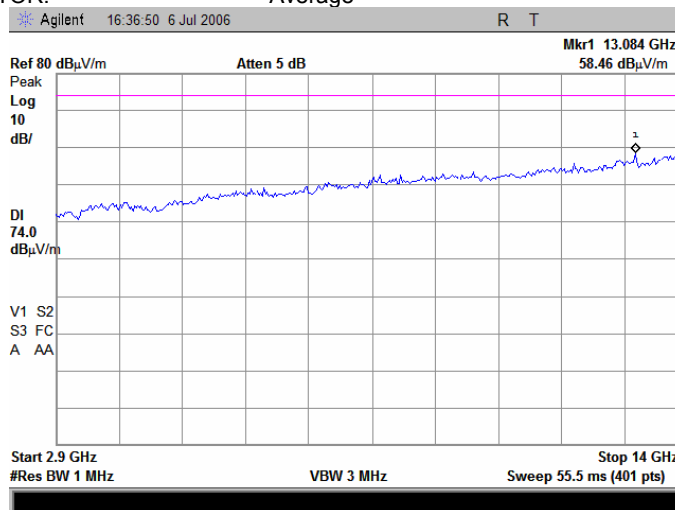

<b>Test specification:</b>	<b>Section 15.109, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:13:53 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 8.2.6 Radiated emission measurements from 14000 to 18000 MHz**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

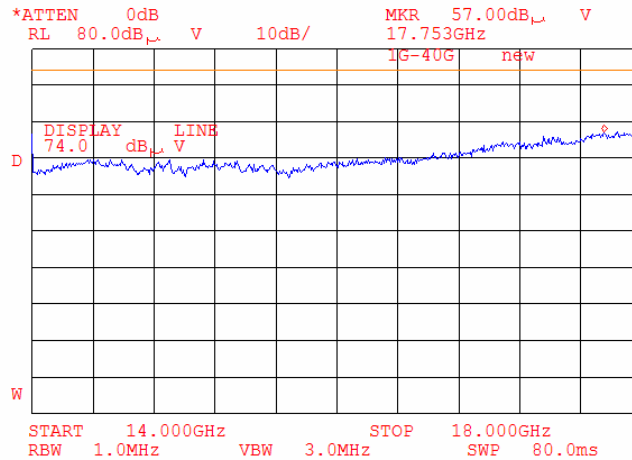

**Plot 8.2.7 Radiated emission measurements from 14000 to 18000 MHz**


TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Average

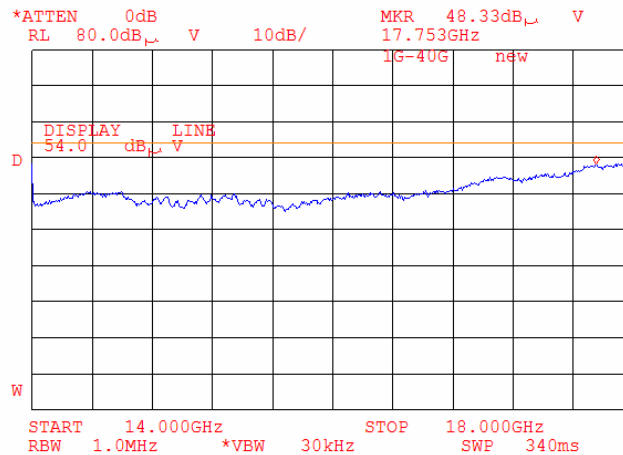

<b>Test specification:</b>	<b>Section 15.109, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	7/14/2006 3:13:53 PM		
<b>Temperature:</b> 24°C	<b>Air Pressure:</b> 1013 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Plot 8.2.8 Radiated emission measurements from 18000 to 26500 MHz**

TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 DETECTOR: Peak

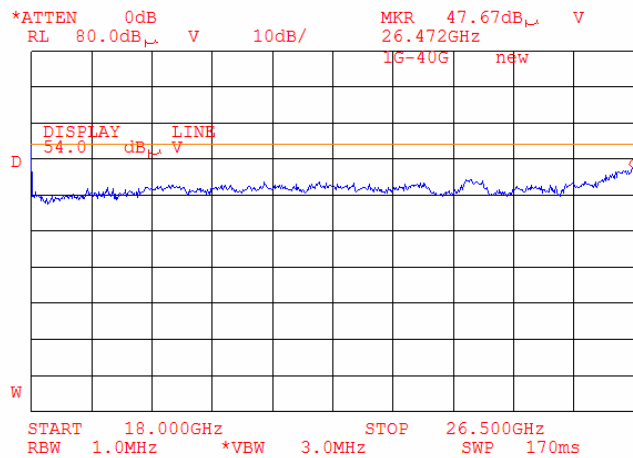

## 9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0163	LISN FCC/VDE/MIL-STD	Electro-Metrics	ANS 25/2	1314	01-Oct-05	01-Oct-06
0410	Cable, Coax, Microwave, DC-18 GHz, N-N, 1 m	Gore	PFP01P0 1039.4	9338767	17-Oct-05	17-Oct-06
0446	Antenna, Loop active, 10kHz-30MHz	EMCO	6502	2857	28-Jun-06	28-Jun-07
0672	Shielded Room 4,6(L) x 4,2(W) x 2,4(H) m	HL	SR - 3	027	11-Nov-05	11-Nov-06
0768	Antenna Standard Gain Horn, 18-26.5 GHz, WR-42, K-band, Gain - 25 dB	Quinstar Technology	QWH-4200-BA	110	21-Jul-04	21-Jul-07
0769	Antenna Standard Gain Horn, 26.5-40 GHz, WR28, Ka band, Gain 25 dB	Quinstar Technology	QWH-2800-BA	112	21-Jul-04	21-Jul-07
0787	Transient Limiter	Hewlett Packard	11947A	3107A01877	21-Nov-05	21-Nov-06
1200	Quadruplexer 1-12 GHz (1-2 GHz; 2-4GHz;4-8 GHz; 8-12GHz)	Electronica S.p.A. - Roma	UE 84	D/00240	10-Feb-05	10-Feb-07
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies	8564EC	3946A00219	30-Aug-05	30-Aug-06
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A00222, 3705A00204	01-Sep-05	01-Sep-06
1430	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL1432	Agilent Technologies	8542E	3807A00262,3705A00217	01-Sep-05	01-Sep-06
1502	Cable RF, 6 m	Belden	M17/167 MIL-C-17	1502	02-Dec-05	02-Dec-06
1510	Cable RF, 8 m	Belden	M17/167 MIL-C-17	1510	02-Dec-05	02-Dec-06
1553	Cable RF, 3.5 m	Alpha Wire	RG-214	1553	02-Dec-05	02-Dec-06
1566	Cable RF, 2 m	Huber-Suhner	Sucoflex 104PE	13094/4PE	02-Dec-05	02-Dec-06
1567	Cable RF, 2 m	Huber-Suhner	Sucoflex 104PE	13095/4PE	02-Dec-05	02-Dec-06
1650	Attenuators Set (2, 3, 5, 20 dB), DC-18 GHz	M/A-COM	2082	1650	03-Jan-06	03-Jan-07
1653	Analyzer EMC 9 kHz - 1.5 GHz	Agilent Technologies	E7401A	US39440281	06-Feb-06	06-Feb-07
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W, N-type	EMC Test Systems	3115	9911-5964	03-Mar-06	03-Mar-07
2254	Cable 40GHz, 0.8 m, blue	Rhophase Microwave Limited	KPS-1503A-800-KPS	W4907	21-Jun-06	21-Jun-07
2259	Amplifier Low Noise 2-20 GHz	Sophia Wireless	LNA0220-C	0223	05-Nov-05	05-Nov-06
2260	Amplifier Low Noise 14-33 GHz	Sophia Wireless	LNA28-B	0233	05-Nov-05	05-Nov-06
2261	Amplifier Low Noise 33-40 GHz	Sophia Wireless	LNA38-B	0234	05-Nov-05	05-Nov-06
2400	Cable 40GHz, 1.5 m, green	Rhophase Microwave Limited	KPS-1503A-1500-KPS	X2946	21-Jun-06	21-Jun-07

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
2697	Antenna, 30 MHz - 3.0 GHz,	Sunol Sciences Corp. Pleasanton, California USA	JB3	A022805	10-Jan-06	10-Jan-07
2780	EMS analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 6	11-Jun-06	11-Jun-07
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	10-Apr-06	10-Apr-07

## 10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: $\pm 1.7$ dB 12.4 GHz to 40 GHz: $\pm 2.3$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Occupied bandwidth	$\pm 8.0$ %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization  Vertical polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB

The test equipment has been calibrated according to its recommended procedures and is within the manufacturer's published limit of error. The standards and instruments used in the calibration system conform to the present requirements of ISO/IEC 17025 (or alternately ANSI/NCSL Z540-1).

The laboratory calibrates its measurement standards by a third party (traceable to NIST, USA) on a regular basis according to equipment manufacturer requirements. The Hermon Labs EMC measurements uncertainty is given in the table above.

## 11 APPENDIX C Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, telecommunications, environmental, safety standards, and by AMTAC (UK) for safety of medical devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## 12 APPENDIX D Specification references

47CFR part 15: 2005	Radio Frequency Devices.
FR Vol.62	Federal Register, Volume 62, May 13, 1997
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.



### 13 APPENDIX E Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
dB( $\mu$ A)	decibel referred to one microampere
dB $\Omega$	decibel referred to one Ohm
DC	direct current
DTS	digital transmission system
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
FHSS	frequency hopping spread spectrum
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
ITE	information technology equipment
k	kilo
kHz	kilohertz
LISN	line impedance stabilization network
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
$\mu$ s	microsecond
NA	not applicable
NT	not tested
OATS	open area test site
$\Omega$	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million ( $10^{-6}$ )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
VA	volt-ampere

**14 APPENDIX F Test equipment correction factors**

Correction factor  
 Line impedance stabilization network  
 Model ANS-25/2  
 Electro-Metrics

Frequency, MHz	Correction factor, dB	Frequency, MHz	Correction factor, dB
0.01	4.7	3.0	0.1
0.02	2.1	4.0	0.1
0.03	1.1	5.0	0.1
0.04	0.7	6.0	0.1
0.05	0.5	10.0	0.1
0.1	0.2	12.0	0.1
0.2	0.1	16.0	0.1
0.4	0.1	18.0	0.1
0.6	0.1	20.0	0.1
0.8	0.1	25.0	0.1
1.0	0.1	28.0	0.1
2.0	0.1	30.0	0.1

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.

**Antenna Factor**  
**Active Loop Antenna**  
**EMC Test Systems, model 6502, serial number 2857, HL 0446**

Frequency, MHz	Magnetic Antenna Factor, dB(S/m)	Electric Antenna Factor, dB(1/m)
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.7
0.750	-41.9	9.6
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.1
4.000	-41.4	10.1
5.000	-41.5	10.0
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(S/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ A/m).  
Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Antenna factor**  
**Standard gain horn antenna**  
**Quinstar Technology**  
**Model QWH**  
**Ser.No.110, HL 0768, 0769**

Frequency min, GHz	Frequency max, GHz	Antenna factor, dB(1/m)
18.000	26.500	32.01
26.500	40.000	35.48
40.000	60.000	39.03
60.000	90.000	42.55
90.000	140.000	46.23
140.000	220.000	50.11

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Antenna factor**  
**Double-ridged wave guide horn antenna**  
**Model 3115, S/N 9911-5964, HL1984**

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Cable loss**  
**Cable GORE, HL 0410**

No.	Frequency, GHz	Cable loss, dB
1	0.5	0.16
2	1	0.28
3	2	0.38
4	4	0.55
5	6	0.85
6	8	0.90
7	10	1.07
8	12	1.11
9	14	1.29
10	16	1.41
11	18	1.73

**Cable loss**  
**Cable coaxial, 6 m, model: M17/167 MIL-C-17, HL 1502**

Frequency, MHz	Cable loss, dB
0.1	0.02
1	0.07
3	0.15
5	0.17
10	0.26
30	0.43
50	0.57
80	0.72
100	0.81
300	1.48
500	2.00
800	2.70
1000	3.09

**Cable loss**  
**Cable M17/167 MIL-C-17, HL 1510**

No.	Frequency, MHz	Cable loss, dB
1	0.1	0.05
2	1	0.09
3	3	0.16
4	5	0.18
5	10	0.27
6	30	0.44
7	50	0.58
8	80	0.69
9	100	0.82
10	300	1.48
11	500	2.01
12	800	2.65
13	1000	3.12

**Cable loss**  
**RF cable 3.5 m, Alpha Wire, model RG-214, S/N 149, HL 1553**

No.	Frequency, MHz	Cable loss, dB	Measurement uncertainty, dB
1	1	0.01	±0.05
2	10	0.07	
3	30	0.12	
4	50	0.22	
5	100	0.26	
6	200	0.40	
7	300	0.52	
8	400	0.60	
9	500	0.70	
10	600	0.77	
11	700	0.84	
12	800	1.00	
13	900	1.00	
14	1000	1.05	
15	2000	1.70	

**Cable loss**  
Cable RF, 2m, model: Sucoflex 104PE, S/N 13094/4PE, HL 1566

No.	Frequency, MHz	Cable loss, dB	Tolerance, dB	Measurement uncertainty, dB
1	30	0.10	≤ 5.0	±0.12
2	50	0.13		
3	100	0.20		
4	300	0.33		
5	500	0.45		
6	800	0.60		
7	1000	0.65		
8	1500	0.91		
9	2000	1.08		
10	2500	1.19		
11	3000	1.28		
12	3500	1.49		
13	4000	1.63		
14	4500	1.63	≤ 5.0	±0.17
15	5000	1.66		
16	5500	1.88		
17	6000	1.96		
18	6500	1.93		
19	7000	2.07		
20	7500	2.37		
21	8000	2.34		
22	8500	2.64		
23	9000	2.68		
24	9500	2.64		
25	10000	2.70		
26	10500	2.84		
27	11000	2.88	≤ 5.0	±0.26
28	11500	3.19		
29	12000	3.15		
30	12500	3.20		
31	13000	3.22		
32	13500	3.47		
33	14000	3.41		
34	14500	3.59		
35	15000	3.79		
36	15500	4.24		
37	16000	4.12		
38	16500	4.46		
39	17000	4.50		
40	17500	4.49		
41	18000	4.45		



**Cable loss**  
Cable RF, 2 m, model: Sucoflex 104PE, s/n 13095/4PE, HL 1567

No.	Frequency, MHz	Cable loss, dB
1	30	0.09
2	50	0.15
3	100	0.23
4	300	0.31
5	500	0.46
6	800	0.63
7	1000	0.67
8	1500	0.89
9	2000	1.05
10	2500	1.18
11	300	1.26
12	5300	1.51
13	4000	1.66
14	4500	1.61
15	5000	1.67
16	5500	1.91
17	6000	1.98
18	6500	1.91
19	7000	2.04
20	7500	2.36
21	8000	2.36
22	8500	2.61
23	9000	2.69
24	9500	2.62
25	10000	2.73
26	10500	2.83
27	11000	2.84
28	11500	3.22
29	12000	3.17
30	12500	3.17
31	13000	3.18
32	13500	3.49
33	14000	3.43
34	14500	3.57
35	15000	3.76
36	15500	4.20
37	16000	4.10
38	16500	4.49
39	17000	4.53
40	17500	4.46
41	18000	4.47

**Cable loss**  
**Cable 40 GHz, 0.8 m, blue, model: KPS-1503A-800-KPS, S/N W4907, HL 2254**

Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB
0.03	0.04	5.10	0.80	15.00	1.49
0.05	0.07	5.30	0.83	15.50	1.49
0.10	0.09	5.50	0.83	16.00	1.46
0.20	0.15	5.70	0.84	16.50	1.47
0.30	0.19	5.90	0.87	17.00	1.50
0.40	0.25	6.10	0.86	17.50	1.57
0.50	0.29	6.30	0.89	18.00	1.63
0.60	0.33	6.50	0.90	18.50	1.57
0.70	0.37	6.70	0.89	19.00	1.63
0.80	0.41	6.90	0.93	19.50	1.65
0.90	0.44	7.10	0.92	20.00	1.64
1.00	0.45	7.30	0.95	20.50	1.75
1.10	0.48	7.50	0.96	21.00	1.72
1.20	0.51	7.70	0.97	21.50	1.78
1.30	0.53	7.90	1.01	22.00	1.76
1.40	0.54	8.10	1.00	22.50	1.72
1.50	0.57	8.30	1.05	23.00	1.83
1.60	0.59	8.50	1.04	23.50	1.80
1.70	0.04	8.70	1.07	24.00	1.90
1.80	0.07	8.90	1.11	24.50	1.81
1.90	0.09	9.10	1.09	25.00	1.98
2.00	0.15	9.30	1.14	25.50	1.91
2.10	0.19	9.50	1.12	26.00	2.02
2.20	0.25	9.70	1.15	26.50	1.92
2.30	0.29	9.90	1.16	27.00	1.97
2.40	0.33	10.10	1.16	28.00	2.02
2.50	0.37	10.30	1.19	29.00	1.95
2.60	0.41	10.50	1.14	30.00	1.94
2.70	0.44	10.70	1.19	31.00	2.11
2.80	0.45	10.90	1.17	32.00	2.17
2.90	0.48	11.10	1.13	33.00	2.27
3.10	0.61	11.30	1.20	34.00	2.27
3.30	0.64	11.50	1.13	35.00	2.29
3.50	0.65	11.70	1.20	36.00	2.35
3.70	0.68	11.90	1.18	37.00	2.37
3.90	0.69	12.10	1.14	38.00	2.40
4.10	0.71	12.40	1.19	39.00	2.57
4.30	0.73	13.00	1.34	40.00	2.36
4.50	0.75	13.50	1.33		
4.70	0.77	14.00	1.48		
4.90	0.79	14.50	1.45		

**Cable loss**  
Cable coaxial, 40GHz, 1.5 m, green, Rhophase Microwave Limited, model: KPS-1503A-1500-KPS,  
HL 2400

Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB
0.03	0.06	6.5	1.46	15.50	2.34
0.05	0.08	6.7	1.49	16.00	2.34
0.1	0.15	6.9	1.50	16.50	2.40
0.2	0.23	7.1	1.51	17.00	2.46
0.3	0.29	7.3	1.55	17.50	2.54
0.5	0.37	7.5	1.56	18.00	2.61
0.7	0.46	7.7	1.58	18.50	2.59
0.9	0.53	7.9	1.60	19.00	2.59
1.1	0.58	8.1	1.61	19.50	2.67
1.3	0.65	8.3	1.68	20.00	2.62
1.5	0.66	8.5	1.68	20.50	2.73
1.7	0.72	8.7	1.75	21.00	2.71
1.9	0.76	8.9	1.74	21.50	2.78
2.1	0.79	9.1	1.81	22.00	2.83
2.3	0.85	9.3	1.79	22.50	2.81
2.5	0.90	9.5	1.86	23.50	2.91
2.7	0.91	9.7	1.85	24.00	2.97
2.9	0.97	9.9	1.87	24.50	2.98
3.1	0.97	10.1	1.88	25.00	2.97
3.3	1.03	10.30	1.82	25.50	3.03
3.5	1.06	10.50	1.92	26.00	3.04
3.7	1.10	10.70	1.86	26.50	3.11
3.9	1.13	10.90	1.96	27.00	2.97
4.1	1.16	11.10	1.90	28.00	3.15
4.3	1.18	11.30	1.99	29.00	3.07
4.5	1.21	11.50	1.95	30.00	3.13
4.7	1.23	11.70	2.00	31.00	3.13
4.9	1.26	11.90	2.01	32.00	3.18
5.1	1.28	12.10	1.99	33.00	3.31
5.3	1.31	12.40	2.06	34.00	3.32
5.5	1.32	13.00	2.11	35.00	3.37
5.7	1.36	13.50	2.17	36.00	3.36
5.9	1.37	14.00	2.36	37.00	3.46
6.1	1.38	14.50	2.32	39.00	3.49
6.3	1.44	15.00	2.30	40.00	3.52