



Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC 47CFR part 27

FOR:

Airspan Networks Inc.

Base station

Model: MacroMAXe 2510H 2.62-2.69G

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

| | | |
|-----|--|-----|
| 1 | Applicant information | 3 |
| 2 | Equipment under test attributes | 3 |
| 3 | Manufacturer information | 3 |
| 4 | Test details | 3 |
| 5 | Tests summary | 4 |
| 6 | EUT description | 5 |
| 6.1 | General information | 5 |
| 6.2 | Ports and lines | 5 |
| 6.3 | Support and test equipment | 5 |
| 6.4 | Changes made in the EUT | 5 |
| 6.5 | Test configuration | 6 |
| 6.6 | Transmitter characteristics | 7 |
| 7 | Transmitter tests according to 47CFR part 27 | 8 |
| 7.1 | Occupied bandwidth test | 8 |
| 7.2 | Peak output power test..... | 23 |
| 7.3 | Conducted spurious emissions at the band edges (emission mask) | 59 |
| 7.4 | Radiated spurious emission measurements | 93 |
| 7.5 | Spurious emissions at RF antenna connector test | 107 |
| 7.6 | Frequency stability test..... | 123 |
| 8 | APPENDIX A Test equipment and ancillaries used for tests..... | 126 |
| 9 | APPENDIX B Measurement uncertainties | 128 |
| 10 | APPENDIX C Test laboratory description..... | 129 |
| 11 | APPENDIX D Specification references..... | 129 |
| 12 | APPENDIX E Test equipment correction factors..... | 130 |
| 13 | APPENDIX F Abbreviations and acronyms | 143 |

1 Applicant information

Client name: Airspan Networks Inc.
Address: 777 Yamato Rd, Suite 310, Boca Raton 33431, Florida, USA
Telephone: +1 561 893 8686
Fax: +1 561 893 8671
E-mail: zlevi@airspan.com
Contact name: Mr. Zion Levi

2 Equipment under test attributes

Product name: Base station
Model(s): MacroMAXe 2510H 2.62-2.69G
Serial number: 51E1A71519DE
Hardware version: A5
Software release: 13_9_50_015
Receipt date: 12/02/2010

3 Manufacturer information

Manufacturer name: Airspan Networks Inc.
Address: 777 Yamato Rd, Suite 310, Boca Raton 33431, Florida, USA
Telephone: +1 561 893 8686
Fax: +1 561 893 8671
E-Mail: zlevi@airspan.com
Contact name: Mr. Zion Levi




4 Test details

Project ID: 21484
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 12/02/2010
Test completed: 12/07/2010
Test specification(s): FCC 47CFR part 27

5 Tests summary

| Test | Status |
|--|---|
| Transmitter characteristics | |
| Section 27.50(h), Peak output power at RF antenna connector | Pass |
| Section 27.50(h)(4), Spectral power density | Pass |
| Section 2.1091, 27.52, RF safety | Pass, exhibit provided in Application for certification |
| Section 27.53(m)(2), Spurious emissions at RF antenna connector | Pass |
| Section 27.53(m)(2), Band edge emissions at RF antenna connector | Pass |
| Section 27.53(m)(2), Radiated spurious emissions | Pass |
| Section 27.54, Frequency stability | Pass |
| Section 2.1049, Occupied bandwidth | Pass |

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

| | Name and Title | Date | Signature |
|---------------------|--|-------------------|---|
| Tested by: | Mr. S. Samokha, test engineer | December 7, 2010 |  |
| Reviewed by: | Mrs. M. Cherniavsky, certification engineer | December 9, 2010 |  |
| Approved by: | Mr. M. Nikishin, EMC and Radio group manager | December 14, 2010 |  |



6 EUT description

6.1 General information

A base station radio, MacroMAXe 2510H 2.62-2.69G, is part of a WiMAX broadband fixed cellular wireless access system. The system provides a radio link between an end-user (a subscriber) and a network to give high-speed data access. The MacroMAXe's transceiver/receiver (up to 64 QAM modulation, data rate up to 46 Mbps) uses OFDM and operating in TDD duplexing mode, equipped with a 18 dBi external antenna. The MacroMAXe is installed outdoors and typically is mounted on a pole. The Subscriber transmits and receives traffic to and from the base station respectively. The transceiver provides subscribers with "always-on" Internet, high speed data only, or data and voice (VoIP) services and is configured with a unique base station reference number, preventing the ProST Subscriber from relocating to another subscriber premises without authorization.

6.2 Ports and lines

| Port type | Port description | Conn. from | Conn. to | Qty. | Cable type | Cable length | Indoor / outdoor |
|-----------|------------------|-----------------|----------------------|------|------------|--------------|--------------------|
| Power | DC power | DC power supply | EUT | 1 | Unshielded | 10 | Outdoor |
| Signal | Ethernet | ETH2 port | ETH3 port | 1 | Shielded | 1.5 | Outdoor |
| Signal | Ethernet | ETH1 port | PC laptop | 1 | Shielded | 10 | Outdoor |
| Signal | Antenna | EUT | GPS external antenna | 1 | Coax | 5 | Outdoor |
| RF | Antenna | EUT | Termination 50 Ohm | 4 | Coax | NA | Outdoor |
| Signal | RS-232 | EUT | Laptop | 1 | Unshielded | 2 | For maintance only |


6.3 Support and test equipment

| Description | Manufacturer | Model number | Serial number |
|-----------------|---------------------|--------------|---------------|
| DC power supply | Horizon Electronics | DHR3655D | 767469 |
| Laptop | IBM | X31 | 99-TXWYC |
| GPS Antenna | Trimble | P/N 57861-00 | 01880177 |

6.4 Changes made in the EUT

No changes were implemented.

6.5 Test configuration

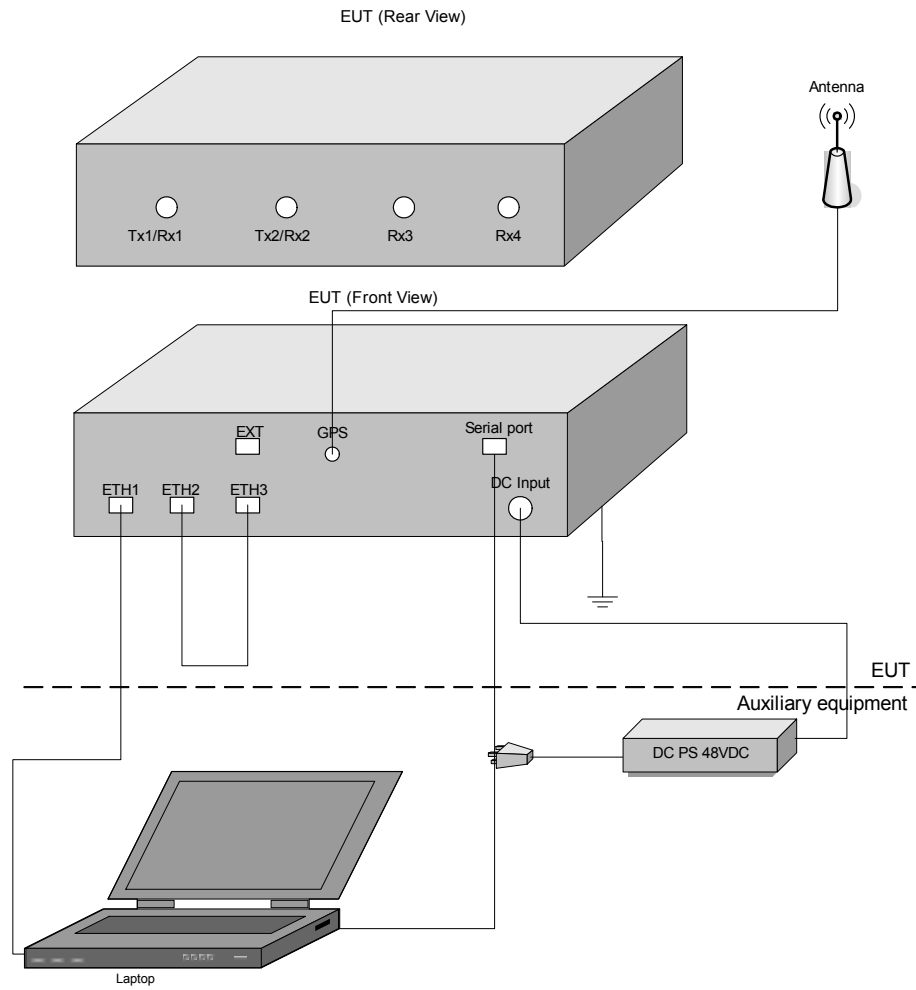

6.6 Transmitter characteristics

| Type of equipment | | | | | |
|--|--|---|---|--------------------------------|--------|
| V | Stand-alone (Equipment with or without its own control provisions) | | | | |
| | Combined equipment (Equipment where the radio part is fully integrated within another type of equipment) | | | | |
| | Plug-in card (Equipment intended for a variety of host systems) | | | | |
| Intended use | | Condition of use | | | |
| V | fixed | Always at a distance more than 2 m from all people | | | |
| | mobile | Always at a distance more than 20 cm from all people | | | |
| | portable | May operate at a distance closer than 20 cm to human body | | | |
| Assigned frequency range | | 2620.0 – 2690.0 MHz | | | |
| Operating frequency range | | 2623.0 – 2683.0 MHz for 3.5 MHz OBW and 5 MHz OBW 2626.0 – 2680.0 MHz for 7 MHz OBW and 10 MHz OBW | | | |
| RF channel spacing | | 3.5, 5, 7, 10 MHz | | | |
| Maximum rated output power | | At transmitter 50 Ω RF output connector (aggregate power of both RF chains) | 43.42 dBm – 3.5 MHz OBW 43.21 dBm – 5 MHz OBW 43.04 dBm – 7 MHz OBW 43.15 dBm – 10 MHz OBW | | |
| | | EIRP density dBm / MHz (aggregate power of both RF chains) with maximum declared antenna gain | 47.99 dBm – 3.5 MHz OBW 45.33 dBm – 5 MHz OBW 44.79 dBm – 7 MHz OBW 42.73 dBm – 10 MHz OBW | | |
| Is transmitter output power variable? | | No | | | |
| | | V | Yes | continuous variable | |
| | | | | stepped variable with stepsize | 0.5 dB |
| | | | | minimum RF power | 0 dBm |
| | | maximum RF power | 43.28 dBm | | |
| Antenna connection | | | | | |
| unique coupling | V | standard connector | Integral with temporary RF connector without temporary RF connector | | |
| Antenna/s technical characteristics | | | | | |
| Type | Manufacturer | Model number | Gain | | |
| Dual Polarized 65° Sector Antenna, Fixed Tilt | Alpha Wireless | AW3007 | 18 dBi | | |
| Dual Polarized 90° Sector Antenna, Fixed Tilt | Alpha Wireless | AW3008 | 17 dBi | | |
| Transmitter aggregate data rate/s, Mbps | | | | | |
| Transmitter 99% power bandwidth | Type of modulation | | | | |
| | | QPSK | 16QAM | 64QAM | |
| | 3.5 MHz | 4 | 9 | 14 | |
| | 5 MHz | 7 | 14 | 23 | |
| | 7 MHz | 8 | 17 | 28 | |
| 10 MHz | 13 | 27 | 46 | | |
| Type of multiplexing | OFDMA/TDD | | | | |
| Modulating test signal (baseband) | PRBS | | | | |
| Maximum transmitter duty cycle in normal use | 75% | | | | |
| Transmitter power source | | | | | |
| V | DC | Nominal rated voltage | 48 VDC via DC power supply | | |
| Common power source for transmitter and receiver | | V | yes no | | |

| | | | |
|-----------------------------|-------------------------------|---|----------------------------|
| Test specification: | | Section 2.1049, Occupied bandwidth | |
| Test procedure: | | 47 CFR, Section 2.1049 | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

7 Transmitter tests according to 47CFR part 27

7.1 Occupied bandwidth test

7.1.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.1.1.

Table 7.1.1 Occupied bandwidth limits


| Assigned frequency, MHz | Modulation envelope reference points*, dBc | Maximum allowed bandwidth, kHz |
|-------------------------|--|--------------------------------|
| 2620.0 – 2686.0 MHz | 26 | NA |

* - Modulation envelope reference points are provided in terms of attenuation below the unmodulated carrier.

7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit the unmodulated carrier and the reference peak power level was measured.
- 7.1.2.3 The EUT was set to transmit the normally modulated carrier.
- 7.1.2.4 The transmitter occupied bandwidth was measured with spectrum analyzer as a frequency delta between the reference points on modulation envelope and provided in Table 7.1.2 and the associated plots.

Figure 7.1.1 Occupied bandwidth test setup



| | |
|---|-------------------------------|
| Test specification: Section 2.1049, Occupied bandwidth | |
| Test procedure: 47 CFR, Section 2.1049 | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/2/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa |
| Relative Humidity: 39 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.1.2 Occupied bandwidth test results

DETECTOR USED: Average
RESOLUTION BANDWIDTH: 36 kHz
VIDEO BANDWIDTH: 110 kHz
MODULATION ENVELOPE REFERENCE POINTS: 26 dBc
MODULATING SIGNAL: PRBS
EBW: 3.5 MHz

| Carrier frequency, MHz | Occupied bandwidth, kHz | Limit, kHz | Margin, kHz | Verdict |
|------------------------|-------------------------|------------|-------------|---------|
| QPSK 4 Mbps | | | | |
| 2623.000 | 3244.2 | NA | NA | Pass |
| 2653.000 | 3238.4 | NA | NA | Pass |
| 2683.000 | 3244.3 | NA | NA | Pass |
| 64QAM 14 Mbps | | | | |
| 2623.000 | 3240.5 | NA | NA | Pass |
| 2653.000 | 3240.5 | NA | NA | Pass |
| 2683.000 | 3239.6 | NA | NA | Pass |

DETECTOR USED: Average
RESOLUTION BANDWIDTH: 51 kHz
VIDEO BANDWIDTH: 150 kHz
MODULATION ENVELOPE REFERENCE POINTS: 26 dBc
MODULATING SIGNAL: PRBS
EBW: 5 MHz

| Carrier frequency, MHz | Occupied bandwidth, kHz | Limit, kHz | Margin, kHz | Verdict |
|------------------------|-------------------------|------------|-------------|---------|
| QPSK 7 Mbps | | | | |
| 2623.000 | 4547.2 | NA | NA | Pass |
| 2653.000 | 4547.1 | NA | NA | Pass |
| 2683.000 | 4538.9 | NA | NA | Pass |
| 64QAM 23 Mbps | | | | |
| 2623.000 | 4539.6 | NA | NA | Pass |
| 2653.000 | 4540.0 | NA | NA | Pass |
| 2683.000 | 4547.5 | NA | NA | Pass |

| | |
|---|-------------------------------|
| Test specification: Section 2.1049, Occupied bandwidth | |
| Test procedure: 47 CFR, Section 2.1049 | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/2/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa |
| Relative Humidity: 39 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.1.2 Occupied bandwidth test results (continued)

DETECTOR USED: Average
RESOLUTION BANDWIDTH: 75 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION ENVELOPE REFERENCE POINTS: 26 dBc
MODULATING SIGNAL: PRBS
EBW: 7 MHz

| Carrier frequency, MHz | Occupied bandwidth, kHz | Limit, kHz | Margin, kHz | Verdict |
|------------------------|-------------------------|------------|-------------|---------|
| QPSK 8 Mbps | | | | |
| 2626.000 | 6482.0 | NA | NA | Pass |
| 2656.000 | 6482.7 | NA | NA | Pass |
| 2680.000 | 6470.0 | NA | NA | Pass |
| 64QAM 28 Mbps | | | | |
| 2626.000 | 6468.3 | NA | NA | Pass |
| 2656.000 | 6469.7 | NA | NA | Pass |
| 2680.000 | 6487.0 | NA | NA | Pass |

DETECTOR USED: Average
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION ENVELOPE REFERENCE POINTS: 26 dBc
MODULATING SIGNAL: PRBS
EBW: 10 MHz

| Carrier frequency, MHz | Occupied bandwidth, kHz | Limit, kHz | Margin, kHz | Verdict |
|------------------------|-------------------------|------------|-------------|---------|
| QPSK 13 Mbps | | | | |
| 2626.000 | 9070.5 | NA | NA | Pass |
| 2656.000 | 9113.0 | NA | NA | Pass |
| 2680.000 | 9071.4 | NA | NA | Pass |
| 64QAM 46 Mbps | | | | |
| 2626.000 | 9111.7 | NA | NA | Pass |
| 2656.000 | 9111.8 | NA | NA | Pass |
| 2680.000 | 9112.1 | NA | NA | Pass |


Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|--|--|--|--|--|--|
| HL 2953 | HL 3818 | | | | | | |
|---------|---------|--|--|--|--|--|--|

Full description is given in Appendix A.


| | | | |
|---|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 2.1049, Occupied bandwidth | | | |
| Test procedure: 47 CFR, Section 2.1049 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.1 Occupied bandwidth test results at mid frequency, 3.5 MHz EBW, QPSK

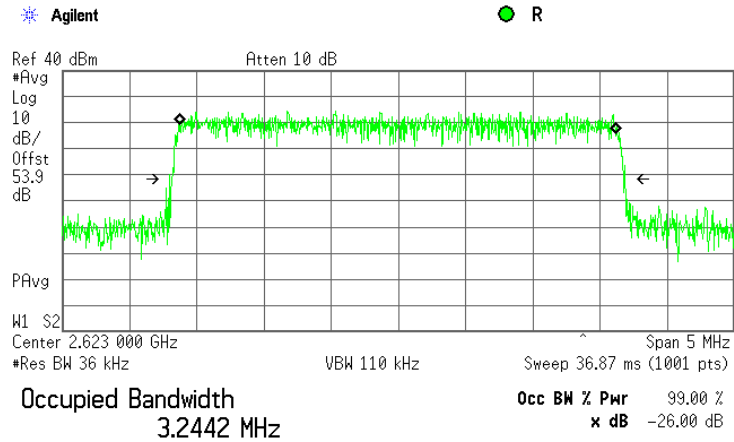

Transmit Freq Error -4.229 kHz
x dB Bandwidth 3.395 MHz*


Plot 7.1.2 Occupied bandwidth test results at mid frequency, 3.5 MHz EBW, QPSK

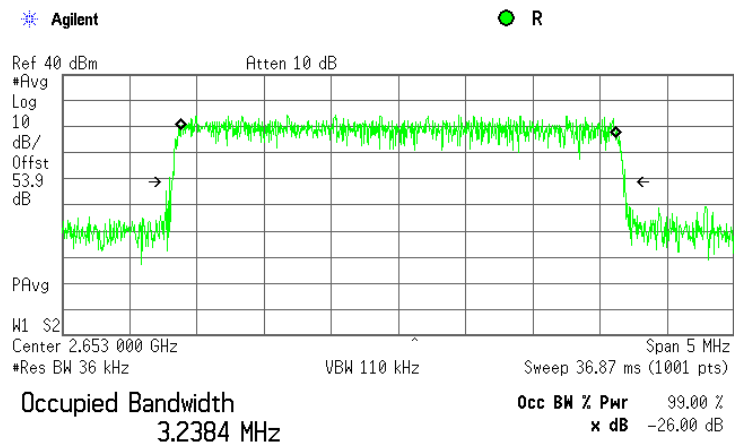


Transmit Freq Error -1.235 kHz
x dB Bandwidth 3.375 MHz*

| | | | |
|---|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 2.1049, Occupied bandwidth | | | |
| Test procedure: 47 CFR, Section 2.1049 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.3 Occupied bandwidth test results at high frequency, 3.5 MHz EBW, QPSK

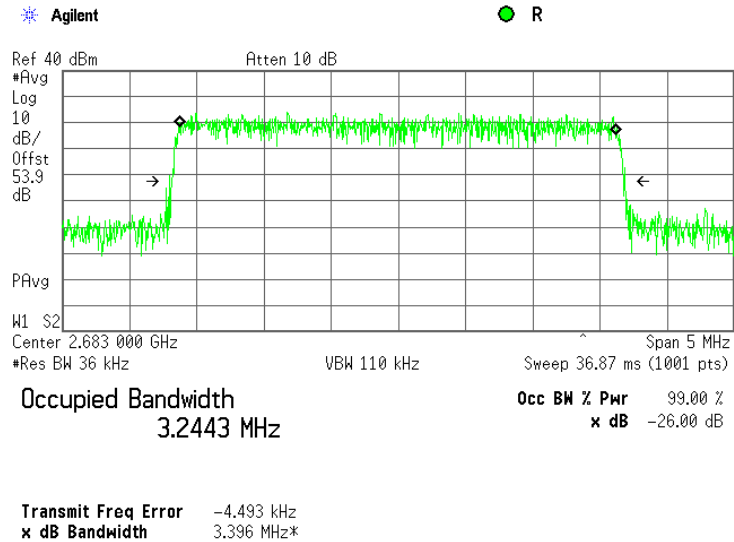


Plot 7.1.4 Occupied bandwidth test results at low frequency, 3.5 MHz EBW, 64QAM

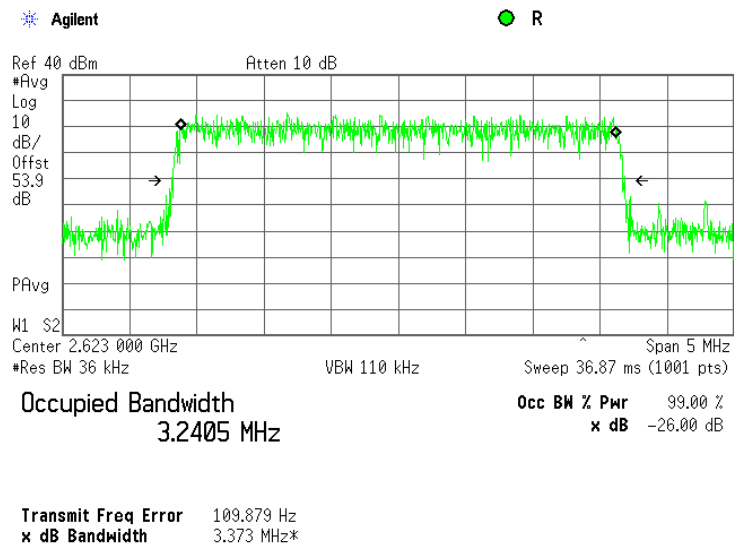


| | | | |
|---|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 2.1049, Occupied bandwidth | | | |
| Test procedure: 47 CFR, Section 2.1049 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.5 Occupied bandwidth test results at mid frequency, 3.5 MHz EBW, 64QAM

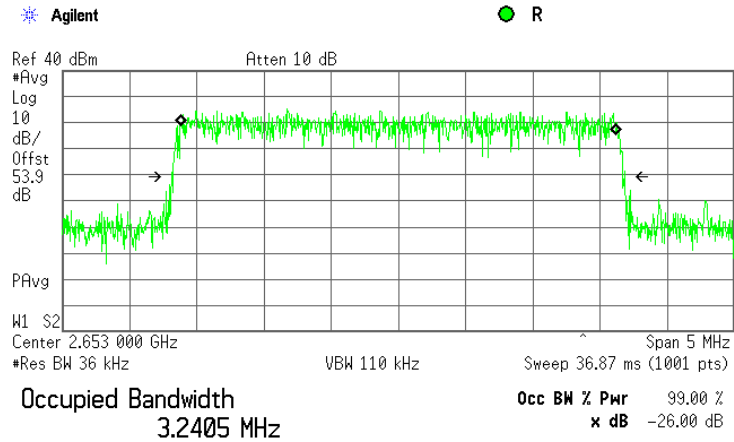

Transmit Freq Error -229.123 Hz
x dB Bandwidth 3.374 MHz*


Plot 7.1.6 Occupied bandwidth test results at high frequency, 3.5 MHz EBW, 64QAM

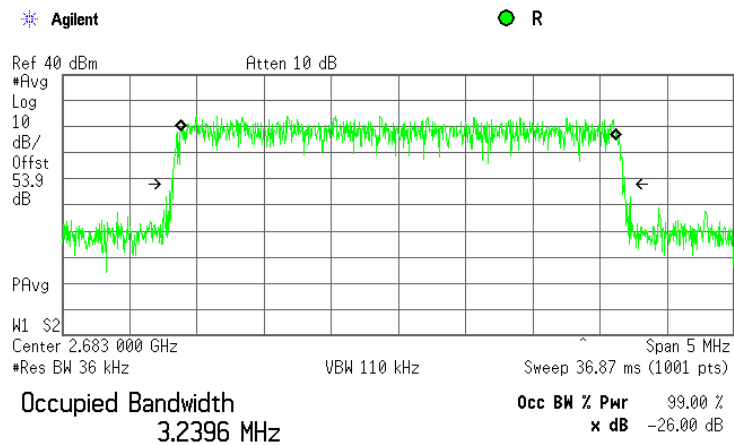

Transmit Freq Error -529.589 Hz
x dB Bandwidth 3.374 MHz*


| | | | |
|---|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 2.1049, Occupied bandwidth | | | |
| Test procedure: 47 CFR, Section 2.1049 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.7 Occupied bandwidth test results at low frequency, 5 MHz EBW, QPSK

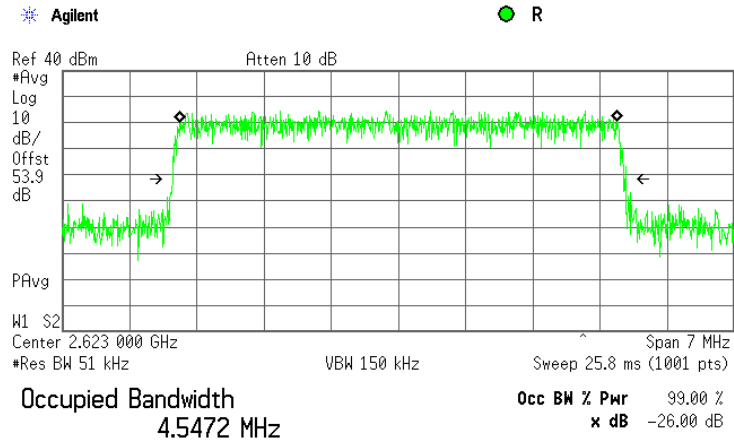

Transmit Freq Error -187.178 Hz
x dB Bandwidth 4.724 MHz*


Plot 7.1.8 Occupied bandwidth test results at mid frequency, 5 MHz EBW, QPSK

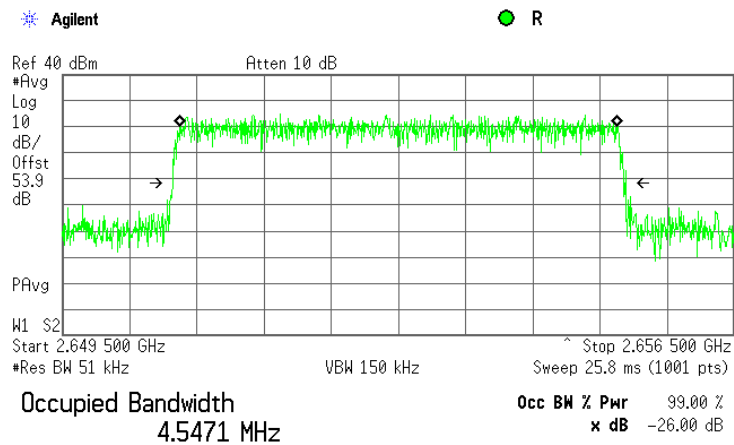

Transmit Freq Error -583.783 Hz
x dB Bandwidth 4.725 MHz*


| | | | |
|---|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 2.1049, Occupied bandwidth | | | |
| Test procedure: 47 CFR, Section 2.1049 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.9 Occupied bandwidth test results at high frequency, 5 MHz EBW, QPSK

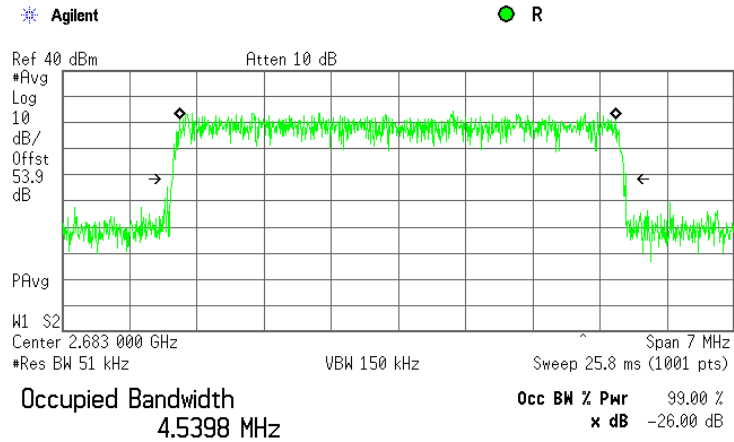

Transmit Freq Error -8.587 kHz
x dB Bandwidth 4.725 MHz*


Plot 7.1.10 Occupied bandwidth test results at low frequency, 5 MHz EBW, 64QAM

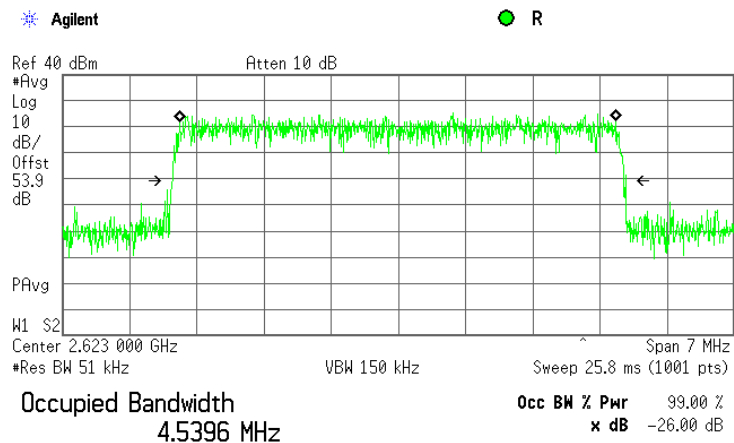


Transmit Freq Error -8.291 kHz
x dB Bandwidth 4.725 MHz*

| | | | |
|-----------------------------|---|--------------------------------|----------------------------|
| Test specification: | Section 2.1049, Occupied bandwidth | | |
| Test procedure: | 47 CFR, Section 2.1049 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.11 Occupied bandwidth test results at mid frequency, 5 MHz EBW, 64QAM

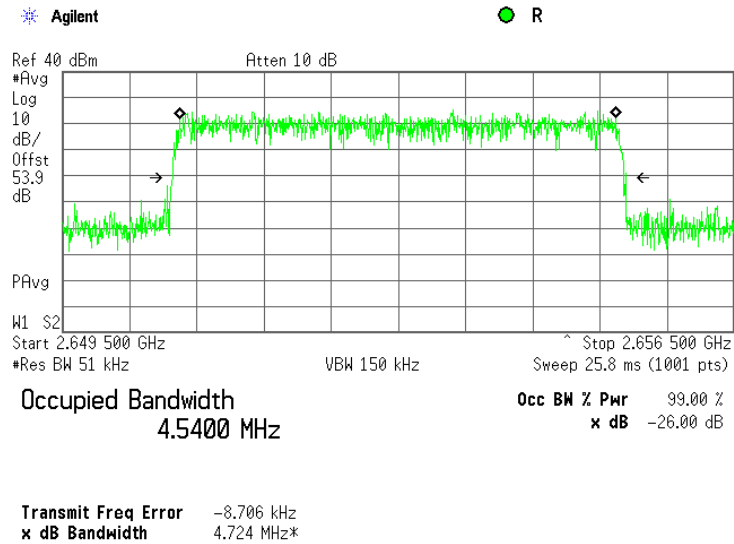


Plot 7.1.12 Occupied bandwidth test results at high frequency, 5 MHz EBW, 64QAM

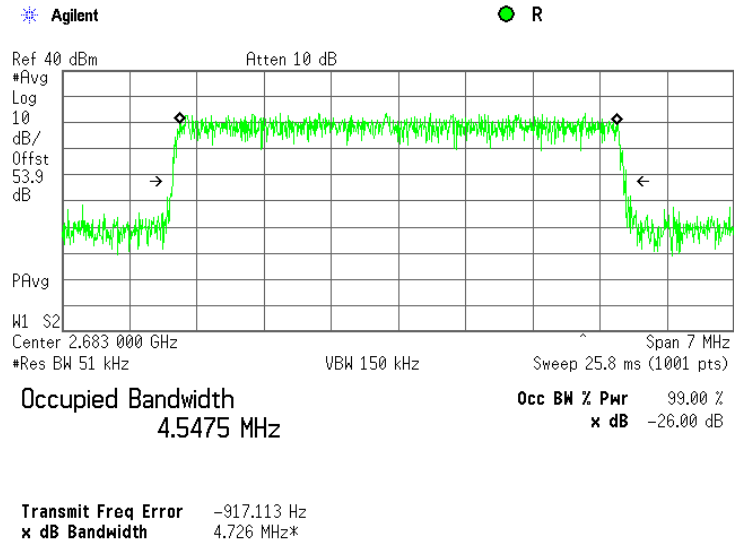


| | | | |
|-----------------------------|---|--------------------------------|----------------------------|
| Test specification: | Section 2.1049, Occupied bandwidth | | |
| Test procedure: | 47 CFR, Section 2.1049 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.13 Occupied bandwidth test results at low frequency, 7 MHz EBW, QPSK

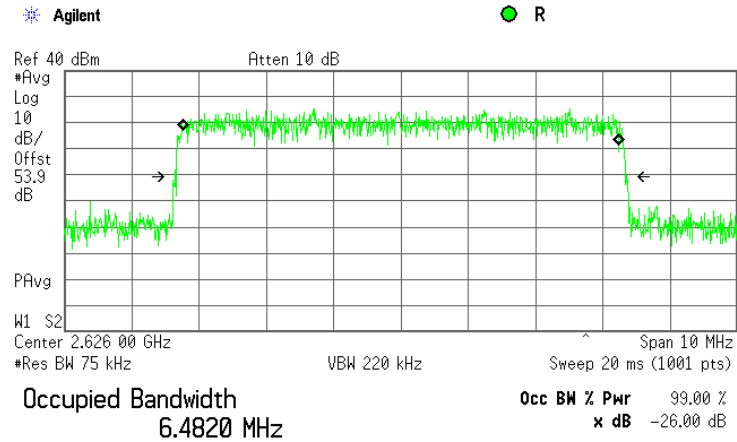

Transmit Freq Error 991.386 Hz
x dB Bandwidth 6.718 MHz*


Plot 7.1.14 Occupied bandwidth test results at mid frequency, 7 MHz EBW, QPSK

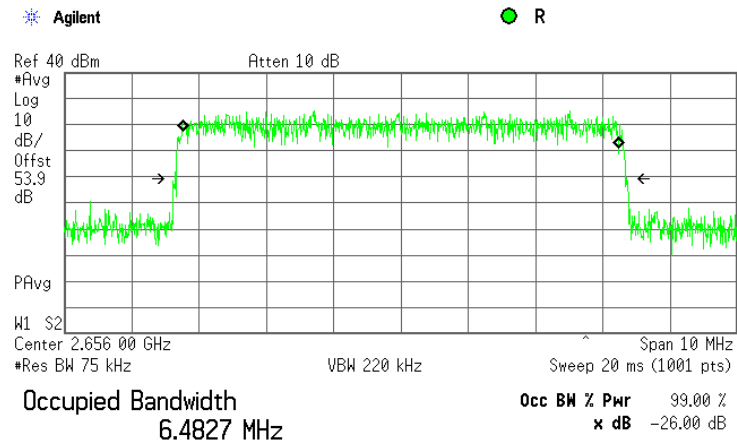

Transmit Freq Error 442.944 Hz
x dB Bandwidth 6.718 MHz*


| | | | |
|-----------------------------|---|--------------------------------|----------------------------|
| Test specification: | Section 2.1049, Occupied bandwidth | | |
| Test procedure: | 47 CFR, Section 2.1049 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.15 Occupied bandwidth test results at high frequency, 7 MHz EBW, QPSK

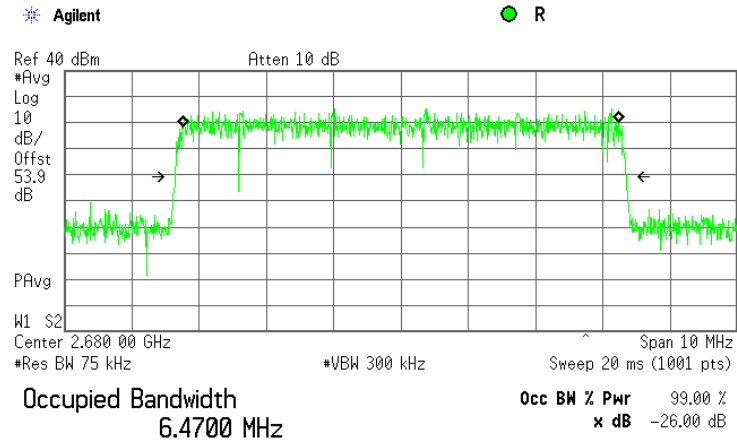

Transmit Freq Error -4.295 kHz
x dB Bandwidth 6.698 MHz*


Plot 7.1.16 Occupied bandwidth test results at low frequency, 7 MHz EBW, 64QAM

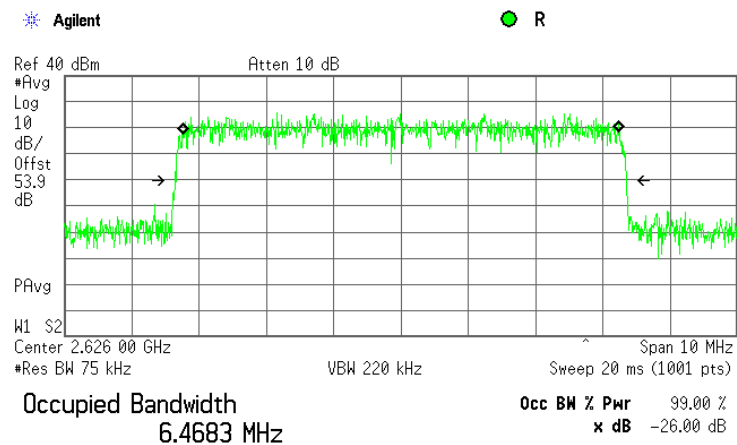

Transmit Freq Error -940.226 Hz
x dB Bandwidth 6.714 MHz*


| | | | |
|---|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 2.1049, Occupied bandwidth | | | |
| Test procedure: 47 CFR, Section 2.1049 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.17 Occupied bandwidth test results at mid frequency, 7 MHz EBW, 64QAM

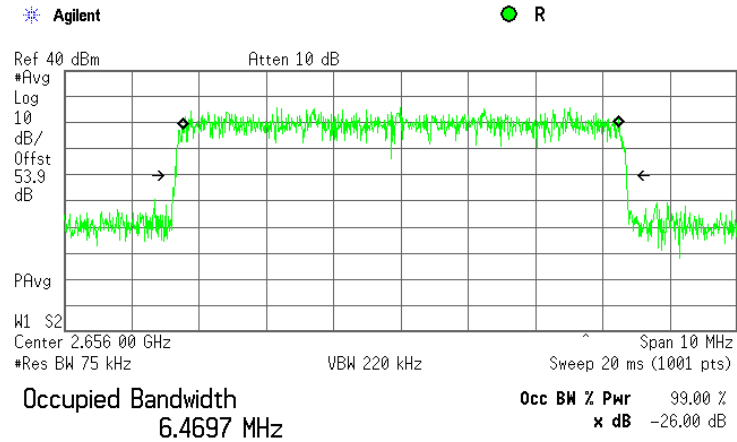

Transmit Freq Error -1.660 kHz
x dB Bandwidth 6.713 MHz*


Plot 7.1.18 Occupied bandwidth test results at high frequency, 7 MHz EBW, 64QAM

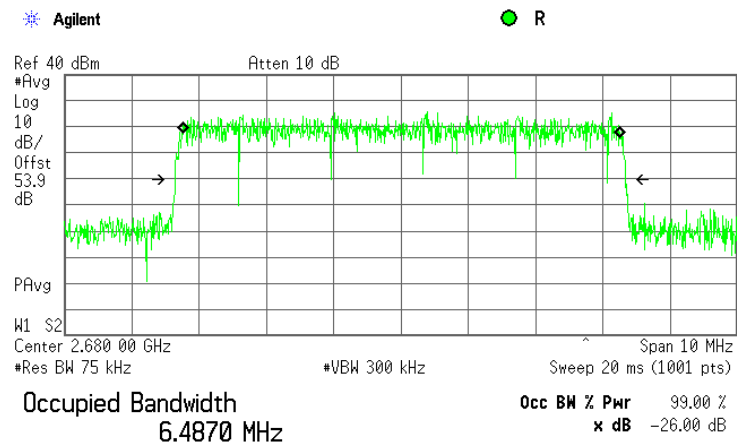


Transmit Freq Error 2.390 kHz
x dB Bandwidth 6.699 MHz*

| | | | |
|---|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 2.1049, Occupied bandwidth | | | |
| Test procedure: 47 CFR, Section 2.1049 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.19 Occupied bandwidth test results at low frequency, 10 MHz EBW, QPSK

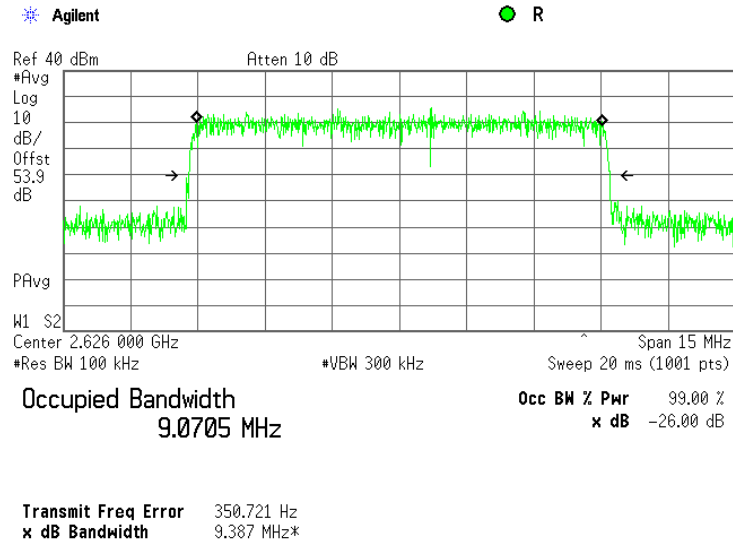


Plot 7.1.20 Occupied bandwidth test results at mid frequency, 10 MHz EBW, QPSK

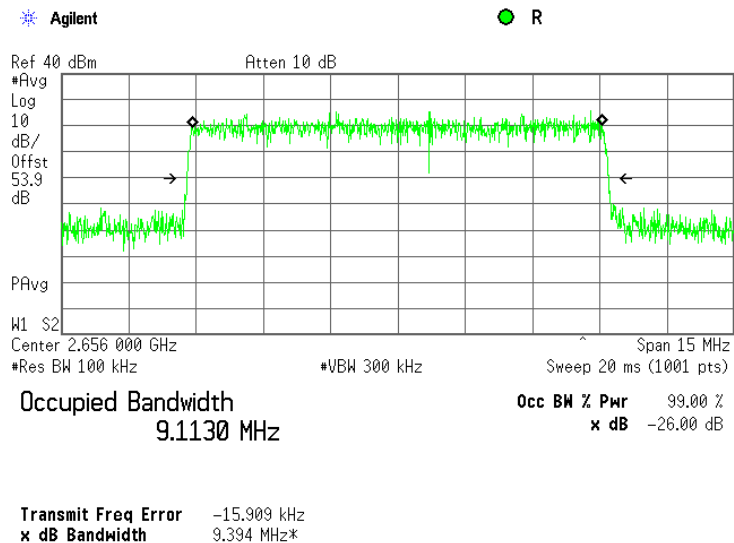


| | | | |
|-----------------------------|---|--------------------------------|----------------------------|
| Test specification: | Section 2.1049, Occupied bandwidth | | |
| Test procedure: | 47 CFR, Section 2.1049 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.21 Occupied bandwidth test results at high frequency, 10 MHz EBW, QPSK

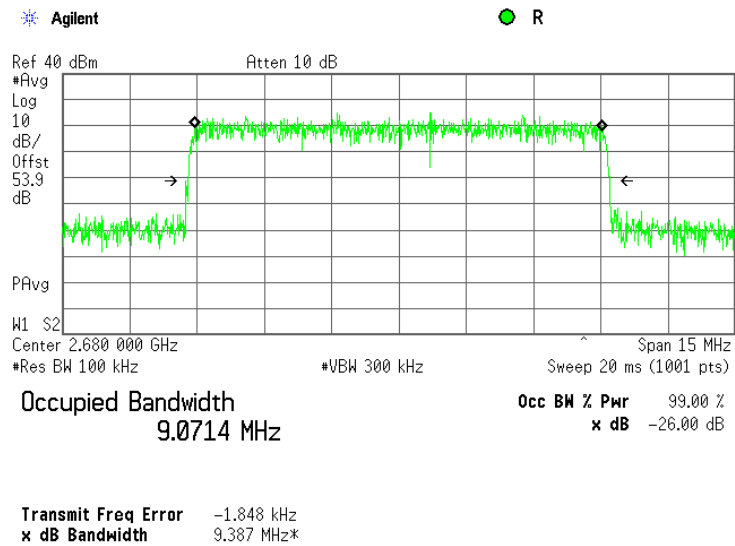


Plot 7.1.22 Occupied bandwidth test results at low frequency, 10 MHz EBW, 64QAM

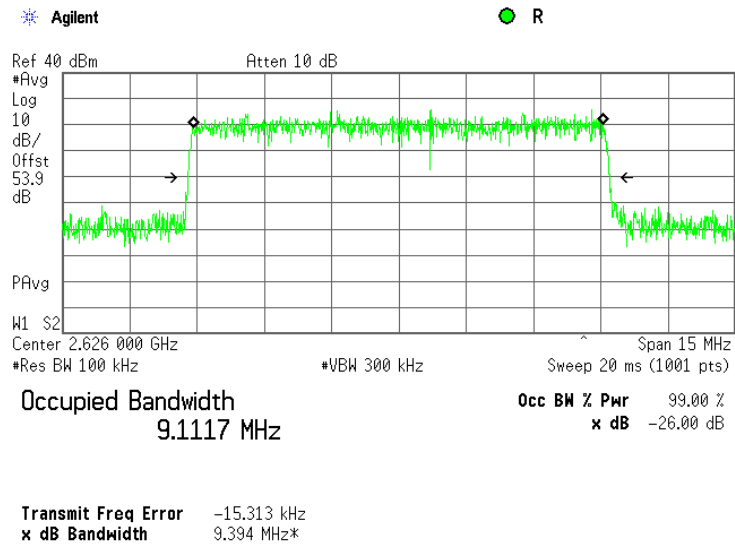


| | | | |
|---|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 2.1049, Occupied bandwidth | | | |
| Test procedure: 47 CFR, Section 2.1049 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.1.23 Occupied bandwidth test results at mid frequency, 10 MHz EBW, 64QAM

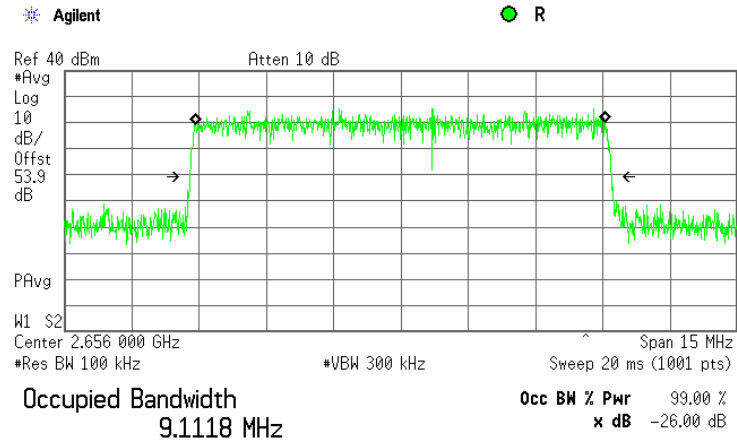

Transmit Freq Error -16.229 kHz
x dB Bandwidth 9.394 MHz*

Plot 7.1.24 Occupied bandwidth test results at high frequency, 10 MHz EBW, 64QAM

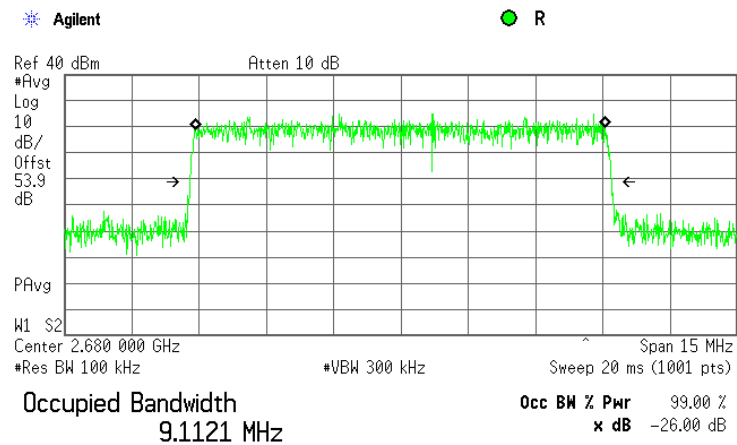

Transmit Freq Error -16.810 kHz
x dB Bandwidth 9.395 MHz*

| | |
|--|-------------------------------|
| Test specification: Section 27.50(h), Peak output power | |
| Test procedure: Section 27.50(h) | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/2/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa |
| Relative Humidity: 39 % | |
| Power Supply: 48VDC | |
| Remarks: | |

7.2 Peak output power test

7.2.1 General

This test was performed to measure the peak output power at RF antenna connector. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

| Assigned frequency range, MHz | Maximum peak output power dBm |
|-------------------------------|---|
| 2620.0 – 2690.0 | $63 + 10\log(X/Y) + 10\log(360/\text{beamwidth})$ |
| | Maximum peak power density dBm/100 kHz |
| | $\text{EIRP} + 10\log(0.1/Y)$ |

*- X is the actual channel width in MHz, Y is either

- 1) 6 MHz if prior to transition or the station is in the MBS following transition or
- 2) 5.5 MHz if the station is in the LBS and UBS following transition, and
- 3) beamwidth is the total horizontal plane beam width of the individual transmitting antenna for the station or any sector measured at the half-power points.

7.2.2 Test procedure


7.2.2.1 The EUT was set up as shown in **Error! Reference source not found.**, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to the end user RF output power.

7.2.2.3 The peak output power was measured with power meter as provided in Table 7.2.2 to Table 7.2.5.

7.2.2.4 The power spectral density was measured with spectrum analyzer as provided in Table 7.2.6 to Table 7.2.9 and the associated plots.

Figure 7.2.1 Peak output power test setup



| | |
|--|-------------------------------|
| Test specification: Section 27.50(h), Peak output power | |
| Test procedure: Section 27.50(h) | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/2/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa |
| Relative Humidity: 39 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATING SIGNAL: PRBS
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DUTY CYCLE: 59%
EBW: 3.5 MHz
TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
MAXIMUM ANTENNA GAIN: 18 dBi

| Carrier frequency, MHz | Power Meter reading RF#1, dBm | Power Meter reading RF#2, dBm | Total RF power**, dBm | Antenna gain, dBi | Total EIRP*, dBm | Limit***, dBm | Margin, dB | Verdict |
|------------------------|-------------------------------|-------------------------------|-----------------------|-------------------|------------------|---------------|------------|---------|
| QPSK 4 Mbps | | | | | | | | |
| 2623.00 | 39.95 | 40.35 | 43.16 | 18.0 | 61.16 | 67.76 | -6.59 | Pass |
| 2653.00 | 40.39 | 40.37 | 43.39 | 18.0 | 61.39 | 67.76 | -6.37 | Pass |
| 2683.00 | 39.89 | 39.56 | 42.74 | 18.0 | 60.74 | 67.76 | -7.02 | Pass |
| 64QAM 14 Mbps | | | | | | | | |
| 2623.00 | 39.96 | 40.37 | 43.18 | 18.0 | 61.20 | 67.76 | -6.56 | Pass |
| 2653.00 | 40.44 | 40.38 | 43.42 | 18.0 | 61.42 | 67.76 | -6.34 | Pass |
| 2683.00 | 40.32 | 39.58 | 42.98 | 18.0 | 60.99 | 67.76 | -6.77 | Pass |

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^[P(dBm, RF#2)/10]}
*** - See Table 7.2.11

MAXIMUM ANTENNA GAIN: 17 dBi

| Carrier frequency, MHz | Power Meter reading RF#1, dBm | Power Meter reading RF#2, dBm | Total RF power**, dBm | Antenna gain, dBi | Total EIRP*, dBm | Limit***, dBm | Margin, dB | Verdict |
|------------------------|-------------------------------|-------------------------------|-----------------------|-------------------|------------------|---------------|------------|---------|
| QPSK 4 Mbps | | | | | | | | |
| 2623.00 | 39.95 | 40.35 | 43.16 | 17.0 | 60.16 | 66.35 | -6.18 | Pass |
| 2653.00 | 40.39 | 40.37 | 43.39 | 17.0 | 60.39 | 66.34 | -5.95 | Pass |
| 2683.00 | 39.89 | 39.56 | 42.74 | 17.0 | 59.74 | 66.34 | -6.61 | Pass |
| 64QAM 14 Mbps | | | | | | | | |
| 2623.00 | 39.96 | 40.37 | 43.18 | 17.0 | 60.20 | 66.35 | -6.15 | Pass |
| 2653.00 | 40.44 | 40.38 | 43.42 | 17.0 | 60.42 | 66.34 | -5.92 | Pass |
| 2683.00 | 40.32 | 39.58 | 42.98 | 17.0 | 59.99 | 66.34 | -6.35 | Pass |

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^[P(dBm, RF#2)/10]}
*** - See Table 7.2.11



HERMON LABORATORIES

| | |
|--|-------------------------------|
| Test specification: Section 27.50(h), Peak output power | |
| Test procedure: Section 27.50(h) | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/2/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa |
| Relative Humidity: 39 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.2.3 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DUTY CYCLE: 59%
 EBW: 5 MHz
 TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
 MAXIMUM ANTENNA GAIN: 18 dBi

| Carrier frequency, MHz | Power Meter reading RF#1, dBm | Power Meter reading RF#2, dBm | Total RF power**, dBm | Antenna gain, dBi | Total EIRP*, dBm | Limit***, dBm | Margin, dB | Verdict |
|------------------------|-------------------------------|-------------------------------|-----------------------|-------------------|------------------|---------------|------------|---------|
| QPSK 7 Mbps | | | | | | | | |
| 2623.00 | 39.51 | 40.30 | 42.93 | 18.0 | 60.93 | 69.22 | -8.29 | Pass |
| 2653.00 | 39.93 | 40.36 | 43.16 | 18.0 | 61.18 | 69.22 | -8.04 | Pass |
| 2683.00 | 39.78 | 39.76 | 42.78 | 18.0 | 60.78 | 69.22 | -8.44 | Pass |
| 64QAM 23 Mbps | | | | | | | | |
| 2623.00 | 39.56 | 40.32 | 42.97 | 18.0 | 60.98 | 69.22 | -8.24 | Pass |
| 2653.00 | 39.96 | 40.42 | 43.21 | 18.0 | 61.21 | 69.22 | -8.01 | Pass |
| 2683.00 | 39.84 | 40.28 | 43.08 | 18.0 | 61.09 | 69.22 | -8.13 | Pass |

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
 ** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^([P(dBm, RF#2)/10]}
 *** - See Table 7.2.11

MAXIMUM ANTENNA GAIN: 17 dBi

| Carrier frequency, MHz | Power Meter reading RF#1, dBm | Power Meter reading RF#2, dBm | Total RF power**, dBm | Antenna gain, dBi | Total EIRP*, dBm | Limit***, dBm | Margin, dB | Verdict |
|------------------------|-------------------------------|-------------------------------|-----------------------|-------------------|------------------|---------------|------------|---------|
| QPSK 7 Mbps | | | | | | | | |
| 2623.00 | 39.51 | 40.3 | 42.93 | 17.0 | 59.93 | 67.81 | -7.88 | Pass |
| 2653.00 | 39.93 | 40.36 | 43.16 | 17.0 | 60.18 | 67.81 | -7.63 | Pass |
| 2683.00 | 39.78 | 39.76 | 42.78 | 17.0 | 59.78 | 67.81 | -8.03 | Pass |
| 64QAM 23 Mbps | | | | | | | | |
| 2623.00 | 39.56 | 40.32 | 42.97 | 17.0 | 59.98 | 67.81 | -7.83 | Pass |
| 2653.00 | 39.96 | 40.42 | 43.21 | 17.0 | 60.21 | 67.81 | -7.60 | Pass |
| 2683.00 | 39.84 | 40.28 | 43.08 | 17.0 | 60.09 | 67.81 | -7.72 | Pass |

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
 ** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^([P(dBm, RF#2)/10]}
 *** - See Table 7.2.11



| | |
|--|-------------------------------|
| Test specification: Section 27.50(h), Peak output power | |
| Test procedure: Section 27.50(h) | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/2/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa |
| Relative Humidity: 39 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.2.4 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATING SIGNAL: PRBS
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DUTY CYCLE: 59%
EBW: 7 MHz
TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
MAXIMUM ANTENNA GAIN: 18 dBi

| - Carrier frequency, MHz | Power Meter reading RF#1, dBm | Power Meter reading RF#2, dBm | Total RF power**, dBm | Antenna gain, dBi | Total EIRP*, dBm | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|-------------------------------|-------------------------------|-----------------------|-------------------|------------------|---------------|------------|---------|
| QPSK 8 Mbps | | | | | | | | |
| 2626.00 | 39.23 | 40.25 | 42.78 | 18.0 | 60.78 | 67.75 | -6.97 | Pass |
| 2656.00 | 39.64 | 40.23 | 42.96 | 18.0 | 60.97 | 67.75 | -6.78 | Pass |
| 2680.00 | 39.70 | 39.66 | 42.69 | 18.0 | 60.69 | 67.75 | -7.06 | Pass |
| 64QAM 28 Mbps | | | | | | | | |
| 2626.00 | 39.64 | 40.39 | 43.04 | 18.0 | 61.06 | 67.75 | -6.69 | Pass |
| 2656.00 | 39.73 | 40.29 | 43.03 | 18.0 | 61.03 | 67.75 | -6.72 | Pass |
| 2680.00 | 39.68 | 39.67 | 42.69 | 18.0 | 60.70 | 67.75 | -7.05 | Pass |

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^[P(dBm, RF#2)/10]}
*** - See Table 7.2.11

MAXIMUM ANTENNA GAIN: 17 dBi

| - Carrier frequency, MHz | Power Meter reading RF#1, dBm | Power Meter reading RF#2, dBm | Total RF power**, dBm | Antenna gain, dBi | Total EIRP*, dBm | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|-------------------------------|-------------------------------|-----------------------|-------------------|------------------|---------------|------------|---------|
| QPSK 8 Mbps | | | | | | | | |
| 2626.00 | 39.23 | 40.25 | 42.78 | 17.0 | 59.78 | 66.34 | -6.56 | Pass |
| 2656.00 | 39.64 | 40.23 | 42.96 | 17.0 | 59.97 | 66.34 | -6.37 | Pass |
| 2680.00 | 39.70 | 39.66 | 42.69 | 17.0 | 59.69 | 66.34 | -6.65 | Pass |
| 64QAM 28 Mbps | | | | | | | | |
| 2626.00 | 39.64 | 40.39 | 43.04 | 17.0 | 60.06 | 66.34 | -6.28 | Pass |
| 2656.00 | 39.73 | 40.29 | 43.03 | 17.0 | 60.03 | 66.34 | -6.31 | Pass |
| 2680.00 | 39.68 | 39.67 | 42.69 | 17.0 | 59.70 | 66.34 | -6.64 | Pass |

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi
** - Total RF power , dBm = 10 log{10^[P(dBm,RF#1)/10]+ 10^[P(dBm, RF#2)/10]}
*** - See Table 7.2.11



| | |
|--|-------------------------------|
| Test specification: Section 27.50(h), Peak output power | |
| Test procedure: Section 27.50(h) | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/2/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa |
| Relative Humidity: 39 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.2.5 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATING SIGNAL: PRBS
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DUTY CYCLE: 59%
EBW: 10 MHz
MAXIMUM ANTENNA GAIN: 18 dBi

| - Carrier frequency, MHz | Power Meter reading RF#1, dBm | Power Meter reading RF#2, dBm | Total RF power**, dBm | Antenna gain, dBi | Total EIRP*, dBm | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|-------------------------------|-------------------------------|-----------------------|-------------------|------------------|---------------|------------|---------|
| QPSK 13 Mbps | | | | | | | | |
| 2626.00 | 39.32 | 40.52 | 42.97 | 18.0 | 60.97 | 69.21 | -8.24 | Pass |
| 2656.00 | 39.74 | 40.51 | 43.15 | 18.0 | 61.17 | 69.23 | -8.07 | Pass |
| 2680.00 | 39.65 | 39.74 | 42.71 | 18.0 | 60.71 | 69.21 | -8.51 | Pass |
| 64QAM 46 Mbps | | | | | | | | |
| 2626.00 | 39.55 | 40.48 | 43.05 | 18.0 | 61.07 | 69.21 | -8.15 | Pass |
| 2656.00 | 39.71 | 40.52 | 43.14 | 18.0 | 61.14 | 69.23 | -8.09 | Pass |
| 2680.00 | 39.62 | 39.95 | 42.80 | 18.0 | 60.81 | 69.21 | -8.40 | Pass |

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi

** - Total RF power , dBm = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.11

MAXIMUM ANTENNA GAIN: 17 dBi

| - Carrier frequency, MHz | Power Meter reading RF#1, dBm | Power Meter reading RF#2, dBm | Total RF power**, dBm | Antenna gain, dBi | Total EIRP*, dBm | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|-------------------------------|-------------------------------|-----------------------|-------------------|------------------|---------------|------------|---------|
| QPSK 13 Mbps | | | | | | | | |
| 2626.00 | 39.32 | 40.52 | 42.97 | 17.0 | 59.97 | 67.81 | -7.83 | Pass |
| 2656.00 | 39.74 | 40.51 | 43.15 | 17.0 | 60.17 | 67.82 | -7.66 | Pass |
| 2680.00 | 39.65 | 39.74 | 42.71 | 17.0 | 59.71 | 67.81 | -8.10 | Pass |
| 64QAM 46 Mbps | | | | | | | | |
| 2626.00 | 39.55 | 40.48 | 43.05 | 17.0 | 60.07 | 67.81 | -7.74 | Pass |
| 2656.00 | 39.71 | 40.52 | 43.14 | 17.0 | 60.14 | 67.82 | -7.68 | Pass |
| 2680.00 | 39.62 | 39.95 | 42.80 | 17.0 | 59.81 | 67.81 | -7.99 | Pass |

* - EIRP total, dBm = Total RF power**, dBm + Antenna Gain, dBi

** - Total RF power , dBm = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.11

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|--|--|--|--|--|
| HL 3301 | HL 3302 | HL 3768 | | | | | |
|---------|---------|---------|--|--|--|--|--|

Full description is given in Appendix A.



| | |
|--|-------------------------------|
| Test specification: Section 27.50(h), Peak output power | |
| Test procedure: Section 27.50(h) | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/2/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa |
| Relative Humidity: 39 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.2.6 Power spectral density test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 1000 kHz
MODULATING SIGNAL: PRBS
CHANNEL BANDWIDTH: 3.5 MHz
TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
DUTY CYCLE: 100%
MAXIMUM ANTENNA GAIN: 18 dBi

| - Carrier frequency, MHz | SA reading, RF #1, dBm/100kHz | SA reading, RF #2, dBm/100kHz | SA reading PSD**, dBm/100kHz | Antenna gain, dBi | Total PSD*, dBm/100kHz | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|-------------------------------|-------------------------------|------------------------------|-------------------|------------------------|---------------|------------|---------|
| QPSK 4 Mbps | | | | | | | | |
| 2623.00 | 25.78 | 26.67 | 29.26 | 18.0 | 47.26 | 49.98 | -2.72 | Pass |
| 2653.00 | 26.23 | 26.65 | 29.46 | 18.0 | 47.46 | 49.97 | -2.52 | Pass |
| 2683.00 | 26.27 | 26.00 | 29.15 | 18.0 | 47.15 | 49.98 | -2.83 | Pass |
| 64QAM 14 Mbps | | | | | | | | |
| 2623.00 | 26.24 | 27.16 | 29.73 | 18.0 | 47.75 | 49.98 | -2.23 | Pass |
| 2653.00 | 26.81 | 27.14 | 29.99 | 18.0 | 47.99 | 49.97 | -1.99 | Pass |
| 2683.00 | 26.71 | 26.33 | 29.53 | 18.0 | 47.55 | 49.98 | -2.43 | Pass |

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

MAXIMUM ANTENNA GAIN: 17 dBi

| - Carrier frequency, MHz | SA reading, RF #1, dBm/100kHz | SA reading, RF #2, dBm/100kHz | SA reading PSD**, dBm/100kHz | Antenna gain, dBi | Total PSD*, dBm/100kHz | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|-------------------------------|-------------------------------|------------------------------|-------------------|------------------------|---------------|------------|---------|
| QPSK 4 Mbps | | | | | | | | |
| 2623.00 | 25.78 | 26.67 | 29.26 | 17.0 | 46.26 | 48.56 | -2.31 | Pass |
| 2653.00 | 26.23 | 26.65 | 29.46 | 17.0 | 46.46 | 48.56 | -2.11 | Pass |
| 2683.00 | 26.27 | 26.00 | 29.15 | 17.0 | 46.15 | 48.56 | -2.42 | Pass |
| 64QAM 14 Mbps | | | | | | | | |
| 2623.00 | 26.24 | 27.16 | 29.73 | 17.0 | 46.75 | 48.56 | -1.81 | Pass |
| 2653.00 | 26.81 | 27.14 | 29.99 | 17.0 | 46.99 | 48.56 | -1.57 | Pass |
| 2683.00 | 26.71 | 26.33 | 29.53 | 17.0 | 46.55 | 48.56 | -2.01 | Pass |

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.2.7 Power spectral density test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 1000 kHz
 MODULATING SIGNAL: PRBS
 CHANNEL BANDWIDTH: 5 MHz
 TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
 DUTY CYCLE: 100%
 MAXIMUM ANTENNA GAIN: 18 dBi

| - Carrier frequency, MHz | SA reading, RF #1, dBm/100kHz | SA reading, RF #2, dBm/100kHz | SA reading PSD**, dBm/100kHz | Antenna gain, dBi | Total PSD*, dBm/100kHz | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|-------------------------------|-------------------------------|------------------------------|-------------------|------------------------|---------------|------------|---------|
| QPSK 7 Mbps | | | | | | | | |
| 2623.00 | 23.64 | 24.31 | 27.00 | 18.0 | 45.00 | 51.44 | -6.44 | Pass |
| 2653.00 | 24.12 | 24.42 | 27.28 | 18.0 | 45.30 | 51.44 | -6.14 | Pass |
| 2683.00 | 23.86 | 23.82 | 26.85 | 18.0 | 44.85 | 51.44 | -6.59 | Pass |
| 64QAM 23 Mbps | | | | | | | | |
| 2623.00 | 23.83 | 24.46 | 27.17 | 18.0 | 45.18 | 51.44 | -6.25 | Pass |
| 2653.00 | 24.10 | 24.53 | 27.33 | 18.0 | 45.33 | 51.44 | -6.11 | Pass |
| 2683.00 | 24.05 | 23.76 | 26.92 | 18.0 | 44.93 | 51.44 | -6.50 | Pass |

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

MAXIMUM ANTENNA GAIN: 17 dBi

| - Carrier frequency, MHz | SA reading, RF #1, dBm/100kHz | SA reading, RF #2, dBm/100kHz | SA reading PSD**, dBm/100kHz | Antenna gain, dBi | Total PSD*, dBm/100kHz | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|-------------------------------|-------------------------------|------------------------------|-------------------|------------------------|---------------|------------|---------|
| QPSK 7 Mbps | | | | | | | | |
| 2623.00 | 27.00 | 27.00 | 27.00 | 17.0 | 44.00 | 50.03 | -6.03 | Pass |
| 2653.00 | 27.28 | 27.28 | 27.28 | 17.0 | 44.30 | 50.03 | -5.73 | Pass |
| 2683.00 | 26.85 | 26.85 | 26.85 | 17.0 | 43.85 | 50.03 | -6.18 | Pass |
| 64QAM 23 Mbps | | | | | | | | |
| 2623.00 | 23.83 | 24.46 | 27.17 | 17.0 | 44.18 | 50.03 | -5.85 | Pass |
| 2653.00 | 24.1 | 24.53 | 27.33 | 17.0 | 44.33 | 50.03 | -5.70 | Pass |
| 2683.00 | 24.05 | 23.76 | 26.92 | 17.0 | 43.93 | 50.03 | -6.09 | Pass |

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.2.8 Power spectral density test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 1000 kHz
MODULATING SIGNAL: PRBS
CHANNEL BANDWIDTH: 7 MHz
TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
DUTY CYCLE: 100%
MAXIMUM ANTENNA GAIN: 18 dBi

| - Carrier frequency, MHz | SA reading, RF #1, dBm/100kHz | SA reading, RF #2, dBm/100kHz | SA reading PSD**, dBm/100kHz | Antenna gain, dBi | Total PSD*, dBm/100kHz | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|-------------------------------|-------------------------------|------------------------------|-------------------|------------------------|---------------|------------|---------|
| QPSK 8 Mbps | | | | | | | | |
| 2626.00 | 23.14 | 23.97 | 26.59 | 18.0 | 44.59 | 46.95 | -2.37 | Pass |
| 2656.00 | 23.58 | 23.94 | 26.77 | 18.0 | 44.79 | 46.96 | -2.17 | Pass |
| 2680.00 | 23.52 | 23.19 | 26.37 | 18.0 | 44.37 | 46.96 | -2.59 | Pass |
| 64QAM 28 Mbps | | | | | | | | |
| 2626.00 | 23.02 | 23.94 | 26.51 | 18.0 | 44.53 | 46.95 | -2.42 | Pass |
| 2656.00 | 23.53 | 23.81 | 26.68 | 18.0 | 44.68 | 46.96 | -2.27 | Pass |
| 2680.00 | 23.41 | 23.34 | 26.39 | 18.0 | 44.40 | 46.96 | -2.55 | Pass |

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12

MAXIMUM ANTENNA GAIN: 17 dBi

| - Carrier frequency, MHz | SA reading, RF #1, dBm/100kHz | SA reading, RF #2, dBm/100kHz | SA reading PSD**, dBm/100kHz | Antenna gain, dBi | Total PSD*, dBm/100kHz | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|-------------------------------|-------------------------------|------------------------------|-------------------|------------------------|---------------|------------|---------|
| QPSK 8 Mbps | | | | | | | | |
| 2626.00 | 23.14 | 23.97 | 26.59 | 17.0 | 43.59 | 45.54 | -1.96 | Pass |
| 2656.00 | 23.58 | 23.94 | 26.77 | 17.0 | 43.79 | 45.55 | -1.76 | Pass |
| 2680.00 | 23.52 | 23.19 | 26.37 | 17.0 | 43.37 | 45.55 | -2.18 | Pass |
| 64QAM 28 Mbps | | | | | | | | |
| 2626.00 | 23.02 | 23.94 | 26.51 | 17.0 | 43.53 | 45.54 | -2.01 | Pass |
| 2656.00 | 23.53 | 23.81 | 26.68 | 17.0 | 43.68 | 45.55 | -1.86 | Pass |
| 2680.00 | 23.41 | 23.34 | 26.39 | 17.0 | 43.40 | 45.55 | -2.14 | Pass |

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi

** - SA reading, dBm/100kHz = $10 \log\{10^{[P(\text{dBm}, \text{RF}\#1)/10]} + 10^{[P(\text{dBm}, \text{RF}\#2)/10]}\}$

*** - See Table 7.2.12



| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.2.9 Power spectral density test results

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATING SIGNAL: PRBS
 CHANNEL BANDWIDTH: 10 MHz
 TRANSMITTER OUTPUT POWER SETTINGS: 40 dBm
 DUTY CYCLE: 100%
 MAXIMUM ANTENNA GAIN: 18 dBi

| - Carrier frequency, MHz | SA reading, RF #1 dBm/100kHz | SA reading, RF #2 dBm/100kHz | SA reading PSD**, dBm/100kHz | Antenna gain, dBi | Total PSD*, dBm/100kHz | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|------------------------------|------------------------------|------------------------------|-------------------|------------------------|---------------|------------|---------|
| QPSK 14 Mbps | | | | | | | | |
| 2626.00 | 21.31 | 21.86 | 24.60 | 18.0 | 42.60 | 48.42 | -5.82 | Pass |
| 2656.00 | 21.75 | 21.66 | 24.72 | 18.0 | 42.73 | 48.44 | -5.71 | Pass |
| 2680.00 | 21.57 | 21.33 | 24.46 | 18.0 | 42.46 | 48.42 | -5.96 | Pass |
| 64QAM 46 Mbps | | | | | | | | |
| 2626.00 | 21.24 | 21.71 | 24.49 | 18.0 | 42.51 | 48.42 | -5.92 | Pass |
| 2656.00 | 21.65 | 21.73 | 24.70 | 18.0 | 42.70 | 48.44 | -5.74 | Pass |
| 2680.00 | 21.41 | 21.02 | 24.23 | 18.0 | 42.25 | 48.42 | -6.18 | Pass |

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi
 ** - SA reading, dBm/100kHz = 10 log{10^[P(dBm,RF#1)/10]+ 10^[P(dBm, RF#2)/10]}
 *** - See Table 7.2.12

MAXIMUM ANTENNA GAIN: 17 dBi

| - Carrier frequency, MHz | SA reading, RF #1 dBm/100kHz | SA reading, RF #2 dBm/100kHz | SA reading PSD**, dBm/100kHz | Antenna gain, dBi | Total PSD*, dBm/100kHz | Limit***, dBm | Margin, dB | Verdict |
|--------------------------|------------------------------|------------------------------|------------------------------|-------------------|------------------------|---------------|------------|---------|
| QPSK 14 Mbps | | | | | | | | |
| 2626.00 | 21.31 | 21.86 | 24.60 | 17.0 | 41.60 | 47.01 | -5.41 | Pass |
| 2656.00 | 21.75 | 21.66 | 24.72 | 17.0 | 41.73 | 47.03 | -5.30 | Pass |
| 2680.00 | 21.57 | 21.33 | 24.46 | 17.0 | 41.46 | 47.01 | -5.55 | Pass |
| 64QAM 46 Mbps | | | | | | | | |
| 2626.00 | 21.24 | 21.71 | 24.49 | 17.0 | 41.51 | 47.01 | -5.51 | Pass |
| 2656.00 | 21.65 | 21.73 | 24.70 | 17.0 | 41.70 | 47.03 | -5.33 | Pass |
| 2680.00 | 21.41 | 21.02 | 24.23 | 17.0 | 41.25 | 47.01 | -5.77 | Pass |

* - Total PSD, dBm/100kHz = SA reading***, dBm/100kHz + Antenna Gain, dBi
 ** - SA reading, dBm/100kHz = 10 log{10^[P(dBm,RF#1)/10]+ 10^[P(dBm, RF#2)/10]}
 *** - See Table 7.2.12

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|--|--|--|--|
| HL 2909 | HL 3437 | HL 3442 | HL 3559 | | | | |
|---------|---------|---------|---------|--|--|--|--|

Full description is given in Appendix A.



| | |
|--|-------------------------------|
| Test specification: Section 27.50(h), Peak output power | |
| Test procedure: Section 27.50(h) | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/2/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa |
| Relative Humidity: 39 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.2.10 Pre-transition frequency channels assignment

| Channel | Channel BW, MHz | Peak power limit, dBm | Power density limit, dBm/100kHz |
|---|-----------------|---|---------------------------------|
| 3.5 MHz Single Channel | | | |
| 2623 MHz: BRS Ch. E3 | 3234.7 | 63+10log(OBW/6.0)+10log(360/beamwidth) | EIRP+10log(0.1/6.0) |
| 2653.0 MHz: BRS Ch. H1 | 3234.6 | 63+10log(OBW/6.0)+10log(360/beamwidth) | EIRP+10log(0.1/6.0) |
| 2683 MHz: EBS Ch. G4 | 3234.4 | 63+10log(OBW/6.0)+10log(360/beamwidth) | EIRP+10log(0.1/6.0) |
| 5 MHz Single Channel | | | |
| 2623 MHz: BRS Ch. E3 | 4551.8 | 63+10log(OBW/6.0)+10log(360/beamwidth) | EIRP+10log(0.1/6.0) |
| 2653.0 MHz: BRS Ch. H1 | 4551.0 | 63+10log(OBW/6.0)+10log(360/beamwidth) | EIRP+10log(0.1/6.0) |
| 2683 MHz: EBS Ch. G4 | 4551.9 | 63+10log(OBW/6.0)+10log(360/beamwidth) | EIRP+10log(0.1/6.0) |
| 7 MHz Dual Channel | | | |
| 2626.0 MHz BRS Ch.E3+ BRS Ch. F3 | 6421.9 | 63+10log(OBW/12.0)+10log(360/beamwidth) | EIRP+10log(0.1/12.0) |
| 2656.0 MHz BRS Ch.H1+ EBS Ch. G2 | 6423.2 | 63+10log(OBW/12.0)+10log(360/beamwidth) | EIRP+10log(0.1/12.0) |
| 2680.0 MHz BRS Ch.H3+ EBS Ch. G4 | 6422.1 | 63+10log(OBW/12.0)+10log(360/beamwidth) | EIRP+10log(0.1/12.0) |
| 10 MHz Dual Channel | | | |
| 2626.0 MHz BRS Ch.E3+ BRS Ch. F3 | 9084.1 | 63+10log(OBW/12.0)+10log(360/beamwidth) | EIRP+10log(0.1/12.0) |
| 2656.0 MHz BRS Ch.H1+ EBS Ch. G2 | 9034.2 | 63+10log(OBW/12.0)+10log(360/beamwidth) | EIRP+10log(0.1/12.0) |
| 2680.0 MHz BRS Ch.H3+ EBS Ch. G4 | 9033.2 | 63+10log(OBW/12.0)+10log(360/beamwidth) | EIRP+10log(0.1/12.0) |



| | |
|--|-------------------------------|
| Test specification: Section 27.50(h), Peak output power | |
| Test procedure: Section 27.50(h) | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/2/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa |
| Relative Humidity: 39 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.2.11 EIRP limits

| Channel | Channel BW, MHz | Peak power limit, dBm | |
|--|-----------------|-----------------------|-----------------------|
| | | 17 dBi, 90° beamwidth | 18 dBi, 65° beamwidth |
| 3.5 MHz Single Channel | | | |
| 2623 MHz: BRS Ch. E3 | 6.0 | 66.34 | 67.75 |
| 2653.0 MHz: BRS Ch. H1 | 6.0 | 66.34 | 67.75 |
| 2683 MHz: EBS Ch. G4 | 6.0 | 66.34 | 67.75 |
| 5 MHz Single Channel | | | |
| 2623 MHz: BRS Ch. E3 | 6.0 | 67.82 | 69.23 |
| 2653.0 MHz: BRS Ch. H1 | 6.0 | 67.82 | 69.23 |
| 2683 MHz: EBS Ch. G4 | 6.0 | 67.82 | 69.23 |
| 7 MHz Dual Channel | | | |
| 2626.0 MHz BRS Ch. E3+ BRS Ch. F3 | 12.0 | 66.31 | 67.71 |
| 2656.0 MHz BRS Ch. H1+ EBS Ch. G2 | 12.0 | 66.31 | 67.72 |
| 2680.0 MHz BRS Ch. H3+ EBS Ch. G4 | 12.0 | 66.31 | 67.71 |
| 10 MHz Dual Channel | | | |
| 2626.0 MHz BRS Ch. E3+ BRS Ch. F3 | 12.0 | 67.81 | 69.22 |
| 2656.0 MHz BRS Ch. H1+ EBS Ch. G2 | 12.0 | 67.79 | 69.20 |
| 2680.0 MHz BRS Ch. H3+ EBS Ch. G4 | 12.0 | 67.79 | 69.20 |


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.2.12 Peak power density limits


| Channel | Channel BW, MHz | Peak power density, dBm/100kHz | |
|---|-----------------|--------------------------------|-----------------------|
| | | 17 dBi, 90° beamwidth | 18 dBi, 65° beamwidth |
| 3.5 MHz Single Channel | | | |
| 2623 MHz: BRS Ch. E3 | 6.0 | 48.56 | 49.97 |
| 2653.0 MHz: BRS Ch. H1 | 6.0 | 48.56 | 49.97 |
| 2683 MHz: EBS Ch. G4 | 6.0 | 48.56 | 49.97 |
| 5 MHz Single Channel | | | |
| 2623 MHz: BRS Ch. E3 | 6.0 | 50.04 | 51.45 |
| 2653.0 MHz: BRS Ch. H1 | 6.0 | 50.04 | 51.45 |
| 2683 MHz: EBS Ch. G4 | 6.0 | 50.04 | 51.45 |
| 7 MHz Dual Channel | | | |
| 2626.0 MHz BRS Ch.E3+ BRS Ch. F3 | 12.0 | 45.51 | 46.92 |
| 2656.0 MHz BRS Ch.H1+ EBS Ch. G2 | 12.0 | 45.51 | 46.92 |
| 2680.0 MHz BRS Ch.H3+ EBS Ch. G4 | 12.0 | 45.51 | 46.92 |
| 10 MHz Dual Channel | | | |
| 2626.0 MHz BRS Ch.E3+ BRS Ch. F3 | 12.0 | 47.02 | 48.43 |
| 2656.0 MHz BRS Ch.H1+ EBS Ch. G2 | 12.0 | 47.00 | 48.41 |
| 2680.0 MHz BRS Ch.H3+ EBS Ch. G4 | 12.0 | 47.00 | 48.40 |

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.1 Power spectral density test results at low frequency, QPSK, 3.5 MHz EBW, Antenna 1

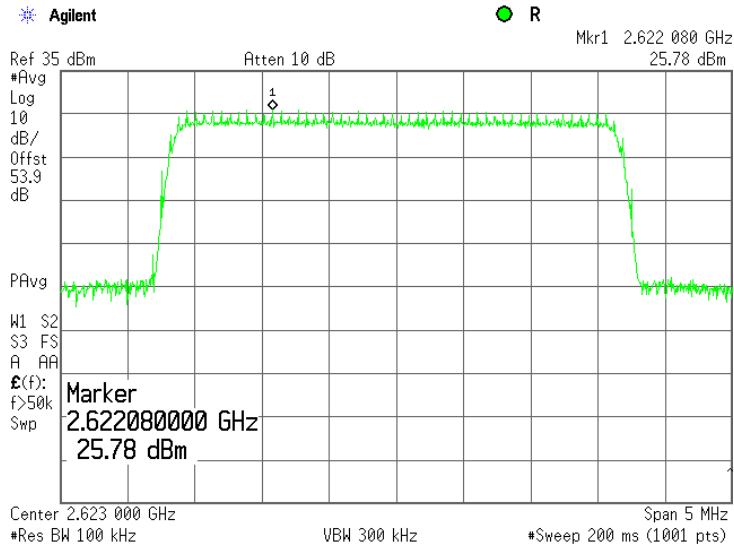


Plot 7.2.2 Power spectral density test results at mid frequency, QPSK, 3.5 MHz EBW

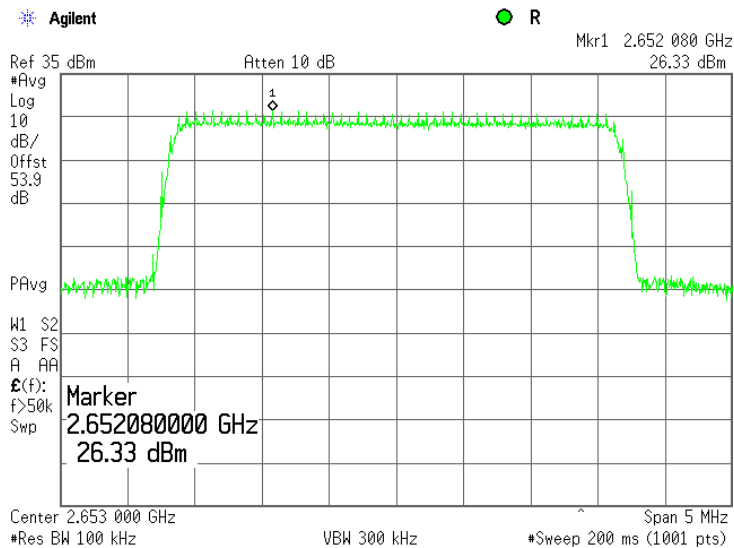


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.3 Power spectral density test results at high frequency, QPSK, 3.5 MHz EBW

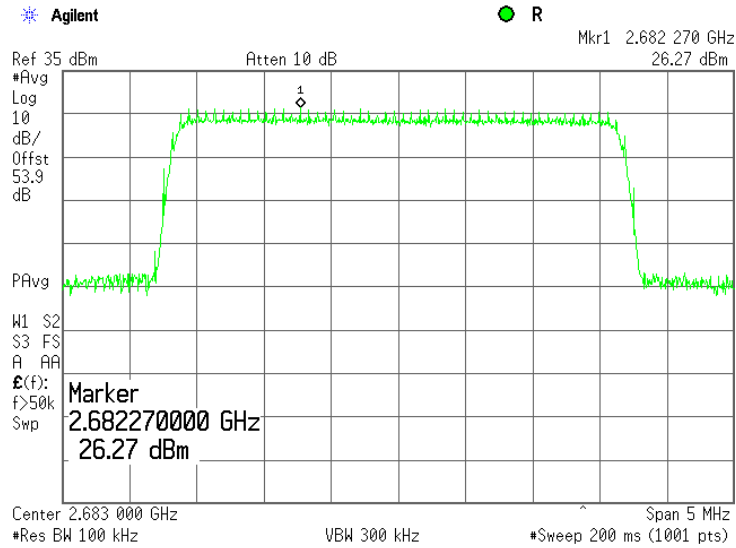


Plot 7.2.4 Power spectral density test results at low frequency, 64QAM, 3.5 MHz EBW

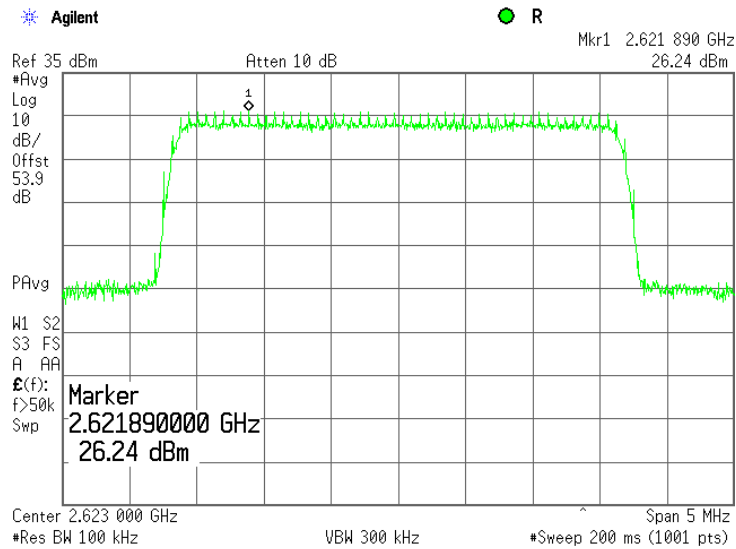


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.5 Power spectral density test results at mid frequency, 64QAM, 3.5 MHz EBW

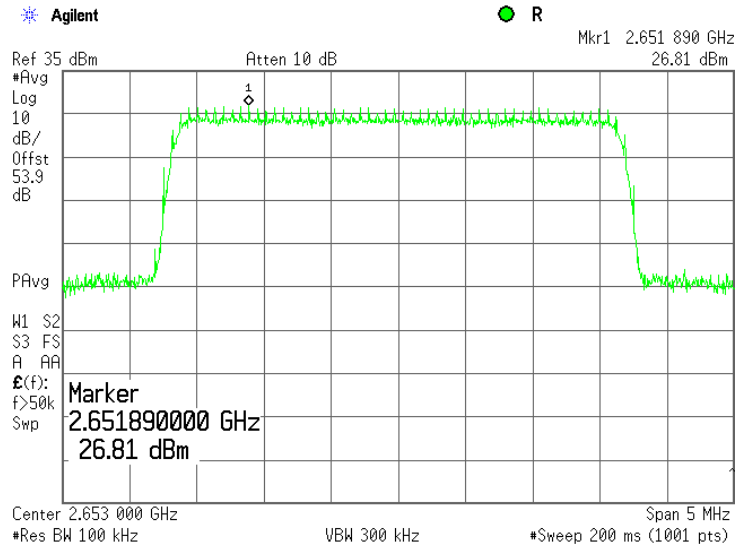


Plot 7.2.6 Power spectral density test results at high frequency, 64QAM, 3.5 MHz EBW

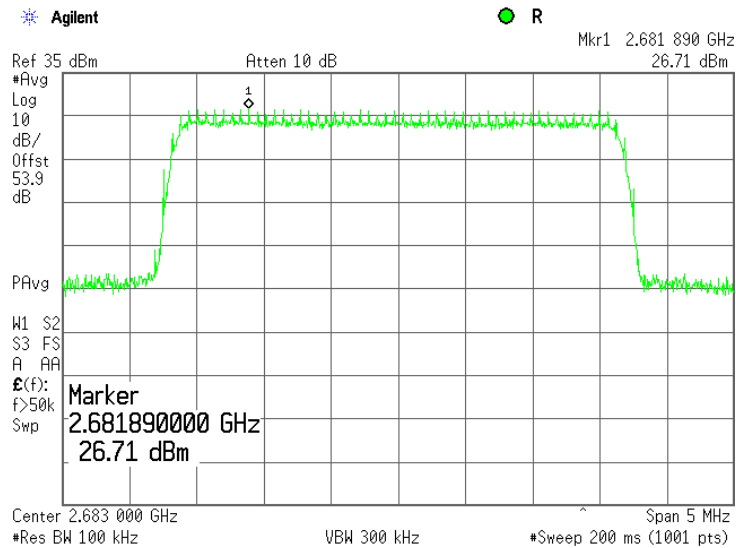


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.7 Power spectral density test results at low frequency, QPSK, 3.5 MHz EBW, Antenna 2

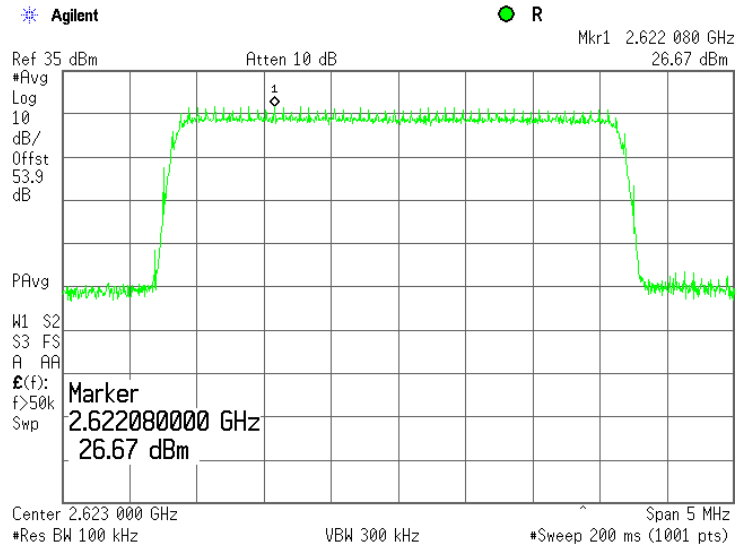


Plot 7.2.8 Power spectral density test results at mid frequency, QPSK, 3.5 MHz EBW, Antenna 2

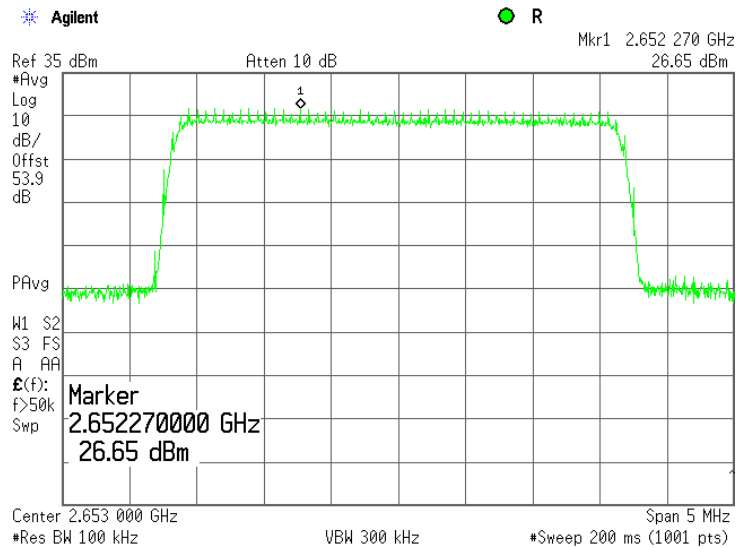


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.9 Power spectral density test results at high frequency, QPSK, 3.5 MHz EBW, Antenna 2

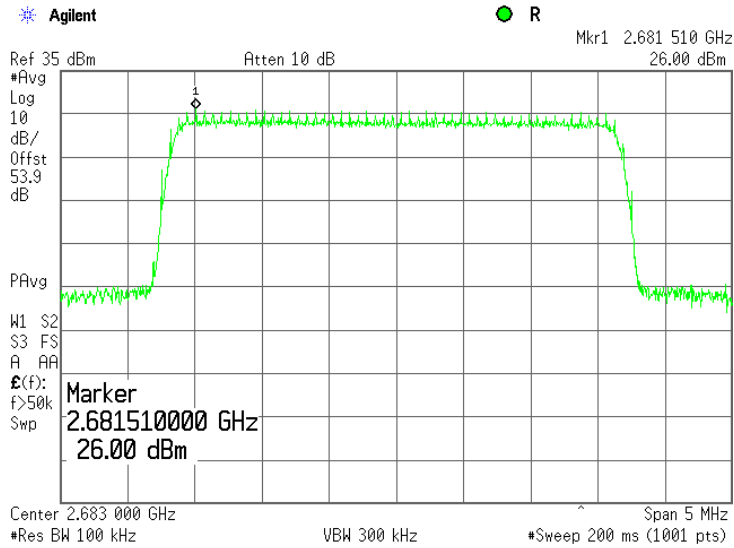


Plot 7.2.10 Power spectral density test results at low frequency, 64QAM, 3.5 MHz EBW, Antenna 2

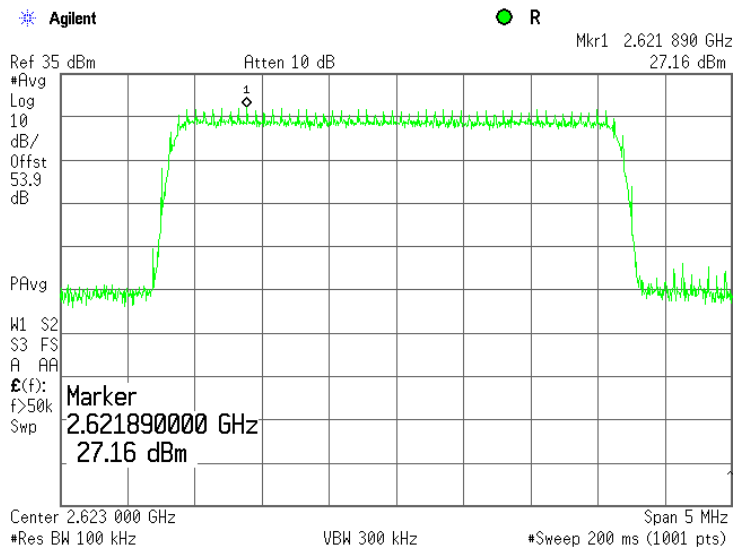


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.11 Power spectral density test results at mid frequency, 64QAM, 3.5 MHz EBW, Antenna 2

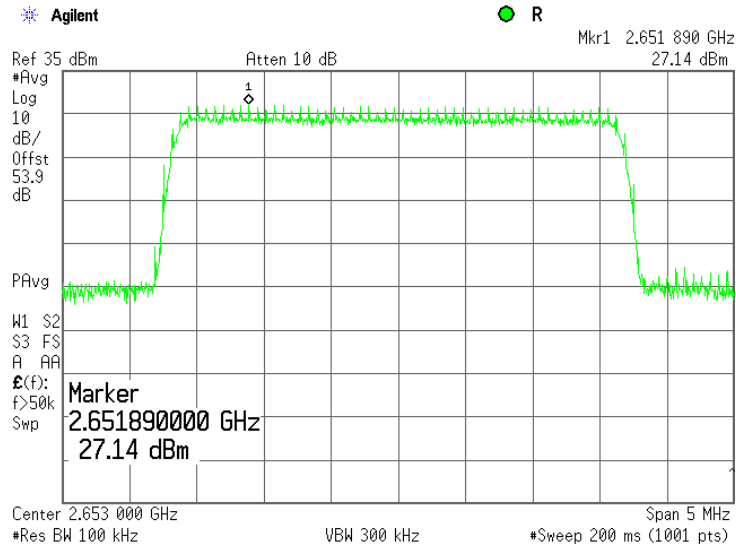


Plot 7.2.12 Power spectral density test results at high frequency, 64QAM, 3.5 MHz EBW, Antenna 2

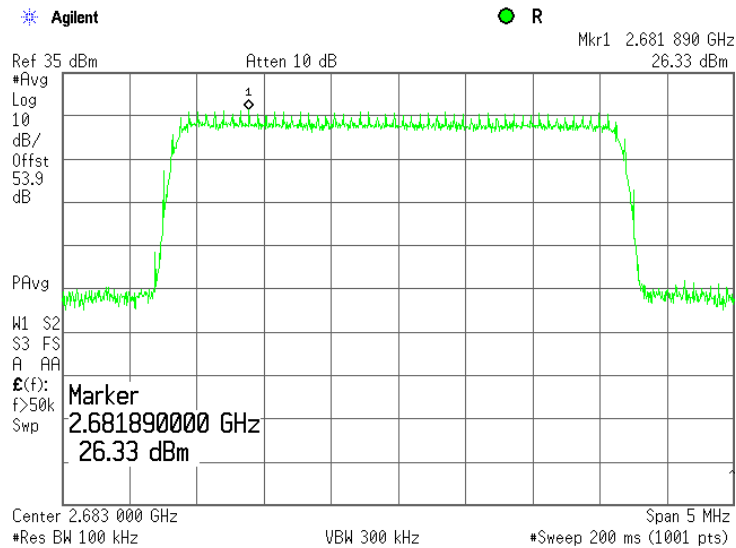


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.13 Power spectral density test results at low frequency, QPSK, 5 MHz EBW, Antenna 1

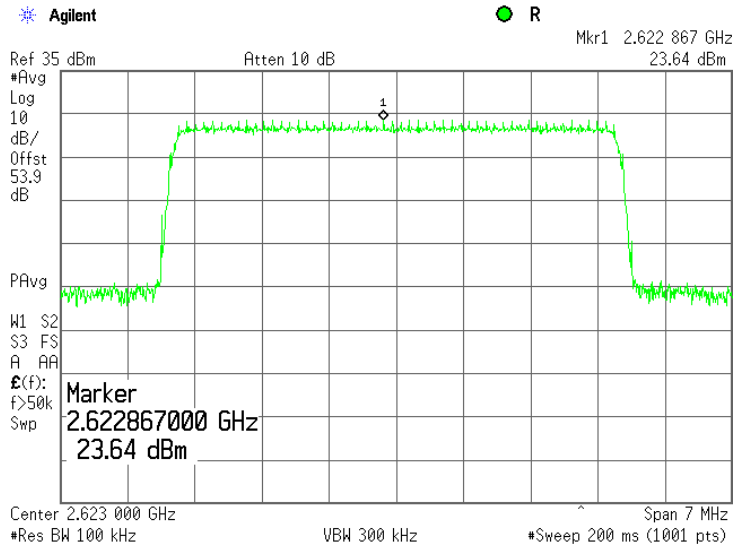


Plot 7.2.14 Power spectral density test results at mid frequency, QPSK, 5 MHz EBW, Antenna 1

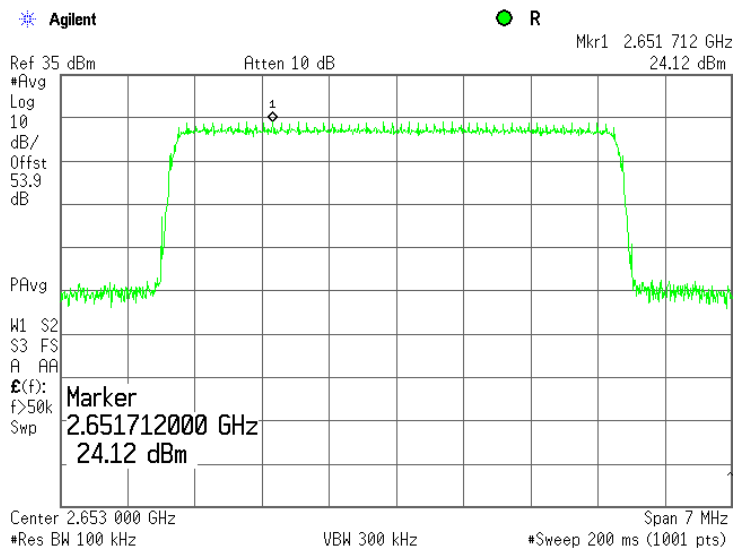


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.15 Power spectral density test results at high frequency, QPSK, 5 MHz EBW, Antenna 1

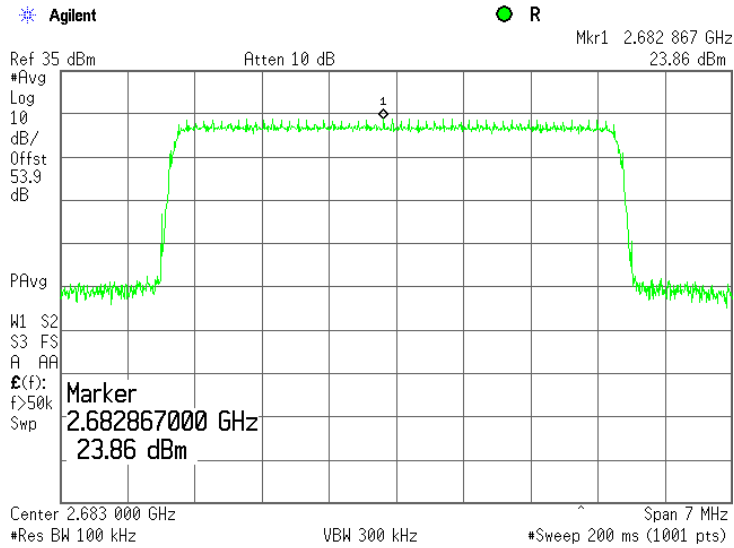


Plot 7.2.16 Power spectral density test results at low frequency, 64QAM, 5 MHz EBW, Antenna 1

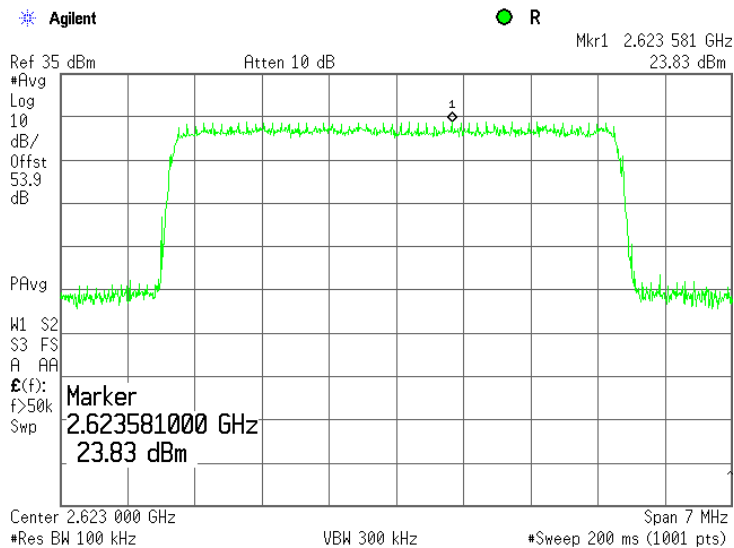


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.17 Power spectral density test results at mid frequency, 64QAM, 5 MHz EBW, Antenna 1

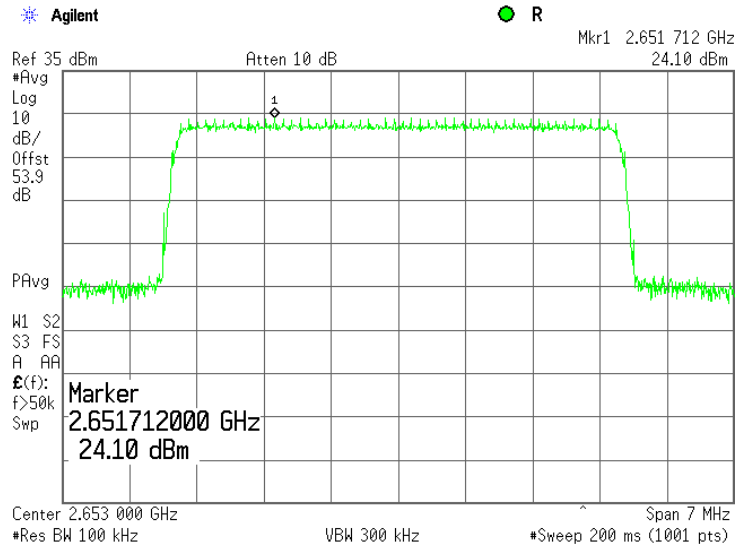


Plot 7.2.18 Power spectral density test results at high frequency, 64QAM, 5 MHz EBW, Antenna 1

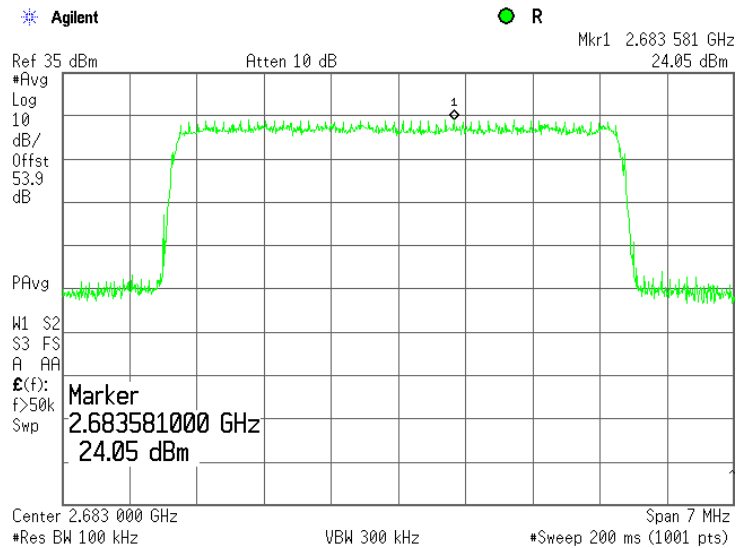


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.19 Power spectral density test results at low frequency, QPSK, 5 MHz EBW, Antenna 2

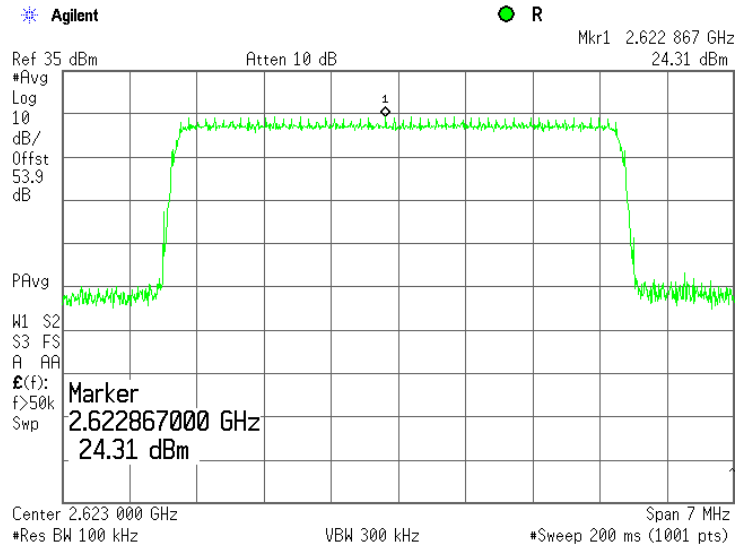


Plot 7.2.20 Power spectral density test results at mid frequency, QPSK, 5 MHz EBW, Antenna 2

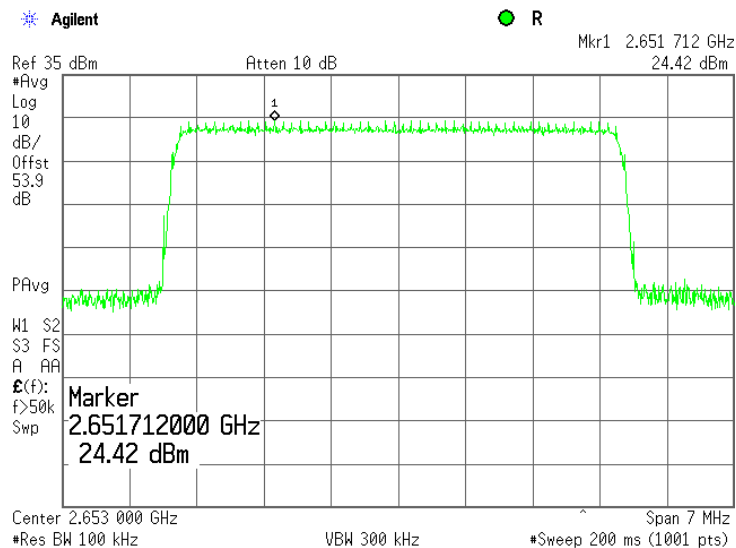


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.21 Power spectral density test results at high frequency, QPSK, 5 MHz EBW, Antenna 2

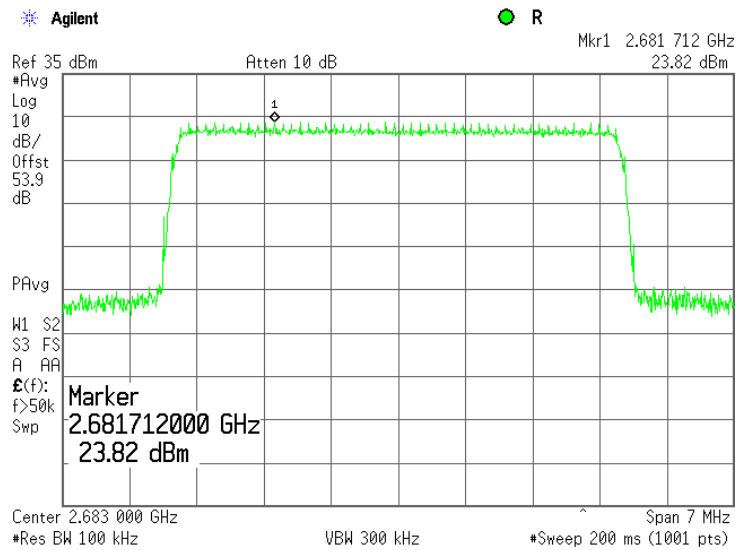


Plot 7.2.22 Power spectral density test results at low frequency, 64QAM, 5 MHz EBW, Antenna 2

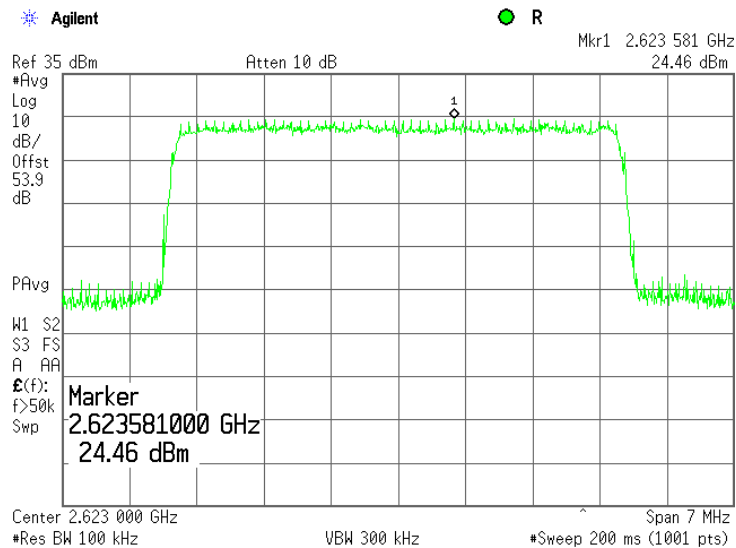


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.23 Power spectral density test results at mid frequency, 64QAM, 5 MHz EBW, Antenna 2

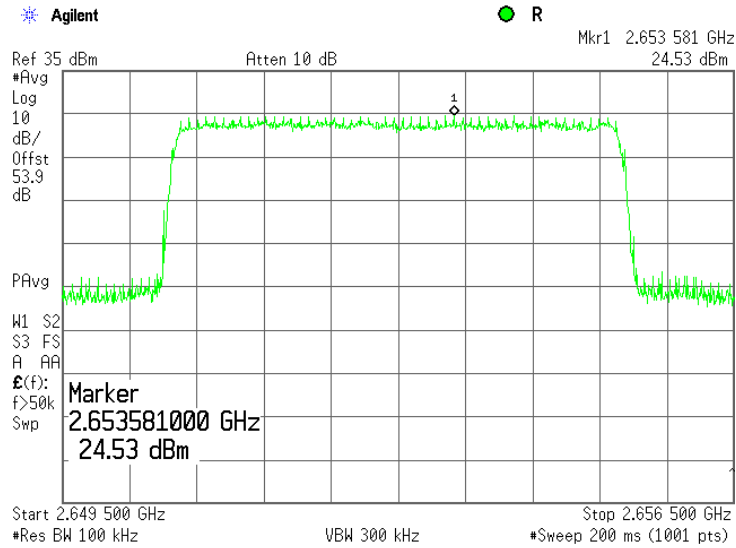


Plot 7.2.24 Power spectral density test results at high frequency, 64QAM, 5 MHz EBW, Antenna 2

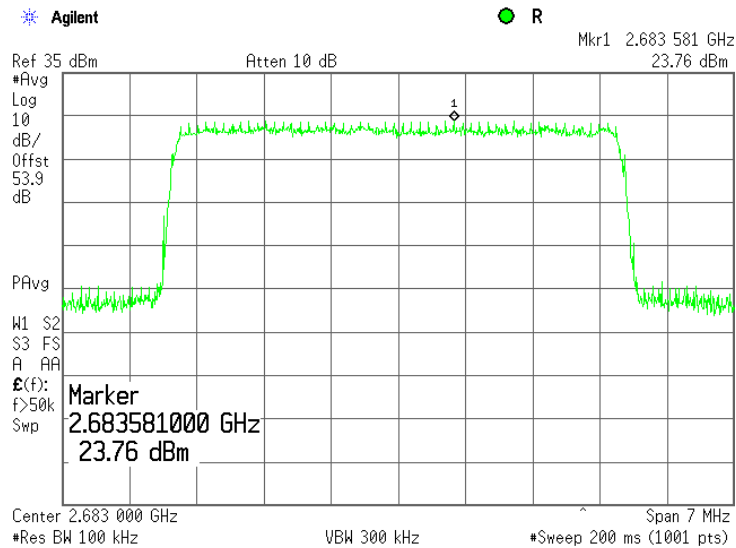


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.25 Power spectral density test results at low frequency, QPSK, 7 MHz EBW, Antenna 1

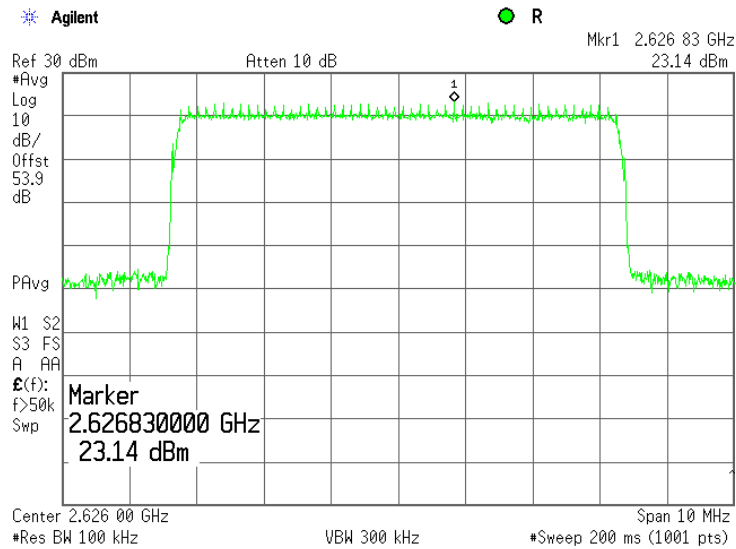


Plot 7.2.26 Power spectral density test results at mid frequency, QPSK, 7 MHz EBW, Antenna 1

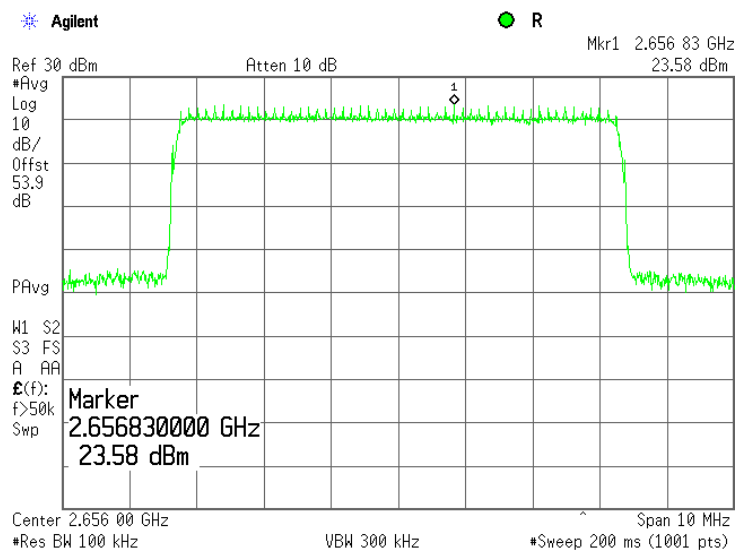


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.27 Power spectral density test results at high frequency, QPSK, 7 MHz EBW, Antenna 1

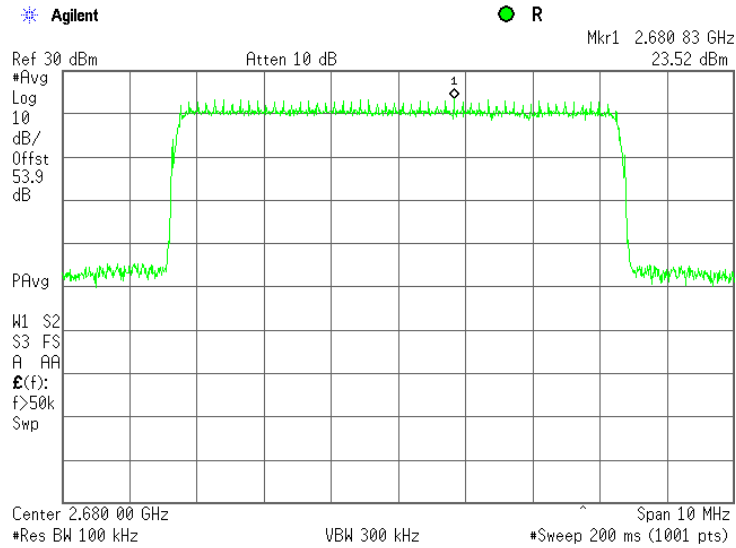


Plot 7.2.28 Power spectral density test results at low frequency, 64QAM, 7 MHz EBW, Antenna 1

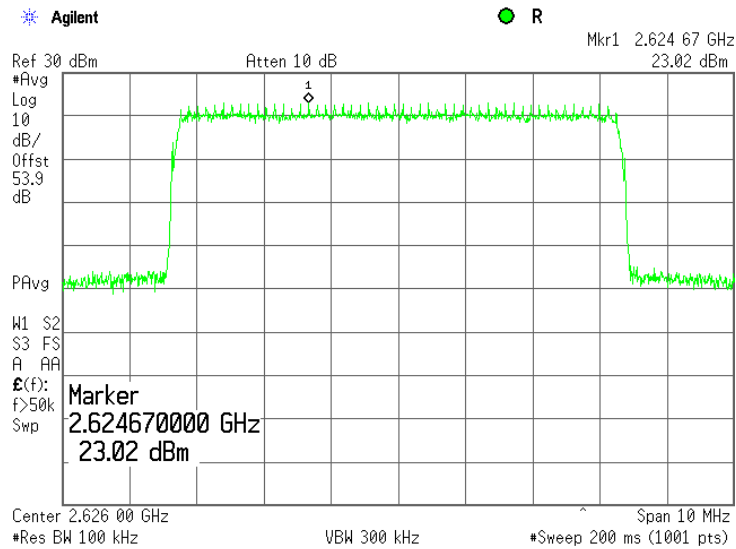


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.29 Power spectral density test results at mid frequency, 64QAM, 7 MHz EBW, Antenna 1

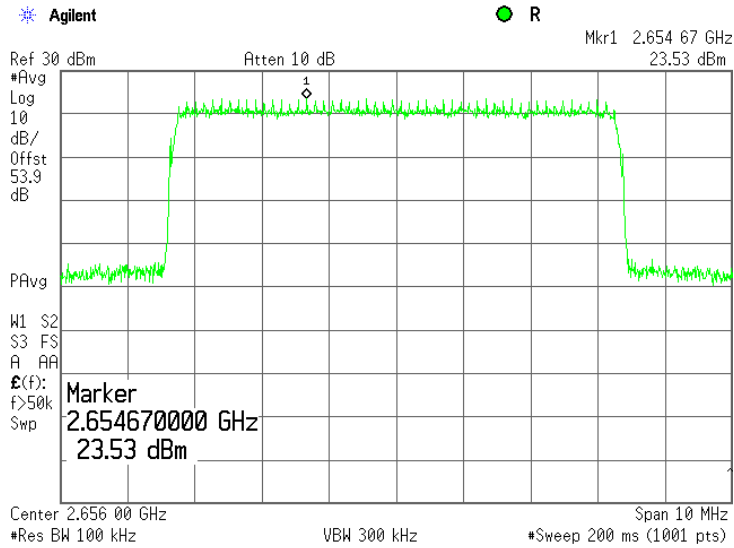


Plot 7.2.30 Power spectral density test results at high frequency, 64QAM, 7 MHz EBW, Antenna 1

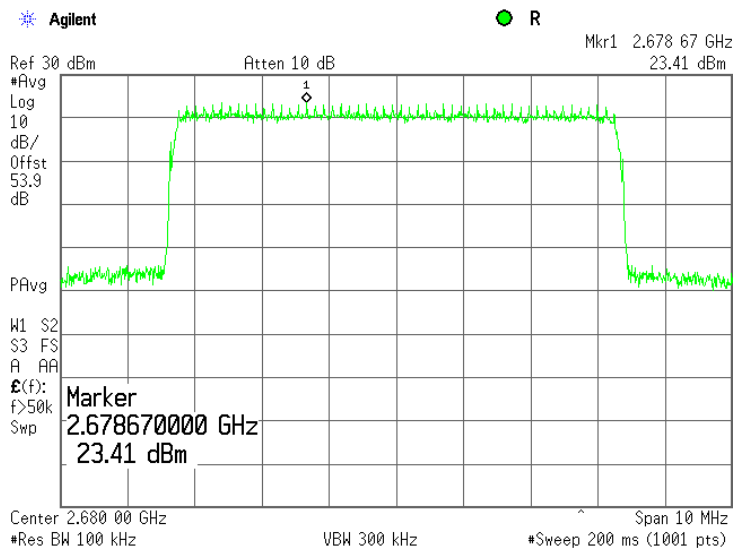


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.31 Power spectral density test results at low frequency, QPSK, 7 MHz EBW, Antenna 2

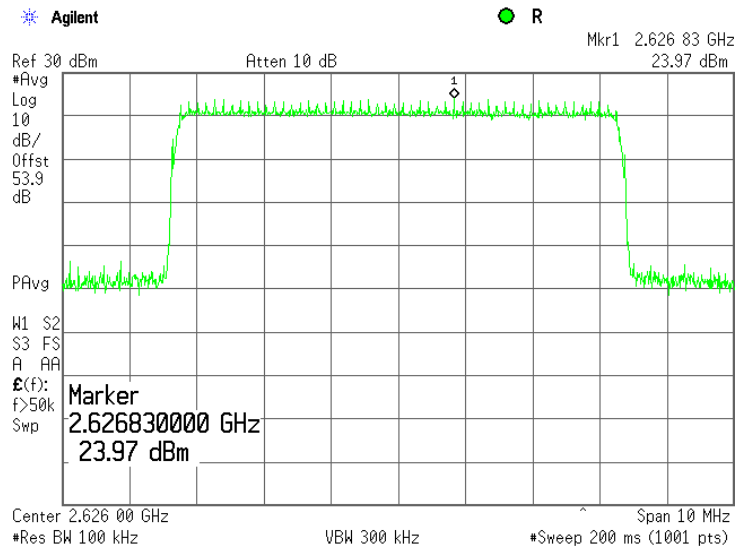


Plot 7.2.32 Power spectral density test results at mid frequency, QPSK, 7 MHz EBW, Antenna 2

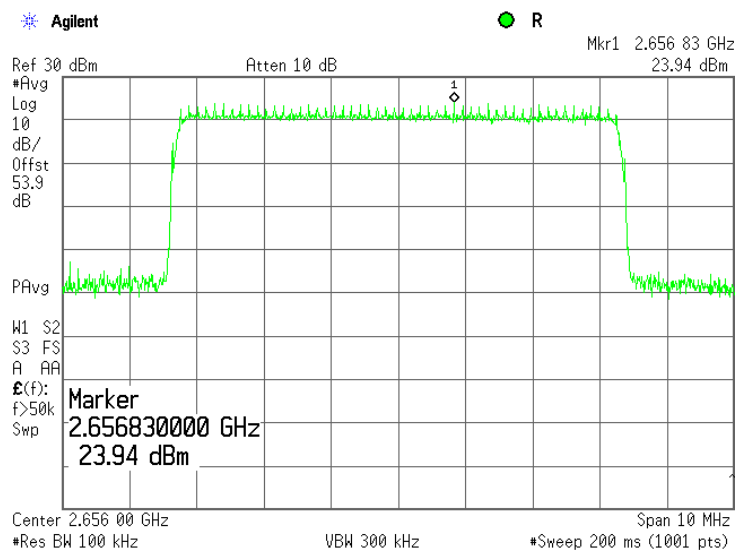


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.33 Power spectral density test results at high frequency, QPSK, 7 MHz EBW, Antenna 2

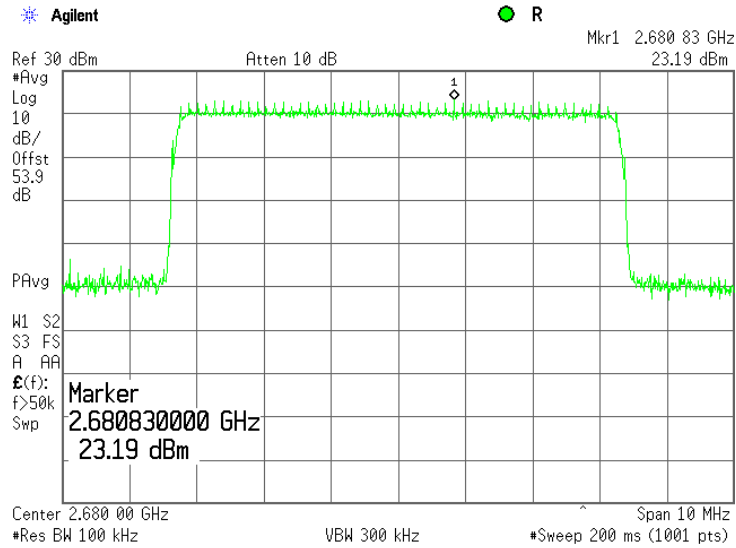


Plot 7.2.34 Power spectral density test results at low frequency, 64QAM, 7 MHz EBW, Antenna 2

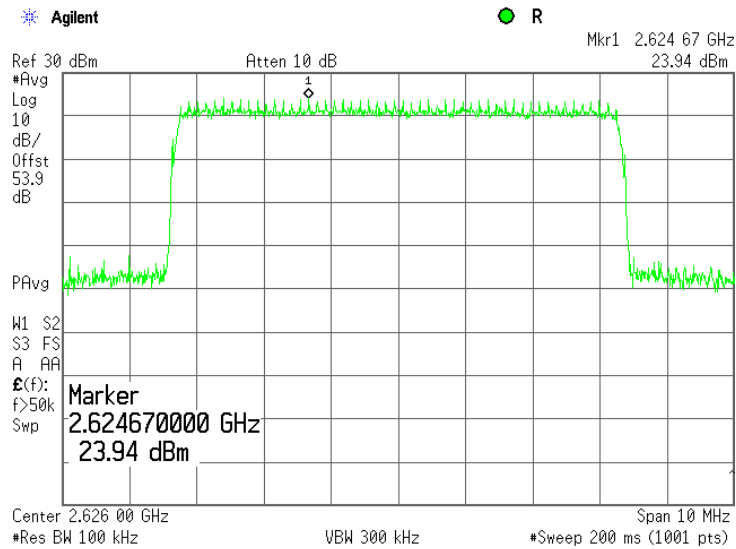


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.35 Power spectral density test results at mid frequency, 64QAM, 7 MHz EBW, Antenna 2

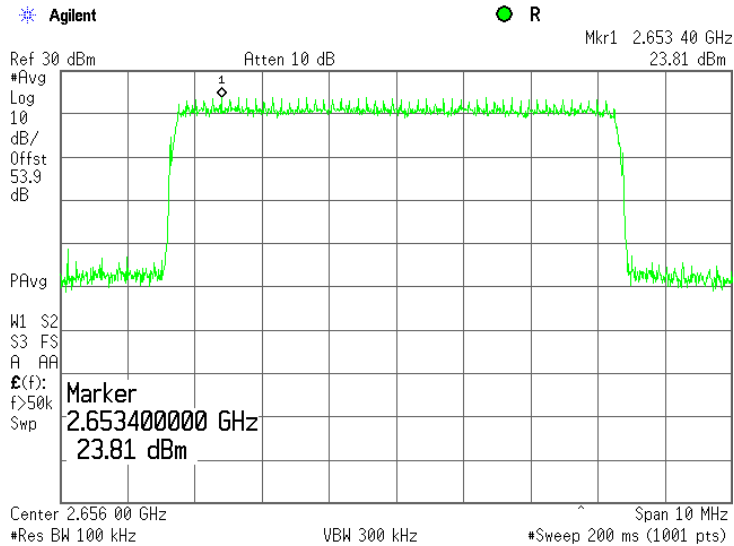


Plot 7.2.36 Power spectral density test results at high frequency, 64QAM, 7 MHz EBW, Antenna 2

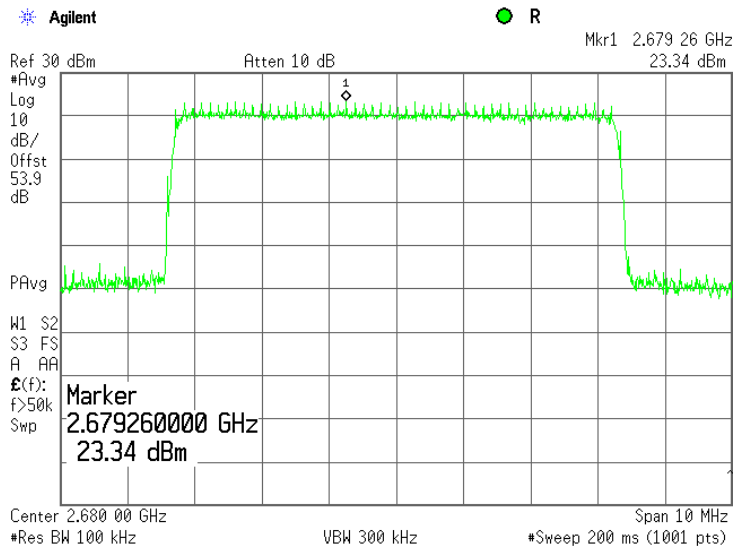


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.37 Power spectral density test results at low frequency, QPSK, 10 MHz EBW, Antenna 1

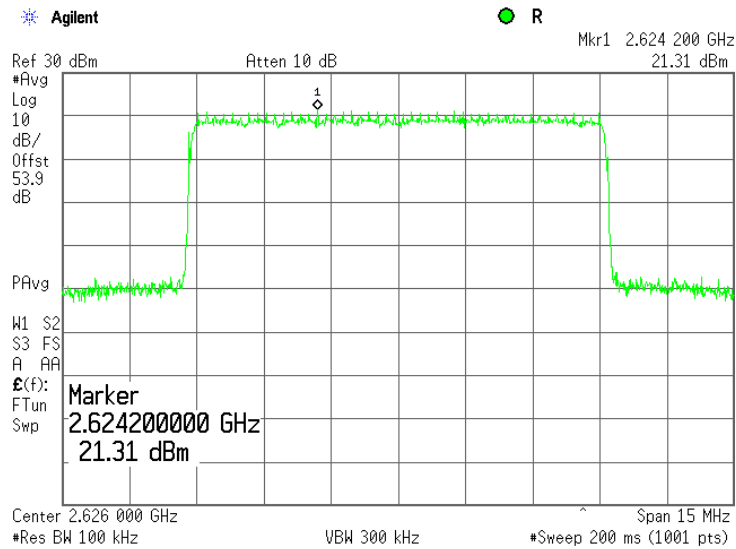


Plot 7.2.38 Power spectral density test results at mid frequency, QPSK, 10 MHz EBW, Antenna 1

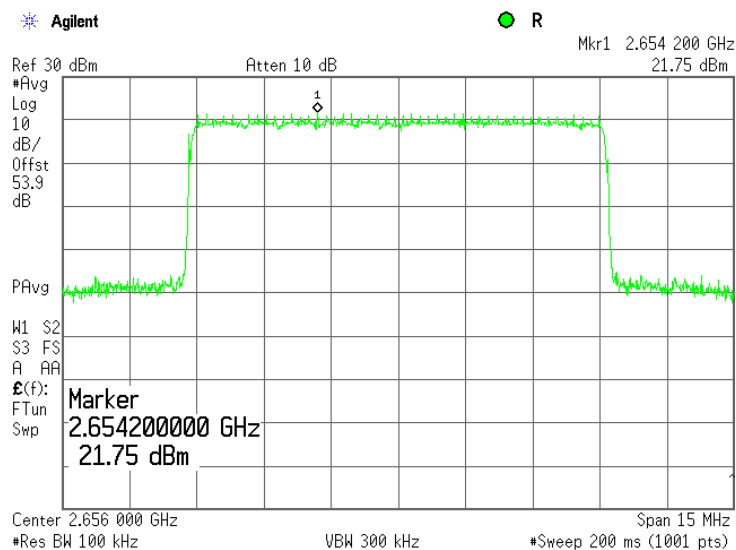


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.39 Power spectral density test results at high frequency, QPSK, 10 MHz EBW, Antenna 1

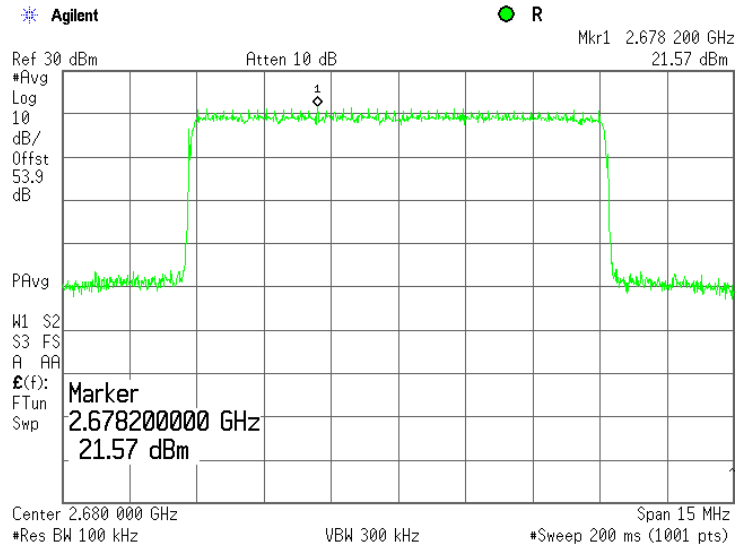


Plot 7.2.40 Power spectral density test results at low frequency, 64QAM, 10 MHz EBW, Antenna 1

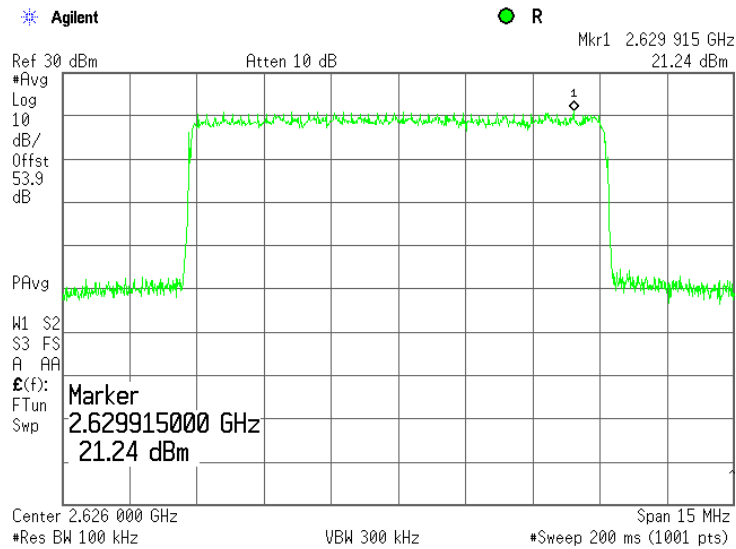


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.41 Power spectral density test results at mid frequency, 64QAM, 10 MHz EBW, Antenna 1

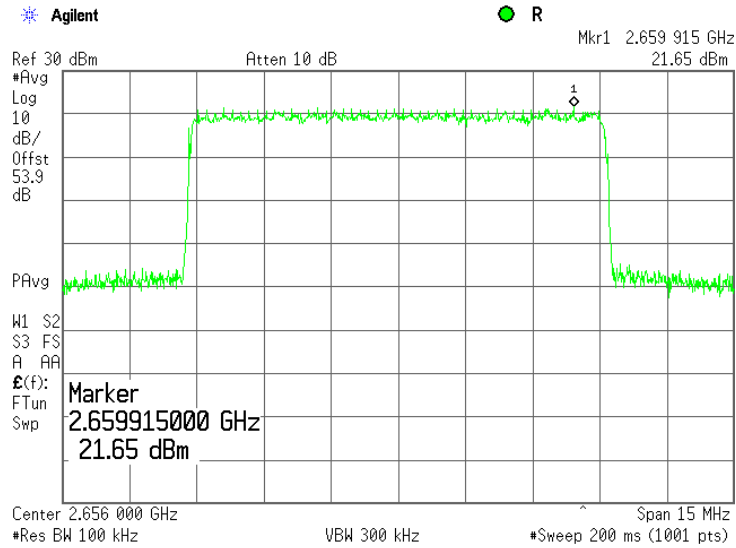


Plot 7.2.42 Power spectral density test results at high frequency, 64QAM, 10 MHz EBW, Antenna 1

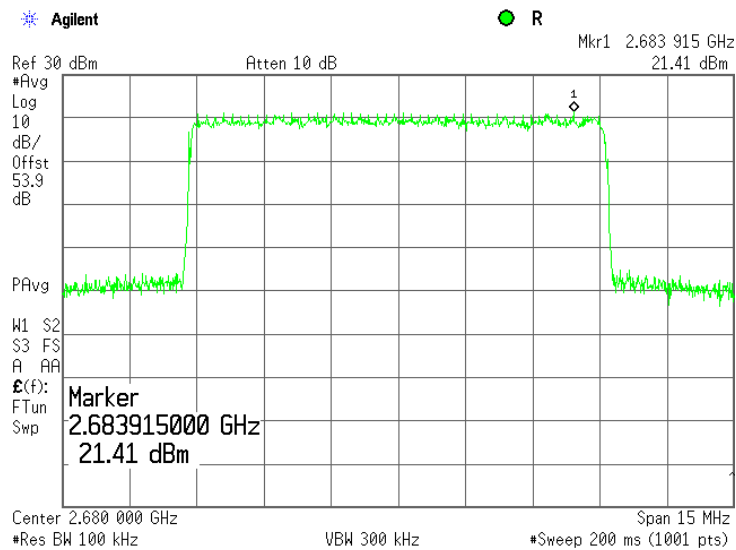


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.43 Power spectral density test results at low frequency, QPSK, 10 MHz EBW, Antenna 2

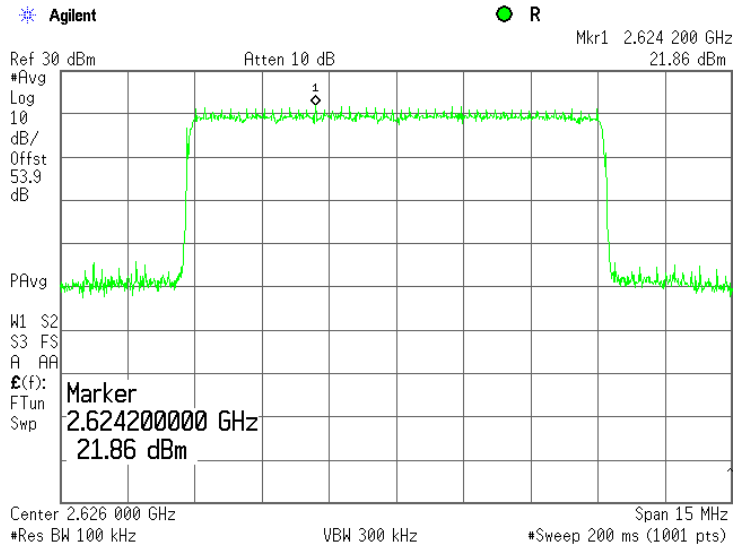


Plot 7.2.44 Power spectral density test results at mid frequency, QPSK, 10 MHz EBW, Antenna 2

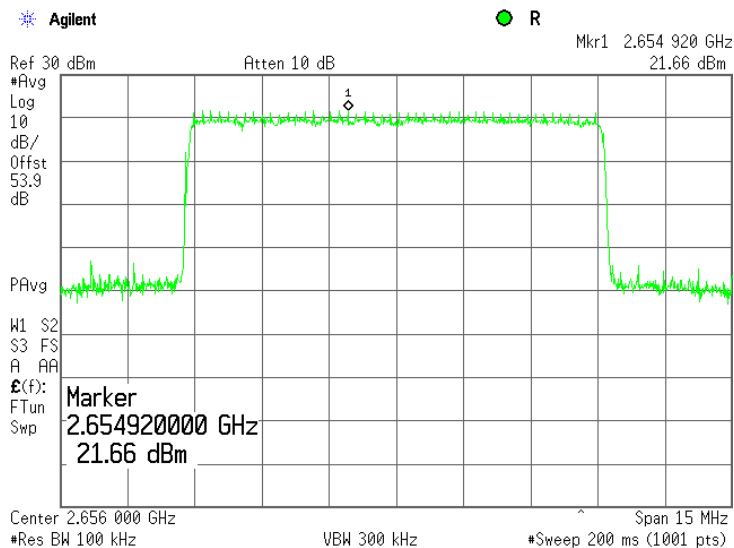


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.50(h), Peak output power | | |
| Test procedure: | Section 27.50(h) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.45 Power spectral density test results at high frequency, QPSK, 10 MHz EBW, Antenna 2

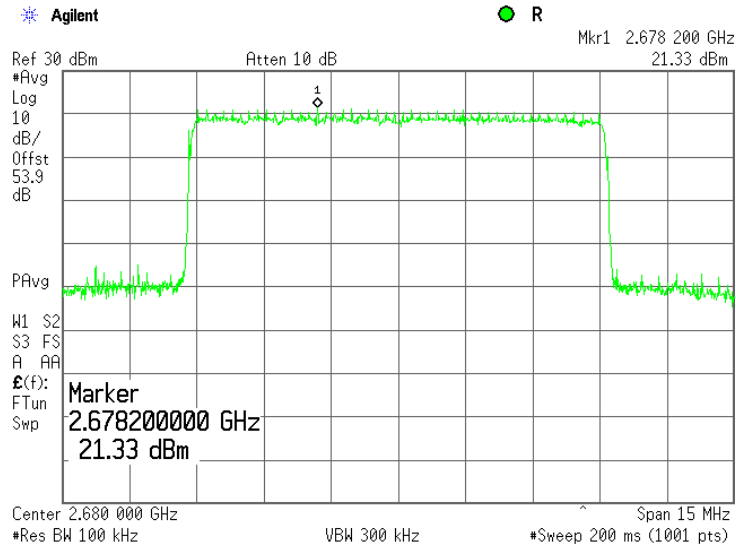


Plot 7.2.46 Power spectral density test results at low frequency, 64QAM, 10 MHz EBW, Antenna 2

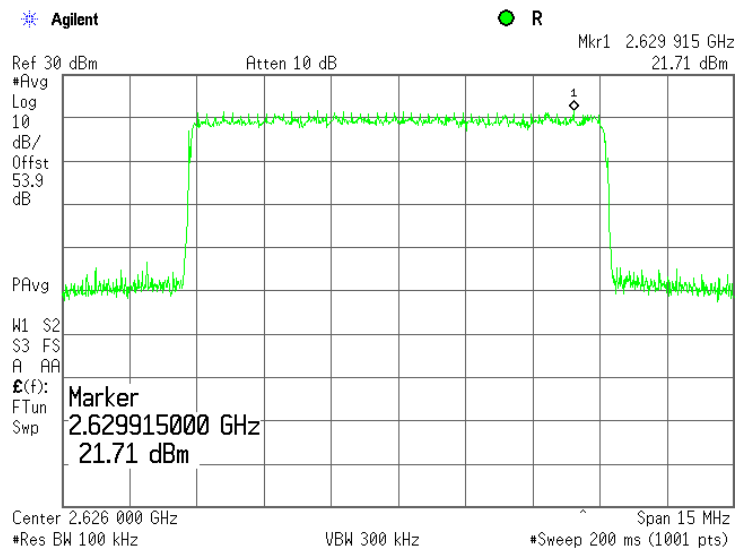


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.50(h), Peak output power | | | |
| Test procedure: Section 27.50(h) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.2.47 Power spectral density test results at mid frequency, 64QAM, 10 MHz EBW, Antenna 2

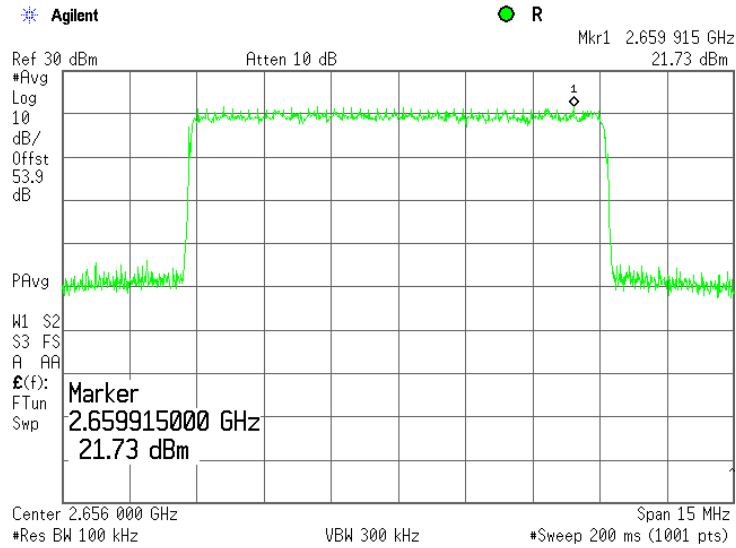

Plot 7.2.48 Power spectral density test results at high frequency, 64QAM, 10 MHz EBW, Antenna 2

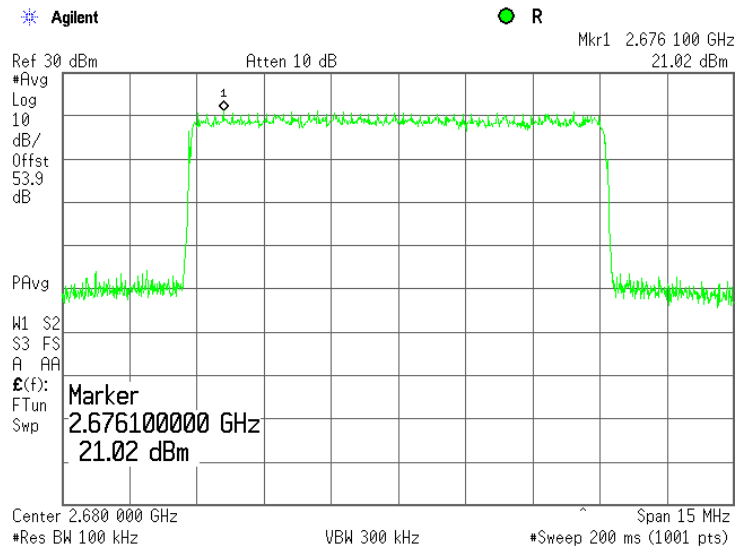

| | | | |
|--|------------------------|-------------------------|---------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

7.3 Conducted spurious emissions at the band edges (emission mask)

7.3.1 General

This test was performed to measure emission mask at RF antenna connector. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Spurious emission limits

| Channel | Frequency range | Attenuation below carrier, dBc | Limit, dBm |
|----------------------------------|-----------------|--------------------------------|------------|
| Channel bandwidth 3.5 MHz | | | |
| 2623.0 | 2614.0 – 2620.0 | 43+ 10*Log (P*) | -13.0 |
| | 2626.0 – 2632.0 | | |
| 2653.0 | 2644.0 – 2650.0 | 43+ 10*Log (P*) | -13.0 |
| | 2656.0 – 2662.0 | | |
| 2683.0 | 2674.0 – 2680.0 | 43+ 10*Log (P*) | -13.0 |
| | 2686.0 – 2692.0 | | |
| Channel bandwidth 5 MHz | | | |
| 2623.0 | 2614.0 – 2620.0 | 43+ 10*Log (P*) | -13.0 |
| | 2626.0 – 2632.0 | | |
| 2653.0 | 2644.0 – 2650.0 | 43+ 10*Log (P*) | -13.0 |
| | 2656.0 – 2662.0 | | |
| 2683.0 | 2674.0 – 2680.0 | 43+ 10*Log (P*) | -13.0 |
| | 2686.0 – 2692.0 | | |
| Channel bandwidth 7 MHz | | | |
| 2626.0 | 2614.0 – 2620.0 | 43+ 10*Log (P*) | -13.0 |
| | 2632.0 – 2638.0 | | |
| 2656.0 | 2644.0 – 2650.0 | 43+ 10*Log (P*) | -13.0 |
| | 2662.0 – 2668.0 | | |
| 2680.0 | 2668.0 – 2674.0 | 43+ 10*Log (P*) | -13.0 |
| | 2686.0 – 2692.0 | | |
| Channel bandwidth 10 MHz | | | |
| 2626.0 | 2614.0 – 2620.0 | 43+ 10*Log (P*) | -13.0 |
| | 2632.0 – 2638.0 | | |
| 2656.0 | 2644.0 – 2650.0 | 43+ 10*Log (P*) | -13.0 |
| | 2662.0 – 2668.0 | | |
| 2680.0 | 2668.0 – 2674.0 | 43+ 10*Log (P*) | -13.0 |
| | 2686.0 – 2692.0 | | |

* - P is transmitter output power in Watts

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1 or Figure 7.3.2, energized and its proper operation was checked.

7.3.2.2 The spurious emissions were measured with spectrum analyzer as provided in the associated plots.

7.3.2.3 The worst case results are provided in the associated tables and shown in the associated plots.

| | | | |
|-----------------------------|-------------------------------|--|----------------------------|
| Test specification: | | Section 27.53(m)(2), Conducted spurious emissions at the band edges | |
| Test procedure: | | Section 27.53(m)(2) | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Figure 7.3.1 Spurious emission test setup for single output





Figure 7.3.2 Spurious emission test setup for combined outputs





| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.3.2 Spurious emission at the band edges test results (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

| Frequency offset, ± MHz | SA reading, dBm low range | SA reading, dBm high range | RBW, kHz | Integration BW, kHz | Limit, dBm | Verdict |
|---|---------------------------|----------------------------|----------|---------------------|------------|---------|
| 3.5MHz EBW | | | | | | |
| Low carrier frequency 2623.0 MHz QPSK (Output power = 40.62 dBm) | | | | | | |
| 3.5 | -17.79 | -15.28 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -19.62 | -21.25 | 100 | 1000 | -13.0 | |
| 5.5 | -26.85 | -27.50 | 100 | 1000 | -13.0 | |
| 6.5 | -29.07 | -30.33 | 100 | 1000 | -13.0 | |
| Low carrier frequency 2623.0 MHz 64QAM (Output power = 40.59 dBm) | | | | | | |
| 3.5 | -14.51 | -13.36 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -16.63 | -17.56 | 100 | 1000 | -13.0 | |
| 5.5 | -23.52 | -24.53 | 100 | 1000 | -13.0 | |
| 6.5 | -26.70 | -27.67 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2653.0 MHz QPSK (Output power = 40.92 dBm) | | | | | | |
| 3.5 | -18.27 | -15.84 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -19.62 | -22.27 | 100 | 1000 | -13.0 | |
| 5.5 | -28.45 | -29.67 | 100 | 1000 | -13.0 | |
| 6.5 | -30.98 | -30.73 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2653.0 MHz 64QAM (Output power = 40.83 dBm) | | | | | | |
| 3.5 | -17.23 | -17.02 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -20.14 | -21.18 | 100 | 1000 | -13.0 | |
| 5.5 | -28.17 | -28.51 | 100 | 1000 | -13.0 | |
| 6.5 | -28.86 | -31.06 | 100 | 1000 | -13.0 | |
| High carrier frequency 2683.0 MHz QPSK (Output power = 40.58 dBm) | | | | | | |
| 3.5 | -16.67 | -19.11 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -20.10 | -24.31 | 100 | 1000 | -13.0 | |
| 5.5 | -29.44 | -29.66 | 100 | 1000 | -13.0 | |
| 6.5 | -30.73 | -31.31 | 100 | 1000 | -13.0 | |
| High carrier frequency 2683.0 MHz 64QAM (Output power = 40.32 dBm) | | | | | | |
| 3.5 | -17.54 | -20.17 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -21.83 | -24.25 | 100 | 1000 | -13.0 | |
| 5.5 | -28.92 | -30.12 | 100 | 1000 | -13.0 | |
| 6.5 | -29.65 | -31.53 | 100 | 1000 | -13.0 | |



| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.3.3 Spurious emission at the band edges test results (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

| Frequency offset, ± MHz | SA reading, dBm low range | SA reading, dBm high range | RBW, kHz | Integration BW, kHz | Limit, dBm | Verdict |
|---|---------------------------|----------------------------|----------|---------------------|------------|---------|
| 5MHz EBW | | | | | | |
| Low carrier frequency 2563.0 MHz QPSK (Output power = 41.56dBm) | | | | | | |
| 3.5 | -22.93 | -19.62 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -19.69 | -17.36 | 100 | 1000 | -13.0 | |
| 5.5 | -19.48 | -18.69 | 100 | 1000 | -13.0 | |
| 6.5 | -22.38 | -24.45 | 100 | 1000 | -13.0 | |
| Low carrier frequency 2563.0 MHz 64QAM (Output power = 41.57 dBm) | | | | | | |
| 3.5 | -21.56 | -20.45 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -18.67 | -18.96 | 100 | 1000 | -13.0 | |
| 5.5 | -21.87 | -18.45 | 100 | 1000 | -13.0 | |
| 6.5 | -22.34 | -24.11 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2593.0 MHz QPSK (Output power = 41.86 dBm) | | | | | | |
| 3.5 | -22.12 | -20.84 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -17.57 | -18.55 | 100 | 1000 | -13.0 | |
| 5.5 | -18.31 | -18.52 | 100 | 1000 | -13.0 | |
| 6.5 | -20.38 | -22.92 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2593.0 MHz 64QAM (Output power = 41.89 dBm) | | | | | | |
| 3.5 | -20.14 | -17.99 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -16.89 | -17.34 | 100 | 1000 | -13.0 | |
| 5.5 | -18.77 | -18.53 | 100 | 1000 | -13.0 | |
| 6.5 | -20.45 | -22.54 | 100 | 1000 | -13.0 | |
| High carrier frequency 2629.0 MHz QPSK (Output power = 41.51 dBm) | | | | | | |
| 3.5 | -19.47 | -14.69 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -14.68 | -14.13 | 100 | 1000 | -13.0 | |
| 5.5 | -15.18 | -15.64 | 100 | 1000 | -13.0 | |
| 6.5 | -18.53 | -20.48 | 100 | 1000 | -13.0 | |
| High carrier frequency 2629.0 MHz 64QAM (Output power = 41.45 dBm) | | | | | | |
| 3.5 | -18.21 | -17.33 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -14.50 | -14.94 | 100 | 1000 | -13.0 | |
| 5.5 | -14.86 | -13.60 | 100 | 1000 | -13.0 | |
| 6.5 | -17.07 | -17.87 | 100 | 1000 | -13.0 | |



| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.3.4 Spurious emission at the band edges test results (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

| Frequency offset, ± MHz | SA reading, dBm low range | SA reading, dBm high range | RBW, kHz | Integration BW, kHz | Limit, dBm | Verdict |
|---|---------------------------|----------------------------|----------|---------------------|------------|---------|
| 7 MHz EBW | | | | | | |
| Low carrier frequency 2566.0 MHz QPSK (Output power = 41.70 dBm) | | | | | | |
| 6.5 | -16.27 | -18.19 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -16.02 | -18.21 | 100 | 1000 | -13.0 | |
| 8.5 | -17.16 | -18.32 | 100 | 1000 | -13.0 | |
| 9.5 | -21.34 | -20.79 | 100 | 1000 | -13.0 | |
| Low carrier frequency 2566.0 MHz 64QAM (Output power = 41.68 dBm) | | | | | | |
| 6.5 | -14.73 | -17.47 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -15.56 | -16.53 | 100 | 1000 | -13.0 | |
| 8.5 | -16.72 | -17.63 | 100 | 1000 | -13.0 | |
| 9.5 | -21.03 | -21.31 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2596.0 MHz QPSK (Output power = 41.96dBm) | | | | | | |
| 6.5 | -14.46 | -15.73 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -14.75 | -15.57 | 100 | 1000 | -13.0 | |
| 8.5 | -15.73 | -18.32 | 100 | 1000 | -13.0 | |
| 9.5 | -19.95 | -20.67 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2596.0 MHz 64QAM (Output power = 41.92 dBm) | | | | | | |
| 6.5 | -13.81 | -16.59 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -14.38 | -15.17 | 100 | 1000 | -13.0 | |
| 8.5 | -15.34 | -17.16 | 100 | 1000 | -13.0 | |
| 9.5 | -19.96 | -21.23 | 100 | 1000 | -13.0 | |
| High carrier frequency 2626.0 MHz QPSK (Output power = 41.53 dBm) | | | | | | |
| 6.5 | -17.47 | -18.14 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -17.87 | -17.94 | 100 | 1000 | -13.0 | |
| 8.5 | -18.52 | -20.88 | 100 | 1000 | -13.0 | |
| 9.5 | -21.79 | -23.39 | 100 | 1000 | -13.0 | |
| High carrier frequency 2626.0 MHz 64QAM (Output power = 41.48 dBm) | | | | | | |
| 6.5 | -18.44 | -19.77 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -19.07 | -20.29 | 100 | 1000 | -13.0 | |
| 8.5 | -18.89 | -20.16 | 100 | 1000 | -13.0 | |
| 9.5 | -23.26 | -24.47 | 100 | 1000 | -13.0 | |

NOTE: For the rest test results please see Error! Reference source not found.- Plot 7.3.36



| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.3.5 Spurious emission at the band edges test results (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

| Frequency offset, ± MHz | SA reading, dBm low range | SA reading, dBm high range | RBW, kHz | Integration BW, kHz | Limit, dBm | Verdict |
|---|---------------------------|----------------------------|----------|---------------------|------------|---------|
| 10 MHz EBW | | | | | | |
| Low carrier frequency 2566.0 MHz QPSK (Output power = 41.84 dBm) | | | | | | |
| 6.5 | -23.43 | -23.70 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -21.92 | -20.74 | 100 | 1000 | -13.0 | |
| 8.5 | -19.17 | -21.64 | 100 | 1000 | -13.0 | |
| 9.5 | -17.25 | -19.88 | 100 | 1000 | -13.0 | |
| Low carrier frequency 2566.0 MHz 64QAM (Output power = 41.99 dBm) | | | | | | |
| 6.5 | -22.05 | -24.49 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -18.04 | -20.28 | 100 | 1000 | -13.0 | |
| 8.5 | -17.62 | -20.65 | 100 | 1000 | -13.0 | |
| 9.5 | -16.32 | -18.65 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2596.0 MHz QPSK (Output power = 42.36 dBm) | | | | | | |
| 6.5 | -23.75 | -22.94 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -20.20 | -19.57 | 100 | 1000 | -13.0 | |
| 8.5 | -18.01 | -19.44 | 100 | 1000 | -13.0 | |
| 9.5 | -16.43 | -18.46 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2596.0 MHz 64QAM (Output power = 42.29 dBm) | | | | | | |
| 6.5 | -23.42 | -24.03 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -19.59 | -20.38 | 100 | 1000 | -13.0 | |
| 8.5 | -17.65 | -20.25 | 100 | 1000 | -13.0 | |
| 9.5 | -16.36 | -18.76 | 100 | 1000 | -13.0 | |
| High carrier frequency 2626.0 MHz QPSK (Output power = 42.01 dBm) | | | | | | |
| 6.5 | -24.36 | -25.60 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -21.15 | -21.89 | 100 | 1000 | -13.0 | |
| 8.5 | -18.75 | -23.58 | 100 | 1000 | -13.0 | |
| 9.5 | -16.56 | -22.57 | 100 | 1000 | -13.0 | |
| High carrier frequency 2626.0 MHz 64QAM (Output power = 42.06 dBm) | | | | | | |
| 6.5 | -24.44 | -24.45 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -19.61 | -20.43 | 100 | 1000 | -13.0 | |
| 8.5 | -16.61 | -19.36 | 100 | 1000 | -13.0 | |
| 9.5 | -16.64 | -19.39 | 100 | 1000 | -13.0 | |

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|--|
| HL 1906 | HL 2013 | HL 2953 | HL 3472 | HL 3473 | HL 3474 | HL 3818 | |
|---------|---------|---------|---------|---------|---------|---------|--|

Full description is given in Appendix A.



| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.3.6 Spurious emission at the band edges test results (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

| Frequency offset, ± MHz | SA reading, dBm low range | SA reading, dBm high range | RBW, kHz | Integration BW, kHz | Limit, dBm | Verdict |
|---|---------------------------|----------------------------|----------|---------------------|------------|---------|
| 3.5 MHz EBW | | | | | | |
| Low carrier frequency 2563.0 MHz QPSK (Output power = 38.61 dBm) | | | | | | |
| 3.5 | -18.63 | -17.97 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -21.78 | -24.17 | 100 | 1000 | -13.0 | |
| 5.5 | -26.51 | -26.38 | 100 | 1000 | -13.0 | |
| 6.5 | -27.16 | -28.30 | 100 | 1000 | -13.0 | |
| Low carrier frequency 2563.0 MHz 64QAM (Output power = 38.53 dBm) | | | | | | |
| 3.5 | -18.74 | -28.58 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -22.96 | -24.26 | 100 | 1000 | -13.0 | |
| 5.5 | -25.66 | -26.73 | 100 | 1000 | -13.0 | |
| 6.5 | -27.65 | -29.08 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2593.0 MHz QPSK (Output power = 38.67 dBm) | | | | | | |
| 3.5 | -16.01 | -18.07 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -20.69 | -24.05 | 100 | 1000 | -13.0 | |
| 5.5 | -26.82 | -26.31 | 100 | 1000 | -13.0 | |
| 6.5 | -27.13 | -29.49 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2593.0 MHz 64QAM (Output power = 38.61 dBm) | | | | | | |
| 3.5 | -16.07 | -17.52 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -20.76 | -23.30 | 100 | 1000 | -13.0 | |
| 5.5 | -25.97 | -26.02 | 100 | 1000 | -13.0 | |
| 6.5 | -27.42 | -29.29 | 100 | 1000 | -13.0 | |
| High carrier frequency 2629.0 MHz QPSK (Output power = 37.26 dBm) | | | | | | |
| 3.5 | -19.45 | -20.32 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -22.59 | -24.71 | 100 | 1000 | -13.0 | |
| 5.5 | -25.87 | -26.38 | 100 | 1000 | -13.0 | |
| 6.5 | -27.29 | -28.13 | 100 | 1000 | -13.0 | |
| High carrier frequency 2629.0 MHz 64QAM (Output power = 37.78 dBm) | | | | | | |
| 3.5 | -18.11 | -19.06 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -21.89 | -24.02 | 100 | 1000 | -13.0 | |
| 5.5 | -24.66 | -26.35 | 100 | 1000 | -13.0 | |
| 6.5 | -26.35 | -28.47 | 100 | 1000 | -13.0 | |



| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.3.7 Spurious emission at the band edges test results (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

| Frequency offset, ± MHz | SA reading, dBm low range | SA reading, dBm high range | RBW, kHz | Integration BW, kHz | Limit, dBm | Verdict |
|---|---------------------------|----------------------------|----------|---------------------|------------|---------|
| 5MHz EBW | | | | | | |
| Low carrier frequency 2563.0 MHz QPSK (Output power = 38.56 dBm) | | | | | | |
| 3.5 | -17.64 | -15.33 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -17.71 | -19.09 | 100 | 1000 | -13.0 | |
| 5.5 | -20.94 | -21.57 | 100 | 1000 | -13.0 | |
| 6.5 | -23.68 | -24.56 | 100 | 1000 | -13.0 | |
| Low carrier frequency 2563.0 MHz 64QAM (Output power = 38.55 dBm) | | | | | | |
| 3.5 | -17.37 | -16.56 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -18.37 | -20.69 | 100 | 1000 | -13.0 | |
| 5.5 | -23.64 | -23.83 | 100 | 1000 | -13.0 | |
| 6.5 | -24.44 | -27.79 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2593.0 MHz QPSK (Output power = 38.62 dBm) | | | | | | |
| 3.5 | -14.71 | -13.63 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -15.12 | -17.65 | 100 | 1000 | -13.0 | |
| 5.5 | -19.39 | -20.41 | 100 | 1000 | -13.0 | |
| 6.5 | 22.21 | -24.44 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2593.0 MHz 64QAM (Output power = 38.56 dBm) | | | | | | |
| 3.5 | -16.65 | -16.27 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -16.66 | -20.20 | 100 | 1000 | -13.0 | |
| 5.5 | -22.41 | -22.62 | 100 | 1000 | -13.0 | |
| 6.5 | -23.44 | -27.70 | 100 | 1000 | -13.0 | |
| High carrier frequency 2629.0 MHz QPSK (Output power = 37.79 dBm) | | | | | | |
| 3.5 | -18.75 | -20.53 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -19.23 | -23.52 | 100 | 1000 | -13.0 | |
| 5.5 | -22.53 | -24.96 | 100 | 1000 | -13.0 | |
| 6.5 | -23.76 | -26.81 | 100 | 1000 | -13.0 | |
| High carrier frequency 2629.0 MHz 64QAM (Output power = 37.76 dBm) | | | | | | |
| 3.5 | -18.40 | -19.98 | 100 | 1000 | -13.0 | Pass |
| 4.5 | -19.05 | -23.01 | 100 | 1000 | -13.0 | |
| 5.5 | -23.28 | -24.79 | 100 | 1000 | -13.0 | |
| 6.5 | -24.13 | -27.23 | 100 | 1000 | -13.0 | |



| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.3.8 Spurious emission at the band edges test results (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

| Frequency offset, ± MHz | SA reading, dBm low range | SA reading, dBm high range | RBW, kHz | Integration BW, kHz | Limit, dBm | Verdict |
|---|---------------------------|----------------------------|----------|---------------------|------------|---------|
| 7 MHz EBW | | | | | | |
| Low carrier frequency 2566.0 MHz QPSK (Output power = 38.69 dBm) | | | | | | |
| 6.5 | -23.49 | -22.08 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -26.06 | -22.54 | 100 | 1000 | -13.0 | |
| 8.5 | -25.29 | -26.89 | 100 | 1000 | -13.0 | |
| 9.5 | -26.68 | -26.69 | 100 | 1000 | -13.0 | |
| Low carrier frequency 2566.0 MHz 64QAM (Output power = 38.67 dBm) | | | | | | |
| 6.5 | -23.02 | -21.96 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -24.21 | -24.91 | 100 | 1000 | -13.0 | |
| 8.5 | -23.74 | -25.48 | 100 | 1000 | -13.0 | |
| 9.5 | -27.97 | -26.94 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2596.-27.030 MHz QPSK (Output power = 38.69 dBm) | | | | | | |
| 6.5 | -18.32 | -20.61 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -20.49 | -20.36 | 100 | 1000 | -13.0 | |
| 8.5 | -21.13 | -23.79 | 100 | 1000 | -13.0 | |
| 9.5 | -23.62 | -25.84 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2596.0 MHz 64QAM (Output power = 38.65 dBm) | | | | | | |
| 6.5 | -18.85 | -22.16 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -21.74 | -21.61 | 100 | 1000 | -13.0 | |
| 8.5 | -21.49 | -22.96 | 100 | 1000 | -13.0 | |
| 9.5 | -25.01 | -26.84 | 100 | 1000 | -13.0 | |
| High carrier frequency 2626.0 MHz QPSK (Output power = 38.11 dBm) | | | | | | |
| 6.5 | -19.62 | -19.63 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -21.62 | -19.27 | 100 | 1000 | -13.0 | |
| 8.5 | -21.57 | -23.36 | 100 | 1000 | -13.0 | |
| 9.5 | -24.00 | -23.83 | 100 | 1000 | -13.0 | |
| High carrier frequency 2626.0 MHz 64QAM (Output power = 38.13 dBm) | | | | | | |
| 6.5 | -19.93 | -19.57 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -21.63 | -19.34 | 100 | 1000 | -13.0 | |
| 8.5 | -20.17 | -21.99 | 100 | 1000 | -13.0 | |
| 9.5 | -24.78 | -23.66 | 100 | 1000 | -13.0 | |

NOTE: For the rest test results please see Error! Reference source not found.- Plot 7.3.36



| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Table 7.3.9 Spurious emission at the band edges test results (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 INVESTIGATED FREQUENCY RANGE: See Table 7.3.1
 RBW: 100 kHz
 DETECTOR USED: Average
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

| Frequency offset, ± MHz | SA reading, dBm low range | SA reading, dBm high range | RBW, kHz | Integration BW, kHz | Limit, dBm | Verdict |
|---|---------------------------|----------------------------|----------|---------------------|------------|---------|
| 10 MHz EBW | | | | | | |
| Low carrier frequency 2566.0 MHz QPSK (Output power = 38.64 dBm) | | | | | | |
| 6.5 | -16.92 | -18.22 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -19.48 | -19.93 | 100 | 1000 | -13.0 | |
| 8.5 | -20.02 | -23.74 | 100 | 1000 | -13.0 | |
| 9.5 | -20.14 | -26.32 | 100 | 1000 | -13.0 | |
| Low carrier frequency 2566.0 MHz 64QAM (Output power = 38.63 dBm) | | | | | | |
| 6.5 | -17.25 | -18.36 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -18.86 | -19.21 | 100 | 1000 | -13.0 | |
| 8.5 | -18.62 | -21.76 | 100 | 1000 | -13.0 | |
| 9.5 | -20.10 | -22.72 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2596.0 MHz QPSK (Output power = 38.65 dBm) | | | | | | |
| 6.5 | -14.26 | -17.35 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -16.94 | -18.01 | 100 | 1000 | -13.0 | |
| 8.5 | -19.00 | -21.94 | 100 | 1000 | -13.0 | |
| 9.5 | -18.72 | -21.13 | 100 | 1000 | -13.0 | |
| Mid carrier frequency 2596.0 MHz 64QAM (Output power = 38.63 dBm) | | | | | | |
| 6.5 | -19.16 | -20.01 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -18.31 | -17.87 | 100 | 1000 | -13.0 | |
| 8.5 | -19.03 | -20.45 | 100 | 1000 | -13.0 | |
| 9.5 | -22.82 | -20.99 | 100 | 1000 | -13.0 | |
| High carrier frequency 2626.0 MHz QPSK (Output power = 38.01 dBm) | | | | | | |
| 6.5 | -16.89 | -20.55 | 300 | 1000 | -13.0 | Pass |
| 7.5 | -18.38 | -21.79 | 300 | 1000 | -13.0 | |
| 8.5 | -21.39 | -24.95 | 300 | 1000 | -13.0 | |
| 9.5 | -21.59 | -24.29 | 300 | 1000 | -13.0 | |
| High carrier frequency 2626.0 MHz 64QAM (Output power = 39.68 dBm) | | | | | | |
| 6.5 | -17.02 | -20.47 | 100 | 1000 | -13.0 | Pass |
| 7.5 | -18.42 | -21.63 | 100 | 1000 | -13.0 | |
| 8.5 | -21.07 | -24.59 | 100 | 1000 | -13.0 | |
| 9.5 | -21.52 | -23.96 | 100 | 1000 | -13.0 | |

Reference numbers of test equipment used


| | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|
| HL 1906 | HL 2015 | HL 2254 | HL 2953 | HL 3433 | HL 3434 | HL 3818 |
|---------|---------|---------|---------|---------|---------|---------|

Full description is given in Appendix A.

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.1 Emission mask test results at low carrier frequency, 3.5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 4 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

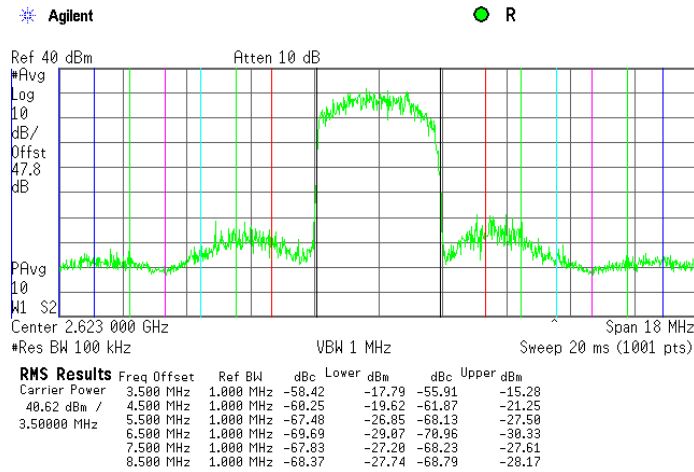

Plot 7.3.2 Emission mask test results at mid carrier frequency, 3.5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 4 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

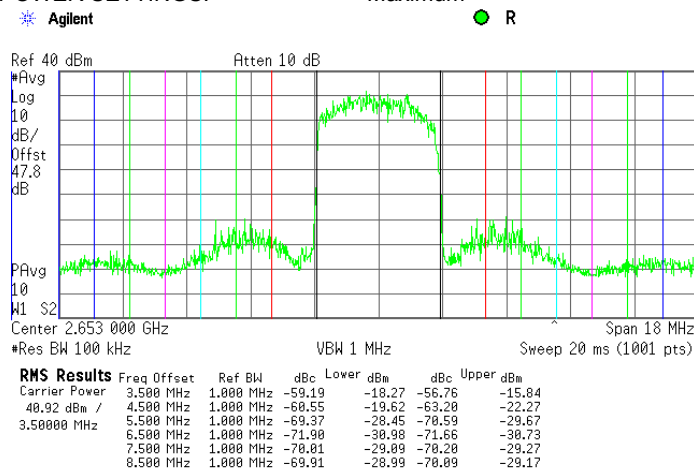

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.3 Emission mask test results at high carrier frequency, 3.5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 4 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

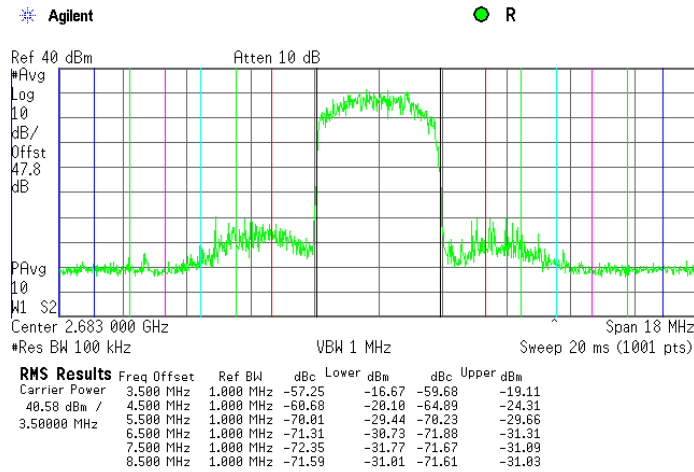

Plot 7.3.4 Emission mask test results at low carrier frequency, 3.5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 14 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

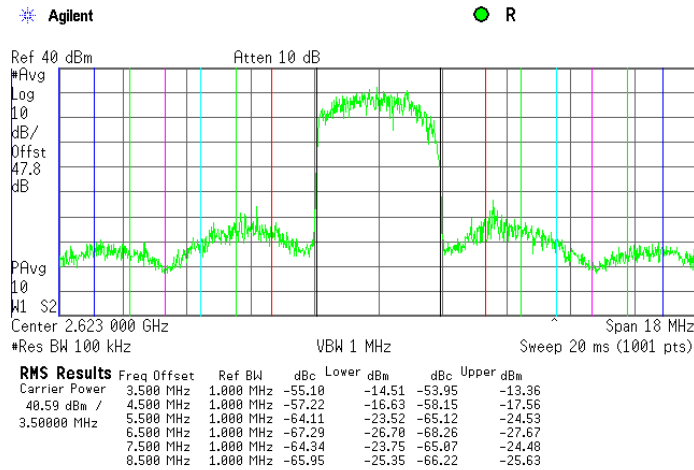

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.5 Emission mask test results at mid carrier frequency, 3.5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 14 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

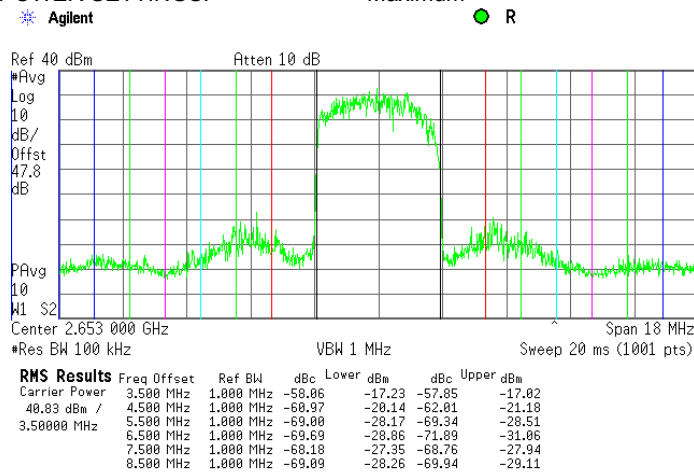

Plot 7.3.6 Emission mask test results at high carrier frequency, 3.5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 14 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

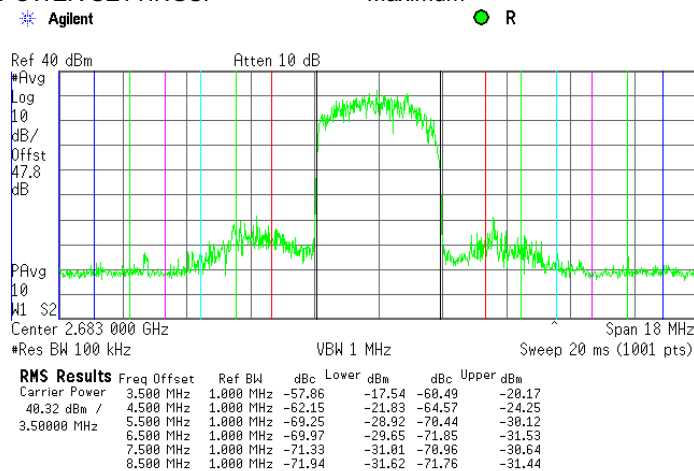

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.7 Emission mask test results at low carrier frequency, 5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 7 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

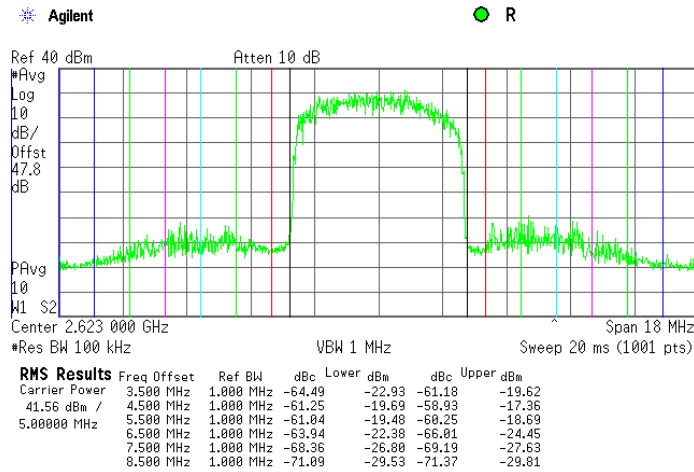

Plot 7.3.8 Emission mask test results at mid carrier frequency, 5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 7 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

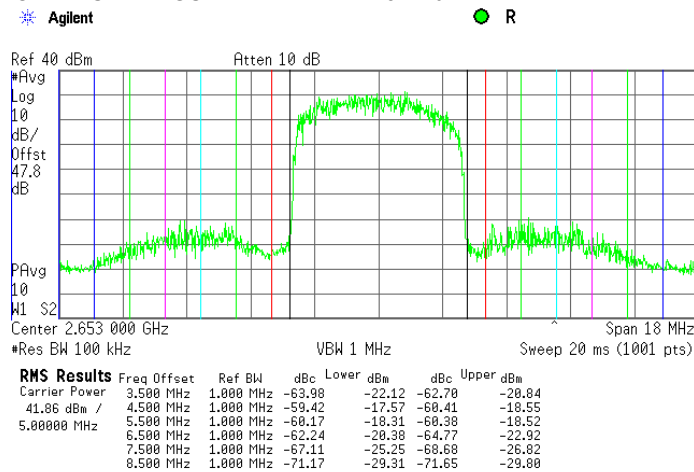

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.9 Emission mask test results at high carrier frequency, 5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 7 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

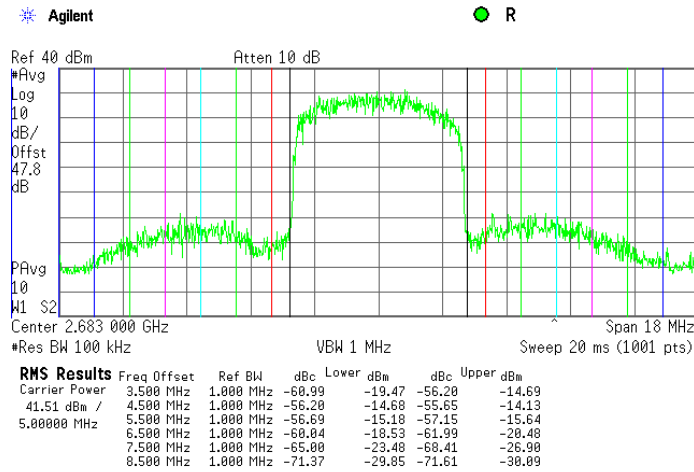

Plot 7.3.10 Emission mask test results at low carrier frequency, 5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 23 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

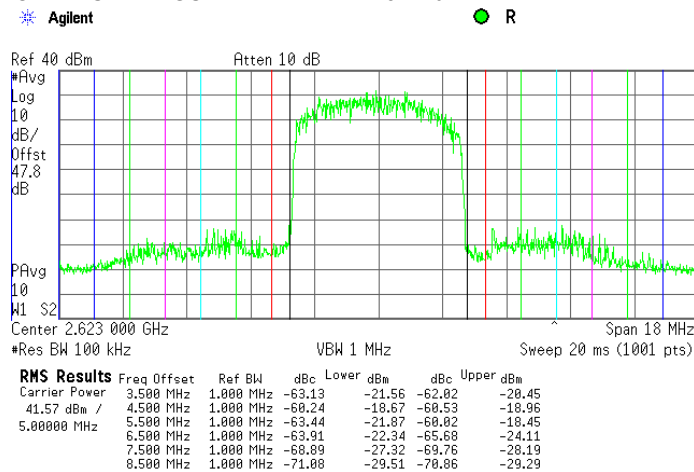

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.11 Emission mask test results at mid carrier frequency, 5 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 23 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

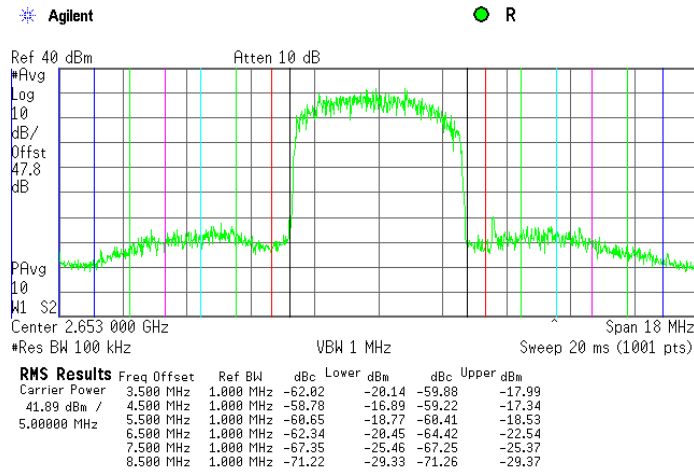

Plot 7.3.12 Emission mask test results at high carrier frequency 5 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 23 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

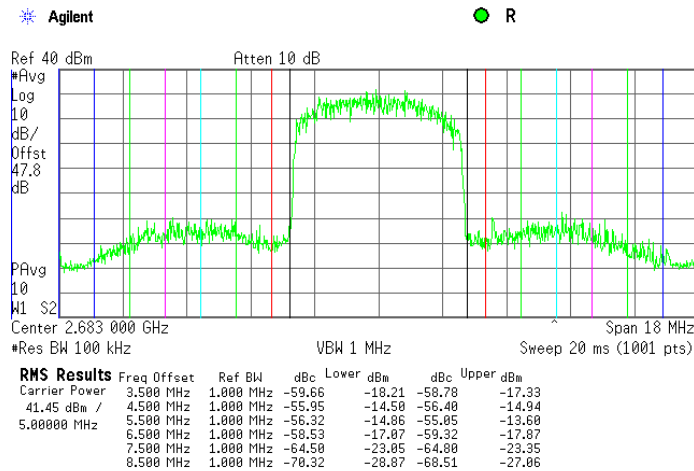

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.13 Emission mask test results at low carrier frequency, 7 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 8 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

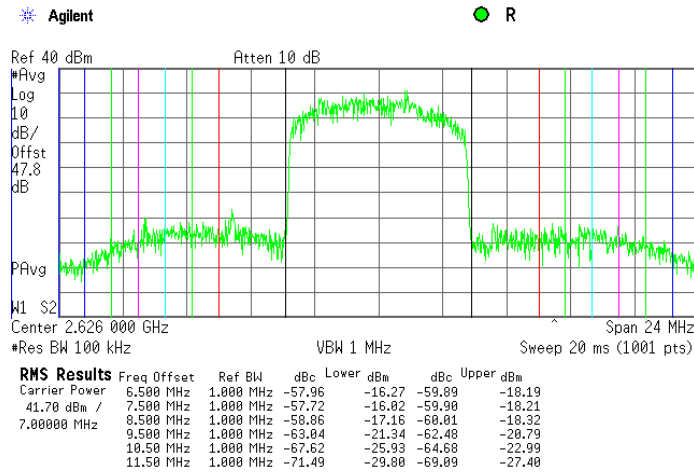

Plot 7.3.14 Emission mask test results at mid carrier frequency, 7 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 8 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

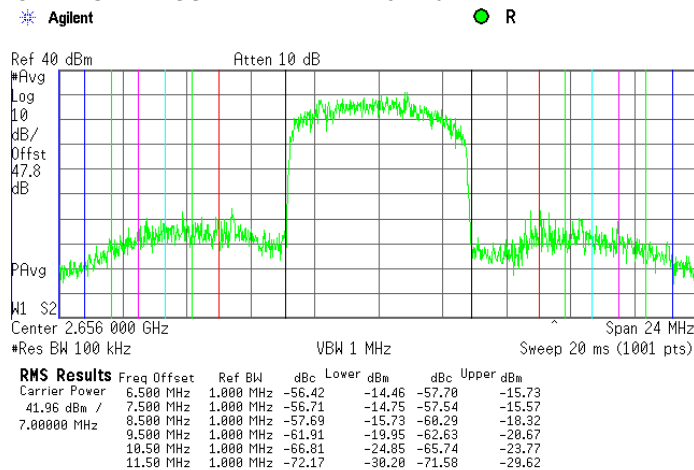

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.15 Emission mask test results at high carrier frequency, 7 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: QPSK
MODULATING SIGNAL: PRBS
BIT RATE: 8 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

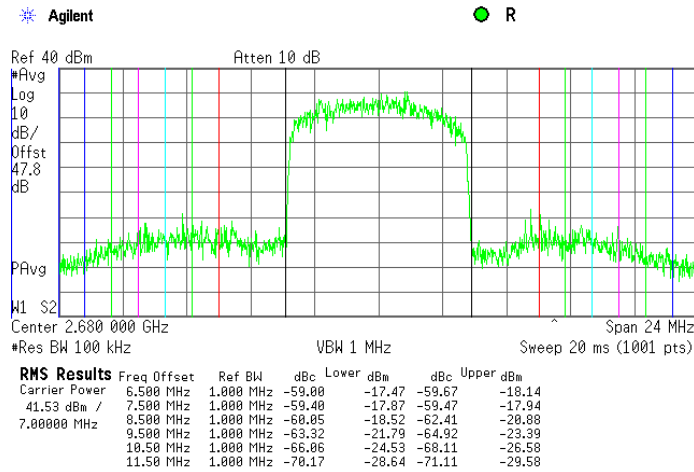

Plot 7.3.16 Emission mask test results at low carrier frequency, 7 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 28 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

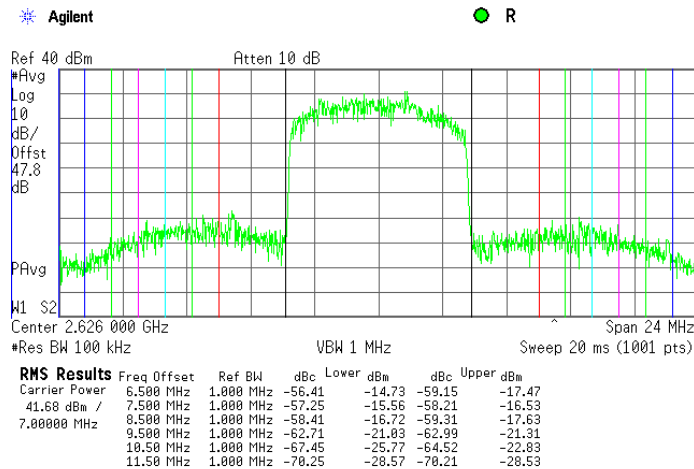

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.17 Emission mask test results at mid carrier frequency, 7 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 28 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

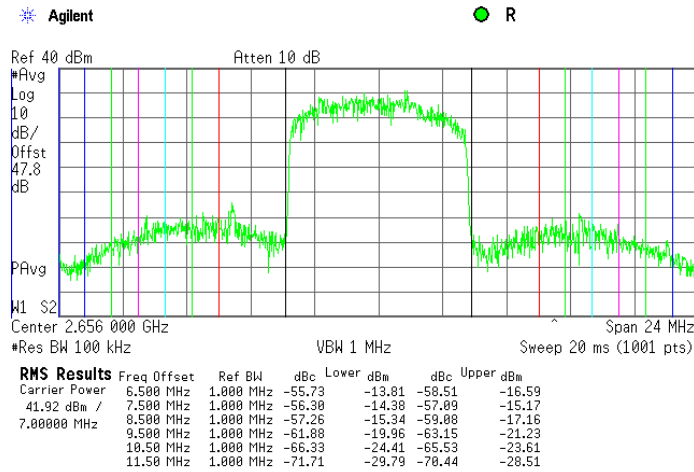

Plot 7.3.18 Emission mask test results at high carrier frequency, 10 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 28 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

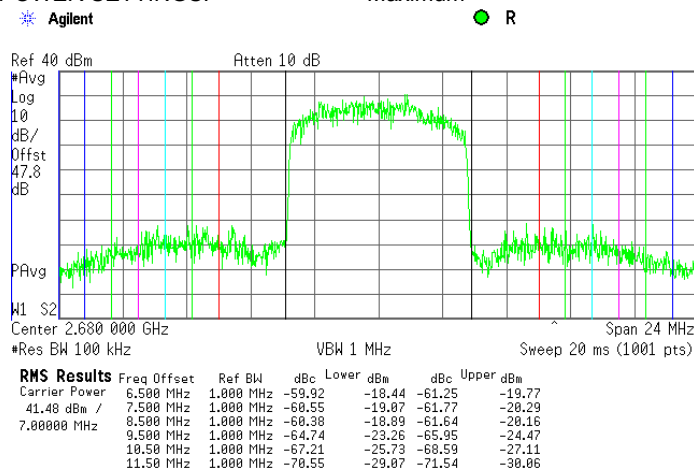

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.19 Emission mask test results at low carrier frequency, 10 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 13 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

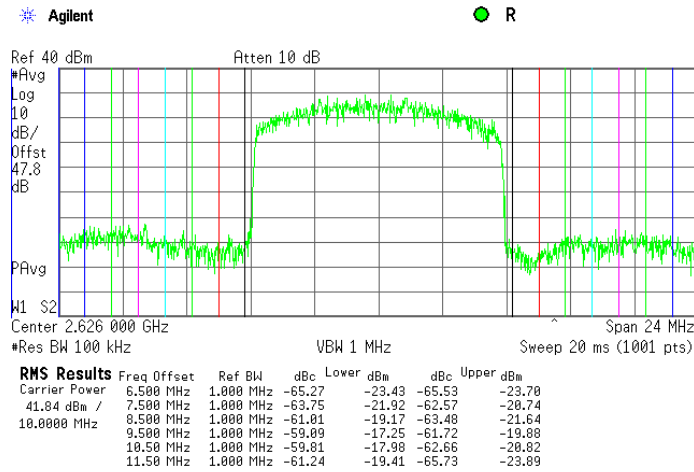

Plot 7.3.20 Emission mask test results at mid carrier frequency, 10 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 13 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

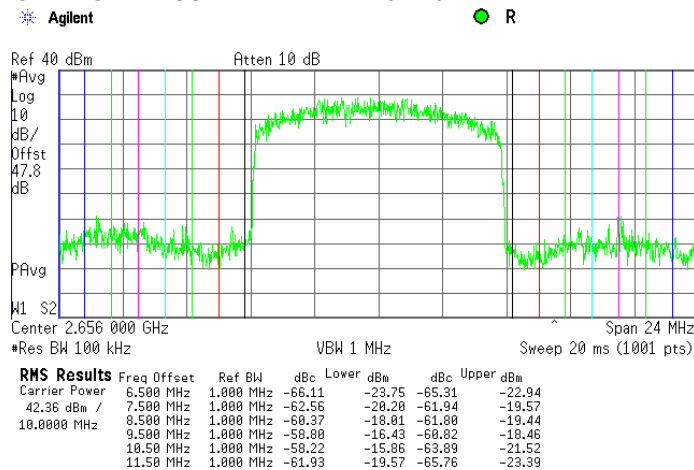

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.21 Emission mask test results at high carrier frequency, 10 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 13 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

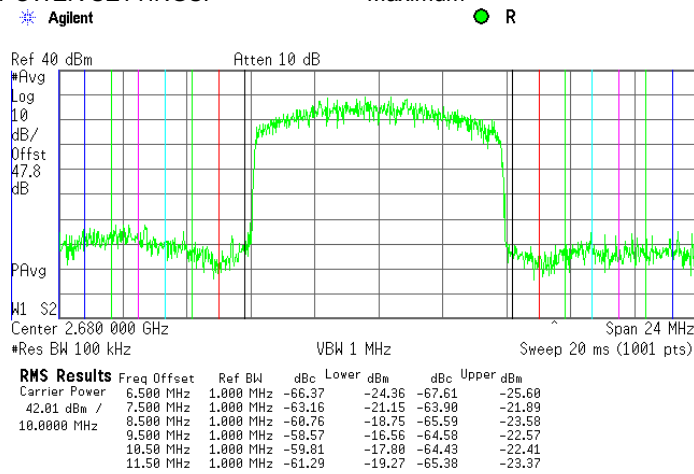

Plot 7.3.22 Emission mask test results at low carrier frequency, 10 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 46 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

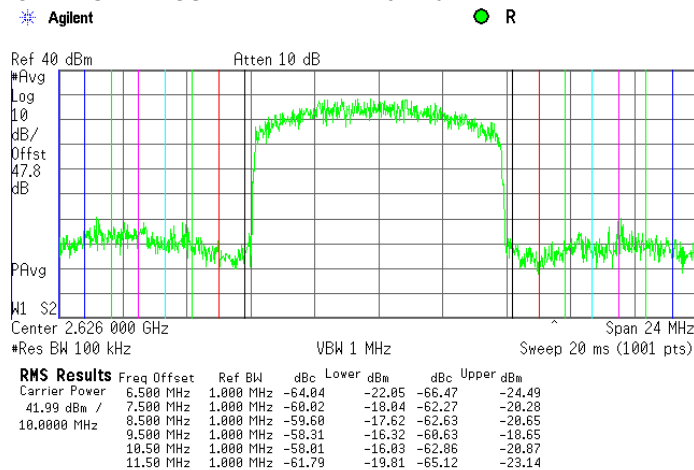

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.23 Emission mask test results at mid carrier frequency, 10 MHz EBW (combined output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 46 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

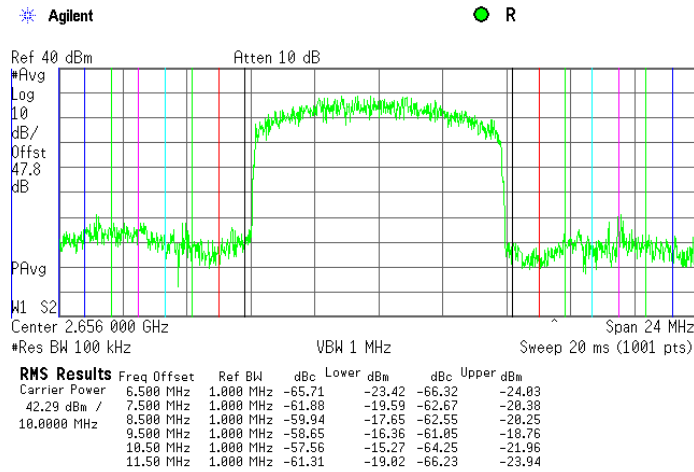

Plot 7.3.24 Emission mask test results at high carrier frequency, 10 MHz EBW (combined output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 46 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

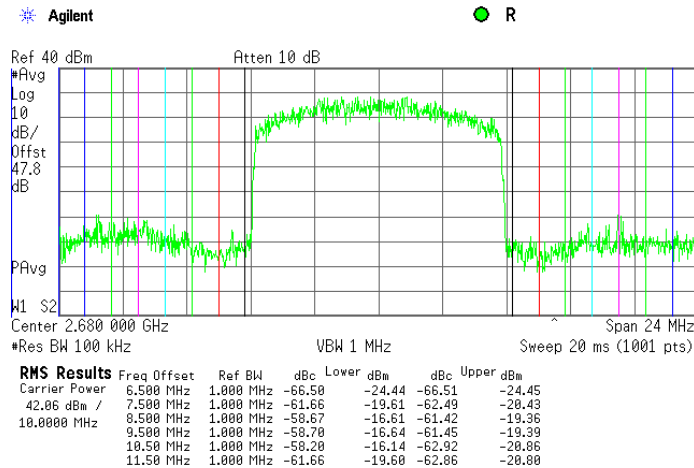

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.25 Emission mask test results at low carrier frequency, 3.5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 4 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

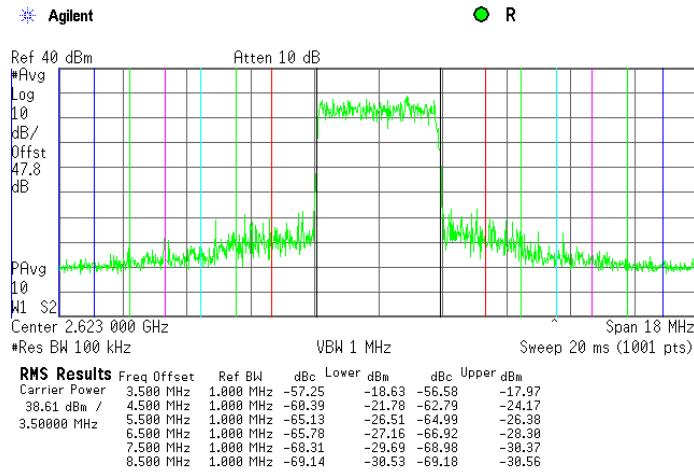

Plot 7.3.26 Emission mask test results at mid carrier frequency, 3.5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 4 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

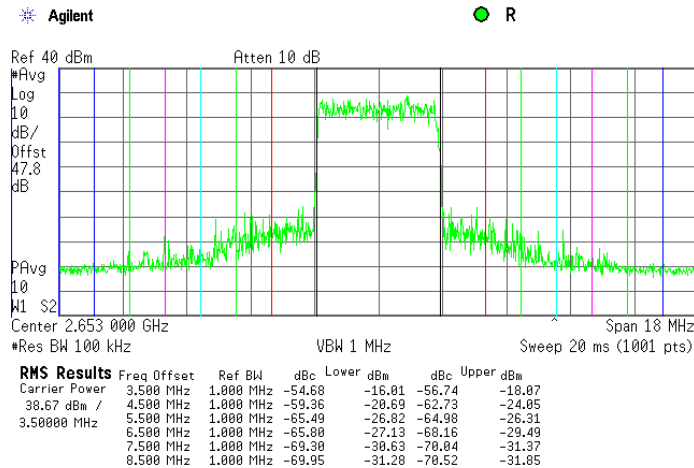

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.27 Emission mask test results at high carrier frequency, 3.5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 4 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

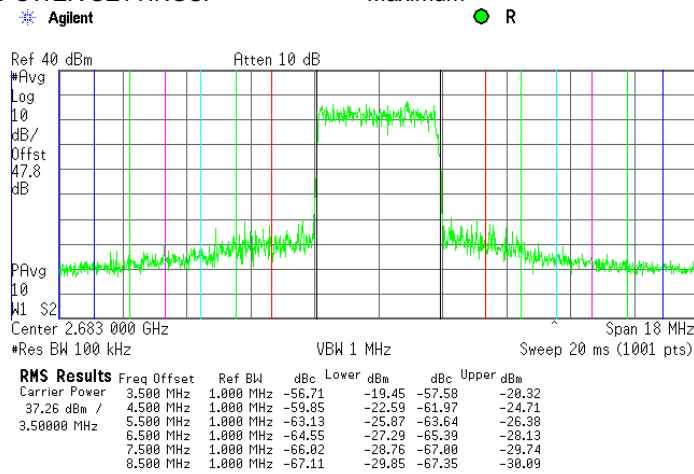

Plot 7.3.28 Emission mask test results at low carrier frequency, 3.5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 14 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

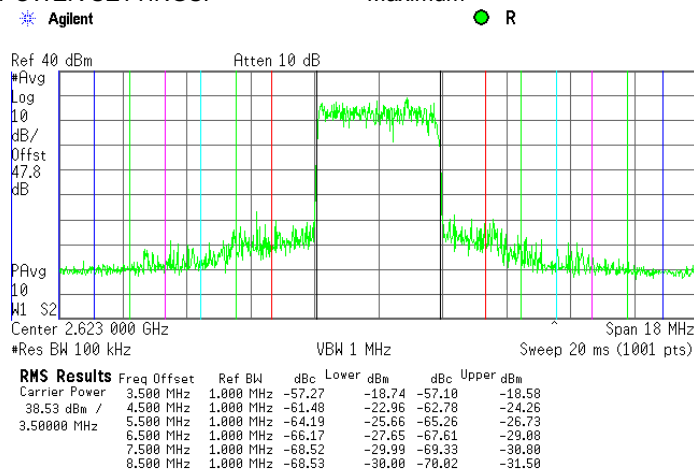

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.29 Emission mask test results at mid carrier frequency, 3.5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 14 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

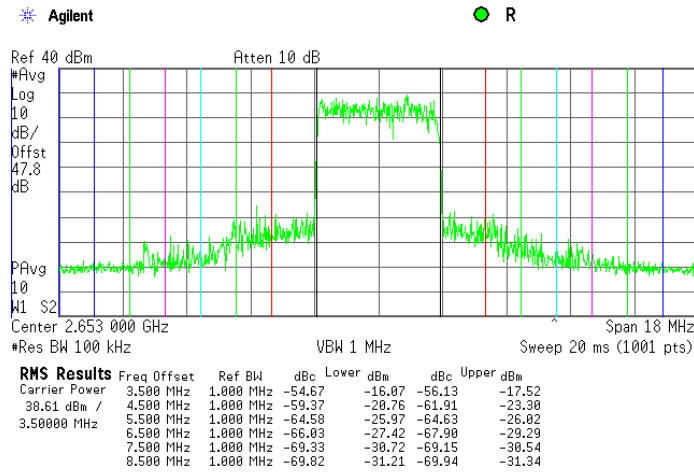

Plot 7.3.30 Emission mask test results at high carrier frequency, 3.5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 14 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

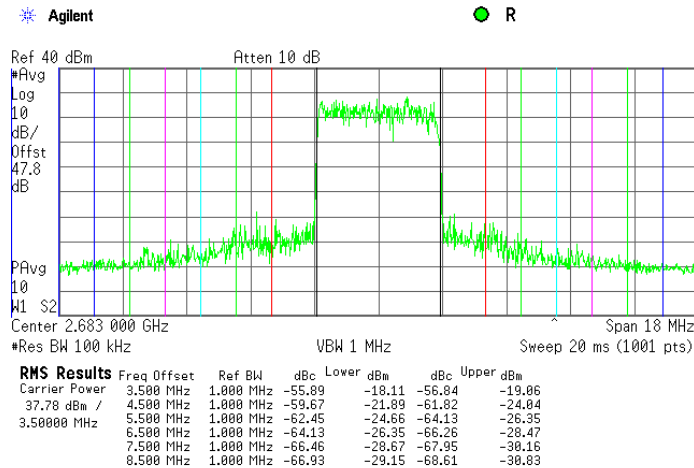

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.31 Emission mask test results at low carrier frequency, 5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 7 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

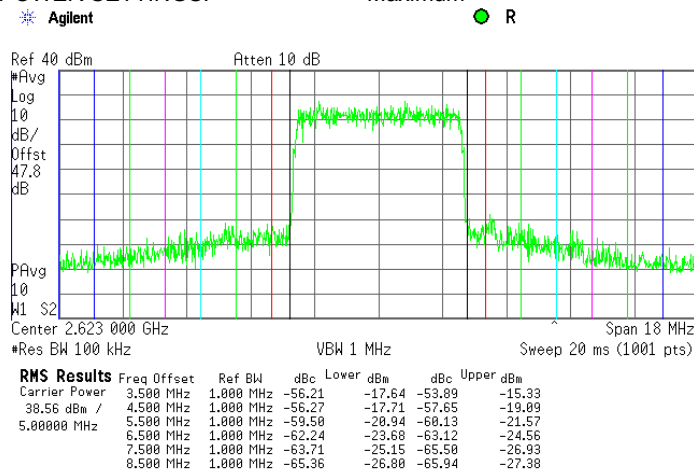

Plot 7.3.32 Emission mask test results at mid carrier frequency, 5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 7 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

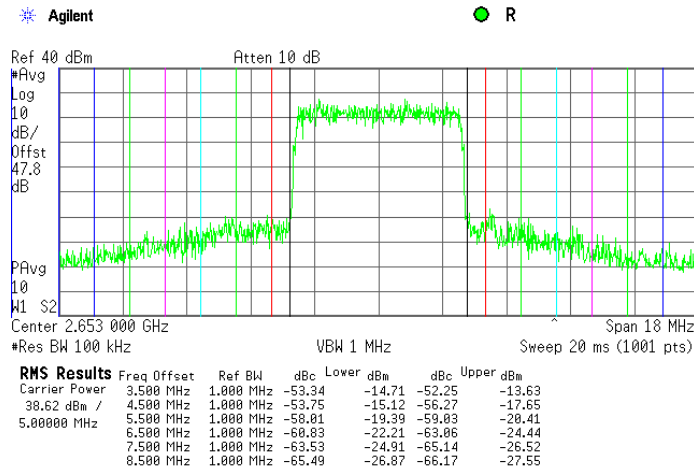

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.33 Emission mask test results at high carrier frequency, 5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 7 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

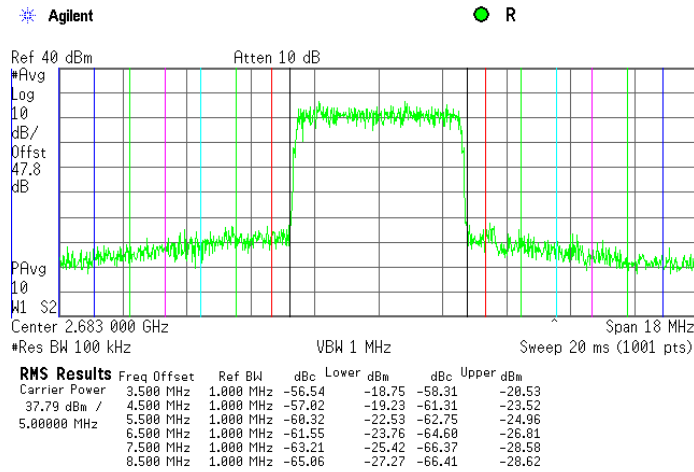

Plot 7.3.34 Emission mask test results at low carrier frequency, 5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 23 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

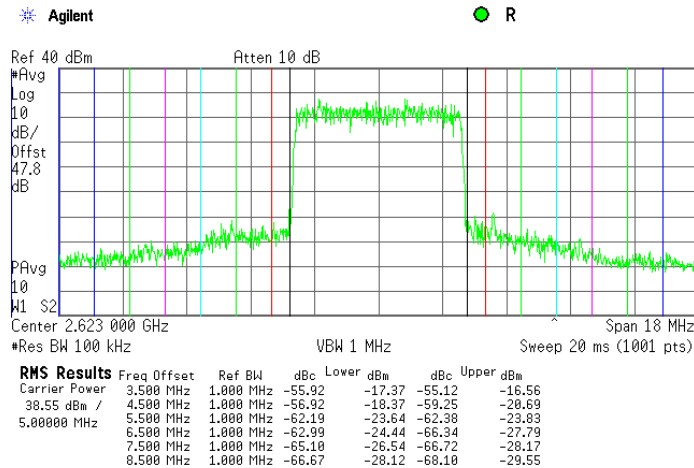

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.35 Emission mask test results at mid carrier frequency, 5 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 23 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

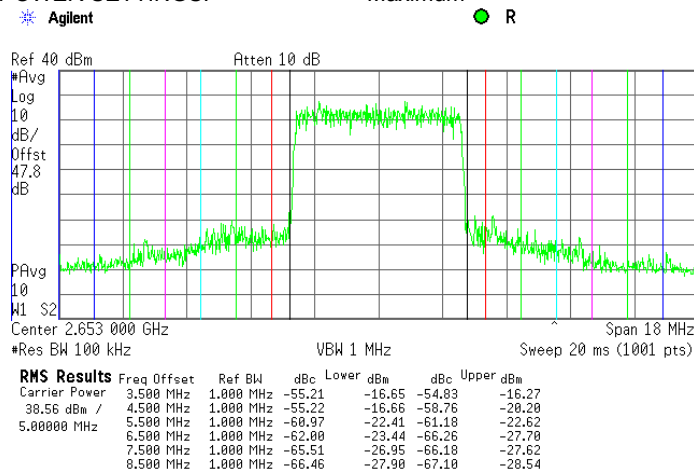

Plot 7.3.36 Emission mask test results at high carrier frequency 5 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 23 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

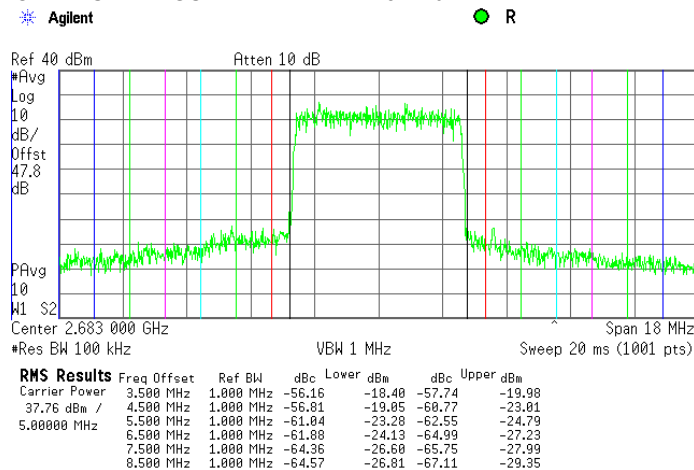

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.37 Emission mask test results at low carrier frequency, 7 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 8 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

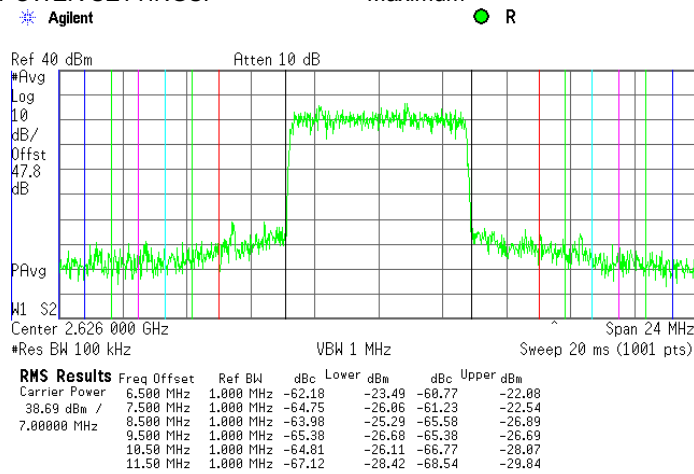

Plot 7.3.38 Emission mask test results at mid carrier frequency, 7 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 8 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

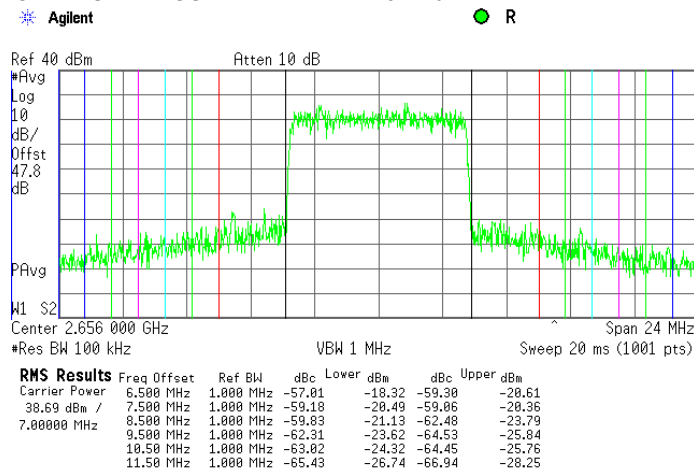

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.39 Emission mask test results at high carrier frequency, 7 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 8 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

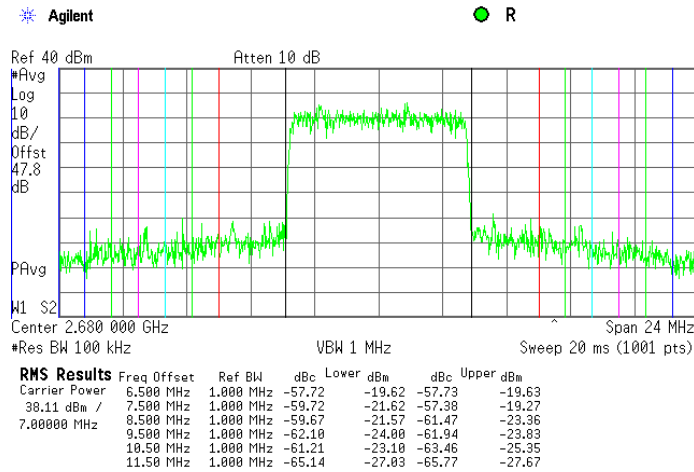

Plot 7.3.40 Emission mask test results at low carrier frequency, 7 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 28 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

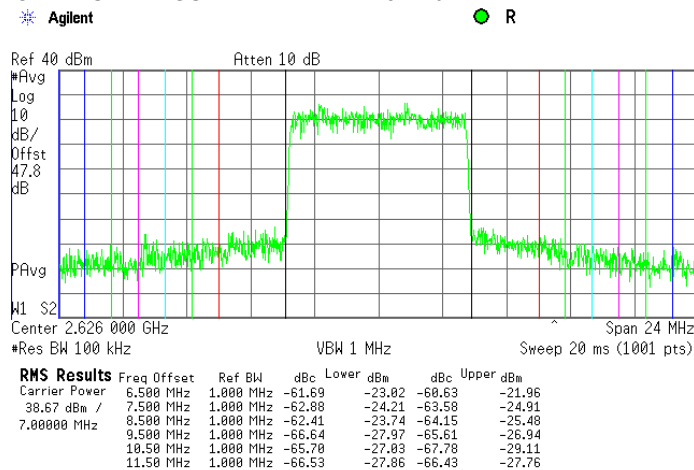

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.41 Emission mask test results at mid carrier frequency, 7 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 28 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

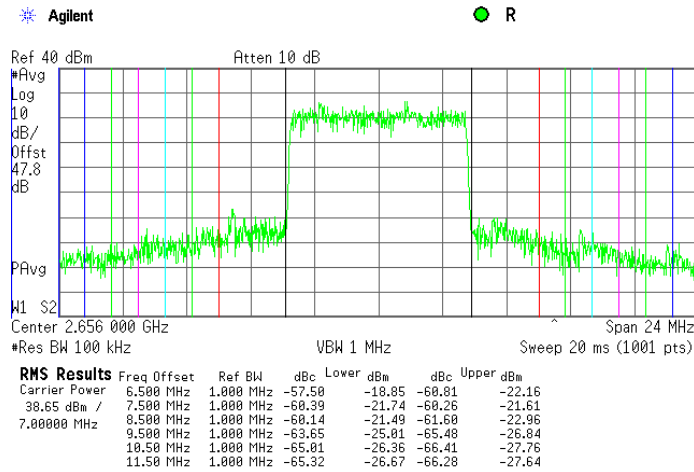

Plot 7.3.42 Emission mask test results at high carrier frequency, 7 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
DETECTOR USED: Average
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 28 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

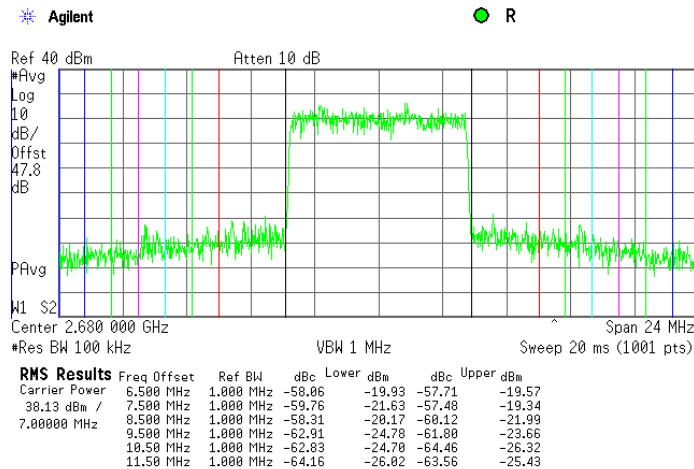

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.43 Emission mask test results at low carrier frequency, 10 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 13 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

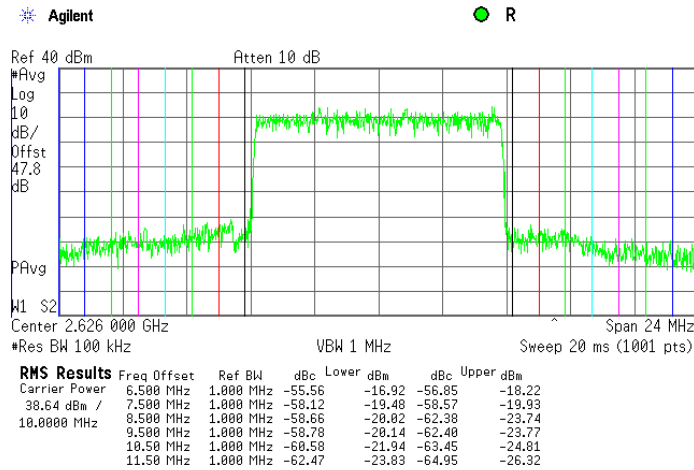

Plot 7.3.44 Emission mask test results at mid carrier frequency, 10 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 13 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

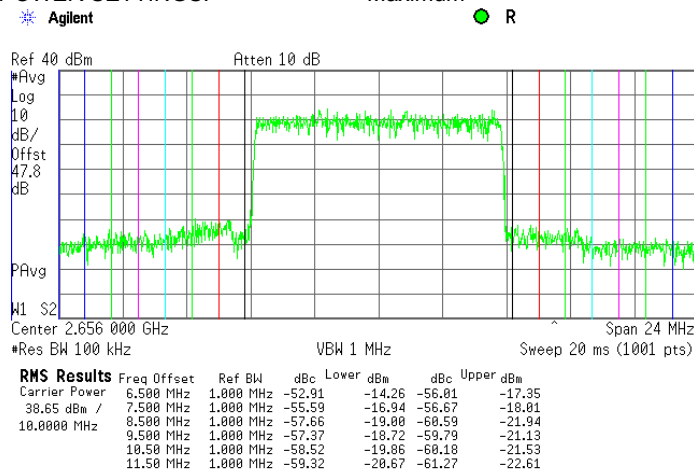

| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions at the band edges | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.45 Emission mask test results at high carrier frequency, 10 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 13 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

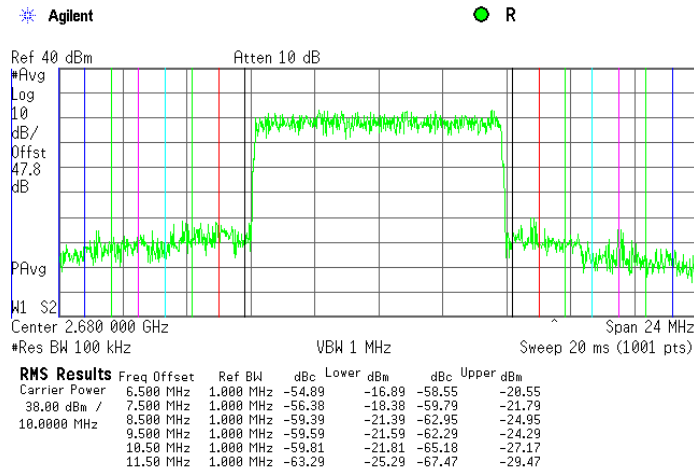

Plot 7.3.46 Emission mask test results at low carrier frequency, 10 MHz EBW (single output)


ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 46 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

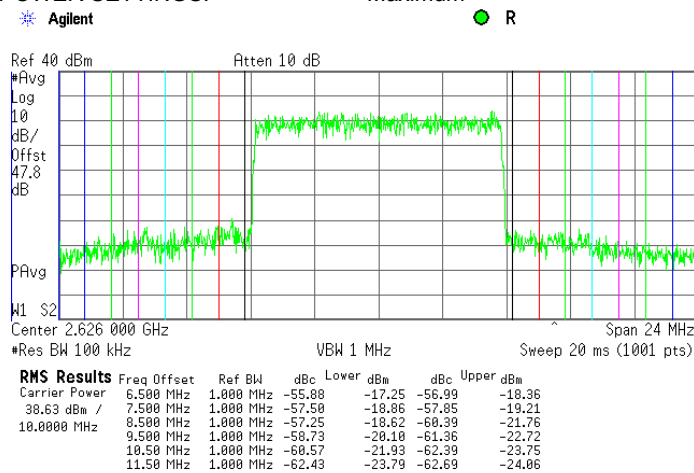

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions at the band edges | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |


Plot 7.3.47 Emission mask test results at mid carrier frequency, 10 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 46 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

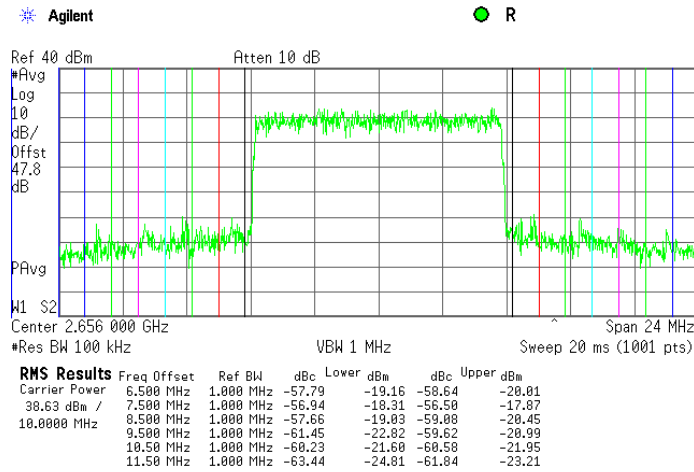

Plot 7.3.48 Emission mask test results at high carrier frequency, 10 MHz EBW (single output)

ASSIGNED FREQUENCY RANGE: 2620.0 – 2690.0 MHz
 DETECTOR USED: Average
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 46 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

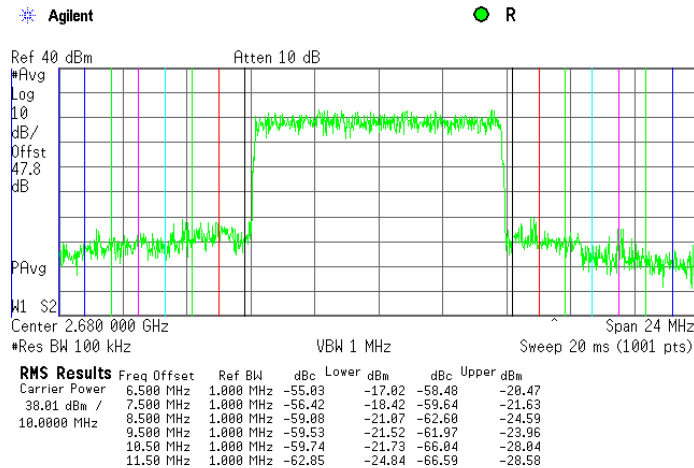

| | | | |
|-----------------------------|-------------------------------|---|-----------------------------|
| Test specification: | | Section 27.53(m)(2), Radiated spurious emissions | |
| Test procedure: | | Section 27.53(m)(2) | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/5/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |

7.4 Radiated spurious emission measurements

7.4.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Radiated spurious emission test limits

| Frequency, MHz | Attenuation below carrier, dBc | ERP of spurious, dBm | Equivalent field strength limit @ 3m, dB(μ V/m) ^{***} |
|------------------------------------|--------------------------------|----------------------|---|
| 0.009 – 10 th harmonic* | 43+10logP ^{**} | -13 | 84.4 |

* - Excluding the in band emission within ± 250 % of the authorized bandwidth from the carrier

** - P is transmitter output power in Watts

*** - Equivalent field strength limit was calculated from maximum allowed ERP of spurious as follows:
 $E = \sqrt{(30 \times P \times 1.64)} / r$, where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

7.4.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.

7.4.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.4.2.3 The worst test results (the lowest margins) were recorded in Table 7.4.2 and shown in the associated plots.

7.4.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.4.3.1 The EUT was set up as shown in Figure 7.4.2, energized and the performance check was conducted.

7.4.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.

7.4.3.3 The worst test results (the lowest margins) were recorded in Table 7.4.2 and shown in the associated plots.

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/5/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |

Figure 7.4.1 Setup for spurious emission field strength measurements in 9 kHz to 30 MHz band


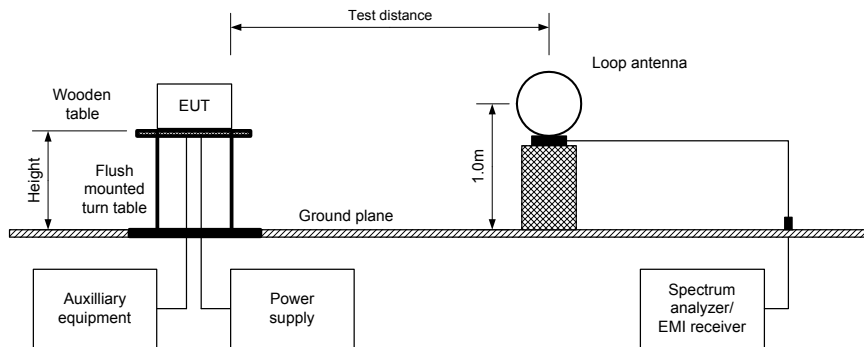


Figure 7.4.2 Setup for spurious emission field strength measurements above 30 MHz



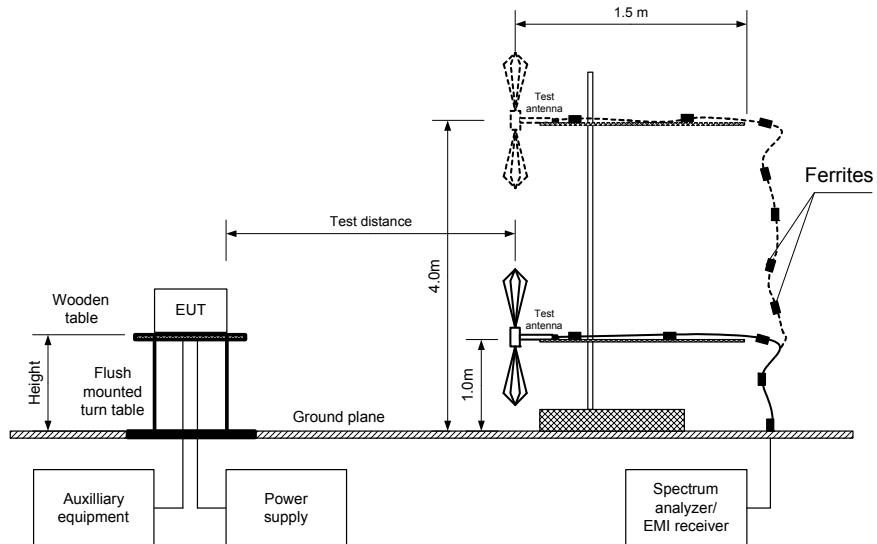

| | |
|---|-------------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | |
| Test procedure: Section 27.53(m)(2) | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/5/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa |
| Relative Humidity: 36 % | |
| Power Supply: 448VDC | |
| Remarks: | |

Table 7.4.2 Spurious emission field strength test results

ASSIGNED FREQUENCY RANGE: 2620 - 2690 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
INVESTIGATED FREQUENCY RANGE: 0.009 – 27000 MHz
DETECTOR USED: Peak
VIDEO BANDWIDTH: > Resolution bandwidth
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)
MODULATION: 64QAM
MODULATING SIGNAL: PRBS
BIT RATE: 14 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

| Frequency, MHz | Field strength, dB(µV/m) | Limit, dB(µV/m) | Margin, dB* | RBW, kHz | Antenna polarization | Antenna height, m | Turn-table position**, degrees |
|--|--------------------------|-----------------|-------------|----------|----------------------|-------------------|--------------------------------|
| Low carrier frequency 2563 MHz | | | | | | | |
| All spurious were found at least 20 dB below the specified limit | | | | | | | |
| Mid carrier frequency 2593 MHz | | | | | | | |
| All spurious were found at least 20 dB below the specified limit | | | | | | | |
| High carrier frequency 2629 MHz | | | | | | | |
| All spurious were found at least 20 dB below the specified limit | | | | | | | |

*- Margin = Field strength of spurious – calculated field strength limit.
**- EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used


| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| HL 0446 | HL 0521 | HL 0604 | HL 0768 | HL 1424 | HL 1984 | HL 2870 | HL 2871 |
| HL 3534 | HL 3535 | HL 3622 | | | | | |

Full description is given in Appendix A.

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/5/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |


Plot 7.4.1 Radiated emission measurements in 9 - 150 kHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

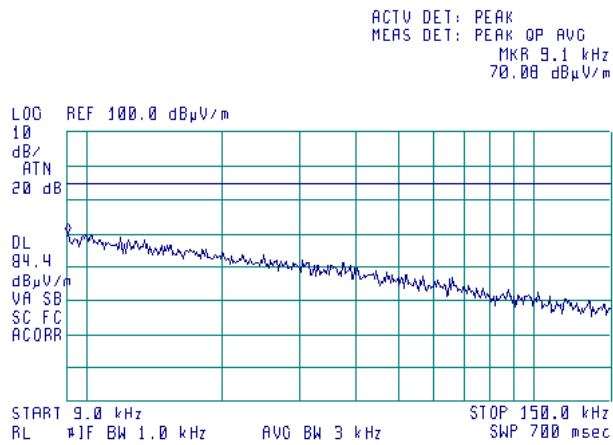

Plot 7.4.2 Radiated emission measurements in 9 - 150 kHz range


TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

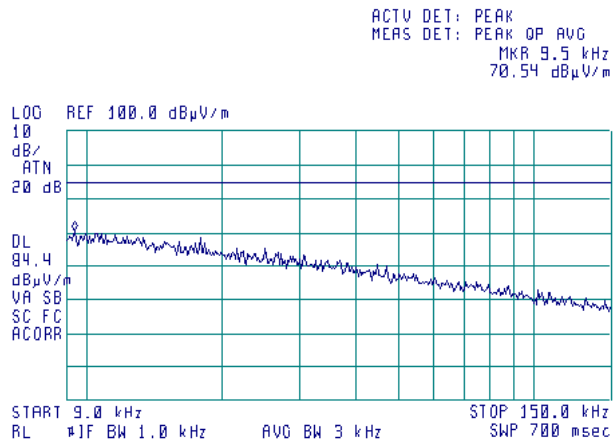

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/5/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |


Plot 7.4.3 Radiated emission measurements in 9 - 150 kHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

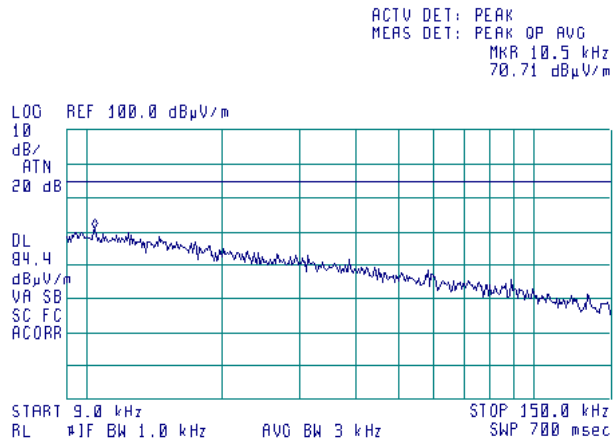

Plot 7.4.4 Radiated emission measurements in 0.15 - 30 MHz range


TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

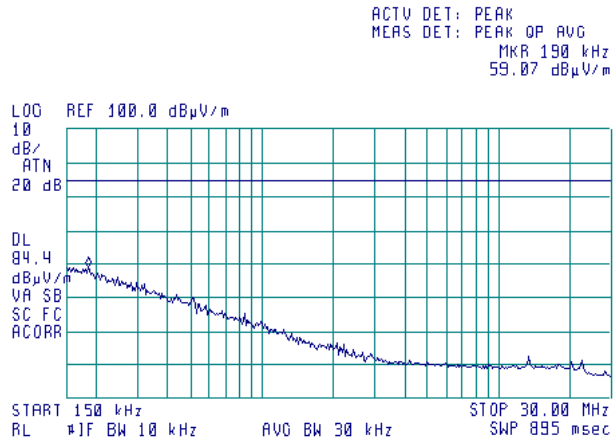

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/5/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |


Plot 7.4.5 Radiated emission measurements in 0.15 - 30 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

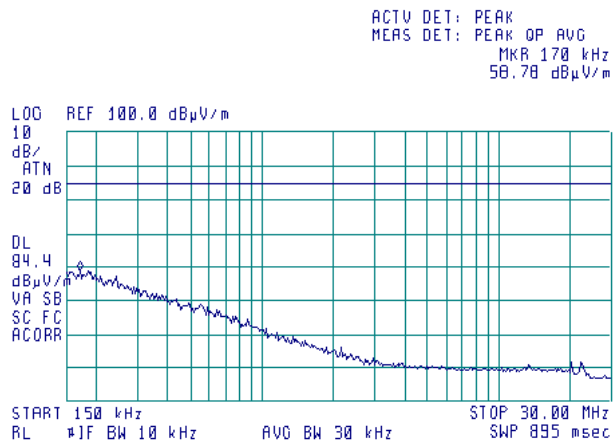

Plot 7.4.6 Radiated emission measurements in 0.15 - 30 MHz range


TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

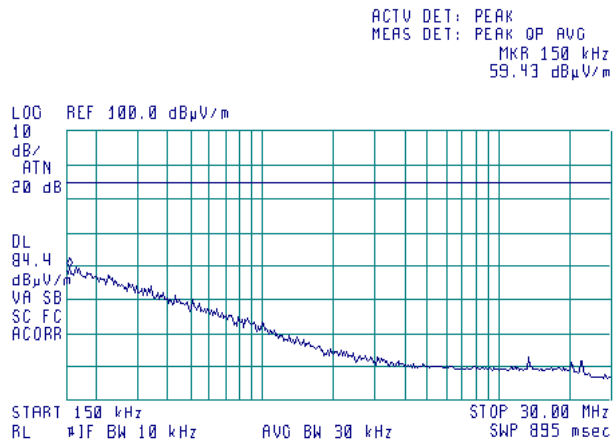

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/5/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |


Plot 7.4.7 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

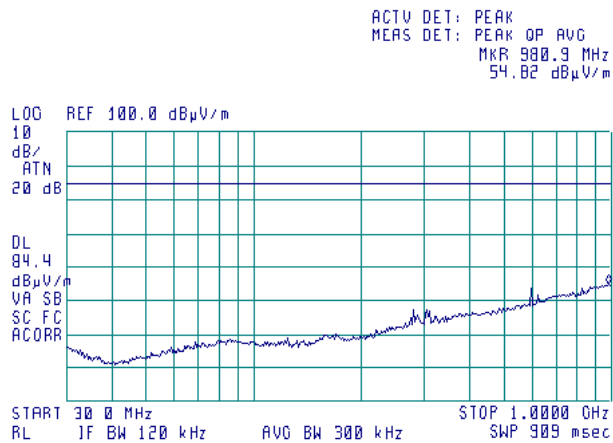

Plot 7.4.8 Radiated emission measurements in 30 - 1000 MHz range


TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

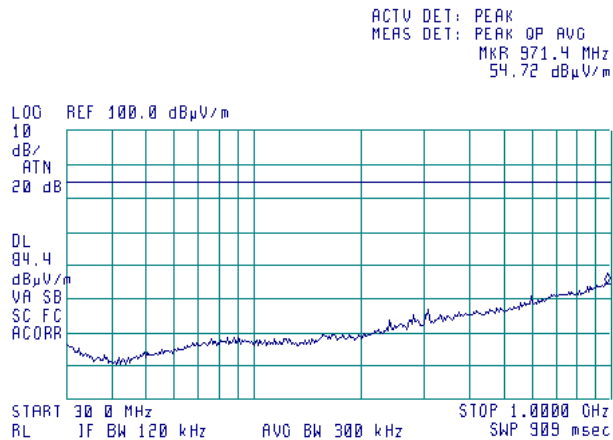

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/5/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |


Plot 7.4.9 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

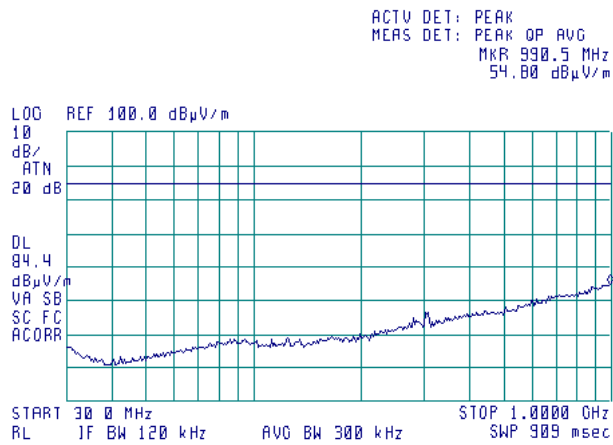

Plot 7.4.10 Radiated emission measurements in 1000 – 6000 MHz range


TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

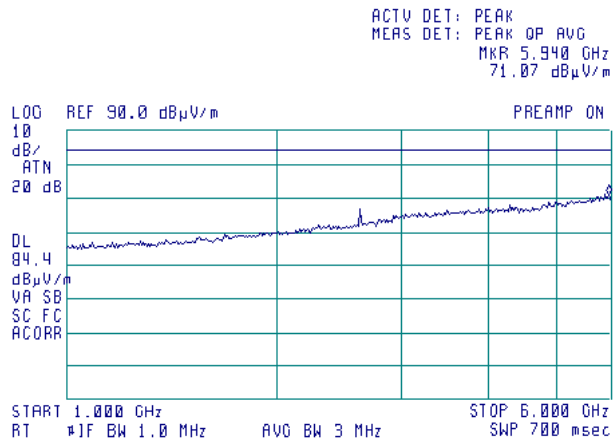

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/5/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |


Plot 7.4.11 Radiated emission measurements in 1000 – 6000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

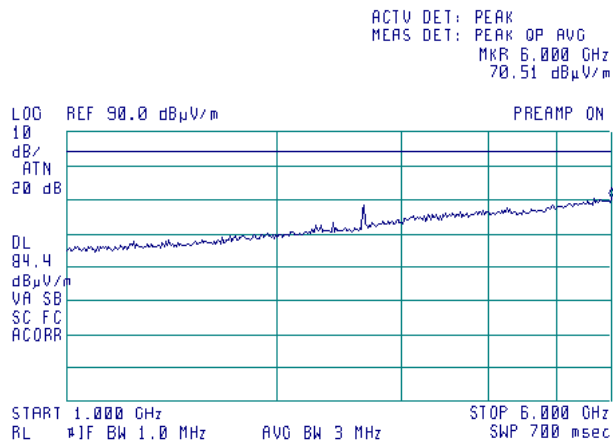

Plot 7.4.12 Radiated emission measurements in 1000 – 6000 MHz range


TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

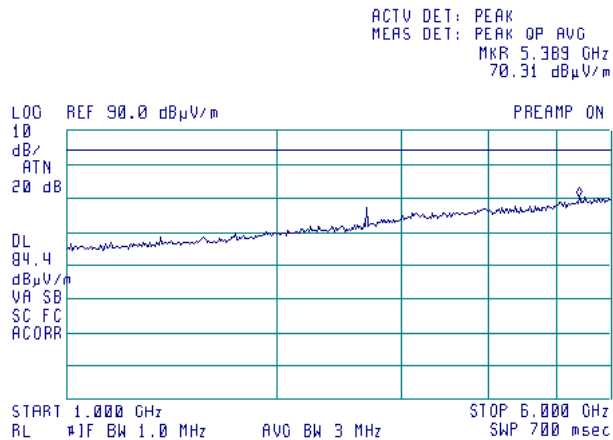

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/5/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |


Plot 7.4.13 Radiated emission measurements in 6000 – 18000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

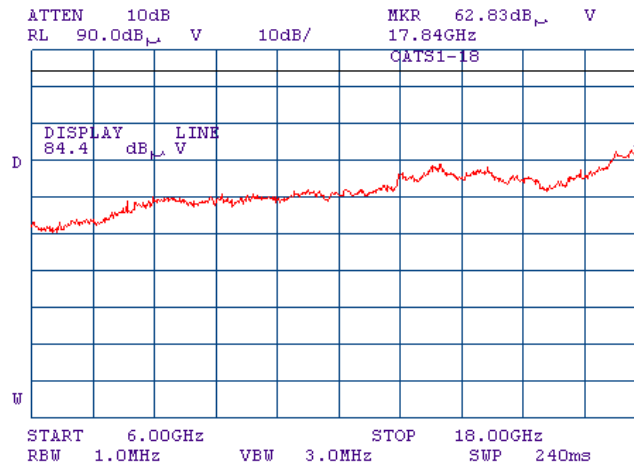

Plot 7.4.14 Radiated emission measurements in 6000 – 18000 MHz range


TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

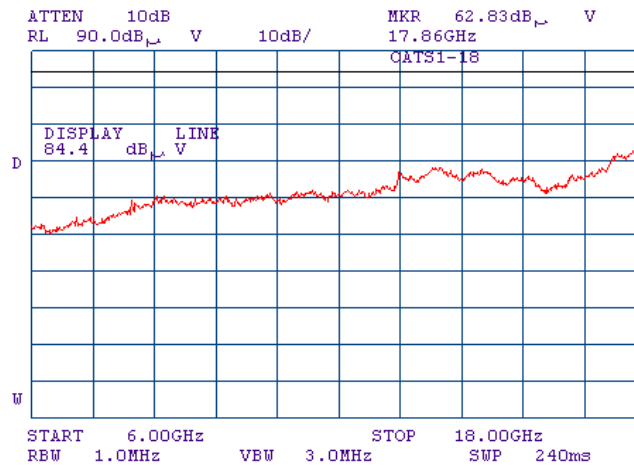

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/5/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |


Plot 7.4.15 Radiated emission measurements in 6000 – 18000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

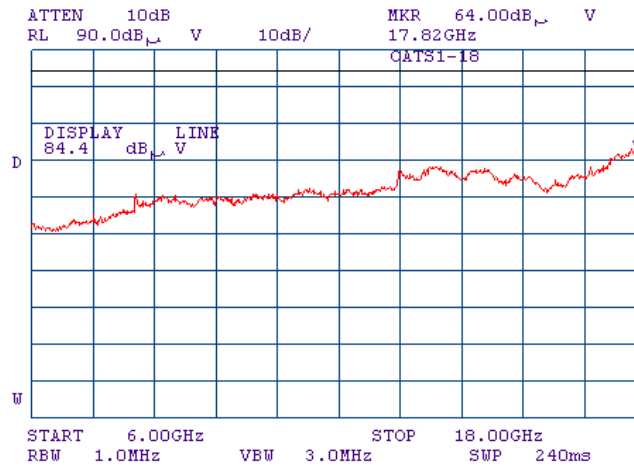

Plot 7.4.16 Radiated emission measurements in 18000 – 26500 MHz range


TEST SITE: OATS
 CARRIER FREQUENCY: Low
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

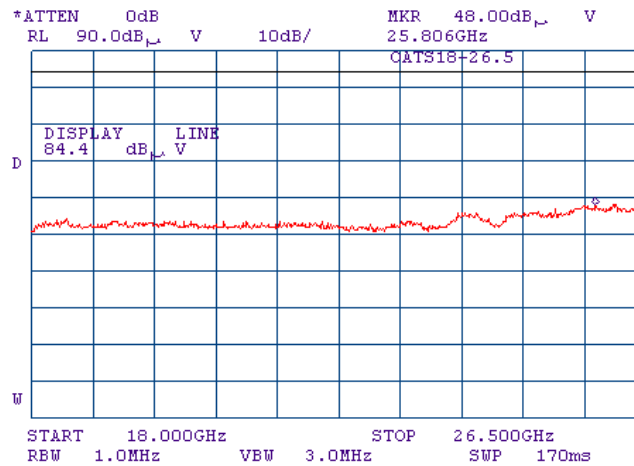

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/5/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |


Plot 7.4.17 Radiated emission measurements in 18000 – 26500 MHz range

TEST SITE: OATS
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

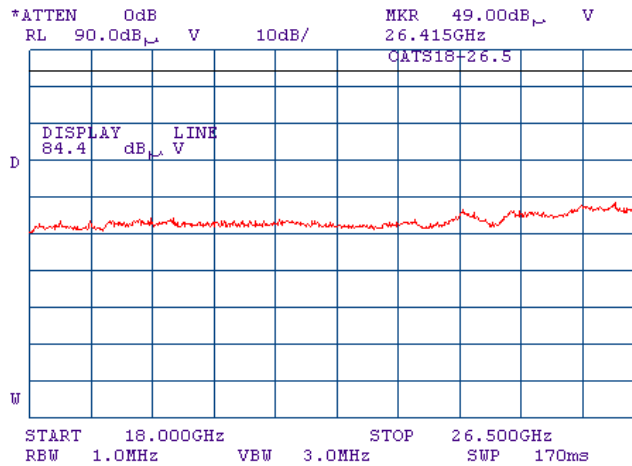

Plot 7.4.18 Radiated emission measurements in 18000 – 26500 MHz range

TEST SITE: OATS
 CARRIER FREQUENCY: High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

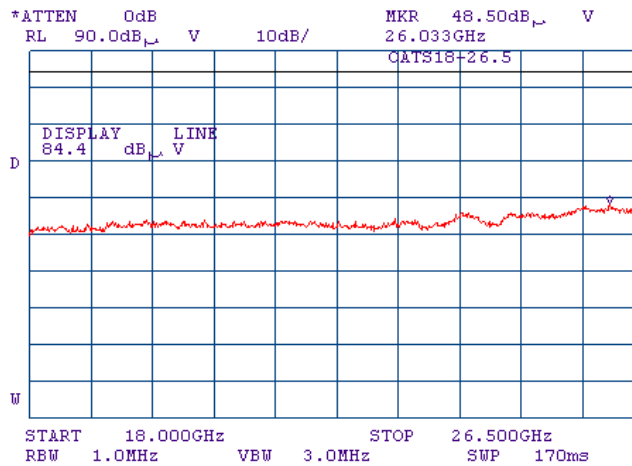




HERMON LABORATORIES

| | |
|---|-------------------------------|
| Test specification: Section 27.53(m)(2), Radiated spurious emissions | |
| Test procedure: Section 27.53(m)(2) | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/5/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa |
| Relative Humidity: 36 % | |
| Power Supply: 448VDC | |
| Remarks: | |

Plot 7.4.19 Radiated emission measurements in 26500 – 27000 MHz range


| | |
|-----------------------|-------------------------|
| TEST SITE: | OATS |
| CARRIER FREQUENCY: | Low |
| ANTENNA POLARIZATION: | Vertical and Horizontal |
| TEST DISTANCE: | 3 m |

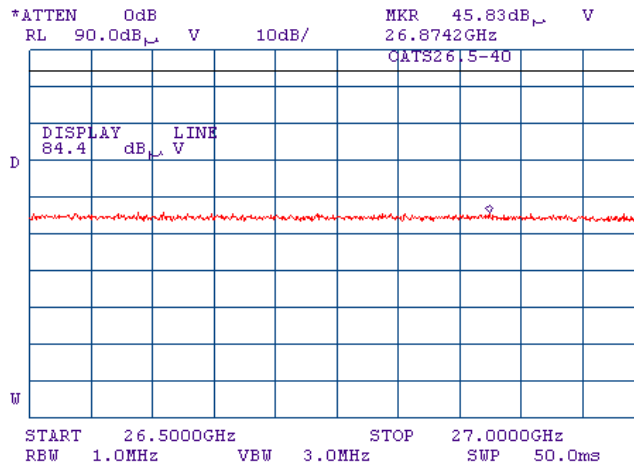

| | | | |
|-----------------------------|---|--------------------------------|-----------------------------|
| Test specification: | Section 27.53(m)(2), Radiated spurious emissions | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/5/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1015 hPa | Relative Humidity: 36 % | Power Supply: 448VDC |
| Remarks: | | | |


Plot 7.4.20 Radiated emission measurements in 26500 – 27000 MHz range

TEST SITE: OATS
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

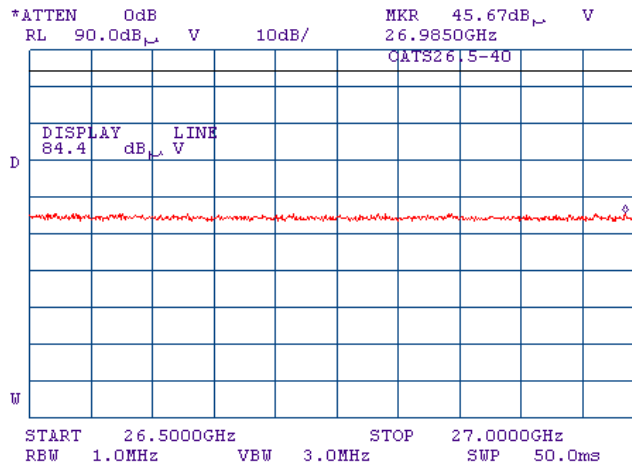

Plot 7.4.21 Radiated emission measurements in 26500 – 27000 MHz range

TEST SITE: OATS
 CARRIER FREQUENCY: High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

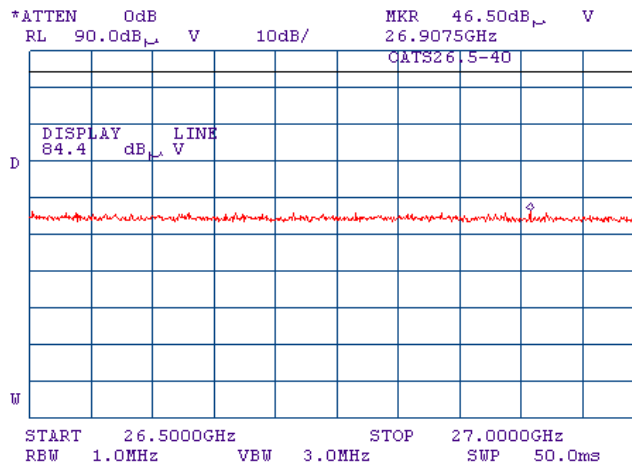

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

7.5 Spurious emissions at RF antenna connector test

7.5.1 General

This test was performed to measure spurious emissions at RF antenna connector. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Spurious emission limits

| Frequency, MHz | Attenuation below carrier, dBc | ERP of spurious, dBm |
|------------------------|--------------------------------|----------------------|
| 0.009 – 10th harmonic* | 43+10logP* | -13.0 |

* - P is transmitter output power in Watts

7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1 or Figure 7.5.2, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.5.2.3 The spurious emission was measured with spectrum analyzer as provided in Table 7.5.2 and the associated plots.

Figure 7.5.1 Spurious emission test setup, single output





Figure 7.5.2 Spurious emission test setup, combined output



| | |
|--|-------------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions | |
| Test procedure: Section 27.53(m)(2) | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/2/2010 | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa |
| Relative Humidity: 39 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.5.2 Spurious emission test results

ASSIGNED FREQUENCY RANGE: 2620 - 2690 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 27000 MHz
 DETECTOR USED: Peak
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATION: 64QAM
 MODULATING SIGNAL: PRBS
 BIT RATE: 14 Mbps
 TRANSMITTER OUTPUT POWER: Maximum

| Frequency, MHz | SA reading, dBm | Attenuator, dB | Cable loss, dB | RBW, kHz | Spurious emission, dBm | Attenuation below carrier, dBc | Limit, dBc | Margin, dB* | Verdict |
|--|-----------------|----------------|----------------|----------|------------------------|--------------------------------|------------|-------------|---------|
| Low carrier frequency | | | | | | | | | |
| All spurious were found at least 20 dB below the specified limit | | | | | | | | | Pass |
| Mid carrier frequency | | | | | | | | | |
| All spurious were found at least 20 dB below the specified limit | | | | | | | | | Pass |
| High carrier frequency | | | | | | | | | |
| All spurious were found at least 20 dB below the specified limit | | | | | | | | | Pass |

*- Margin = Spurious emission – specification limit.


Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| HL 0446 | HL 0521 | HL 0604 | HL 0768 | HL 1424 | HL 1984 | HL 2870 | HL 2871 |
| HL 3534 | HL 3535 | HL 3622 | | | | | |


Full description is given in Appendix A.

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.1 Spurious emission measurements in 9 - 150 kHz range at low carrier frequency, single output

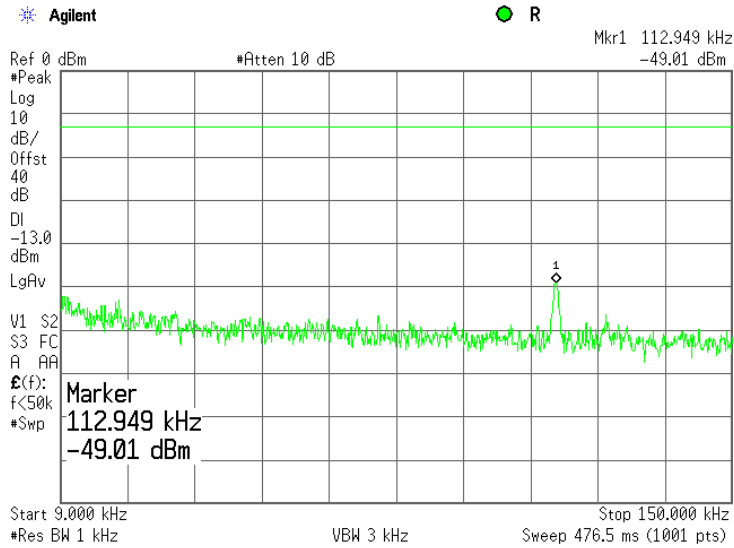


Plot 7.5.2 Spurious emission measurements in 9 - 150 kHz range at mid carrier frequency, single output

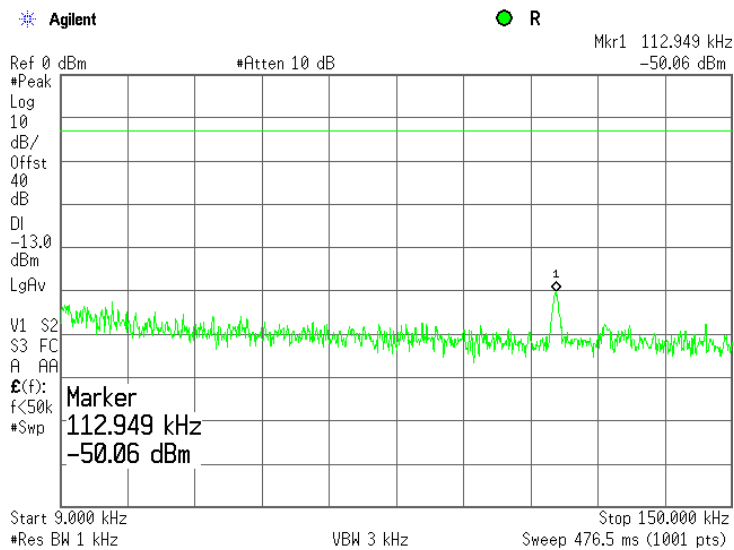


| | | | |
|-----------------------------|-------------------------------|--|----------------------------|
| Test specification: | | Section 27.53(m)(2), Conducted spurious emissions | |
| Test procedure: | | Section 27.53(m)(2) | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.3 Spurious emission measurements in 9 - 150 kHz range at high carrier frequency, single output

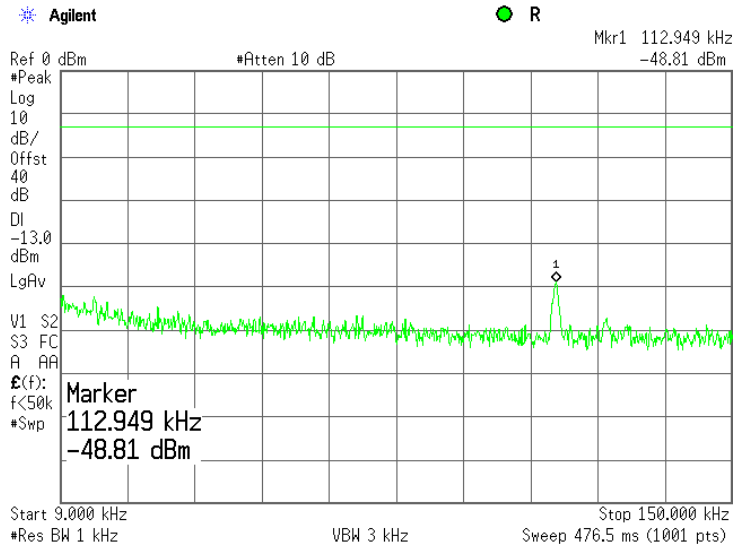


Plot 7.5.4 Spurious emission measurements in 0.15 - 30.0 MHz range at low carrier frequency, single output

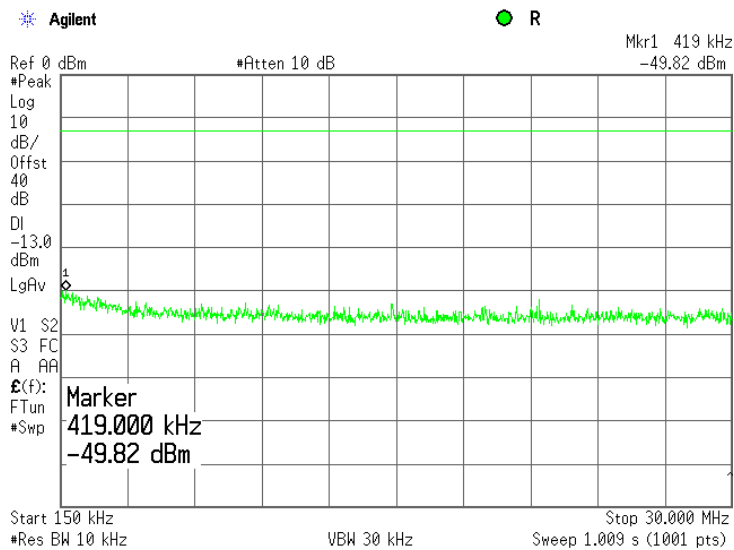


| | | | |
|-----------------------------|-------------------------------|--|----------------------------|
| Test specification: | | Section 27.53(m)(2), Conducted spurious emissions | |
| Test procedure: | | Section 27.53(m)(2) | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.5 Spurious emission measurements in 0.15 - 30.0 MHz range at mid carrier frequency, single output

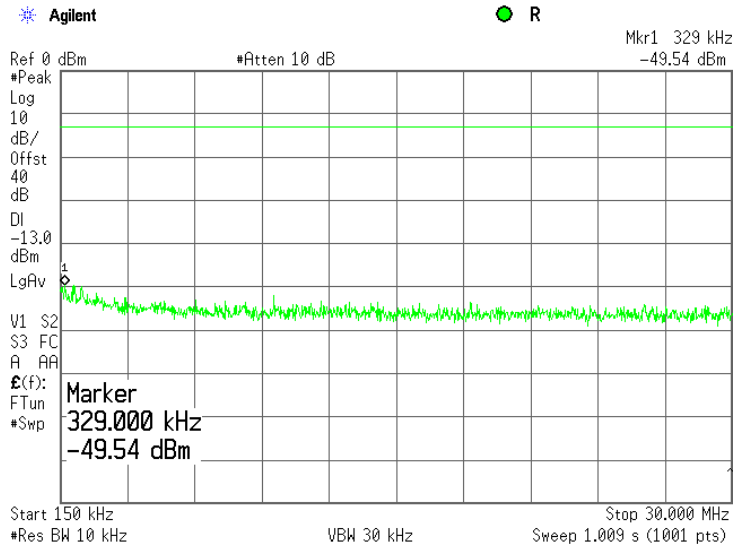


Plot 7.5.6 Spurious emission measurements in 0.15 - 30.0 MHz range at high carrier frequency, single output

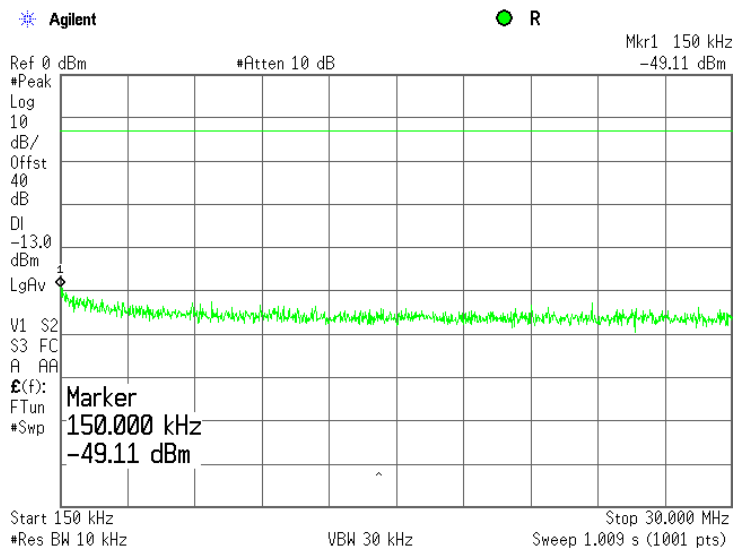


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.7 Spurious emission measurements in 30.0 – 1000.0 MHz range at low carrier frequency, single output

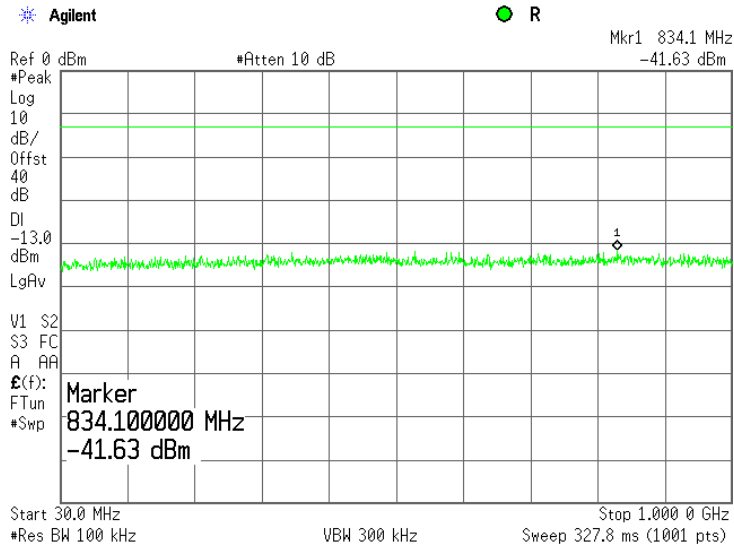


Plot 7.5.8 Spurious emission measurements in 30.0 – 1000.0 MHz range at mid carrier frequency, single output

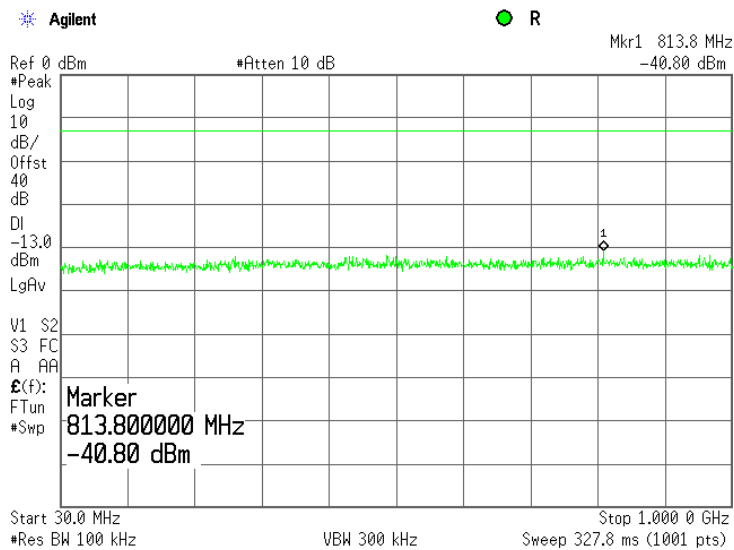


| | | | |
|-----------------------------|-------------------------------|--|----------------------------|
| Test specification: | | Section 27.53(m)(2), Conducted spurious emissions | |
| Test procedure: | | Section 27.53(m)(2) | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.9 Spurious emission measurements in 30.0 – 1000.0 MHz range at high carrier frequency, single output

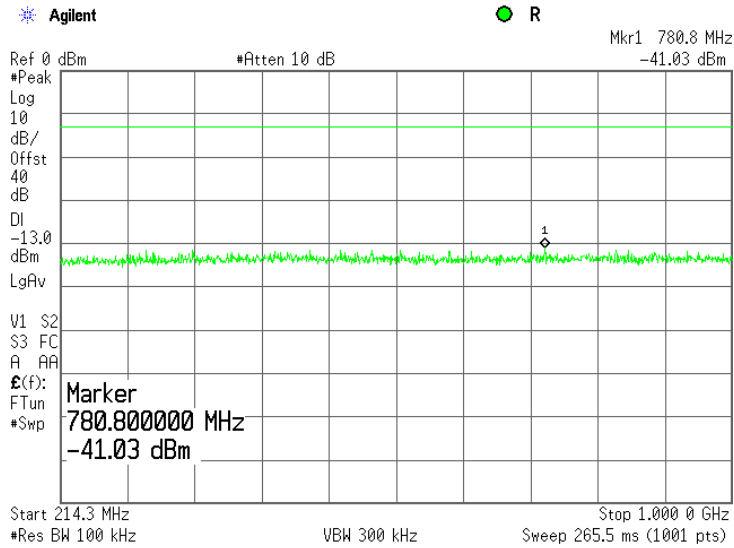


Plot 7.5.10 Spurious emission measurements in 1000.0 – 3000.0 MHz range at low carrier frequency, single output

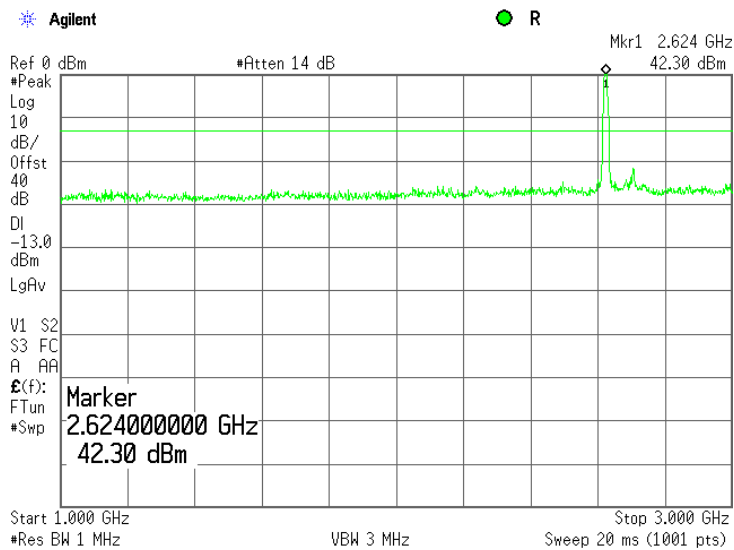


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.11 Spurious emission measurements in 1000.0 – 3000.0 MHz range at mid carrier frequency, single output

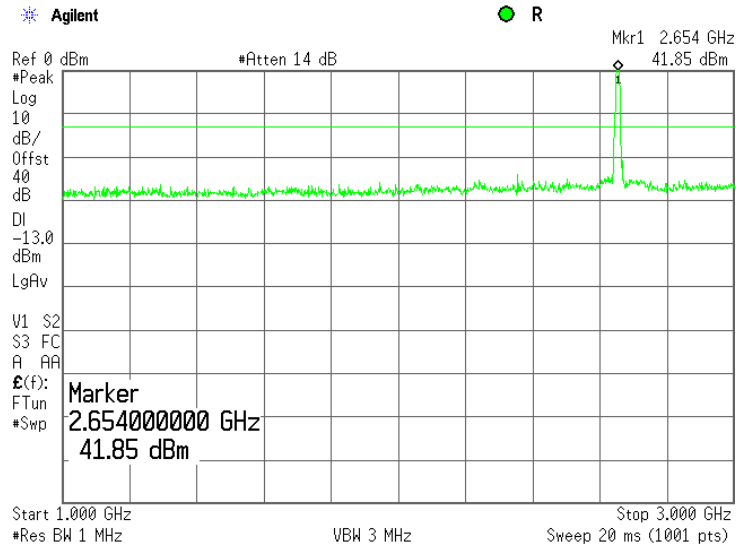


Plot 7.5.12 Spurious emission measurements in 1000.0 – 3000.0 MHz at high carrier frequency, single output

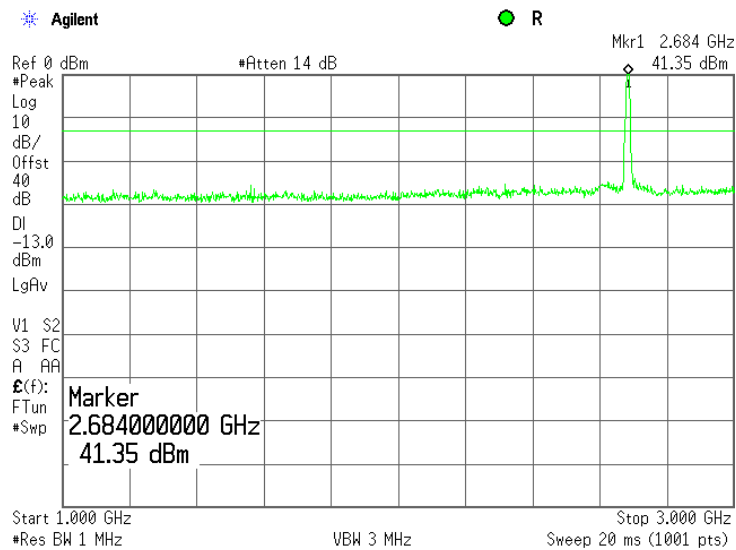


| | | | |
|-----------------------------|-------------------------------|--|----------------------------|
| Test specification: | | Section 27.53(m)(2), Conducted spurious emissions | |
| Test procedure: | | Section 27.53(m)(2) | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.13 Spurious emission measurements in 3000 – 18000 MHz range at low carrier frequency, single output

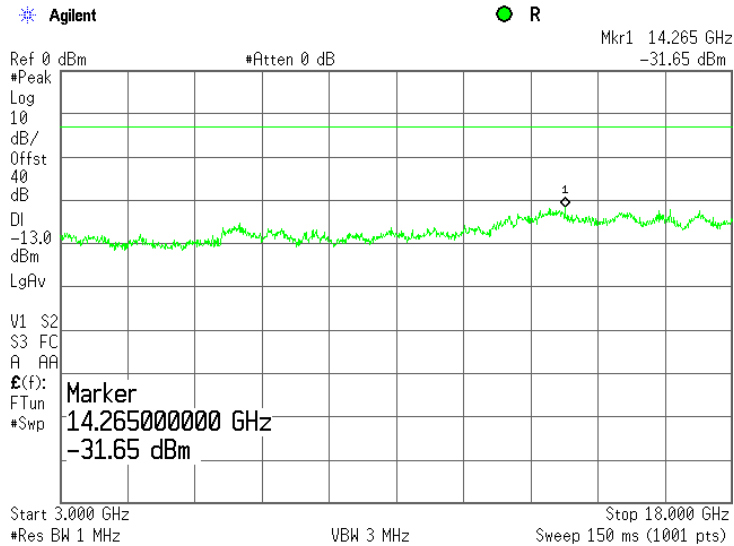


Plot 7.5.14 Spurious emission measurements in 3000 – 18000 MHz range at mid carrier frequency, single output

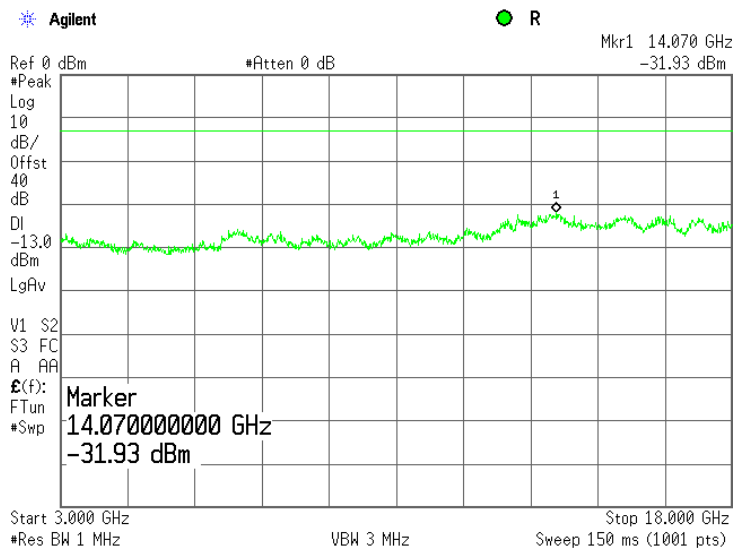


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.15 Spurious emission measurements in 3000 – 18000 MHz range at high carrier frequency, single output

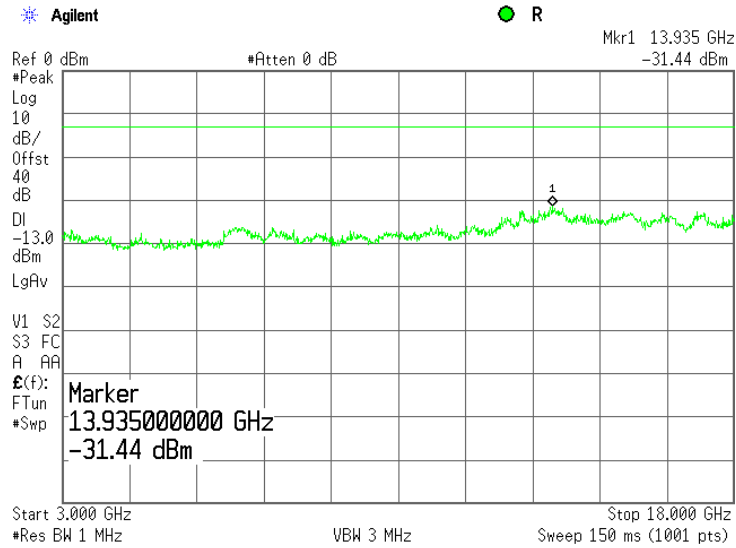


Plot 7.5.16 Spurious emission measurements in 18000 – 25000 MHz range at low carrier frequency, single outputs

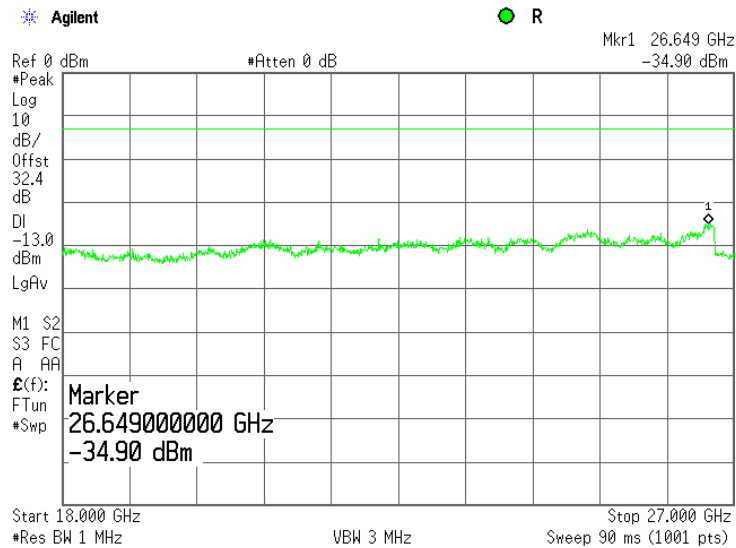


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.17 Spurious emission measurements in 18000 – 25000 MHz range at mid carrier frequency, single outputs

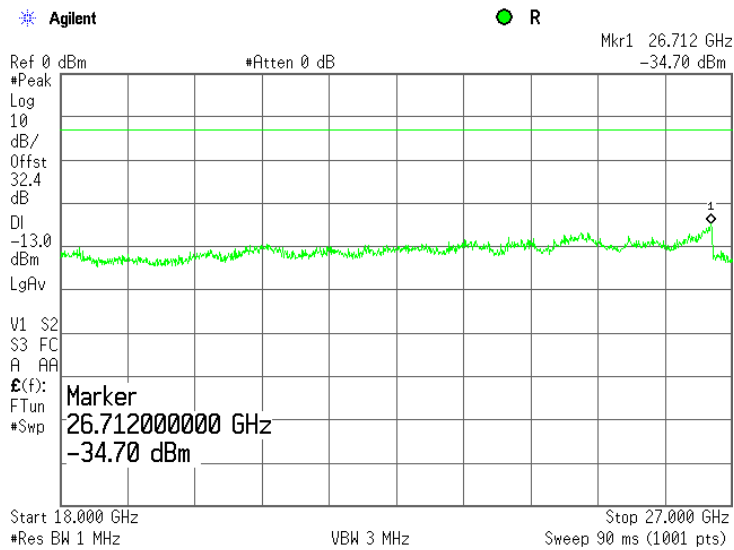


Plot 7.5.18 Spurious emission measurements in 18000 – 25000 MHz range at high carrier frequency, single outputs

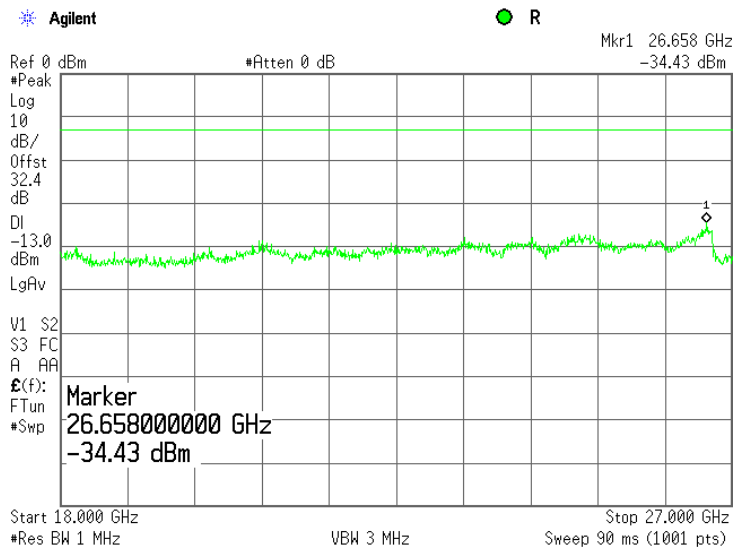


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.19 Spurious emission measurements in 500.0 – 1000.0 MHz range at low carrier frequency, combined outputs

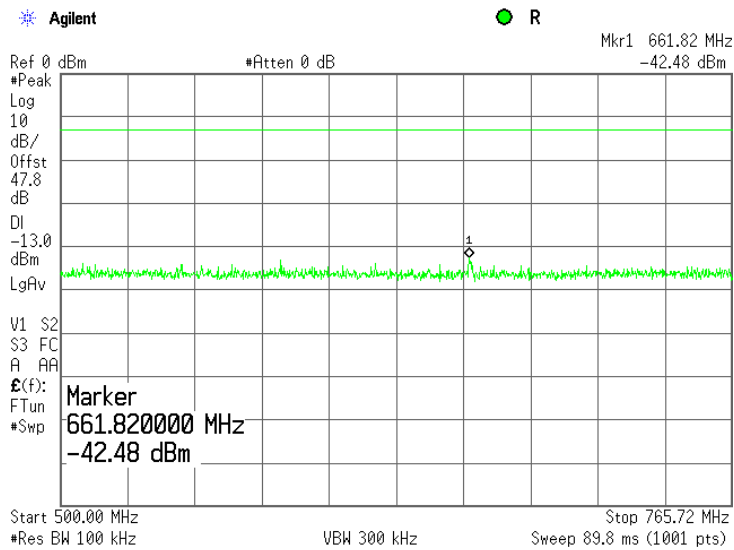


Plot 7.5.20 Spurious emission measurements in 500.0 – 1000.0 MHz range at mid carrier frequency, combined outputs

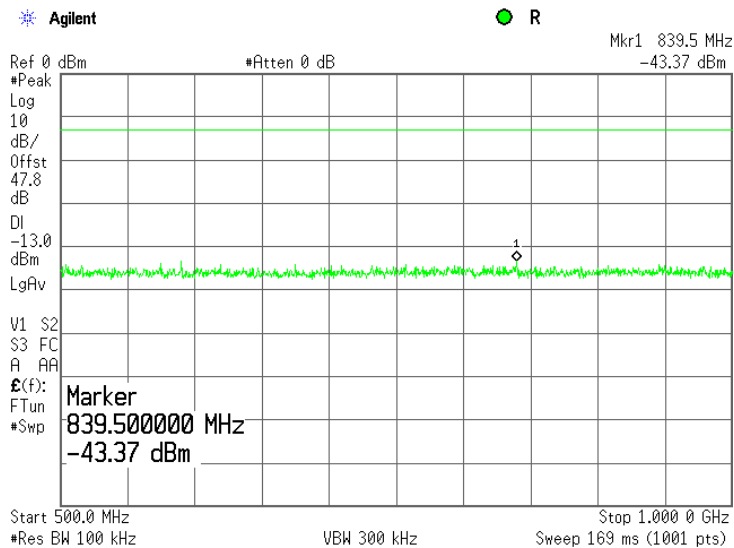


| | | | |
|-----------------------------|--|--------------------------------|----------------------------|
| Test specification: | Section 27.53(m)(2), Conducted spurious emissions | | |
| Test procedure: | Section 27.53(m)(2) | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.21 Spurious emission measurements in 500.0 – 1000.0 MHz range at high carrier frequency, combined outputs

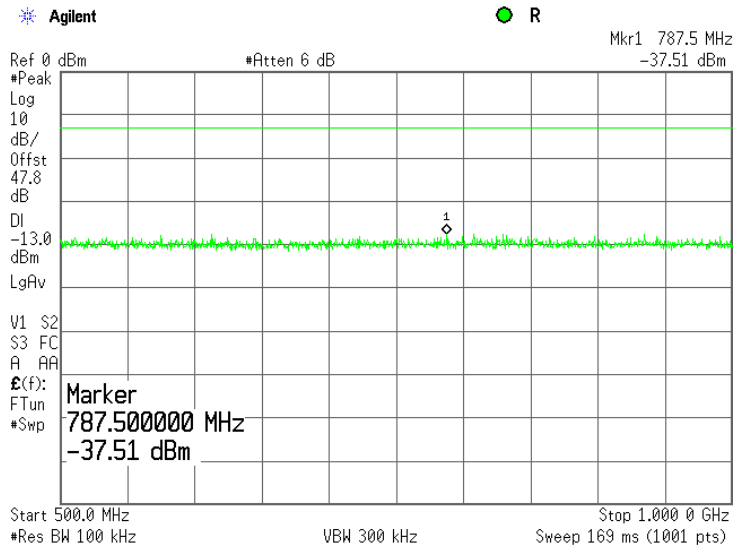


Plot 7.5.22 Spurious emission measurements in 1000.0 – 3000.0 MHz range at low carrier frequency, combined outputs

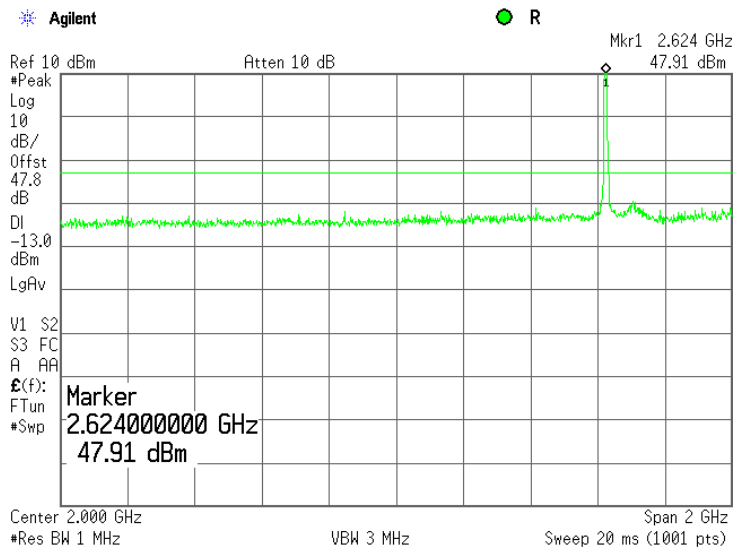


| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.23 Spurious emission measurements in 1000.0 – 3000.0 MHz range at mid carrier frequency, combined outputs

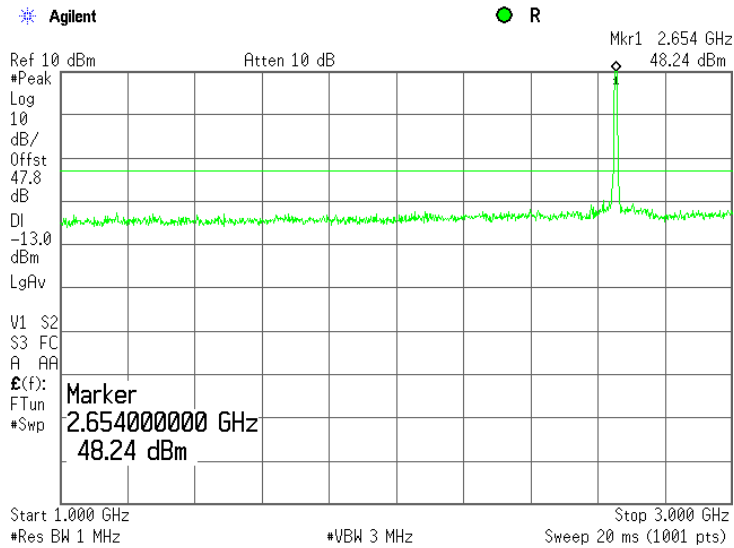


Plot 7.5.24 Spurious emission measurements in 1000.0 – 3000.0 MHz range at high carrier frequency, combined outputs

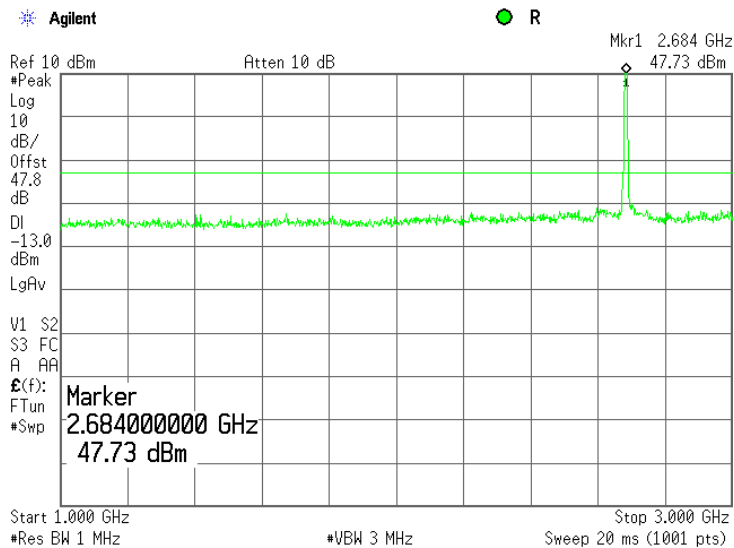


| | | | |
|-----------------------------|-------------------------------|--|----------------------------|
| Test specification: | | Section 27.53(m)(2), Conducted spurious emissions | |
| Test procedure: | | Section 27.53(m)(2) | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/2/2010 | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.25 Spurious emission measurements in 3000 – 18000 MHz range at low carrier frequency, combined outputs

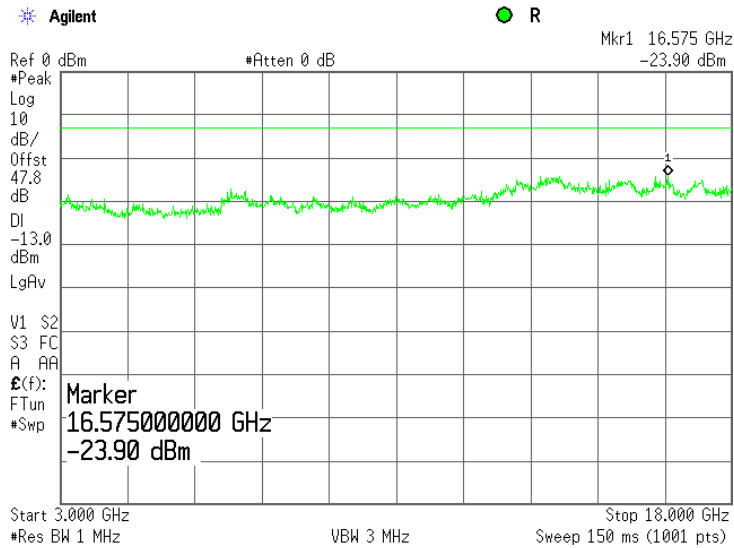


Plot 7.5.26 Spurious emission measurements in 3000 – 18000 MHz range at mid carrier frequency, combined outputs

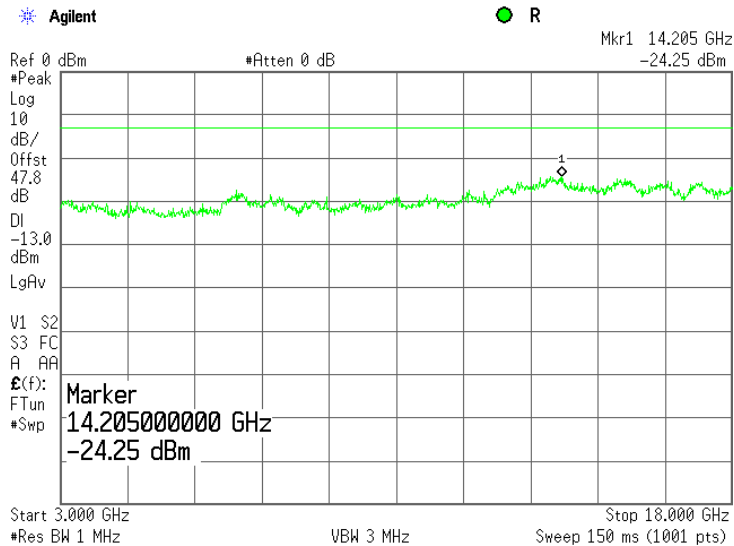

| | | | |
|--|-------------------------------|--------------------------------|----------------------------|
| Test specification: Section 27.53(m)(2), Conducted spurious emissions | | | |
| Test procedure: Section 27.53(m)(2) | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date: 12/2/2010 | | | |
| Temperature: 23.7 °C | Air Pressure: 1020 hPa | Relative Humidity: 39 % | Power Supply: 48VDC |
| Remarks: | | | |

Plot 7.5.27 Spurious emission measurements in 3000 – 18000 MHz range at high carrier frequency, combined outputs

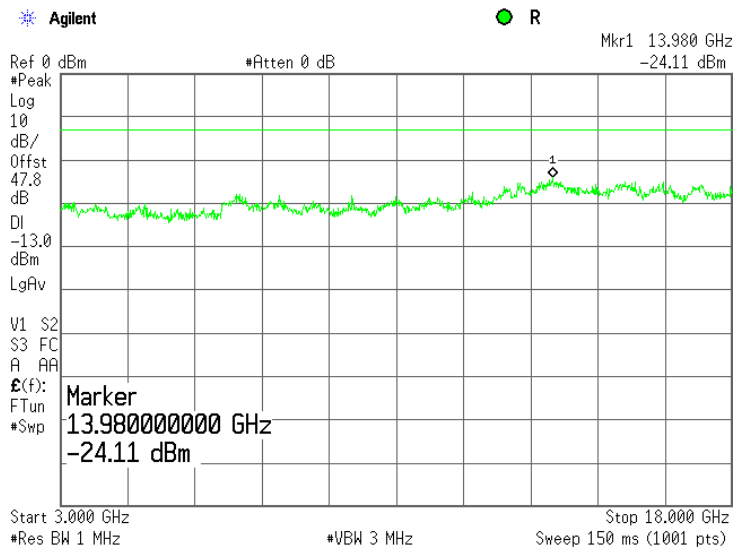

| | | | |
|-----------------------------|-------------------------------|---|----------------------------|
| Test specification: | | Section 27.54, Frequency stability | |
| Test procedure: | | 47 CFR, Section 2.1055 | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 12/6/2010 | | |
| Temperature: 23.2 °C | Air Pressure: 1012 hPa | Relative Humidity: 41 % | Power Supply: 48VDC |
| Remarks: | | | |

7.6 Frequency stability test

7.6.1 General

This test was performed to measure frequency stability of transmitter RF carrier. Specification test limits are given in Table 7.6.1.


Table 7.6.1 Frequency stability limits

| Assigned frequency, MHz | Maximum allowed frequency displacement |
|-------------------------|--|
| 2620.0 – 2690.0 | The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation |

7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked.
- 7.6.2.2 The EUT power was turned off. Temperature within test chamber was set to +30°C and a period of time sufficient to stabilize all of the oscillator circuit components was allowed.
- 7.6.2.3 The EUT was powered on and carrier frequency was measured at start up moment and then every minute until frequency had been stabilized or 10 minutes elapsed whichever reached the last. The EUT was powered off.
- 7.6.2.4 The above procedure was repeated at 0°C and at the lowest test temperature.
- 7.6.2.5 The EUT was powered on and carrier frequency was measured at start up moment and at the end of stabilization period at the rest of test temperatures and voltages. The EUT was powered off.
- 7.6.2.6 Frequency displacement was calculated and compared with the limit as provided in Table 7.6.2 to Table 7.6.4.

Figure 7.6.1 Frequency stability test setup

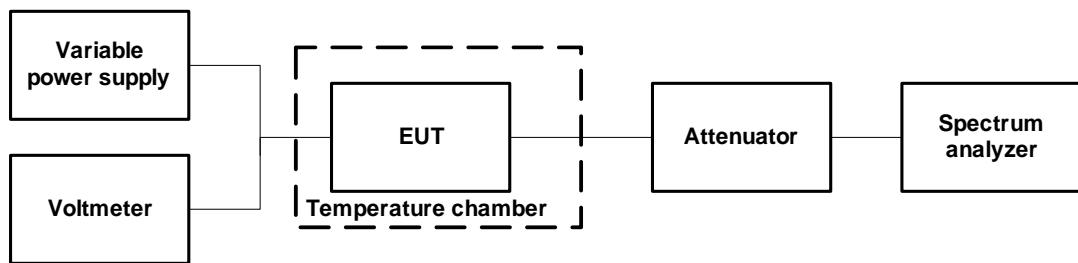

| | |
|---|-------------------------------|
| Test specification: Section 27.54, Frequency stability | |
| Test procedure: 47 CFR, Section 2.1055 | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/6/2010 | |
| Temperature: 23.2 °C | Air Pressure: 1012 hPa |
| Relative Humidity: 41 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.6.2 Frequency stability test results

ASSIGNED FREQUENCY: 2620.0 – 2686.0 MHz
 NOMINAL POWER VOLTAGE: 48 VDC
 TEMPERATURE STABILIZATION PERIOD: 20 min
 POWER DURING TEMPERATURE TRANSITION: Off
 SPECTRUM ANALYZER MODE: Counter
 RESOLUTION BANDWIDTH: 3kHz
 VIDEO BANDWIDTH: 9.1 kHz
 MODULATION: Unmodulated

| T, °C | Voltage, V | Frequency, MHz | | | | | | | Max frequency drift Hz | |
|--|------------|----------------|---------------------|---------------------|---------------------|---------------------|---------------------|----------------------|------------------------|----------|
| | | Start up | 1 st min | 2 nd min | 3 rd min | 4 th min | 5 th min | 10 th min | Positive | Negative |
| Low carrier frequency 2623.0 MHz | | | | | | | | | | |
| -30 | nominal | 2623.000565 | 2623.000362 | 2622.999866 | 2622.999716 | 2622.999647 | 2622.999697 | 2622.999801 | 1276 | 0 |
| -20 | nominal | 2623.000453 | NA | NA | NA | NA | NA | 2623.000493 | 1204 | 0 |
| -10 | nominal | 2622.999676 | NA | NA | NA | NA | NA | 2623.000339 | 1050 | 0 |
| 0 | nominal | 2623.000212 | 2623.000182 | 2623.000175 | 2623.000165 | 2623.000166 | 2623.000144 | 2623.000106 | 923 | 0 |
| 10 | nominal | 2622.999495 | NA | NA | NA | NA | NA | 2622.999295 | 206 | 0 |
| 20 | 15% | 2622.998927 | NA | NA | NA | NA | NA | 2622.998913 | 0 | -362 |
| 20 | nominal | 2622.999499 | NA | NA | NA | NA | NA | 2622.999289* | 210 | 0 |
| 20 | -15% | 2622.998913 | NA | NA | NA | NA | NA | 2622.998929 | 0 | -360 |
| 30 | nominal | 2622.999111 | 2622.999119 | 2622.999103 | 2622.999119 | 2622.999124 | 2622.999126 | 2622.999183 | 0 | -106 |
| 40 | nominal | 2622.999292 | NA | NA | NA | NA | NA | 2622.999346 | 57 | 0 |
| 50 | nominal | 2622.999531 | NA | NA | NA | NA | NA | 2622.999119 | 242 | 0 |
| Mid carrier frequency 2653.0 MHz | | | | | | | | | | |
| -30 | nominal | 2652.999837 | 2652.999858 | 2652.999888 | 2652.999898 | 2652.999912 | 2652.999923 | 2653.000146 | 1375 | 0 |
| -20 | nominal | 2653.000349 | NA | NA | NA | NA | NA | 2653.000457 | 1686 | 0 |
| -10 | nominal | 2653.000353 | NA | NA | NA | NA | NA | 2653.000337 | 1582 | 0 |
| 0 | nominal | 2652.999998 | 2653.000133 | 2653.000228 | 2653.000421 | 2653.000406 | 2653.000357 | 2653.000253 | 1650 | 0 |
| 10 | nominal | 2652.999304 | NA | NA | NA | NA | NA | 2652.999245 | 533 | 0 |
| 20 | 15% | 2652.998886 | NA | NA | NA | NA | NA | 2652.998895 | 124 | 0 |
| 20 | nominal | 2652.999244 | NA | NA | NA | NA | NA | 2652.998771* | 473 | 0 |
| 20 | -15% | 2652.998907 | NA | NA | NA | NA | NA | 2652.998932 | 161 | 0 |
| 30 | nominal | 2652.999019 | 2652.999029 | 2652.999037 | 2652.999027 | 2652.999046 | 2652.999047 | 2652.999095 | 324 | 0 |
| 40 | nominal | 2652.999393 | NA | NA | NA | NA | NA | 2652.999758 | 987 | 0 |
| 50 | nominal | 2652.999977 | NA | NA | NA | NA | NA | 2652.999558 | 1206 | 0 |
| High carrier frequency 2683.0 MHz | | | | | | | | | | |
| -30 | nominal | 2683.000151 | 2683.000256 | 2683.000318 | 2683.000352 | 2683.000371 | 2683.000392 | 2683.000439 | 1821 | 0 |
| -20 | nominal | 2682.998872 | NA | NA | NA | NA | NA | 2683.000291 | 1673 | 0 |
| -10 | nominal | 2683.000354 | NA | NA | NA | NA | NA | 2683.000313 | 1736 | 0 |
| 0 | nominal | 2683.000612 | 2682.999742 | 2682.999825 | 2682.999769 | 2682.999888 | 2682.999874 | 2682.999827 | 1994 | 0 |
| 10 | nominal | 2682.999266 | NA | NA | NA | NA | NA | 2682.999245 | 648 | 0 |
| 20 | 15% | 2682.998879 | NA | NA | NA | NA | NA | 2682.998864 | 261 | 0 |
| 20 | nominal | 2682.998727 | NA | NA | NA | NA | NA | 2682.998618* | 109 | 0 |
| 20 | -15% | 2682.998887 | NA | NA | NA | NA | NA | 2682.998871 | 269 | 0 |
| 30 | nominal | 2682.999006 | 2682.999015 | 2682.998972 | 2682.998963 | 2682.998969 | 2682.998978 | 2682.999028 | 410 | 0 |
| 40 | nominal | 2682.999795 | NA | NA | NA | NA | NA | 2683.000008 | 1390 | 0 |
| 50 | nominal | 2682.999140 | NA | NA | NA | NA | NA | 2683.000029 | 1411 | 0 |

* - Reference frequency

Table 7.6.3 Maximum frequency displacement

| Channel | Maximum frequency displacement | | | |
|-------------------|--------------------------------|----------|----------|----------|
| | ppm | | Hz | |
| | Negative | Positive | Negative | Positive |
| Low (2623.0 MHz) | 0.138 | 0.486 | 362 | 1276 |
| Mid (2653.0 MHz) | 0 | 0.636 | 0 | 1686 |
| High (2683.0 MHz) | 0 | 0.679 | 0 | 1994 |

| | |
|---|-------------------------------|
| Test specification: Section 27.54, Frequency stability | |
| Test procedure: 47 CFR, Section 2.1055 | |
| Test mode: Compliance | Verdict: PASS |
| Date: 12/6/2010 | |
| Temperature: 23.2 °C | Air Pressure: 1012 hPa |
| Relative Humidity: 41 % | |
| Power Supply: 48VDC | |
| Remarks: | |

Table 7.6.4 Transmission occupied bandwidth with frequency drift test results

| Lower measured* band edge, MHz | Upper measured* band edge, MHz | Lower calculated** band edge, MHz | Upper calculated** band edge, MHz | Lower specified band edge, MHz | Upper specified band edge, MHz | Lower margin***, MHz | Upper margin***, MHz | Verdict |
|--------------------------------|--------------------------------|-----------------------------------|-----------------------------------|--------------------------------|--------------------------------|----------------------|----------------------|---------|
| 3.5 MHz BW | | | | | | | | |
| QPSK | | | | | | | | |
| 2621.295000 | 2624.690000 | 2621.294638 | 2624.691276 | 2560.000000 | 2566.000000 | 61.294638 | 58.691276 | Pass |
| 2651.295000 | 2654.675000 | 2651.295000 | 2654.676686 | 2590.000000 | 2596.000000 | 61.295000 | 58.676686 | Pass |
| 2681.300000 | 2684.670000 | 2681.300000 | 2684.671821 | 2626.000000 | 2632.000000 | 55.300000 | 52.671821 | Pass |
| 64QAM | | | | | | | | |
| 2621.295000 | 2624.675000 | 2621.294638 | 2624.676276 | 2560.000000 | 2566.000000 | 61.294638 | 58.676276 | Pass |
| 2651.310000 | 2654.685000 | 2651.310000 | 2654.686686 | 2590.000000 | 2596.000000 | 61.310000 | 58.686686 | Pass |
| 2681.295000 | 2684.670000 | 2681.295000 | 2684.671821 | 2626.000000 | 2632.000000 | 55.295000 | 52.671821 | Pass |
| 5 MHz BW | | | | | | | | |
| QPSK | | | | | | | | |
| 2620.613000 | 2625.338000 | 2620.612638 | 2625.339276 | 2560.000000 | 2566.000000 | 60.612638 | 59.339276 | Pass |
| 2650.613000 | 2655.338000 | 2650.613000 | 2655.339686 | 2590.000000 | 2596.000000 | 60.613000 | 59.339686 | Pass |
| 2680.613000 | 2685.338000 | 2680.613000 | 2685.339821 | 2626.000000 | 2632.000000 | 54.613000 | 53.339821 | Pass |
| 64QAM | | | | | | | | |
| 2620.613000 | 2625.331000 | 2620.612638 | 2625.332276 | 2560.000000 | 2566.000000 | 60.612638 | 59.332276 | Pass |
| 2650.613000 | 2655.338000 | 2650.613000 | 2655.339686 | 2590.000000 | 2596.000000 | 60.613000 | 59.339686 | Pass |
| 2680.613000 | 2685.338000 | 2680.613000 | 2685.339821 | 2626.000000 | 2632.000000 | 54.613000 | 53.339821 | Pass |
| 7 MHz BW | | | | | | | | |
| QPSK | | | | | | | | |
| 2622.610000 | 2629.340000 | 2622.609638 | 2629.341276 | 2560.000000 | 2572.000000 | 62.609638 | 57.341276 | Pass |
| 2652.640000 | 2659.340000 | 2652.640000 | 2659.341686 | 2590.000000 | 2602.000000 | 62.640000 | 57.341686 | Pass |
| 2676.670000 | 2683.330000 | 2676.670000 | 2683.331821 | 2620.000000 | 2632.000000 | 56.670000 | 51.331821 | Pass |
| 64QAM | | | | | | | | |
| 2622.670000 | 2629.340000 | 2622.669638 | 2629.341276 | 2560.000000 | 2572.000000 | 62.669638 | 57.341276 | Pass |
| 2652.670000 | 2659.370000 | 2652.670000 | 2659.371686 | 2590.000000 | 2602.000000 | 62.670000 | 57.371686 | Pass |
| 2676.670000 | 2683.330000 | 2676.670000 | 2683.331821 | 2620.000000 | 2632.000000 | 56.670000 | 51.331821 | Pass |
| 10 MHz BW | | | | | | | | |
| QPSK | | | | | | | | |
| 2621.365000 | 2630.650000 | 2621.364638 | 2630.651276 | 2560.000000 | 2572.000000 | 61.364638 | 58.651276 | Pass |
| 2651.350000 | 2660.650000 | 2651.350000 | 2660.651686 | 2590.000000 | 2602.000000 | 61.350000 | 58.651686 | Pass |
| 2675.365000 | 2684.650000 | 2675.365000 | 2684.651821 | 2620.000000 | 2632.000000 | 55.365000 | 52.651821 | Pass |
| 64QAM | | | | | | | | |
| 2621.365000 | 2630.695000 | 2621.364638 | 2630.696276 | 2560.000000 | 2572.000000 | 61.364638 | 58.696276 | Pass |
| 2651.350000 | 2660.695000 | 2651.350000 | 2660.696686 | 2590.000000 | 2602.000000 | 61.350000 | 58.696686 | Pass |
| 2675.290000 | 2684.680000 | 2675.290000 | 2684.681821 | 2620.000000 | 2632.000000 | 55.290000 | 52.681821 | Pass |

* - Measured under normal test conditions at 26 dBc points

** - Measured band edge with proper drift addition

*** - Margin = Calculated band edge – specified band edge

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|--|--|--|--|--|
| HL 1424 | HL 1480 | HL 3767 | | | | | |
|---------|---------|---------|--|--|--|--|--|

Full description is given in Appendix A.

8 APPENDIX A Test equipment and ancillaries used for tests

| HL No | Description | Manufacturer | Model | Ser. No. | Last Cal. | Due Cal. |
|-------|---|----------------------------|-------------------|-----------------------------------|-----------|-----------|
| 0446 | Antenna, Loop, Active, 10 kHz - 30 MHz | EMCO | 6502 | 2857 | 29-Jun-10 | 29-Jun-11 |
| 0521 | EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz | Hewlett Packard | 8546A | 3617A 00319, 3448A002 53 | 25-Aug-10 | 25-Aug-11 |
| 0604 | Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz | EMCO | 3141 | 9611-1011 | 11-Jan-10 | 11-Jan-11 |
| 0768 | Antenna Standard Gain Horn, 18-26.5 GHz, WR-42, 25 dB gain | Quinstar Technology | QWH-4200-BA | 110 | 23-Dec-08 | 23-Dec-11 |
| 1424 | Spectrum Analyzer, 30 Hz- 40 GHz | Agilent Technologies | 8564EC | 3946A002 19 | 31-Aug-10 | 31-Aug-11 |
| 1480 | Cable, 1 m | Harbour Industries | MIL 17/60-RG142 | 1480 | 01-Sep-10 | 01-Sep-11 |
| 1906 | Power Divider, 0.5-18.0 GHz, 80 W | Omni Spectra | 2090-6204-00 | 1906 | 01-Dec-10 | 01-Dec-12 |
| 1984 | Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W | EMC Test Systems | 3115 | 9911-5964 | 11-Jun-10 | 11-Jun-11 |
| 2013 | Power Divider, 0.5-18.0 GHz, 80 W | Omni Spectra | 2090-6204-00 | 2013 | 01-Dec-10 | 01-Dec-12 |
| 2015 | Power Divider, 0.5-18.0 GHz, 80 W | Omni Spectra | 2090-6204-00 | 2015 | 01-Dec-10 | 01-Dec-12 |
| 2254 | Cable 40 GHz, 0.8 m, blue | Rhophase Microwave Limited | KPS-1503A-800-KPS | W4907 | 13-Jun-10 | 13-Jun-11 |
| 2870 | Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA | Huber-Suhner | 198-9155-00 | 2870 | 04-Aug-10 | 04-Aug-11 |
| 2871 | Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA | Huber-Suhner | 198-8155-00 | 2871 | 14-Sep-10 | 14-Sep-11 |
| 2909 | Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz | Agilent Technologies | E4407B | MY414447 62 | 07-May-10 | 07-May-11 |
| 2953 | Cable, RF, 18 GHz, 1.2 m, SMA-SMA | Gore | 10020014 | NA | 04-Oct-10 | 04-Oct-11 |
| 3301 | Power Meter, P-series, 50 MHz to 40 GHz | Agilent Technologies | N1911A | MY451010 57 | 14-Dec-09 | 14-Dec-10 |
| 3302 | Power sensor, P-Series, 50 MHz to 40 GHz, -35/30 to 20 dBm | Agilent Technologies | N1922A | MY452405 86 | 14-Dec-09 | 14-Dec-10 |
| 3433 | Test Cable , DC-18 GHz, 1.5 m, SMA - SMA | Mini-Circuits | CBL-5FT-SMSM+ | 25679 | 07-Mar-10 | 07-Mar-11 |
| 3434 | Test Cable , DC-18 GHz, 1.5 m, SMA - SMA | Mini-Circuits | CBL-5FT-SMSM+ | 25683 | 07-Mar-10 | 07-Mar-11 |
| 3437 | Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz | Mini-Circuits | BW-S10W5+ | NA | 07-Mar-10 | 07-Mar-11 |
| 3442 | Precision Fixed Attenuator, 50 Ohm, 5 W, 20 dB, DC to 18 GHz | Mini-Circuits | BW-S20W5+ | NA | 07-Mar-10 | 07-Mar-11 |
| 3472 | Cable, Coax, Microwave, DC-18 GHz, SMA-SMA, 1.0 m | Gore | GORE 65474 | 1003478 | 09-May-10 | 09-May-11 |



| HL No | Description | Manufacturer | Model | Ser. No. | Last Cal. | Due Cal. |
|-------|---|----------------------|-----------------|-------------|-----------|-----------|
| 3473 | Cable, Coax, Microwave, DC-18 GHz, SMA-SMA, 0.6 m | Gore | GORE 65474 | 1003478 | 09-May-10 | 09-May-11 |
| 3474 | Cable, Coax, Microwave, DC-18 GHz, SMA-SMA, 0.6 m | Gore | GORE 65475 | 1640102 | 09-May-10 | 09-May-11 |
| 3534 | Amplifier, low noise, 6 to 18 GHz | Quinstar Technology | QLJ-06184040-J0 | 11159001002 | 06-Dec-10 | 06-Dec-11 |
| 3535 | Amplifier, low noise, 18 to 40 GHz | Quinstar Technology | QLJ-18404537-J0 | 11159003001 | 06-Dec-10 | 06-Dec-11 |
| 3559 | Cable 40 GHz, SMA-SMA, 0.95 m, Blue | Gore | PHASEFL EX | 03771245 | 13-Jun-10 | 13-Jun-11 |
| 3622 | Cable RF, 6.0 m, N type-N type, DC-6.5 GHz | Alpha Wire | RG 214/U | NA | 27-May-10 | 27-May-11 |
| 3767 | Attenuator, N-type, 20 dB, DC to 18 GHz, 5 W | Mini-Circuits | BW-N20W5+ | NA | 31-Aug-10 | 31-Aug-11 |
| 3768 | Attenuator, N-type, 20 dB, DC to 18 GHz, 5 W | Mini-Circuits | BW-N20W5+ | NA | 31-Aug-10 | 31-Aug-11 |
| 3818 | PSA Series Spectrum Analyzer, 3 Hz- 44 GHz | Agilent Technologies | E4446A | MY48250288 | 26-Sep-10 | 26-Sep-11 |

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

| Test description | Expanded uncertainty |
|---|---|
| Transmitter tests | |
| Carrier power conducted at antenna connector | ± 1.7 dB |
| Carrier power radiated (substitution method) | ± 4.5 dB |
| Occupied bandwidth | ±8% |
| Conducted emissions at RF antenna connector | 9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB |
| Spurious emissions radiated 30 MHz – 40 GHz (substitution method) | ± 4.5 dB |
| Frequency error | 30 – 300 MHz: ± 50.5 Hz (1.68 ppm) 300 – 1000 MHz: ± 168 Hz (0.56 ppm) |
| Transient frequency behaviour | 187 Hz ± 13.9 % |
| Duty cycle, timing (Tx ON / OFF) and average factor measurements | ± 1.0 % |

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

| | |
|-------------------------|--|
| FCC 47CFR part 27: 2009 | Miscellaneous wireless communications services |
| FCC 47CFR part 1: 2009 | Practice and procedure |
| FCC 47CFR part 2: 2009 | Frequency allocations and radio treaty matters; general rules and regulations |
| ANSI C63.2: 1996 | American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications. |
| ANSI C63.4: 2003 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. |

12 APPENDIX E Test equipment correction factors

Antenna Factor
Active Loop Antenna
EMC Test Systems, model 6502, S/N 2857, HL 0446

| Frequency, MHz | Magnetic Antenna Factor, dB(S/m) | Electric Antenna Factor, dB(1/m) |
|----------------|----------------------------------|----------------------------------|
| 0.009 | -32.8 | 18.7 |
| 0.010 | -33.8 | 17.7 |
| 0.020 | -38.3 | 13.2 |
| 0.050 | -41.1 | 10.4 |
| 0.075 | -41.3 | 10.2 |
| 0.100 | -41.6 | 9.9 |
| 0.150 | -41.7 | 9.8 |
| 0.250 | -41.6 | 9.9 |
| 0.500 | -41.8 | 9.7 |
| 0.750 | -41.9 | 9.6 |
| 1.000 | -41.4 | 10.1 |
| 2.000 | -41.5 | 10.0 |
| 3.000 | -41.4 | 10.1 |
| 4.000 | -41.4 | 10.1 |
| 5.000 | -41.5 | 10.0 |
| 10.000 | -41.9 | 9.6 |
| 15.000 | -41.9 | 9.6 |
| 20.000 | -42.2 | 9.3 |
| 25.000 | -42.8 | 8.7 |
| 30.000 | -44.0 | 7.5 |

Antenna factor in dB(S/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ A/m).
Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Standard gain horn antenna
Quinstar Technology
Model QWH
Ser.No.110, HL 0768

| Frequency min, GHz | Frequency max, GHz | Antenna factor, dB(1/m) |
|--------------------|--------------------|-------------------------|
| 18.000 | 26.500 | 32.01 |
| 26.500 | 40.000 | 35.48 |
| 40.000 | 60.000 | 39.03 |
| 60.000 | 90.000 | 42.55 |
| 90.000 | 140.000 | 46.23 |
| 140.000 | 220.000 | 50.11 |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

**Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604**

| Frequency, MHz | Antenna factor, dB(1/m) | Frequency, MHz | Antenna factor, dB(1/m) | Frequency, MHz | Antenna factor, dB(1/m) |
|----------------|-------------------------|----------------|-------------------------|----------------|-------------------------|
| 26 | 7.8 | 580 | 20.6 | 1320 | 27.8 |
| 28 | 7.8 | 600 | 21.3 | 1340 | 28.3 |
| 30 | 7.8 | 620 | 21.5 | 1360 | 28.2 |
| 40 | 7.2 | 640 | 21.2 | 1380 | 27.9 |
| 60 | 7.1 | 660 | 21.4 | 1400 | 27.9 |
| 70 | 8.5 | 680 | 21.9 | 1420 | 27.9 |
| 80 | 9.4 | 700 | 22.2 | 1440 | 27.8 |
| 90 | 9.8 | 720 | 22.2 | 1460 | 27.8 |
| 100 | 9.7 | 740 | 22.1 | 1480 | 28.0 |
| 110 | 9.3 | 760 | 22.3 | 1500 | 28.5 |
| 120 | 8.8 | 780 | 22.6 | 1520 | 28.9 |
| 130 | 8.7 | 800 | 22.7 | 1540 | 29.6 |
| 140 | 9.2 | 820 | 22.9 | 1560 | 29.8 |
| 150 | 9.8 | 840 | 23.1 | 1580 | 29.6 |
| 160 | 10.2 | 860 | 23.4 | 1600 | 29.5 |
| 170 | 10.4 | 880 | 23.8 | 1620 | 29.3 |
| 180 | 10.4 | 900 | 24.1 | 1640 | 29.2 |
| 190 | 10.3 | 920 | 24.1 | 1660 | 29.4 |
| 200 | 10.6 | 940 | 24.0 | 1680 | 29.6 |
| 220 | 11.6 | 960 | 24.1 | 1700 | 29.8 |
| 240 | 12.4 | 980 | 24.5 | 1720 | 30.3 |
| 260 | 12.8 | 1000 | 24.9 | 1740 | 30.8 |
| 280 | 13.7 | 1020 | 25.0 | 1760 | 31.1 |
| 300 | 14.7 | 1040 | 25.2 | 1780 | 31.0 |
| 320 | 15.2 | 1060 | 25.4 | 1800 | 30.9 |
| 340 | 15.4 | 1080 | 25.6 | 1820 | 30.7 |
| 360 | 16.1 | 1100 | 25.7 | 1840 | 30.6 |
| 380 | 16.4 | 1120 | 26.0 | 1860 | 30.6 |
| 400 | 16.6 | 1140 | 26.4 | 1880 | 30.6 |
| 420 | 16.7 | 1160 | 27.0 | 1900 | 30.6 |
| 440 | 17.0 | 1180 | 27.0 | 1920 | 30.7 |
| 460 | 17.7 | 1200 | 26.7 | 1940 | 30.9 |
| 480 | 18.1 | 1220 | 26.5 | 1960 | 31.2 |
| 500 | 18.5 | 1240 | 26.5 | 1980 | 31.6 |
| 520 | 19.1 | 1260 | 26.5 | 2000 | 32.0 |
| 540 | 19.5 | 1280 | 26.6 | | |
| 560 | 19.8 | 1300 | 27.0 | | |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

**Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984**

| Frequency, MHz | Antenna factor, dB(1/m) |
|-------------------|----------------------------|
| 1000.0 | 24.7 |
| 1500.0 | 25.7 |
| 2000.0 | 27.6 |
| 2500.0 | 28.9 |
| 3000.0 | 31.2 |
| 3500.0 | 32.0 |
| 4000.0 | 32.5 |
| 4500.0 | 32.7 |
| 5000.0 | 33.6 |
| 5500.0 | 35.1 |
| 6000.0 | 35.4 |
| 6500.0 | 34.9 |
| 7000.0 | 36.1 |
| 7500.0 | 37.8 |
| 8000.0 | 38.0 |
| 8500.0 | 38.1 |
| 9000.0 | 39.1 |
| 9500.0 | 38.3 |
| 10000.0 | 38.6 |
| 10500.0 | 38.2 |
| 11000.0 | 38.7 |
| 11500.0 | 39.5 |
| 12000.0 | 40.0 |
| 12500.0 | 40.4 |
| 13000.0 | 40.5 |
| 13500.0 | 41.1 |
| 14000.0 | 41.6 |
| 14500.0 | 41.7 |
| 15000.0 | 38.7 |
| 15500.0 | 38.2 |
| 16000.0 | 38.8 |
| 16500.0 | 40.5 |
| 17000.0 | 42.5 |
| 17500.0 | 45.9 |
| 18000.0 | 49.4 |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Cable loss
Cable 40 GHz, 0.8 m, blue, model: KPS-1503A-800-KPS, S/N W4907, HL 2254

| Frequency, GHz | Cable loss, dB | Frequency, GHz | Cable loss, dB | Frequency, GHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|----------------|----------------|
| 0.03 | 0.04 | 5.10 | 0.80 | 15.00 | 1.49 |
| 0.05 | 0.07 | 5.30 | 0.83 | 15.50 | 1.49 |
| 0.10 | 0.09 | 5.50 | 0.83 | 16.00 | 1.46 |
| 0.20 | 0.15 | 5.70 | 0.84 | 16.50 | 1.47 |
| 0.30 | 0.19 | 5.90 | 0.87 | 17.00 | 1.50 |
| 0.40 | 0.25 | 6.10 | 0.86 | 17.50 | 1.57 |
| 0.50 | 0.29 | 6.30 | 0.89 | 18.00 | 1.63 |
| 0.60 | 0.33 | 6.50 | 0.90 | 18.50 | 1.57 |
| 0.70 | 0.37 | 6.70 | 0.89 | 19.00 | 1.63 |
| 0.80 | 0.41 | 6.90 | 0.93 | 19.50 | 1.65 |
| 0.90 | 0.44 | 7.10 | 0.92 | 20.00 | 1.64 |
| 1.00 | 0.45 | 7.30 | 0.95 | 20.50 | 1.75 |
| 1.10 | 0.48 | 7.50 | 0.96 | 21.00 | 1.72 |
| 1.20 | 0.51 | 7.70 | 0.97 | 21.50 | 1.78 |
| 1.30 | 0.53 | 7.90 | 1.01 | 22.00 | 1.76 |
| 1.40 | 0.54 | 8.10 | 1.00 | 22.50 | 1.72 |
| 1.50 | 0.57 | 8.30 | 1.05 | 23.00 | 1.83 |
| 1.60 | 0.59 | 8.50 | 1.04 | 23.50 | 1.80 |
| 1.70 | 0.04 | 8.70 | 1.07 | 24.00 | 1.90 |
| 1.80 | 0.07 | 8.90 | 1.11 | 24.50 | 1.81 |
| 1.90 | 0.09 | 9.10 | 1.09 | 25.00 | 1.98 |
| 2.00 | 0.15 | 9.30 | 1.14 | 25.50 | 1.91 |
| 2.10 | 0.19 | 9.50 | 1.12 | 26.00 | 2.02 |
| 2.20 | 0.25 | 9.70 | 1.15 | 26.50 | 1.92 |
| 2.30 | 0.29 | 9.90 | 1.16 | 27.00 | 1.97 |
| 2.40 | 0.33 | 10.10 | 1.16 | 28.00 | 2.02 |
| 2.50 | 0.37 | 10.30 | 1.19 | 29.00 | 1.95 |
| 2.60 | 0.41 | 10.50 | 1.14 | 30.00 | 1.94 |
| 2.70 | 0.44 | 10.70 | 1.19 | 31.00 | 2.11 |
| 2.80 | 0.45 | 10.90 | 1.17 | 32.00 | 2.17 |
| 2.90 | 0.48 | 11.10 | 1.13 | 33.00 | 2.27 |
| 3.10 | 0.61 | 11.30 | 1.20 | 34.00 | 2.27 |
| 3.30 | 0.64 | 11.50 | 1.13 | 35.00 | 2.29 |
| 3.50 | 0.65 | 11.70 | 1.20 | 36.00 | 2.35 |
| 3.70 | 0.68 | 11.90 | 1.18 | 37.00 | 2.37 |
| 3.90 | 0.69 | 12.10 | 1.14 | 38.00 | 2.40 |
| 4.10 | 0.71 | 12.40 | 1.19 | 39.00 | 2.57 |
| 4.30 | 0.73 | 13.00 | 1.34 | 40.00 | 2.36 |
| 4.50 | 0.75 | 13.50 | 1.33 | | |
| 4.70 | 0.77 | 14.00 | 1.48 | | |
| 4.90 | 0.79 | 14.50 | 1.45 | | |

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-9155-00,
HL 2870

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| 10 | 0.09 | 5750 | 2.49 | 12000 | 3.71 |
| 30 | 0.17 | 6000 | 2.53 | 12250 | 3.81 |
| 100 | 0.32 | 6250 | 2.58 | 12500 | 3.84 |
| 250 | 0.49 | 6500 | 2.64 | 12750 | 3.88 |
| 500 | 0.70 | 6750 | 2.69 | 13000 | 3.92 |
| 750 | 0.86 | 7000 | 2.75 | 13250 | 3.96 |
| 1000 | 1.00 | 7250 | 2.80 | 13500 | 3.98 |
| 1250 | 1.11 | 7500 | 2.87 | 13750 | 4.01 |
| 1500 | 1.23 | 7750 | 2.93 | 14000 | 4.03 |
| 1750 | 1.34 | 8000 | 2.94 | 14250 | 4.09 |
| 2000 | 1.41 | 8250 | 3.00 | 14500 | 4.08 |
| 2250 | 1.51 | 8500 | 3.04 | 14750 | 4.10 |
| 2500 | 1.59 | 8750 | 3.08 | 15000 | 4.15 |
| 2750 | 1.68 | 9000 | 3.14 | 15250 | 4.22 |
| 3000 | 1.76 | 9250 | 3.16 | 15500 | 4.31 |
| 3250 | 1.83 | 9500 | 3.22 | 15750 | 4.42 |
| 3500 | 1.91 | 9750 | 3.26 | 16000 | 4.48 |
| 3750 | 1.97 | 10000 | 3.36 | 16250 | 4.54 |
| 4000 | 2.05 | 10250 | 3.41 | 16500 | 4.56 |
| 4250 | 2.11 | 10500 | 3.46 | 16750 | 4.57 |
| 4500 | 2.18 | 10750 | 3.50 | 17000 | 4.59 |
| 4750 | 2.24 | 11000 | 3.54 | 17250 | 4.66 |
| 5000 | 2.30 | 11250 | 3.58 | 17500 | 4.70 |
| 5250 | 2.36 | 11500 | 3.63 | 17750 | 4.76 |
| 5500 | 2.43 | 11750 | 3.66 | 18000 | 4.72 |

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| 10 | 0.12 | 5750 | 2.34 | 12000 | 3.55 |
| 30 | 0.14 | 6000 | 2.39 | 12250 | 3.61 |
| 100 | 0.27 | 6250 | 2.46 | 12500 | 3.67 |
| 250 | 0.45 | 6500 | 2.52 | 12750 | 3.74 |
| 500 | 0.63 | 6750 | 2.58 | 13000 | 3.79 |
| 750 | 0.76 | 7000 | 2.64 | 13250 | 3.82 |
| 1000 | 0.89 | 7250 | 2.68 | 13500 | 3.83 |
| 1250 | 1.01 | 7500 | 2.73 | 13750 | 3.83 |
| 1500 | 1.12 | 7750 | 2.78 | 14000 | 3.88 |
| 1750 | 1.23 | 8000 | 2.83 | 14250 | 3.93 |
| 2000 | 1.32 | 8250 | 2.88 | 14500 | 3.96 |
| 2250 | 1.41 | 8500 | 2.94 | 14750 | 4.01 |
| 2500 | 1.49 | 8750 | 2.97 | 15000 | 4.00 |
| 2750 | 1.58 | 9000 | 3.02 | 15250 | 4.01 |
| 3000 | 1.66 | 9250 | 3.07 | 15500 | 4.00 |
| 3250 | 1.73 | 9500 | 3.13 | 15750 | 4.13 |
| 3500 | 1.80 | 9750 | 3.18 | 16000 | 4.22 |
| 3750 | 1.87 | 10000 | 3.21 | 16250 | 4.29 |
| 4000 | 1.93 | 10250 | 3.26 | 16500 | 4.29 |
| 4250 | 2.01 | 10500 | 3.30 | 16750 | 4.32 |
| 4500 | 2.06 | 10750 | 3.36 | 17000 | 4.37 |
| 4750 | 2.12 | 11000 | 3.39 | 17250 | 4.45 |
| 5000 | 2.17 | 11250 | 3.44 | 17500 | 4.49 |
| 5250 | 2.24 | 11500 | 3.48 | 17750 | 4.53 |
| 5500 | 2.29 | 11750 | 3.52 | 18000 | 4.55 |

Cable loss
Cable coaxial, Gore, 25.5 GHz, 1.2 m, SMA-SMA, S/N 10020014
HL 2953

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|----------------|----------------|
| 10 | 0.06 | 8750 | 1.28 | 18000 | 1.84 |
| 30 | 0.06 | 9000 | 1.30 | 18250 | 1.91 |
| 100 | 0.12 | 9250 | 1.35 | 18500 | 1.94 |
| 250 | 0.19 | 9500 | 1.34 | 18750 | 1.92 |
| 500 | 0.27 | 9750 | 1.36 | 19000 | 1.95 |
| 750 | 0.34 | 10000 | 1.33 | 19250 | 2.00 |
| 1000 | 0.40 | 10250 | 1.38 | 19500 | 1.96 |
| 1250 | 0.45 | 10500 | 1.39 | 19750 | 2.02 |
| 1500 | 0.50 | 10750 | 1.39 | 20000 | 1.92 |
| 1750 | 0.54 | 11000 | 1.43 | 20250 | 2.04 |
| 2000 | 0.57 | 11250 | 1.42 | 20500 | 2.00 |
| 2250 | 0.60 | 11500 | 1.48 | 20750 | 2.09 |
| 2500 | 0.64 | 11750 | 1.49 | 21000 | 2.01 |
| 2750 | 0.67 | 12000 | 1.59 | 21250 | 2.07 |
| 3000 | 0.70 | 12250 | 1.50 | 21500 | 2.20 |
| 3250 | 0.74 | 12500 | 1.55 | 21750 | 2.10 |
| 3500 | 0.76 | 12750 | 1.55 | 22000 | 2.24 |
| 3750 | 0.80 | 13000 | 1.61 | 22250 | 2.25 |
| 4000 | 0.83 | 13250 | 1.62 | 22500 | 2.12 |
| 4250 | 0.85 | 13500 | 1.56 | 22750 | 2.05 |
| 4500 | 0.87 | 13750 | 1.61 | 23000 | 2.10 |
| 4750 | 0.91 | 14000 | 1.57 | 23250 | 2.03 |
| 5000 | 0.92 | 14250 | 1.66 | 23500 | 2.08 |
| 5250 | 0.96 | 14500 | 1.58 | 23750 | 2.14 |
| 5500 | 0.99 | 14750 | 1.69 | 24000 | 2.16 |
| 5750 | 0.99 | 15000 | 1.71 | 24250 | 2.25 |
| 6000 | 1.03 | 15250 | 1.74 | 24500 | 2.17 |
| 6250 | 1.05 | 15500 | 1.75 | 24750 | 2.32 |
| 6500 | 1.07 | 15750 | 1.72 | 25000 | 2.32 |
| 6750 | 1.08 | 16000 | 1.89 | 25250 | 2.32 |
| 7000 | 1.12 | 16250 | 1.79 | 25500 | 2.41 |
| 7250 | 1.13 | 16500 | 1.84 | 25750 | 2.31 |
| 7500 | 1.15 | 16750 | 1.82 | 26000 | 2.28 |
| 7750 | 1.20 | 17000 | 1.79 | 26250 | 2.32 |
| 8000 | 1.20 | 17250 | 1.78 | 26500 | 2.29 |
| 8250 | 1.23 | 17500 | 1.85 | | |
| 8500 | 1.27 | 17750 | 1.83 | | |

Cable loss
Test Cable, Mini-Circuits, CBL-5FT-SMSM+, SMA-SMA, 18 GHz, 1.5 m, S/N 25679
Mini-Circuits, HL 3433

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|
| 10.0 | 0.06 | 9000 | 2.01 |
| 100 | 0.17 | 9500 | 2.06 |
| 500 | 0.41 | 10000 | 2.05 |
| 1000 | 0.58 | 10500 | 2.18 |
| 1500 | 0.72 | 11000 | 2.26 |
| 2000 | 0.86 | 11500 | 2.28 |
| 2500 | 0.96 | 12000 | 2.43 |
| 3000 | 1.04 | 12500 | 2.53 |
| 3500 | 1.13 | 13000 | 2.52 |
| 4000 | 1.23 | 13500 | 2.56 |
| 4500 | 1.31 | 14000 | 2.60 |
| 5000 | 1.41 | 14500 | 2.59 |
| 5500 | 1.49 | 15000 | 2.67 |
| 6000 | 1.55 | 15500 | 2.76 |
| 6500 | 1.63 | 16000 | 2.86 |
| 7000 | 1.71 | 16500 | 2.91 |
| 7500 | 1.78 | 17000 | 2.95 |
| 8000 | 1.86 | 17500 | 3.02 |
| 8500 | 1.92 | 18000 | 3.07 |

Cable loss
Test Cable, Mini-Circuits, CBL-5FT-SMSM+, SMA-SMA, 18 GHz, 1.5 m, S/N 25683
Mini-Circuits, HL 3434

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|
| 10.0 | 0.06 | 9000 | 1.96 |
| 100 | 0.16 | 9500 | 2.01 |
| 500 | 0.40 | 10000 | 2.01 |
| 1000 | 0.57 | 10500 | 2.14 |
| 1500 | 0.72 | 11000 | 2.21 |
| 2000 | 0.85 | 11500 | 2.24 |
| 2500 | 0.95 | 12000 | 2.36 |
| 3000 | 1.03 | 12500 | 2.47 |
| 3500 | 1.11 | 13000 | 2.46 |
| 4000 | 1.21 | 13500 | 2.50 |
| 4500 | 1.29 | 14000 | 2.53 |
| 5000 | 1.39 | 14500 | 2.53 |
| 5500 | 1.46 | 15000 | 2.62 |
| 6000 | 1.52 | 15500 | 2.70 |
| 6500 | 1.60 | 16000 | 2.80 |
| 7000 | 1.68 | 16500 | 2.86 |
| 7500 | 1.75 | 17000 | 2.88 |
| 8000 | 1.83 | 17500 | 2.94 |
| 8500 | 1.88 | 18000 | 3.00 |



Cable loss
Cable coaxial, Microwave, SMA-SMA, 18 GHz, 1.0 m
Gore, HL 3472

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| 10 | 0.01 | 5000 | 0.47 | 10200 | 0.72 | 15500 | 0.75 |
| 30 | 0.03 | 5100 | 0.47 | 10300 | 0.67 | 15600 | 0.89 |
| 50 | 0.04 | 5200 | 0.47 | 10400 | 0.77 | 15700 | 0.82 |
| 100 | 0.04 | 5300 | 0.47 | 10500 | 0.67 | 15800 | 0.89 |
| 200 | 0.08 | 5400 | 0.49 | 10600 | 0.74 | 15900 | 0.89 |
| 300 | 0.11 | 5500 | 0.48 | 10700 | 0.81 | 16000 | 0.93 |
| 400 | 0.11 | 5600 | 0.49 | 10800 | 0.77 | 16100 | 0.90 |
| 500 | 0.12 | 5700 | 0.49 | 10900 | 0.82 | 16200 | 0.92 |
| 600 | 0.14 | 5800 | 0.51 | 11000 | 0.86 | 16300 | 0.90 |
| 700 | 0.15 | 5900 | 0.50 | 11100 | 0.78 | 16400 | 0.94 |
| 800 | 0.16 | 6000 | 0.51 | 11200 | 0.82 | 16500 | 0.93 |
| 900 | 0.18 | 6100 | 0.53 | 11300 | 0.77 | 16600 | 0.95 |
| 1000 | 0.17 | 6200 | 0.52 | 11400 | 0.84 | 16700 | 0.98 |
| 1100 | 0.19 | 6300 | 0.53 | 11500 | 0.74 | 16800 | 1.00 |
| 1200 | 0.22 | 6400 | 0.54 | 11600 | 0.81 | 16900 | 0.94 |
| 1300 | 0.21 | 6500 | 0.55 | 11700 | 0.73 | 17000 | 1.00 |
| 1400 | 0.22 | 6600 | 0.54 | 11800 | 0.75 | 17100 | 0.93 |
| 1500 | 0.23 | 6700 | 0.57 | 11900 | 0.73 | 17200 | 1.00 |
| 1600 | 0.24 | 6800 | 0.54 | 12000 | 0.75 | 17300 | 0.93 |
| 1700 | 0.24 | 6900 | 0.58 | 12100 | 0.66 | 17400 | 0.93 |
| 1800 | 0.25 | 7000 | 0.58 | 12200 | 0.66 | 17500 | 0.96 |
| 1900 | 0.26 | 7100 | 0.58 | 12300 | 0.72 | 17600 | 0.94 |
| 2000 | 0.28 | 7200 | 0.61 | 12400 | 0.64 | 17700 | 0.99 |
| 2100 | 0.27 | 7300 | 0.59 | 12500 | 0.75 | 17800 | 0.97 |
| 2200 | 0.29 | 7400 | 0.55 | 12600 | 0.67 | 17900 | 0.90 |
| 2300 | 0.29 | 7500 | 0.63 | 12700 | 0.75 | 18000 | 0.78 |
| 2400 | 0.30 | 7600 | 0.60 | 12800 | 0.66 | | |
| 2500 | 0.30 | 7700 | 0.61 | 12900 | 0.81 | | |
| 2600 | 0.32 | 7800 | 0.64 | 13000 | 0.75 | | |
| 2700 | 0.32 | 7900 | 0.60 | 13100 | 0.80 | | |
| 2800 | 0.33 | 8000 | 0.58 | 13200 | 0.80 | | |
| 2900 | 0.34 | 8100 | 0.61 | 13300 | 0.81 | | |
| 3000 | 0.34 | 8200 | 0.62 | 13400 | 0.88 | | |
| 3100 | 0.35 | 8300 | 0.62 | 13500 | 0.82 | | |
| 3200 | 0.35 | 8400 | 0.68 | 13600 | 1.00 | | |
| 3300 | 0.36 | 8500 | 0.63 | 13700 | 0.93 | | |
| 3400 | 0.37 | 8600 | 0.61 | 13800 | 0.86 | | |
| 3500 | 0.38 | 8700 | 0.63 | 13900 | 0.84 | | |
| 3600 | 0.38 | 8800 | 0.62 | 14000 | 1.00 | | |
| 3700 | 0.40 | 8900 | 0.64 | 14100 | 0.86 | | |
| 3800 | 0.40 | 9000 | 0.62 | 14200 | 0.98 | | |
| 3900 | 0.40 | 9100 | 0.64 | 14300 | 0.99 | | |
| 4000 | 0.40 | 9200 | 0.62 | 14400 | 0.82 | | |
| 4100 | 0.43 | 9300 | 0.62 | 14600 | 0.89 | | |
| 4200 | 0.43 | 9400 | 0.62 | 14700 | 0.84 | | |
| 4300 | 0.43 | 9500 | 0.63 | 14800 | 0.90 | | |
| 4400 | 0.44 | 9600 | 0.64 | 14900 | 0.89 | | |
| 4500 | 0.45 | 9700 | 0.60 | 15000 | 0.89 | | |
| 4600 | 0.45 | 9800 | 0.65 | 15100 | 0.86 | | |
| 4700 | 0.46 | 9900 | 0.60 | 15200 | 0.87 | | |
| 4800 | 0.46 | 10000 | 0.67 | 15300 | 0.86 | | |
| 4900 | 0.46 | 10100 | 0.69 | 15400 | 0.87 | | |

Cable loss
Cable coaxial, Microwave, SMA-SMA, 18 GHz, 0.6 m
Gore, HL 3473

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| 10 | 0.01 | 5000 | 0.48 | 10200 | 0.72 | 15500 | 0.85 |
| 30 | 0.03 | 5100 | 0.48 | 10300 | 0.70 | 15600 | 0.93 |
| 50 | 0.04 | 5200 | 0.48 | 10400 | 0.75 | 15700 | 0.87 |
| 100 | 0.04 | 5300 | 0.48 | 10500 | 0.68 | 15800 | 0.88 |
| 200 | 0.08 | 5400 | 0.50 | 10600 | 0.77 | 15900 | 0.94 |
| 300 | 0.11 | 5500 | 0.48 | 10700 | 0.80 | 16000 | 0.94 |
| 400 | 0.12 | 5600 | 0.50 | 10800 | 0.77 | 16100 | 0.99 |
| 500 | 0.13 | 5700 | 0.50 | 10900 | 0.85 | 16200 | 0.96 |
| 600 | 0.15 | 5800 | 0.52 | 11000 | 0.83 | 16300 | 0.96 |
| 700 | 0.15 | 5900 | 0.51 | 11100 | 0.79 | 16400 | 0.94 |
| 800 | 0.17 | 6000 | 0.52 | 11200 | 0.82 | 16500 | 0.94 |
| 900 | 0.19 | 6100 | 0.54 | 11300 | 0.79 | 16600 | 1.03 |
| 1000 | 0.18 | 6200 | 0.53 | 11400 | 0.81 | 16700 | 1.04 |
| 1100 | 0.20 | 6300 | 0.54 | 11500 | 0.76 | 16800 | 1.07 |
| 1200 | 0.22 | 6400 | 0.55 | 11600 | 0.78 | 16900 | 0.94 |
| 1300 | 0.22 | 6500 | 0.56 | 11700 | 0.74 | 17000 | 1.05 |
| 1400 | 0.23 | 6600 | 0.56 | 11800 | 0.76 | 17100 | 0.96 |
| 1500 | 0.24 | 6700 | 0.60 | 11900 | 0.79 | 17200 | 1.07 |
| 1600 | 0.25 | 6800 | 0.55 | 12000 | 0.74 | 17300 | 0.98 |
| 1700 | 0.25 | 6900 | 0.60 | 12100 | 0.69 | 17400 | 1.16 |
| 1800 | 0.26 | 7000 | 0.59 | 12200 | 0.69 | 17500 | 1.05 |
| 1900 | 0.27 | 7100 | 0.60 | 12300 | 0.75 | 17600 | 1.13 |
| 2000 | 0.29 | 7200 | 0.61 | 12400 | 0.66 | 17700 | 1.05 |
| 2100 | 0.28 | 7300 | 0.60 | 12500 | 0.76 | 17800 | 1.22 |
| 2200 | 0.30 | 7400 | 0.57 | 12600 | 0.70 | 17900 | 1.02 |
| 2300 | 0.30 | 7500 | 0.63 | 12700 | 0.77 | 18000 | 1.04 |
| 2400 | 0.31 | 7600 | 0.60 | 12800 | 0.69 | | |
| 2500 | 0.31 | 7700 | 0.63 | 12900 | 0.79 | | |
| 2600 | 0.33 | 7800 | 0.66 | 13000 | 0.81 | | |
| 2700 | 0.33 | 7900 | 0.61 | 13100 | 0.83 | | |
| 2800 | 0.35 | 8000 | 0.58 | 13200 | 0.80 | | |
| 2900 | 0.35 | 8100 | 0.62 | 13300 | 0.82 | | |
| 3000 | 0.35 | 8200 | 0.62 | 13400 | 0.90 | | |
| 3100 | 0.35 | 8300 | 0.63 | 13500 | 0.85 | | |
| 3200 | 0.36 | 8400 | 0.67 | 13600 | 1.04 | | |
| 3300 | 0.38 | 8500 | 0.63 | 13700 | 0.93 | | |
| 3400 | 0.38 | 8600 | 0.61 | 13800 | 0.91 | | |
| 3500 | 0.40 | 8700 | 0.64 | 13900 | 0.89 | | |
| 3600 | 0.40 | 8800 | 0.62 | 14000 | 0.96 | | |
| 3700 | 0.40 | 8900 | 0.64 | 14100 | 0.88 | | |
| 3800 | 0.41 | 9000 | 0.64 | 14200 | 1.01 | | |
| 3900 | 0.41 | 9100 | 0.64 | 14300 | 0.99 | | |
| 4000 | 0.41 | 9200 | 0.63 | 14400 | 0.83 | | |
| 4100 | 0.45 | 9300 | 0.63 | 14600 | 0.88 | | |
| 4200 | 0.43 | 9400 | 0.63 | 14700 | 0.91 | | |
| 4300 | 0.46 | 9500 | 0.64 | 14800 | 0.91 | | |
| 4400 | 0.44 | 9600 | 0.65 | 14900 | 0.88 | | |
| 4500 | 0.47 | 9700 | 0.62 | 15000 | 0.89 | | |
| 4600 | 0.46 | 9800 | 0.66 | 15100 | 0.91 | | |
| 4700 | 0.47 | 9900 | 0.61 | 15200 | 0.88 | | |
| 4800 | 0.47 | 10000 | 0.70 | 15300 | 0.94 | | |
| 4900 | 0.48 | 10100 | 0.70 | 15400 | 0.91 | | |



Cable loss
Cable coaxial, Microwave, SMA-SMA, 18 GHz, 0.6 m
Gore, HL 3474

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| 10 | 0.00 | 5000 | 0.44 | 10200 | 0.72 | 15500 | 0.84 |
| 30 | 0.02 | 5100 | 0.44 | 10300 | 0.68 | 15600 | 0.95 |
| 50 | 0.03 | 5200 | 0.44 | 10400 | 0.75 | 15700 | 0.82 |
| 100 | 0.03 | 5300 | 0.44 | 10500 | 0.64 | 15800 | 0.94 |
| 200 | 0.07 | 5400 | 0.46 | 10600 | 0.75 | 15900 | 0.91 |
| 300 | 0.10 | 5500 | 0.45 | 10700 | 0.80 | 16000 | 0.91 |
| 400 | 0.11 | 5600 | 0.46 | 10800 | 0.77 | 16100 | 0.86 |
| 500 | 0.12 | 5700 | 0.47 | 10900 | 0.80 | 16200 | 0.86 |
| 600 | 0.14 | 5800 | 0.48 | 11000 | 0.79 | 16300 | 0.86 |
| 700 | 0.14 | 5900 | 0.48 | 11100 | 0.70 | 16400 | 0.84 |
| 800 | 0.15 | 6000 | 0.49 | 11200 | 0.76 | 16500 | 0.83 |
| 900 | 0.18 | 6100 | 0.51 | 11300 | 0.70 | 16600 | 0.87 |
| 1000 | 0.17 | 6200 | 0.50 | 11400 | 0.73 | 16700 | 0.90 |
| 1100 | 0.18 | 6300 | 0.50 | 11500 | 0.67 | 16800 | 0.91 |
| 1200 | 0.21 | 6400 | 0.51 | 11600 | 0.74 | 16900 | 0.90 |
| 1300 | 0.20 | 6500 | 0.51 | 11700 | 0.64 | 17000 | 0.97 |
| 1400 | 0.21 | 6600 | 0.52 | 11800 | 0.68 | 17100 | 0.94 |
| 1500 | 0.22 | 6700 | 0.54 | 11900 | 0.67 | 17200 | 1.01 |
| 1600 | 0.23 | 6800 | 0.51 | 12000 | 0.71 | 17300 | 0.97 |
| 1700 | 0.23 | 6900 | 0.55 | 12100 | 0.64 | 17400 | 1.02 |
| 1800 | 0.24 | 7000 | 0.54 | 12200 | 0.64 | 17500 | 1.06 |
| 1900 | 0.25 | 7100 | 0.55 | 12300 | 0.71 | 17600 | 1.01 |
| 2000 | 0.27 | 7200 | 0.55 | 12400 | 0.62 | 17700 | 1.10 |
| 2100 | 0.26 | 7300 | 0.54 | 12500 | 0.80 | 17800 | 1.16 |
| 2200 | 0.28 | 7400 | 0.52 | 12600 | 0.69 | 17900 | 1.12 |
| 2300 | 0.28 | 7500 | 0.58 | 12700 | 0.85 | 18000 | 1.00 |
| 2400 | 0.28 | 7600 | 0.56 | 12800 | 0.67 | | |
| 2500 | 0.29 | 7700 | 0.57 | 12900 | 0.84 | | |
| 2600 | 0.30 | 7800 | 0.62 | 13000 | 0.76 | | |
| 2700 | 0.31 | 7900 | 0.57 | 13100 | 0.85 | | |
| 2800 | 0.32 | 8000 | 0.55 | 13200 | 0.77 | | |
| 2900 | 0.32 | 8100 | 0.59 | 13300 | 0.82 | | |
| 3000 | 0.32 | 8200 | 0.59 | 13400 | 0.79 | | |
| 3100 | 0.33 | 8300 | 0.60 | 13500 | 0.82 | | |
| 3200 | 0.33 | 8400 | 0.66 | 13600 | 0.91 | | |
| 3300 | 0.35 | 8500 | 0.60 | 13700 | 0.81 | | |
| 3400 | 0.35 | 8600 | 0.59 | 13800 | 0.76 | | |
| 3500 | 0.36 | 8700 | 0.59 | 13900 | 0.75 | | |
| 3600 | 0.36 | 8800 | 0.58 | 14000 | 0.81 | | |
| 3700 | 0.37 | 8900 | 0.60 | 14100 | 0.77 | | |
| 3800 | 0.38 | 9000 | 0.60 | 14200 | 0.89 | | |
| 3900 | 0.38 | 9100 | 0.60 | 14300 | 0.92 | | |
| 4000 | 0.38 | 9200 | 0.57 | 14400 | 0.78 | | |
| 4100 | 0.41 | 9300 | 0.57 | 14600 | 0.85 | | |
| 4200 | 0.40 | 9400 | 0.58 | 14700 | 0.83 | | |
| 4300 | 0.41 | 9500 | 0.60 | 14800 | 0.95 | | |
| 4400 | 0.42 | 9600 | 0.62 | 14900 | 0.89 | | |
| 4500 | 0.43 | 9700 | 0.58 | 15000 | 0.96 | | |
| 4600 | 0.42 | 9800 | 0.63 | 15100 | 0.90 | | |
| 4700 | 0.44 | 9900 | 0.58 | 15200 | 0.96 | | |
| 4800 | 0.43 | 10000 | 0.67 | 15300 | 0.90 | | |
| 4900 | 0.44 | 10100 | 0.69 | 15400 | 0.95 | | |

Cable loss
Cable coaxial, GORE, PHASEFLEX, 40 GHz, 0.95 m, SMA-SMA, S/N 03771245
HL 3559

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| 30 | 0.08 | 10000 | 0.96 | 20500 | 1.59 | 31000 | 2.24 |
| 100 | 0.10 | 10500 | 0.99 | 21000 | 1.63 | 31500 | 2.71 |
| 500 | 0.22 | 11000 | 1.02 | 21500 | 1.70 | 32000 | 2.47 |
| 1000 | 0.32 | 11500 | 1.07 | 22000 | 1.71 | 32500 | 2.37 |
| 1500 | 0.40 | 12000 | 1.13 | 22500 | 1.60 | 33000 | 2.35 |
| 2000 | 0.41 | 12500 | 1.16 | 23000 | 1.58 | 33500 | 2.34 |
| 2500 | 0.44 | 13000 | 1.26 | 23500 | 1.64 | 34000 | 2.31 |
| 3000 | 0.53 | 13500 | 1.26 | 24000 | 1.68 | 34500 | 2.43 |
| 3500 | 0.54 | 14000 | 1.22 | 24500 | 1.79 | 35000 | 2.45 |
| 4000 | 0.62 | 14500 | 1.26 | 25000 | 1.86 | 35500 | 2.48 |
| 4500 | 0.62 | 15000 | 1.27 | 25500 | 1.77 | 36000 | 3.60 |
| 5000 | 0.67 | 15500 | 1.29 | 26000 | 1.78 | 36500 | 2.62 |
| 5500 | 0.70 | 16000 | 1.39 | 26500 | 1.83 | 37000 | 2.45 |
| 6000 | 0.72 | 16500 | 1.50 | 27000 | 1.87 | 37500 | 2.47 |
| 6500 | 0.76 | 17000 | 1.49 | 27500 | 1.97 | 38000 | 2.38 |
| 7000 | 0.83 | 17500 | 1.37 | 28000 | 2.69 | 38500 | 2.41 |
| 7500 | 0.85 | 18000 | 1.40 | 28500 | 1.94 | 39000 | 2.56 |
| 8000 | 0.89 | 18500 | 1.41 | 29000 | 2.02 | 39500 | 2.71 |
| 8500 | 0.91 | 19000 | 1.48 | 29500 | 2.05 | 40000 | 2.69 |
| 9000 | 0.95 | 19500 | 1.61 | 30000 | 2.11 | | |
| 9500 | 0.96 | 20000 | 1.59 | 30500 | 2.11 | | |

Cable loss
Cable coaxial, RG-214/U, N type-N type, 6 m
Alpha Wire, HL 3622

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|----------------|----------------|
| 10 | 0.13 | 2100 | 2.95 | 4400 | 4.99 |
| 30 | 0.24 | 2200 | 2.99 | 4500 | 5.00 |
| 50 | 0.32 | 2300 | 3.11 | 4600 | 5.17 |
| 100 | 0.47 | 2400 | 3.16 | 4700 | 5.18 |
| 200 | 0.70 | 2500 | 3.31 | 4800 | 5.33 |
| 300 | 0.88 | 2600 | 3.36 | 4900 | 5.34 |
| 400 | 1.05 | 2700 | 3.46 | 5000 | 5.50 |
| 500 | 1.21 | 2800 | 3.52 | 5100 | 5.56 |
| 600 | 1.36 | 2900 | 3.65 | 5200 | 5.76 |
| 700 | 1.49 | 3000 | 3.70 | 5300 | 5.76 |
| 800 | 1.63 | 3100 | 3.82 | 5400 | 5.85 |
| 900 | 1.72 | 3200 | 3.88 | 5500 | 5.88 |
| 1000 | 1.84 | 3300 | 3.99 | 5600 | 5.96 |
| 1100 | 1.96 | 3400 | 4.08 | 5700 | 6.02 |
| 1200 | 2.06 | 3500 | 4.19 | 5800 | 6.06 |
| 1300 | 2.15 | 3600 | 4.28 | 5900 | 6.14 |
| 1400 | 2.28 | 3700 | 4.42 | 6000 | 6.17 |
| 1500 | 2.35 | 3800 | 4.40 | 6100 | 6.28 |
| 1600 | 2.43 | 3900 | 4.51 | 6200 | 6.36 |
| 1700 | 2.57 | 4000 | 4.62 | 6300 | 6.47 |
| 1800 | 2.62 | 4100 | 4.70 | 6400 | 6.51 |
| 1900 | 2.75 | 4200 | 4.78 | 6500 | 6.65 |
| 2000 | 2.80 | 4300 | 4.83 | | |

13 APPENDIX F Abbreviations and acronyms

| | |
|----------------|---|
| A | ampere |
| AC | alternating current |
| A/m | ampere per meter |
| AM | amplitude modulation |
| AVRG | average (detector) |
| CBW | channel bandwidth |
| cm | centimeter |
| dB | decibel |
| dBm | decibel referred to one milliwatt |
| dB(μ V) | decibel referred to one microvolt |
| dB(μ V/m) | decibel referred to one microvolt per meter |
| dB(μ A) | decibel referred to one microampere |
| DC | direct current |
| EBW | emission bandwidth |
| EIRP | equivalent isotropically radiated power |
| ERP | effective radiated power |
| EUT | equipment under test |
| F | frequency |
| GHz | gigahertz |
| GND | ground |
| H | height |
| HL | Hermon laboratories |
| Hz | hertz |
| k | kilo |
| kHz | kilohertz |
| LO | local oscillator |
| m | meter |
| MHz | megahertz |
| min | minute |
| mm | millimeter |
| ms | millisecond |
| μ s | microsecond |
| NA | not applicable |
| NB | narrow band |
| OATS | open area test site |
| Ω | Ohm |
| QP | quasi-peak |
| PM | pulse modulation |
| PS | power supply |
| RE | radiated emission |
| RF | radio frequency |
| rms | root mean square |
| Rx | receive |
| s | second |
| T | temperature |
| Tx | transmit |
| V | volt |
| VA | volt-ampere |

END OF DOCUMENT