

Federal Communications Commission
Authorization and Evaluation Division
7435 Oakland Mills Rd.
Columbia, MD. 21046

Date: June 22, 2001

Attention: Authorization and Evaluation Division

Subject: RFI related modifications incorporated into unit COLOR MONITOR
with - FCC ID: PIM772A

Dear Sirs:


This letter serves as our declaration that all modifications listed below were implemented in the sample submitted for testing. We further declare that the same modifications will be implemented into all production units to enhance compliance of the units to FCC limits.

The modifications include the following:

1. Added two ferrite cores on the signal cable – one at the outside & one in the inside of the monitor. (see photo 2 & 12)
2. Added a metal cover on the rear side of CRT board and it was connected to chassis by 4 ground wires. (see photo 5 & 6)
3. Added a ferrite core on the VGA cable near CRT board with one turn. (see photo 12)
4. Added a ferrite core on the G2 wire with 1 turn. (see photo 12)
5. Added 1 jump wire, 1 resistor and 2 capacitor to the solder side of main board for electrical improvement only. They will be built into component side after the circuit re-layout. (see photo 9)

If you have any further questions or comments regarding the above, please don't hesitate to contact Mr. Mike Su of ADT Lab. at fax No.:886-2-2602-2943 or E-mail: mike@mail.adt.com.tw

Sincerely yours,

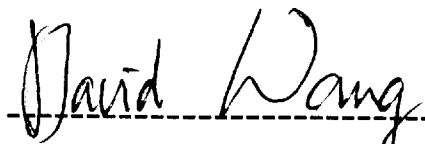

David Wang / Manager
NESO Technology Inc.

cc. Mr. Harris W. Lai - Advance Data Technology Corporation