



RF Exposure Evaluation Report

FOR:

Manufacturer: CSR Technology

Model Name: CNS12015

Product Description: Bluetooth Smart Shelf Tag

FCC ID: PIW-CNS12015

IC ID: 5255A-CNS12015

TEST REPORT #: EMC_CSRT-002-14001_MPE

DATE: 2014-09-25

References:

1. FCC OET Bulletin 65 Supplement
2. FCC CFR Part 1 (1.1307 & 1.1310), Part 2 (2.1091)
3. RSS-102- Radio Frequency Exposure Compliance of Radio communication Apparatus
Issue 4 March 2010, Ch. 2.5 and Ch. 4

TABLE OF CONTENTS

1	Assessment	3
2	Administrative Data	4
2.1	Identification of the Testing Laboratory Issuing the Test Report	4
2.2	Identification of the Client	4
2.3	Identification of the Manufacturer	4
3	Equipment under Test (EUT)	5
3.1	Specification of the Equipment under Test	5
4	RF Exposure Evaluation Requirements	6
4.1	FCC:	6
4.2	IC:	6
5	Measurement procedure:	7
5.1	Radiated power measurement- ERP/EIRP-	7
5.2	Radiated power Calculation- ERP/EIRP-	8
5.3	Measurement Equipment information:	8
5.4	Measurement Summary:	9
6	Revision History	10

1 Assessment

This report serves as the Technical Information regarding RF Exposure evaluation of the below identified device according to the rules as stipulated in the documents listed under References above.

The device meets the RF exposure limits, or - for some of it's radio functions / bands - the conditions for exemption from routine evaluation as defined in the referenced FCC and IC rule parts.

Company	Description	Model #
CSR Technology	Bluetooth Smart Shelf Tag	CNS12015

Responsible for Testing Laboratory:

2014-09-25	Compliance	Franz Engert (Test Lab Manager)	
Date	Section	Name	Signature

Responsible for the Report:

2014-09-25	Compliance	Yu-Chien Ho (EMC Engineer)	
Date	Section	Name	Signature

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Test Lab Manager:	Franz Engert
Test Engineer:	Yu-Chien Ho

2.2 Identification of the Client

Client Firm/Name:	CSR Technology
Street Address:	1390 Kifer Road
City/Zip Code	Sunnyvale, CA 94086
Country	USA
Contact Person:	Jim Machiorletti
Phone No.	408-392-8310
Fax:	
e-mail:	james.machiorletti@csr.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as client
Manufacturer Address:	
City/Zip Code	
Country	

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Marketing Name:	Kingfisher
Model No:	CNS12015
Product Description:	Bluetooth Smart Shelf Tag
FCC-ID:	PIW-CNS12015
IC-ID :	5255A-CNS12015
Supported frequency bands of operation:	Nominal band: 2400 – 2483.5; Center to center: 2402(ch 0) – 2480(ch 39), 40 channels
Type(s) of Modulation:	Dynamic Sequence Spread Spectrum with GFSK
Antenna Info:	Printed dipole Antenna gain= 5dBi (peak)
Rated Operating Voltage Range(DC):	Internal Battery Operated Vmin: 2.8VDC/ Vnom: 3.0V/ Vmax: 3.0V
Rated Operating Temperature Range:	Tlow: -10°C/ Tnom: 25°C/ Tmax: 55°C
Test Sample status:	Production
Prototype / Production unit:	Production
Dates of Testing:	2014-07-05 to 2014-08-25

4 **RF Exposure Evaluation Requirements**

4.1 **FCC:**

Calculations can be made to predict RF field strength and power density levels around typical RF sources using the general equations (3) and (4) on page 19 of the following FCC document: "OET Bulletin 65, Edition 97-01 - Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields".

The table below is excerpted from Table 1B of 47 CFR 1.1310 titled Limits for Maximum Permissible Exposure (MPE), Limits for General Population/Uncontrolled Exposure:

Frequency Range (MHz)	Power density (mW/cm ²)	Averaging time (minutes)
300 – 1500	f (MHz) /1500	30
1500 – 100.000	1.0	30

Using the equation from page 19 of OET Bulletin 65, Edition 97-01:

$$S = \frac{PG}{4\pi R^2}$$

where: S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Note:

1. This device is used only for fixed and mobile applications.

Additionally, according to § 2.1091:

The limit for <1.5 GHz mobile operations where no routine evaluation is required is: 1.5W ERP

The limit for >1.5 GHz mobile operations where no routine evaluation is required is: 3W ERP

4.2 **IC:**

RSS-102 Section 2.5.2

RF exposure evaluation is required if the separation distance between the user and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 1.5 GHz and the maximum EIRP of the device is equal to or less than 2.5 W;
- at or above 1.5 GHz and the maximum EIRP of the device is equal to or less than 5 W.

RSS-102 4.2: RF Field strength limits for devices used by the General Public (Uncontrolled Environment):


Power density

300MHz- 1500 MHz= f/150 W/m²

1500 MHz- 1500000 MHz= 10 W/m²

5 Measurement procedure:

5.1 Radiated power measurement- ERP/EIRP-

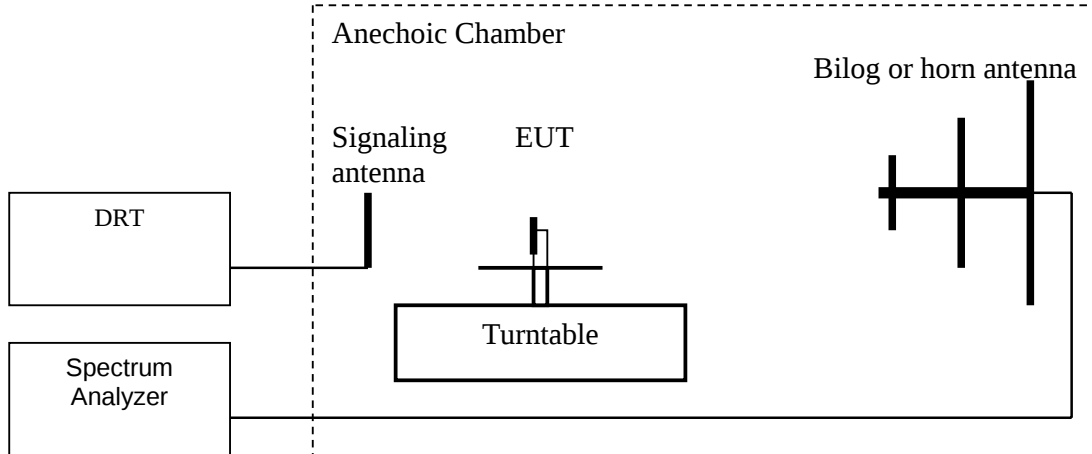


1. Connect the equipment as shown in the above diagram with the EUT's antenna in center of the turn table.
2. Adjust the settings of the Digital Radio Communication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the ERP using the following equation:
ERP (dBm) = LVL (dBm) + LOSS (dB)
8. Determine the EIRP using the following equation:
EIRP (dBm) = ERP (dBm) + 2.14 (dB)
9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

Measurement uncertainty: +/-3.0 dB

(**Note:** Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)

5.2 Radiated power Calculation- ERP/EIRP-

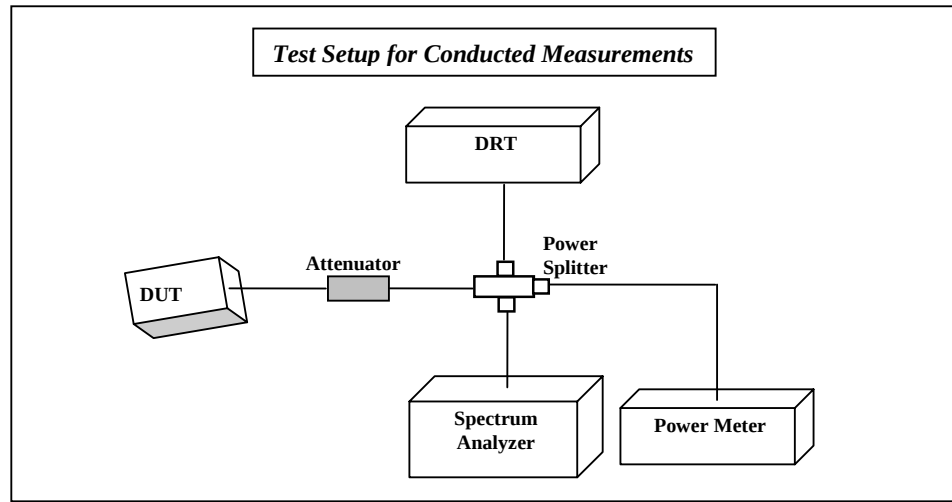

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Digital Radio Communication Tester (DRT) to connect the EUT at the required channel (OR) alternatively use the EUT to set to transmit at a specific mode.
3. Measure conducted power using the power meter or the Spectrum Analyzer.
4. ERP/EIRP is calculated by adding the antenna gain to the measured conducted power.
EIRP= Measured conducted power+ Antenna Gain (dBi)
 (Antenna gain based on measurement or data from the antenna manufacturer.)
ERP= EIRP- 2.14

5.3 Measurement Equipment information:

No.	Equipment Name	Manufacturer	Type/model	Serial No.	Cal Date	Cal Interval
3m Semi- Anechoic Chamber:						
	Digital Radio Comm. Tester	Rohde&Schwarz	CMU 200	101821	Jun 2013	2 Years
	EMC32 Measurement Software	Rohde&Schwarz	8.52.0	N/A	N/A	N/A
	Turn table	EMCO	2075	N/A	N/A	N/A
	MAPS Position Controller	ETS Lindgren	2092	0004-1510	N/A	N/A
	Antenna Mast	EMCO	2075	N/A	N/A	N/A
	Relay Switch Unit	Rohde&Schwarz	RSU	338964/001	N/A	N/A
	EMI Receiver/Analyzer	Rohde&Schwarz	ESU 40	100251	Sep 2013	1 Year
	1500MHz HP Filter	Filtek	HP12/1700	14c48	N/A	N/A
	2800 MHz HP Filter	Filtek	HP12/2800	14C47	N/A	N/A
	Pre-Amplifier	Miteq	JS40010260	340125	N/A	N/A
	Binconilog Antenna	EMCO	3141	0005-1186	Apr 2012	3 Years
	Horn Antenna	EMCO	3115	35114	Mar 2012	3 Years
	Horn Antenna	ETS Lindgren	3116	70497	Mar 2012	3 Years
	Spectrum Analyzer	Rohde&Schwarz	FSU	100189	Jun 2013	2 Years
	Loop Antenna 6512	ETS Lindgren	6512	49838	Mar 2014	3 Years
Ancillary equipment						
	Humidity Temperature Logger	Dickson	TM320	03280063	Apr 2013	2 Year
	Communication Antenna	IBP5-900/1940	Kathrein	N/A	N/A	N/A

5.4 Measurement Summary:

Band of operation	Peak Radiated Power-EIRP		Limits (IC) (where no routine evaluation is required)	Peak Radiated Power ERP		Limits (FCC) (where no routine evaluation is required)
	MHz	dBm	mW	dBm	mW	mW
Bluetooth 4.0 LE 2400 – 2483.5 MHz	5.84	3.837	2500	3.7	2.3	1500

Since the Peak ERP <3W (FCC) and Peak EIRP <5W (IC), this device is exempt from Routine evaluation.

Test Report #: EMC_CSRTE_002_14001_MPE

FCC ID: PIW-CNS12015

Date of Report : 2014-09-25

IC ID: 5255A-CNS12015



6 Revision History

Date	Report Name	Changes to report	Report prepared by
2014-9-25	EMC_CSRTE_002_14001_MPE	Original	Yu-Chien Ho