

Page: 1 of 24

FCC Test Report

Application No.: T31720200102EM

Applicant: MATTEL ASIA PACIFIC SOURCING LIMITED

Address: 13/F., South Tower, World Finance Centre, Harbour City, Tsimshatsui, Kowloon,

Hong Kong.

Product Information:

Product Description: HW AI STARTER SET STREET RACING EDITION - CONTROLLER

(2.4GHz TRANSCEIVER)

Model: FBL83T, FDY09, FGT82, FGT83 ♣

Please refer to section 2 of this report which indicates which item was actually

tested and which were electrically identical.

Age Grading: 8+

Product Class: Low Power Communication Device – Transceiver (2.4 GHz)

FCC ID: PIYFBL83-16A5T

Requirement: CFR 47 FCC PART 15 SUBPART C, 2016

Intentional Radiators (Section 15.249)

Date of Receipt: 2016-06-01, 2017-02-21, 2017-03-29

Date of Test: 2016-06-11 to 2016-06-15, 2017-02-28 to 2017-04-10

Date of Issue: 2017-05-09

Test Result : PASS*

In the configuration tested, the EUT complied with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

Authorized Signature:

TSANG KA TING, Calvin

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and-for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Page: 2 of 24

2 Test Summary

Test	Test Requirement	Test Method	Result
Conducted Emission (150KHz to 30MHz)	FCC PART 15, SUBPART C: 2015	7 1 ///////////////////////////////////	
Radiated Emission (9kMHz to 1GHz)	FCC PART 15, SUBPART C: 2015	7 ANSI (63.10.2013	
Radiated Emission above 1 GHz	FCC PART 15, SUBPART C: 2015	ANSI C63.10:2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	FCC PART 15, SUBPART C: 2015	ANSI C63.10:2013	PASS
20dB bandwidth	FCC PART 15, SUBPART C: 2015	ANSI C63.10:2013	PASS

* Item no.: FBL83T, FDY09, FGT82, FGT83

According to the confirmation from the applicant, the above models are identical in all electrical aspects in relating to the circuit design, PCB layout and construction. The difference is the model number and colour. and change R6 resistor in purpose to fix bug

Therefore only the item FDY09 was tested in this report.

Note: This report is reproduced by transferring the test data from the test report no. T3162021013601 issued on 2016-09-08. As the resistor R6 is changed, Radiated Emission test below 1GHz and above 1GHz is retested and renewed the test data, other test is pre scan checked and keep test data remain unchange.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 3 of 24

3 Contents

		Page
1	COVER PAGE	1
2	TEST SUMMARY	2
3	CONTENTS	3
4		1
•		
	4.1 GENERAL DESCRIPTION OF EUT	
	4.2 DETAILS OF EUT	
	4.4 DESCRIPTION OF SUPPORT UNITS	
	4.5 STANDARDS APPLICABLE FOR TESTING	
	4.6 TEST LOCATION	
	4.7 TEST FACILITY	
	4.8 DEVIATION FROM STANDARDS	
	4.9 ABNORMALITIES FROM STANDARD CONDITIONS	
	4.10 DECLARATION OF FAMILY GROUPING	5
	4.11 Abbreviations	
	4.12 Measurement Uncertainty (95% confidence levels, K=2)	5
5	EQUIPMENTS USED DURING TEST	6
6	TEST RESULTS	8
	6.1 CONDUCTED EMISSIONS MAINS TERMINALS, 150kHz to 30MHz	8
	6.2 RADIATED EMISSIONS, 9KHZ TO 1GHZ	
	6.2.1 EUT Operation	
	6.2.2 Test Setup and Procedure	
	6.2.3 Measurement Data	
	6.3 RADIATED EMISSIONS ABOVE 1 GHZ	
	6.3.1 EUT Operation	
	6.3.2 Test Setup and Procedure	
	6.3.3 Measurement Data	
	6.4 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
6.	.5 20 DB BANDWIDTH	20
7	PHOTOGRAPHS	22
	7.1 RADIATD EMISSION TEST SETUP	22
	7.2 EUT CONSTRUCTIONAL DETAILS	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.asow and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an



Page: 4 of 24

4 General Information

4.1 General Description of EUT

Product Description: HW AI STARTER SET STREET RACING EDITION – CONTROLLER

(2.4GHz TRANSCEIVER)

Model No.: FDY09


Serial No.: --

4.2 Details of EUT

Power Supply: DC 4.5 (AA battery x 3) for TX

Operating Frequency 2405-2463MHz

Antenna Type: Unreplaceble internal Integral antenna



Modulation Type: GFSK

Test frequency tested are the lowest channel: 1 channel (2405MHz), middle channel: 2 channel (2433MHz) and highest channel: 3 channel (2463MHz)

Channel configuration method:

- 1. Press the switch on to enter test mode
- 2. Press the button to change the channel from low to high frequecny

4.3 Conditions of EUT

The received sample was under good condition.

4.4 Description of Support Units

1. All field strength measures in this test report were done by the sample which set the frequency with continuous transmission

4.5 Standards Applicable for Testing

CFR 47, FCC Part 15, 2016 ANSI C63.10:2013

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

y **.**



Page: 5 of 24

4.6 Test Location

All tests were performed at:

SGS IECC Limited (Member of the SGS Group (SGS SA))

Units 303-305, 3/F., 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong

Tel: +852 2305 2570 Fax: +852 2756 4480

4.7 Test Facility

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules (FCC Registration No.: 97774).

The test facility is recognized, certified, or accredited by the following organizations:

FCC - CAB Registration No.: 446297

Measurement facility located at Fanling (Hong Kong), accredited as a Conformity Assessment Body (CAB) and was designated by FCC to perform compliance testing on equipment subject to Declaration Of Conformity (DOC) and Certification under Part 15 and 18 of the Commission's Rules.

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.

4.10 Declaration of Family Grouping

None.

4.11 Abbreviations

N/A: Not Applicable

EUT: Equipment Under Test

4.12 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radiated disturbance 9 kHz - 30MHz	4.2
2	Radiated disturbance 30MHz – 1GHz	5.5
3	Radiated disturbance 1GHz – 18GHz	5.5
4	Conducted Emissions	3.1

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Page: 6 of 24

5 Equipments Used during Test

Conducted Emission				
Equipment	Manufacturer	Model / Serial No.	Cal. Date	Cal. Due Date
Test Receiver	Rohde & Schwarz	ESHS 30 / 839667/002	2016/09/27	2017/09/26
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127 / 8127312	2016/04/20	2017/04/19
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2 / 357881052	2015/02/02	2019/01/22

Radiated Emission				
Equipment	Manufacturer	Model / Serial No.	Cal. Date	Cal. Due Date
3m Semi-Anechoic Chamber (pre-test)				
3m / 10m Open Aera Test Site			2015/03/11	2018/03/10
Test Receiver	Rohde & Schwarz	ESCS 30 / 100388	2016/09/27	2017/09/26
Spectrum Analyzer	Rohde & Schwarz	FSP 30 / 101474	2016/06/12	2017/06/11
Loop antenna	Rohde & Schwarz	HFH2-Z2 / 871336/48	2016/01/23	2019/01/22
Antenna 30-1000MHz	Schaffner	CBL6111C / 2791	2016/10/19	2018/10/26
Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D / 9120D-1070	2016/01/23	2018/01/22
Horn Antenna 15-26.5GHz	Schwarzbeck	BBHA9170 / 9170-492	2017/01/04	2019/01/04
Preamplifier 10MHz – 6GHz	Schwarzbeck	BBV9743 / 9743-052	2016/4/19	2017/4/18
Preamplifier 1-18GHz	Schwarzbeck	BBV9718 / 9718-223	2017/01/22	2018/01/21
Preamplifier 18- 26.5GHz	Schwarzbeck	BBV9719 / 9719-019	2016/11/18	2017/11/17
Coaxial Cable		E167	2016/06/23	2017/06/22

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.asow and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an



Page: 7 of 24

RF Cable	HUBER+SUHNER	E207	2016/11/16	2017/11/15
Antenna Mast System	Schwarzbeck	AM9104 / -		
Turntable with Controller	Drehtisch	DT312 / -		

General Use Equipment							
Equipment	Manufacturer	Model / Serial No.	Cal. Date	Cal. Due Date			
Digital Multimeter	Fluke	189 / 83640020	2016/04/20	2017/04/19			
Temperature / Humidity meter	-	E159	2016/10/06	2017/10/05			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.asow and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an



Page: 8 of 24

6 Test Results

6.1 Conducted Emissions Mains Terminals, 150kHz to 30MHz

Test Requirement: FCC Part15 C
Test Method: ANSI C63.10:2013
Test Date: Not Applicable

Remark:

This test is not applicable as the EUT is battery operated.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.asow and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Page: 9 of 24

6.2 Radiated Emissions, 9kHz to 1GHz

Test Requirement: FCC Part15 Subpart C Section 15.209 and 15.249(d)

Test Method: ANSI C63.10:2013

Test Date: 2017-04-10

Frequency Range: The lowest frequency generated by EUT, 12MHz to 1GHz

Measurement Distance: 3m

Detector: Peak for pre-scan

(200Hz resolution bandwidth and 1kHz video bandwidth for measurement

between 9kHz - 150kHz)

(9kHz resolution bandwidth and 100kHz video bandwidth for

measurement between 150kHz - 30MHz)

120kHz resolution bandwidth and 1MHz video bandwidth for

measurement between 30MHz to 1GHz)

Quasi-Peak if maximised peak within 6dB of limit

I imit:

Frequency range MHz	Quasi-peak limits dB (μV/m)
0.009 - 0.490	-72.4 – 20logF(MHz)
0.490 – 1.705	-12.4 – 20logF(MHz)
1.705 – 30.0	-10.5
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

Note: 1) At transitional frequencies the lower limit applies.

2) F is the frequency of the spurious emission measured in MHz.

3) Limit from 0.009 – 30 MHz is converted from measuring distance 300m or 30m to 3m with the formulat provided in FCC Part 15, section 15.31(f)(2)

6.2.1 EUT Operation

Operating Environment:

Temperature: 25 °C Humidity: 51 %

EUT Operation: Pre-test with Peak detector with the following mode(s):

1: Transmission in continous transmitting mode

2. Test in lowest, middle and high frequency

Final test with Quasi-Peak detector with the following mode(s):

1: Transmission in continous transmitting mode

2. Test in lowest, middle and high frequency


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Page: 10 of 24

6.2.2 Test Setup and Procedure

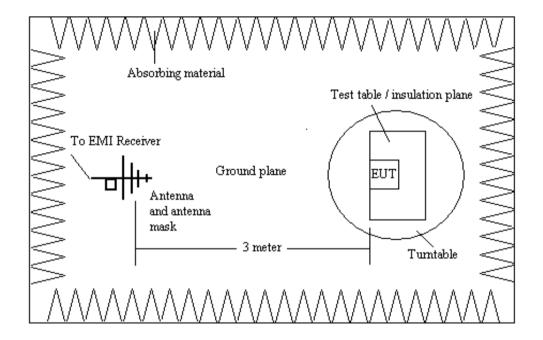

- 1. The pre-test of the radiated emissions test was conducted in a semi-anechoic chamber and the final measurement was conducted in the open area test site.
- The EUT was connected to AC power source through a mains power outlet which was bonded to the ground reference plane. The EUT was placed upon a non-metallic table 0.8m above the ground reference plane.
- 3. Loop antennat and Bilog antenna was used for the frequency range from the lowest generated frequency to 30MHz and 30MHz to 1GHz respectively
- 4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT with located frequencies.
- 5. The actual frequencies of maximum emission were confirmed in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters for Bilog antenna (Loop antenna is still maintain in 1m hight) in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 11 of 24

6.2.3 Measurement Data

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured by Bilog antenna with 2 orthogonal polarities and frequencies of peak emissions from the EUT were detected within 6dB of the limit line. Final measurement was conducted in the open area test site with data as follows:

Test results:

(1) Operation Frequency: 2405MHz (Controller)

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)
30.125	Н	19.1	1.5	20.6	40.0	-19.4
53.438	V	11.2	3.3	14.5	40.0	-25.5
138.063	V	11.7	3.5	15.2	43.5	-28.3
291.875	Н	13.7	4.0	17.7	46.0	-28.3
487.125	Н	18.5	3.9	22.4	46.0	-23.6
865.625	V	22.5	2.1	24.6	46.0	-21.4

(2) Operation Frequency: 2433MHz (Controller)

	-					
Frequency	Antenna	Correction	Receiver	Emission	Limit	Over Limit
	Polarization	Factor	QP Reading	Level	(dBµV/m)	
(MHz)	Polarization	(dB/m)	(dBµV)	(dBµV/m)		(dB)
30.063	V	19.2	2.0	21.2	40.0	-18.8
45.813	V	13.2	3.4	16.6	40.0	-23.4
130.938	V	11.6	4.1	15.7	43.5	-27.8
295.188	Н	13.8	4.3	18.1	46.0	-27.9
439.250	V	18.2	4.2	22.4	46.0	-23.6
849.250	V	22.3	2.4	24.7	46.0	-21.3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 12 of 24

(3) Operation Frequency: 2463MHz (Controller)

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)
30.875	V	18.8	3.4	22.2	40.0	-17.8
49.813	Н	12.0	3.8	15.8	40.0	-24.2
138.375	V	11.7	3.9	15.6	43.5	-27.9
298.875	V	14.0	4.5	18.5	46.0	-27.5
493.875	V	18.6	4.5	23.1	46.0	-22.9
818.625	V	22.0	2.9	24.9	46.0	-21.1

Note:

- 1) All readings are Quasi-Peak values.
- 2) Correction Factor = Antenna Factor + Cable Loss.
- 3) The above results were the worst case results with the EUT positioned in all 3 axis during the test. The EUT was positioned vertically and horizontally on the table for vertical and horizontal measurement respectively.
- 4) Other emissions more than 20dB below the limit are not shown on the above table and only worst six emissions below 1GHz are listed.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 13 of 24

6.3 Radiated Emissions above 1 GHz

Test Requirement: FCC Part15 Subpart C Section 15.209 & 15.249(a) & (d)

Test Method: ANSI C63.10
Test Date: 2017-04-10
Frequency Range: 1GHz – 26GHz

Measurement Distance: 3m

Detector: Peak for pre-scan (1MHz resolution bandwidth, 1MHz video bandwidth)

Average and Peak detector for final test

Limit:

Fundamental Frequency:

Frequency range MHz	Limits (Peak) dB (μV/m)	Limits (Average) dB (μV/m)
2400 to 2483.5	114	94

Spurious Emission:

Frequency range	Limits (Peak)	Limits (Average)	
MHz	dB (μV/m)	dB (μV/m)	
Over 1000	74	54	

6.3.1 EUT Operation

Operating Environment:

Temperature: 25 °C Humidity: 51 %

EUT Operation: Pre-test with Peak detector with the following mode(s):

1: Transmission in continous transmitting mode

2. Test in lowest, middle and high frequency

Final test with Peak and Avearge detector with the following mode(s):

1: Transmission in continous transmitting mode


2. Test in lowest, middle and high frequency

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 14 of 24

6.3.2 Test Setup and Procedure

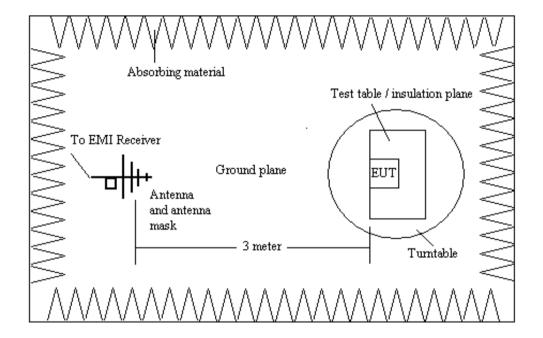

- 1. The pre-test of the radiated emissions test was conducted in a semi-anechoic chamber and the final measurement was conducted in the open area test site.
- The EUT was connected to AC power source through a mains power outlet which was bonded to the ground reference plane. The EUT was placed upon a non-metallic table 1.5m above the ground reference plane.
- 3. Horn antenna was used for the frequency over 1GHz
- 4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT with located frequencies.
- 5. The actual frequencies of maximum emission were confirmed in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

FCC ID: PIYFBL83-16A5T




Page: 15 of 24

6.3.3 Measurement Data

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured with 2 orthogonal polarities and frequencies of average emissions from the EUT were measured as follows:

Emission at the fundemental frequency for the pulse modulated device was measured with the peak detector function of the test receiver and was properly adjusted for the duty cycle correction factor as pulse desensitization to calculate the average emission value.

Time Domain Plots (Fundamental frequency of Transmitter):

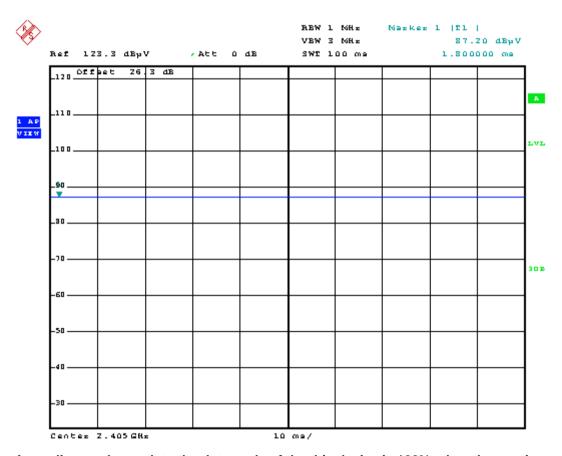

According to above plot, the duty cycle of the this device is 100%, plused operation according to C63.10 clause 7.5 is not employed and the average correction calculation is not applied on this report.

Hence, the average measurement is used below setting:

Dectector = peak

RBW = ≥1MHz

VBW = ≥1Hz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Page: 16 of 24

Test results:

(1) Fundmental Frequency (Controller)

Frequency	Antenna	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
(MHz)	Polarization	Peak	Average	Peak	Average	Nemark
2405.0	Н	89.92	74.95	114	94	Pass
2405.0	V	92.52	75.87	114	94	Pass
2433.0	Н	91.95	73.93	114	94	Pass
2433.0	V	92.50	75.35	114	94	Pass
2463.0	Н	90.73	75.34	114	94	Pass
2463.0	V	95.60	74.24	114	94	Pass

(2) Spurious Emission

Operation Frequency: 2405.0 MHz (Controller)

Frequency	Antenna	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
(MHz)	Polarization	Peak	Average	Peak	Average	Remark
4810.000	V	56.10	44.63	74	54	Pass
5611.000	V	46.00	30.31	74	54	Pass
7215.000	V	50.00	36.67	74	54	Pass
8655.000	Н	50.80	35.60	74	54	Pass
9620.000	Н	52.70	40.53	74	54	Pass
12025.000	V	50.80	35.81	74	54	Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an



Page: 17 of 24

Operation Frequency: 2433.0 MHz (Controller)

Frequency	Antenna	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
(MHz)	Polarization	Peak	Average	Peak	Average	Roman
4866.000	Н	60.00	45.15	74	54	Pass
6274.000	Н	45.50	30.52	74	54	Pass
7299.000	V	50.10	35.70	74	54	Pass
8452.000	V	50.00	34.99	74	54	Pass
9732.000	V	52.40	36.6	74	54	Pass
12165.000	Н	51.00	35.83	74	54	Pass

Operation Frequency: 2463.0 MHz (Controller)

Frequency	Antenna	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
(MHz)	Polarization	Peak	Average	Peak	Average	Nemark
4926.000	Н	57.40	44.30	74	54	Pass
6713.000	V	47.60	32.77	74	54	Pass
7389.000	Н	49.40	34.97	74	54	Pass
8634.000	Н	50.00	35.49	74	54	Pass
9852.000	V	51.30	35.72	74	54	Pass
12315.000	V	51.20	36.19	74	54	Pass

Note:

- 1) The above results were the worst case results with the EUT positioned in all 3 axis during the test. The EUT was positioned vertically and horizontally on the table for vertical and horizontal measurement respectively.
- 2) Other emissions more than 20dB below the limit are not shown on the above table and only worst six emissions below 1GHz are listed.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 18 of 24

6.4 Restricted bands around fundamental frequency

Test Requirement: FCC Part15 Subpart C Section 15.215, 15.249(d)

Test Method: ANSI C63.10

Measurement Distance: 3m

Detector: (1MHz resolution bandwidth, 3MHz video bandwidth)

Average and Peak detector

Limit: Emissions radiated outside of the specified frequency bands, except for

harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general field strength limits listed in RSS-Gen,

whichever is less stringent.

	54.0	Average Value
Above 1GHz	74.0	Peak Value

Test Date: 2016-06-15

EUT Operation: 1: Transmission with GFSK

Result: Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 19 of 24

Test results: (Worst case: Transmissin with GFSK)

Operation frequency: 2405.0 MHz

Frequency	Antenna	Emission Level (dBµV/m)		Limit (d	Remark	
(MHz)	Polarization	Peak	Average	Peak	Average	rtomant
2390.0	V	37.99	21.34	74	54	Pass

Operation frequency: 2463.0 MHz

Frequency	Antenna	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
(MHz)	Polarization	Peak	Average	Peak	Average	Roman
2483.5	V	37.10	21.25	74	54	Pass

According to above bandedge measurement, emissions radiated outside of the specified frequency bands, (2400-2483.5)MHz except for harmonics, are below general field strength limits under 15.209 It is deemed to comply with section 15.215 and 15.249(d)

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 20 of 24

6.5 20 dB Bandwidth

Test Requirement: FCC Part15 Subpart C Section 15.215

Test Method: ANSI C63.10:2013


Test Date: 2016-06-15

EUT Operation: 1: Transmission with GFSK

Result: Pass

Test Plot: (Worst case: Transmission with GFSK)

Operation frequency: 2405.0 MHz

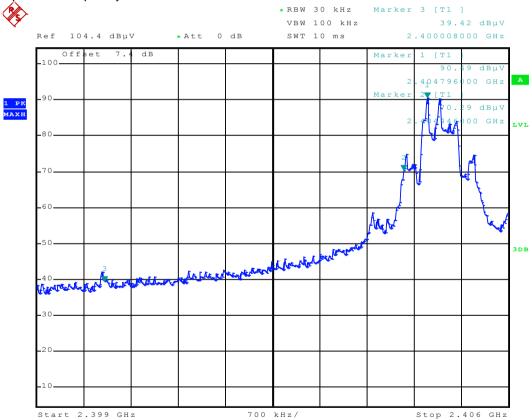


According to above plot, 20dB bandwidth falls in assigned band (2400-2483.5)MHz. It is deemed to comply with section 15.215

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Page: 21 of 24

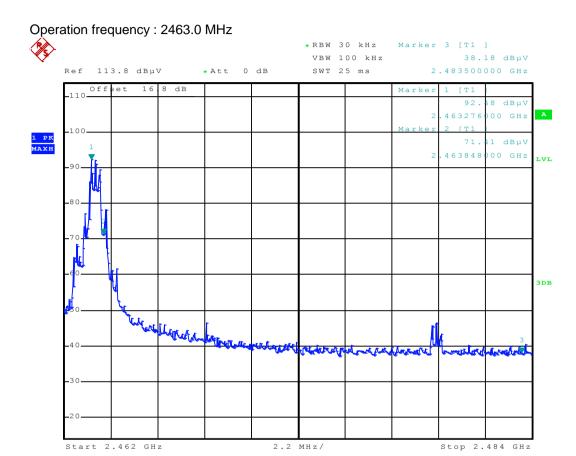

According to above plot, 20dB bandwidth falls in assigned band (2400-2483.5)MHz. It is deemed to comply with section 15.215


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 22 of 24

7 Photographs

7.1 Radiatd Emission Test Setup

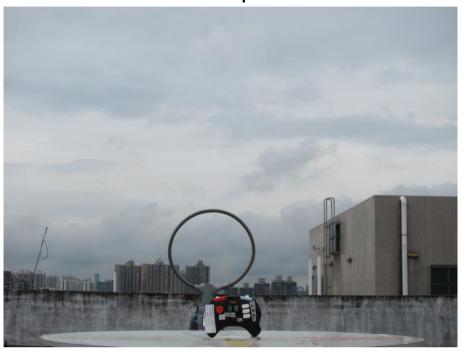


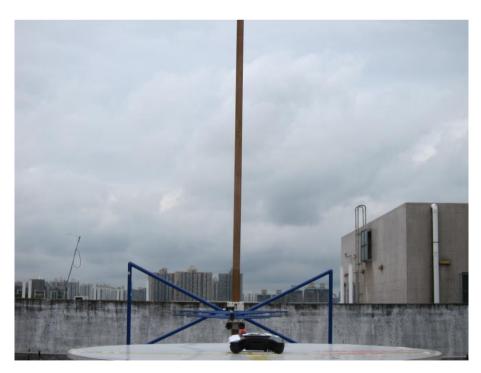

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.asow and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an



Report No.: T3172020010201 Page: 23 of 24

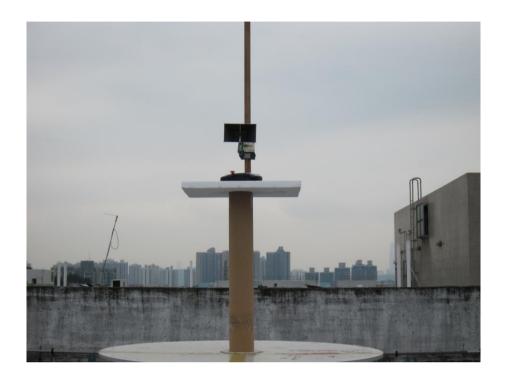

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.asow and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an



Report No.: T3172020010201 Page: 24 of 24

7.2 EUT Constructional Details





- END OF REPORT --

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.asxw and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an