



EMC TEST REPORT

Report No. : EME-010048

Model No. : 9012

Issued Date : Mar. 16, 2001

**Applicant : CIDMATE International Technology Inc.
5F-1, No. 168, Lian-Cheng Rd., Chung-Ho City,
Taipei Hsien, Taiwan, R.O.C.**

**Test By : Intertek Testing Services Taiwan Ltd.
No. 11, Ko-Tze-Nan Chia-Tung Li, Shiang-Shan District,
Hsinchu, Taiwan, R.O.C.**

This test report consists of 23 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of ITS Laboratory. The test result in this report only applies to the tested sample.

Test Engineer

Approved By

Elton Chen

J. T. CHEN
MANAGER (EMC LABORATORY)
ETL SEMKO DIVISION





Table of Contents

1. Summary of Tests	3
1.1 General Information	4
1.2 Identification of the EUT.....	4
1.3 Test Assignment to the EUT.....	4
1.4 Peripherals equipment	5
2. Test Condition.....	6
2.1 Test Standard	6
2.2 EMI Reduction Solution During Compliance Testing	6
2.3 Test Equipment	7
3. Conducted emission test FCC 15.207	8
3.1 Operating Environment	8
3.2 System Test Configuration	8
3.4 Conducted Emission Data (Base unit) FCC 15.207	9
4. Radiated Emission Test FCC 15.249 (C).....	12
4.1 Operating Environment	12
4.2 Test Setup & procedure	12
4.3 Radiated Emission Test Data (Handset unit) FCC 15.249	13
4.3.1 Fundamental & Harmonics Emission Data	13
4.4 Radiated Emission Test Data (Base unit) FCC 15.249.....	16
4.4.1 Fundamental & Harmonics Emission Data	16
4.5 General Radiated Emission Data (Handset unit) FCC 15.209	19
4.5.1 General Radiated Emission Data.....	19
4.6 General Radiated Emission Data (Base unit) FCC 15.209.....	21
4.6.1 General Radiated Emission Data.....	21
4.7 Radiated Emission on the band edge FCC 15.249(C).....	23



Intertek Testing Services

ETL SEMKO

FCC ID.: PIZMH9012

Report No.: EME-010048

Page 3 of 23

1. Summary of Tests

Basic 900MHz Cordless Phone-Model: 9012 **FCC ID: PIZMH9012**

Test	Reference	Results
Emission within operated Band	15.249(a) (b)	Complies
Conducted Emission of AC Power	15.207	Complies
Radiated Emission	15.249(c), 15.209	Complies
Emission above 1GHz	15.249(d)	Complies
Radiated Measurements	15.33(a)	Complies

Test Engineer

Approved By

Elton Chen

J. T. CHEN
MANAGER (EMC LABORATORY)
ETL SEMKO DIVISION





Intertek Testing Services

ETL SEMKO

FCC ID.: PIZMH9012

Report No.: EME-010048

Page 4 of 23

1.1 General Information

1.2 Identification of the EUT

Manufacturer	: CIDMATE International Technology Inc.
Product	: Basic 900MHz Cordless Phone
Model No.	: 9012
FCC ID.	: PIZMH9012
Frequency Range	: 902MHz to 928MHz
Channel Number	: 40 channels
Type of Modulation	: FM
Power Supply	: 120Vac, 60Hz to 9Vdc adapter
Data Cable	: Cable length 10m with RJ-11 connector ×1
Sample Received	: Jan. 17, 2001
Test Date(s)	: Jan. 29, 2001 to Feb. 27, 2001

1.3 Test Assignment to the EUT

The EUT is a Basic 900MHz Cordless Phone, and is defined as Unlicensed Intentional Radiated equipment, should be conducted the tests to represent the conformity of FCC Part 15 Subpart C Paragraph 15.249 for non-spread spectrum devices.

The models listed below are identical to model 9012 (EUT); the difference is model number for different brand serves as marketing strategy.

<u>Trade Name(s)</u>	<u>Model Number</u>
BELLSOUTH	MH9012xx, I9012xx, M40002xx
Unisonic	MH9012xx, I9012xx, M40002xx
U-phone	MH9012xx, I9012xx, M40002xx
i5	MH9012xx, I9012xx, M40002xx
P2-net	MH9012xx, I9012xx, M40002xx

The "x" could be alphabet, number or blank, for the difference in "*" do not affect the EMI characteristics.

For more detail features, please refer to user's Manual.



1.4 Peripherals equipment

1. Exchange Board

Product No.	: 250-00193-07
Serial No.	: 94948
Manufacturer	: Teltone

2. Telephone

Product No.	: ATC-814
Serial No.	: 9904000066
Manufacturer	: Tozai

3. Headphone

Product No.	: EMS-101
Serial No.	: N/A
Manufacturer	: STAND WIN Co., Ltd.



2. Test Condition

2.1 Test Standard

The EUT was performed according to the procedures in FCC Part 15 Subpart C Paragraph 15.249 for non-spread spectrum devices.

The AC power conducted emissions was investigated over the frequency range from 0.45MHz to 30MHz using a receiver bandwidth of 9kHz. (15.207 paragraph)

Radiated emissions were investigated over the frequency range from 30MHz to 1000MHz using a receiver bandwidth of 120kHz and the frequency over 1GHz using a receiver bandwidth of 1MHz. (15.209 paragraph)

The test of radiated measurements according to FCC Part 15 Section 15.33(a) had been conducted and the field strength of this frequency band were all more than 20dB under limit level as specified in Section 15.33(a), thus we evaluate the EUT pass the specified test.

Radiated testing was performed at an antenna to EUT distance of 3 meters.

The EUT setup configurations please refer to the photo of test configuration in item.

2.2 EMI Reduction Solution During Compliance Testing

No modification was made during testing.



2.3 Test Equipment

Conducted Emission

Equipment	Brand	Model No.	ITS ID No.
EMI Receiver	Rohde & Schwarz	ESCS 30	EC318
EMI Receiver	Rohde & Schwarz	ESMI	EC317
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EC318
Shield Room	N/A	N/A	N/A

Note:

1. The calibration interval of the above instruments is 12 months.

Radiated Emission

Equipment	Brand	Model No.	ITS ID No.
EMI Receiver	Rohde & Schwarz	ESCS 30	EC318
EMI Spectrum	Rohde & Schwarz	ESMI	EC317
Pre-Amplifier	Advantest	BB525C	83120047
Horn Antenna	EMCO	3115	EC332
Turn Table	Electro-Metrics	EM4710	EP306
Bilog Antenna	Electro-Metrics	EM-6917-1	EC325
Antenna Tower	Electro-Metrics	EM-4720	EP307

Note:


1. The calibration interval of the above instruments is 12 months.

3. Conducted emission test FCC 15.207

3.1 Operating Environment

Temperature: 18 °C J
Relative Humidity: 66 %

3.2 System Test Configuration

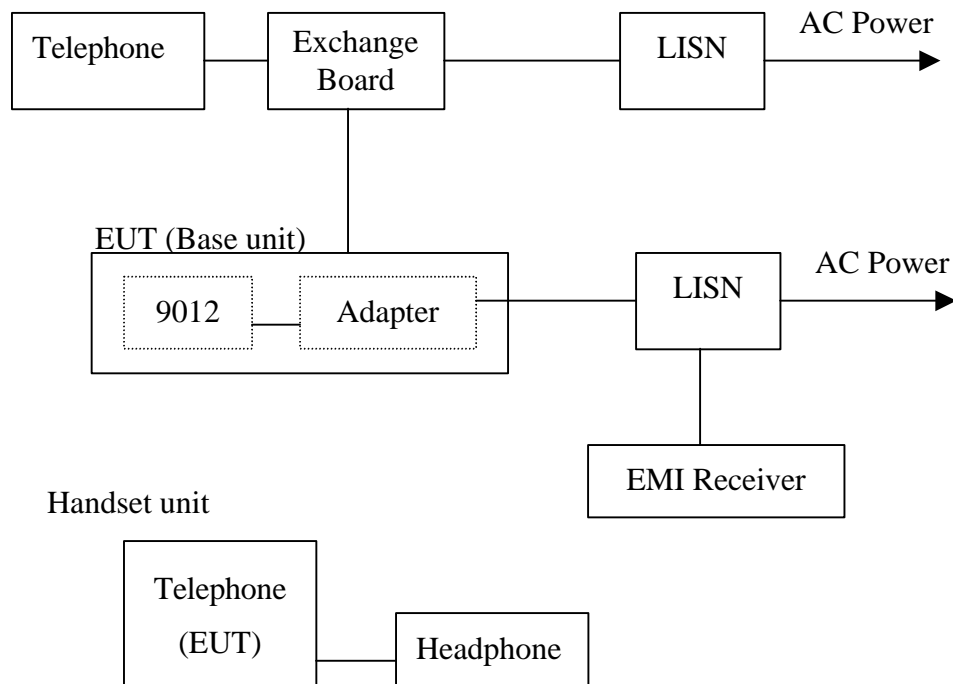

The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.



3.4 Conducted Emission Data (Base unit) FCC 15.207

**Worst Case Conducted Emission
at Low Channel, Neutral, 15.882 MHz ,margin:-19.50 dB**

(1) Line

EUT : 9012 (Base unit)

Test Mode : Low Channel

Freq. (MHz)	Reading (dBµV) QP	Limit (dBµV) QP	Margin (dB) QP
0.474	26	48	-22.00
0.73	18.2	48	-29.80
1.026	11.6	48	-36.40
0.466	23.5	48	-24.50

(2) Neutral

EUT : 9012 (Base unit)

Test Mode : Low Channel

Freq. (MHz)	Reading (dBµV) QP	Limit (dBµV) QP	Margin (dB) QP
0.754	14	48	-34.00
13.762	10.7	48	-37.30
15.882	28.5	48	-19.50

Remark:

1. The reading value including cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the Conducted Emission Test, the uncertainty is within ± 0.5 dB
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Intertek Testing Services

ETL SEMKO

FCC ID.: PIZMH9012

Report No.: EME-010048

Page 10 of 23

(3) Line

EUT : 9012 (Base unit)

Test Mode : Middle Channel

Freq. (MHz)	Reading (dB µV) QP	Limit (dB µV) QP	Margin (dB) QP
0.474	25.8	48	-22.20
0.714	18.4	48	-29.60
1.018	12	48	-36.00
13.618	12.7	48	-35.30

(4) Neutral

EUT : 9012 (Base unit)

Test Mode : Middle Channel

Freq. (MHz)	Reading (dB µV) QP	Limit (dB µV) QP	Margin (dB) QP
0.466	23.5	48	-24.50
0.754	13.3	48	-34.70
13.65	17	48	-31.00

Remark:

1. The reading value including cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the Conducted Emission Test, the uncertainty is within ± 0.5 dB
3. The average measurement was not performed when the peak measured data under the limit of average detection.



(5) Line

EUT : 9012 (Base unit)

Test Mode : High Channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Margin (dB) QP
0.482	25.3	48	-22.70
0.722	18	48	-30.00
1.066	11.3	48	-36.70
13.618	16	48	-32.00

(6) Neutral

EUT : 9012 (Base unit)

Test Mode : High Channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Margin (dB) QP
0.458	23.4	48	-24.60
0.506	20.2	48	-27.80
15.882	23.1	48	-24.90
23.754	17.9	48	-30.10

Remark:

1. The reading value including cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the Conducted Emission Test, the uncertainty is within ± 0.2 dB
3. The average measurement was not performed when the peak measured data under the limit of average detection.


4. Radiated Emission Test FCC 15.249 (C)

4.1 Operating Environment

Temperature: 18 °C J
Relative Humidity: 70 %

4.2 Test Setup & procedure

The Diagram below shows the test setup, which is utilized to make these measurements.

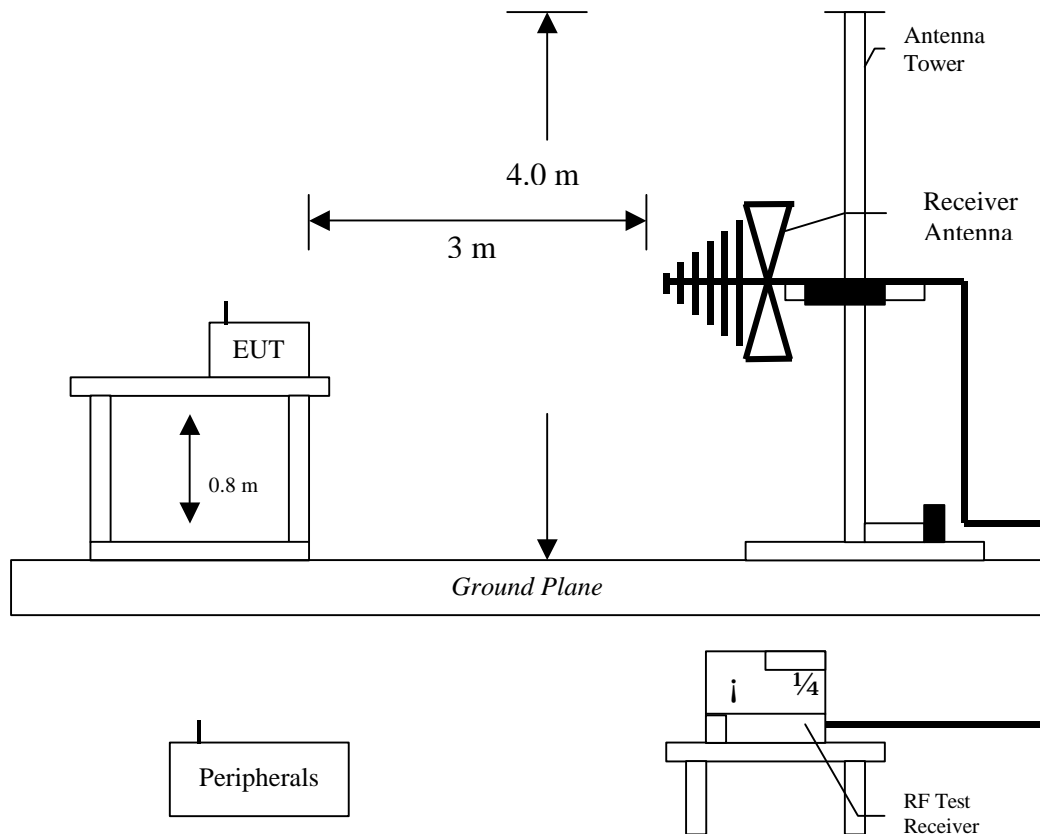

The EUT are placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4/1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Receiver ESMI) is 120kHz and above 1GHz is 1MHz.



4.3 Radiated Emission Test Data (Handset unit) FCC 15.249

Worst Case Radiated Emission at Low Channel, 1849.74 MHz, margin: -5.03 dB

4.3.1 Fundamental & Harmonics Emission Data

EUT : 9012 (Handset unit)
Testing Mode : Transmitter (Low Channel)

Freq. (MHz)	Spec. Analyz Detector	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Limit At 3m (dBuV/m)	Margin (dB)
924.875	PK	V	56.31	22.35	5.08	83.74	94	-10.26
924.875	PK	H	57.94	22.35	5.08	85.37	94	-8.63
1849.74	AV	V	20.37	26.4	2.2	48.97	54	-5.03
1849.74	AV	H	19.24	26.4	2.2	47.84	54	-6.16
2774.58	AV	V	13.24	29.5	2.64	45.38	54	-8.62
2774.58	AV	H	12.82	29.5	2.64	44.96	54	-9.04

Remark:

1. Corrected Level = Reading Level + Antenna Factor + Cable Loss
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the General Radiated Emission Test, the uncertainty is within ± 0.5 dB
3. All Readings below 1GHz are Quasi-Peak, above are average value



Intertek Testing Services

ETL SEMKO

FCC ID.: PIZMH9012

Report No.: EME-010048

Page 14 of 23

EUT : 9012 (Handset unit)
Testing Mode : Transmitter (Middle Channel)

Freq. (MHz)	Spec. Analyz Detector	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Limit At 3m (dBuV/m)	Margin (dB)
926.295	PK	H	58.36	22.35	5.08	85.79	94	-8.21
926.295	PK	V	52.47	22.35	5.08	79.9	94	-14.1
1852.55	AV	H	18.34	26.4	2.2	46.94	54	-7.06
1852.55	AV	V	17.33	26.4	2.2	45.93	54	-8.07
2778.87	AV	H	12.34	29.5	2.64	44.48	54	-9.52
2778.87	AV	V	11.45	29.5	2.64	43.59	54	-10.41

Remark:

1. Corrected Level = Reading Level + Antenna Factor + Cable Loss
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the General Radiated Emission Test, the uncertainty is within ± 0.5 dB
3. All Readings below 1GHz are Quasi-Peak, above are average value



Intertek Testing Services

ETL SEMKO

FCC ID.: PIZMH9012

Report No.: EME-010048

Page 15 of 23

EUT : 9012 (Handset unit)
Testing Mode : Transmitter (High Channel)

Freq. (MHz)	Spec. Analyz Detector	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Limit At 3m (dBuV/m)	Margin (dB)
927.5	PK	V	53.91	22.35	5.08	81.34	94	-12.66
927.5	PK	H	57.96	22.35	5.08	85.39	94	-8.61
1855.11	AV	V	16.67	26.4	2.2	45.27	54	-8.73
1855.11	AV	H	17.34	26.4	2.2	45.94	54	-8.06
2782.638	AV	V	11.28	29.5	2.64	43.42	54	-10.58
2782.638	AV	H	12.34	29.5	2.64	44.48	54	-9.52

Remark:

1. Corrected Level = Reading Level + Antenna Factor + Cable Loss
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the General Radiated Emission Test, the uncertainty is within ± 0.5 dB
3. All Readings below 1GHz are Quasi-Peak, above are average value



4.4 Radiated Emission Test Data (Base unit) FCC 15.249

Worst Case Radiated Emission
at High Channel, 1810.18 MHz, margin: -9.16 dB

4.4.1 Fundamental & Harmonics Emission Data

EUT : 9012 (Base unit)
Testing Mode : Transmitter (Low Channel)

Freq. (MHz)	Spec. Analyz Detector	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Limit At 3m (dBuV/m)	Margin (dB)
902.551	PK	H	52.54	22.43	5.08	80.05	94	-13.95
902.551	PK	V	55.25	22.43	5.08	82.76	94	-11.24
1805.07	AV	V	15.71	26.4	2.2	44.31	54	-9.69
1805.07	AV	H	14.63	26.4	2.2	43.23	54	-10.77
2707.65	AV	H	6.24	29.5	3.14	38.88	54	-15.12
2707.65	AV	V	5.82	29.5	3.14	38.46	54	-15.54

Remark:

1. Corrected Level = Reading Level + Antenna Factor + Cable Loss
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the General Radiated Emission Test, the uncertainty is within ± 0.5 dB
3. All Readings below 1GHz are Quasi-Peak, above are average value



Intertek Testing Services

ETL SEMKO

FCC ID.: PIZMH9012

Report No.: EME-010048

Page 17 of 23

EUT : 9012 (Base unit)
Testing Mode : Transmitter (Middle Channel)

Freq. (MHz)	Spec. Analyz Detector	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Limit At 3m (dBuV/m)	Margin (dB)
903.746	PK	V	55.1	22.43	5.08	82.61	94	-11.39
903.746	PK	H	52.56	22.43	5.08	80.07	94	-13.93
1807.49	AV	V	12.41	26.4	2.2	41.01	54	-12.99
1807.49	AV	H	13.24	26.4	2.2	41.84	54	-12.16
2711.24	AV	H	6.34	29.5	3.14	38.98	54	-15.02
2711.24	AV	V	5.1	29.5	3.14	37.74	54	-16.26

Remark:

1. Corrected Level = Reading Level + Antenna Factor + Cable Loss
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the General Radiated Emission Test, the uncertainty is within ± 0.5 dB
3. All Readings below 1GHz are Quasi-Peak, above are average value



Intertek Testing Services

ETL SEMKO

FCC ID.: PIZMH9012

Report No.: EME-010048

Page 18 of 23

EUT : 9012 (Base unit)
Testing Mode : Transmitter (High Channel)

Freq. (MHz)	Spec. Analyz Detector	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Limit At 3m (dBuV/m)	Margin (dB)
905.091	PK	H	52.21	22.43	5.08	79.72	94	-14.28
905.091	PK	V	54.54	22.43	5.08	82.05	94	-11.95
1810.18	AV	V	15.34	26.4	2.2	43.94	54	-10.06
1810.18	AV	H	16.24	26.4	2.2	44.84	54	-9.16
2715.273	AV	H	7.64	29.5	3.14	40.28	54	-13.72
2715.273	AV	V	8.22	29.5	3.14	40.86	54	-13.14

Remark:

1. Corrected Level = Reading Level + Antenna Factor + Cable Loss
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the General Radiated Emission Test, the uncertainty is within ± 0.5 dB
3. All Readings below 1GHz are Quasi-Peak, above are average value



4.5 General Radiated Emission Data (Handset unit) FCC 15.209

Worst Case Radiated Emission at Polarization Vertical, 30 MHz, margin: -19.84 dB

4.5.1 General Radiated Emission Data

(1) Polarity : Vertical
EUT : 9012 (Handset unit)
Testing Mode : Transmitter

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dB μ V)	Calculated (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30	13.61	1.6	2.17	17.38	40	-22.62
37.76	15.2	1.77	2.70	19.67	40	-20.33
80.44	6.47	2.18	1.69	10.34	40	-29.66
159.98	8.82	3.03	3.49	15.34	43.5	-28.16
220.12	10.59	3.5	1.11	15.20	46	-30.80
241.46	11.42	3.5	0.75	15.67	46	-30.33

Remark:

1. Calculated Level = Reading Level + Antenna Factor + Cable Loss
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the General Radiated Emission Test, the uncertainty is within ± 0.5 dB
3. All Readings below 1GHz are Quasi-Peak, above are average value



Intertek Testing Services

ETL SEMKO

FCC ID.: PIZMH9012

Report No.: EME-010048

Page 20 of 23

(2) Polarity : Horizontal
EUT : 9012 (Handset unit)
Testing Mode : Transmitter

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dB μ V)	Calculated (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30	13.61	1.6	4.95	20.16	40	-19.84
31.94	14	1.64	1.89	17.53	40	-22.47
39.7	14.61	1.74	2.91	19.26	40	-20.74
64.92	8.84	1.93	1.54	12.31	40	-27.69
227.88	10.59	3.5	1.30	15.39	46	-30.61
236.61	11.42	3.5	1.32	16.24	46	-29.76

Remark:

1. Calculated Level = Reading Level + Antenna Factor + Cable Loss
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the General Radiated Emission Test, the uncertainty is within ± 0.5 dB
3. All Readings below 1GHz are Quasi-Peak, above are average value



4.6 General Radiated Emission Data (Base unit) FCC 15.209

**Worst Case Radiated Emission
at Polarization Vertical, 30.97 MHz, margin: -13.18 dB**

4.6.1 General Radiated Emission Data

(1) Polarity : Vertical
EUT : 9012 (Base unit)
Testing Mode : Transmitter

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dB μ V)	Calculated (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.97	13.61	1.6	11.61	26.82	40	-13.18
47.46	13.44	1.75	3.15	18.34	40	-21.66
66.86	8.57	1.95	2.62	13.14	40	-26.86
101.78	8.64	2.45	1.83	12.92	43.5	-30.58

Remark:

1. Calculated Level = Reading Level + Antenna Factor + Cable Loss
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the General Radiated Emission Test, the uncertainty is within ± 2.5 dB
3. All Readings below 1GHz are Quasi-Peak, above are average value



Intertek Testing Services

ETL SEMKO

FCC ID.: PIZMH9012

Report No.: EME-010048

Page 22 of 23

(2) Polarity : Horizontal
EUT : 9012 (Base unit)
Testing Mode : Transmitter

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dB μ V)	Calculated (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
39.7	14.61	1.74	7.06	23.41	40	-16.59
81.41	6.47	2.18	1.69	10.34	40	-29.66
157.07	8.82	3.03	1.79	13.64	43.5	-29.86
204.6	10.28	3.1	0.73	14.11	43.5	-29.39

Remark:

1. Calculated Level = Reading Level + Antenna Factor + Cable Loss
2. Uncertainty was calculated in accordance with NAMAS NIS 81. In the General Radiated Emission Test, the uncertainty is within ± 0.5 dB
3. All Readings below 1GHz are Quasi-Peak, above are average value



4.7 Radiated Emission on the band edge FCC 15.249(C)

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental (902~928MHz). Please refer to the attachment plots.

Base

Band-edge channel 1: 9012BC1.pdf

Handset

Band-edge channel 40: 9012BC40.pdf