

TABLE OF CONTENTS LIST

APPLICANT: ID FONE CO., LTD
FCC ID: PJ4ID-2400TRB

TEST REPORT:

PAGE	1.....	SECURITY CODING INFORMATION & PRODUCT DESC.
PAGE	2-4.....	TEST EQUIPMENT LIST
PAGE	5.....	TEST PROCEDURES
PAGE	6-8.....	POWER LINE CONDUCTED INTERFERENCE & PLOTS
PAGE	9.....	OCCUPIED BANDWIDTH AND PEAK POWER OUTPUT
PAGE	10.....	6dB BANDWIDTH PLOT BASE
PAGE	11.....	PULSED CORRECTION FACTOR PLOT
PAGE	12.....	PEAK TO AVERAGE PLOT
PAGE	13.....	RADIATED SPURIOUS EMISSIONS BASE
PAGE	14.....	METHOD OF MEASURING RADIATED EMISSIONS
PAGE	15.....	RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND
PAGE	16-17.....	BANDEDGE PLOTS - BASE
PAGE	18.....	POWER SPECTRAL DENSITY
PAGE	19.....	POWER SPECTRAL DENSITY PLOT BASE

EXHIBITS:

EXHIBIT	1.....	FCC ID LABEL SAMPLE
EXHIBIT	2.....	FCC ID LABEL LOCATION
EXHIBIT	3.....	BLOCK DIAGRAM
EXHIBIT	4.....	SCHEMATIC
EXHIBIT	5.....	EXTERNAL PHOTOGRAPHS
EXHIBIT	6.....	INTERNAL PHOTOGRAPHS
EXHIBIT	7.....	USERS MANUAL
EXHIBIT	8.....	OPERATIONAL DESCRIPTION
EXHIBIT	9.....	TEST SETUP PHOTOGRAPH


APPLICANT: ID FONE CO., LTD
FCC ID: PJ4ID-2400TRB

15.214(d) THIS DEVICE COMPLIES WITH THE SECURITY CODE REQUIREMENTS OF 15.214(d)(1)(2) AND (3) BY MEANS OF THE FOLLOWING:

THIS DEVICE HAS 24 MILLION POSSIBLE SECURITY CODES. ONE SECURITY CODE OUT OF 24 MILLION IS PRE-PROGRAMMED WHEN MANUFACTURED AT THE FACTORY. THE CPU CONTROLS THE RF FREQUENCY CHANNEL. AND THE ASIC CONTROLS ADPCM CODEC AND AUDIO SIGNAL SWITCHING ALSO SET UP THE SPREADING CODE. BEFORE THE COMMUNICATION LINK IS ESTABLISHED, THE DEVICE SEARCHES FOR A VACANT RF CHANNEL AND THEN TRANSMITS RF SIGNAL ON THE VACANT CHANNEL.

PRODUCT DESCRIPTION:

This device is a 2.4 GHz DSSS wireless system that can be used by the Police Department to record dialog between the police and a suspect. When a policeman arrests a suspect, he must read the Miranda Rights to suspect. At the scene, a camcorder is recording the scene. This device will transmit the audio signal to the receiver which will be connected to the camcorder. Therefore, both the scene and sound can be recorded for further use.



EMC Equipment List

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
X	3-Meter OATS	TEI	N/A	N/A	Listed 12/22/99	12/22/02
	3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
	Receiver, Beige Tower Spectrum Analyzer (Tan)	HP	8566B Opt 462	3138A07786 3144A20661	CAL 8/31/01	8/31/03
	RF Preselector (Tan)	HP	85685A	3221A01400	CAL 8/31/01	8/31/03
	Quasi-Peak Adapter (Tan)	HP	85650A	3303A01690	CAL 8/31/01	8/31/03
X	Receiver, Blue Tower Spectrum Analyzer (Blue)	HP	8568B	2928A04729	CHAR 10/22/01	10/22/03
X	RF Preselector (Blue)	HP	85685A	2848A18049 2926A00983	CHAR 10/22/01	10/22/03
X	Quasi-Peak Adapter (Blue)	HP	85650A	2811A01279	CHAR 10/22/01	10/22/03
X	Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
	Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
	Biconnical Antenna	Eaton	94455-1	1057	CHAR 3/15/00	3/15/02
	BiconiLog Antenna	EMCO	3143	9409-1043		
X	Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
	Log-Periodic Antenna	Electro-Metrics	EM-6950	632	CHAR 10/15/01	10/15/03
	Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CHAR 10/16/01	10/16/03
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 11/24/00	11/24/03
	Double-Ridged Horn Antenna	Electro-Metrics	RGA-180	2319	CAL 12/19/01	12/19/03
	Horn Antenna	Electro-Metrics	EM-6961	6246	CAL 3/21/01	3/21/03
	Horn Antenna	ATM	19-443-6R	None	No Cal Required	

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/03
	Line Impedance Stabilization . . .	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
	Line Impedance Stabilization . . .	Electro-Metrics	EM-7820	2682	CAL 3/16/01	3/16/03
	Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 5/25/99	5/25/01
	Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CAL 12/12/01	12/12/03
	Oscilloscope	Tektronix	2230	300572	CHAR 2/1/01	2/1/03
	Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
	AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/03
	AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/03
	AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/03
X	Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/04
	Digital Multimeter	Fluke	77	43850817	CHAR 1/8/02	1/8/04
	Digital Multimeter	HP	E2377A	2927J05849	CHAR 1/8/02	1/8/04
	Multimeter	Fluke	FLUKE-77-3	79510405	CAL 9/26/01	9/26/03
	Peak Power Meter	HP	8900C	2131A00545	CHAR 1/26/01	1/26/03
	Digital Thermometer	Fluke	2166A	42032	CAL 1/16/02	1/16/04
	Thermometer	Traulsen	SK-128		CHAR 1/22/02	1/22/04
X	Temp/Humidity gauge	EXTech	44577F	E000901	CHAR 1/22/02	1/22/04
	Frequency Counter	HP	5352B	2632A00165	CAL 11/28/01	11/28/03
	Power Sensor	Agilent Technologies	84811A	2551A02705	CAL 1/26/01	1/26/03
	Service Monitor	IFR	FM/AM 500A	5182	CAL 11/22/00	11/22/02
	Comm. Serv. Monitor	IFR	FM/AM 1200S	6593	CAL 5/12/02	5/12/04
	Signal Generator	HP	8640B	2308A21464	CAL 11/15/01	11/15/03
	Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	Near Field Probe	HP	HP11940A	2650A02748	CHAR 2/1/01	2/1/03
	BandReject Filter	Lorch Microwave	5BR4-2400/ 60-N	Z1	CHAR 3/2/01	3/2/03
	BandReject Filter	Lorch Microwave	6BR6-2442/ 300-N	Z1	CHAR 3/2/01	3/2/03
	BandReject Filter	Lorch Microwave	5BR4-10525/ 900-S	Z1	CHAR 3/2/01	3/2/03
	High Pas Filter	Microlab	HA-10N		CHAR 10/4/01	10/4/03
	Audio Oscillator	HP	653A	832-00260	CHAR 3/1/01	3/1/03
	Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	3/2/03
	Frequency Counter	HP	5385A	3242A07460	CHAR 12/11/01	12/11/03
	Preamplifier	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/03
	Amplifier	HP	11975A	2738A01969	CHAR 3/1/01	3/1/03
	Egg Timer	Unk			CHAR 8/31/01	8/31/03
	Measuring Tape, 20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04
	Measuring Tape, 7.5M	Kraftixx	7.5M PROFI		2/1/02	2/1/04
	Coaxial Cable #51	Insulated Wire Inc.	NPS 2251-2880	Timco #51	CHAR 1/23/02	1/23/04
	Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
	Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/04
	Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/04

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. Shielded interface cables were used in all cases except for cables connecting to the telephone line and the power cords. A test program was run which simulated a normal data transmission on a network.

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-1992 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The ambient temperature of the UUT was 74°F with a humidity of 44%.

BANDWIDTH 6.0dB: The measurements were made with the spectrum analyzer's resolution bandwidth(RBW)=100 kHz and the video bandwidth(VBW)=300 kHz and the span set as shown on plot.

POWER OUTPUT: The RF power output was measured at the antenna feed point by removing the permanent antenna and connecting the UUT to a peak power meter, HP Model No. 8900C.

ANTENNA CONDUCTED EMISSIONS: The RBW=100 kHz, VBW > or = RBW and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth(RBW) of the spectrum analyzer was 100 kHz up to 1GHz and 1.0MHz above 1 GHz with an appropriate sweep speed. The VBW above 1.0 GHz was = 1.0 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 74°F with a humidity of 55%.

15.247(d) POWER SPECTRAL DENSITY. The peak within the pass band was located with a RBW set to 30 kHz and a span of 5 MHz, slightly greater than the 6 dB bandwidth, then the emission was centered on the display and the span and RBW reduced. A 1.5MHz span, 3 kHz RBW, and a sweep time to sweep time set to 500 seconds. Since spectral line spacing could not be resolved, the noise power density method was used. The response was then plotted, a correction factor of measured using the noise power density and adding the correction of 35 dB and any attenuation used was added.

2.1033(b)(4)

ANTENNA AND GROUND SYSTEM:

This unit uses a short, inductively loaded, antenna element for the base unit and the handset. The antenna is permanently attached to the unit and no provision is made for connection to an external antenna.

No ground connection is provided. The only ground in use is the ground plane on the printed circuit board.

APPLICANT: ID FONE CO., LTD

FCC ID: PJ4ID-2400TRB

NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE

RULES PART NUMBER: 15.207

MINIMUM REQUIREMENTS:	FREQUENCY MHz	LEVEL dBuV
	0.450-30	48 dBuV or 250 uV

TEST PROCEDURE: ANSI STANDARD C63.4-1992

THE HIGHEST EMISSION READ FOR LINE 1 WAS 164 uV @ 9.58 MHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 184 uV @ 9.61 MHz.


THE GRAPHS ARE ON THE FOLLOWING PAGES REPRESENT THE EMISSIONS READ FOR POWERLINE CONDUCTED FOR THIS DEVICE.

TEST RESULTS: Both lines were observed with the UUT transmitting. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.


PERFORMED BY: JOE SCOGLIO

DATE: 11/13/02

LINE 1

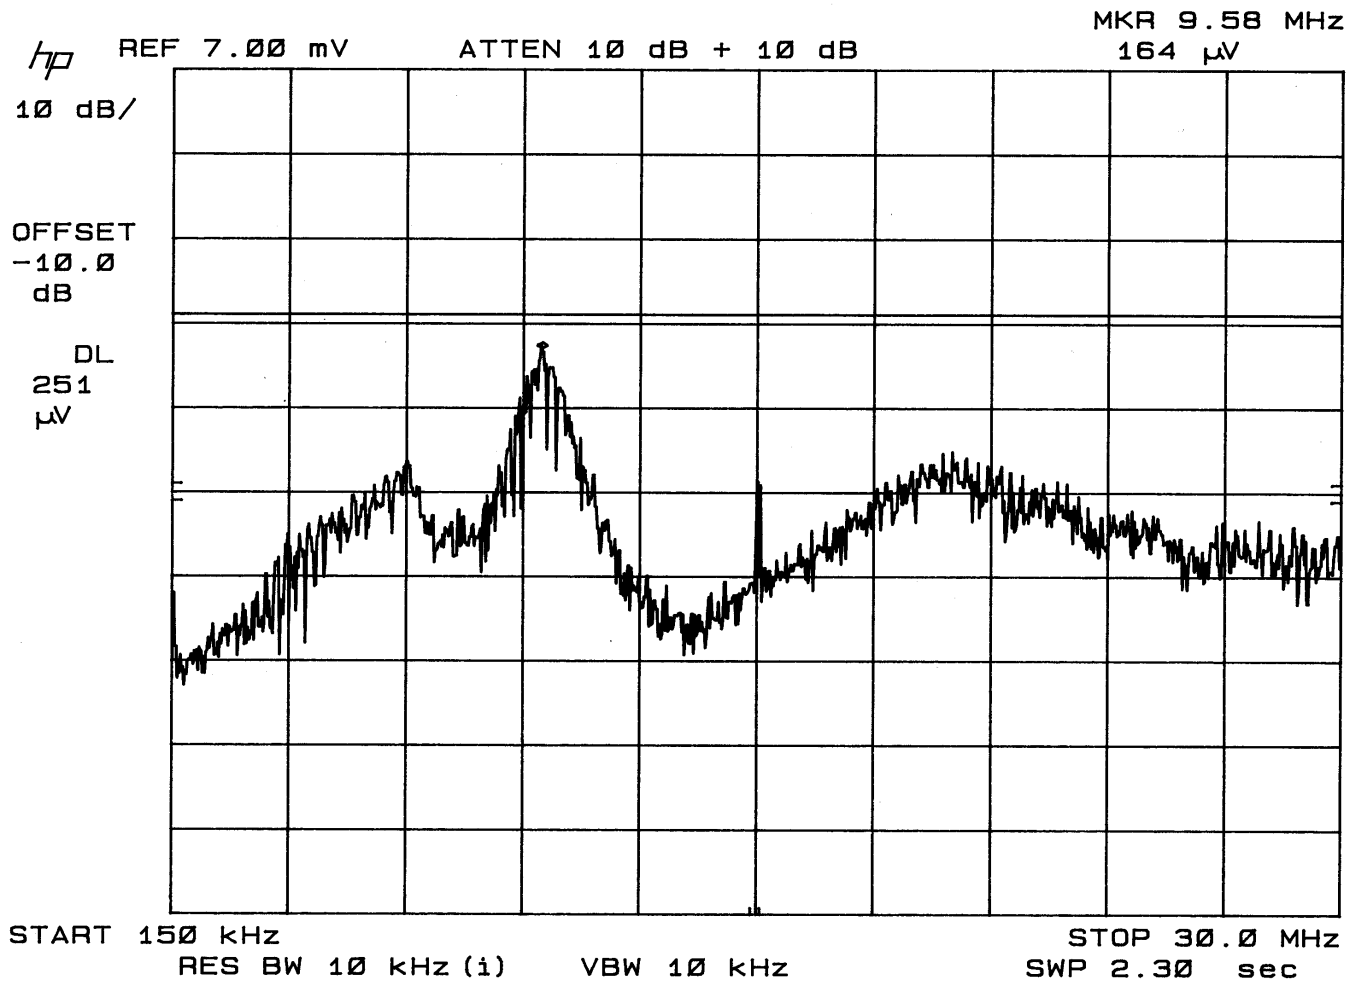

LINE 2

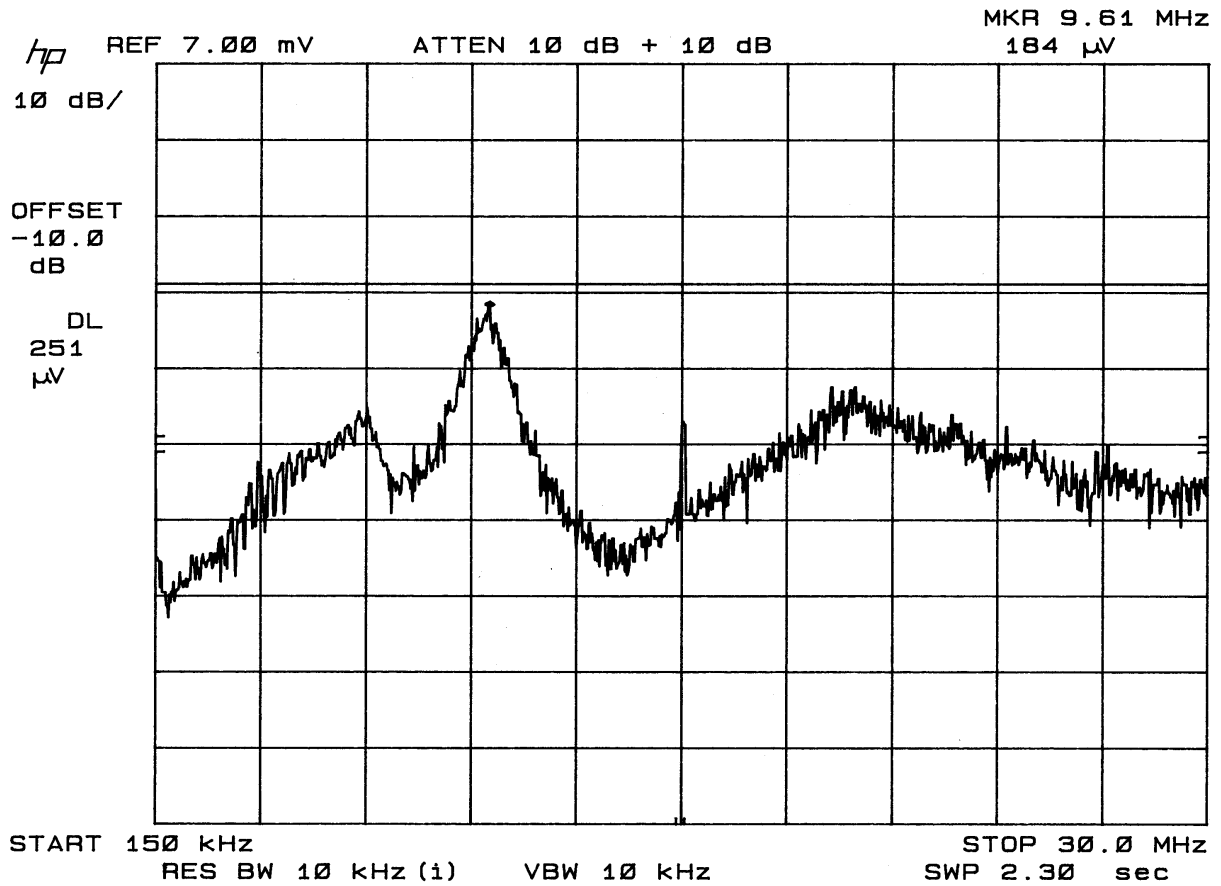

APPLICANT: ID FONE CO., LTD
FCC ID: PJ4ID-2400TRB
NAME OF TEST: OCCUPIED BANDWIDTH
RULES PART NUMBER: 15.247

15.247(a)(2)

6dB bandwidth shall be at least 500 kHz. As shown in the accompanying plots. The bandwidth was measured at three places in the band and the narrowest is reported below.

BASE 6 dB Bandwidth = 1.80 MHz


15.247(B) PEAK POWER OUTPUT

The maximum peak output power shall not exceed 1 watt (30 dBm). If directional transmitting antennas with a gain of more than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


Both the base and handset have a maximum power output of less than +30 dBm. Power was measured by disconnecting the antennas and measuring across a 50 ohm load as recommended by the manufacturer using a HP peak power meter Model 8900C. The antennas are non directional and do not exceed 6 dBi gain. The power output was measured at three places in the band and the highest is reported below.

BASE PEAK POWER OUTPUT = +11.9 dBm or 0.016 Watts

6 DB BANDWIDTH BASE

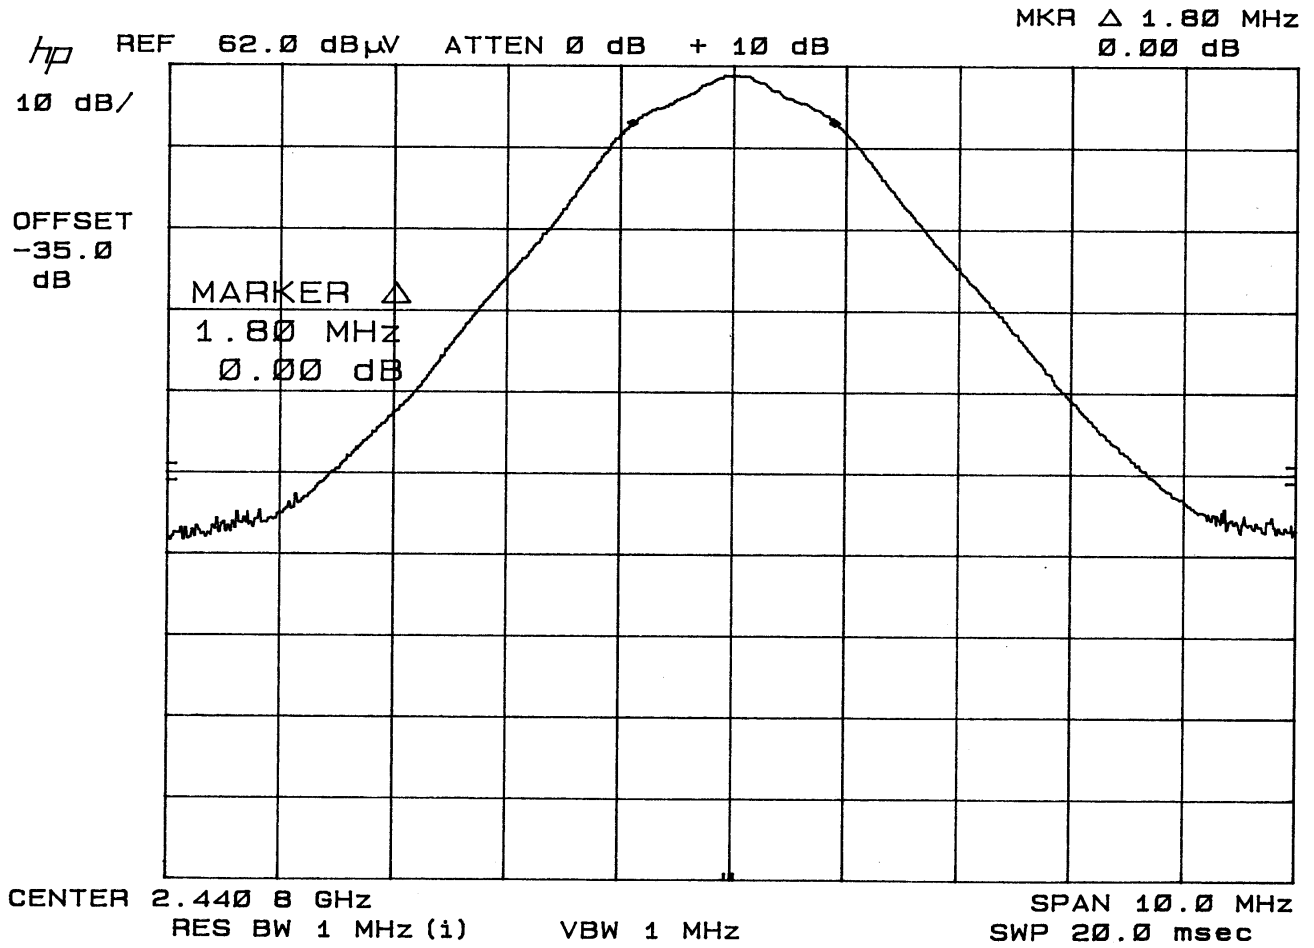


PULSED CORRECTION FACTOR PLOT

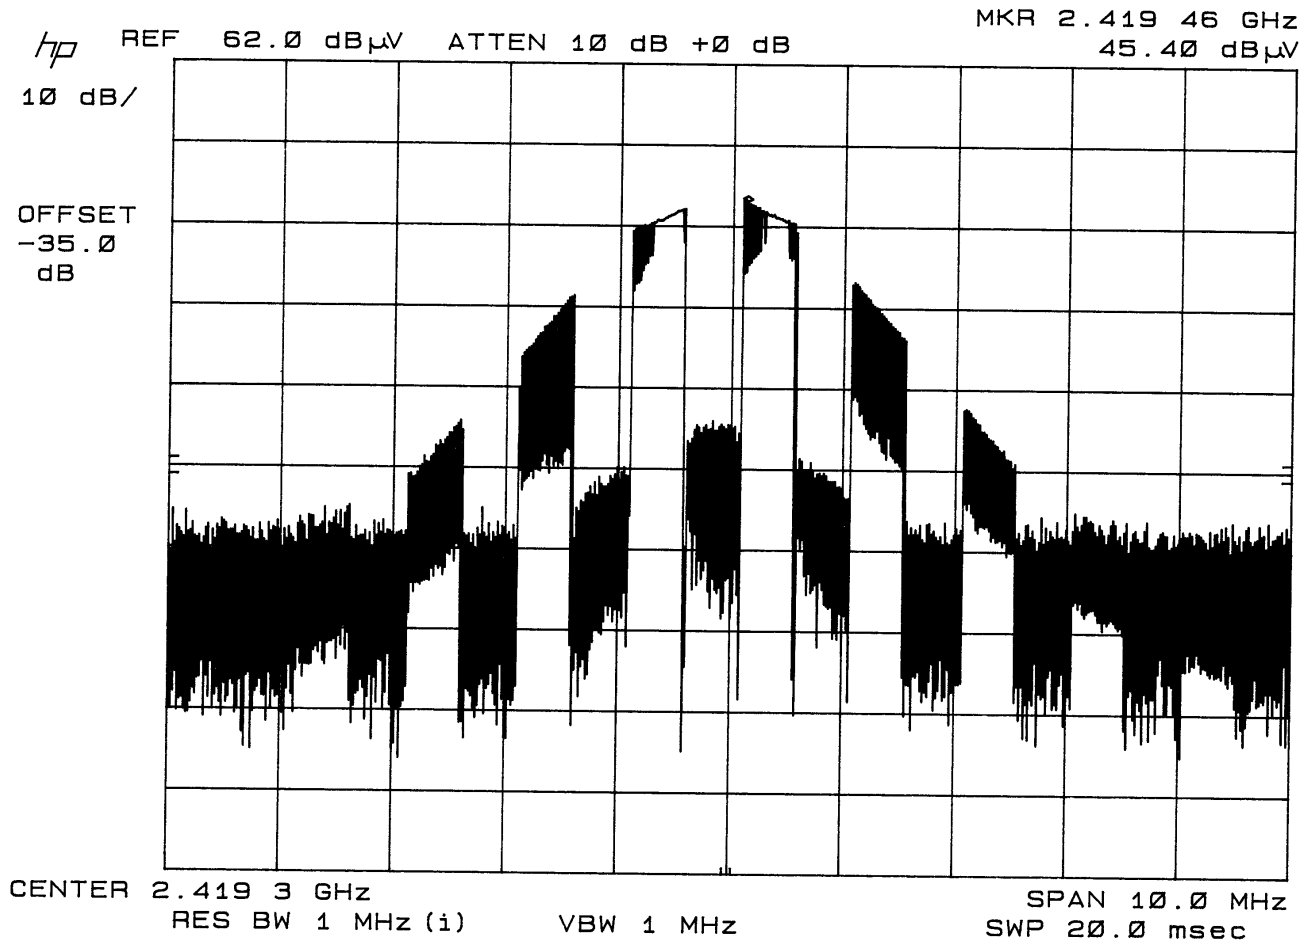

The duty cycle correction factor was calculated from the above modulation envelope. The pulsed output wave form calculation shows a 50% duty cycle for a 6.02 dB correction factor.

PEAK TO AVERAGE PLOT

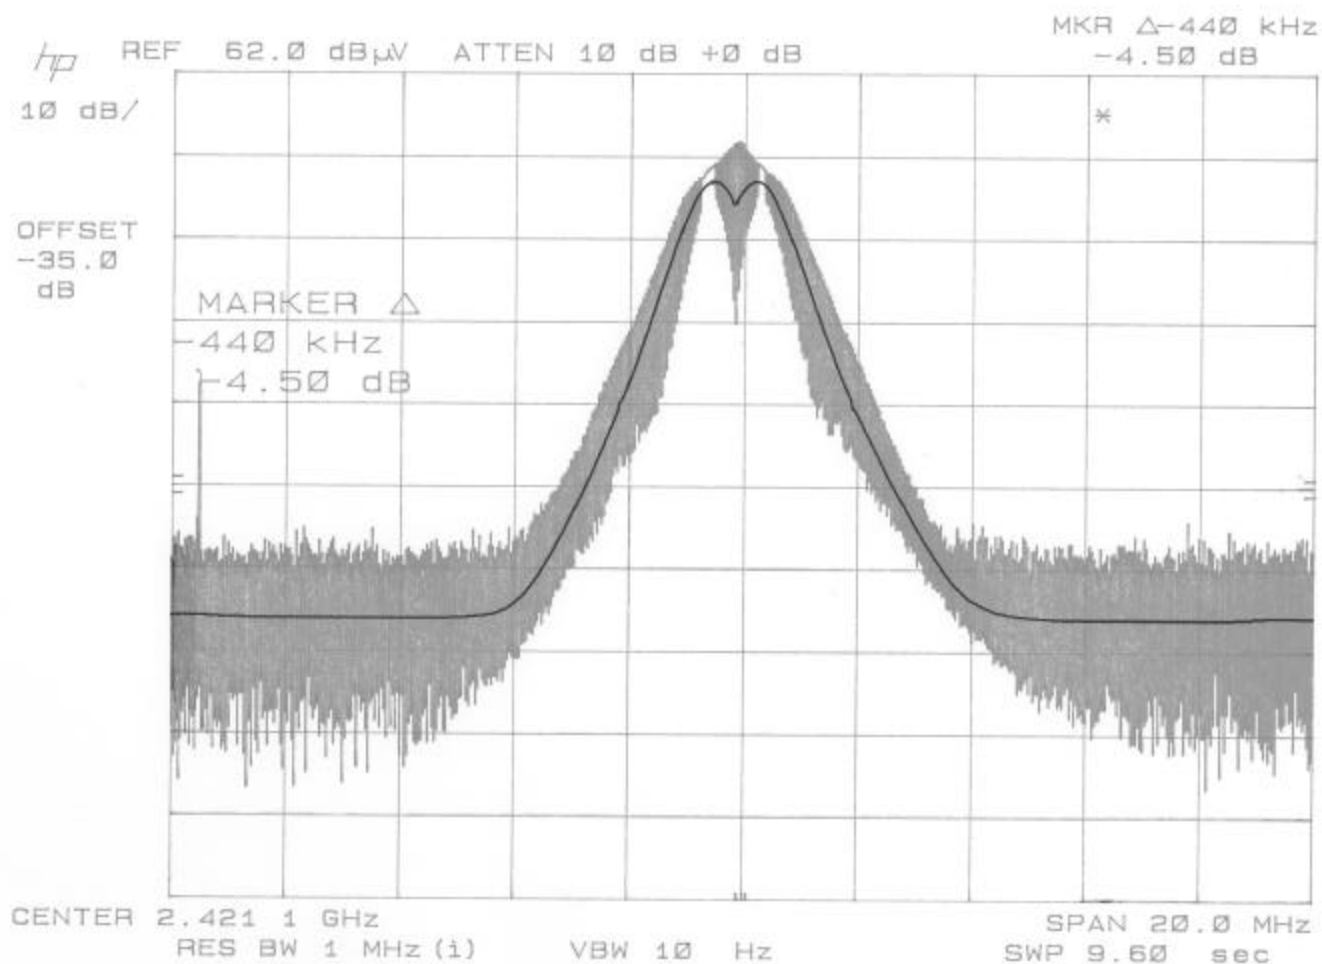

The correction for peak to average radiated is 4.50 dB. The above plot shows the peak to average signal displayed.

APPLICANT: ID FONE CO., LTD
 FCC ID: PJ4ID-2400TRB
 NAME OF TEST: RADIATED SPURIOUS EMISSIONS - BASE
 RULES PART NUMBER: 15.247(c)
 REQUIREMENTS: Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54 dBuV/m). Spurious not in a restricted band must be 20 dBc.

TEST DATA:								
Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Antenna Correction Factor dB	Correction Factor dB	Field Strength dBuV/m	Margin dB
2,408.5	2,408.50	58.9	H	3.33	28.90	0.00	91.13	36.25
2,408.5	2,408.50	60.7	V	3.33	28.90	0.00	92.93	34.45
2,408.5	4,816.80R	17.5	H	5.94	33.81	-10.52	46.76	7.24
2,408.5	4,816.80R	15.5	V	5.94	33.81	-10.52	44.73	9.27
2,440.8	2,440.80	58.6	H	3.35	28.93	0.00	90.88	36.50
2,440.8	2,440.80	60.0	V	3.35	28.93	0.00	92.28	35.10
2,440.8	4,881.50R	18.1	H	6.03	33.87	-10.52	47.48	6.52
2,440.8	4,881.50R	14.9	V	6.03	33.87	-10.52	44.28	9.72
2,743.2	2,743.20	57.6	H	3.59	29.86	0.00	91.05	36.33
2,743.2	2,743.20	59.6	V	3.59	29.86	0.00	93.05	34.33
2,743.2	4,946.30R	18.4	H	6.12	33.93	-10.52	47.93	6.07
2,743.2	4,946.30R	14.5	V	6.12	33.93	-10.52	44.03	9.97

Pulsed correction factor (6.02) + peak to average correction factor (4.50) = 10.52 dB

SAMPLE CALCULATION: FSdBuV/m = MR(dBuV) + ACFdB + COAX+ C.F.


METHOD OF MEASUREMENT: The procedure used was ANSI STANDARD C63.4-1992. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was scanned from 30 MHz to 10 GHz using a Hewlett Packard Model 8566B Spectrum Analyzer, Hewlett Packard Model 85685A Preselector, Hewlett Packard Model 85650A Quasi-Peak Adaptor, and an appropriate antenna. Low loss coax was used above 1 GHz. Measurements were made at Timco Engineering, Inc. 849 NW State Road 45 Newberry, Fl.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: Joseph Scoglio

DATE: 11/13/02

Method of Measuring Radiated Spurious Emissions

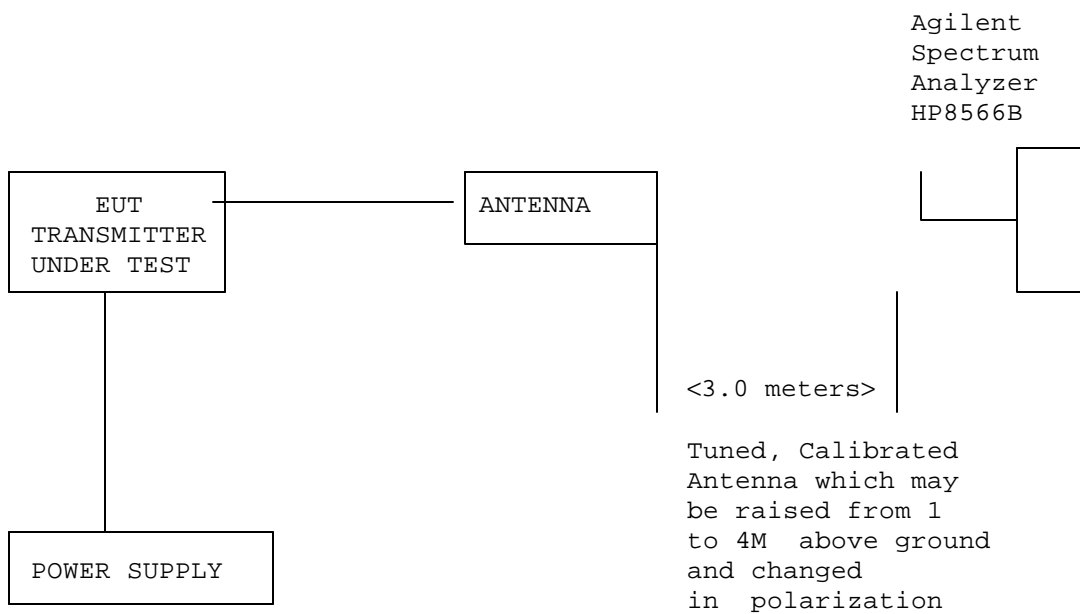

Equipment placed 80cm above ground on a rotatable platform.

APPLICANT: ID FONE CO., LTD.

FCC ID: PJ4ID-2400TR

NAME OF TEST: RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND

REQUIREMENTS: Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54 dBuV/m).

TEST PROCEDURE: An in band field strength measurement of the fundamental emission using the RBW and detector function required by C63.4-2000 and FCC Rules. The procedure was repeated with an average detector and a plot made. The calculated field strength in the adjacent restricted band is presented below.

BASE

Channel frequency: 2404 MHz

Frequency: 2390 MHz

-6.20 dBuV from plot
+28.88 ACF
+ 3.31 Coax loss
- 6.02 Pulsed CFactor
+19.97 dBuV


Channel frequency: 2477 MHz

Frequency: 2483.5 MHz


-5.60 dBuV from plot
+28.97 ACF
+ 3.39 Coax loss
- 6.02 Pulsed CFactor
+20.74 dBuV

Bandedge measurements were made using special test software that locked the unit on one frequency (2410 or 2470) or the other so that measurements could be made. The duration of these measurements were kept short repeated so as to keep the RF amplifiers from over heating.

BANDEDGE PLOT

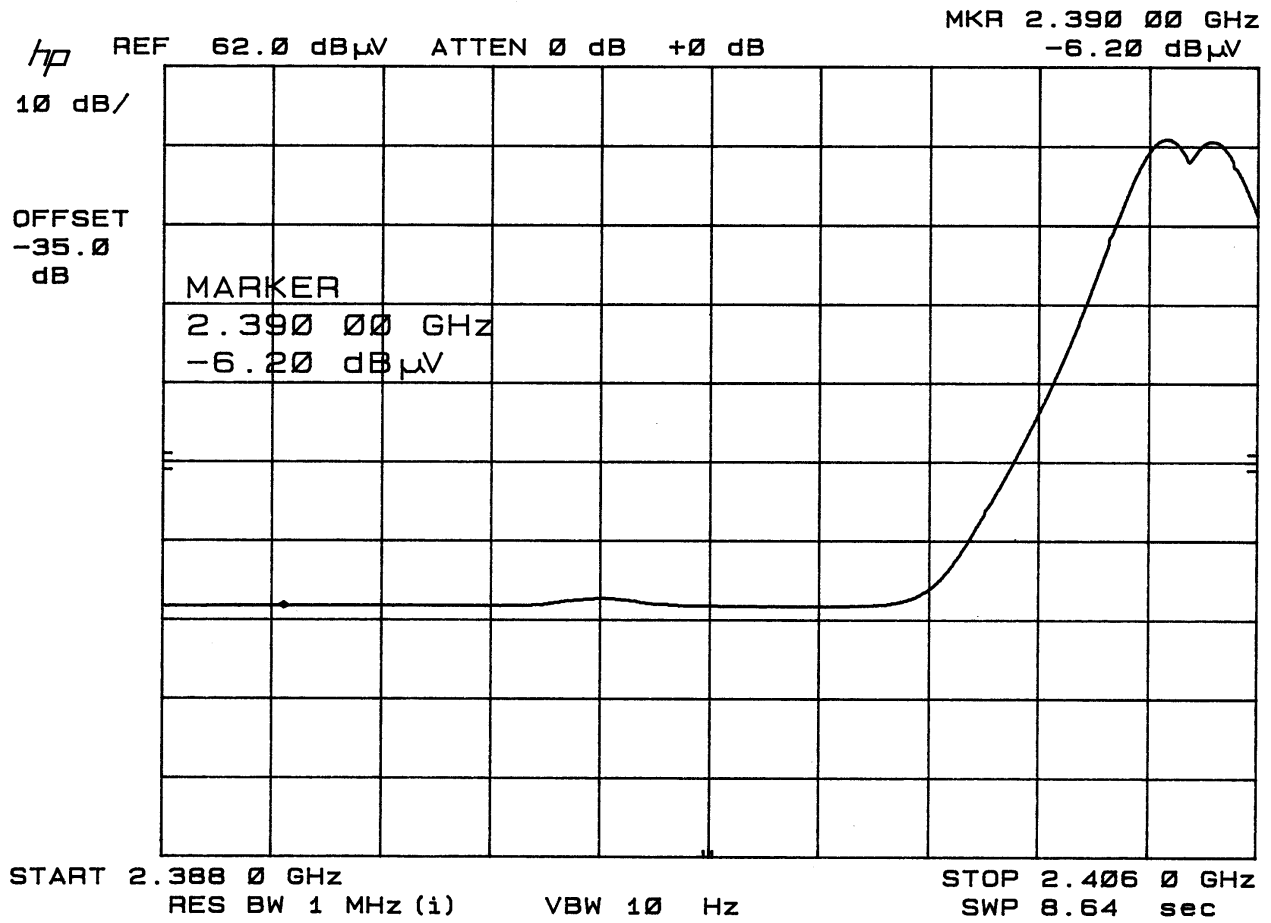

BANDEDGE PLOT

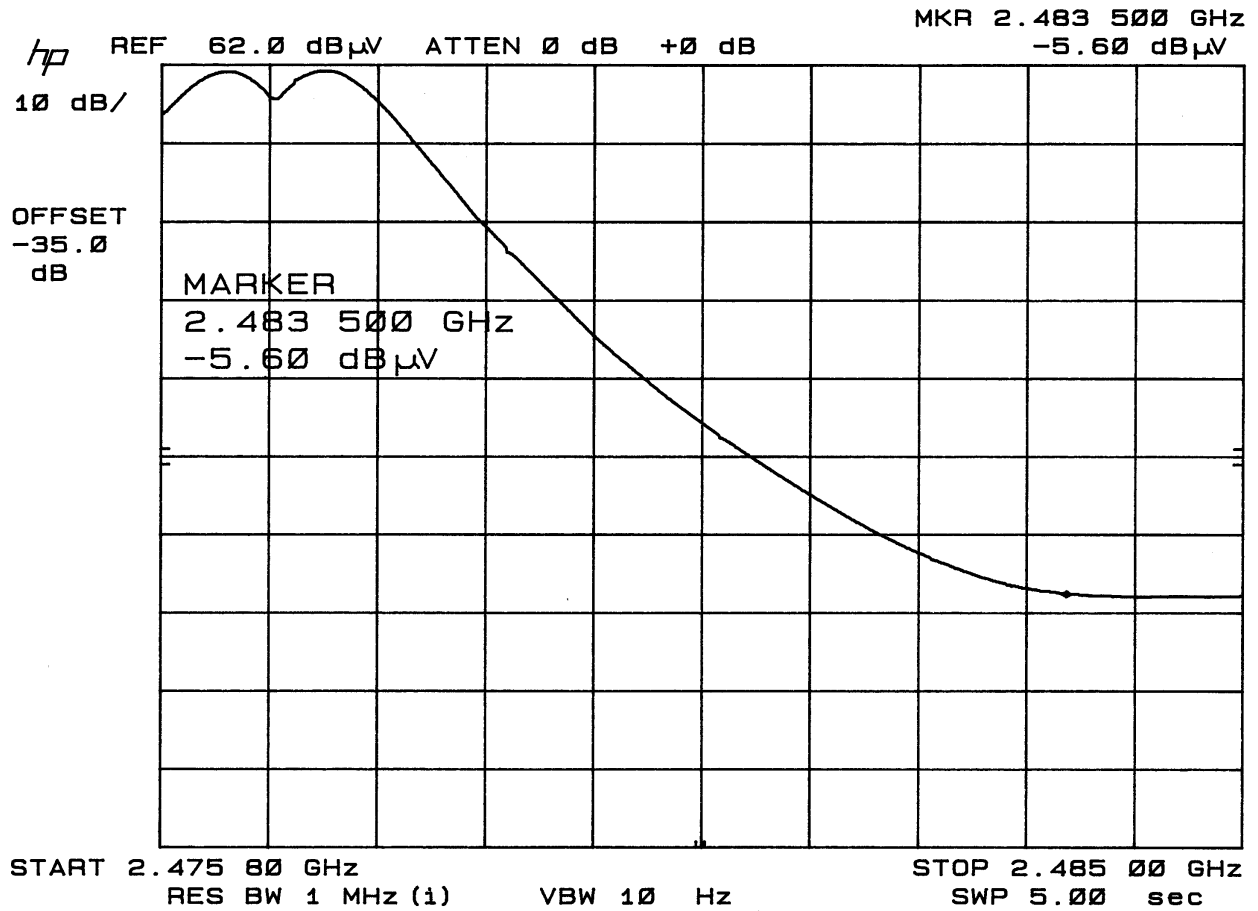

APPLICANT: ID FONE CO., LTD

FCC ID: PJ4ID-2400TRB

NAME OF TEST: POWER SPECTRAL DENSITY

RULES PART NUMBER: 15.247(d)

REQUIREMENTS: The power spectral density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

TEST DATA:

The spectrum line spacing could not be resolved so the noise power density was measured;

Measurement Method:

Starting from the settings that were used for the 6 dB bandwidth the peak signal was located and the span was reduced and the sweep time increased in a manner to maintain calibration and to keep the peak emission in the display, then the sweep time was increased to 500seconds at 1.5MHz span and a RBW changed to 3 kHz. The spectrum analyzer was put into the noise power mode and the plots made.

8.7 dBuV
50 dB ATTN
35 dB CF

93.70 dBuV

93.70 dBuV-107=-13.3 dBm

POWER SPECTRAL DENSITY PLOT

