

TEST REPORT

EMC DEPARTMENT




RAYMARINE UK LTD

**Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar**

**To: FCC Part 80: 1998
and FCC Part 2:1998**

(Leisure Marine Radar Equipment)

Test Report Serial No. 715/1042

Checked By: Andy Little  28 th August 2009	Approved By:  Compliance Manager 1 st September 2009
Tested By: Mike Thompson	Author: Mike Thompson  EMC Engineer 24 th August 2009
Issue Date: 1st September 2009	Test Dates: 16 July 2009, 4 th August 2009

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

Issue Date: 1st September 2009

Table of Contents

1	Client Information	3
2	Equipment Under Test (EUT)	4
2.1	Identification of Equipment Under Test (EUT)	4
2.2	Description of EUT	4
2.3	Modifications incorporated in EUT	4
2.4	Additional information related to Testing	5
2.5	Support Equipment.....	5
3	Test Specification, Methods and Procedures	6
3.1	Test Specification	6
3.2	Methods and Procedures	6
3.3	Definition of Measurement Equipment	6
4	Deviations from the Test Specification	7
5	Operation of the EUT during Testing	8
5.1	Operating Conditions.....	8
5.2	Operating Modes.....	8
5.3	Configuration and peripherals	8
6	Summary of Test Results.....	9
6.1	Summary of Tests	9
6.1.1	Radiated Spurious Emissions	9
6.1.2	Conducted Spurious Emissions	9
6.1.3	RF Power Output	9
6.1.4	Variation of Frequency with Voltage	10
6.1.5	Variation of Frequency with Temperature.....	10
6.1.6	Occupied Bandwidth	10
6.1.7	Transmitter Frequency Tolerance.....	10
6.1.8	Suppression of Interference Aboard Ships	11
6.2	Location of Tests	11
7	Measurements, Examinations and Derived Results	12
7.1	General Comments	12
7.2	Field Strength Measurements	12
7.2.1	Magnetic Field Measurements: Frequency Range 9 kHz to 30 MHz	12
7.2.2	Electric Field Measurements: Frequency Range 30 MHz to 2000 MHz.....	12
7.2.3	Electric Field Measurements: Frequency Range: 2GHz to 40GHz	12
7.3	Conducted Emissions.....	13
7.3.1	Peak Detector measurements on RF port	13
7.4	Peak Power	13
7.5	Pulse Width	14
7.6	Pulse Repetition Frequency	14
7.7	Average Power	15
7.8	Variation of frequency with input voltage	15
7.9	Variation of frequency with temperature	16
7.10	Occupied Bandwidth	17
7.11	Transmitter Frequency Tolerance	18
7.11.1	Specification: 80.209(b).....	18
7.11.2	Calculation	18
8	Measurement Uncertainty.....	19
Appendix A	Test Equipment Used	20
Appendix B	Measurement Methods.....	21
Appendix C	Test Configuration Drawings	23
Appendix D	Graphical Test Results	27

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

1 Client Information

Company Name	Raymarine UK Ltd.
Address:	Marine House 5 Harbourgate Southampton Road Portsmouth Hampshire PO6 4BQ England, U.K.
Contact Name:	Mr. P. Bowen, Compliance Manager

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

2 Equipment Under Test (EUT)

2.1 Identification of Equipment Under Test (EUT)

Brand Name:	Raymarine
Model Name or Number:	RD418HD RD424HD
Unique Type Identification:	18" 4kW HD Digital Radome Radar E92142 24" 4kW HD Digital Radome Radar E92143
Serial Number:	18" 4kW Digital Radome Radar EMC090623
Country of Manufacture:	Hungary
FCC ID Number:	FCC ID: 18HDD4kW 18" 4kW Digital Radome Radar FCC ID: 24HDD4kW 24" 4kW Digital Radome Radar
Date of Receipt:	2 nd June 2009

2.2 Description of EUT

The equipment under test is an X-band marine radar intended for use on leisure craft and small workboats, and is comprised of:

Scanner Unit: 4kW X-band transmitter within 18" or 24" Radome.

Display Unit: Compatible with any compatible Raymarine multifunction display

This test report covers both 18" & 24" systems. The hardware is common to both systems; the only difference being the plastic housing and antenna.

2.3 Modifications incorporated in EUT

The EUT has not been modified from what is described by the Model Name and Unique Type Identification stated above.

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

2.4 Additional information related to Testing

Power Supply Requirement:	12V or 24V dc battery systems
Intended Operating Environment:	Leisure Marine & Small Workboats
Weight:	4kW HD Radome (18"): 9.5kg (21lbs) 4kW HD Radome (24"): 10kg (22lbs)
Dimensions:	4kW Radome (18"): 521mm (20.5") Ø x 247mm (9.7") Height 4kW Radome (24"): 625mm (25.67") Ø x 247mm (9.7") Height
Interface Ports:	Combined Power and Network

2.5 Support Equipment

Support equipment used throughout test:

Item	Serial Number
GPM400	EMC080908b
Seataalk ^{HS} Switch	EMC0811049
G170 Monitor	EMC081202
G Series Keyboard	EMC 0370049

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

Issue Date: 1st September 2009

3 Test Specification, Methods and Procedures

3.1 Test Specification

Reference:	FCC Part 80: 2008 and FCC Part 2:2008
Title:	Code of Federal Regulations, Part 80 (47CFR): 2008 Stations in the maritime services Code of Federal Regulations, Part 2 (47CFR): 2008 Frequency Allocations and radio treaty matters; general rules and regulations
Comments:	The test facility used for the radiated emissions portions of these tests is an alternative test site as described in ANSI C63.4-2003, being a 3m test range within a semi-anechoic chamber, with antenna height scanning from 1 – 4 metres and meeting the +/-4dB NSA criterion. It is identified as EMC Test Site 3 and is registered with the FCC under the 2.948 (47CFR) listing procedure with Reference Number 413819.
Purpose of Test:	To demonstrate compliance of the 4kW HD Digital Radome Radar to the appropriate clauses of Parts 2 and 80 of the FCC Rules.

3.2 Methods and Procedures

The methods and procedures used were as detailed in:

ANSI C63.2-1996

Title: American National Standard for Electromagnetic Noise and Field Strength Instrumentation, 10 Hz to 40 GHz – Specifications

ANSI C63.4-2003

Title: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI C63.5-2006

Title: American National Standard for Electromagnetic Compatibility – Radiated Emission Measurements in Electromagnetic Interference (EMI) Control – Calibration of Antennas (9 kHz to 40 GHz)

CISPR 16-1 (1999)

Title: Specification for radio disturbance and immunity measuring apparatus and methods Part 1: Radio disturbance and immunity measuring apparatus

CISPR 16-4 (2002)

Title: Specification for radio disturbance and immunity measuring apparatus and methods Part 4: Uncertainty in EMC measurements

3.3 Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the Methods and Procedures section above. Appendix A contains a list of the test equipment used.

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

Issue Date: 1st September 2009

4 Deviations from the Test Specification

None.

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

Issue Date: 1st September 2009

5 Operation of the EUT during Testing

5.1 Operating Conditions

1. Radiated Emissions, 9kHz to 40GHz: The EUT was located on a non-conducting support above a turntable on a 3m test range within a semi-anechoic chamber (Raymarine Site 3, FCC Registration No. 413819).
2. The EUT was located in a laboratory environment for all other tests.
3. During testing, the EUT was powered by a nominal 12V DC supply except when measuring Frequency Variation with Voltage. [FCC Part 2, 1055(d)]

5.2 Operating Modes

The EUT was tested in the following operating modes:

1. Radiated emissions: Transmitting into a rotating non-reflective load with the transmitter set to 75 and 900ns pulse widths.
2. Conducted emissions: Transmitting into a fixed non-reflective load with the transmitter set to 75, 430 and 900ns pulse widths.
3. Variation of transmit frequency with voltage and temperature: The transmitter was set to the half nautical mile range (75ns pulse width) and the six nautical mile range (900ns pulse width).
4. Transmitter power, pulse width, occupied bandwidth and P.R.F. Transmitting into a fixed non-reflective load.

5.3 Configuration and peripherals

1. The 4kW 18" HD Digital Radome was connected to a Seataalk^{HS} Switch & 12V power with the standard cable of 15m length. The Seataalk^{HS} Switch was also connected to a GPM400 system with a standard 10m CAT 5 network cable. A transmit dummy load was connected to the radar antenna port. A 12V DC supply was connected to the Radar, Seataalk^{HS} Switch and Display system.
2. This configuration is defined as being likely to be the worst case as regards emissions.
3. Appendix A of this report contains a full list of test equipment used and Appendix C contains a schematic diagram of the test configuration.

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

6 Summary of Test Results

6.1 Summary of Tests

6.1.1 Radiated Spurious Emissions

Frequency Range	Specification Reference	Compliance Status
9kHz to 40GHz	2.1053 and 80.211(f)	Complied

6.1.2 Conducted Spurious Emissions

Frequency Range	Specification Reference	Compliance Status
9kHz to 40GHz	2.1051 and 80.211(f)	Complied

6.1.3 RF Power Output

6.1.3.1 Peak Power

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 900	2.1046(a) and 80.215(a)	Complied

6.1.3.2 Average Power

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 900	2.1046(a) and 80.215(a)	Complied

6.1.3.3 Pulse Width

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 900	2.1046(a) and 80.215(a)	Complied

6.1.3.4 PRF

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 900	2.1047(d) and 80.213(g)	Complied

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

6.1.4 Variation of Frequency with Voltage

6.1.4.1 75ns

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
75	2.1055(d)	Complied

6.1.4.2 900ns

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
900	2.1055(d)	Complied

6.1.5 Variation of Frequency with Temperature

6.1.5.1 75ns

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
75	2.1055(a and b)	Complied

6.1.5.2 900ns

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
900	2.1055(a and b)	Complied

6.1.6 Occupied Bandwidth

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 900	2.1049(i) and 80.205	Complied

6.1.7 Transmitter Frequency Tolerance

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 900	80.209(b)	Complied

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

6.1.8 Suppression of Interference Aboard Ships

80.217. When the radar is in the Standby mode of operation, the local oscillator spurious emissions @ 9.4GHz are below 48dB μ V/m.

6.2 Location of Tests

All the measurements described in this report were performed in the EMC Department within the R & D Building at the premises of Raymarine UK Ltd, Marine House, 5 Harbournate, Southampton Road, Portsmouth, Hampshire, PO6 4BQ, England, U.K.

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

7 Measurements, Examinations and Derived Results

7.1 General Comments

This section contains test results only. Details of the test methods and procedures can be found in Appendix B of this report.

Measurement uncertainties are stated in accordance with the requirements of CISPR 16-4:2002. Please refer to Section 8 for details of measurement uncertainties.

The highest frequency generated by the EUT is 9.4GHz. Consequently, tests were performed up to 40GHz.

7.2 Field Strength Measurements

7.2.1 Magnetic Field Measurements: Frequency Range 9 kHz to 30 MHz

Plots of measurements using a peak detector can be found in Appendix D.

No emissions exceeded a level of 50dBuV/m.

Details of the limit line calculation can be seen in Appendix B.

7.2.2 Electric Field Measurements: Frequency Range 30 MHz to 2000 MHz

Plots of measurements can be found in Appendix D.

The highest quasi-peak levels measured were less than 54dBuV/m

Details of the limit line calculation can be seen in Appendix B

7.2.3 Electric Field Measurements: Frequency Range: 2GHz to 40GHz

Plots of measurement scans can be found in Appendix D.

The following table lists frequencies at which significant emissions were measured using Peak detector functions. Although these emissions are not required to be recorded, being more than 20dB lower than the limit line, they are included for completeness as they are all magnetron-related.

Details of the limit line calculation can be seen in Appendix B

Frequency (GHz)	Antenna Polarization	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result
18.798	Vertical	100.34	136.36	36.02	Complied
28.192	Vertical	105.26	136.36	31.1	Complied
37.59	Vertical	111.85	136.36	24.51	Complied

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

7.3 Conducted Emissions

7.3.1 Peak Detector measurements on RF port

The design of the RF coupling from the magnetron to the antenna forms an effective high pass/band pass filter arrangement. The peak energy level of radar requires considerable attenuation in order to prevent the analyser from going into compression. This limits the maximum dBc figure that can be obtained without changing the resolution bandwidth of the analyser. Since the signal is wideband compared to the resolution bandwidth, it is critical to the measurement accuracy that the resolution bandwidth settings remain consistent throughout the testing where possible.

Measurements were performed from 2 GHz to 40GHz with the EUT set to 75ns, 430ns and 900ns; measurements were performed within and around the transmitter frequency allocation.

Details of the limit line calculation can be found in Appendix B.

All emissions were more than 20dB below the required limit. Plots of the scans can be found in Appendix D.

7.4 Peak Power

These measurements were performed with the HP Peak Power Analyser and sensor connected to the EUT antenna port via a coupler and in-line attenuator.

Pulse Width (ns)	Measured Power (kW)
78	3.13
105	3.22
153	3.53
201	3.67
331	3.98
429	3.97
518	4
902	3.99

Note 1: Power is measured at the antenna port and will be less than the nominal magnetron output due to normal losses in the circulator and rotating joint.

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

7.5 Pulse Width

Plots can be found in Appendix D.

In order to determine the characteristics of the various pulses, the HP Peak Power Analyser was connected to the EUT antenna port via a coupler and inline attenuator.

Nominal Pulse Width (ns)	Measured Pulse Width (ns)
75	78
100	105
150	153
200	201
330	331
430	429
520	518
900	902

7.6 Pulse Repetition Frequency

In order to determine the characteristics of the various pulses, the HP Peak Power Analyser and sensor was connected to the EUT antenna port via a coupler and in-line attenuator.

Pulse Width (ns)	Measured P.R.F. (Hz)
75	3010
100	3010
150	3010
200	3010
330	2000
430	1500
520	1300
900	821

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

7.7 Average Power

Measured at the antenna port.

Nominal Pulse Width (ns)	Peak Power (kW)	P.R.F. (Hz)	Measured Pulse Width (ns)	Average Power (Watts)
75	3.13	3010	78	0.735
100	3.22	3010	105	1.018
150	3.53	3010	153	1.626
200	3.67	3010	201	2.220
330	3.98	2000	331	2.635
430	3.97	1500	429	2.555
520	4	1300	518	2.694
900	3.99	821	902	2.955

Note 1: The previous subsections detail the results required to make the above calculation.

7.8 Variation of frequency with input voltage

The frequency of the EUT was measured at each voltage.

75ns

% of Nominal Volts	Volts (dc)	Measured Frequency (GHz)
85% of 12.7	10.8	9.4026
100% of 12.7	12.7	9.4024
100% of 25.4	25.4	9.4022
115% of 25.4	29.2	9.4022

900ns

% of Nominal Volts	Volts (dc)	Measured Frequency (GHz)
85% of 12.7	10.8	9.3998
100% of 12.7	12.7	9.4000
100% of 25.4	25.4	9.4000
115% of 25.4	29.2	9.4006

Note: The equipment is intended to be operated from 12V or 24V dc power systems. Average (nominal) voltages for such systems are taken as being 12.7V or 25.4V, though the equipment will operate at any voltage over the range 85% of the 12V nominal voltage and 115% of the 24V nominal voltage.

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

7.9 Variation of frequency with temperature

The EUT scanner unit was situated in an environmental test chamber and set for normal operation at the shortest pulse width. The antenna port was connected via a coupler and in-line attenuator to the input of the HP E7405 analyser.

The chamber was then set to -30°C . After a 30-minute delay to allow for temperature stabilisation, the EUT frequency was monitored until there was no measurable frequency change. The frequency was recorded. The EUT was then set for normal operation at the longest pulse width, and the frequency monitored until there was no measurable frequency change. The frequency was recorded.

The chamber temperature was then increased by 10°C with the process repeated at this temperature, and at further increments of 10°C up to and including $+50^{\circ}\text{C}$.

75ns

Temperature $^{\circ}\text{C}$	Measured Frequency (GHz)
-30	9.4123
-20	9.4100
-10	9.4095
0	9.4065
+10	9.4060
+20	9.4030
+30	9.4023
+40	9.3995
+50	9.3990

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

900ns

Temperature °C	Measured Frequency (GHz)
-30	9.4108
-20	9.4083
-10	9.408
0	9.4048
+10	9.4043
+20	9.4015
+30	9.4005
+40	9.398
+50	9.3968

7.10 Occupied Bandwidth

Plots can be found in Appendix D.

The 99.5% (-23dBc) power bandwidth was measured for each pulse width using the delta function of the ESU 40 receiver. Owing to the shape of the pulse it was not always possible to measure the bandwidth at the exact -23db point. Consequently, the next lower point was taken. This has the effect of slightly increasing the measured bandwidth above the actual 99.5% bandwidth.

Nominal Pulse Width (ns)	99.5% Power Bandwidth (MHz)
75	42.668
100	40.745
150	34.696
200	26.763
330	13.622
430	12.42
520	10.497
900	6.81

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

7.11 Transmitter Frequency Tolerance

7.11.1 Specification: 80.209(b)

"When pulse modulation is used in land and ship radar stations operating in the bands above 2.4GHz the frequency at which maximum emission occurs must be within the authorised bandwidth and must not be closer than $1.5/T$ MHz to the upper and lower limits of the authorised bandwidth where "T" is the pulse duration in microseconds."

7.11.2 Calculation

Authorised Bandwidth: 9300MHz to 9500MHz

Specification Limits: [Lower] $9300 + 1.5/T$
[Upper] $9500 - 1.5/T$

Transmitter Frequency Tolerances			
Nominal Pulse Width (ns)	Actual Pulse Width (ns)	Specification Limits (MHz)	
		Lower	Upper
75	78	9319.231	9480.769
100	105	9314.286	9485.714
150	153	9309.804	9490.196
200	201	9307.463	9492.537
330	331	9304.532	9495.468
430	429	9303.497	9496.503
520	518	9302.896	9497.104
900	902	9301.663	9498.337

From examining the transmitter frequency data from the Variation of Frequency with Voltage and Variation of Frequency with Temperature results pages, it can be seen that the transmitter is within the calculated specification.

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

8 Measurement Uncertainty

Measurement uncertainty was calculated after reference to CISPR 16-4:2002. In order to determine compliance with the limit for emissions tests, the specification states that, where the calculated uncertainty exceeds the value of U_{CISPR} , the difference in dB is to be added to the instrument reading. The corrections shown in the table below are therefore added to the reported measurements before assessing compliance with the limits.

Measurement Type	Confidence Level ($k = 2$)	Calculated Uncertainty	U_{CISPR}	Correction
Radiated Emissions: Electric Field Strength 30MHz-1GHz	95%	+/- 6.6dB	4.5dB(<300MHz) 5.2dB(>300MHz)	+2.1dB(<300MHz) +1.4dB(>300MHz)
Radiated Emissions: Electric Field Strength 1GHz-26.5GHz	95%	+/- 7.1dB	5.2dB assumed	+1.9dB
Radiated Emissions: Electric Field Strength 26.5-40GHz	95%	+/-7.3dB	5.2dB assumed	+2.1dB

Note 1. All test equipment and antennae used for the tests described in this report have current traceable calibration to UKAS or equivalent standard.

Note 2. All reported measurements include the appropriate offsets for antenna factors, coupler and cable losses, etc.

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

Appendix A Test Equipment Used

Ref. No.	Device	Manufacturer	Model No.	Serial No.	Last Calibration
318	Peak Power Analyser	HP	8991A	3248A00128	30/09/2008
1721	Receiver	Rohde & Schwarz	ESU40	100017	3/11/2008
886	Receiver	Rohde & Schwarz	ESI 26	832692/006	01/04/2009
618	DVM	Fluke	85	65690477	30/09/2008
1520	Microwave Sig. Gen. 0.01-40GHz	Rohde & Schwarz	SMR40	10-300074685	06/06/2008*
440	PSU 3-15V 25A	Palstar	PS30M	G450673814	N/A**
376	PSU 0-60V	Farnell	AP50-60	1140	2/9/2008**
442	Antenna 0.09-30MHz	Schaffner	HLA6120	1122	11/02/2008*
482	Antenna 18-26.5GHz	Credowan	20-R-2843-0007	36755	23/12/2008*
483	Antenna 26.5-40GHz	Credowan	S.G. Horn	None	23/12/2008*
852	Antenna 1.0-18.0GHz	Schwarzbeck	BBHA9120D	128	2/10/2008*
1802	Antenna 30-2000MHz	Chase	CBL6141B	22932	27/06/2008*
EM06	Microwave Cable	Agilent	5061-5458	EMC Cable 6	As Required
EM09	Microwave Cable	Agilent	5061-5458	EMC Cable 9	As Required
RD14	Microwave Coupler	Flann	16270-40-23	116317	As Required
RD21	Inline Attenuator 10dB	Narda	4779-10	8	As Required
	Inline Attenuator 10dB	Suhner	6810.17.B	13	As Required
RD40	WG16 to N Adaptor	Flann	16094-NF10	100	As Required
RD42	WG16 to N Adaptor	Mitec Europe	M0926-7-11	3711-2	As Required
RD50	Microwave Power Load	CMT	MPT90-1A	942117-003	Not Required

Notes:

- * 2 year calibration cycle
- ** Voltage monitored using Item 618

All test equipment, except cables, wave guide components and attenuators, are on a calibration cycle in accordance with UKAS requirements. Items marked calibration as required are calibrated during the test setup using the R&S microwave signal generator in conjunction with the ESU40 receiver.

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

Appendix B Measurement Methods.

B.1 Calculating Emissions Limit Lines

For both radiated emissions and conducted spurious emissions from the antenna port, with an Assigned Frequency of 9410MHz (Authorised Band 9310 - 9510MHz), the limits close to the magnetron frequency are:

Over the ranges 9210 - 9310MHz and 9510 - 9610MHz: -25dBc
Over the ranges 8910 - 9210MHz and 9610 - 9910MHz: -35dBc

To establish the radiated emissions limit for the product on frequencies outside the range 8910 - 9910MHz, the EUT was placed on the test site with the measuring equipment located at a distance of three metres.

The magnetron was disconnected and replaced with a WG16 to N-type coaxial connector adaptor, which was connected to a signal generator with an unmodulated output at 9.4GHz. The rotating joint was connected, via an adaptor and attenuator, to a power meter and sensor.

The signal generator was unable to reproduce the actual peak power output of the intentional radiator – measured as 4kW by conducted methods. Consequently, a level of 4mW was reproduced at the antenna port, requiring a factor of +60dB to be applied at the analyser.

The rotating joint adaptor, attenuator and power measurement equipment were removed and replaced first with the 18” flare antenna and then with the 24” flare antenna. The antenna was aligned with the horn antenna connected to the spectrum analyser and adjusted to peak the analyser response. A reading of 184.06 dBuV/m was obtained from the 18” antenna, which gives the tighter limit.

The calculation for the radiated emissions limit line is:

$$Po(\text{peak})\text{dBuV/m} - 43 - 10\log_{10} P(\text{mean})\text{watts},$$
$$184.06 - 43 - 10\log_{10} 2.95 = \mathbf{136.36\text{dBuV/m}}$$

For conducted spurious emissions from the antenna port, the calculation to establish the limit line for frequencies outside the range 8910 - 9910MHz is:

$$Po(\text{peak})\text{dBm} - 43 - 10\log_{10} P(\text{mean})\text{watts},$$
$$\text{i.e., } 66 - 43 - 10\log_{10} 2.95 = \mathbf{18.30\text{ dBm}}$$

B.2 Radiated Emissions (9 kHz to 2 GHz)

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for a Peak detector.

All testing was carried out within a semi-anechoic chamber at a distance of 3m. For all tests, the antenna was replaced with a rotating microwave load.

Measurements were split into five sub ranges to accommodate receiver bandwidth and antenna changes. Over each range, the same measurement procedure was used. The antenna was initially set to a height of 1.5m. The receiver was set to step through the appropriate frequency range in “Peak and Hold” mode, with the antenna firstly in vertical

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

polarisation and then in horizontal polarisation. The EUT was then rotated clockwise through 90 degrees, then 180 degrees and finally 270 degrees, with the measurement process repeated at each 90 degree point, thus building up a profile of peak emissions. Emissions of significance were noted. For each of these emissions, the antenna polarisation was changed to give the higher reading; the turntable was then rotated through 360 degrees to find the area of the EUT radiating the highest level and, for frequencies above 30MHz, the antenna height was then varied between 1 and 4m above the ground plane to further maximise the signal before remeasurement.

Measurements above 30MHz were performed using broadband antennas. Below 30MHz, a magnetic loop antenna was used.

B.3 Radiated Emissions 2 GHz to 40 GHz

Radiated emissions measurements were performed against appropriate limits for a Peak detector. All measurements were carried out using horn antennas.

All testing was carried out within a semi-anechoic chamber at a distance of 3m. The conducting ground plane between the antenna and the EUT was covered with ferrite and pyramidal absorbing material. For all tests, the antenna was replaced with a rotating microwave load.

Measurements were split into sub ranges to accommodate antenna changes. Over each range, the same measurement procedure was used. The antenna was set to a height of 1.5m. The analyser was set to sweep through the appropriate frequency range in "Max Hold" mode, with the antenna in vertical polarisation. The EUT was slowly rotated clockwise through 360 degrees and then back to 000 degrees, thus building up a profile of peak emissions. The antenna was then changed to horizontal polarisation and the process continued. Emissions of significance were noted. For each of these emissions, the antenna polarisation was changed to give the higher reading; the turntable was then rotated to find the area of the EUT radiating the highest level. Measurements within 20dB of the limit line were recorded.


Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

Appendix C Test Configuration Drawings

The 4kW HD Digital Radome Radar was arranged in as near a representative configuration as was practicable. The radar and excess scanner interconnection cable were placed upon a non-conducting support on the turntable such that the surface of the support was 0.8m above the ground plane. For tests below 1GHz, the scanner unit was placed centrally above the display unit on a non-conducting support 0.38m high. Above 1GHz, this support was increased to 0.5m, aligning the magnetron and circulator assembly height with the receiving horn antenna. The power lead was connected to a 12V power supply; the screen of this cable was connected to the ground plane. The radar interconnection cable was coiled around the radar support. Due to its size and construction, this cable cannot be bundled.


Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

C.1 Connection diagram

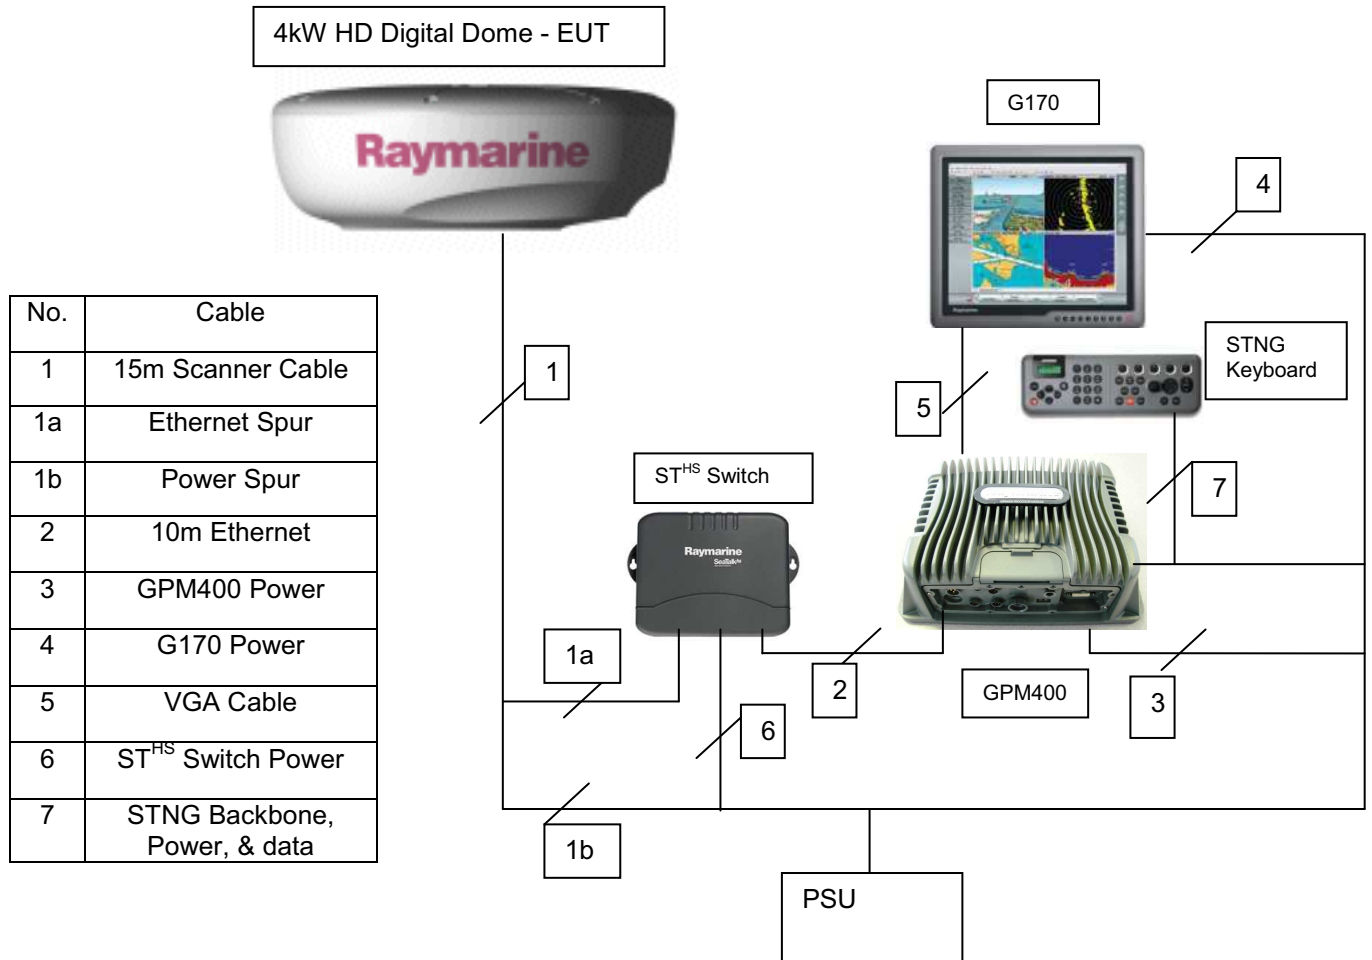

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008


C.2 Radiated Emissions Setup – General Arrangement

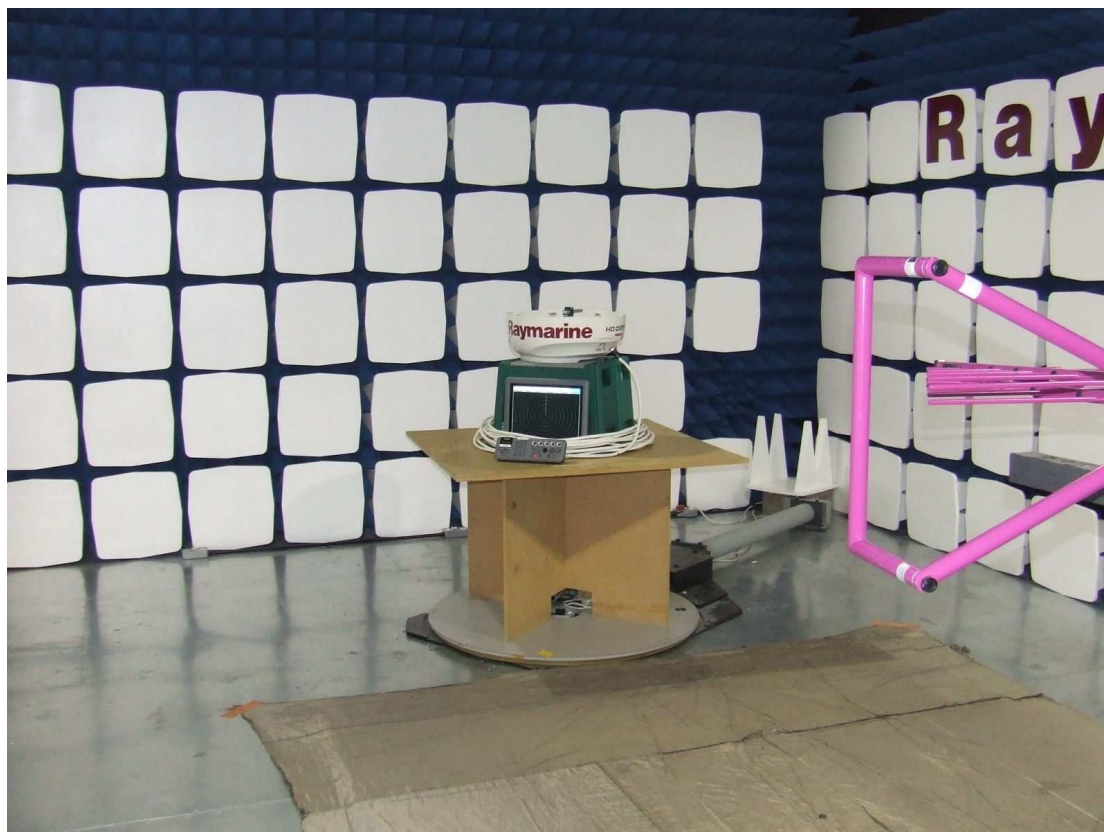

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008


C.3 Radiated Emissions 9 kHz to 2 GHz – General Arrangement

NOT TO SCALE

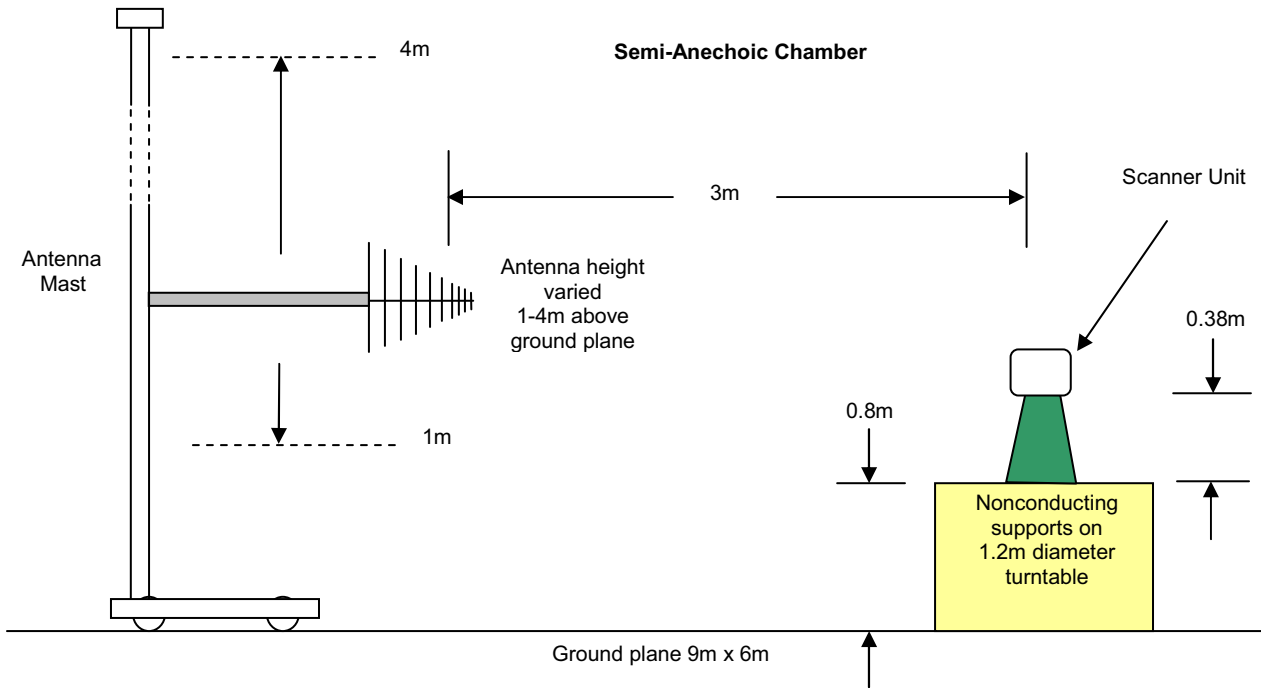

C.4 Radiated Emissions 2GHz to 40 GHz – General Arrangement

NOT TO SCALE

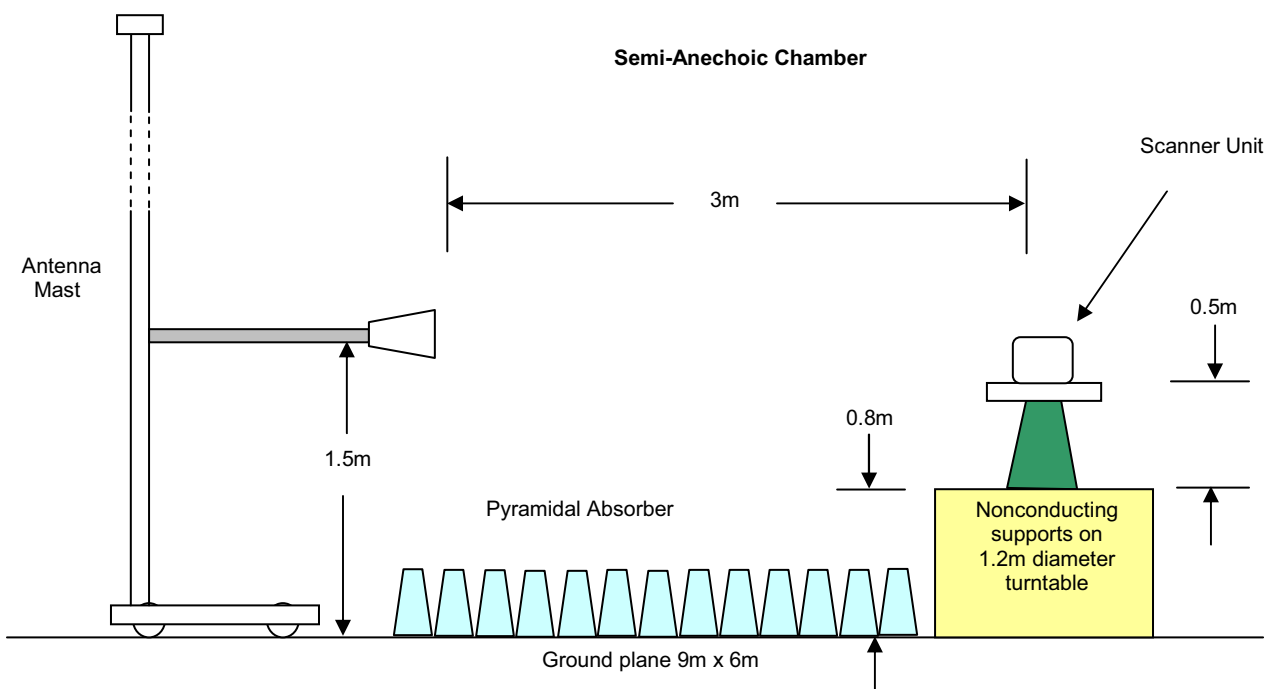

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

Appendix D Graphical Test Results

Figure 1 Radiated Emissions 9kHz to 150kHz Loop Face on	28
Figure 2 Radiated Emissions 9kHz to 150kHz Loop Side on	28
Figure 3 Radiated Emissions 150kHz to 30MHz Loop Side on	29
Figure 4 Radiated Emissions 150kHz to 30MHz Loop Face On	29
Figure 5 Radiated Emissions 30MHz to 300MHz	30
Figure 6 Radiated Emissions 300MHz to 1GHz	31
Figure 7 Radiated Emissions 1GHz to 2GHz	32
Figure 8 Radiated Emissions 1000ns Pulse width 2GHz to 18GHz	33
Figure 9 Radiated Emissions 1000ns Pulse width 18GHz to 26GHz	33
Figure 10 Radiated Emissions 1000ns Pulse width 26GHz to 40GHz	34
Figure 11 Conducted Emissions 450ns Pulse 2GHz to 8GHz	35
Figure 12 Conducted Emissions 450ns Pulse 8GHz to 13GHz	35
Figure 13 Conducted Emissions 450ns Pulse 13GHz to 18GHz	36
Figure 14 Conducted Emissions 450ns Pulse 18GHz to 22GHz	36
Figure 15 Conducted Emissions 450ns Pulse 22GHz to 26.5GHz	37
Figure 16 Conducted Emissions 450ns Pulse 26GHz to 32GHz	37
Figure 17 Conducted Emissions 450ns Pulse 32GHz to 40GHz	38
Figure 18 Main Pulse Measurement 900ns Pulse	38
Figure 19 Pulse Characterisation 75ns	39
Figure 20 Pulse Characterisation 100ns	39
Figure 21 Pulse Characterisation 150ns	40
Figure 22 Pulse Characterisation 200ns	40
Figure 23 Pulse Characterisation 330ns	41
Figure 24 Pulse Characterisation 430ns	41
Figure 25 Pulse Characterisation 520ns	42
Figure 26 Pulse Characterisation 900ns	42
Figure 27 Occupied Bandwidth 75ns Pulse	43
Figure 28 Occupied Bandwidth 100ns Pulse	43
Figure 29 Occupied Bandwidth 150ns Pulse	44
Figure 30 Occupied Bandwidth 200ns Pulse	44
Figure 31 Occupied Bandwidth 330ns Pulse	45
Figure 32 Occupied Bandwidth 430ns Pulse	45
Figure 33 Occupied Bandwidth 520ns Pulse	46
Figure 34 Occupied Bandwidth 900ns Pulse	46

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

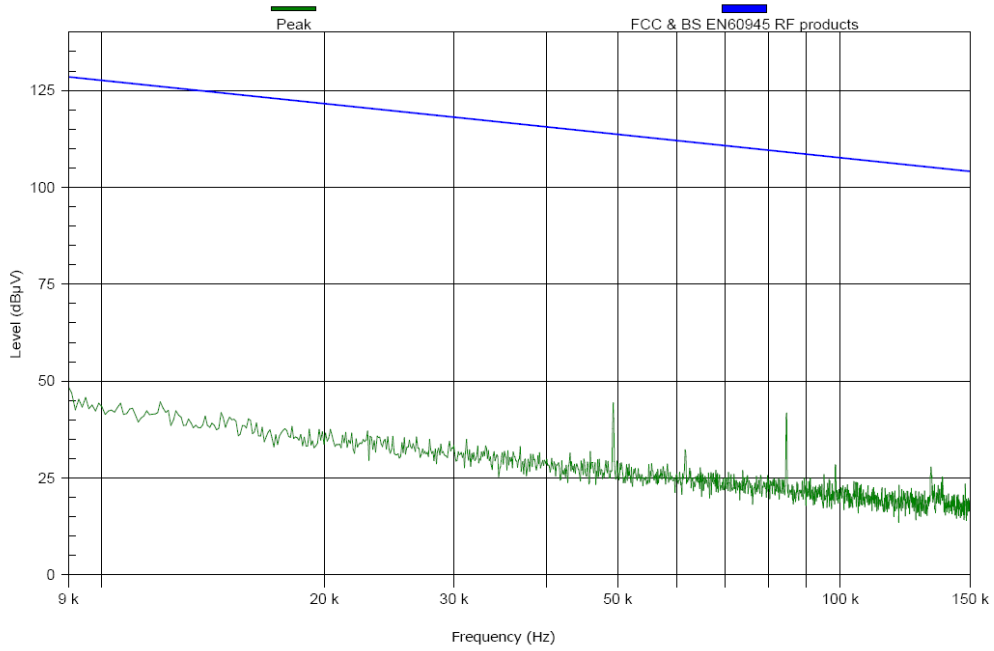


Figure 1 Radiated Emissions 9kHz to 150kHz Loop Face on

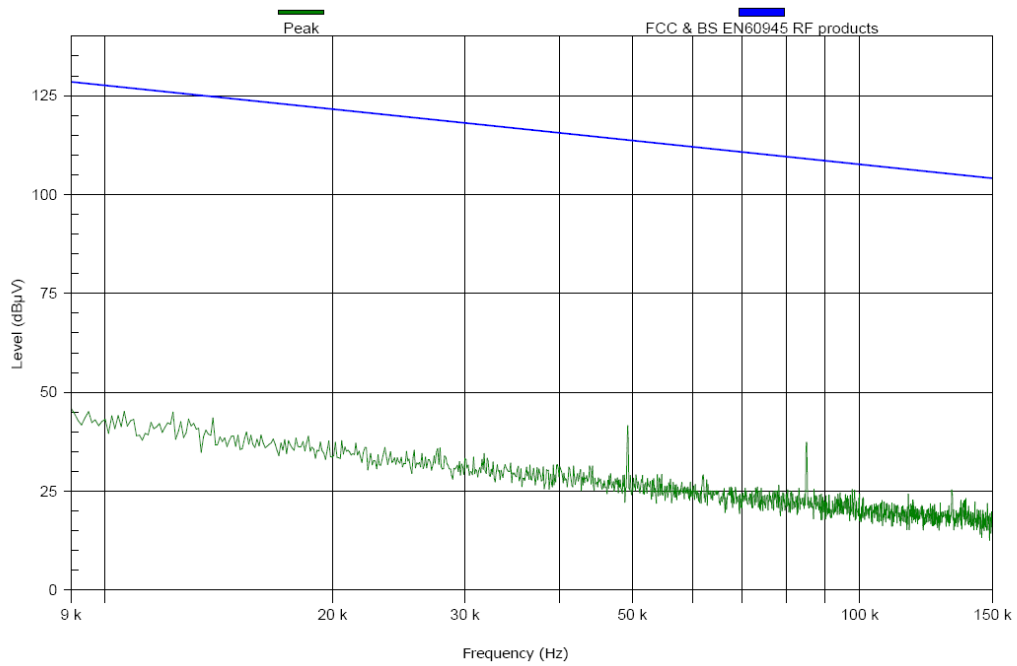


Figure 2 Radiated Emissions 9kHz to 150kHz Loop Side on

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

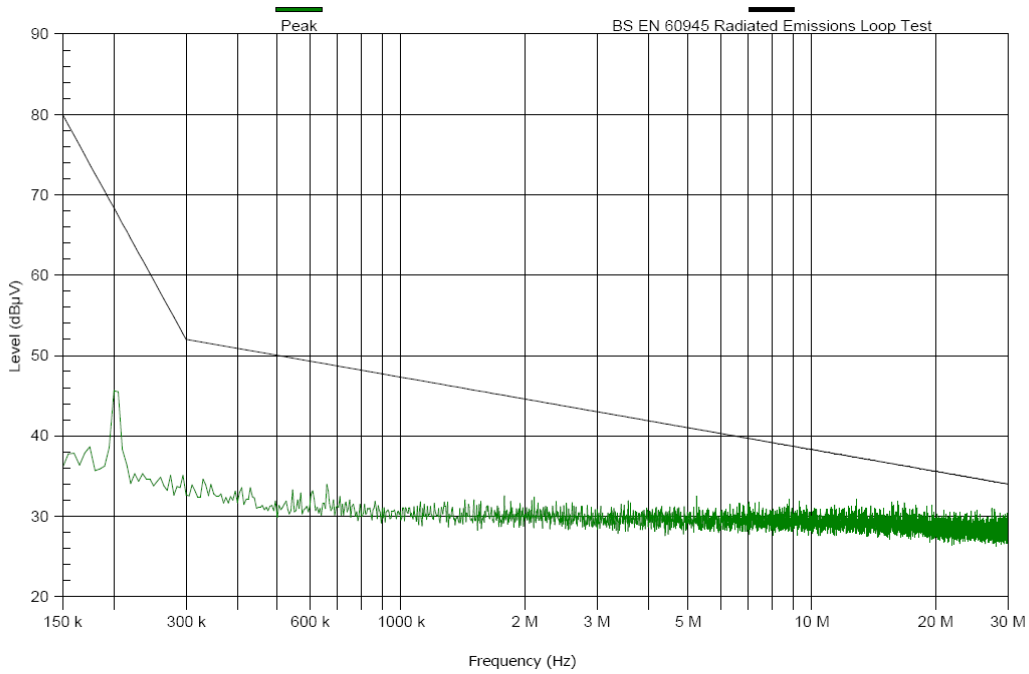


Figure 3 Radiated Emissions 150kHz to 30MHz Loop Side on

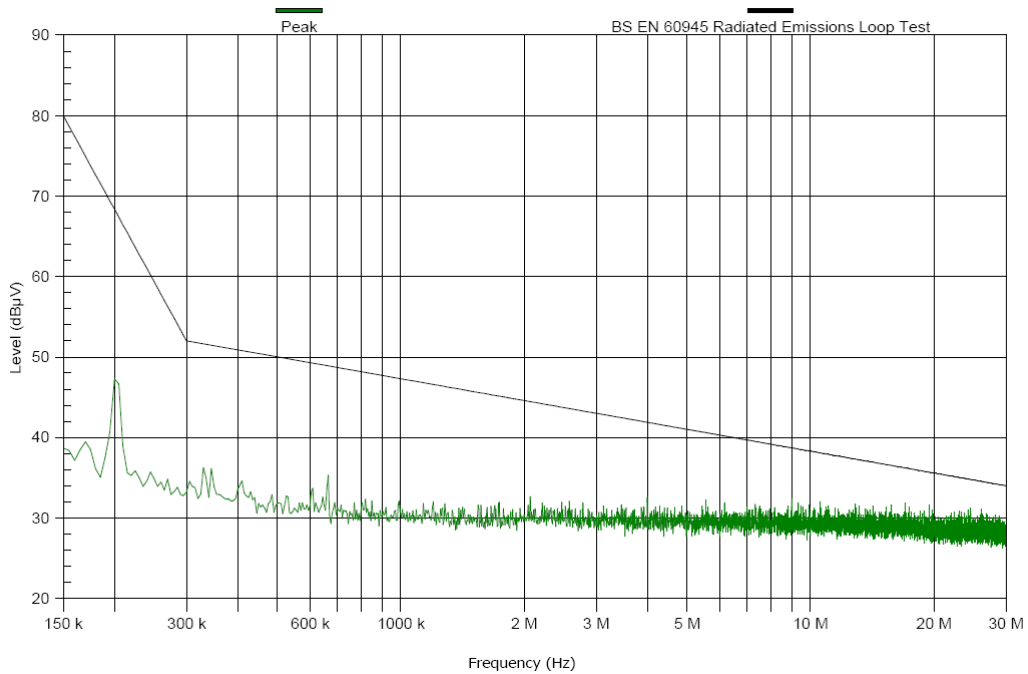


Figure 4 Radiated Emissions 150kHz to 30MHz Loop Face On

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008


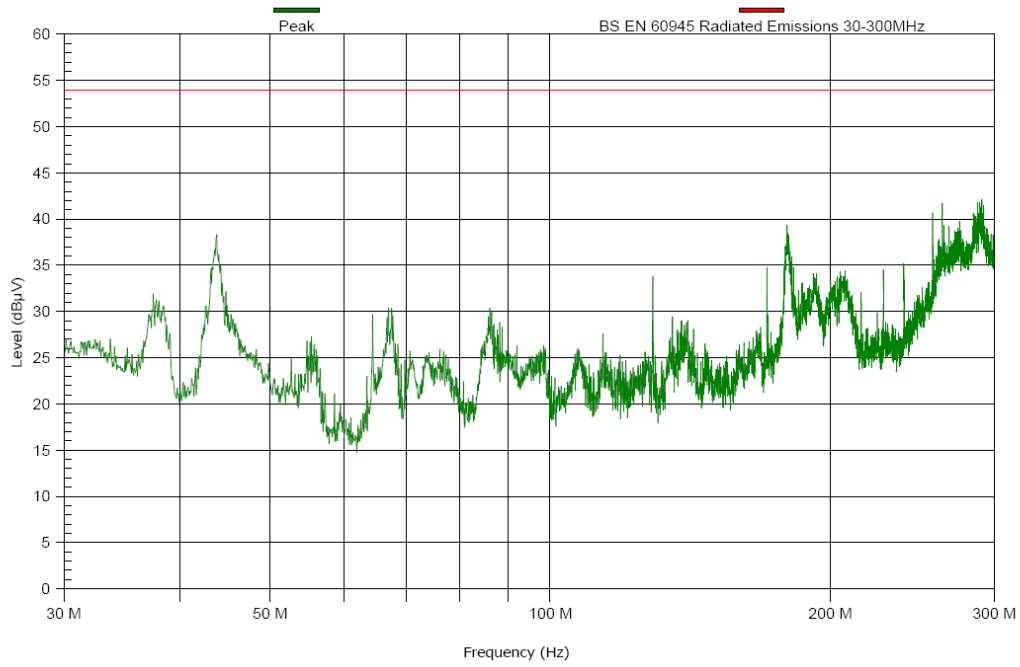


Figure 5 Radiated Emissions 30MHz to 300MHz

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

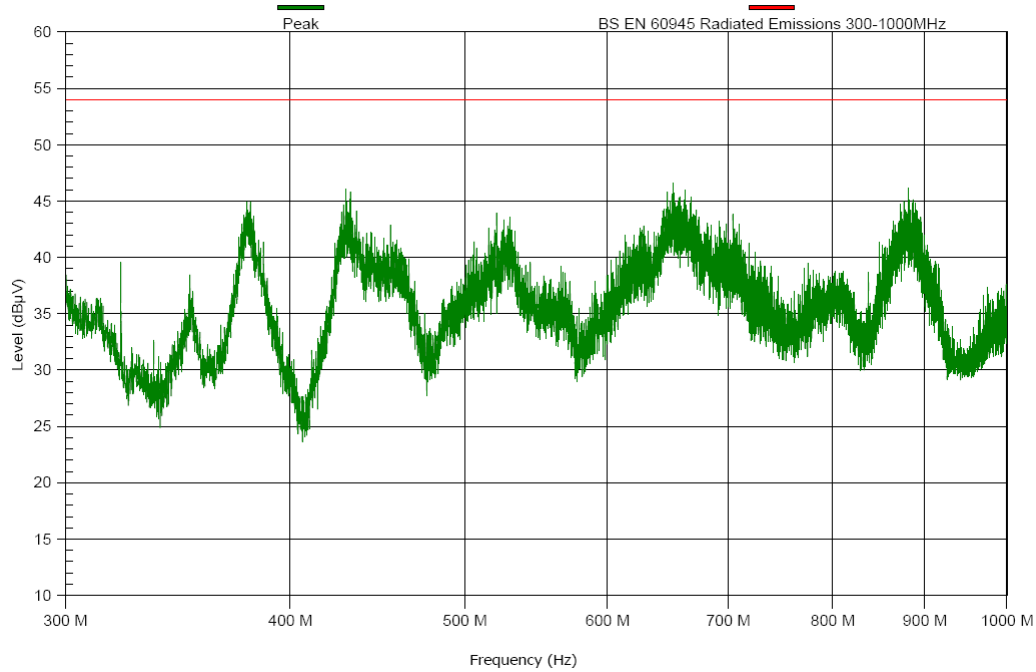


Detected Peaks:

Nr	Frequency (MHz)	PK Value (dBµV)	QP Value (dBµV)	QP Limit (dBµV)	Result	Angle (degrees)	Height (m)	H/V
1	429.536	48.16	38.44	54	Pass	-25	1.6	H
2	431.996	48.13	38.95	54	Pass	-15	1.7	H
3	647.81	50.04	38.62	54	Pass	30	1.5	V
4	651.59	49.45	38.97	54	Pass	45	1.5	V
5	652.07	49.89	39.22	54	Pass	45	1.6	V
6	652.37	48.96	38.37	54	Pass	45	1.8	V
7	653.09	50.27	38.94	54	Pass	30	1.6	V
8	658.07	48.82	38.21	54	Pass	40	1.5	V
9	662.87	47.59	37.49	54	Pass	35	1.5	V
10	881.383	47.63	36.38	54	Pass	135	1.5	H

Figure 6 Radiated Emissions 300MHz to 1GHz

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

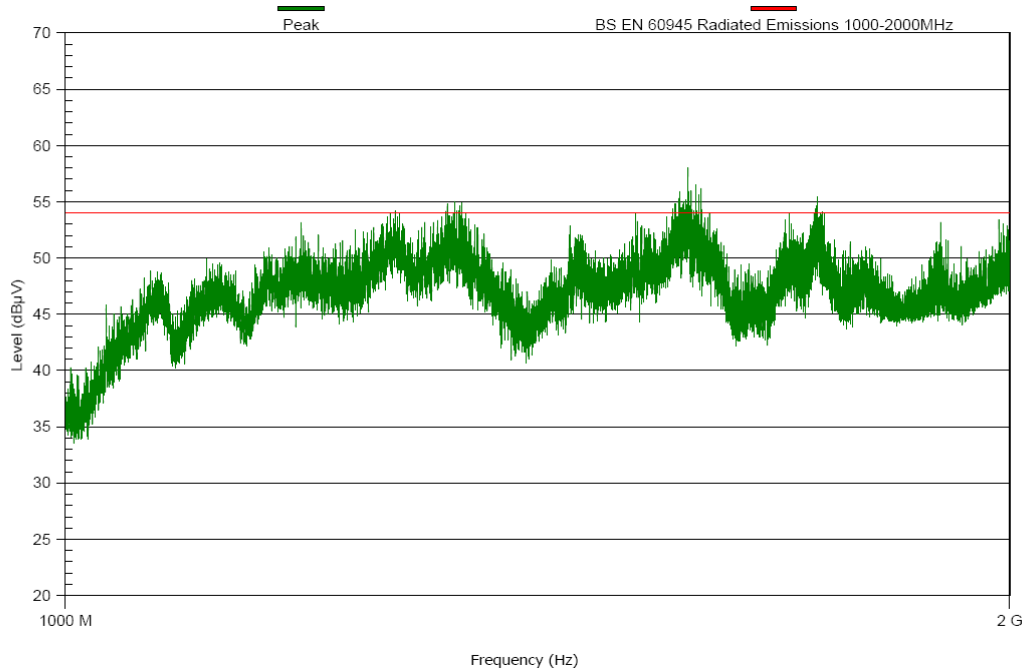


Detected Peaks:

Nr	Frequency (MHz)	PK Value (dBµV)	QP Value (dBµV)	QP Limit (dBµV)	Result	Angle (degrees)	Height (m)	H/V
1	1189.476	52.89	41.89	54	Pass	225	1.5	V
2	1562.729	53.17	43.08	54	Pass	50	1.5	V
3	1570.049	59.71	48.16	54	Pass	90	1.8	H
4	1579.288	56.21	46.39	54	Pass	80	1.5	H
5	1580.068	59.54	46.71	54	Pass	80	1.6	H
6	1583.128	57.57	46.31	54	Pass	90	1.5	H
7	1589.128	57.88	45.76	54	Pass	80	1.6	H
8	1592.428	54.2	43.25	54	Pass	75	1.9	H
9	1594.588	55.38	45.22	54	Pass	90	1.8	H
10	1737.145	55.25	43.58	54	Pass	105	1.5	H


Figure 7 Radiated Emissions 1GHz to 2GHz

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

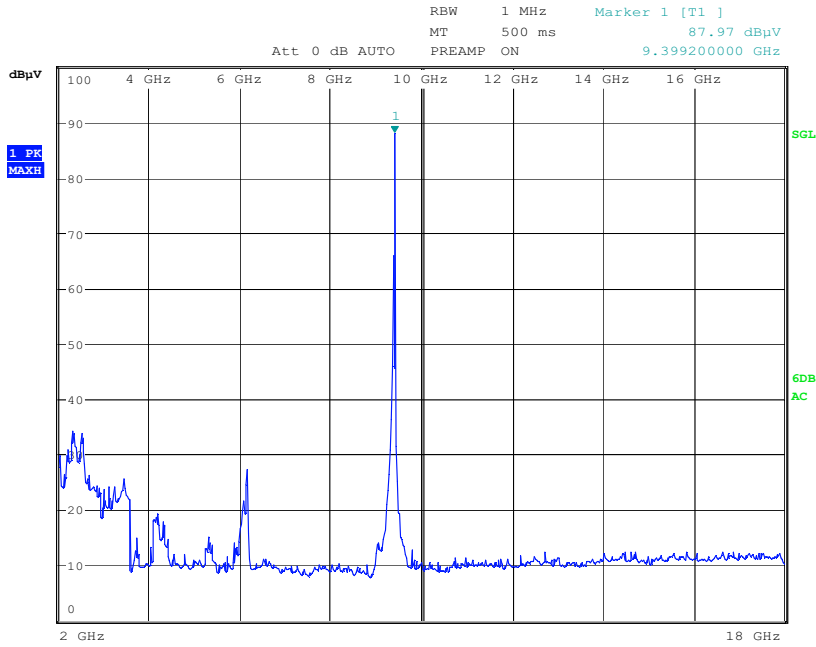

Date: 21.JUL.2009 17:23:13


Figure 8 Radiated Emissions 900ns Pulse width 2GHz to 18GHz

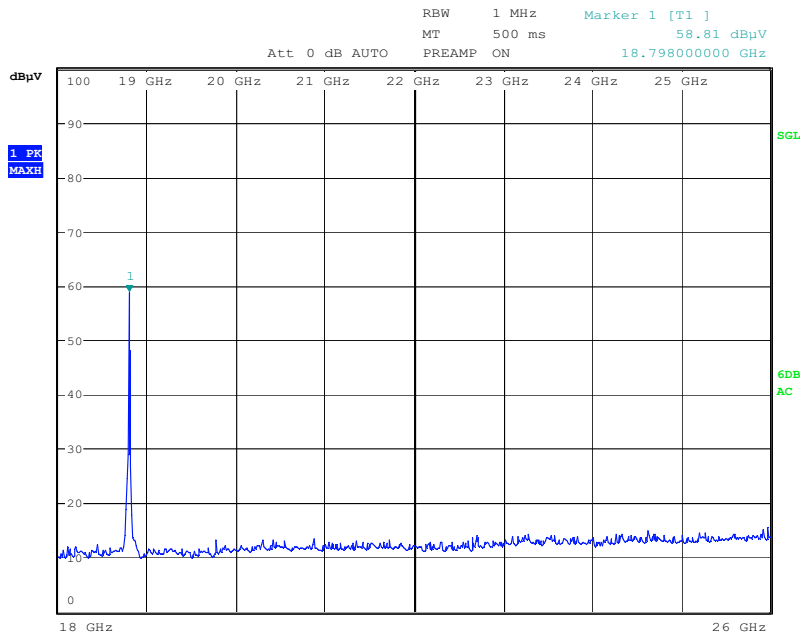

Date: 21.JUL.2009 17:33:21

Figure 9 Radiated Emissions 900ns Pulse width 18GHz to 26GHz

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

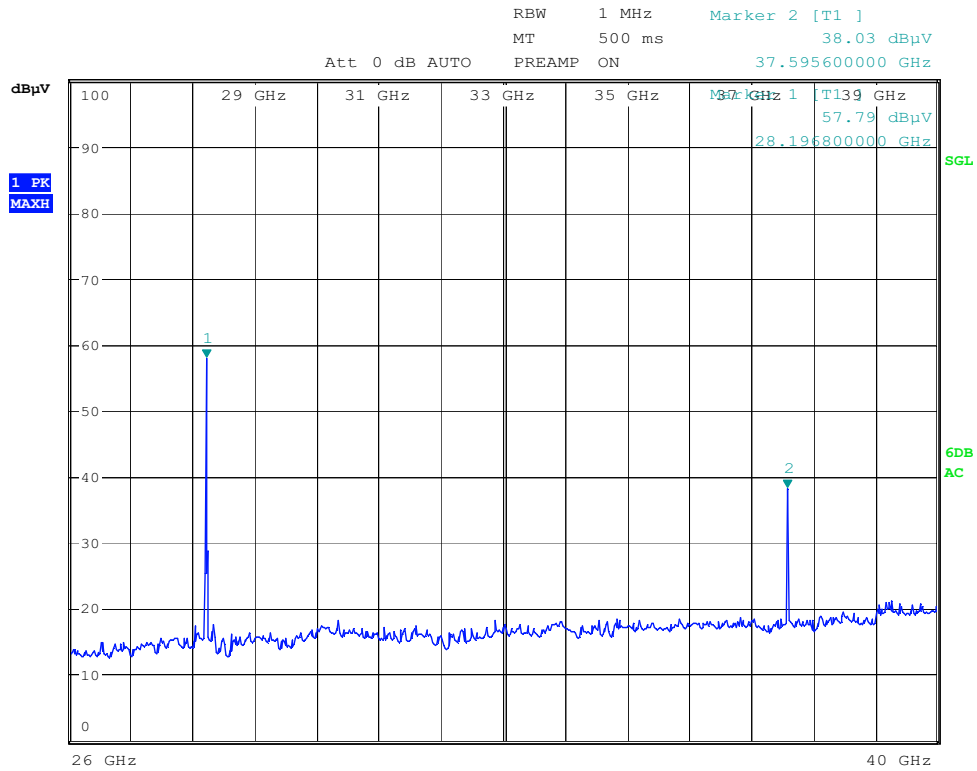

Date: 21.JUL.2009 17:42:57

Figure 10 Radiated Emissions 900ns Pulse width 26GHz to 40GHz

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

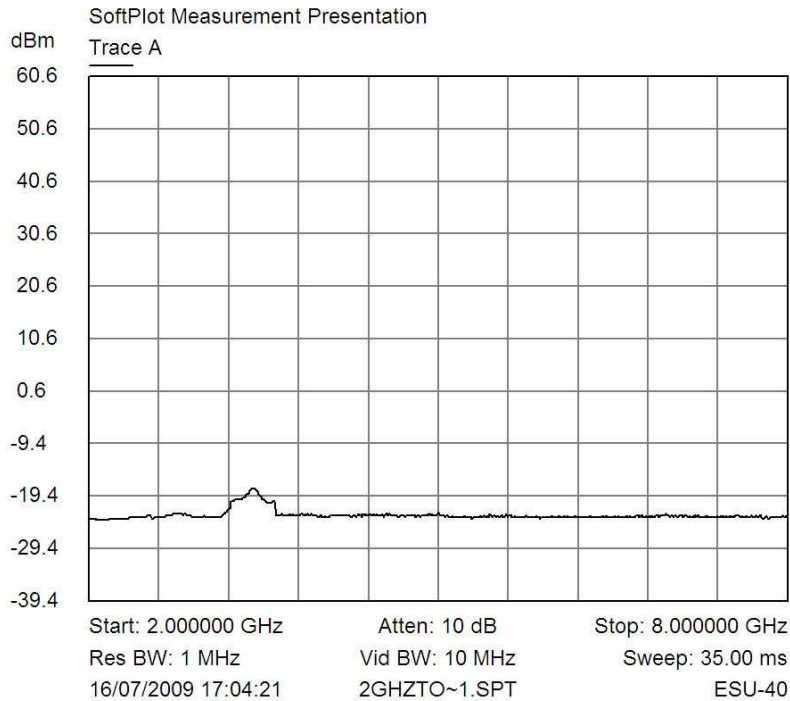


Figure 11 Conducted Emissions 520ns Pulse 2GHz to 8GHz

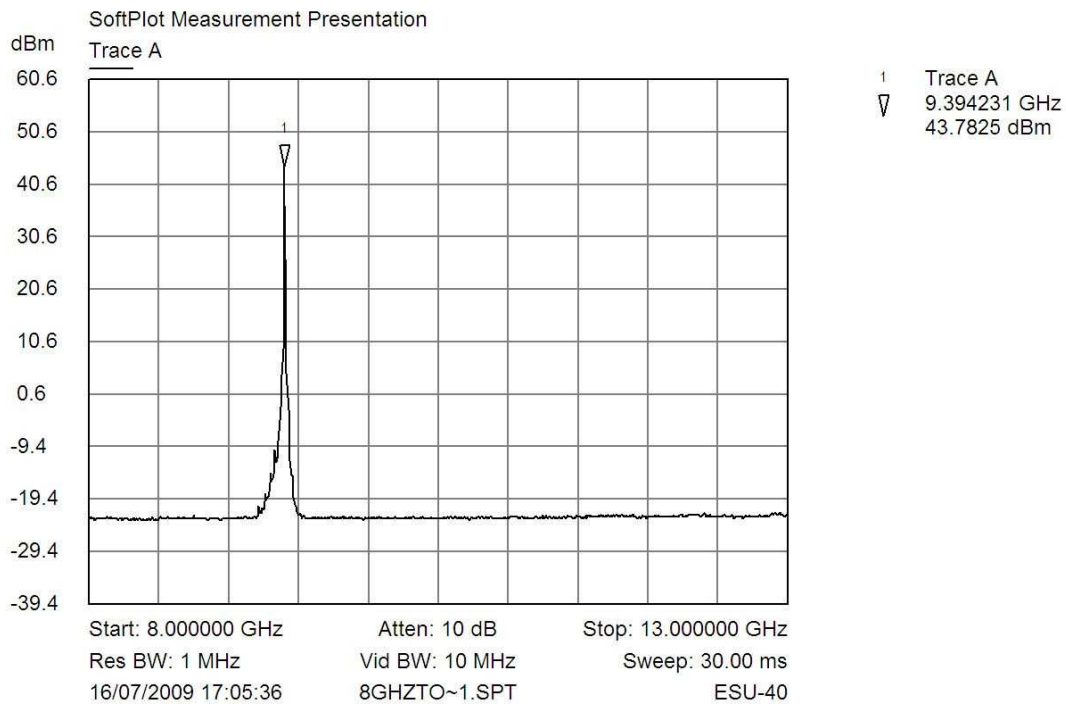


Figure 12 Conducted Emissions 520ns Pulse 8GHz to 13GHz

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

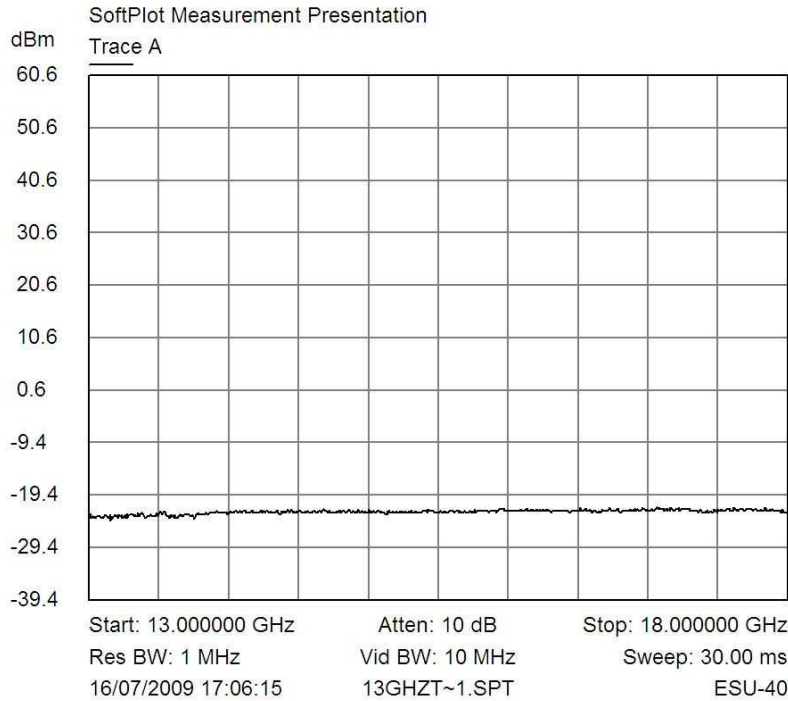


Figure 13 Conducted Emissions 520ns Pulse 13GHz to 18GHz

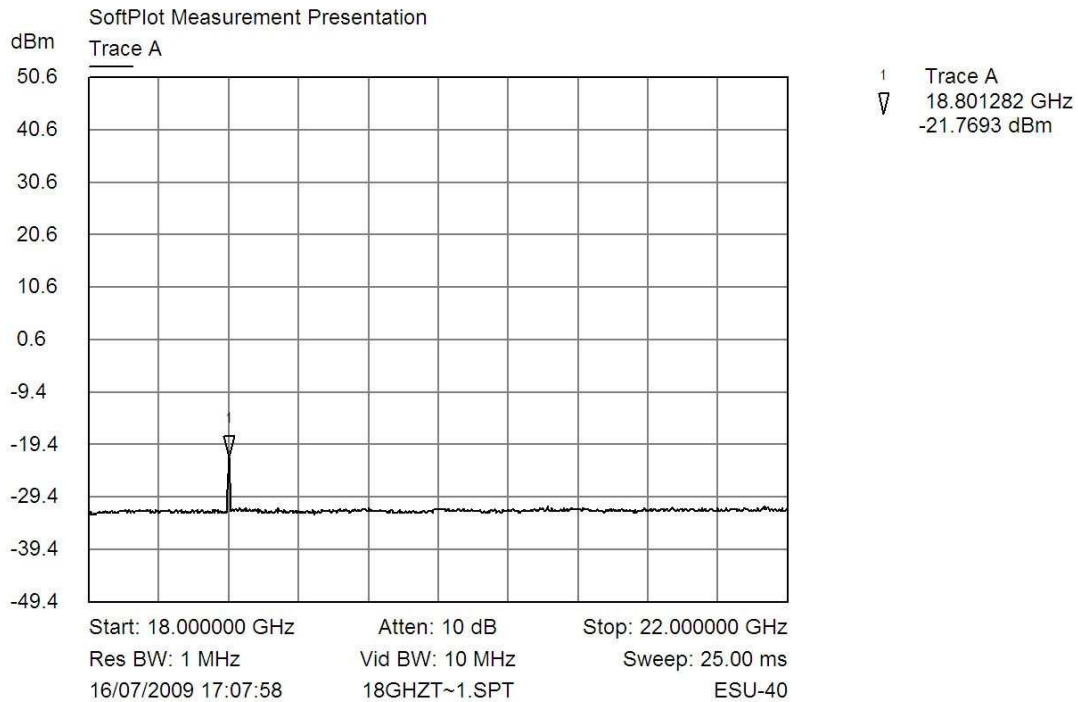


Figure 14 Conducted Emissions 520ns Pulse 18GHz to 22GHz

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

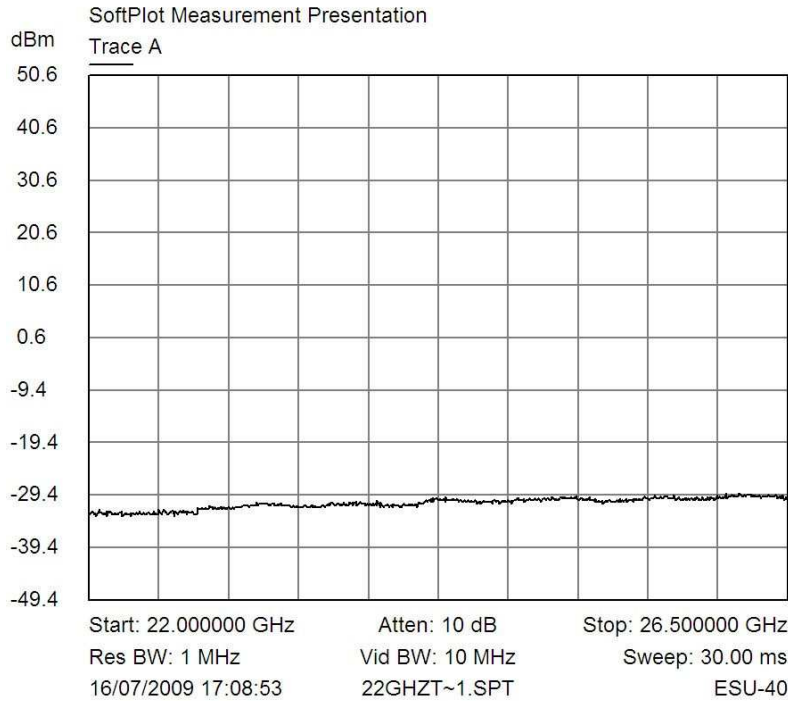


Figure 15 Conducted Emissions 520ns Pulse 22GHz to 26.5GHz

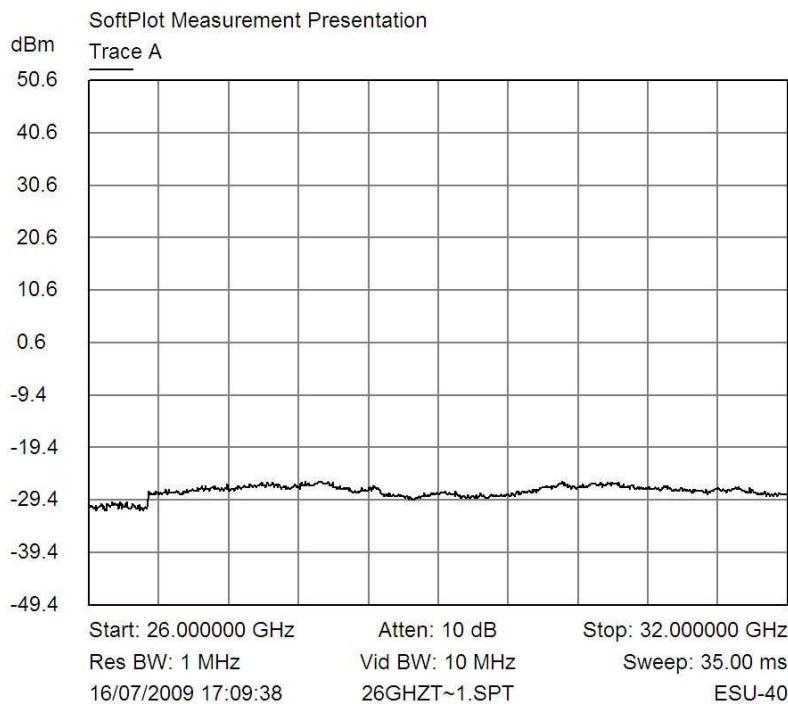


Figure 16 Conducted Emissions 520ns Pulse 26GHz to 32GHz

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

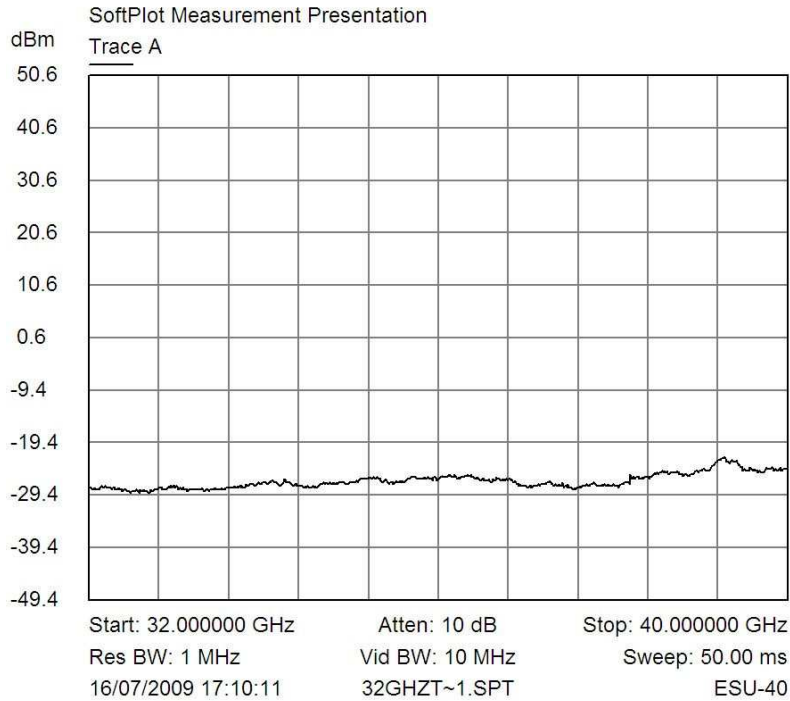


Figure 17 Conducted Emissions 520ns Pulse 32GHz to 40GHz

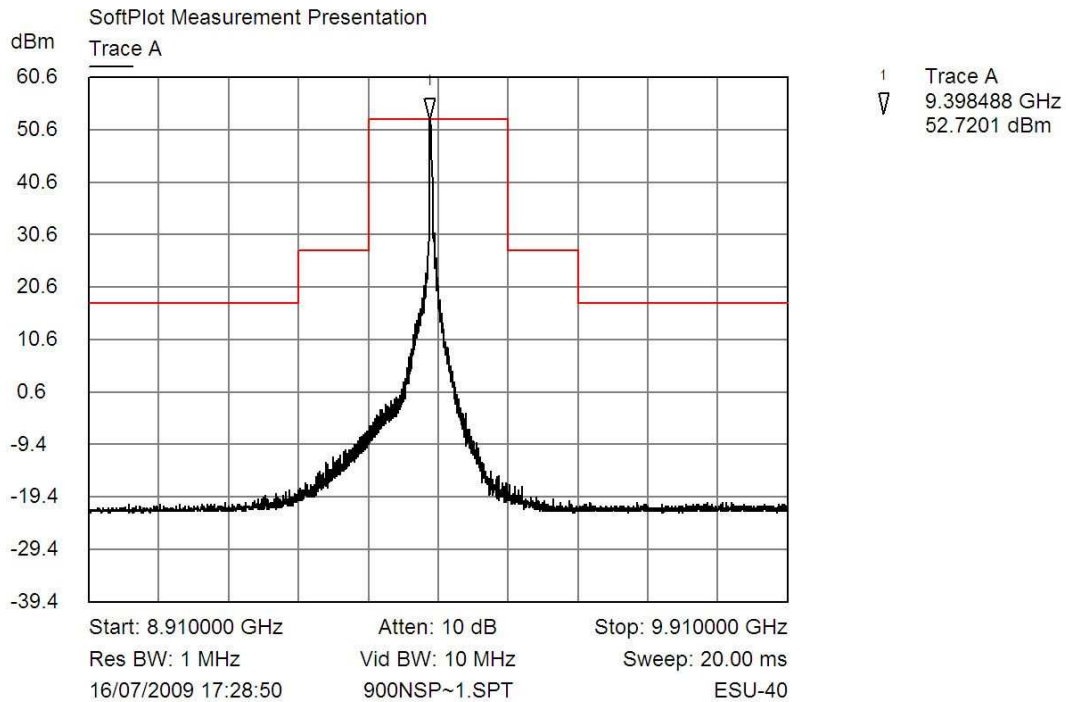


Figure 18 Main Pulse Measurement 900ns Pulse

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

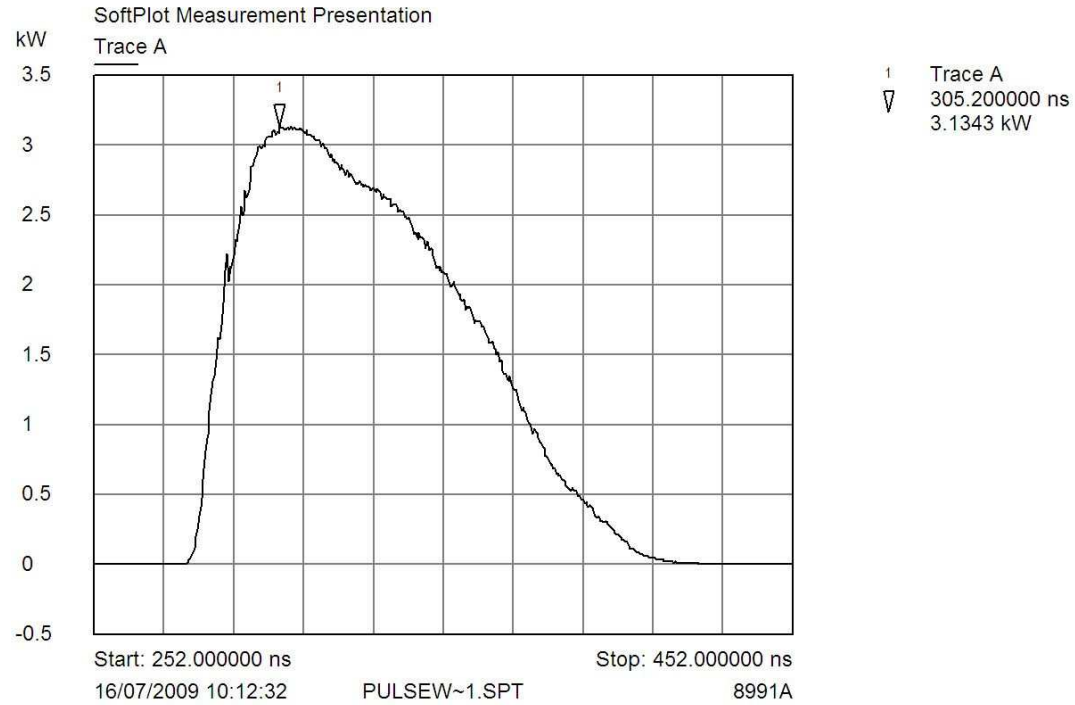


Figure 19 Pulse Characterisation 75ns

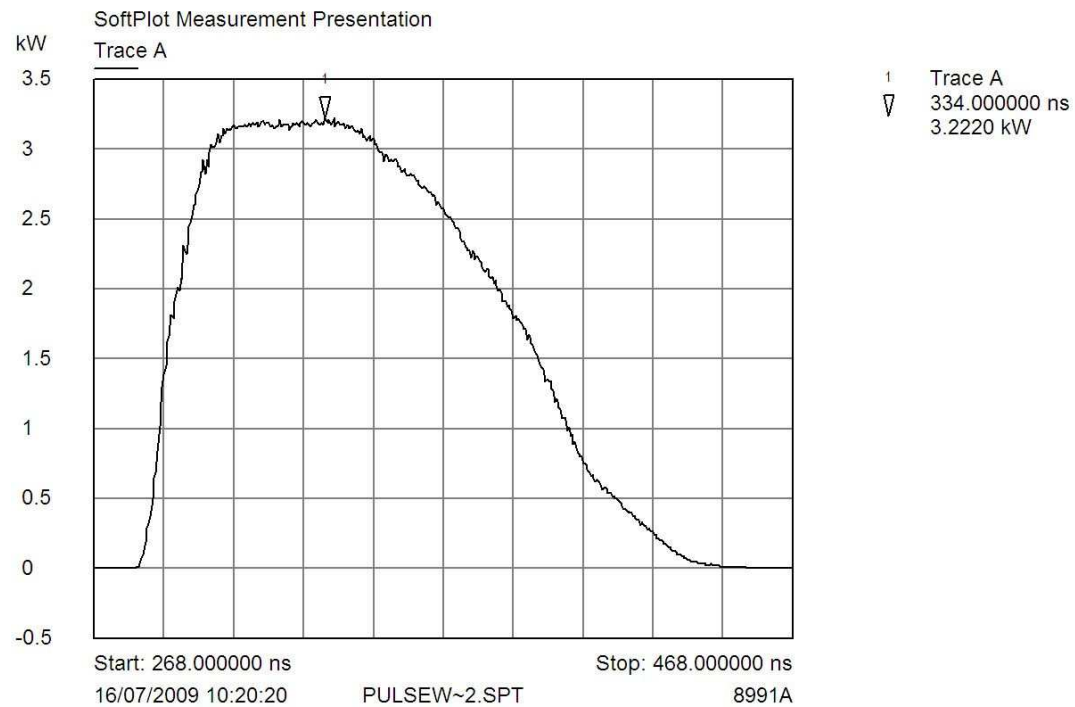


Figure 20 Pulse Characterisation 100ns

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

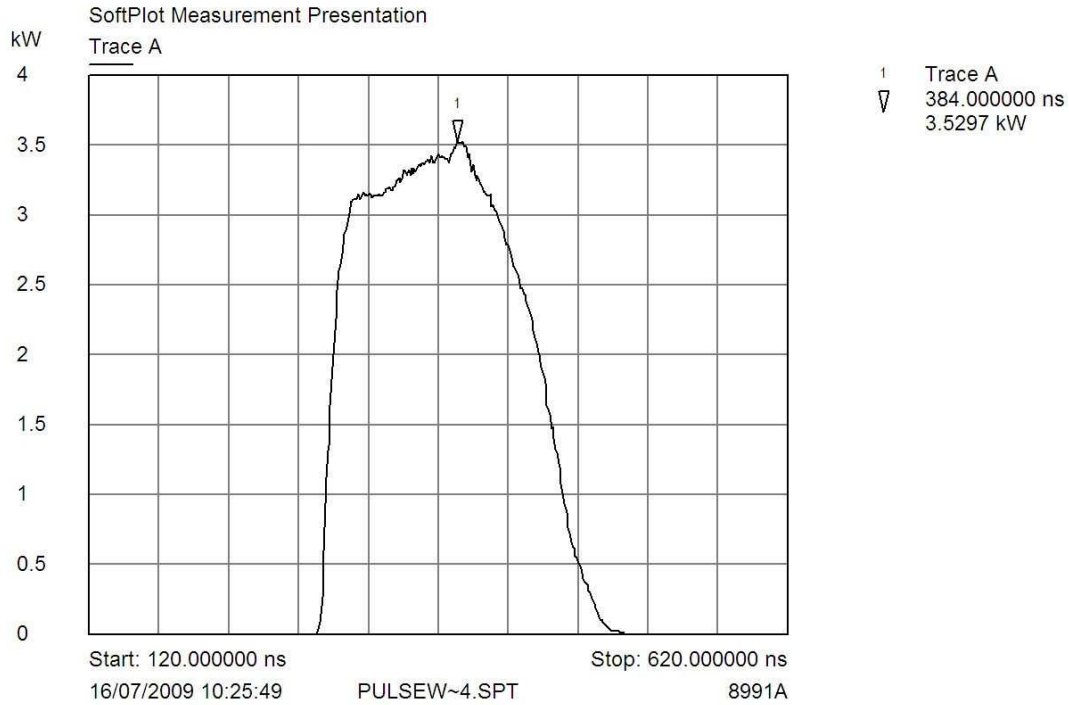


Figure 21 Pulse Characterisation 150ns

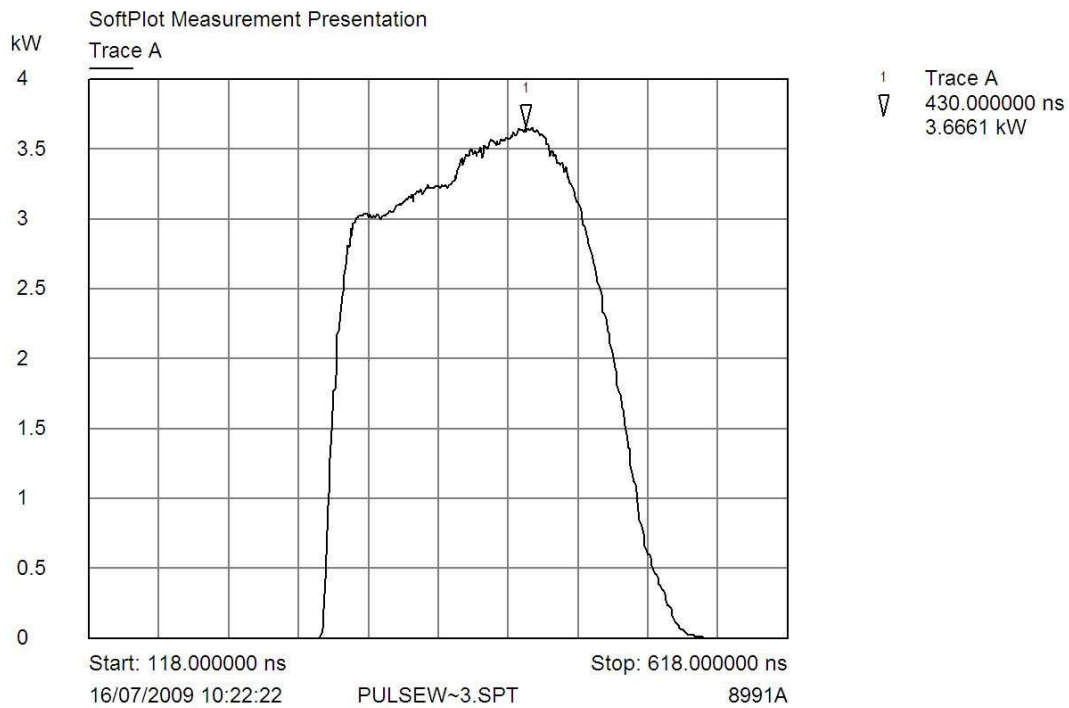


Figure 22 Pulse Characterisation 200ns

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

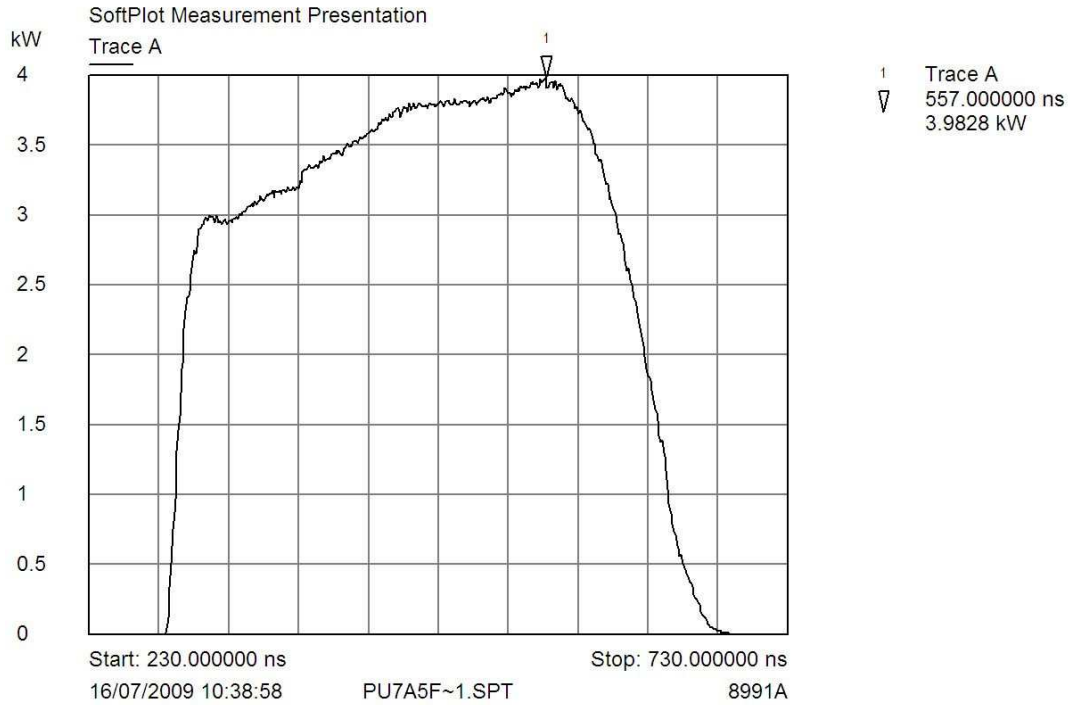


Figure 23 Pulse Characterisation 330ns

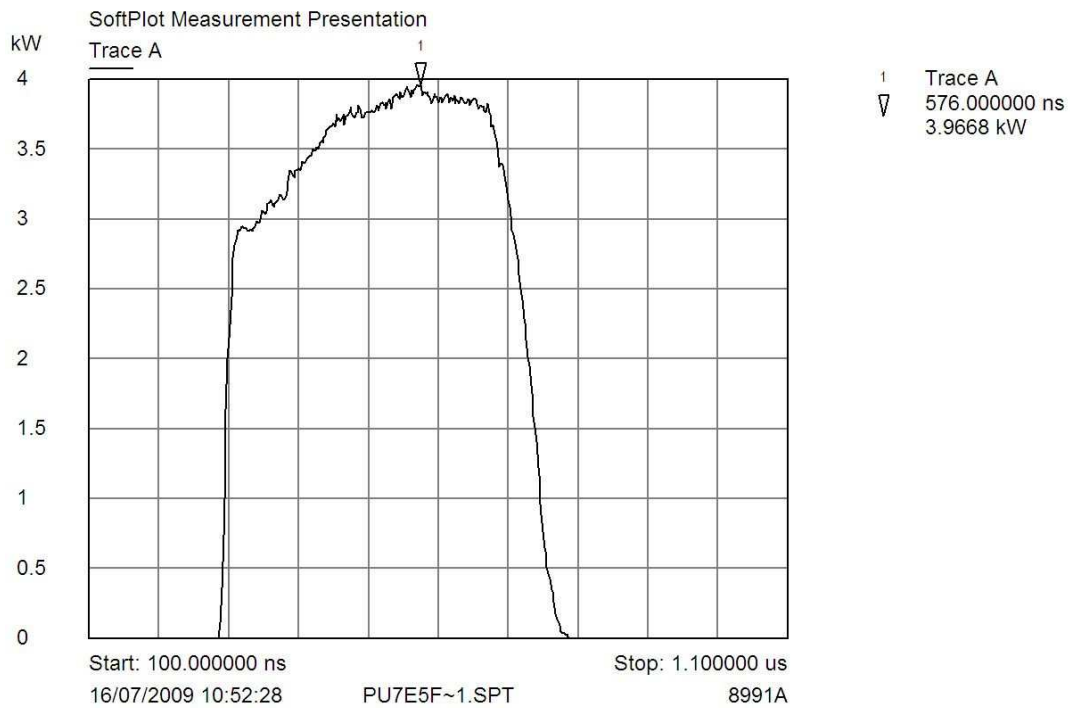


Figure 24 Pulse Characterisation 430ns

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

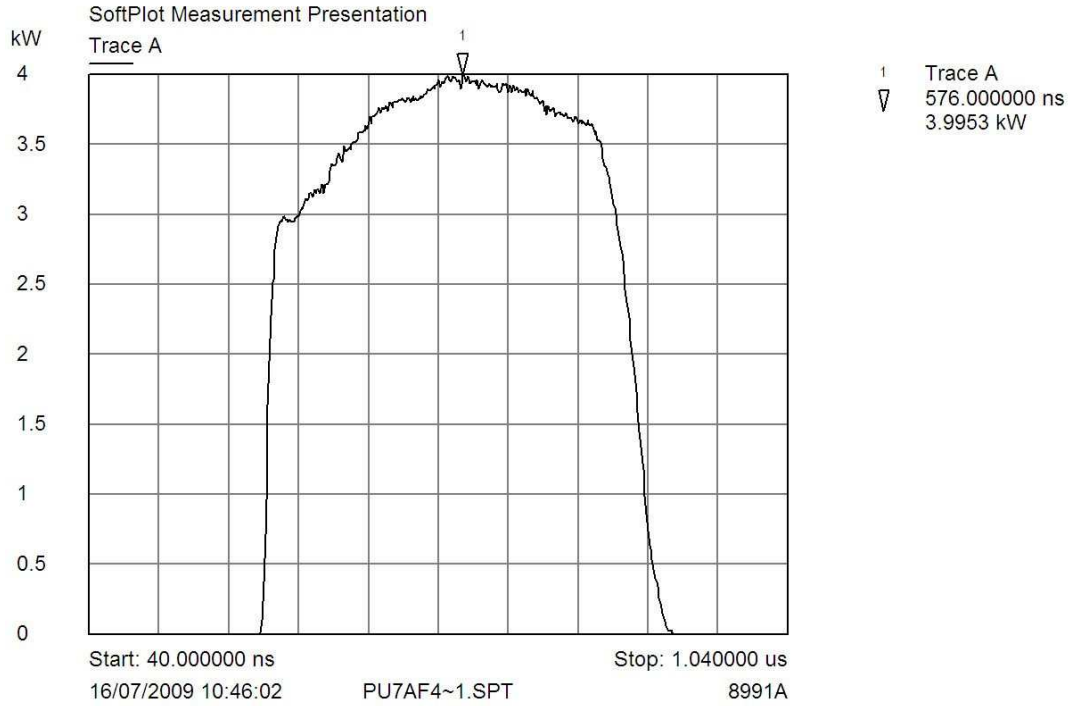


Figure 25 Pulse Characterisation 520ns

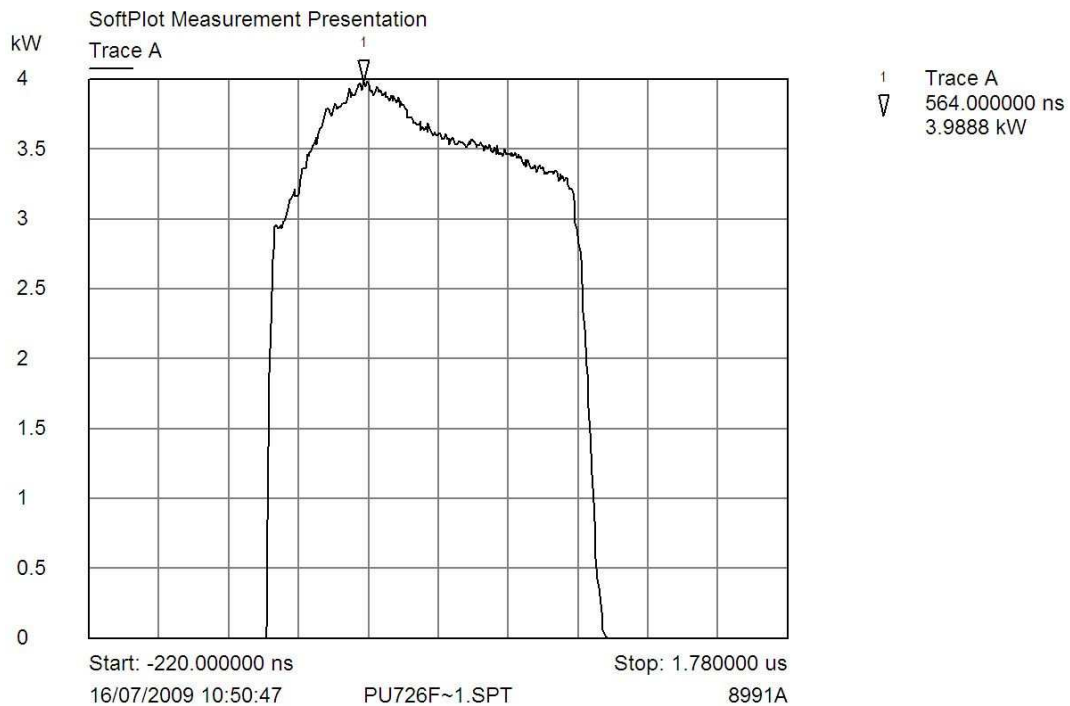


Figure 26 Pulse Characterisation 900ns

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

Issue Date: 1st September 2009

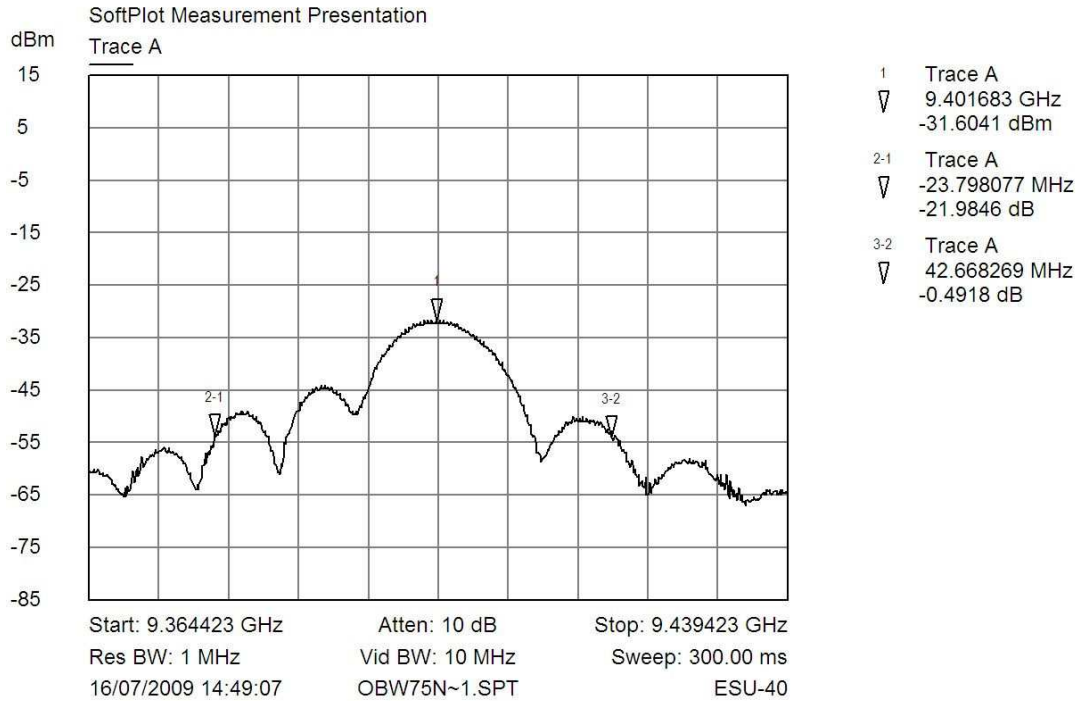


Figure 27 Occupied Bandwidth 75ns Pulse

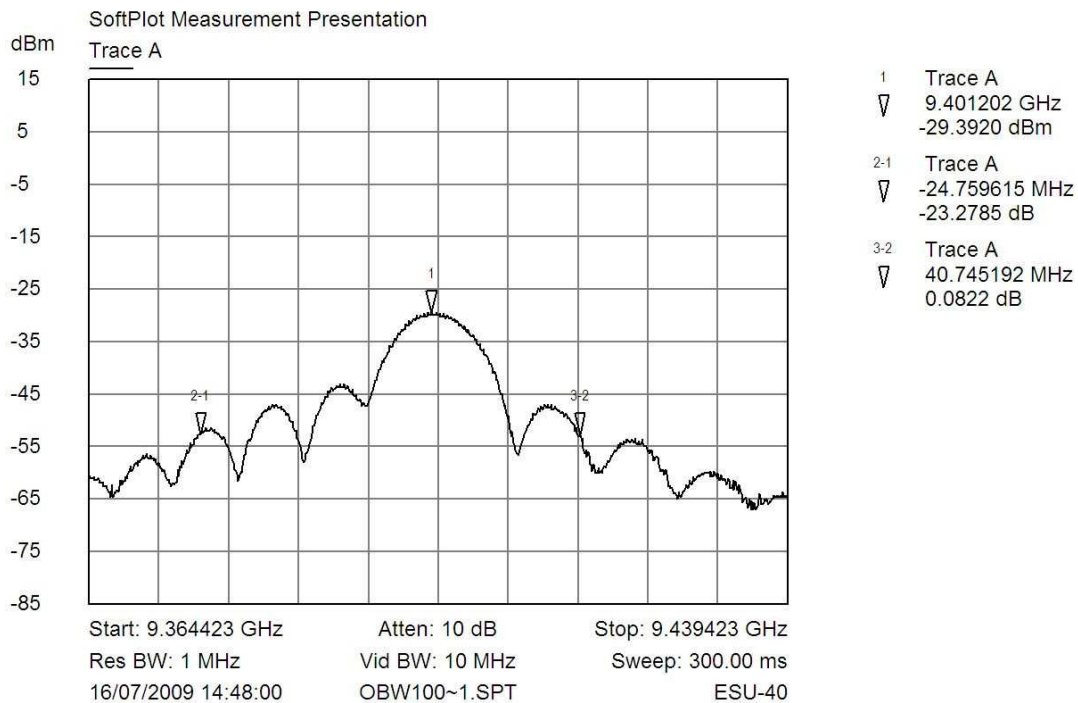


Figure 28 Occupied Bandwidth 100ns Pulse

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

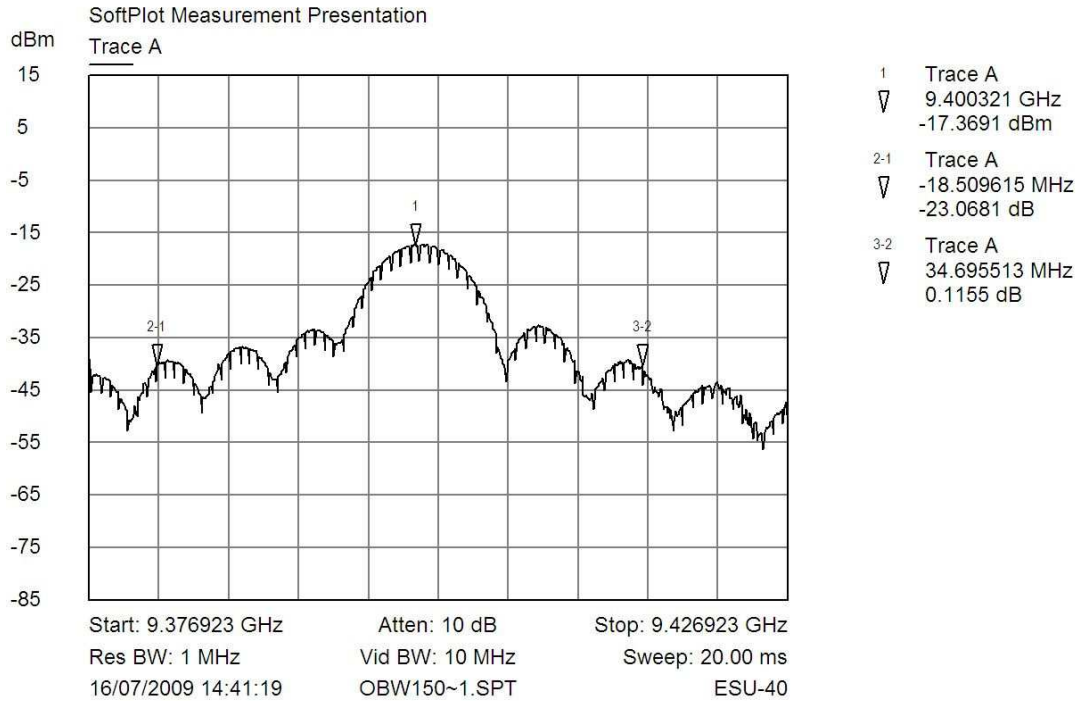


Figure 29 Occupied Bandwidth 150ns Pulse

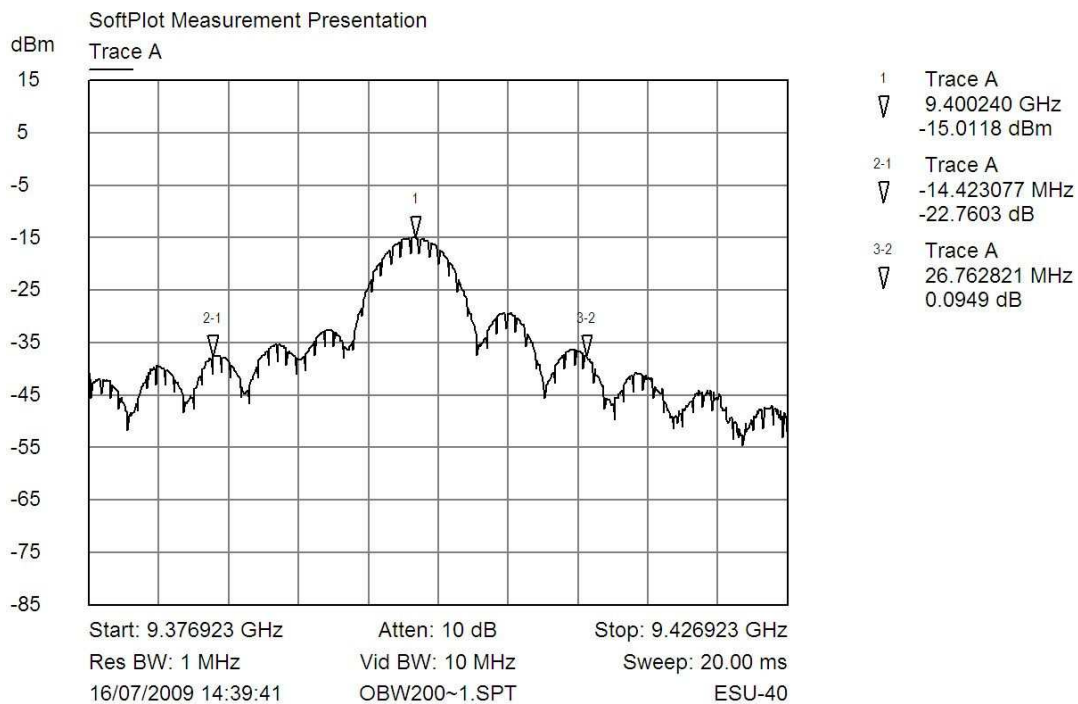


Figure 30 Occupied Bandwidth 200ns Pulse

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

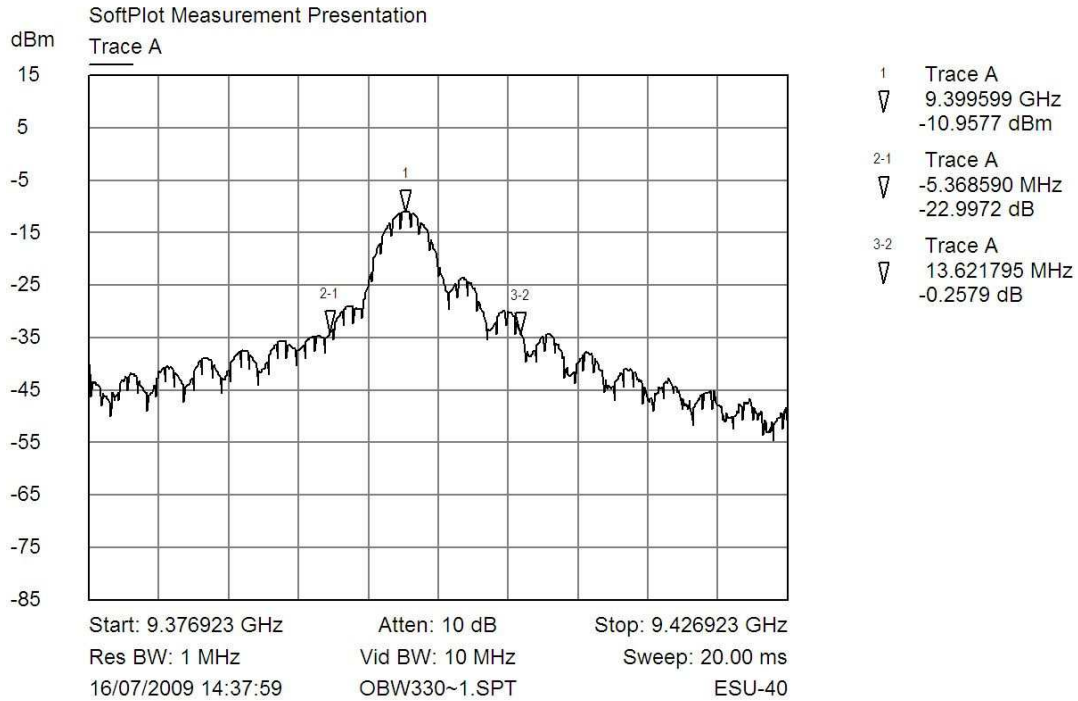


Figure 31 Occupied Bandwidth 330ns Pulse

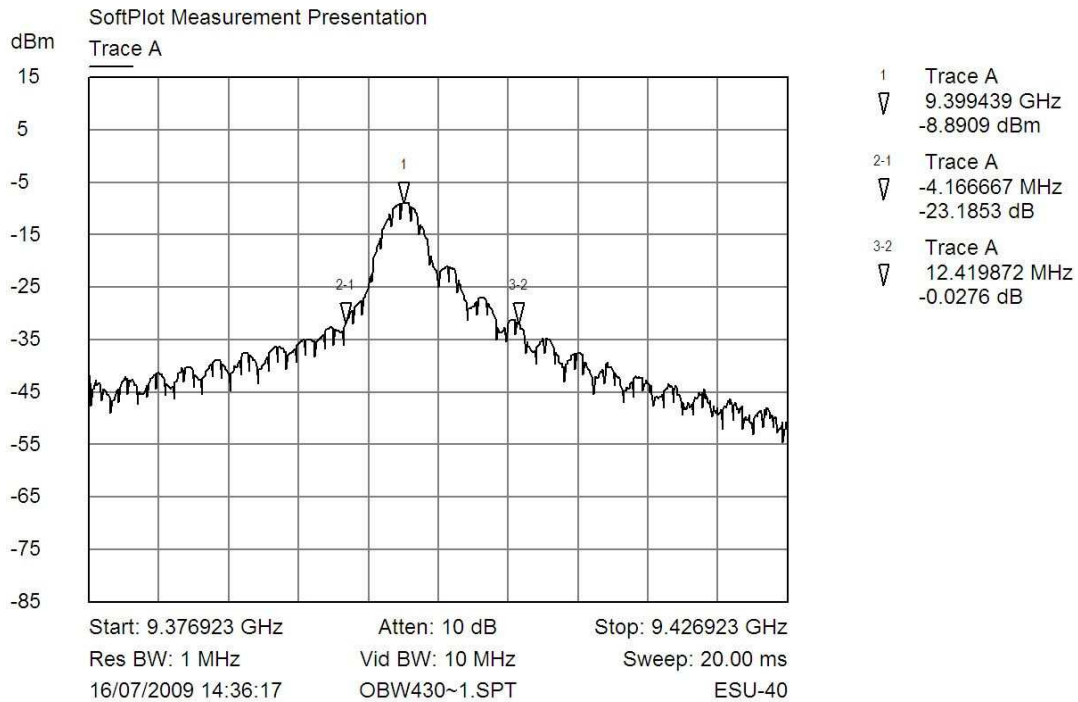


Figure 32 Occupied Bandwidth 430ns Pulse

Test of: Raymarine UK Ltd.
4kW HD Digital Radome Radar
FCC Part 80: 2008 and
FCC Part 2: 2008

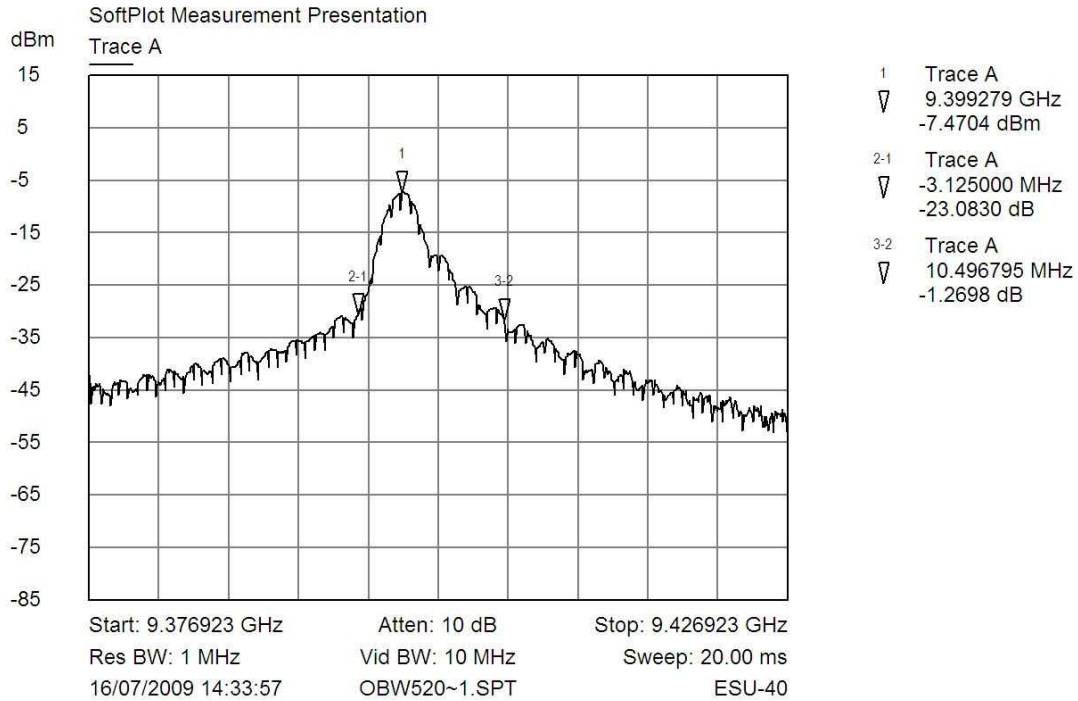


Figure 33 Occupied Bandwidth 520ns Pulse

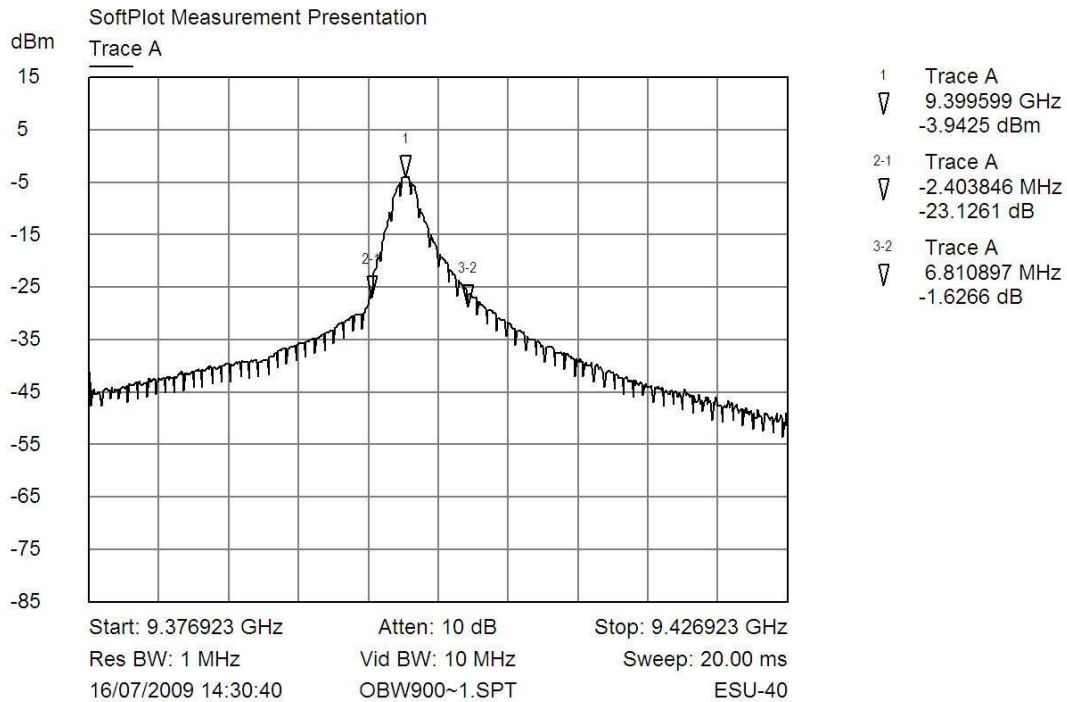


Figure 34 Occupied Bandwidth 900ns Pulse