




TEST REPORT
EMC DEPARTMENT
RAYMARINE LTD

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner

To: FCC Part 80: 1998
and FCC Part 2:1998

(Leisure Marine Radar Equipment)

Test Report Serial No. 648/1064

Checked By: 	Approved By: 
EMC Team leader	International Compliance manager
Tested By: Andy Little / Paul Pitt	Author: Andy Little 
EMC Engineer	EMC Engineer
Issue Date: 13 th February, 2006	Test Dates: 3 rd January to 10 th February 2006

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

Table of Contents

1	Client Information.....	3
2	Equipment Under Test (EUT)	4
2.1	Identification of Equipment Under Test (EUT)	4
2.2	Description of EUT	4
2.3	Modifications incorporated in EUT	4
2.4	Additional information related to Testing.....	5
2.5	Support Equipment.....	5
3	Test Specification, Methods and Procedures	6
3.1	Test Specification	6
3.2	Methods and Procedures	6
3.3	Definition of Measurement Equipment	6
3.4	Facility FCC Registration	7
4	Deviations from the Test Specification	8
5	Operation of the EUT during Testing	9
5.1	Operating Conditions.....	9
5.2	Operating Modes.....	9
5.3	Configuration and peripherals	9
6	Summary of Test Results.....	10
6.1	Summary of Tests	10
6.1.1	Radiated Spurious Emissions	10
6.1.2	Conducted Spurious Emissions	10
6.1.3	RF Power Output	10
6.1.4	Variation of Frequency with Voltage	11
6.1.5	Variation of Frequency with Temperature.....	11
6.1.6	Occupied Bandwidth	11
6.1.7	Transmitter Frequency Tolerance.....	11
6.1.8	Suppression of Interference Aboard Ships	12
6.2	Location of Tests	12
7	Measurements, Examinations and Derived Results	13
7.1	General Comments	13
7.2	Field Strength Measurements	13
7.2.1	Magnetic Field Measurements: Frequency Range 9 kHz to 30 MHz	13
7.2.2	Electric Field Measurements: Frequency Range 30 MHz to 2000 MHz.....	13
7.2.3	Electric Field Measurements: Frequency Range: 2GHz to 40GHz	13
7.3	Conducted Emissions.....	14
7.3.1	Peak Detector measurements on RF port	14
7.4	Peak Power	15
7.5	Pulse Width	15
7.6	Pulse Repetition Frequency	16
7.7	Average Power.....	16
7.8	Variation of frequency with input voltage	17
7.9	Variation of frequency with temperature	17
7.10	Occupied Bandwidth	19
7.11	Transmitter Frequency Tolerance	19
7.11.1	Specification: 80.209(b).....	19
7.11.2	Calculation	20
8	Measurement Uncertainty.....	21
Appendix A	Test Equipment Used	22
Appendix B	Measurement Methods.....	24
Appendix C	Test Configuration Drawings	26
Appendix D	Graphical Test Results	30

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

1 Client Information

Company Name	Raymarine Ltd.
Address:	Robinson Way Anchorage Park Portsmouth Hampshire PO3 5TD England, U.K.
Contact Name:	Mr. P. Bowen, EMC Team leader

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

2 Equipment Under Test (EUT)

2.1 Identification of Equipment Under Test (EUT)

Brand Name:	Raymarine	
Model Name or Number:	RD218 Analog 2kW 18inch Radome Scanner Compatible with the Following Raymarine displays E120 12 inch Ultra Bright Multifunction Navigation Display E80 8 inch Ultra Bright Multifunction Navigation Display C70 7 inch Multifunction Navigation Display C80 8 inch Multifunction Navigation Display C120 12 inch Multifunction Navigation Display	
Unique Type Identification:	RD218 2kW unit	E52065
	E120 12" Display	E02013
	E80 8" Display	E02011
	C120 12" Display	E02022
	C80 8" Display	E02020
	C70 7" Display	E02018
Serial Number:	Scanner Unit	EMC151205
	Display Unit (E120)	EMC041104b
Country of Manufacture:	Hungary	
FCC ID Number:	PJ5-AD2D-8P	
Date of Receipt:	15 th December 2005	

2.2 Description of EUT

The equipment under test is an X-band marine radar intended for use on leisure craft and small workboats, and is comprised of:

Scanner Unit: 2kW X-band transmitter with an 18 inch Flare antenna.

Display Unit: 12 inch Ultra Bright Multifunction Navigation Display with chart reader and with Seataalk/alarm, NMEA, Video in/out, Seataalk 2, and Seataalk High speed bus interface ports.

2.3 Modifications incorporated in EUT

The EUT has not been modified from what is described by the Model Name and Unique Type Identification stated above.

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

2.4 Additional information related to Testing

Power Supply Requirement:	Nominal 12-32V DC supply
Intended Operating Environment:	Leisure Marine & Small Workboats
Weight:	218 Scanner: 6.5kg (14.3lbs) Display 7.35kg (16.2lbs)
Dimensions:	424 Scanner: 521mm dia x 247mm height Display: w355.5mm x h264mm x d140mm
Interface Ports:	Power Seatalk / Alarm Seatalk 2 Seatalk High Speed Bus NMEA Video In Video Out

2.5 Support Equipment

Support equipment used up to 2GHz

Item	Unique Type Identification & Serial Number
ST60 Multi Display	A22003 / EMC 101203b
C80 Display	E02020 / EMC 181103a
DSM 250 Sonar	E62007 / EMC031103e
B256 Sonar transducer	E66024
ST290 Data Display	E22056 / 430015

No support equipment was required to be used over 2GHz

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

3 Test Specification, Methods and Procedures

3.1 Test Specification

Reference:	FCC Part 80: 1998 and FCC Part 2:1998
Title:	Code of Federal Regulations, Part 80 (47CFR): 1998 Stations in the maritime services Code of Federal Regulations, Part 2 (47CFR): 1998 Frequency Allocations and radio treaty matters; general rules and regulations
Comments:	The test facility used for the radiated emissions portions of these tests is an alternative test site as described in ANSI C63.4-2001, being a 3m test range within a semi-anechoic chamber, with antenna height scanning from 1 – 4 metres and meeting the +/-4dB NSA criterion. It is registered with the FCC under the 2.948 (47CFR) listing procedure with Reference Number 970522.
Purpose of Test:	To demonstrate compliance of the RD218 analog 2kW radome scanner with the appropriate clauses of Parts 2 and 80 of the FCC Rules.

3.2 Methods and Procedures

The methods and procedures used were as detailed in:

ANSI C63.2-1996

Title: American National Standard for Electromagnetic Noise and Field Strength Instrumentation, 10 Hz to 40 GHz – Specifications

ANSI C63.4-2001

Title: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI C63.5-1998

Title: American National Standard for Electromagnetic Compatibility – Radiated Emission Measurements in Electromagnetic Interference (EMI) Control – Calibration of Antennas (9 kHz to 40 GHz)

CISPR 16-1 (1999)

Title: Specification for radio disturbance and immunity measuring apparatus and methods Part 1: Radio disturbance and immunity measuring apparatus

CISPR 16-4 (2002)

Title: Specification for radio disturbance and immunity measuring apparatus and methods Part 4: Uncertainty in EMC measurements

3.3 Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the Methods and Procedures section above. Appendix A contains a list of the test equipment used.

**RAYMARINE LTD.
EMC Department**

**TEST REPORT
No. 648/1064
Page 7 of 57**

**Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998**

Issue Date: 13th February, 2006

3.4 Facility FCC Registration

The EMC test facility is registered with the FCC under registration number 970552

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

4 Deviations from the Test Specification

None

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

5 Operation of the EUT during Testing

5.1 Operating Conditions

1. Radiated Emissions, 9kHz to 40GHz: The EUT was located on a non-conducting support above a turntable on a 3m test range within a semi-anechoic chamber (Raymarine Site 3)
2. The EUT was located in a laboratory environment for all other tests.
3. During testing, the EUT was powered by a nominal 12V DC supply except when measuring Frequency Variation with Voltage. [FCC Part 2, 1055(d)]

5.2 Operating Modes

The EUT was tested in the following operating modes:

1. Radiated emissions: Transmitting into a rotating non-reflective load with the transmitter set to 75, 450 and 1000ns pulse widths.
2. Conducted emissions: Transmitting into a fixed non-reflective load with the transmitter set to 75, 450 and 1000ns pulse widths.
3. Variation of transmit frequency with voltage and temperature: The transmitter was set to the half nautical mile range (75ns pulse width) and the six nautical mile range (1000ns pulse width).
4. Transmitter power, pulse width, occupied bandwidth and P.R.F. Transmitting into a fixed non-reflective load.

5.3 Configuration and peripherals

1. The scanner unit was connected to the display unit with the standard cable of 15m length. A transmit dummy load was connected to the scanner unit antenna port. Over the frequency range 9kHz to 2GHz all interface ports were terminated with suitable instruments. Above 2GHz all display unit interface ports were connected to dummy loads using the maximum length of cable specified for the particular port, or 20 m where this is less than the maximum specified. A 12V DC supply was connected to the Display Unit.
2. This configuration is defined as being likely to be the worst case as regards emissions.
3. Appendix A of this report contains a full list of test equipment used and Appendix C contains a schematic diagram of the test configuration.

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

6 Summary of Test Results

6.1 Summary of Tests

6.1.1 Radiated Spurious Emissions

Frequency Range	Specification Reference	Compliance Status
9kHz to 40GHz	2.1053 and 80.211(f)	Complied

6.1.2 Conducted Spurious Emissions

Frequency Range	Specification Reference	Compliance Status
9kHz to 40GHz	2.1051 and 80.211(f)	Complied

6.1.3 RF Power Output

6.1.3.1 Peak Power

Nominal Pulse width Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1046(a) and 80.215(a)	Complied

6.1.3.2 Average Power

Nominal Pulse width Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1046(a) and 80.215(a)	Complied

6.1.3.3 Pulse Width

Nominal Pulse width Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1046(a) and 80.215(a)	Complied

6.1.3.4 PRF

Nominal Pulse width Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1047(d) and 80.213(g)	Complied

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

6.1.4 Variation of Frequency with Voltage

6.1.4.1 75ns

Nominal Pulse width (ns)	Specification Reference	Compliance Status
75	2.1055(d)	Complied

6.1.4.2 1000ns

Nominal Pulse width (ns)	Specification Reference	Compliance Status
1000	2.1055(d)	Complied

6.1.5 Variation of Frequency with Temperature

6.1.5.1 75ns

Nominal Pulse width (ns)	Specification Reference	Compliance Status
75	2.1055(a and b)	Complied

6.1.5.2 1000ns

Nominal Pulse width (ns)	Specification Reference	Compliance Status
1000	2.1055(a and b)	Complied

6.1.6 Occupied Bandwidth

Nominal Pulse width Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1049(i) and 80.205	Complied

6.1.7 Transmitter Frequency Tolerance

Nominal Pulse width Range (ns)	Specification Reference	Compliance Status
75 to 1050	80.209(b)	Complied

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

6.1.8 Suppression of Interference Aboard Ships

80.217. When the radar is in the Standby mode of operation, the local oscillator is automatically switched off.

6.2 Location of Tests

All the measurements described in this report were performed in the EMC Department at the premises of Raymarine Ltd., Robinson Way, Anchorage Park, Portsmouth, Hampshire PO3 5TD, England, U.K.

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

7 Measurements, Examinations and Derived Results

7.1 General Comments

This section contains test results only. Details of the test methods and procedures can be found in Appendix B of this report.

Measurement uncertainties are stated in accordance with the requirements of CISPR 16-4:2002. Please refer to Section 8 for details of measurement uncertainties.

The highest frequency generated by the EUT is 9.4GHz. Consequently, tests were performed up to 40GHz.

7.2 Field Strength Measurements

7.2.1 Magnetic Field Measurements: Frequency Range 9 kHz to 30 MHz

Plots of measurements using a peak detector can be found in Appendix D.

No emissions exceeded a level of 70dBuV/m.

Details of the limit line calculation can be seen in Appendix B.

7.2.2 Electric Field Measurements: Frequency Range 30 MHz to 2000 MHz

Plots of measurements can be found in Appendix D.

The highest peak levels measured were less than 60dBuV/m

Details of the limit line calculation can be seen in Appendix B

7.2.3 Electric Field Measurements: Frequency Range: 2GHz to 40GHz

Plots of measurement scans can be found in Appendix D.

The following table lists frequencies at which significant emissions were measured using Peak detector functions. Although these emissions are not required to be recorded, being more than 20dB lower than the limit line, they are included for completeness as they are all magnetron-related.

Details of the limit line calculation can be seen in Appendix B

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

Frequency (GHz)	Antenna Polarization	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result
18.790	Vertical	83.6	134.4	50.8	Complied
28.19	Vertical	103.5	134.4	30.9	Complied
37.48	Vertical	102.9	134.4	31.5	Complied

7.3 Conducted Emissions

7.3.1 Peak Detector measurements on RF port

The design of the RF coupling from the magnetron to the antenna forms an effective high pass/band pass filter arrangement. The peak energy level of radar requires considerable attenuation in order to prevent the analyser from going into compression. This limits the maximum dBc figure that can be obtained without changing the resolution bandwidth of the analyser. Since the signal is wideband compared to the resolution bandwidth, it is critical to the measurement accuracy that the resolution bandwidth settings remain consistent throughout the testing where possible.

Due to the use of waveguide on the antenna port, the lowest frequency of measurement was increased to 6GHz. The following table lists frequencies at which emissions or the highest noise floors were measured using a Peak Detector. Note that for measurements above 26.5GHz, the mixer conversion process may produce a "true" and "spurious" response for each signal, depending on which analyser local oscillator harmonic is selected. Only the true responses are detailed in the table below. These are clearly identifiable as harmonics of the magnetron frequency. Plots of the scans can be found in Appendix D.

Measurements were performed from 6 GHz to 40GHz with the EUT set to 75ns, 450nS and 1000ns, measurements were performed within and around the transmitter frequency allocation.

Details of the limit line calculation can be found in Appendix B.

All emissions were more than 20dB below the required limit.

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

7.4 Peak Power

These measurements were performed with the HP Peak Power Analyser and sensor connected to the EUT antenna port via a coupler and in-line attenuator.

Pulse Width (ns)	Measured Power (kW)
75	2.04
100	2.04
150	1.91
250	1.78
350	1.91
450	1.79
600	1.82
1000	1.82

7.5 Pulse Width

Plots can be found in Appendix D.

In order to determine the characteristics of the various pulses, the HP Peak Power Analyser was connected to the EUT antenna port via a coupler and inline attenuator.

Nominal Pulse Width (ns)	Measured Pulse Width (ns)
75	77
100	102
150	153
250	252
350	358
450	460
600	618
1000	1010

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

7.6 Pulse Repetition Frequency

In order to determine the characteristics of the various pulses, the HP Peak Power Analyser and sensor was connected to the EUT antenna port via a coupler and in-line attenuator.

Pulse Width (ns)	Measured P.R.F. (Hz)
75	2994
100	2994
150	2994
250	2500
350	1798
450	1405
600	998
1000	741

Note 1: The P.R.F. is jittered as part of the interference rejection circuit. The Interference Rejection circuit was switched off while making P.R.F. measurements.

7.7 Average Power

Measured at the antenna port

Nominal Pulse Width (ns)	Peak Power (kW)	P.R.F. (Hz)	Measured Pulse Width (ns)	Average Power (Watts)
75	2.04	2994	77	0.47
100	2.04	2994	102	0.62
150	1.91	2994	153	0.87
250	1.78	2500	252	1.12
350	1.91	1798	358	1.23
450	1.79	1405	460	1.16
600	1.82	998	618	1.12
1000	1.82	741	1010	1.36

Note 1: The previous subsections detail the results required to make the above calculation.

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

7.8 Variation of frequency with input voltage

The frequency of the EUT was measured at each voltage.

75ns

% of Nominal Volts	Volts (dc)	Measured Frequency (GHz)
85% of 12.0	10.2	9.419475
100% of 12.0	12.0	9.419388
100% of 32.0	32.0	9.419494
115% of 32.0	36.8	9.419263

1000ns

% of Nominal Volts	Volts (dc)	Measured Frequency (GHz)
85% of 12.0	10.2	9.418988
100% of 12.0	12.0	9.418950
100% of 32.0	32.0	9.419000
115% of 32.0	36.8	9.419006

Note: The equipment can be operated from any voltage within the nominal range 12 to 32V without requiring any adjustment. Therefore, the testing was performed from 85% of the lowest to 115% of the highest operating voltage.

7.9 Variation of frequency with temperature

The EUT scanner unit was situated in an environmental test chamber and set for normal operation at the shortest pulse width. The antenna port was connected via a coupler and in-line attenuator to the input of the HP70000 analyser, which is equipped with a precision frequency reference module.

The chamber was then set to -20C. After a 30-minute delay to allow for temperature stabilisation, the EUT frequency was monitored until there was no measurable frequency change. The frequency was recorded. The EUT was then set for normal operation at the longest pulse width, and the frequency monitored until there was no measurable frequency change. The frequency was recorded.

The chamber temperature was then increased by 10C and the process repeated at this temperature and at further increments of 10C up to and including +50C.

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

75ns

Temperature C	Measured Frequency (GHz)
-20	9.406725
-10	9.404100
0	9.402870
+10	9.400095
+20	9.399795
+30	9.397475
+40	9.395820
+50	9.394835

1000ns

Temperature C	Measured Frequency (GHz)
-20	9.406680
-10	9.404890
0	9.4031550
+10	9.4014550
+20	9.4006550
+30	9.398980
+40	9.397170
+50	9.396060

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

7.10 Occupied Bandwidth

Plots can be found in Appendix D.

The 99.5% (-23dBc) power bandwidth was measured for each pulse width using the delta function of the HP70000 analyser. Owing to the shape of the pulse it was not always possible to measure the bandwidth at the exact -23db point. Consequently, the next lower point was taken. This has the effect of slightly increasing the measured bandwidth above the actual 99.5% bandwidth.

Nominal Pulse Width (ns)	99.5% Power Bandwidth (MHz)
75	49.70
100	43.29
150	32.87
250	24.05
350	20.84
450	20.44
600	20.04
1000	20.04

7.11 Transmitter Frequency Tolerance

7.11.1 Specification: 80.209(b)

“When pulse modulation is used in land and ship radar stations operating in the bands above 2.4GHz the frequency at which maximum emission occurs must be within the authorised bandwidth and must not be closer than $1.5/T$ MHz to the upper and lower limits of the authorised bandwidth where “T” is the pulse duration in microseconds.”

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

7.11.2 Calculation

Authorised Bandwidth: 9300MHz to 9500MHz

Specification Limits: [Lower] 9300 + 1.5/T
[Upper] 9500 - 1.5/T

Transmitter Frequency Tolerances			
Nominal Pulse Width (ns)	Actual Pulse Width (ns)	Specification Limits (MHz)	
		Lower	Upper
75	77	9.31948	9.48052
100	102	9.31471	9.48529
150	153	9.30980	9.49020
250	252	9.30595	9.49405
350	358	9.30419	9.49581
450	460	9.30326	9.49674
600	618	9.30243	9.49757
1000	1010	9.30149	9.49851

From examining the transmitter frequency data from the Variation of Frequency with Voltage and Variation of Frequency with Temperature results pages, it can be seen that the transmitter is within the calculated specification.

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

8 Measurement Uncertainty

Measurement uncertainty was calculated after reference to CISPR 16-4:2002. In order to determine compliance with the limit for emissions tests, the specification states that, where the calculated uncertainty exceeds the value of U_{CISPR} , the difference in dB is to be added to the instrument reading. The corrections shown in the table below are therefore added to the reported measurements before assessing compliance with the limits.

Measurement Type	Confidence Level ($k = 2$)	Calculated Uncertainty	U_{CISPR}	Correction
Radiated Emissions: Electric Field Strength 30MHz-1GHz	95%	+/- 6.8dB	4.5dB(<300MHz) 5.2dB(>300MHz)	+2.3dB(<300MHz) +1.6dB(>300MHz)
Radiated Emissions: Electric Field Strength 1GHz-26.5GHz	95%	+/- 7.3dB	Under consideration (5.2dB assumed)	+2.1dB
Radiated Emissions: Electric Field Strength 26.5-40GHz	95%	+/-7.6dB	Under consideration (5.2dB assumed)	+2.4dB

Note 1. All test equipment and antennae used for the tests described in this report have current traceable calibration to UKAS or equivalent standard.

Note 2. All reported measurements include the appropriate offsets for antenna factors, coupler and cable losses, etc.

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

Appendix A Test Equipment Used

Ref. No.	Device	Manufacturer	Model No.	Serial No.	Last Calibration
013	Dual PSU 0-30V @ 10A	TTI	CPX200	112718	-----***
696	Environmental Chamber			1941	Due Wk41/06
318	Peak Power Analyser	H-P	8991A	3248A00128	06/10/05
376	60V Power Supply	Farnell	AP60-50	1140	-----***
424	DVM	Fluke	83	63550394	05/11/05
-----	Analyser 0.1kHz -26.5GHz	H-P	70000 series	As below	-----*
425	Display Section	H-P	70004A	3040A01640	29/07/2005
426	I.F. Module	H-P	70902A	3206A03917	29/07/2005
427	I.F. Module	H-P	70903A	3331A02727	29/07/2005
428	L.O. Module	H-P	70900B	3345A01913	29/07/2005
429	External Mixer Interface	H-P	70907B	3533A00576	29/07/2005
430	Mainframe	H-P	70001A	3230A05180	29/07/2005
431	Digitizer Module	H-P	70700A	3716A01071	29/07/2005
432	Precision Freq. Reference	H-P	70310A	3127A02429	29/07/2005
433	RF Module	H-P	70909A	3136A00120	29/07/2005
434	Option 001 Preamplifier	H-P	70620B	3550A00850	29/07/2005
435	Receiver 9kHz-6.5GHz	H-P	8546A	3625A00329	27/10/2005
436	Filter Section	H-P	85460A	3448A00219	27/10/2005
1520	Microwave Sig. Gen. 0.01-40GHz	Rohde & Schwarz	SMR40	10-300074685	17/08/2005
440	PSU 3-15V 25A	Palstar	PS30M	92534722	18/06/2005
442	Antenna 0.09-30MHz	Schaffner	HLA6120	1122	06/01/2005*
479	Peak Power Sensor	H-P	84812A	3318A01050	04/10/2005
482	Antenna 18-26.5GHz	Credowan	20-R-2843-0007	36755	29/09/2005
483	Antenna 26.5-40GHz	Credowan	S.G. Horn	None	29/09/2005
789	Mixer 26.5-40GHz	Agilent	11970A	3003A08859	06/08/2003**
852	Antenna 1.0-18.0GHz	Schwarzbeck	BBHA9120D	128	29/03/2005
968	Antenna 30-300MHz	Schwarzbeck	VHBB9124	9124-285	06/08/2004
969	Antenna 0.3-2.0GHz	Emco	EM6946	112	06/08/2004
EM05	Microwave Cable	Agilent	5061-5458	EMC Cable 5	As Required
EM06	Microwave Cable	Agilent	5061-5458	EMC Cable 6	As Required
EM09	Microwave Cable	Agilent	5061-5458	EMC Cable 9	As Required
EM20	Low-loss RF cable 1.6m	Andrew	243290	EMC Cable 20	As Required
EM21	Low-loss RF cable 1.6m	Andrew	243290	EMC Cable 21	As Required
EM22	Low-loss RF cable 3m	Andrew	A06Y-75513	EMC Cable 22	As Required
RD14	Microwave Coupler	Flann	16270-40-23	116317	As Required
RD21	Inline Attenuator 10dB	Narda	4779-10	8	As Required
RD24	Inline Attenuator 20dB	Narda	4779-20	5	As Required
RD25	Inline Attenuator 20dB	Unknown	R411820	6	As Required
RD27	Inline Attenuator 10dB	Unknown	R411810	7	As Required
RD30	Inline Attenuator 50dB	Narda	4779-50	4	As Required
RD37	Rotary w/g to WG16 Adaptor	Raymarine	LAB5S-7SR	05	As Required
RD40	WG16 to N Adaptor	Flann	16094-NF10	100	As Required
RD42	WG16 to N Adaptor	Mitec Europe	M0926-7-11	3711-2	As Required
RD50	Microwave Power Load	CMT	MPT90-1A	942117-003	Uncalibrated

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

Test Equipment Used (continued)

Notes:

- * 2 year calibration cycle in accordance with manufacturer's recommendations.
- ** 3 year calibration cycle in accordance with manufacturer's recommendations.
- *** Voltage monitored using Item 424

All test equipment, except cables, wave guide components and attenuators, are on a calibration cycle in accordance with UKAS requirements. Items marked calibration as required are calibrated during the test setup using the R&S microwave signal generator in conjunction with the H-P analyzer.

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

Appendix B Measurement Methods.

B.1 Calculating Emissions Limit Lines

For both radiated emissions and conducted spurious emissions from the antenna port, with an Assigned Frequency of 9410MHz (Authorised Band 9310 - 9510MHz), the limits close to the magnetron frequency are:

Over the ranges 9210 - 9310MHz and 9510 - 9610MHz: -25dBc

Over the ranges 8910 - 9210MHz and 9610 - 9910MHz: -35dBc

To establish the radiated emissions limit for the product on frequencies outside the range 8910 - 9910MHz, the EUT was placed on the test site with the measuring equipment located at a distance of three metres.

The magnetron was disconnected and replaced with a WG16 to N-type coaxial connector adaptor, which was connected to a signal generator with an unmodulated output at 9.4GHz. The rotating joint was connected, via an adaptor and attenuator, to a power meter and sensor.

The signal generator was unable to reproduce the actual peak power output of the intentional radiator – measured as 2.04kW by conducted methods. Consequently, a level of 2.04mW was reproduced at the antenna port, requiring a factor of +60dB to be applied at the analyser.

The rotating joint adaptor, attenuator and power measurement equipment were removed and replaced with the 18 inch Flare antenna. The antenna was aligned with the horn antenna connected to the spectrum analyser and adjusted to peak the analyser response. A reading of 178.9dBuV/m was obtained.

The calculation for the radiated emissions limit line is:

$$178.9 - 43 - 10\log_{10} 1.4 = \mathbf{134.4 \text{ dBuV/m}}$$

For conducted spurious emissions from the antenna port, the calculation to establish the limit line for frequencies outside the range 8910 - 9910MHz is:

$Po(\text{peak})\text{dBm} - 43 - 10\log_{10} P(\text{mean})\text{watts}$,

$$\text{i.e., } 63.03 - 43 - 10\log_{10} 1.4 = \mathbf{18.57\text{dBm}}$$

B.2 Radiated Emissions (9 kHz to 2 GHz)

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for a Peak detector.

All testing was carried out within a semi-anechoic chamber at a distance of 3m. For all tests, the open array antenna was replaced with a rotating microwave load.

Measurements were split into five subranges to accommodate receiver bandwidth and antenna changes. Over each range, the same measurement procedure was used. The antenna was initially set to a height of 1.5m. The receiver was set to step through the appropriate frequency range in "Peak and Hold" mode, with the antenna firstly in vertical polarisation and then in horizontal polarisation. The EUT was then rotated clockwise through 90 degrees, then 180 degrees and finally 270 degrees, with the measurement process repeated at each 90 degree point, thus building up a profile of peak emissions. Emissions of

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

significance were noted. For each of these emissions, the antenna polarisation was changed to give the higher reading; the turntable was then rotated through 360 degrees to find the area of the EUT radiating the highest level and, for frequencies above 30MHz, the antenna height was then varied between 1 and 4m above the ground plane to further maximise the signal before remeasurement.

Measurements above 30MHz were performed using broadband antennas. Below 30MHz, a magnetic loop antenna was used.

B.3 Radiated Emissions 2 GHz to 6.5 GHz

Radiated emissions measurements were performed using a horn antenna, against appropriate limits for a Peak detector.

All testing was carried out within a semi-anechoic chamber at a distance of 3m. The conducting ground plane between the antenna and the EUT was covered with ferrite and pyramidal absorbing material. For all tests, the open array antenna was replaced with a rotating microwave load.

The horn antenna was set to a height of 1.5m. The analyser was set to sweep through the appropriate frequency range in "Max Hold" mode, with the antenna firstly in vertical polarisation and then in horizontal polarisation. The EUT was then rotated clockwise through 90 degrees, then 180 degrees and finally 270 degrees, with the measurement process repeated at each 90 degree point, thus building up a profile of peak emissions. Emissions of significance were noted. For each of these emissions, the antenna polarisation was changed to give the higher reading; the turntable was then rotated through 360 degrees to find the area of the EUT radiating the highest level.

B.4 Radiated Emissions 6.5 GHz to 40 GHz

Radiated emissions measurements were performed against appropriate limits for a Peak detector. All measurements were carried out using horn antennas.

All testing was carried out within a semi-anechoic chamber at a distance of 3m. The conducting ground plane between the antenna and the EUT was covered with ferrite and pyramidal absorbing material. For all tests, the open array antenna was replaced with a rotating microwave load.

Measurements were split into subranges to accommodate antenna and mixer changes. Over each range, the same measurement procedure was used. The antenna was set to a height of 1.5m. The analyser was set to sweep through the appropriate frequency range in "Max Hold" mode, with the antenna in vertical polarisation. The EUT was slowly rotated clockwise through 360 degrees and then back to 000 degrees, thus building up a profile of peak emissions. The antenna was then changed to horizontal polarisation and the process continued. Emissions of significance were noted. For each of these emissions, the antenna polarisation was changed to give the higher reading; the turntable was then rotated to find the area of the EUT radiating the highest level. Measurements within 20dB of the limit line were recorded.

**Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998**


Issue Date: 13th February, 2006

Appendix C Test Configuration Drawings

The scanner and display unit were arranged in as near a representative configuration as was practicable. The display unit, interface leads and excess scanner interconnection cable were placed upon a non-conducting support on the turntable such that the surface of the support was 0.8m above the ground plane. For tests below 2GHz, the scanner unit was placed centrally above the display unit on a non-conducting support 0.38m high. Above 1GHz, this support was increased to 0.5m, aligning the magnetron and circulator assembly height with the receiving horn antenna. The power lead was connected to a 12V power supply placed on the turntable; the screen of this cable was connected to the ground plane. The Seataalk, HSB and NMEA Out cables, were bundled with 0.4m loops and placed around the display unit. The scanner interconnection cable was coiled around the scanner support. Due to its size and construction, this cable cannot be bundled in the same manner as the other cables.

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998


C.1 Connection diagram

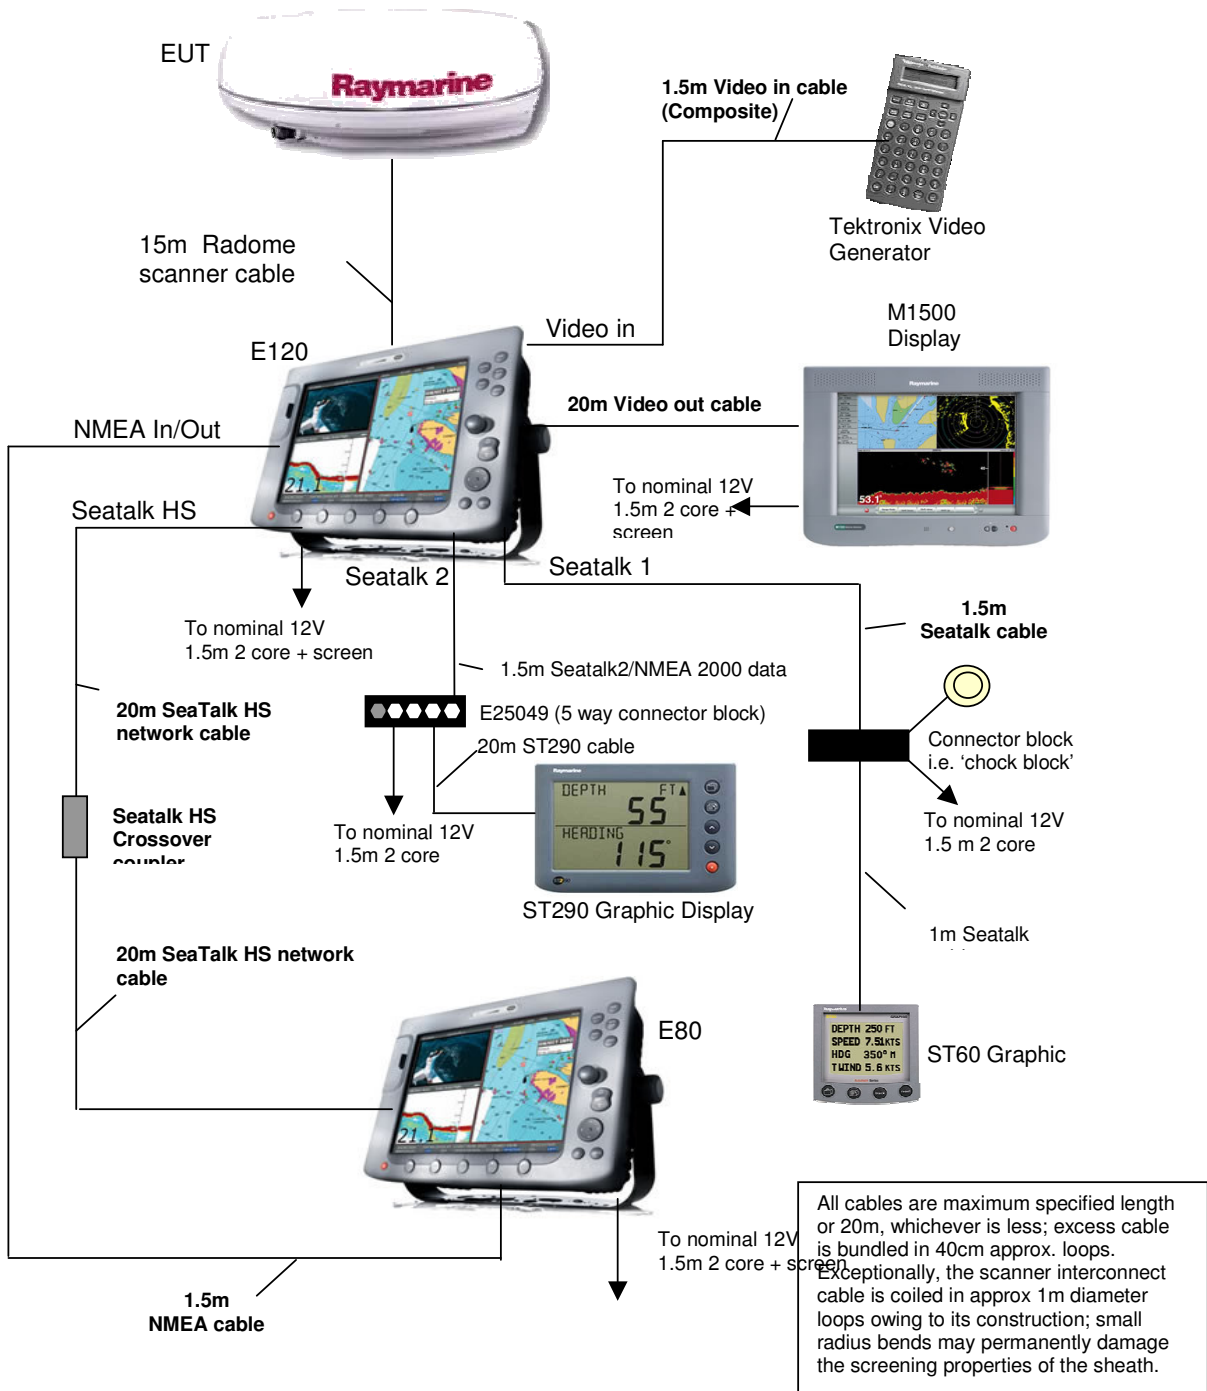

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006


C.2 Radiated Emissions Setup – General Arrangement

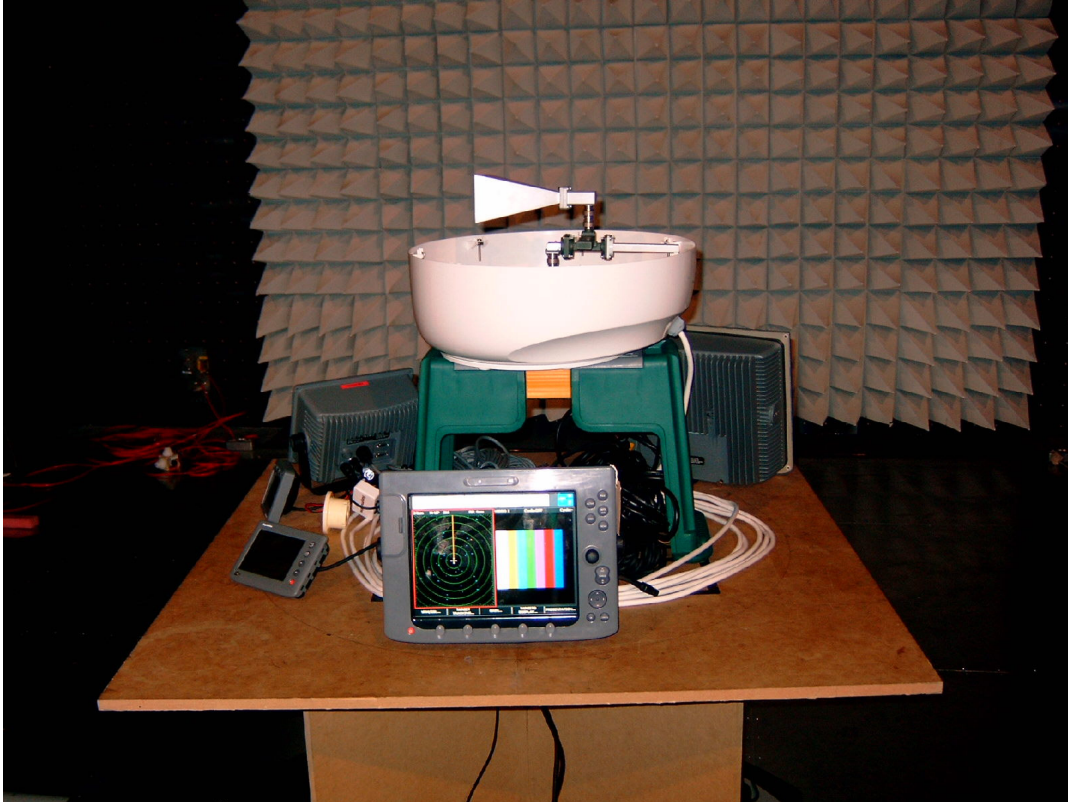


Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

C.3 Radiated Emissions 9 kHz to 2 GHz – General Arrangement

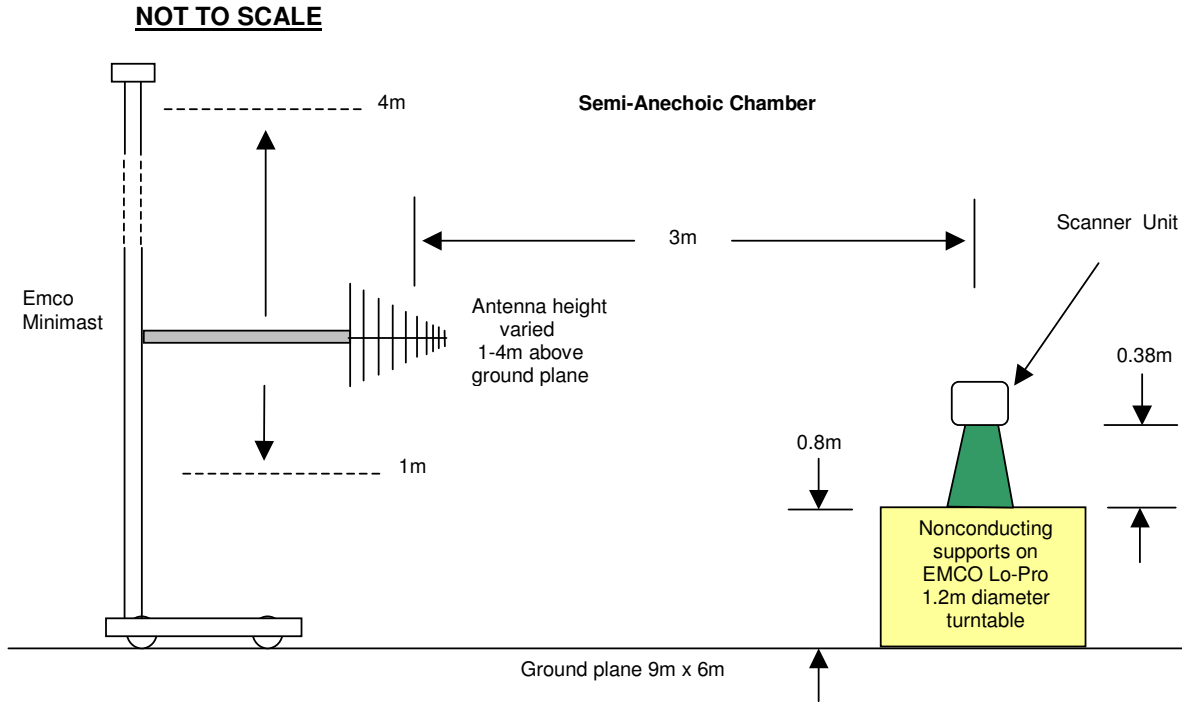

C.4 Radiated Emissions 2GHz to 40 GHz – General Arrangement

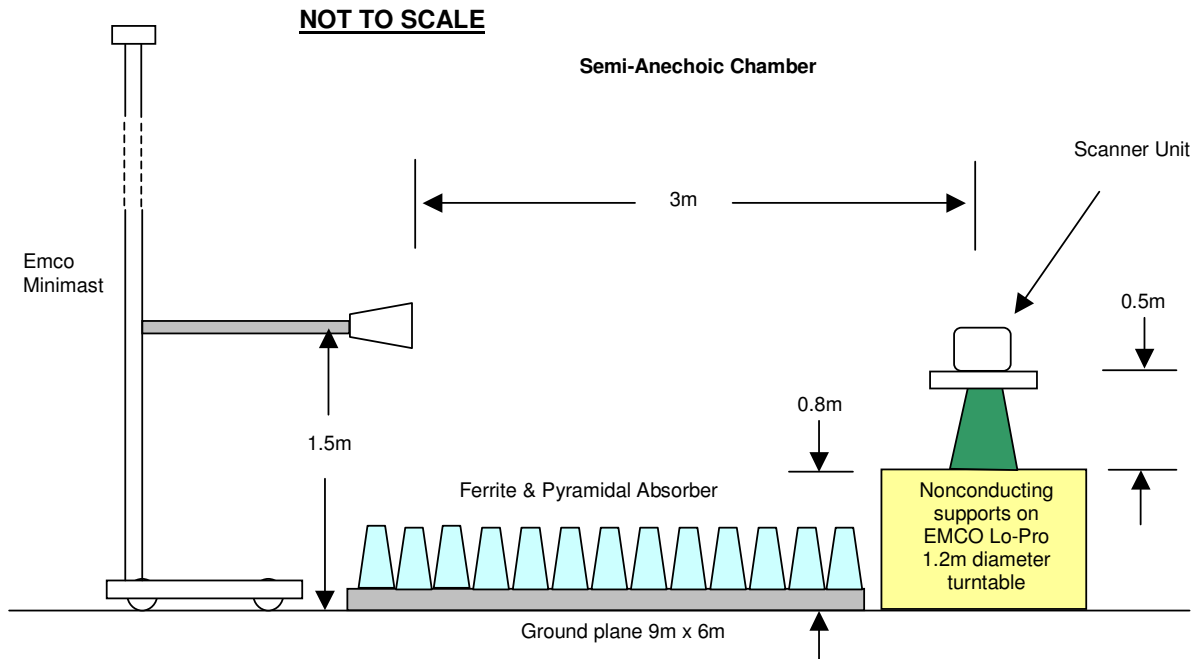

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

Appendix D Graphical Test Results

Figure 1 Radiated Emissions 9kHz to 150kHz Loop Face on	31
Figure 2 Radiated Emissions 9kHz to 150kHz Loop Side on.....	31
Figure 3 Radiated Emissions 150kHz to 30MHz Loop Side on	32
Figure 4 Radiated Emissions 150kHz to 30MHz Loop Face on.....	32
Figure 5 Radiated Emissions 30MHz to 300MHz.....	33
Figure 6 Radiated Emissions 300MHz to 1GHz.....	33
Figure 7 Radiated Emissions 1GHz to 2GHz	34
Figure 8 Radiated Emissions 450ns Pulse width 2GHz to 8GHz.....	35
Figure 9 Radiated Emissions 450ns Pulse width 8GHz to 13GHz.....	35
Figure 10 Radiated Emissions 450ns Pulse width 13GHz to 18GHz.....	36
Figure 11 Radiated Emissions 450ns Pulse width 18GHz to 22GHz.....	36
Figure 12 Radiated Emissions 450ns Pulse width 22GHz to 26GHz.....	37
Figure 13 Radiated Emissions 450ns Pulse width 26GHz to 32GHz.....	37
Figure 14 Radiated Emissions 450ns Pulse width 32GHz to 40GHz.....	38
Figure 15 Main Pulse Measurement Short Pulse (Antenna Not fitted)	38
Figure 16 Conducted Emissions 450ns Pulse 6GHz to 8GHz	39
Figure 17 Conducted Emissions 450ns Pulse 8GHz to 13GHz	40
Figure 18 Conducted Emissions 450ns Pulse 13GHz to 18GHz	41
Figure 19 Conducted Emissions 450ns Pulse 18GHz to 22GHz	42
Figure 20 Conducted Emissions 450ns Pulse 22GHz to 26.5GHz	43
Figure 21 Conducted Emissions 450ns Pulse 26.5GHz to 32GHz	44
Figure 22 Conducted Emissions 450ns Pulse 32GHz to 40GHz	44
Figure 23 Main Pulse Measurement 450ns Pulse.....	45
Figure 24 Pulse Characterisation 75ns	46
Figure 25 Pulse Characterisation 100ns	46
Figure 26 Pulse Characterisation 150ns	47
Figure 27 Pulse Characterisation 250ns	47
Figure 28 Pulse Characterisation 350ns	48
Figure 29 Pulse Characterisation 450ns	48
Figure 30 Pulse Characterisation 600ns	49
Figure 31 Pulse Characterisation 1000ns	49
Figure 32 Occupied Bandwidth 75ns Pulse	50
Figure 33 Occupied Bandwidth 100ns Pulse	51
Figure 34 Occupied Bandwidth 150ns Pulse	52
Figure 35 Occupied Bandwidth 250ns Pulse	53
Figure 36 Occupied Bandwidth 350ns Pulse	54
Figure 37 Occupied Bandwidth 450ns Pulse	55
Figure 38 Occupied Bandwidth 600ns Pulse	56
Figure 39 Occupied Bandwidth 1000ns Pulse	57

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

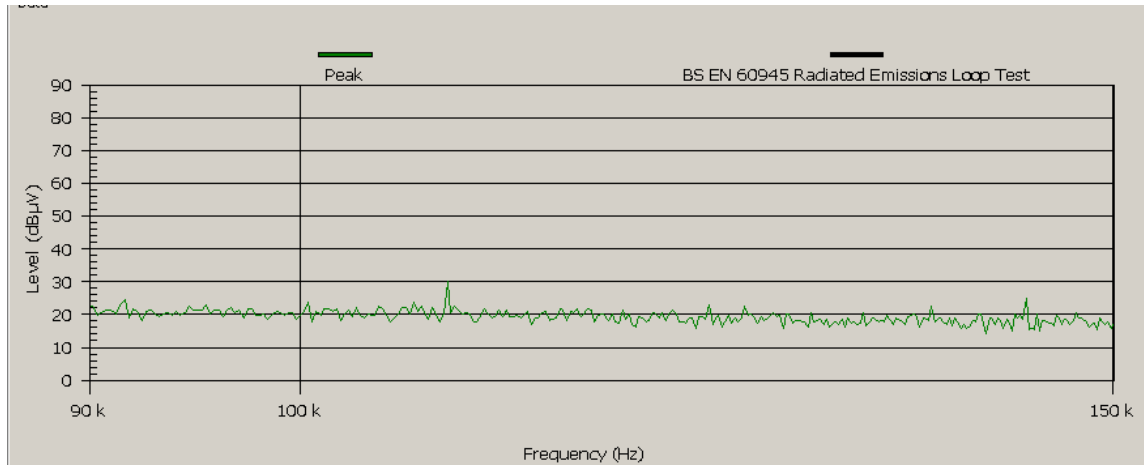


Figure 1 Radiated Emissions 9kHz to 150kHz Loop Face on

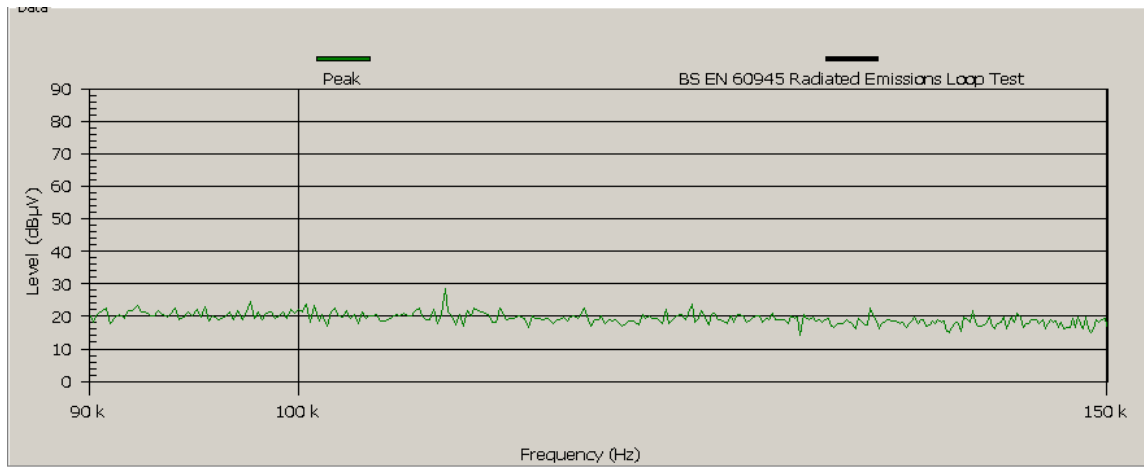


Figure 2 Radiated Emissions 9kHz to 150kHz Loop Side on

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

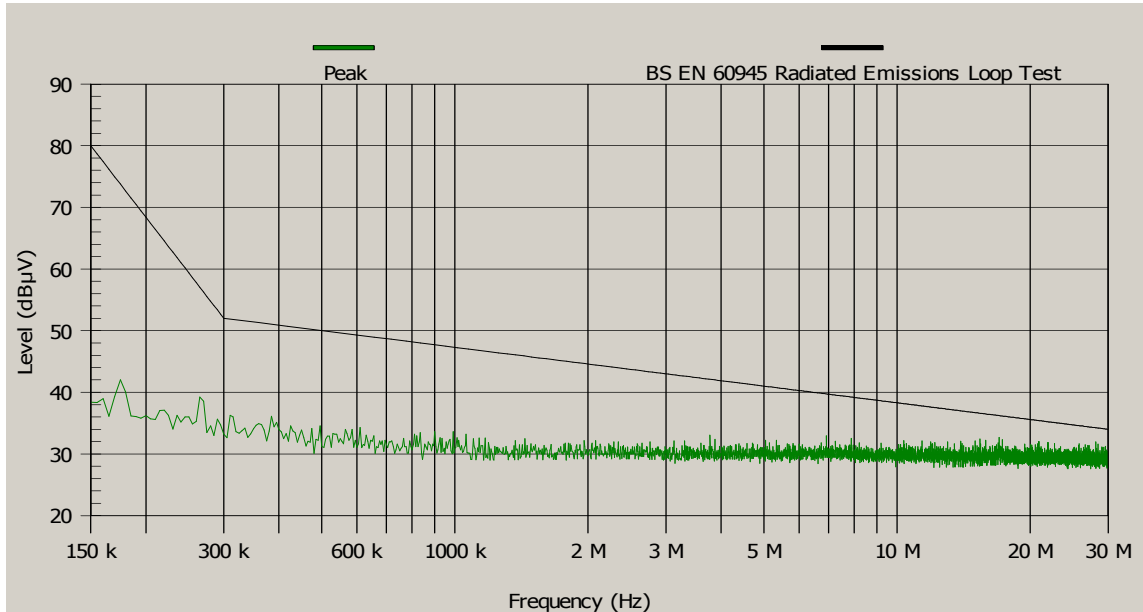


Figure 3 Radiated Emissions 150kHz to 30MHz Loop Side on

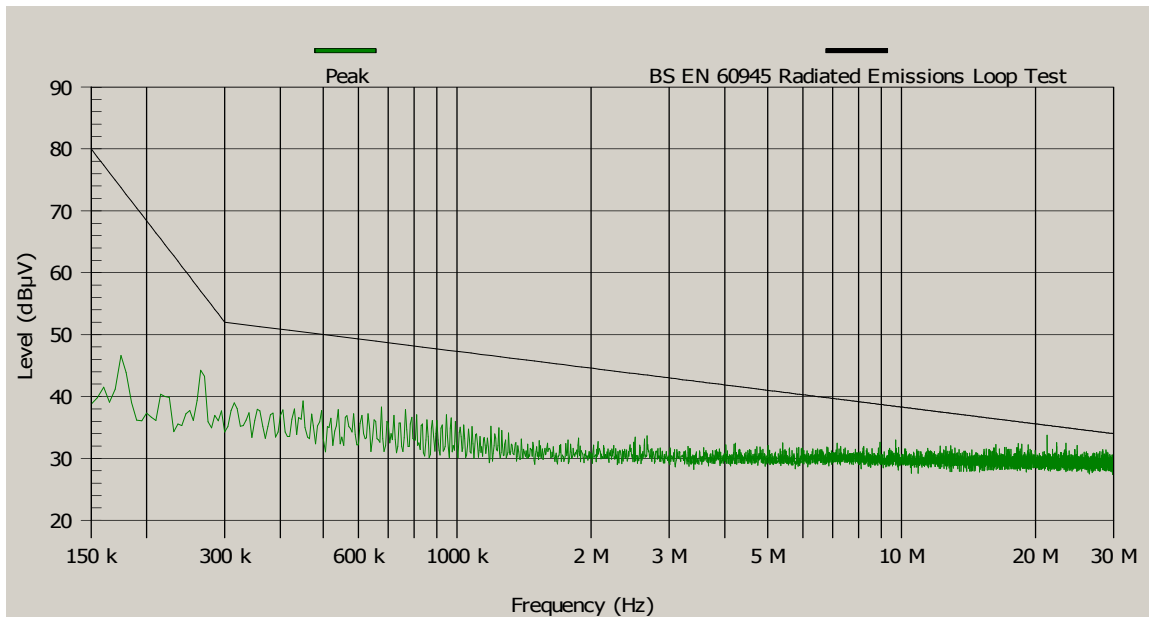


Figure 4 Radiated Emissions 150kHz to 30MHz Loop Face on

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

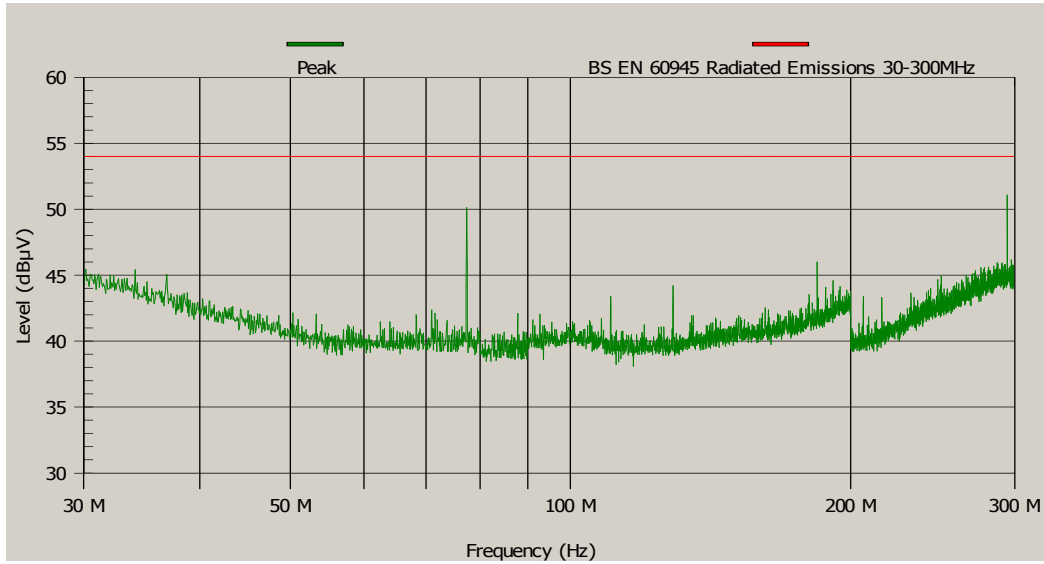


Figure 5 Radiated Emissions 30MHz to 300MHz

Note : Limit is 134.4 dBuV/m

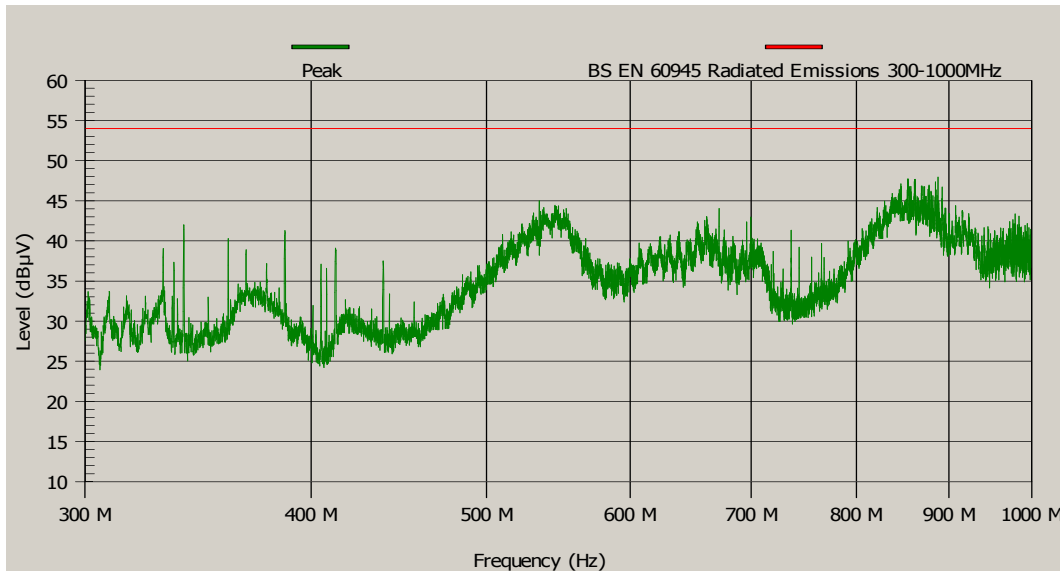


Figure 6 Radiated Emissions 300MHz to 1GHz

Note : Limit is 134.4 dBuV/m

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

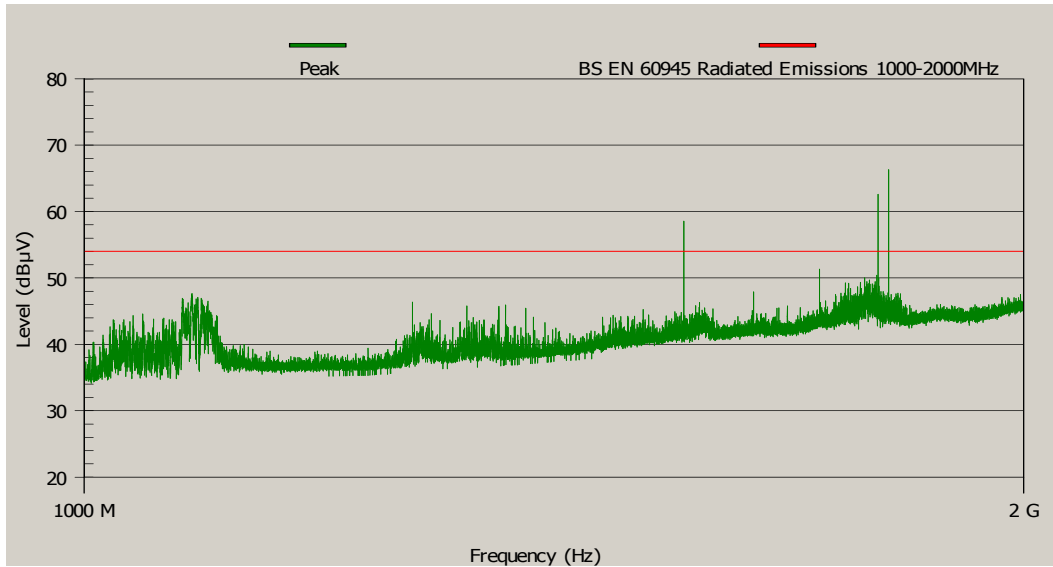


Figure 7 Radiated Emissions 1GHz to 2GHz
Note : Limit is 134.4 dBµV/m

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

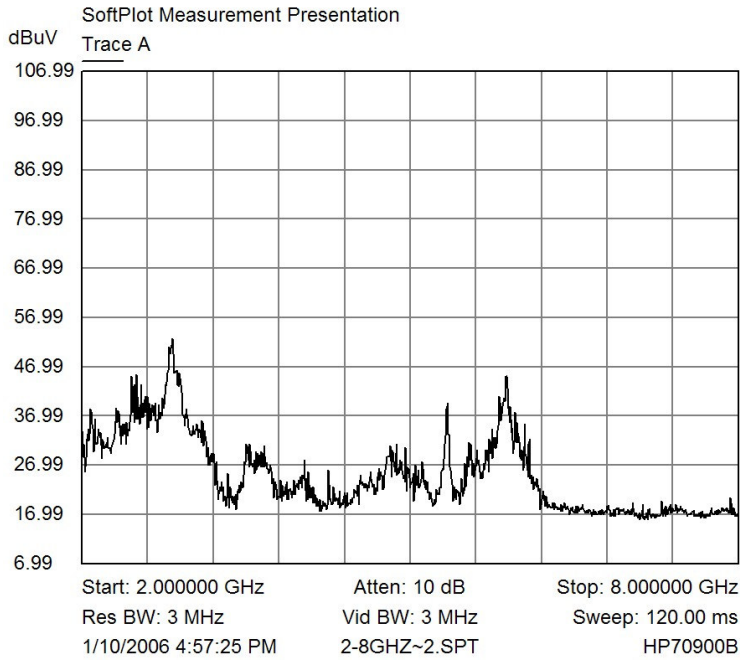


Figure 8 Radiated Emissions 450ns Pulse width 2GHz to 8GHz

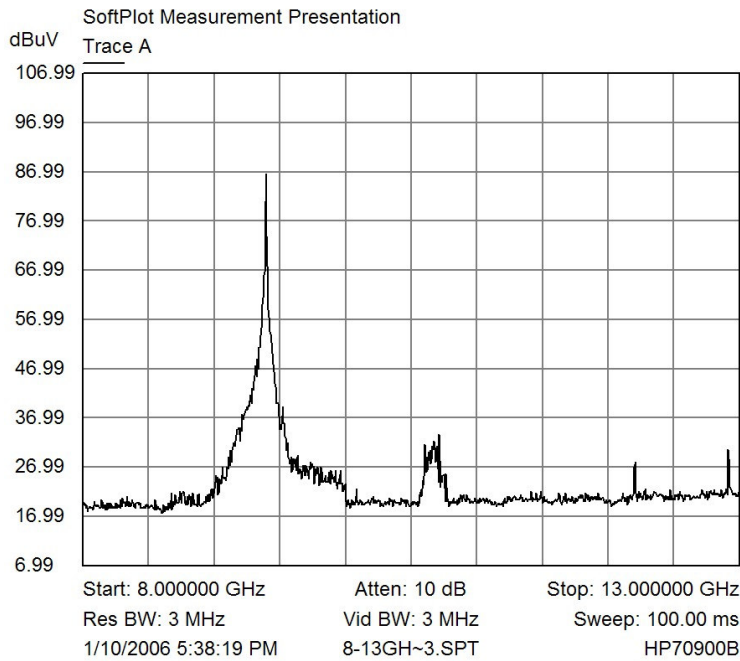


Figure 9 Radiated Emissions 450ns Pulse width 8GHz to 13GHz

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

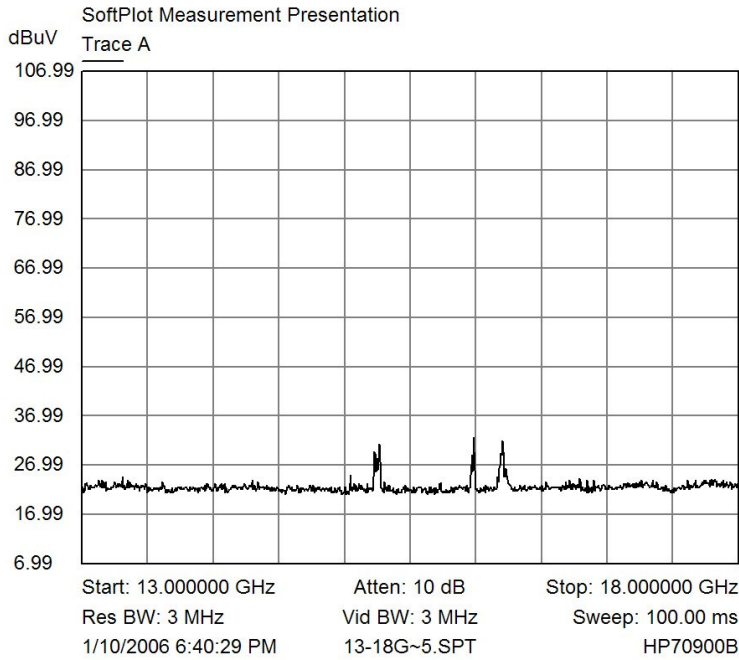


Figure 10 Radiated Emissions 450ns Pulse width 13GHz to 18GHz

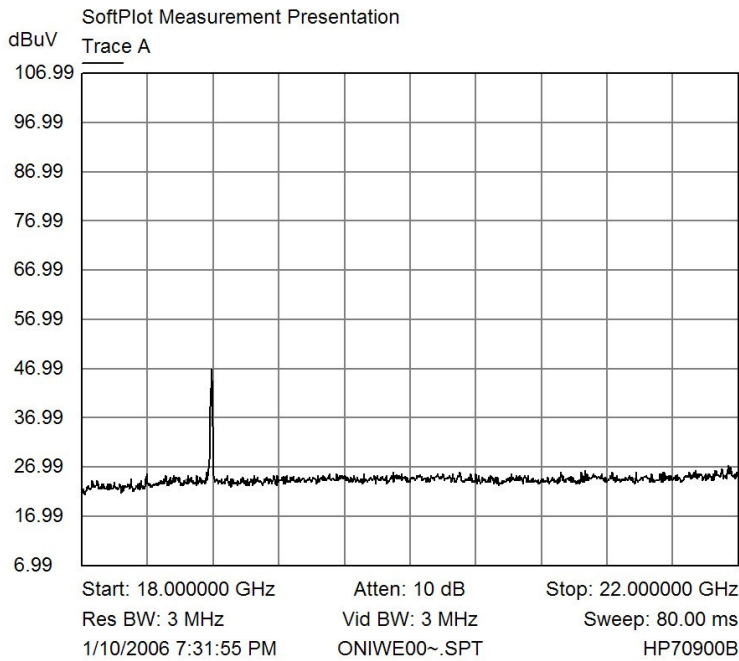


Figure 11 Radiated Emissions 450ns Pulse width 18GHz to 22GHz

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

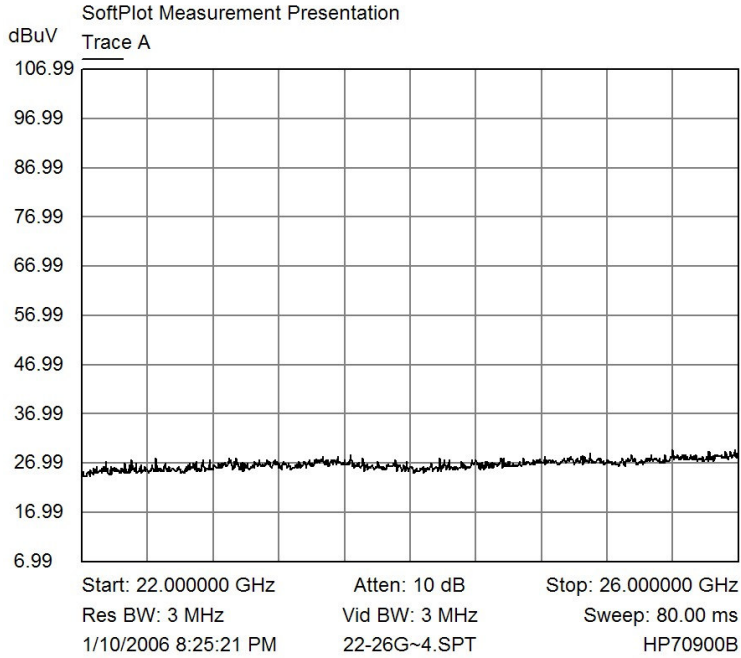


Figure 12 Radiated Emissions 450ns Pulse width 22GHz to 26GHz

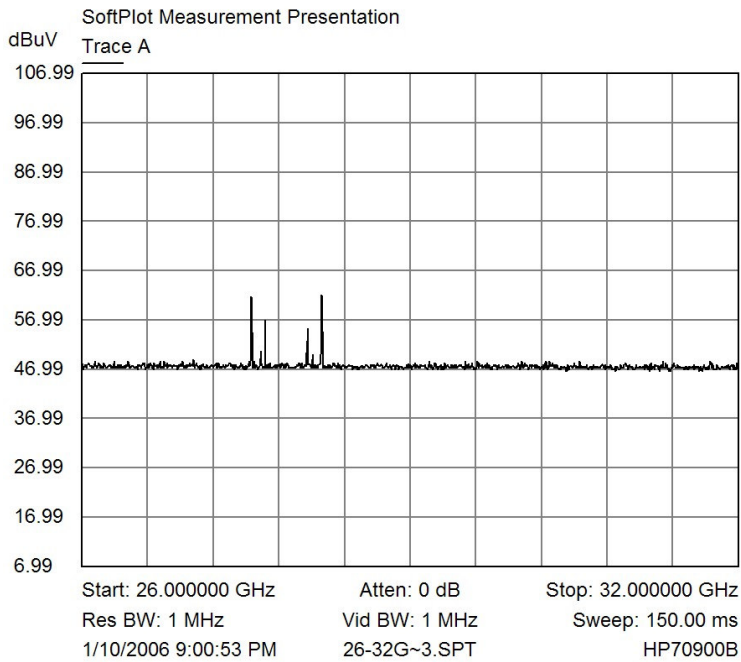


Figure 13 Radiated Emissions 450ns Pulse width 26GHz to 32GHz

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

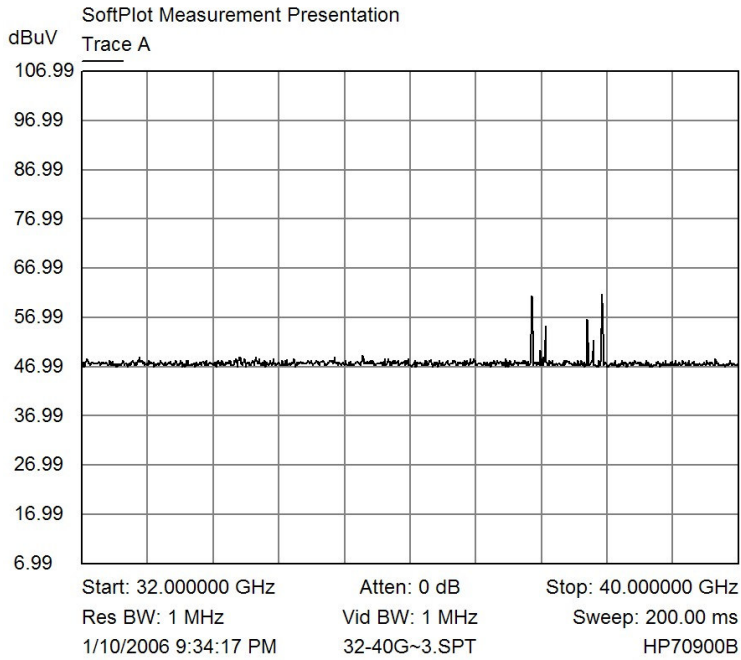


Figure 14 Radiated Emissions 450ns Pulse width 32GHz to 40GHz


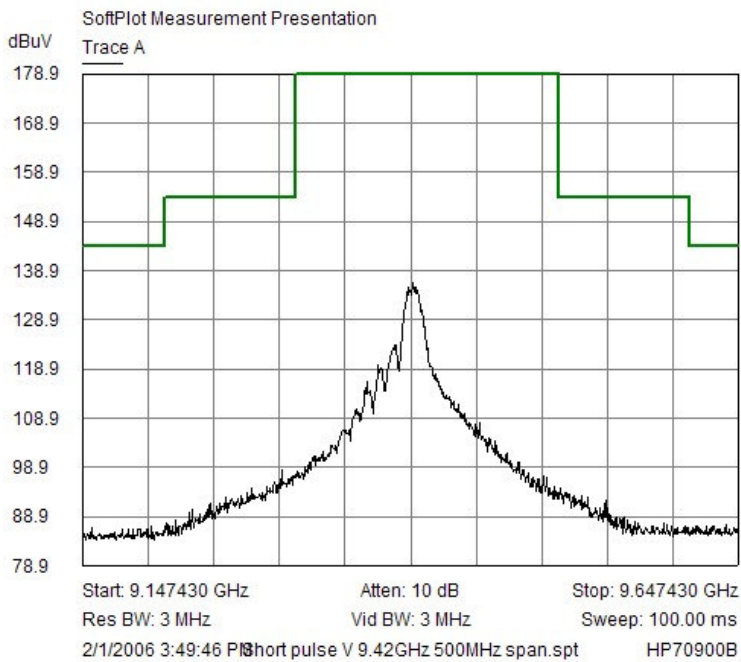


Figure 15 Main Pulse Measurement Short Pulse (Antenna Not fitted)

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

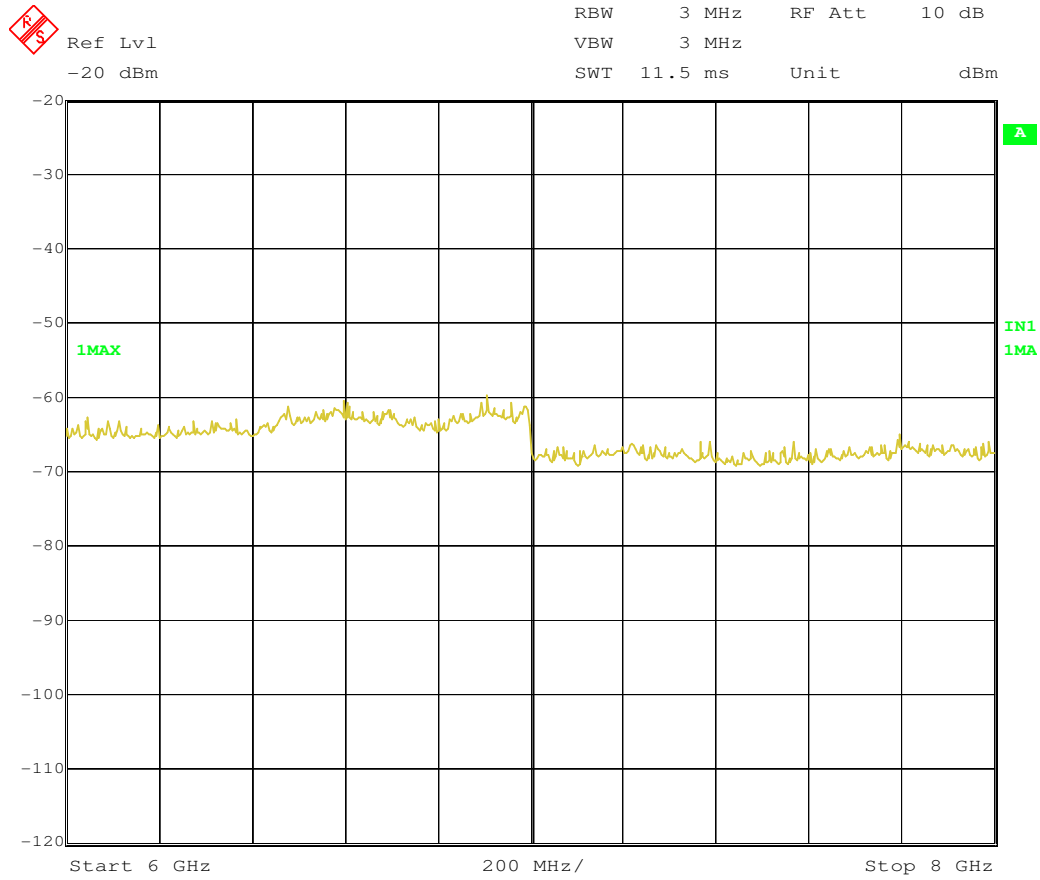


Date: 24.JAN.2006 21:56:12

Figure 16 Conducted Emissions 450ns Pulse 6GHz to 8GHz

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

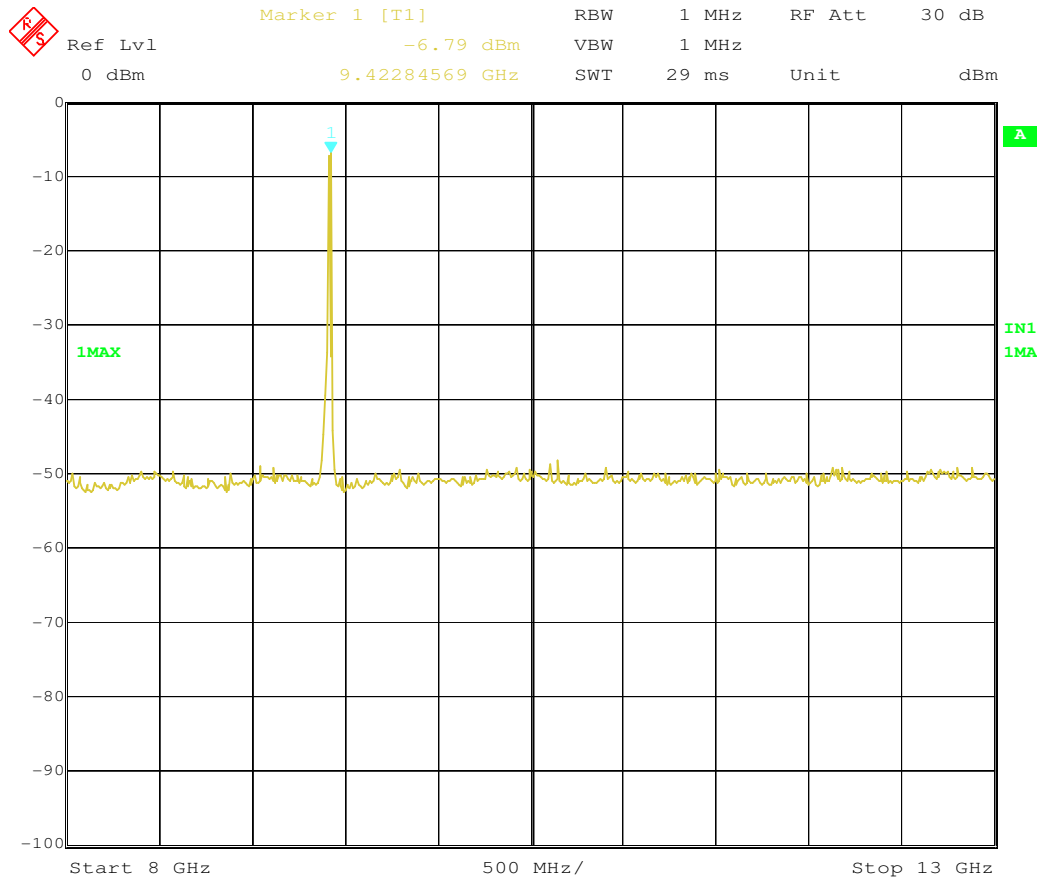


Date: 26.JAN.2006 08:02:30

Figure 17 Conducted Emissions 450ns Pulse 8GHz to 13GHz

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

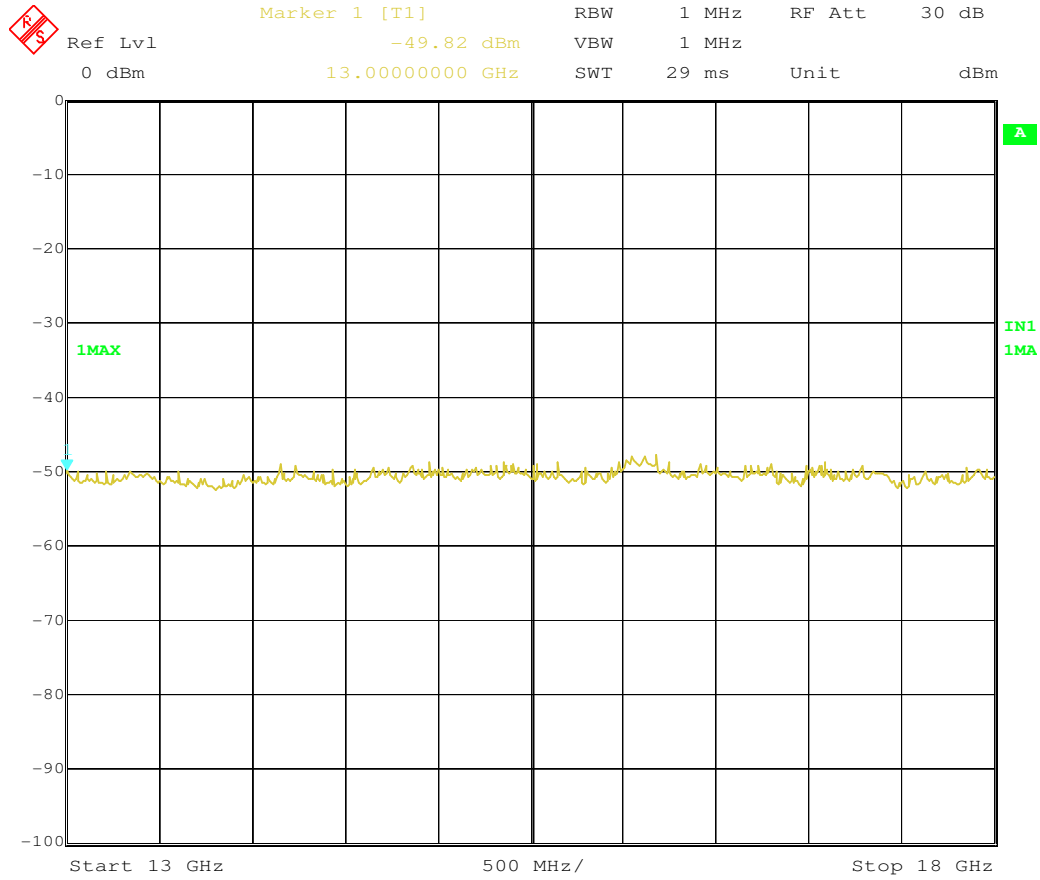


Date: 26.JAN.2006 08:55:54

Figure 18 Conducted Emissions 450ns Pulse 13GHz to 18GHz

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998


Issue Date: 13th February, 2006

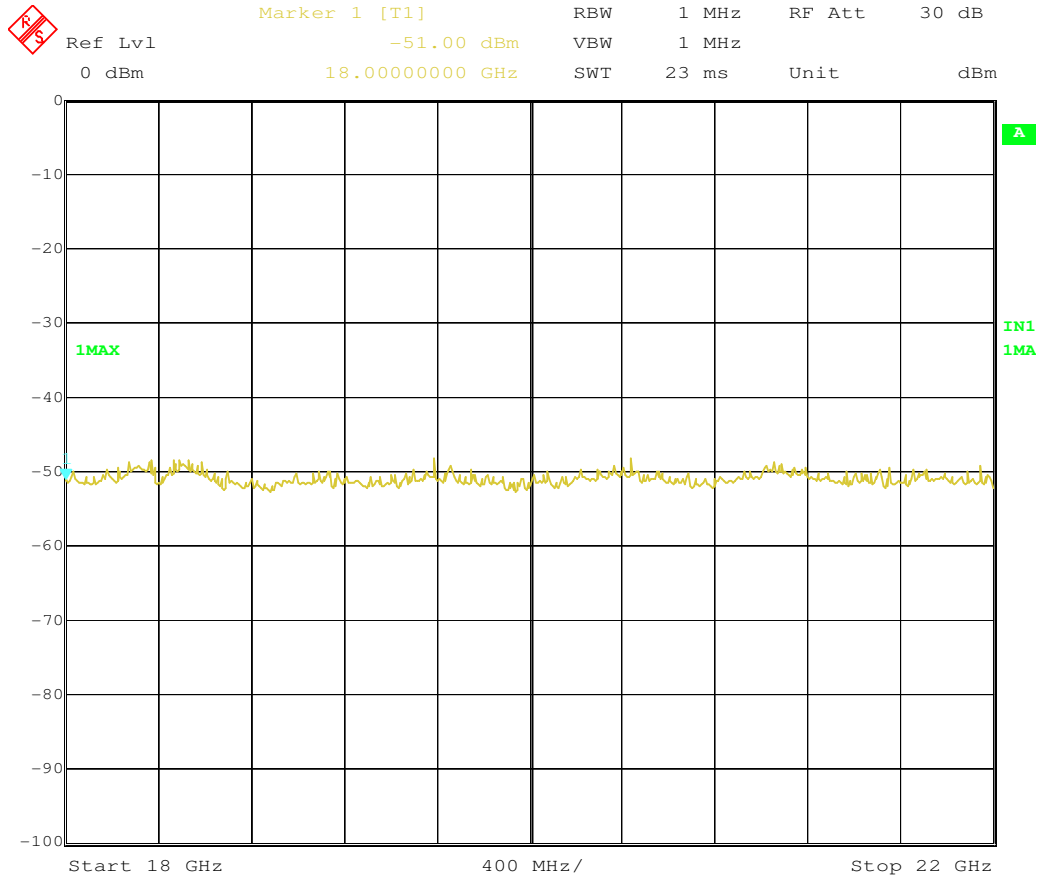

Date: 26.JAN.2006 08:57:52
Figure 19 Conducted Emissions 450ns Pulse 18GHz to 22GHz

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

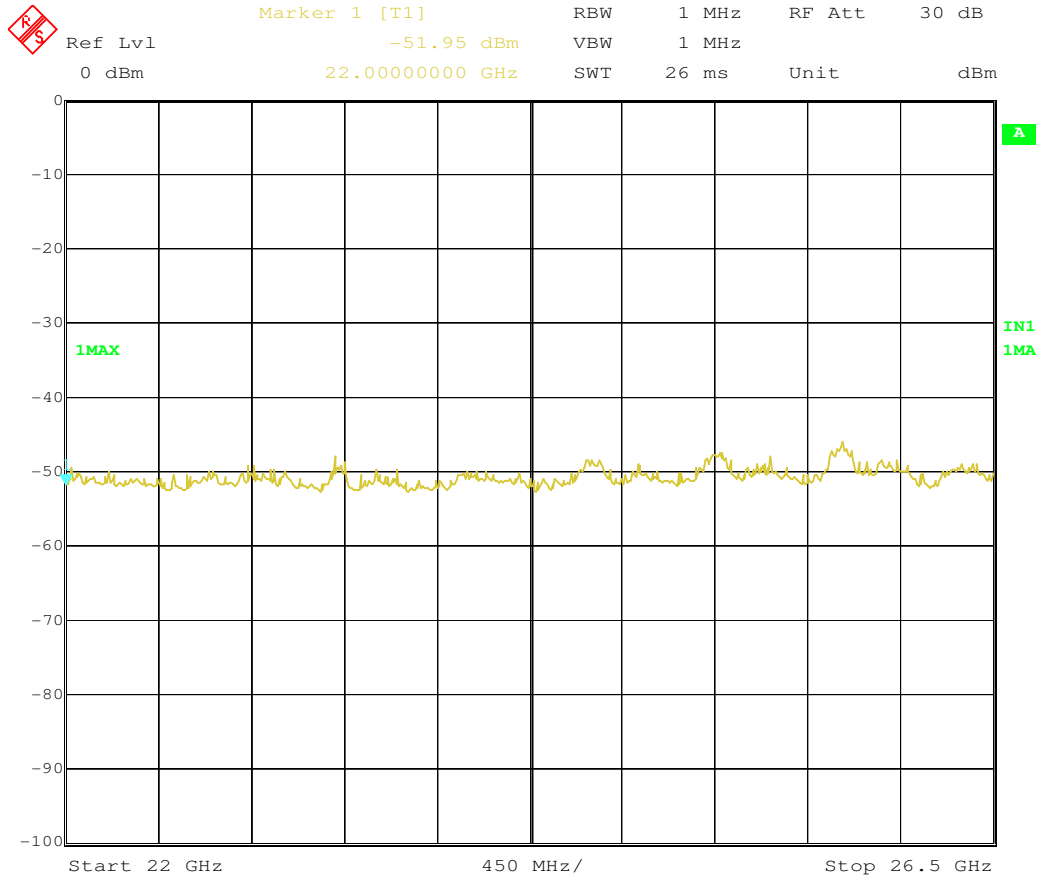

Date: 26.JAN.2006 09:12:31

Figure 20 Conducted Emissions 450ns Pulse 22GHz to 26.5GHz

Test of: Raymarine Ltd.
RD218 Analog 2KW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

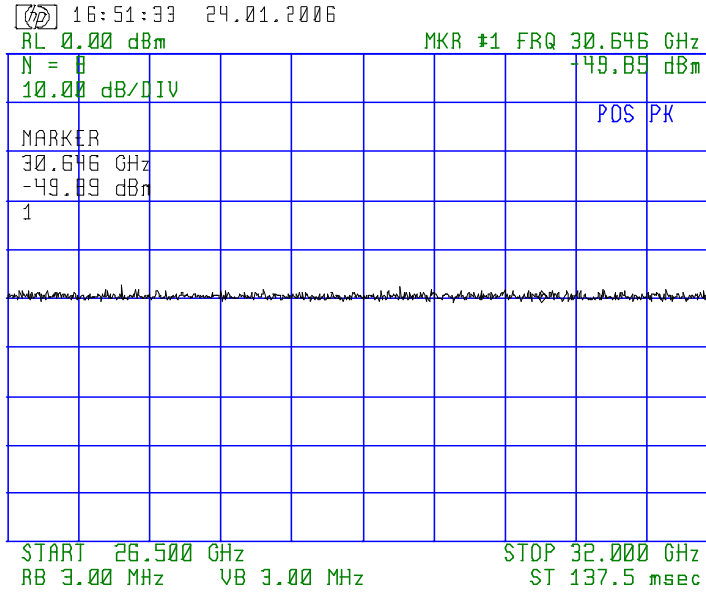


Figure 21 Conducted Emissions 450ns Pulse 26.5GHz to 32GHz


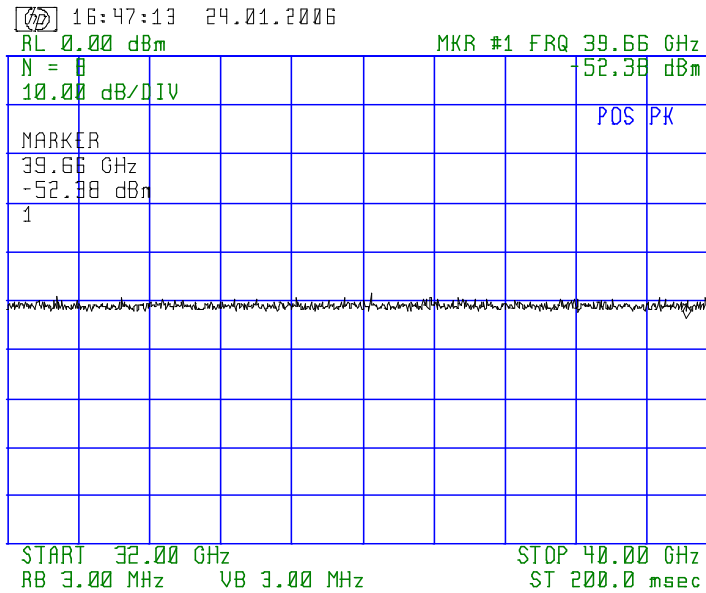


Figure 22 Conducted Emissions 450ns Pulse 32GHz to 40GHz

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

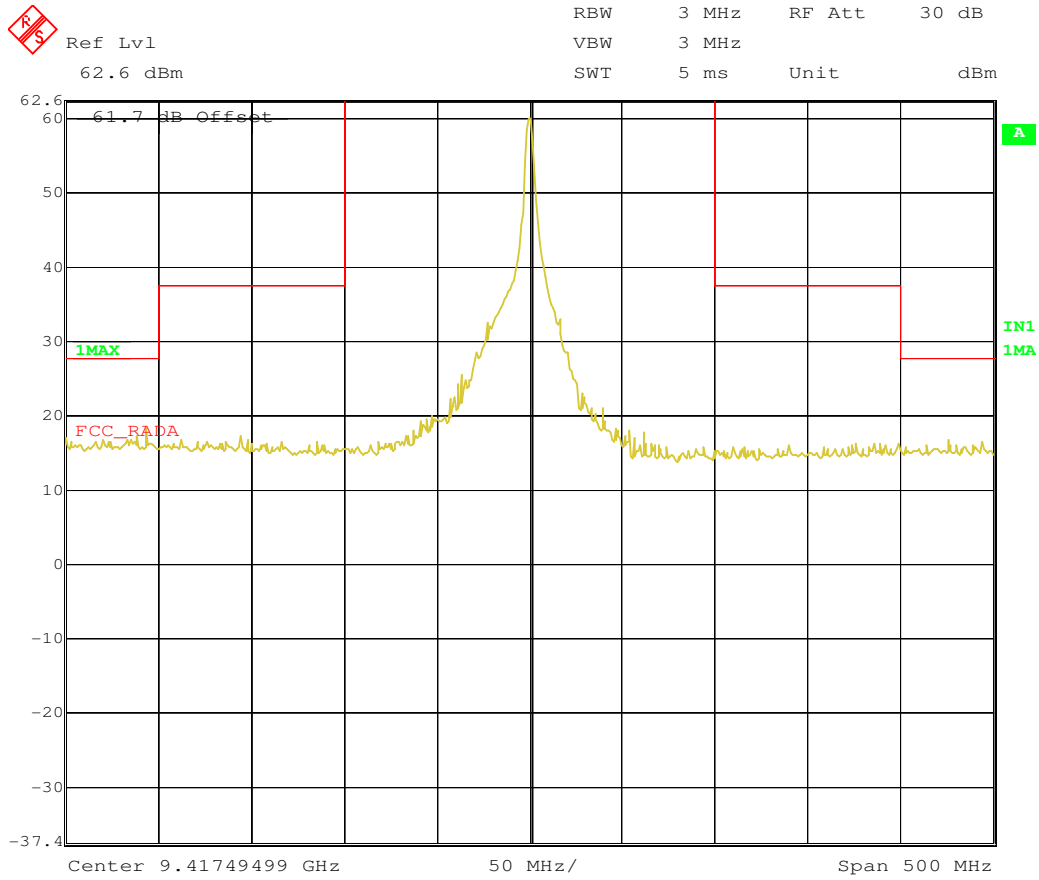

Date: 26.JAN.2006 10:14:55
Figure 23 Main Pulse Measurement 450ns Pulse

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

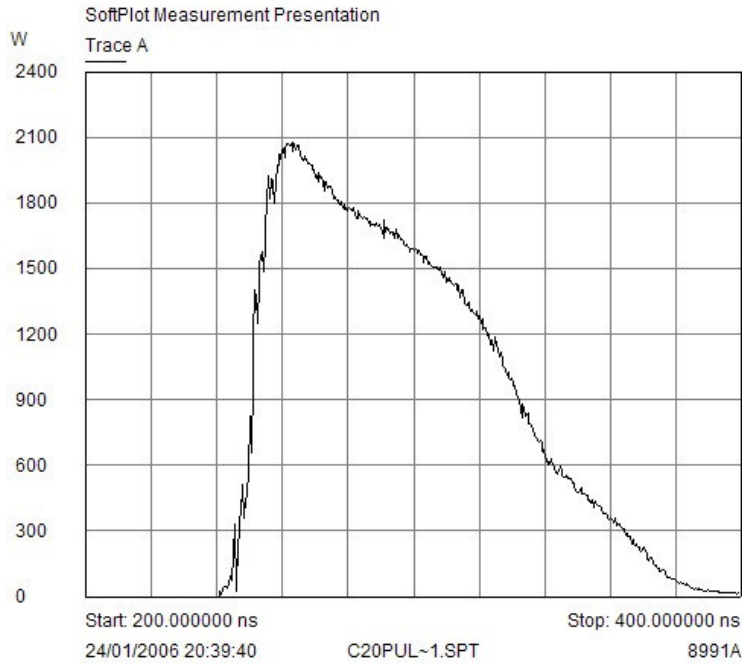


Figure 24 Pulse Characterisation 75ns

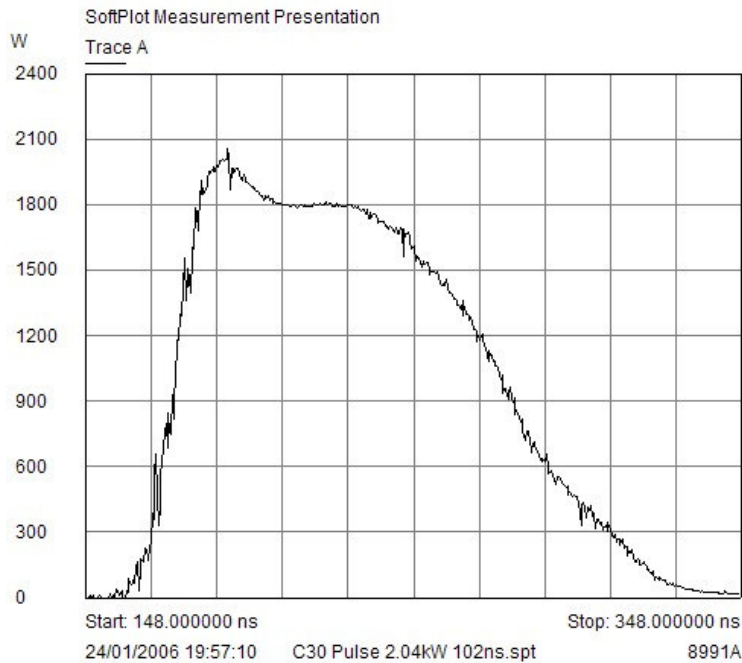


Figure 25 Pulse Characterisation 100ns

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

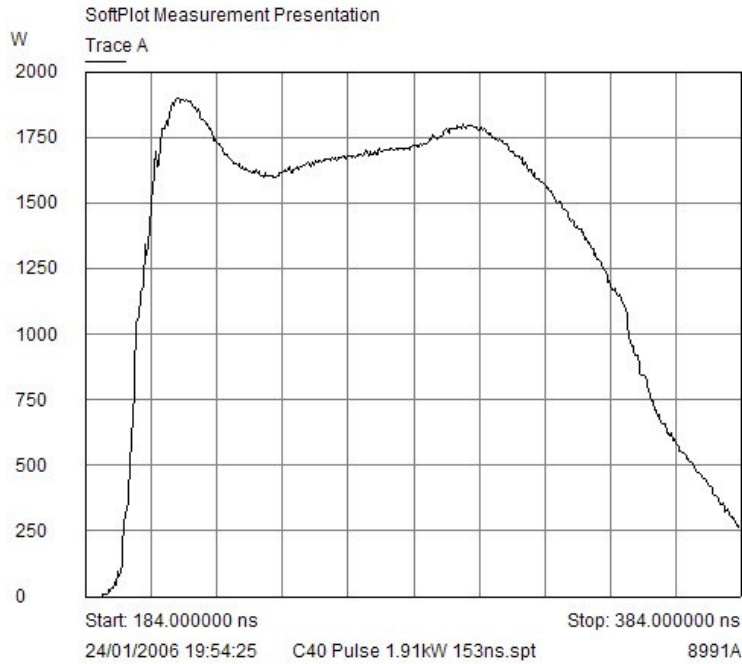


Figure 26 Pulse Characterisation 150ns

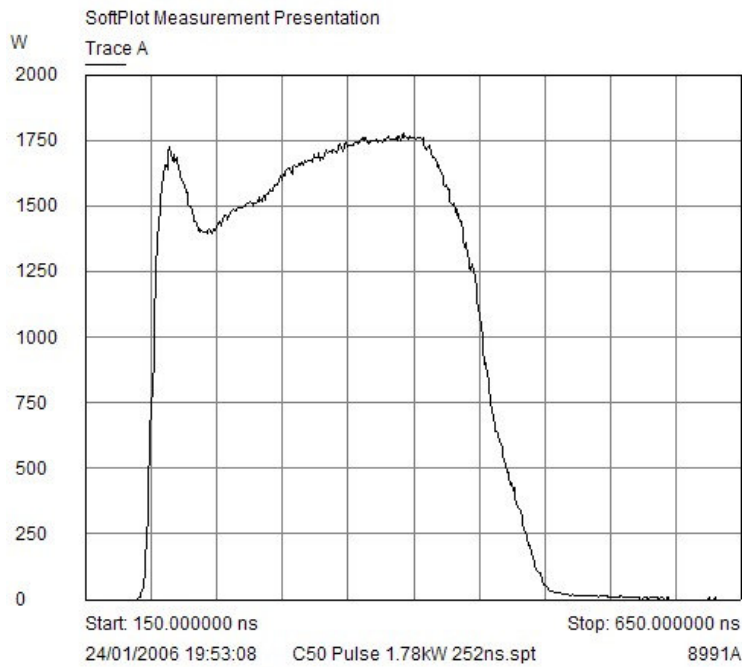


Figure 27 Pulse Characterisation 250ns

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

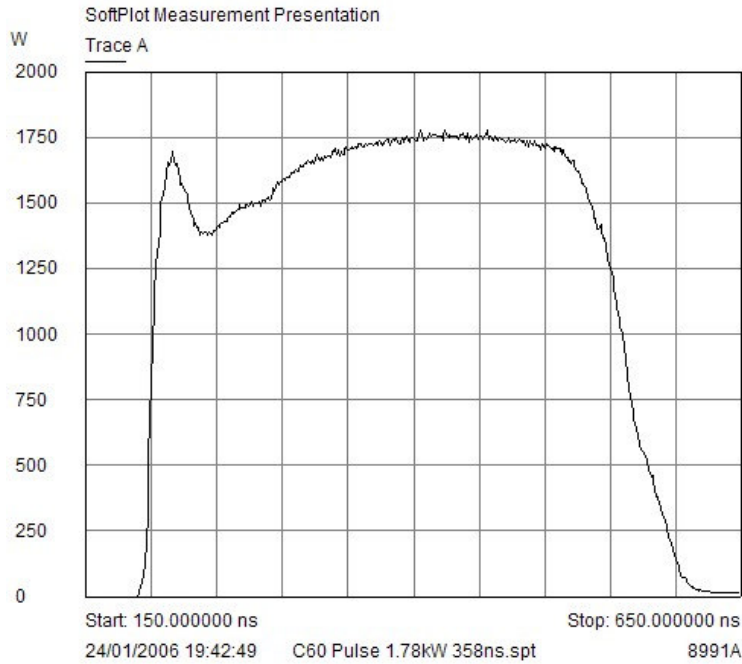


Figure 28 Pulse Characterisation 350ns

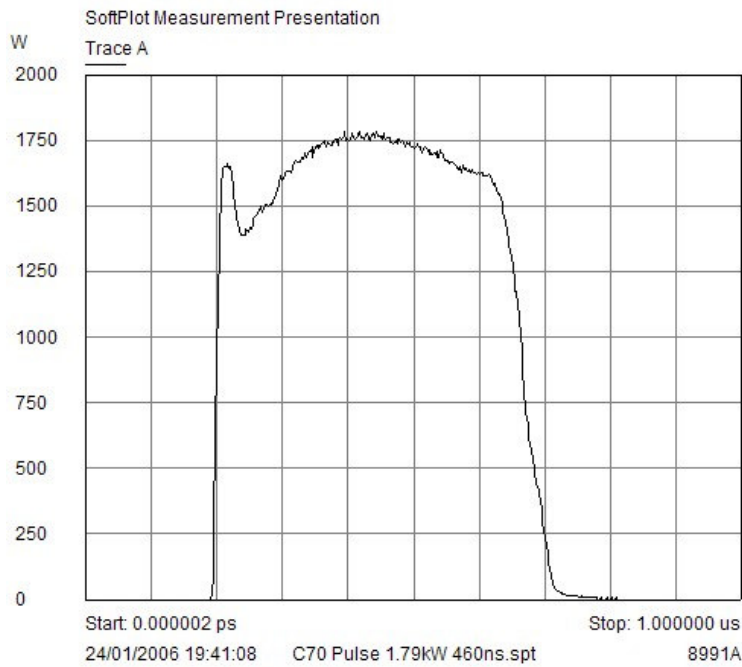


Figure 29 Pulse Characterisation 450ns

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

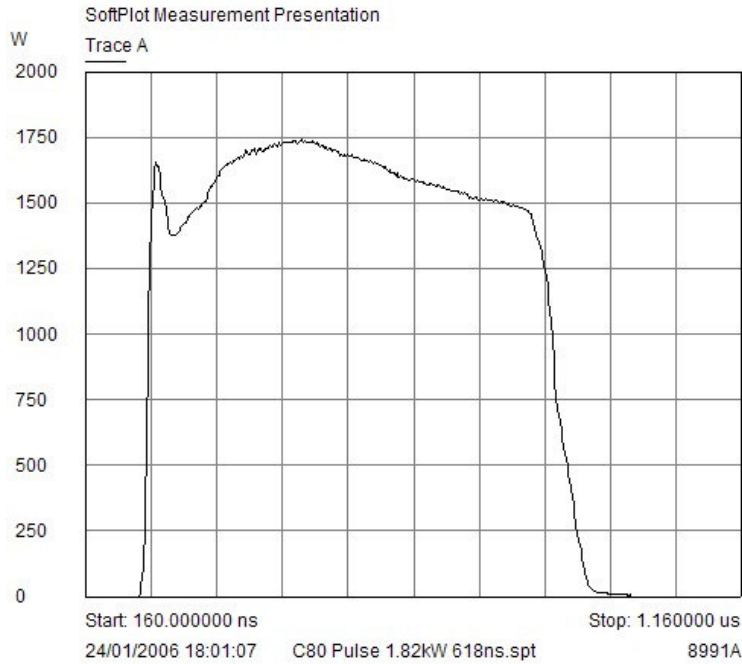


Figure 30 Pulse Characterisation 600ns


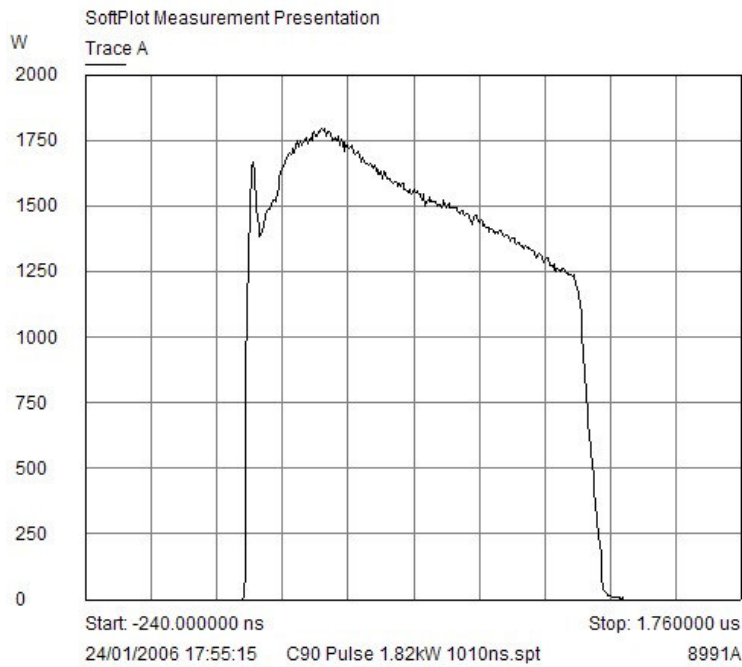


Figure 31 Pulse Characterisation 1000ns

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

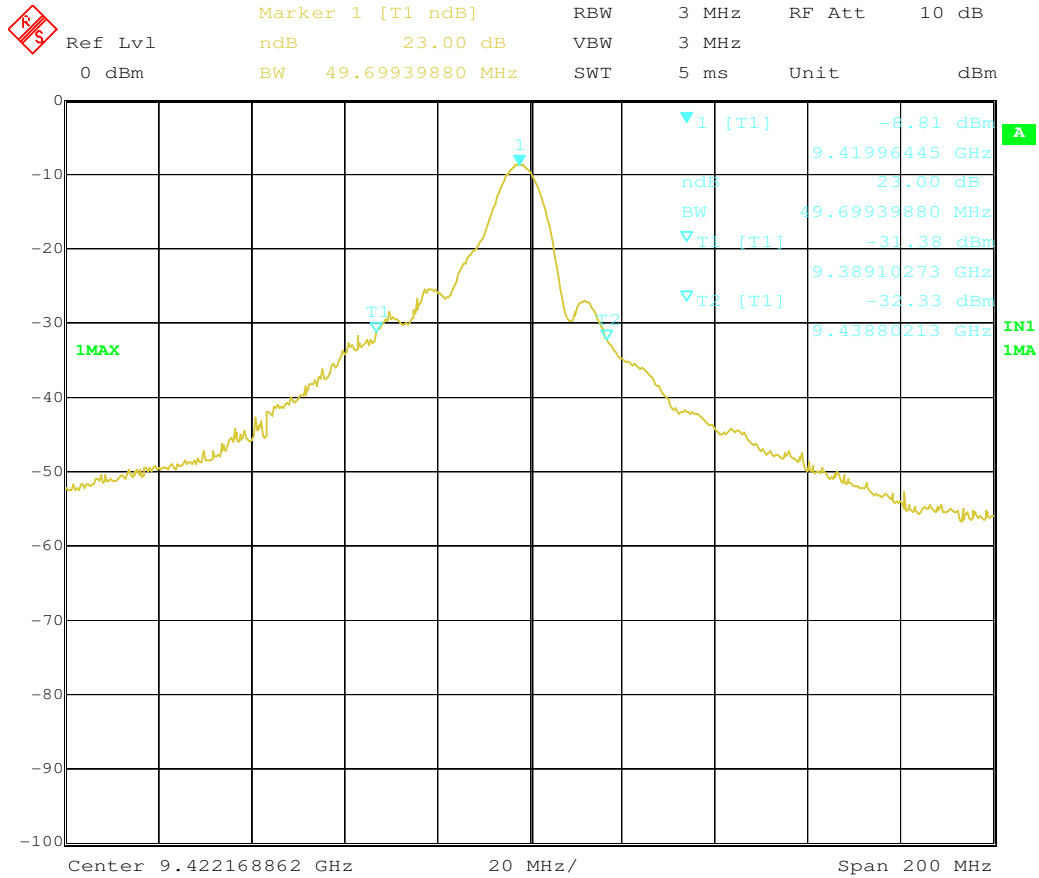


Date: 31.JAN.2006 18:05:32

Figure 32 Occupied Bandwidth 75ns Pulse

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998


Issue Date: 13th February, 2006

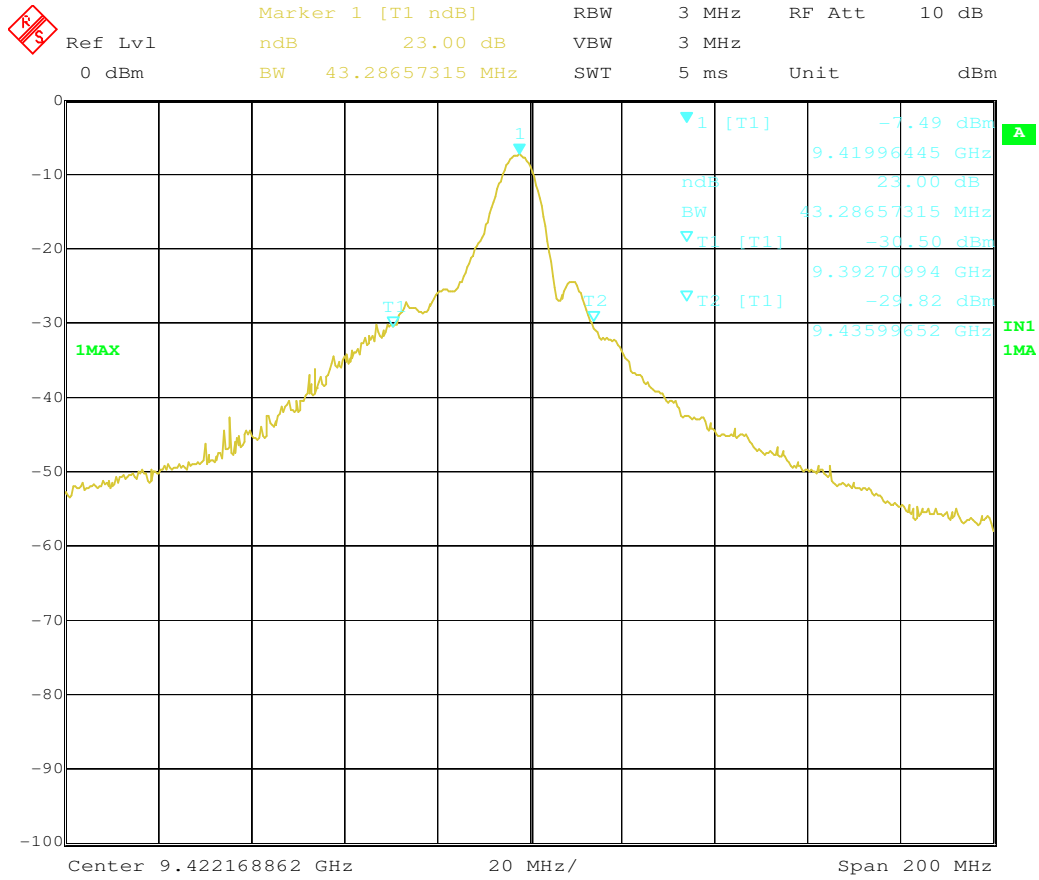

Date: 31.JAN.2006 18:06:24
Figure 33 Occupied Bandwidth 100ns Pulse

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998


Issue Date: 13th February, 2006

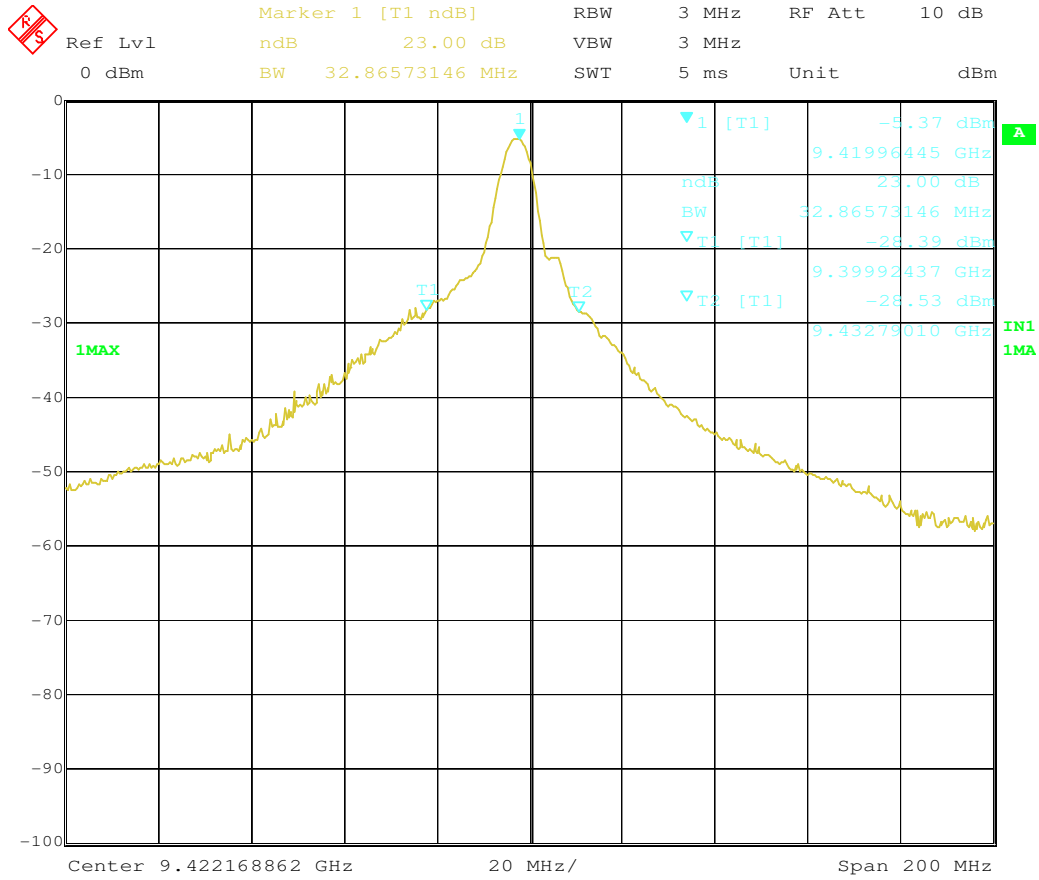

Date: 31.JAN.2006 18:07:12
Figure 34 Occupied Bandwidth 150ns Pulse

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998


Issue Date: 13th February, 2006

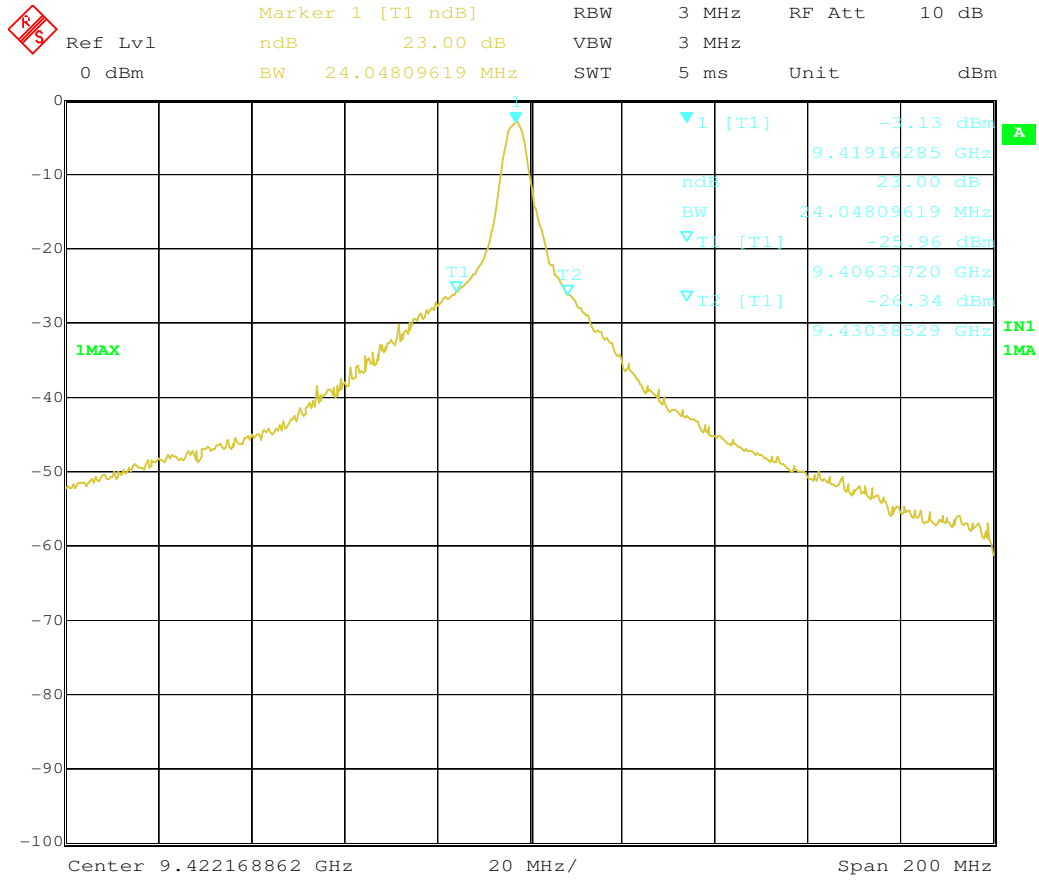

Date: 31.JAN.2006 18:08:19
Figure 35 Occupied Bandwidth 250ns Pulse

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998


Issue Date: 13th February, 2006

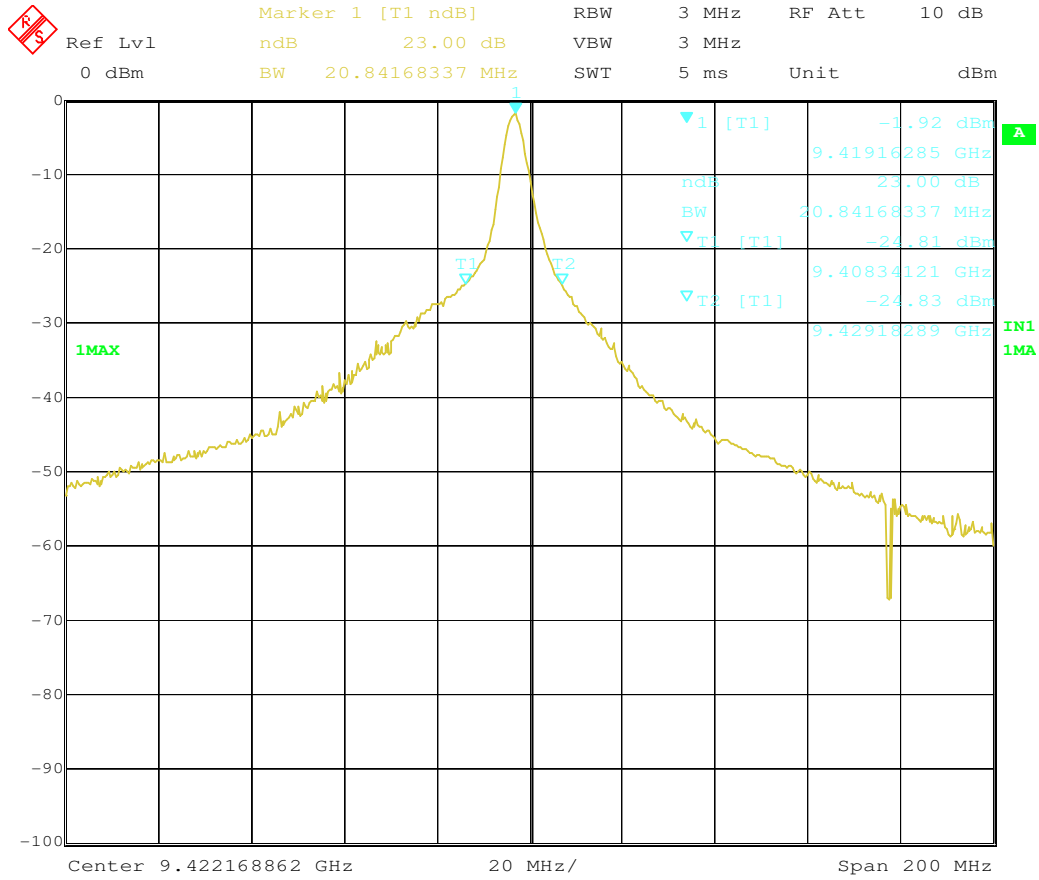

Date: 31.JAN.2006 18:09:19
Figure 36 Occupied Bandwidth 350ns Pulse

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998


Issue Date: 13th February, 2006

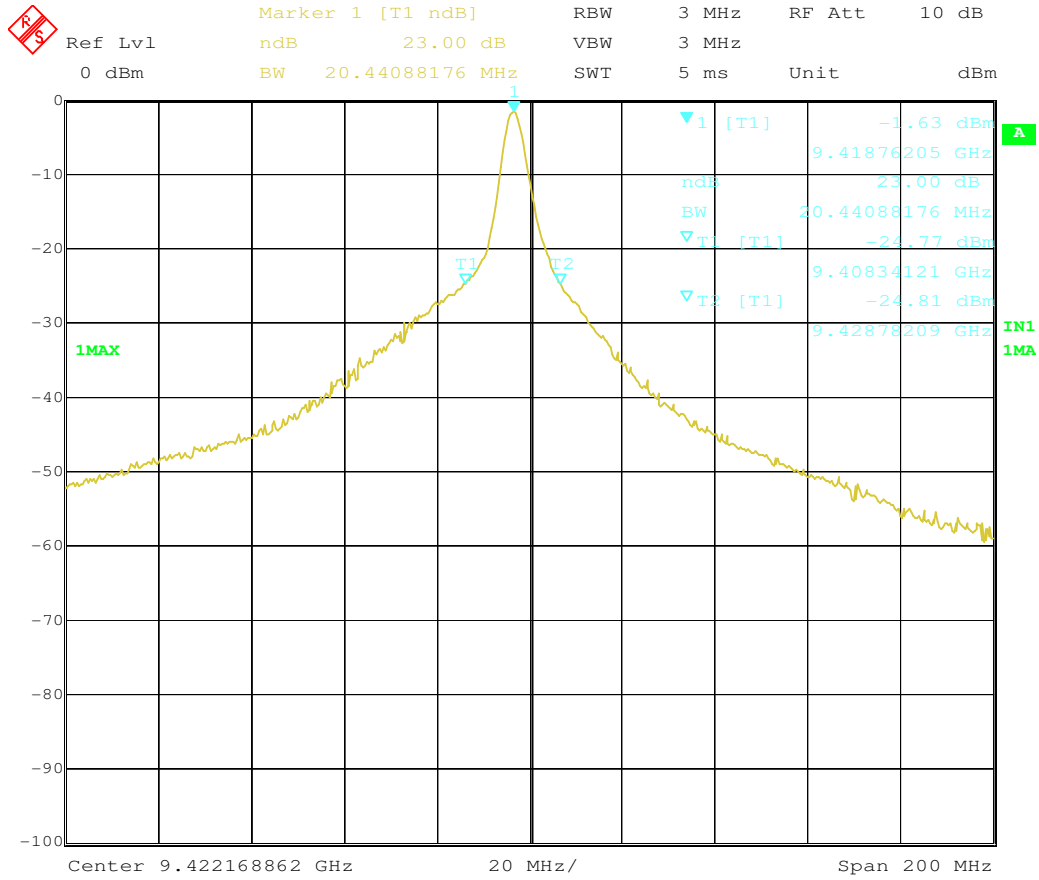

Date: 31.JAN.2006 18:10:52
Figure 37 Occupied Bandwidth 450ns Pulse

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998


Issue Date: 13th February, 2006

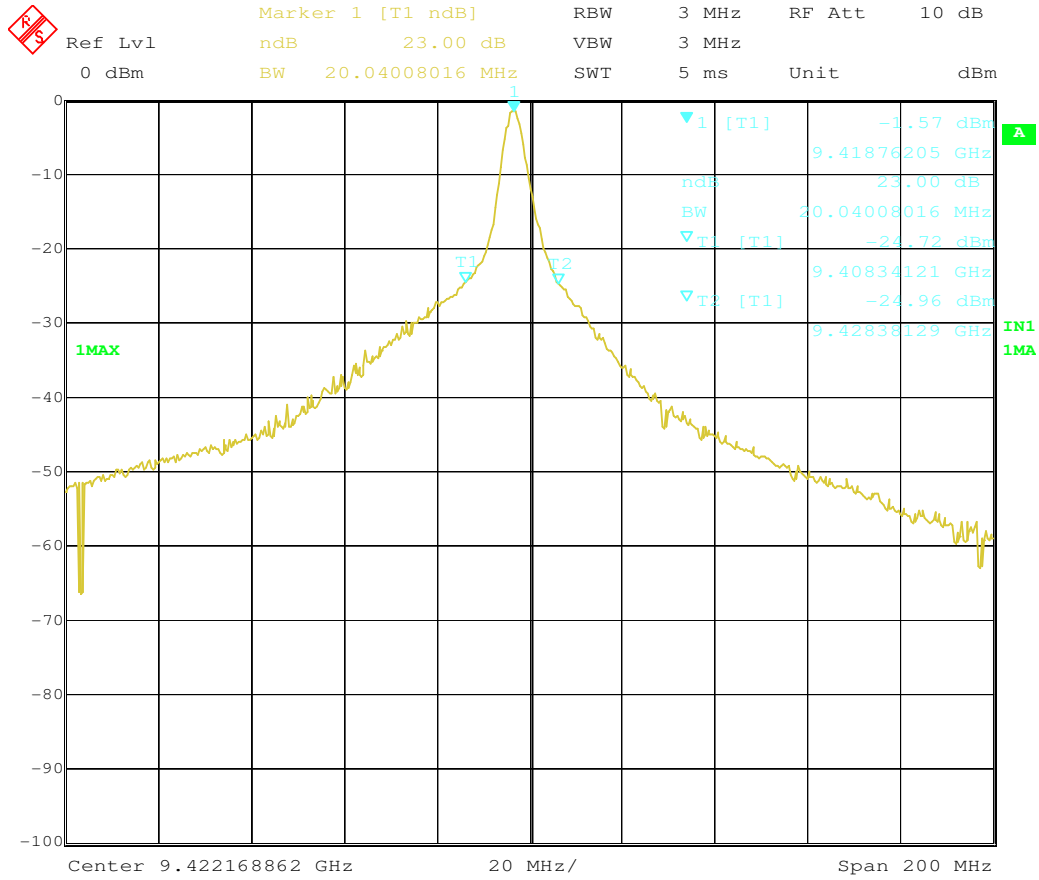

Date: 31.JAN.2006 18:12:15
Figure 38 Occupied Bandwidth 600ns Pulse

Test of: Raymarine Ltd.
RD218 Analog 2kW Radome Scanner
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 13th February, 2006

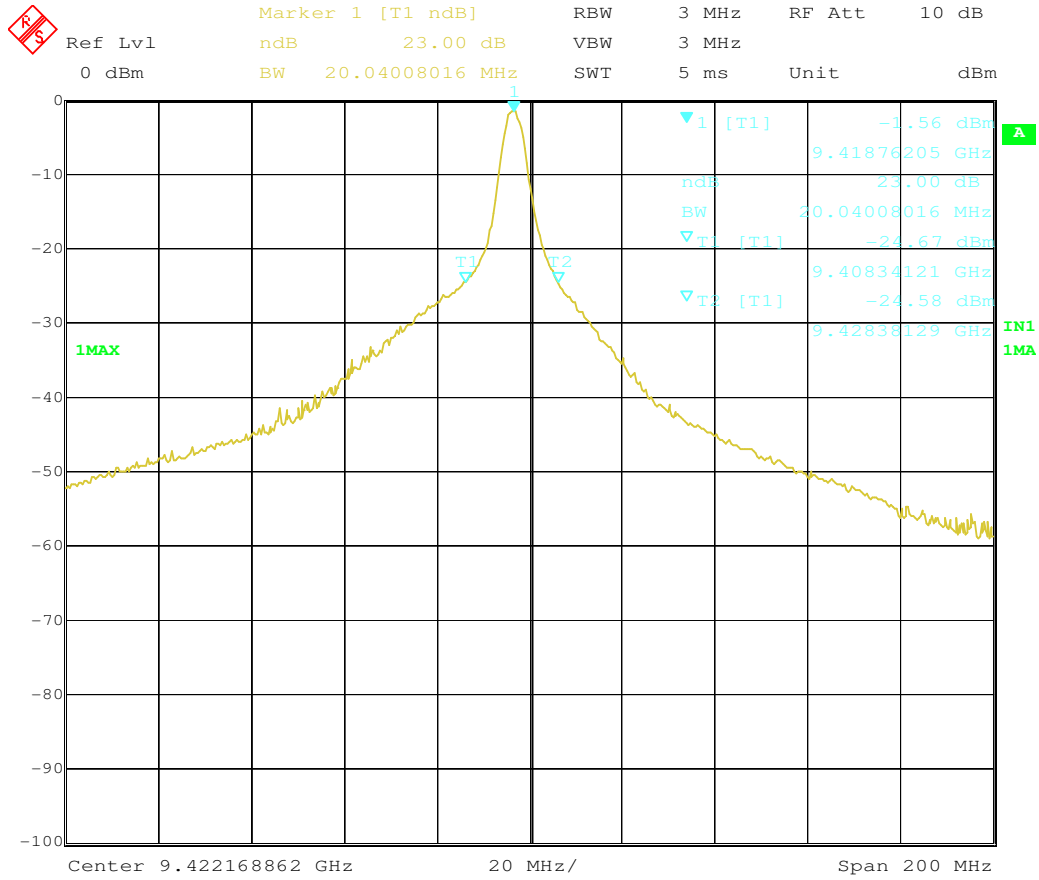

Date: 31.JAN.2006 18:14:52
Figure 39 Occupied Bandwidth 1000ns Pulse