




TEST REPORT
EMC DEPARTMENT
RAYMARINE LTD

Test of: Raymarine Ltd.
4kW Open Array Digital Radar

To: FCC Part 80: 1998
and FCC Part 2:1998

(Leisure Marine Radar Equipment)

Test Report Serial No. 649/1045

Checked By:  EMC Engineer 6th August, 2007	Approved By:  EMC Team Leader 7th August, 2007
Tested By: Michael Howes Andy Little	Author: Michael Howes  EMC Engineer 14th July, 2007
Issue Date: 14 th July, 2007	Test Dates: 18 th June to 28 th June 2007

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

Issue Date: 14th July, 2007

Table of Contents

1	Client Information.....	3
2	Equipment Under Test (EUT)	4
2.1	Identification of Equipment Under Test (EUT)	4
2.2	Description of EUT	4
2.3	Modifications incorporated in EUT	4
2.4	Additional information related to Testing.....	5
2.5	Support Equipment.....	5
3	Test Specification, Methods and Procedures	6
3.1	Test Specification.....	6
3.2	Methods and Procedures	6
3.3	Definition of Measurement Equipment	6
4	Deviations from the Test Specification	7
5	Operation of the EUT during Testing	8
5.1	Operating Conditions.....	8
5.2	Operating Modes.....	8
5.3	Configuration and peripherals	8
6	Summary of Test Results.....	9
6.1	Summary of Tests	9
6.1.1	Radiated Spurious Emissions.....	9
6.1.2	Conducted Spurious Emissions.....	9
6.1.3	RF Power Output	9
6.1.4	Variation of Frequency with Voltage	10
6.1.5	Variation of Frequency with Temperature.....	10
6.1.6	Occupied Bandwidth	10
6.1.7	Transmitter Frequency Tolerance.....	10
6.1.8	Suppression of Interference Aboard Ships	11
6.2	Location of Tests	11
7	Measurements, Examinations and Derived Results	12
7.1	General Comments	12
7.2	Field Strength Measurements	12
7.2.1	Magnetic Field Measurements: Frequency Range 9 kHz to 30 MHz	12
7.2.2	Electric Field Measurements: Frequency Range 30 MHz to 2000 MHz.....	12
7.2.3	Electric Field Measurements: Frequency Range: 2GHz to 40GHz	12
7.3	Conducted Emissions.....	13
7.3.1	Peak Detector measurements on RF port	13
7.4	Peak Power	13
7.5	Pulse Width	14
7.6	Pulse Repetition Frequency	14
7.7	Average Power.....	15
7.8	Variation of frequency with input voltage	15
7.9	Variation of frequency with temperature	16
7.10	Occupied Bandwidth	17
7.11	Transmitter Frequency Tolerance	18
7.11.1	Specification: 80.209(b).....	18
7.11.2	Calculation	18
8	Measurement Uncertainty.....	19
Appendix A	Test Equipment Used	20
Appendix B	Measurement Methods.....	21
Appendix C	Test Configuration Drawings	23
Appendix D	Graphical Test Results	27

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

1 Client Information

Company Name	Raymarine Ltd.
Address:	Robinson Way Anchorage Park Portsmouth Hampshire PO3 5TD England, U.K.
Contact Name:	Mr. P. Bowen, EMC Team Leader

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

2 Equipment Under Test (EUT)

2.1 Identification of Equipment Under Test (EUT)

Brand Name:	Raymarine	
Model Name or Number:	4kW Open Array Digital Radar	
Unique Type Identification:	4kW Super High Definition Pedestal	E52081
	4kW High Definition Pedestal	E52069
Serial Number:	4kW Super High Definition Pedestal	EMC070530a
	Voltage Converter Module	EMC070530c
Country of Manufacture:	Hungary	
FCC ID Number:	FCC ID: PJ5-DP4KW	
Date of Receipt:	30 th May 2007	

2.2 Description of EUT

The equipment under test is an X-band marine radar intended for use on leisure craft and small workboats, and is comprised of:

Scanner Unit: 4kW X-band transmitter with 4ft or 6ft open array antenna.
Display Unit: Compatible with E Series and G Series
Voltage Converter Module

This test report covers both High Definition and Super High Definition systems. The hardware is common to both systems; additional software features are enabled in the Super HD system to provide improved receiver and post-receiver signal processing.

2.3 Modifications incorporated in EUT

The EUT has not been modified from what is described by the Model Name and Unique Type Identification stated above.

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

2.4 Additional information related to Testing

Power Supply Requirement:	Nominal 12-24V DC supply
Intended Operating Environment:	Leisure Marine & Small Workboats
Weight:	4kW Pedestal (48" OA): 25kg (55.1lbs) 4kW Pedestal (72" OA): 29kg (63.9lbs)
Dimensions:	4kW Pedestal: 412mm x 324mm x 402mm
Interface Ports:	Combined Power and Network

2.5 Support Equipment

Support equipment used throughout test:

Item	Unique Type Identification & Serial Number	
Raymarine E120 Display	E02013	EMC070122a
Raymarine Seataalk ^{HS} Switch	E55058	EMC081104a
Compaq Laptop Computer	LT1367	

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

3 Test Specification, Methods and Procedures

3.1 Test Specification

Reference:	FCC Part 80: 1998 and FCC Part 2:1998
Title:	Code of Federal Regulations, Part 80 (47CFR): 1998 Stations in the maritime services Code of Federal Regulations, Part 2 (47CFR): 1998 Frequency Allocations and radio treaty matters; general rules and regulations
Comments:	The test facility used for the radiated emissions portions of these tests is an alternative test site as described in ANSI C63.4-2003, being a 3m test range within a semi-anechoic chamber, with antenna height scanning from 1 – 4 metres and meeting the +/-4dB NSA criterion. It is registered with the FCC under the 2.948 (47CFR) listing procedure with Reference Number 970522.
Purpose of Test:	To demonstrate compliance of the 4kW Open Array Digital Radar to the appropriate clauses of Parts 2 and 80 of the FCC Rules.

3.2 Methods and Procedures

The methods and procedures used were as detailed in:

ANSI C63.2-1996

Title: American National Standard for Electromagnetic Noise and Field Strength Instrumentation, 10 Hz to 40 GHz – Specifications

ANSI C63.4-2003

Title: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI C63.5-2006

Title: American National Standard for Electromagnetic Compatibility – Radiated Emission Measurements in Electromagnetic Interference (EMI) Control – Calibration of Antennas (9 kHz to 40 GHz)

CISPR 16-1 (1999)

Title: Specification for radio disturbance and immunity measuring apparatus and methods Part 1: Radio disturbance and immunity measuring apparatus

CISPR 16-4 (2002)

Title: Specification for radio disturbance and immunity measuring apparatus and methods Part 4: Uncertainty in EMC measurements

3.3 Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the Methods and Procedures section above. Appendix A contains a list of the test equipment used.

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

4 Deviations from the Test Specification

None.

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

5 Operation of the EUT during Testing

5.1 Operating Conditions

1. Radiated Emissions, 9kHz to 40GHz: The EUT was located on a non-conducting support above a turntable on a 3m test range within a semi-anechoic chamber (Raymarine Site 3)
2. The EUT was located in a laboratory environment for all other tests.
3. During testing, the EUT was powered by a nominal 12V DC supply except when measuring Frequency Variation with Voltage. [FCC Part 2, 1055(d)]

5.2 Operating Modes

The EUT was tested in the following operating modes:

1. Radiated emissions: Transmitting into a rotating non-reflective load with the transmitter set to 75, 450 and 1000ns pulse widths.
2. Conducted emissions: Transmitting into a fixed non-reflective load with the transmitter set to 75, 450 and 1000ns pulse widths.
3. Variation of transmit frequency with voltage and temperature: The transmitter was set to the half nautical mile range (75ns pulse width) and the six nautical mile range (1000ns pulse width).
4. Transmitter power, pulse width, occupied bandwidth and P.R.F. Transmitting into a fixed non-reflective load.

5.3 Configuration and peripherals

1. The 4kW Pedestal was powered via the Voltage Converter Module and connected to a Seatalk^{HS} Switch with the standard cable of 15m length. The Seatalk^{HS} Switch was also connected to an E120 display unit with a standard 10m CAT 5 network cable. A transmit dummy load was connected to the radar antenna port. A 12V DC supply was connected to the Radar, Seatalk^{HS} Switch and Display Unit.
2. This configuration is considered to be the worst case as regards emissions.
3. Appendix A of this report contains a full list of test equipment used and Appendix C contains a schematic diagram of the test configuration.

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

6 Summary of Test Results

6.1 Summary of Tests

6.1.1 Radiated Spurious Emissions

Frequency Range	Specification Reference	Compliance Status
9kHz to 40GHz	2.1053 and 80.211(f)	Complied

6.1.2 Conducted Spurious Emissions

Frequency Range	Specification Reference	Compliance Status
9kHz to 40GHz	2.1051 and 80.211(f)	Complied

6.1.3 RF Power Output

6.1.3.1 Peak Power

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1046(a) and 80.215(a)	Complied

6.1.3.2 Average Power

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1046(a) and 80.215(a)	Complied

6.1.3.3 Pulse Width

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1046(a) and 80.215(a)	Complied

6.1.3.4 PRF

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1047(d) and 80.213(g)	Complied

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

6.1.4 Variation of Frequency with Voltage

6.1.4.1 75ns

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
75	2.1055(d)	Complied

6.1.4.2 1000ns

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
1000	2.1055(d)	Complied

6.1.5 Variation of Frequency with Temperature

6.1.5.1 75ns

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
75	2.1055(a and b)	Complied

6.1.5.2 1000ns

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
1000	2.1055(a and b)	Complied

6.1.6 Occupied Bandwidth

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1049(i) and 80.205	Complied

6.1.7 Transmitter Frequency Tolerance

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	80.209(b)	Complied

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

6.1.8 Suppression of Interference Aboard Ships

80.217. When the radar is in the Standby mode of operation, the local oscillator is automatically switched off.

6.2 Location of Tests

All the measurements described in this report were performed in the EMC Department at the premises of Raymarine Ltd., Robinson Way, Anchorage Park, Portsmouth, Hampshire PO3 5TD, England, U.K.

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

7 Measurements, Examinations and Derived Results

7.1 General Comments

This section contains test results only. Details of the test methods and procedures can be found in Appendix B of this report.

Measurement uncertainties are stated in accordance with the requirements of CISPR 16-4:2002. Please refer to Section 8 for details of measurement uncertainties.

The highest frequency generated by the EUT is 9.4GHz. Consequently, tests were performed up to 40GHz.

7.2 Field Strength Measurements

7.2.1 Magnetic Field Measurements: Frequency Range 9 kHz to 30 MHz

Plots of measurements using a peak detector can be found in Appendix D.

No emissions exceeded a level of 50dBuV/m.

Details of the limit line calculation can be seen in Appendix B.

7.2.2 Electric Field Measurements: Frequency Range 30 MHz to 2000 MHz

Plots of measurements can be found in Appendix D.

The highest peak levels measured were less than 55dBuV/m

Details of the limit line calculation can be seen in Appendix B

7.2.3 Electric Field Measurements: Frequency Range: 2GHz to 40GHz

Plots of measurement scans can be found in Appendix D.

The following table lists frequencies at which significant emissions were measured using Peak detector functions. Although these emissions are not required to be recorded, being more than 20dB lower than the limit line, they are included for completeness as they are all magnetron-related.

Details of the limit line calculation can be seen in Appendix B

Frequency (GHz)	Antenna Polarization	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result
18.801	Vertical	96.01	131.04	35.03	Complied

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

7.3 Conducted Emissions

7.3.1 Peak Detector measurements on RF port

The design of the RF coupling from the magnetron to the antenna forms an effective high pass/band pass filter arrangement. The peak energy level of radar requires considerable attenuation in order to prevent the analyser from going into compression. This limits the maximum dBc figure that can be obtained without changing the resolution bandwidth of the analyser. Since the signal is wideband compared to the resolution bandwidth, it is critical to the measurement accuracy that the resolution bandwidth settings remain consistent throughout the testing where possible.

Measurements were performed from 2 GHz to 40GHz with the EUT set to 75ns, 450nS and 1000ns; measurements were performed within and around the transmitter frequency allocation.

Details of the limit line calculation can be found in Appendix B.

All emissions were more than 20dB below the required limit. Plots of the scans can be found in Appendix D.

7.4 Peak Power

These measurements were performed with the HP Peak Power Analyser and sensor connected to the EUT antenna port via a coupler and in-line attenuator.

Pulse Width (ns)	Measured Power (kW)
75	3.72
100	3.58
150	3.76
250	3.67
350	3.74
450	3.66
600	3.72
1000	3.77

Note 1: Power is measured at the antenna port and will be less than the nominal magnetron output due to normal losses in the circulator and rotating joint.

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

7.5 Pulse Width

Plots can be found in Appendix D.

In order to determine the characteristics of the various pulses, the HP Peak Power Analyser was connected to the EUT antenna port via a coupler and inline attenuator.

Nominal Pulse Width (ns)	Measured Pulse Width (ns)
75	75.8
100	106.7
150	153.6
250	254.4
350	356.3
450	463.1
600	610.7
1000	1041

7.6 Pulse Repetition Frequency

In order to determine the characteristics of the various pulses, the HP Peak Power Analyser and sensor was connected to the EUT antenna port via a coupler and in-line attenuator.

Pulse Width (ns)	Measured P.R.F. (Hz)
75	2994
100	2994
150	2994
250	2994
350	2008
450	1506
600	1290
1000	819.6

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

7.7 Average Power

Measured at the antenna port.

Nominal Pulse Width (ns)	Peak Power (kW)	P.R.F. (Hz)	Measured Pulse Width (ns)	Average Power (Watts)
75	3.72	2994	75.8	0.84
100	3.58	2994	106.7	1.14
150	3.76	2994	153.6	1.73
250	3.67	2994	254.4	2.80
350	3.74	2008	356.3	2.68
450	3.66	1506	463.1	2.55
600	3.72	1290	610.7	2.93
1000	3.77	819.6	1041	3.22

Note 1: The previous subsections detail the results required to make the above calculation.

7.8 Variation of frequency with input voltage

The frequency of the EUT was measured at each voltage.

75ns

% of Nominal Volts	Volts (dc)	Measured Frequency (GHz)
85% of 12.0	10.2	9.404441
100% of 12.0	12.0	9.404697
100% of 24.0	24.0	9.404561
115% of 24.0	27.6	9.404761

1000ns

% of Nominal Volts	Volts (dc)	Measured Frequency (GHz)
85% of 12.0	10.2	9.402436
100% of 12.0	12.0	9.402907
100% of 24.0	24.0	9.403199
115% of 24.0	27.6	9.403923

Note: The equipment can be operated from any voltage within the nominal range 12 to 24 without requiring any adjustment. Therefore, the testing was performed from 85% of the lowest to 115% of the highest operating voltage.

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

7.9 Variation of frequency with temperature

The EUT scanner unit was situated in an environmental test chamber and set for normal operation at the shortest pulse width. The antenna port was connected via a coupler and in-line attenuator to the input of the HP E7405 analyser.

The chamber was then set to -30°C. After reaching the required temperature a 30-minute delay was incurred to allow for temperature stabilisation, the EUT frequency was monitored until there was no measurable frequency change. The frequency was recorded. The EUT was then set for normal operation at the longest pulse width, and the frequency monitored until there was no measurable frequency change. The frequency was recorded.

The chamber temperature was then increased by 10°C with the process repeated at this temperature, and at further increments of 10°C up to and including +50°C.

75ns

Temperature °C	Measured Frequency (GHz)
-30	9.413390
-20	9.410430
-10	9.410920
0	9.409415
+10	9.408273
+20	9.406209
+30	9.404468
+40	9.402958
+50	9.400985

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

1000ns

Temperature °C	Measured Frequency (GHz)
-30	9.411508
-20	9.408070
-10	9.408243
0	9.407278
+10	9.406059
+20	9.404145
+30	9.402243
+40	9.400758
+50	9.398798

7.10 Occupied Bandwidth

Plots can be found in Appendix D.

The 99.5% (-23dBc) power bandwidth was measured for each pulse width using the delta function of the ESU 40 receiver. Owing to the shape of the pulse it was not always possible to measure the bandwidth at the exact -23db point. Consequently, the next lower point was taken. This has the effect of slightly increasing the measured bandwidth above the actual 99.5% bandwidth.

Nominal Pulse Width (ns)	99.5% Power Bandwidth (MHz)
75	43.59
100	34.13
150	25.96
250	19.39
350	16.35
450	15.54
600	14.90
1000	14.90

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

7.11 Transmitter Frequency Tolerance

7.11.1 Specification: 80.209(b)

“When pulse modulation is used in land and ship radar stations operating in the bands above 2.4GHz the frequency at which maximum emission occurs must be within the authorised bandwidth and must not be closer than $1.5/T$ MHz to the upper and lower limits of the authorised bandwidth where “T” is the pulse duration in microseconds.”

7.11.2 Calculation

Authorised Bandwidth: 9300MHz to 9500MHz

Specification Limits: [Lower] $9300 + 1.5/T$
[Upper] $9500 - 1.5/T$

Transmitter Frequency Tolerances			
Nominal Pulse Width (ns)	Actual Pulse Width (ns)	Specification Limits (MHz)	
		Lower	Upper
75	75.8	9319.789	9480.211
100	106.7	9314.058	9485.942
150	153.6	9309.766	9490.234
250	254.4	9305.896	9494.104
350	356.3	9304.210	9495.790
450	463.1	9303.239	9496.761
600	610.7	9302.456	9497.544
1000	1041	9301.441	9498.559

From examining the transmitter frequency data from the Variation of Frequency with Voltage and Variation of Frequency with Temperature results pages, it can be seen that the transmitter is within the calculated specification.

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

8 Measurement Uncertainty

Measurement uncertainty was calculated after reference to CISPR 16-4:2002. In order to determine compliance with the limit for emissions tests, the specification states that, where the calculated uncertainty exceeds the value of U_{CISPR} , the difference in dB is to be added to the instrument reading. The corrections shown in the table below are therefore added to the reported measurements before assessing compliance with the limits.

Measurement Type	Confidence Level ($k = 2$)	Calculated Uncertainty	U_{CISPR}	Correction
Radiated Emissions: Electric Field Strength 30MHz-1GHz	95%	+/- 6.8dB	4.5dB(<300MHz) 5.2dB(>300MHz)	+2.3dB(<300MHz) +1.6dB(>300MHz)
Radiated Emissions: Electric Field Strength 1GHz-26.5GHz	95%	+/- 7.3dB	Under consideration (5.2dB assumed)	+2.1dB
Radiated Emissions: Electric Field Strength 26.5-40GHz	95%	+/-7.6dB	Under consideration (5.2dB assumed)	+2.4dB

Note 1. All test equipment and antennae used for the tests described in this report have current traceable calibration to UKAS or equivalent standard.

Note 2. All reported measurements include the appropriate offsets for antenna factors, coupler and cable losses, etc.

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

Appendix A Test Equipment Used

Ref. No.	Device	Manufacturer	Model No.	Serial No.	Next Cal Due
318	Peak Power Analyser	H-P	8991A	3248A00128	02/10/2007
1721	Receiver	Rohde & Schwarz	ESU 40	100017	19/10/2007
886	Receiver	Rohde & Schwarz	ESI 26	832692/006	08/01/2008
424	DVM	Fluke	83	63550394	02/10/2007
1520	Sig. Gen. 0.01-40GHz	Rohde & Schwarz	SMR40	10-300074685	02/10/2007
440	PSU 3-15V 25A	Palstar	PS30M	92534722	Not Reqd***
442	Antenna 0.09-30MHz	Schaffner	HLA6120	1122	06/01/2008*
482	Antenna 18-26.5GHz	Credowan	20-R-2843-0007	36755	29/09/2008**
483	Antenna 26.5-40GHz	Credowan	S.G. Horn	None	29/09/2008**
852	Antenna 1.0-18.0GHz	Schwarzbeck	BBHA9120D	128	06/01/2008*
1802	Antenna 30-2000MHz	Chase	CBL6141A	22932	04/12/2007
EM06	Microwave Cable	Agilent	5061-5458	EMC Cable 6	As Required
EM09	Microwave Cable	Agilent	5061-5458	EMC Cable 9	As Required
RD14	Microwave Coupler	Flann	16270-40-23	116317	As Required
RD21	Inline Attenuator 10dB	Narda	4779-10	8	As Required
n/a	Inline Attenuator 10dB	Suhner	6810.17.B	13	As Required
RD40	WG16 to N Adaptor	Flann	16094-NF10	100	As Required
RD42	WG16 to N Adaptor	Mitec Europe	M0926-7-11	3711-2	As Required
RD50	Microwave Power Load	CMT	MPT90-1A	942117-003	As Required

Notes:

- * 2 year calibration cycle in accordance with manufacturer's recommendations.
- ** 3 year calibration cycle in accordance with manufacturer's recommendations.
- *** Voltage monitored using Item 424

All test equipment, except cables, wave guide components and attenuators, are on a calibration cycle in accordance with UKAS requirements. Items marked calibration as required are calibrated during the test setup using the R&S ESU40 receiver and SMR40 signal generator (under ESU40 control as a pseudo-tracking generator).

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

Appendix B Measurement Methods.

B.1 Calculating Emissions Limit Lines

For both radiated emissions and conducted spurious emissions from the antenna port, with an Assigned Frequency of 9410MHz (Authorised Band 9310 - 9510MHz), the limits close to the magnetron frequency are:

Over the ranges 9210 - 9310MHz and 9510 - 9610MHz: -25dBc
Over the ranges 8910 - 9210MHz and 9610 - 9910MHz: -35dBc

To establish the radiated emissions limit for the product on frequencies outside the range 8910 - 9910MHz, the EUT was placed on the test site with the measuring equipment located at a distance of three metres.

The magnetron was disconnected and replaced with a WG16 to N-type coaxial connector adaptor, which was connected to a signal generator with an unmodulated output at 9.4GHz. The rotating joint was connected, via an adaptor and attenuator, to a power meter and sensor.

The signal generator was unable to reproduce the actual peak power output of the intentional radiator – measured as 3.7kW by conducted methods. Consequently, a level of 3.7mW was reproduced at the antenna port, requiring a factor of +60dB to be applied at the analyser.

The rotating joint adaptor, attenuator and power measurement equipment were removed and replaced first with a 4ft and then with a 6ft open array antenna. The antenna was aligned with the horn antenna connected to the spectrum analyser and adjusted to peak the analyser response. A reading of 179.03dBuV/m was obtained from the 4ft antenna, which gives the tighter limit.

The calculation for the radiated emissions limit line is:

$$Po(\text{peak})\text{dBuV/m} - 43 - 10\log_{10} P(\text{mean})\text{watts}, \\ 179.03 - 43 - 10\log_{10} 3.157 = \mathbf{131.04\text{dBuV/m}}$$

For conducted spurious emissions from the antenna port, the calculation to establish the limit line for frequencies outside the range 8910 - 9910MHz is:

$$Po(\text{peak})\text{dBm} - 43 - 10\log_{10} P(\text{mean})\text{watts}, \\ \text{i.e., } 65.68 - 43 - 10\log_{10} 3.157 = \mathbf{22.18\text{dBm}}$$

B.2 Radiated Emissions (9 kHz to 2 GHz)

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for a Peak detector.

All testing was carried out within a semi-anechoic chamber at a distance of 3m. For all tests, the open array antenna was replaced with a rotating microwave load.

Measurements were split into five sub ranges to accommodate receiver bandwidth and antenna changes. Over each range, the same measurement procedure was used. The antenna was initially set to a height of 1.5m. The receiver was set to step through the appropriate frequency range in "Peak and Hold" mode, with the antenna firstly in vertical

**Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998**

polarisation and then in horizontal polarisation. The EUT was then rotated clockwise through 90 degrees, then 180 degrees and finally 270 degrees, with the measurement process repeated at each 90 degree point, thus building up a profile of peak emissions. Emissions of significance were noted. For each of these emissions, the antenna polarisation was changed to give the higher reading; the turntable was then rotated through 360 degrees to find the area of the EUT radiating the highest level and, for frequencies above 30MHz, the antenna height was then varied between 1 and 4m above the ground plane to further maximise the signal before remeasurement.

Measurements above 30MHz were performed using broadband antennas. Below 30MHz, a magnetic loop antenna was used.

B.3 Radiated Emissions 2 GHz to 40 GHz

Radiated emissions measurements were performed against appropriate limits for a Peak detector. All measurements were carried out using horn antennas.

All testing was carried out within a semi-anechoic chamber at a distance of 3m. The conducting ground plane between the antenna and the EUT was covered with ferrite and pyramidal absorbing material. For all tests, the open array antenna was replaced with a rotating microwave load.

Measurements were split into sub ranges to accommodate antenna changes. Over each range, the same measurement procedure was used. The antenna was set to a height of 1.5m. The analyser was set to sweep through the appropriate frequency range in "Max Hold" mode, with the antenna in vertical polarisation. The EUT was slowly rotated clockwise through 360 degrees and then back to 000 degrees, thus building up a profile of peak emissions. The antenna was then changed to horizontal polarisation and the process continued. Emissions of significance were noted. For each of these emissions, the antenna polarisation was changed to give the higher reading; the turntable was then rotated to find the area of the EUT radiating the highest level. Measurements within 20dB of the limit line were recorded.


**Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998**

Appendix C Test Configuration Drawings

The 4kW Pedestal and Voltage Converter Module were arranged in as near a representative configuration as was practicable. The display unit, which is not directly part of the test, was placed on the turntable floor. The Pedestal, VCM100 and excess scanner interconnection cable were placed upon a non-conducting support on the turntable such that the surface of the support was 0.8m above the ground plane. For tests below 1GHz, the scanner unit was placed centrally above the display unit on a non-conducting support 0.38m high. Above 1GHz, this support was increased to 0.5m, aligning the magnetron and circulator assembly height with the receiving horn antenna. The power lead was connected to a 12V power supply; the screen of this cable was connected to the ground plane. The radar interconnection cable was coiled around the Pedestal support. Due to its size and construction, this cable cannot be bundled.

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

C.1 Connection diagram

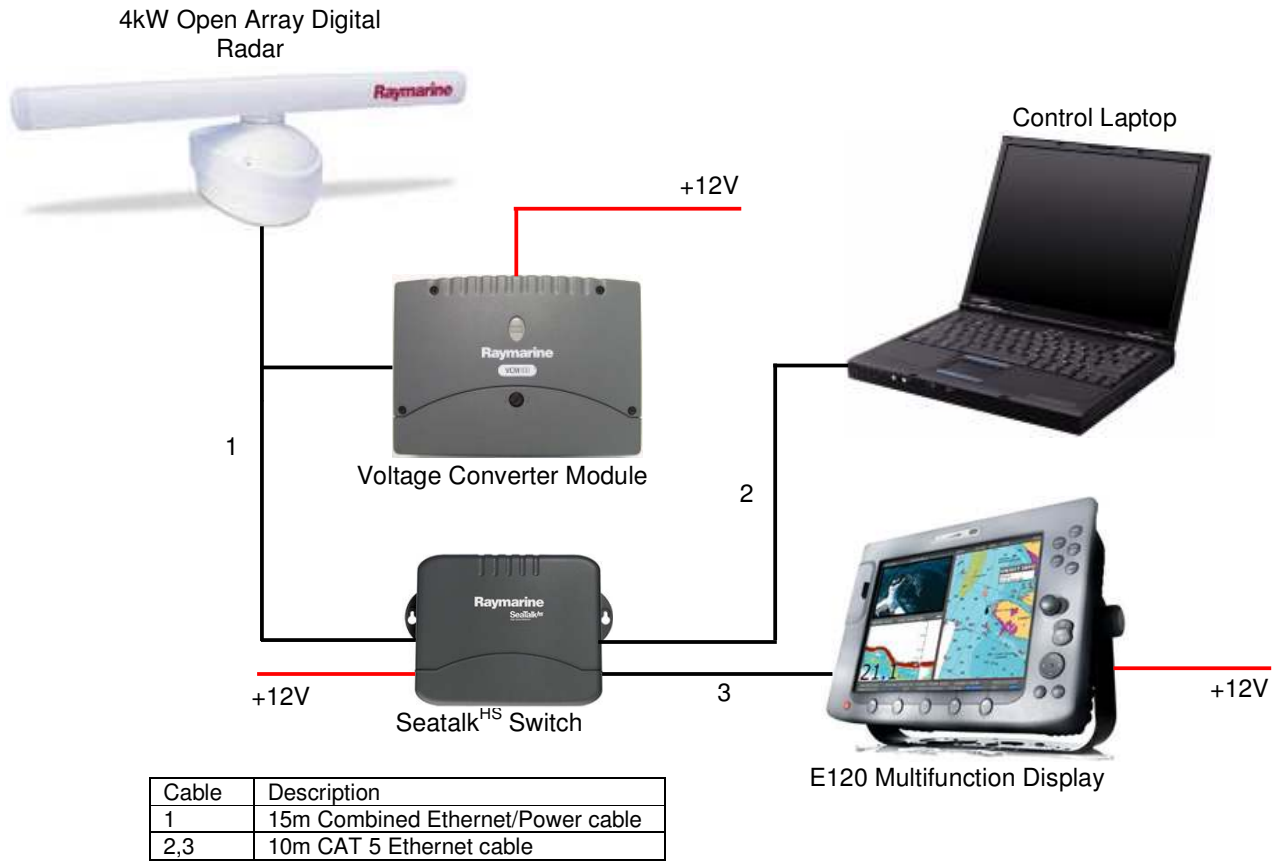


Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

C.2 Radiated Emissions Setup – General Arrangement




Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

C.3 Radiated Emissions 9 kHz to 2 GHz – General Arrangement

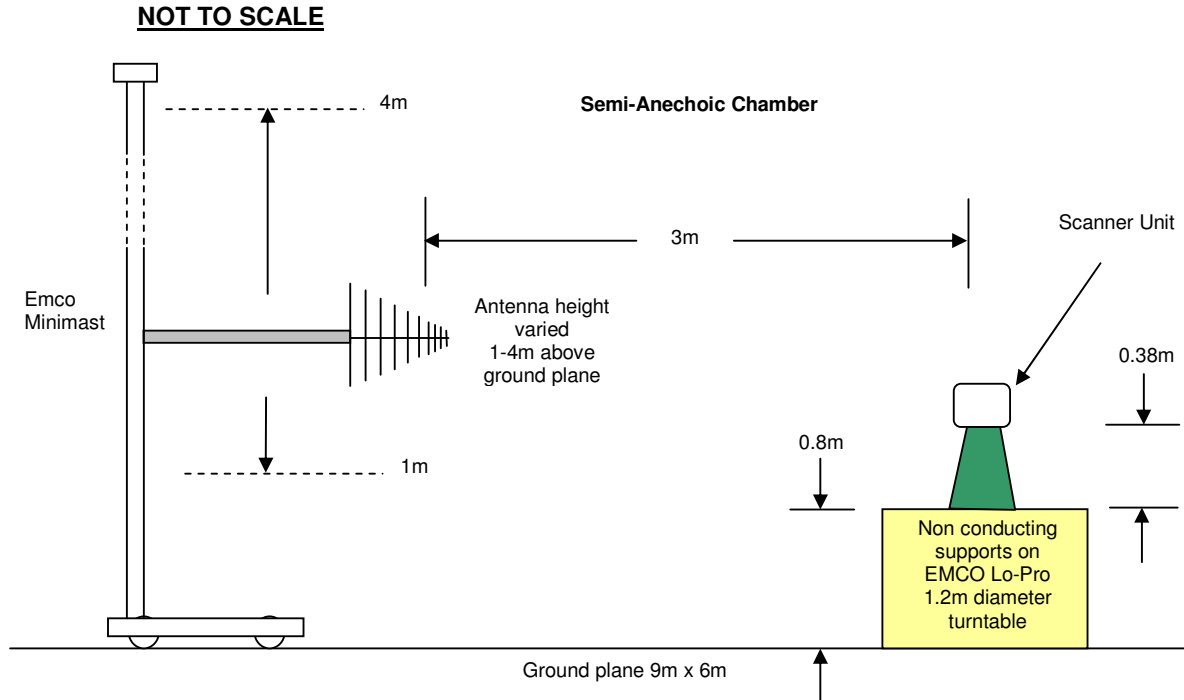

C.4 Radiated Emissions 2GHz to 40 GHz – General Arrangement

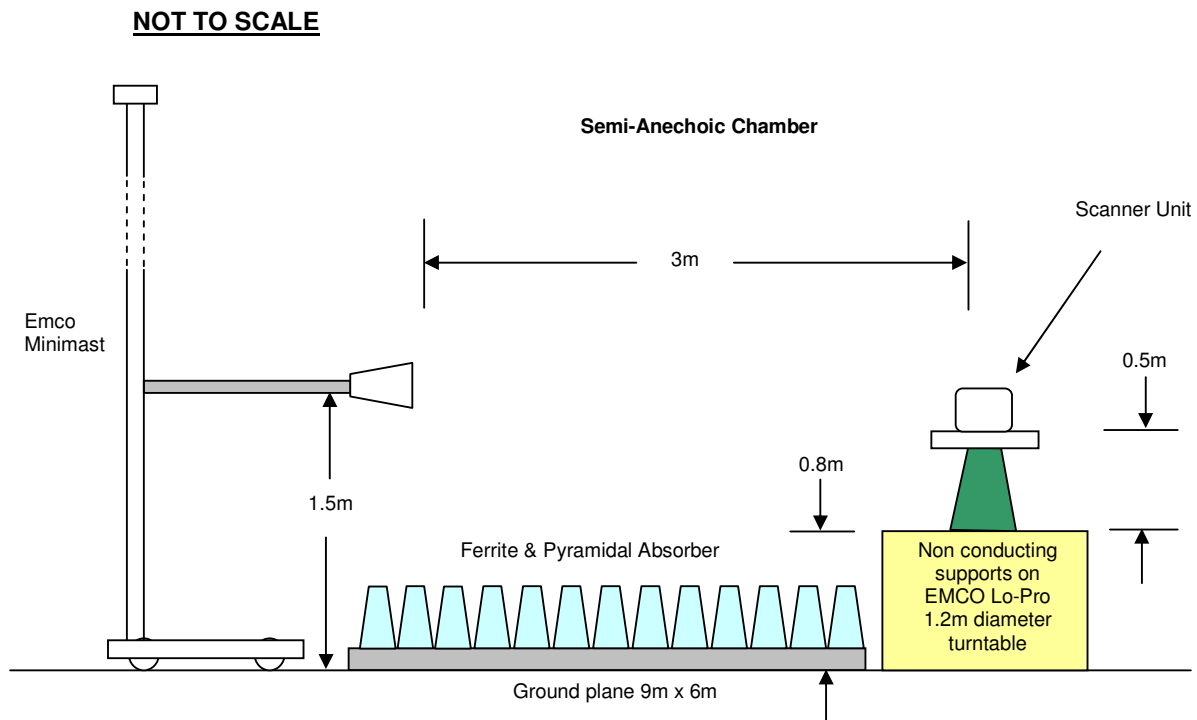

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

Appendix D Graphical Test Results

Figure 1 Radiated Emissions 9kHz to 150kHz Loop Face on	28
Figure 2 Radiated Emissions 9kHz to 150kHz Loop Side on.....	28
Figure 3 Radiated Emissions 150kHz to 30MHz Loop Side on	29
Figure 4 Radiated Emissions 150kHz to 30MHz Loop Face On.....	29
Figure 5 Radiated Emissions 30MHz to 300MHz.....	30
Figure 6 Radiated Emissions 300MHz to 1GHz.....	31
Figure 7 Radiated Emissions 1GHz to 2GHz	32
Figure 8 Radiated Emissions 450ns Pulse width 2GHz to 8GHz.....	33
Figure 9 Radiated Emissions 450ns Pulse width 8GHz to 13GHz.....	33
Figure 10 Radiated Emissions 450ns Pulse width 13GHz to 18GHz.....	34
Figure 11 Radiated Emissions 450ns Pulse width 18GHz to 22GHz.....	34
Figure 12 Radiated Emissions 450ns Pulse width 22GHz to 26GHz.....	35
Figure 13 Radiated Emissions 450ns Pulse width 26GHz to 32GHz.....	35
Figure 14 Radiated Emissions 450ns Pulse width 32GHz to 40GHz.....	36
Figure 15 Main Pulse Measurement 450ns Pulse (Antenna Not fitted)	37
Figure 16 Conducted Emissions 450ns Pulse 2GHz to 8GHz	38
Figure 17 Conducted Emissions 450ns Pulse 8GHz to 13GHz	38
Figure 18 Conducted Emissions 450ns Pulse 13GHz to 18GHz	39
Figure 19 Conducted Emissions 450ns Pulse 18GHz to 22GHz	39
Figure 20 Conducted Emissions 450ns Pulse 22GHz to 26GHz	40
Figure 21 Conducted Emissions 450ns Pulse 26GHz to 32GHz	40
Figure 22 Conducted Emissions 450ns Pulse 32GHz to 40GHz	41
Figure 23 Main Pulse Measurement 450ns Pulse.....	41
Figure 24 Pulse Characterisation 75ns	42
Figure 25 Pulse Characterisation 100ns	42
Figure 26 Pulse Characterisation 150ns	43
Figure 27 Pulse Characterisation 250ns	43
Figure 28 Pulse Characterisation 350ns	44
Figure 29 Pulse Characterisation 450ns	44
Figure 30 Pulse Characterisation 600ns	45
Figure 31 Pulse Characterisation 1000ns	45
Figure 32 Occupied Bandwidth 75ns Pulse	46
Figure 33 Occupied Bandwidth 100ns Pulse	46
Figure 34 Occupied Bandwidth 150ns Pulse	47
Figure 35 Occupied Bandwidth 250ns Pulse	47
Figure 36 Occupied Bandwidth 350ns Pulse	48
Figure 37 Occupied Bandwidth 450ns Pulse	48
Figure 38 Occupied Bandwidth 600ns Pulse	49
Figure 39 Occupied Bandwidth 1000ns Pulse	49

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

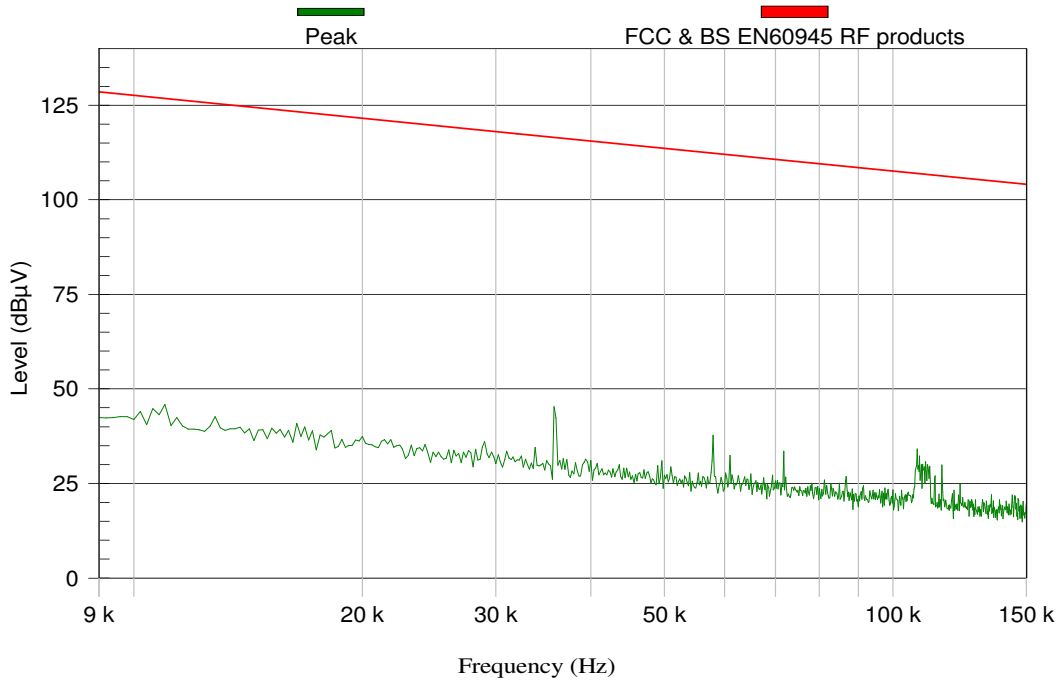


Figure 1 Radiated Emissions 9kHz to 150kHz Loop Face on

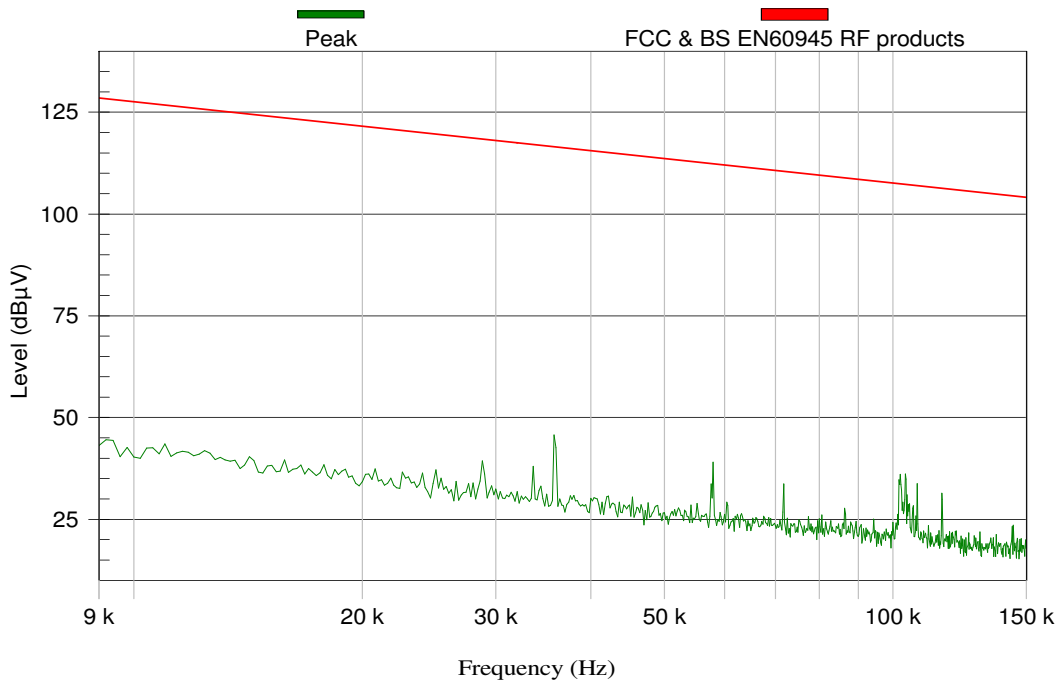


Figure 2 Radiated Emissions 9kHz to 150kHz Loop Side on

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

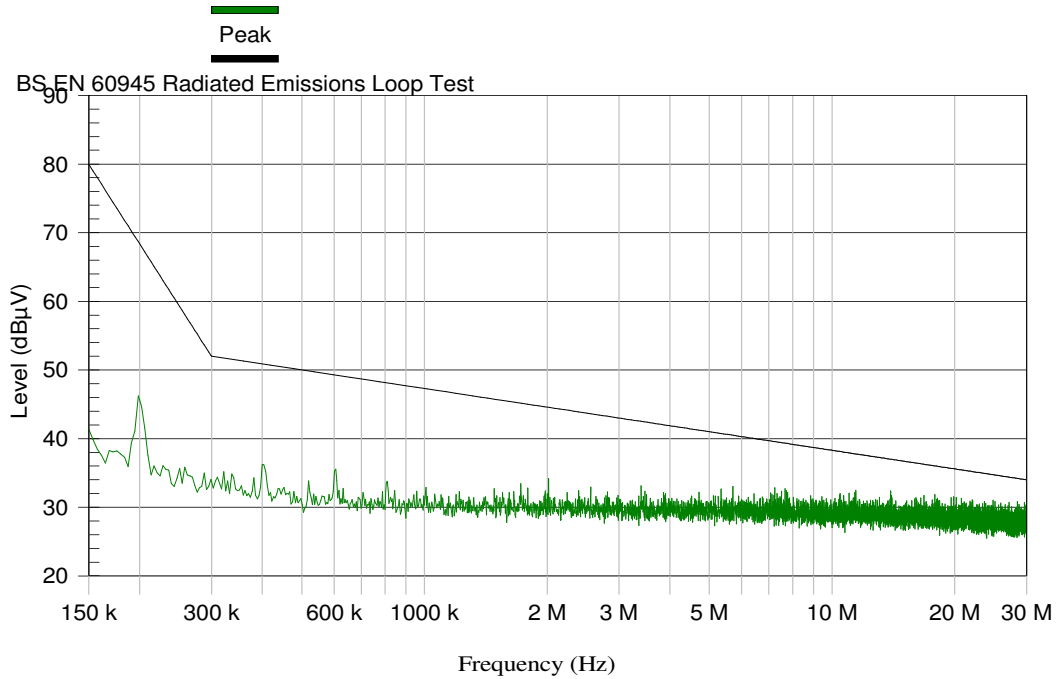


Figure 3 Radiated Emissions 150kHz to 30MHz Loop Side on

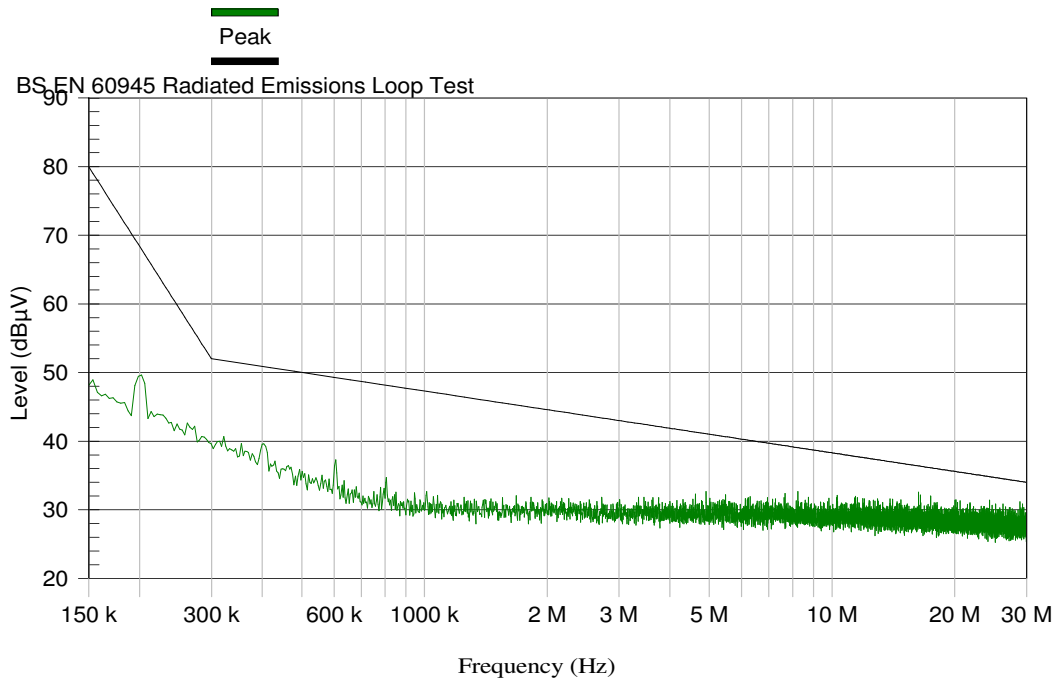


Figure 4 Radiated Emissions 150kHz to 30MHz Loop Face On

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

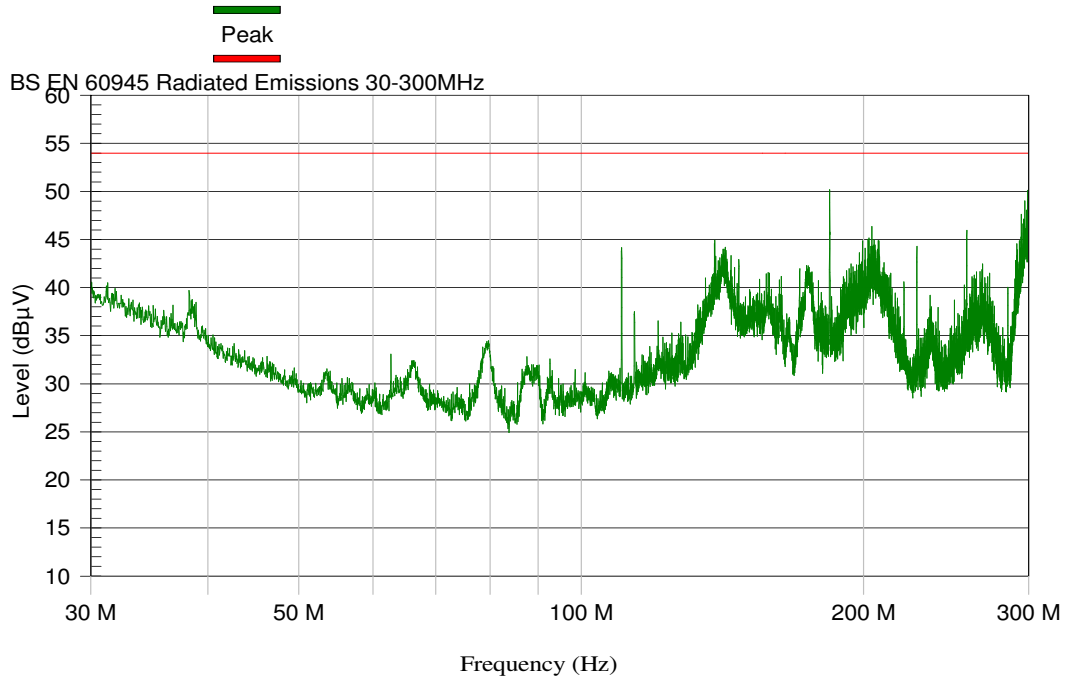


Figure 5 Radiated Emissions 30MHz to 300MHz

Frequency (MHz)	Angle	Polarisation	Height (m)	QP Level (dBµV/m)	QP Margin (dB)
184.102	85	V	1	48.8	-5.2
297.266	45	H	1	33.8	-20.2
297.312	337.5	V	1	34.9	-19.1
299.293	315	V	1	35.1	-18.9
299.325	315	H	1	32.2	-21.8

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

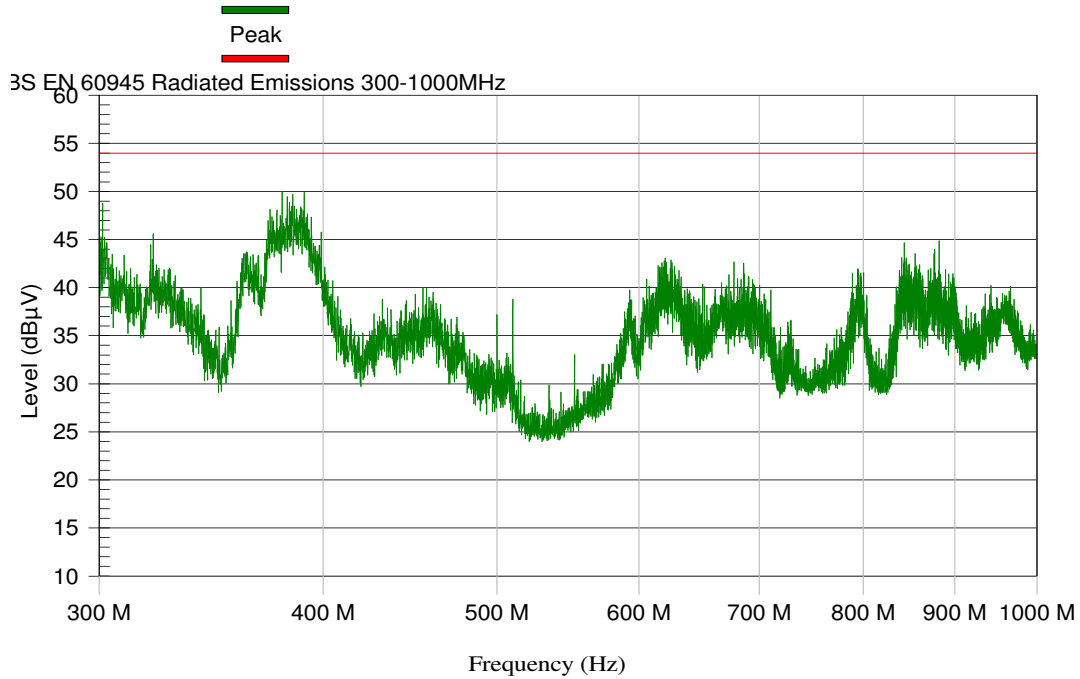


Figure 6 Radiated Emissions 300MHz to 1GHz

Frequency (MHz)	Angle	Polarisation	Height (m)	QP Level (dBµV/m)	QP Margin (dB)
376.754	110	V	1	39.8	-14.2
380.223	112.5	V	1	39.2	-14.8
382.33	90	V	1	40.7	-13.3
385.516	90	V	1	41.2	-12.8
389.913	90	V	1	41	-13

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

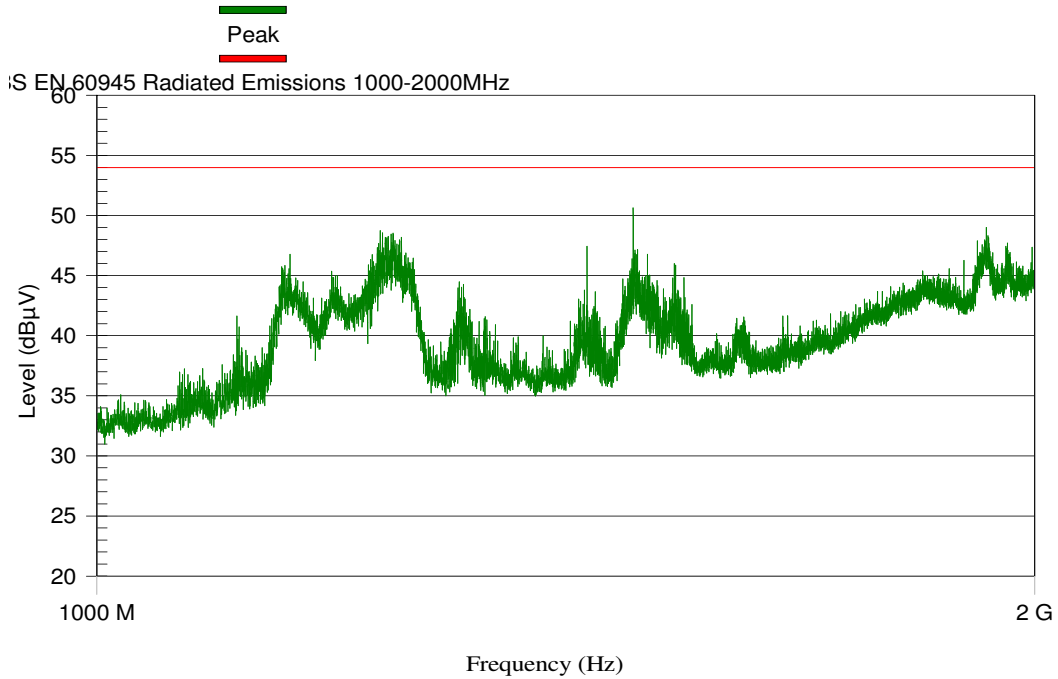


Figure 7 Radiated Emissions 1GHz to 2GHz

Frequency (MHz)	Angle	Polarisation	Height (m)	QP Level (dBµV/m)	QP Margin (dB)
1232.118	267.5	V	1	40.9	-13.1
1233.281	267.5	V	1.3	41.5	-12.5
1246.548	292.5	V	1	41.3	-12.7
1487.375	337.5	V	1.1	43.2	-10.8
1928.452	90	V	1	41.9	-12.1

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

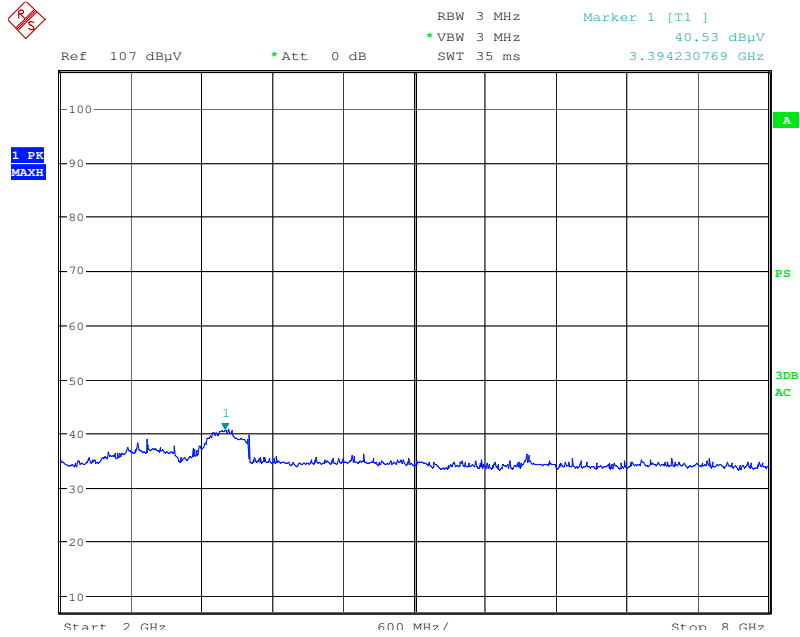


Figure 8 Radiated Emissions 450ns Pulse width 2GHz to 8GHz

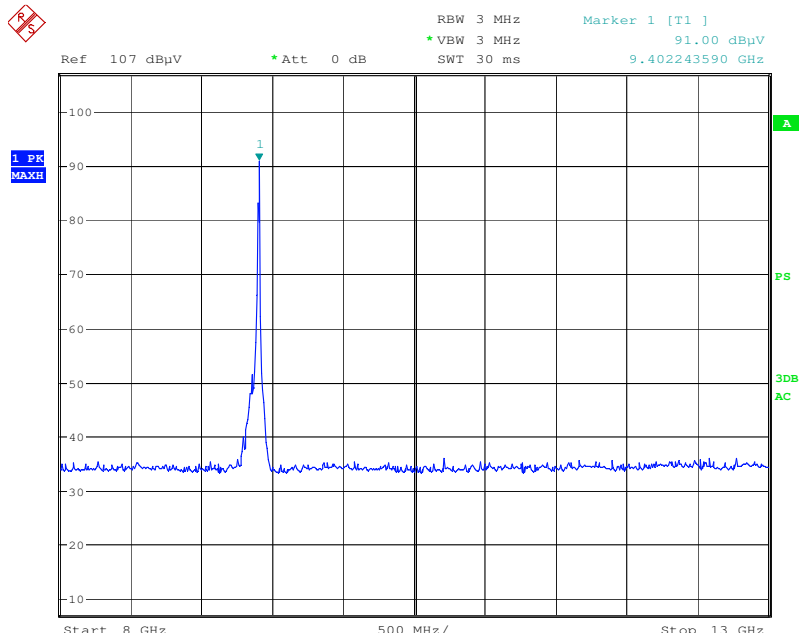


Figure 9 Radiated Emissions 450ns Pulse width 8GHz to 13GHz

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

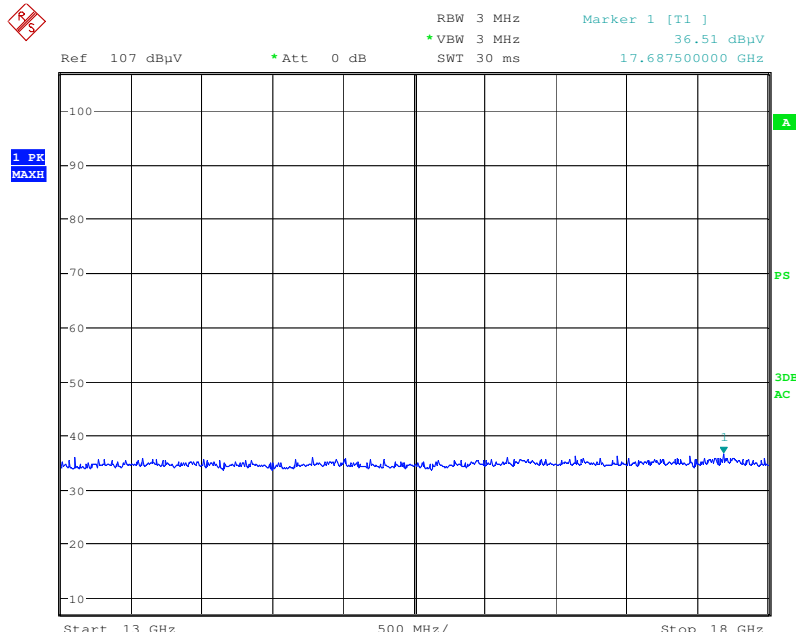


Figure 10 Radiated Emissions 450ns Pulse width 13GHz to 18GHz

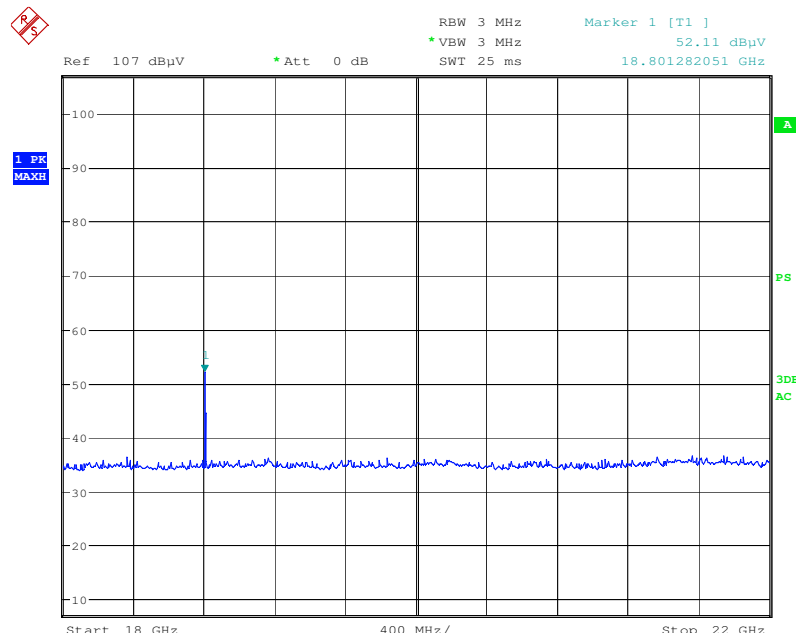


Figure 11 Radiated Emissions 450ns Pulse width 18GHz to 22GHz

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

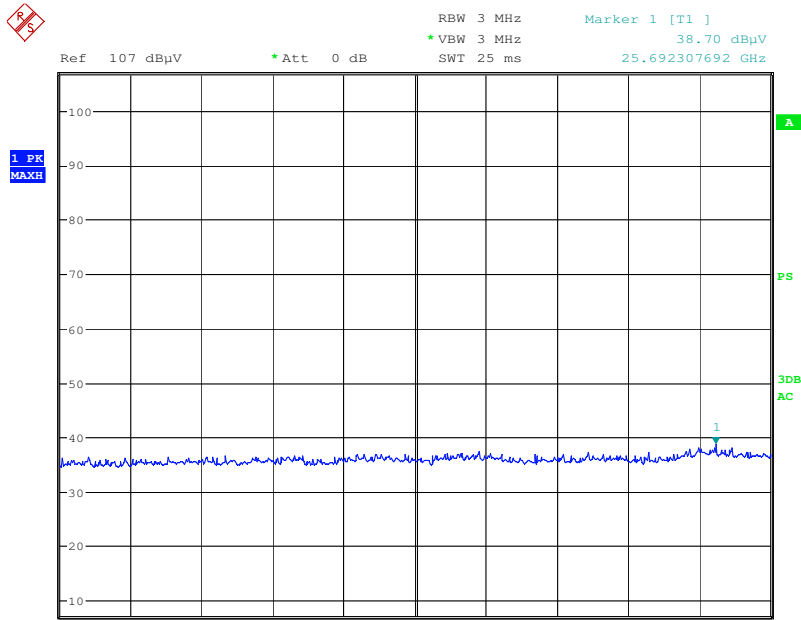


Figure 12 Radiated Emissions 450ns Pulse width 22GHz to 26GHz

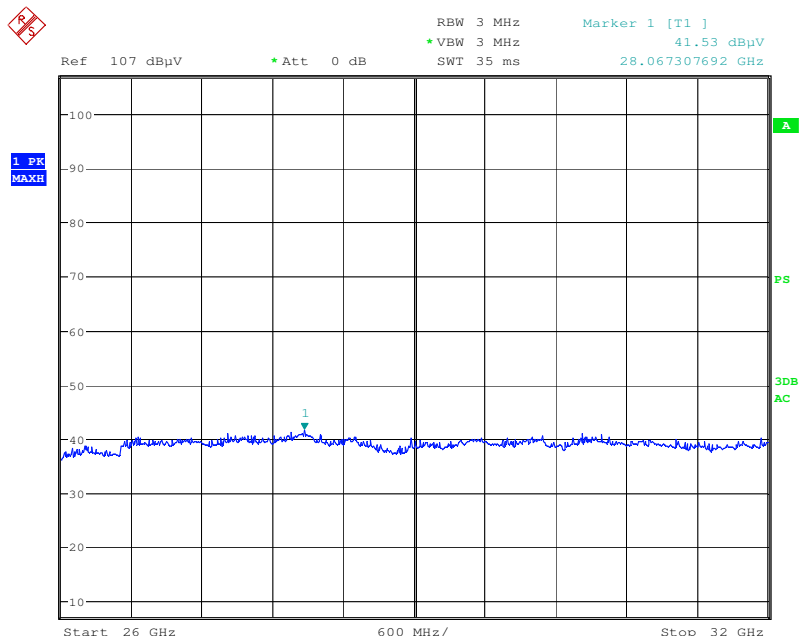


Figure 13 Radiated Emissions 450ns Pulse width 26GHz to 32GHz

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

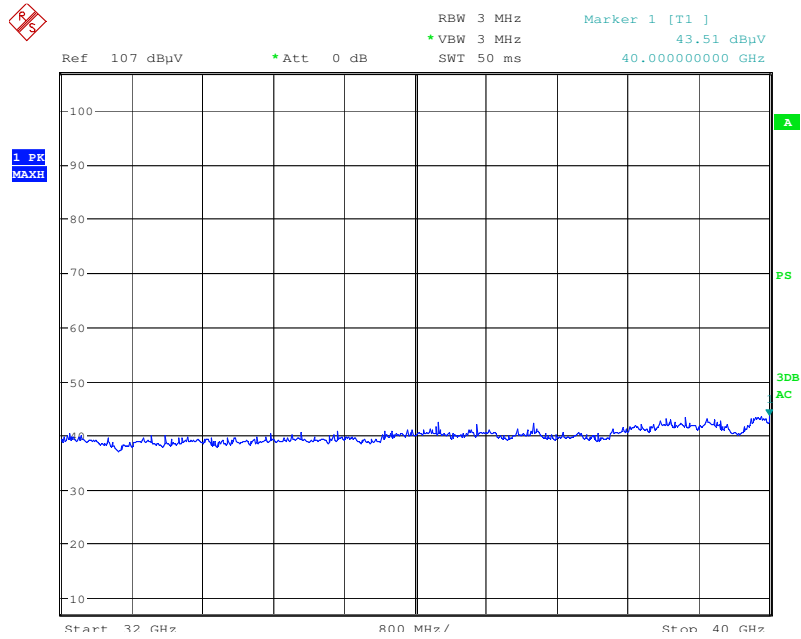


Figure 14 Radiated Emissions 450ns Pulse width 32GHz to 40GHz

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

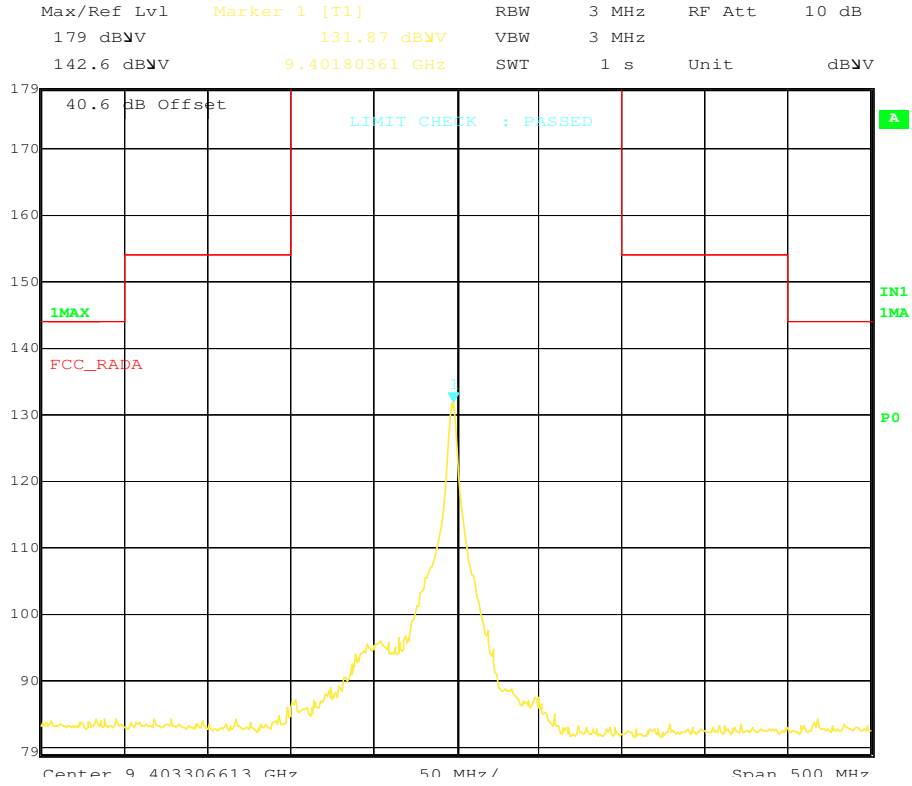


Figure 15 Main Pulse Measurement 450ns Pulse (Antenna Not fitted)

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

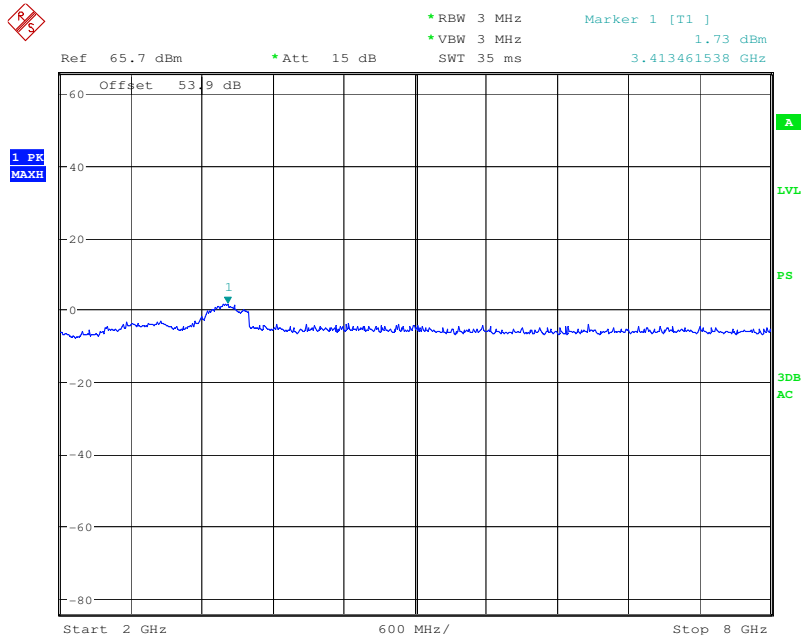


Figure 16 Conducted Emissions 450ns Pulse 2GHz to 8GHz

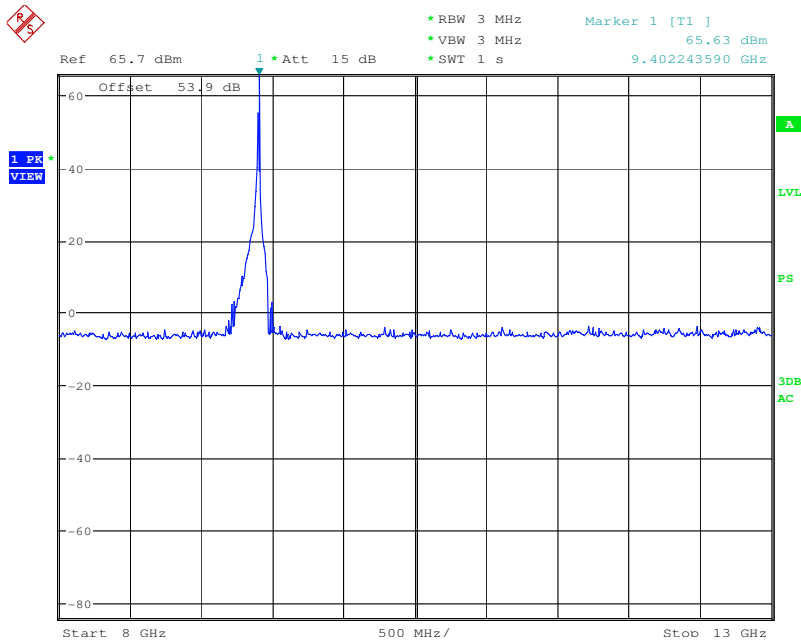


Figure 17 Conducted Emissions 450ns Pulse 8GHz to 13GHz

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

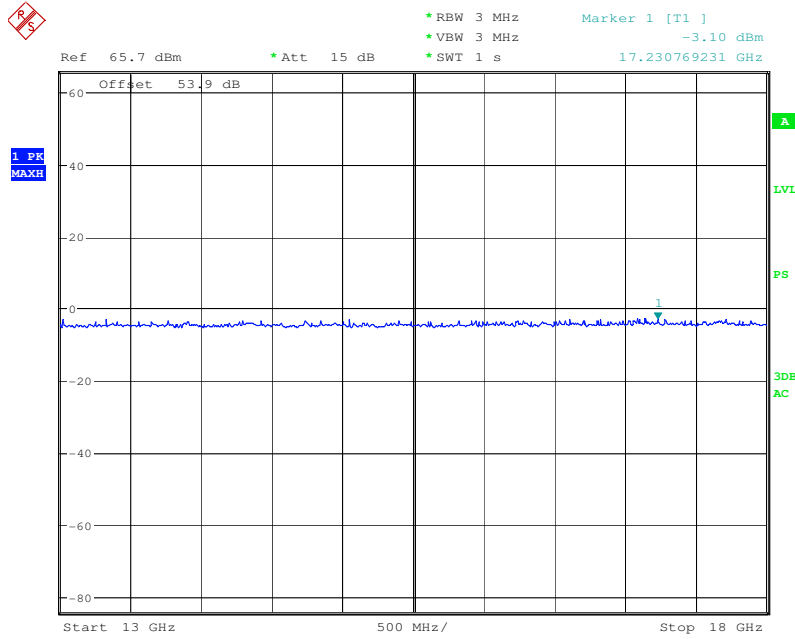


Figure 18 Conducted Emissions 450ns Pulse 13GHz to 18GHz

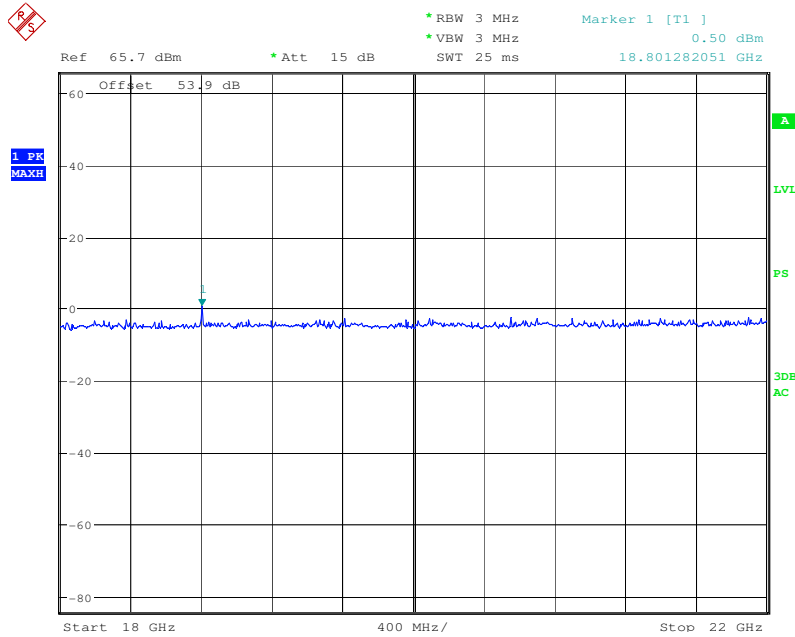


Figure 19 Conducted Emissions 450ns Pulse 18GHz to 22GHz

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

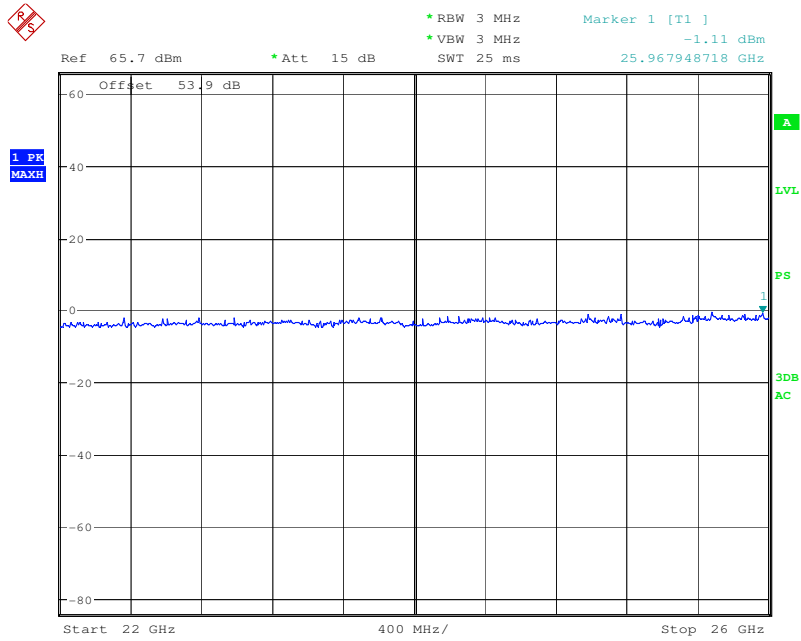


Figure 20 Conducted Emissions 450ns Pulse 22GHz to 26GHz

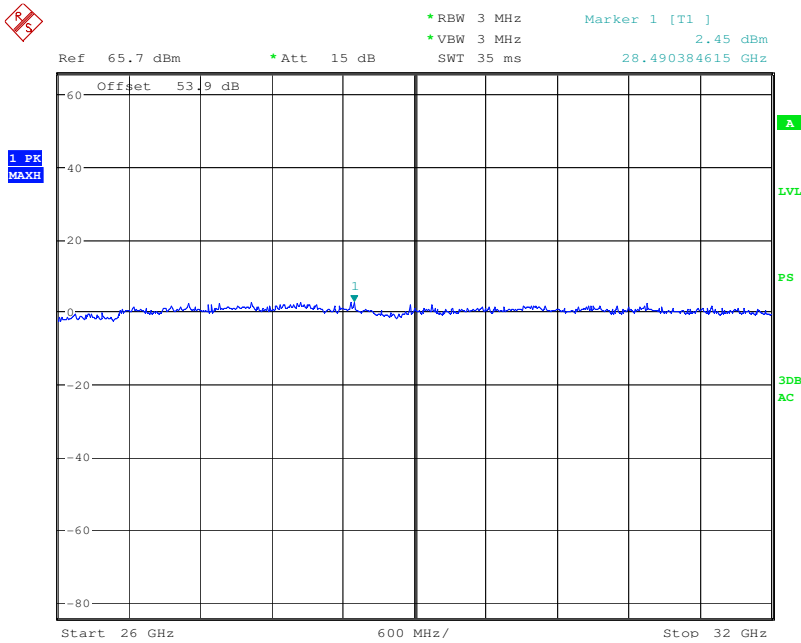


Figure 21 Conducted Emissions 450ns Pulse 26GHz to 32GHz

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

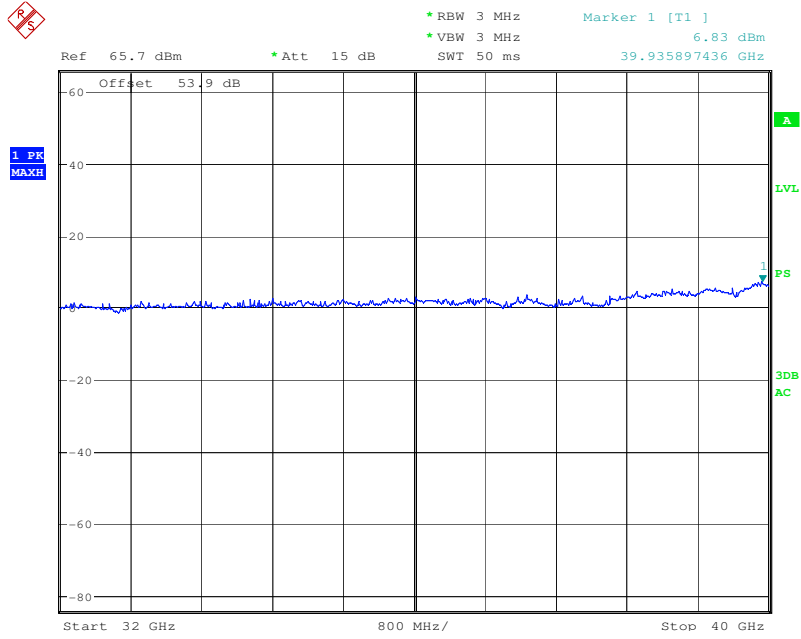


Figure 22 Conducted Emissions 450ns Pulse 32GHz to 40GHz

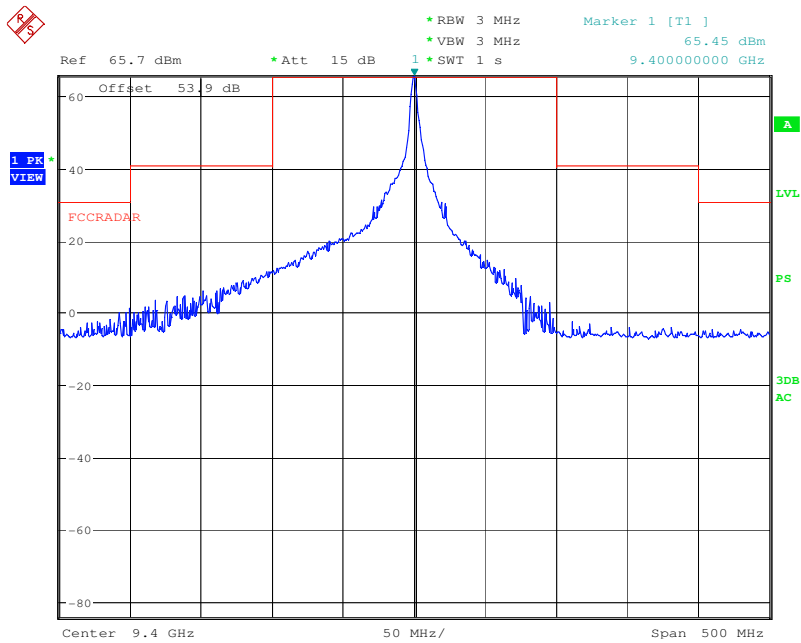


Figure 23 Main Pulse Measurement 450ns Pulse

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

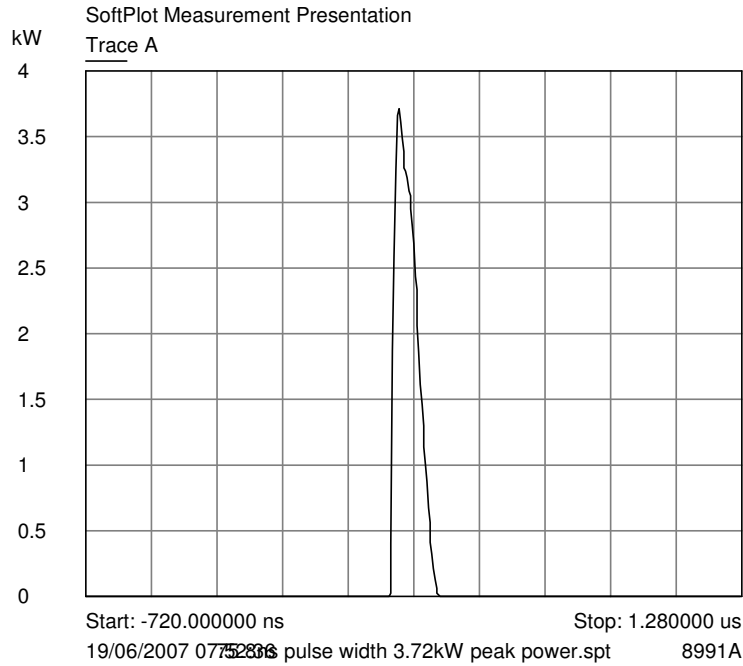


Figure 24 Pulse Characterisation 75ns

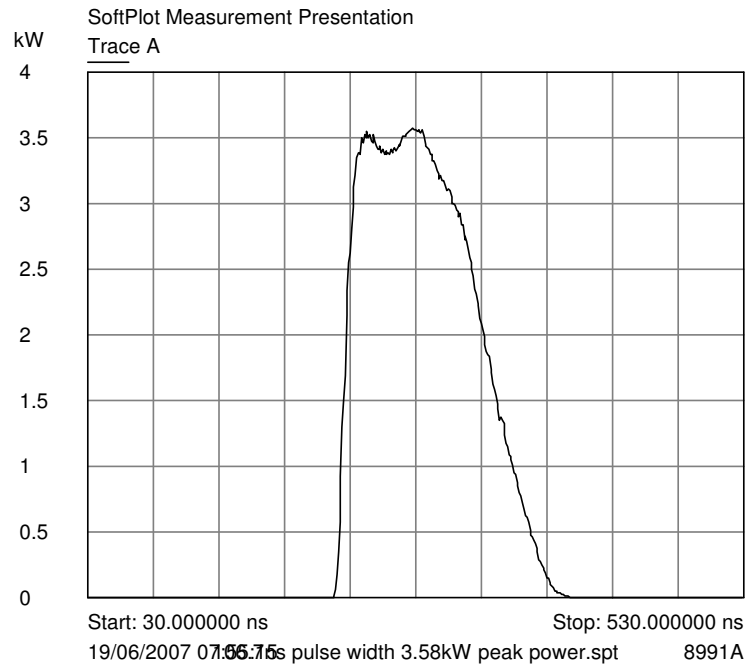


Figure 25 Pulse Characterisation 100ns

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

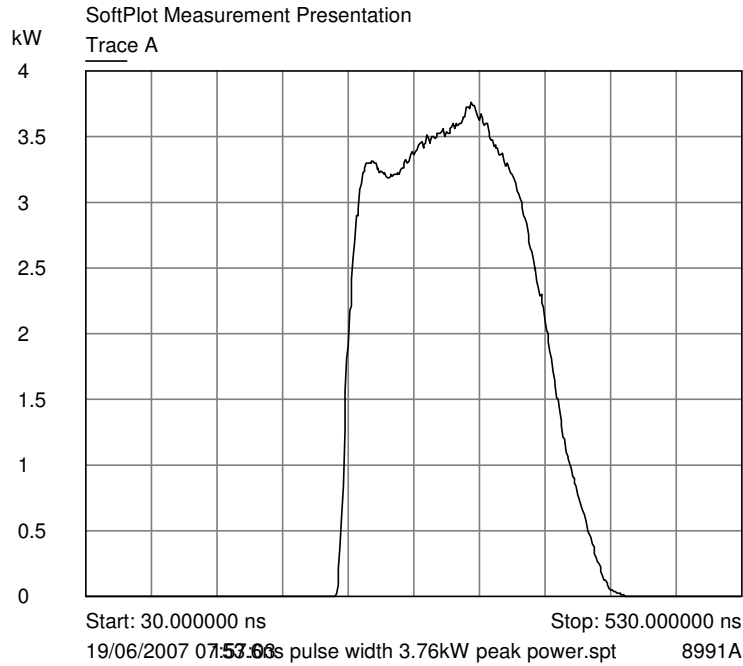


Figure 26 Pulse Characterisation 150ns

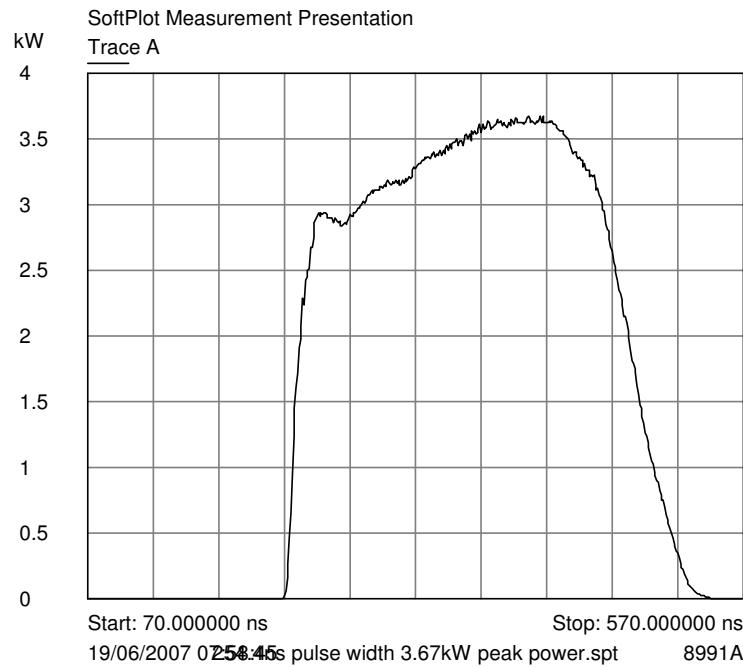


Figure 27 Pulse Characterisation 250ns

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

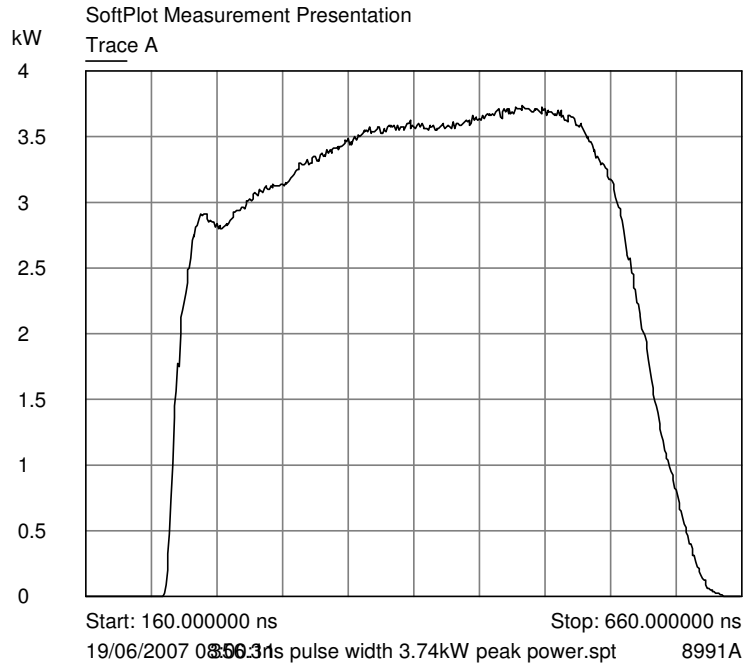


Figure 28 Pulse Characterisation 350ns

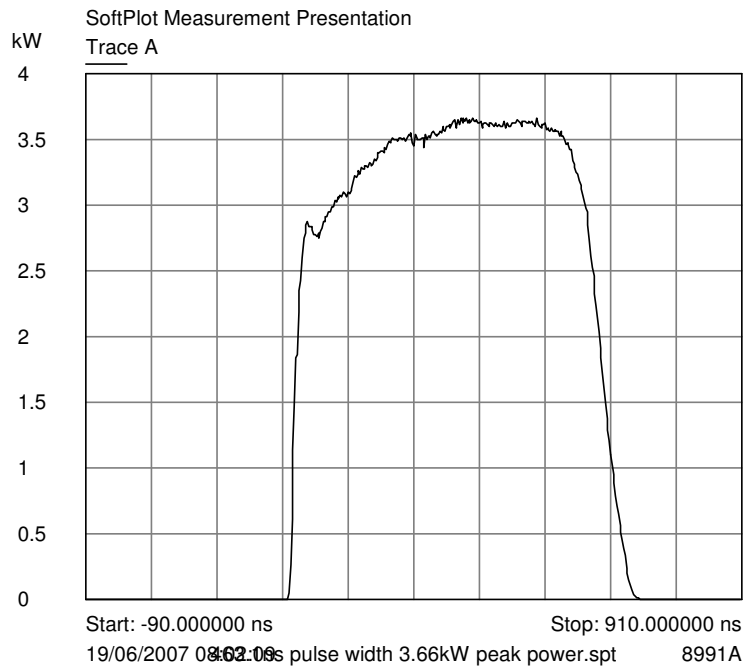


Figure 29 Pulse Characterisation 450ns

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

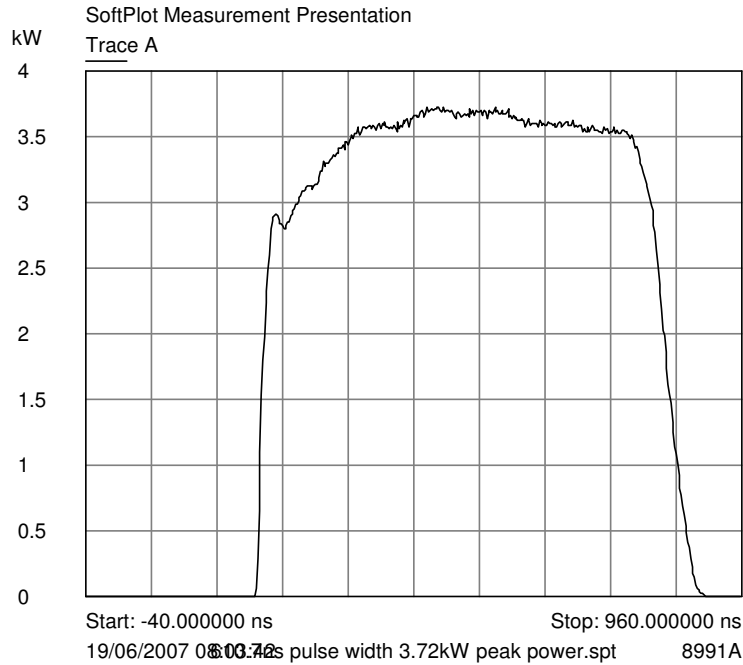


Figure 30 Pulse Characterisation 600ns

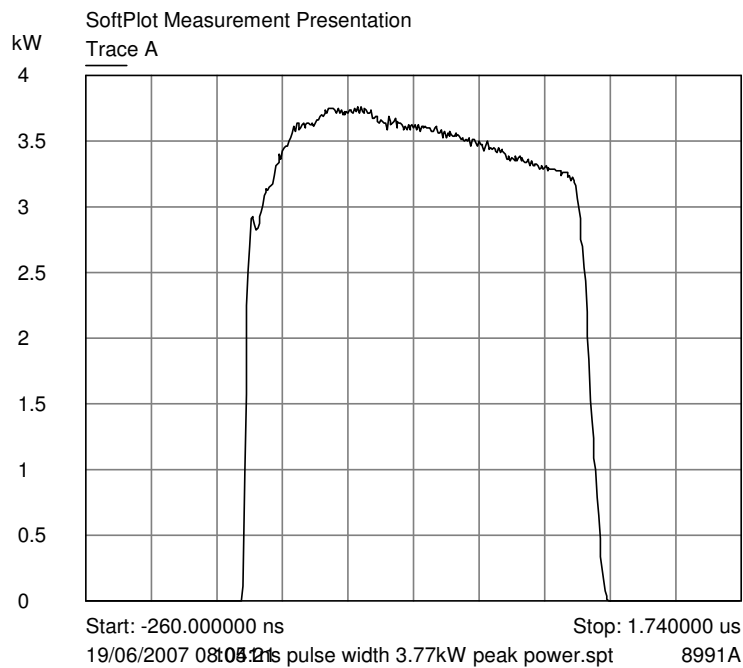


Figure 31 Pulse Characterisation 1000ns

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

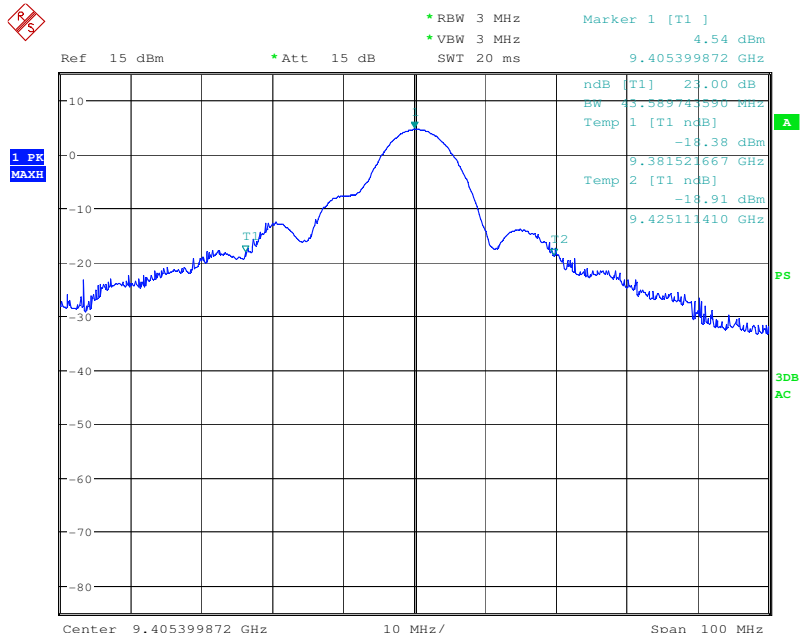


Figure 32 Occupied Bandwidth 75ns Pulse

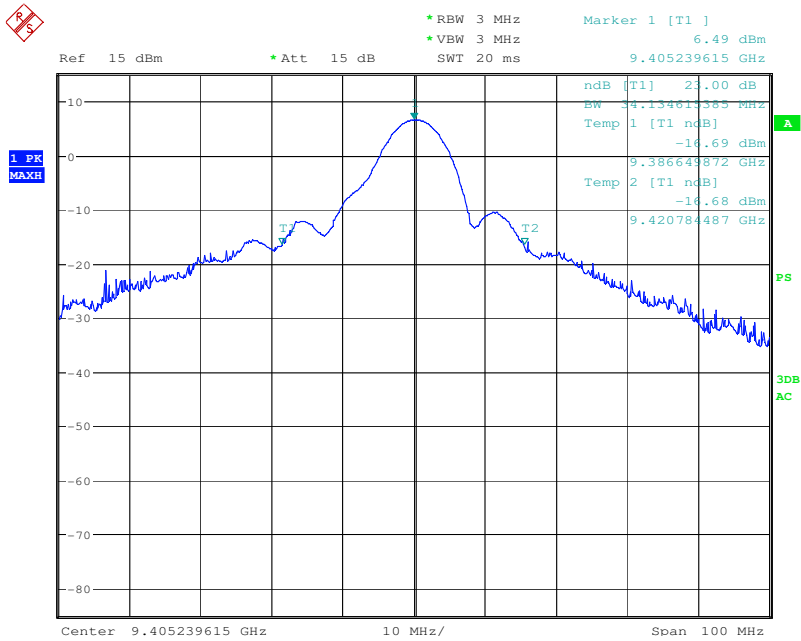


Figure 33 Occupied Bandwidth 100ns Pulse

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

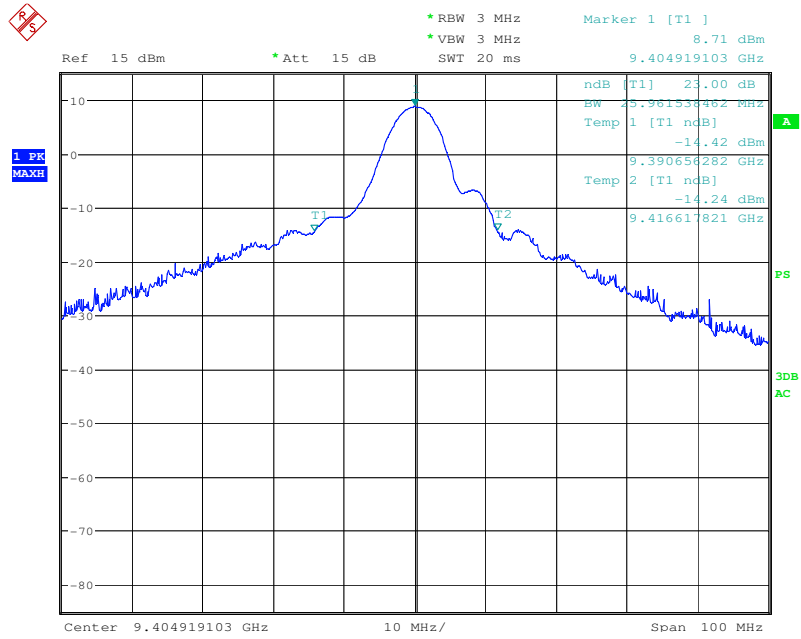


Figure 34 Occupied Bandwidth 150ns Pulse

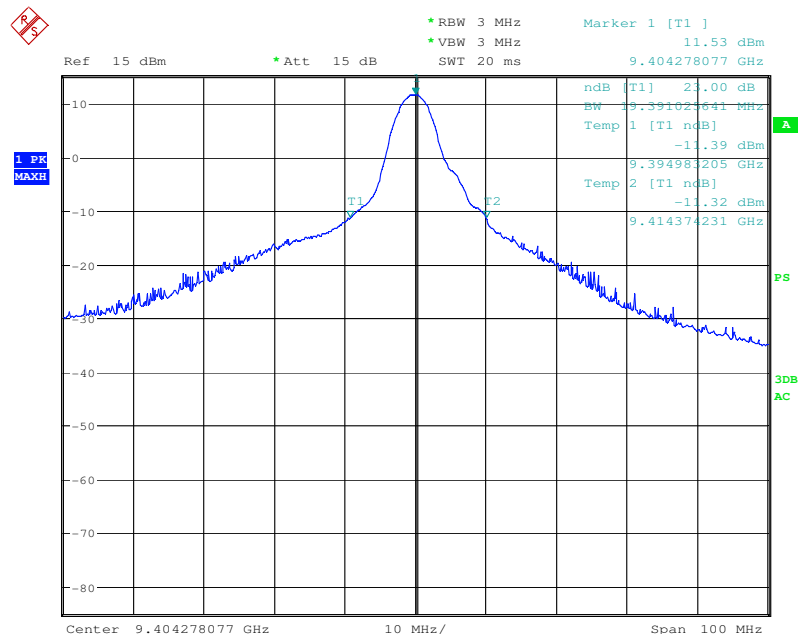


Figure 35 Occupied Bandwidth 250ns Pulse

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

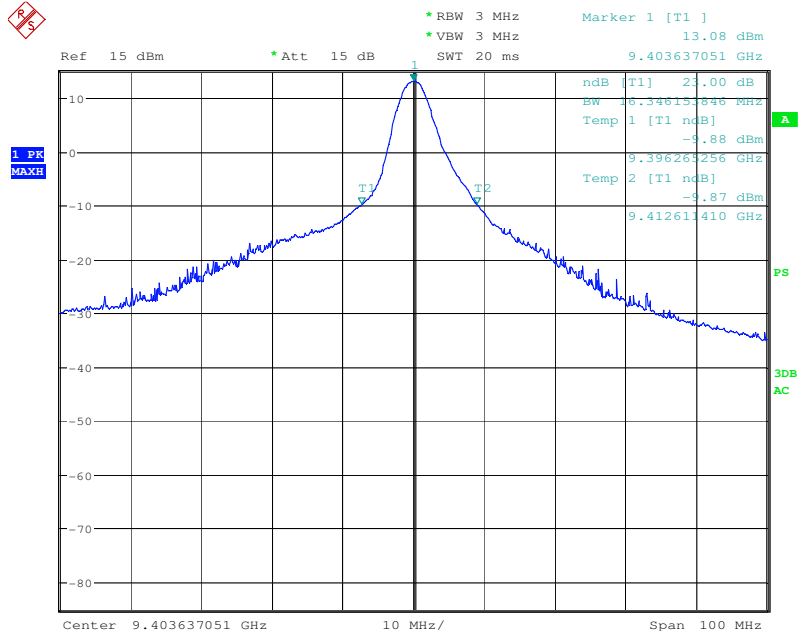


Figure 36 Occupied Bandwidth 350ns Pulse

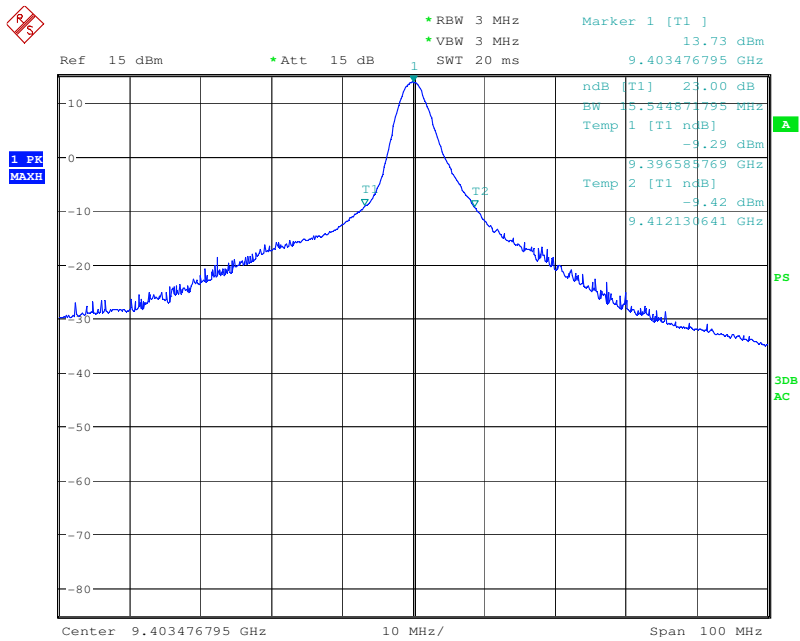


Figure 37 Occupied Bandwidth 450ns Pulse

Test of: Raymarine Ltd.
4kW Open Array Digital Radar
FCC Part 80: 1998 and
FCC Part 2: 1998

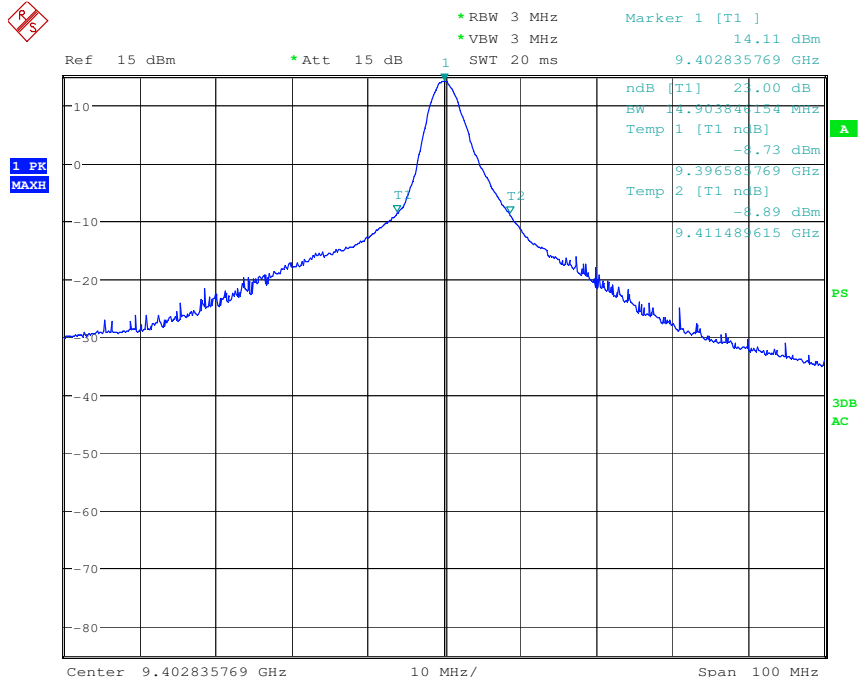


Figure 38 Occupied Bandwidth 600ns Pulse

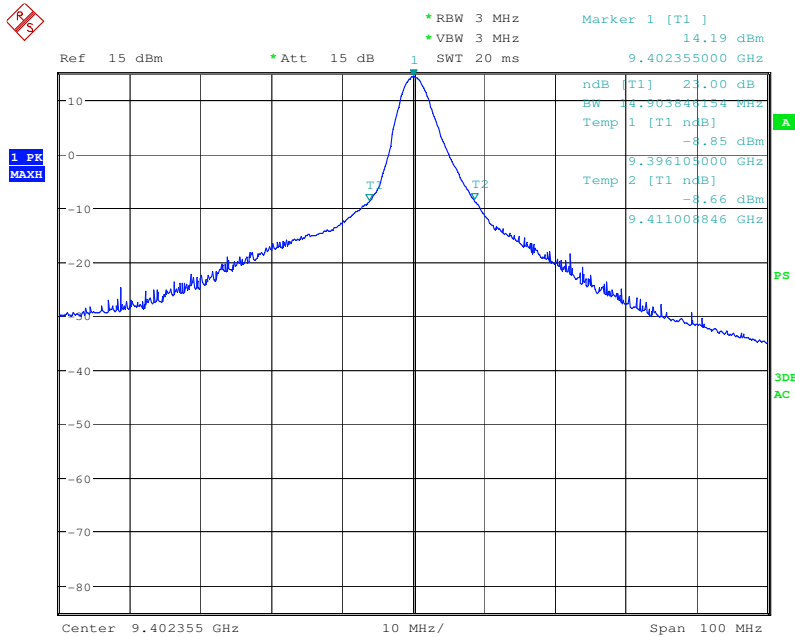


Figure 39 Occupied Bandwidth 1000ns Pulse