



## TEST REPORT

### EMC DEPARTMENT RAYMARINE LTD

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS

To: FCC Part 80: 1998  
and FCC Part 2:1998

(Leisure Marine Radar Equipment)

Test Report Serial No. 555/1000

<p>This Test Report is issued under the authority of: Chris Bird, Approvals Manager</p>	<p>Checked By: P. Pitt</p> <p><i>P.D. Pitt</i></p>
<p>Tested By: P.Bowen</p> <p><i>P.Bowen</i></p>	
<p>Issue Date: 29<sup>th</sup> October, 2002</p>	<p>Test Dates: 12<sup>th</sup> September 2002 to 24<sup>th</sup> October 2002</p>

**RAYMARINE LTD.**

**EMC Department**

**Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998**

**TEST REPORT  
No. 555/1000  
Page 2 of 80  
Issue Date: 29-10-2002**

---

**Table of Contents**

1. Client Information.....3

2. Equipment Under Test.....4

3. Test Specification, Methods and Procedures.....6

4. Deviations from the Test Specification.....7

6. Operation of the EUT during testing.....8

7. Measurements, Examinations and derived results.....12

8. Measurement Uncertainty.....23

Appendix A. Test Equipment used.....24

Appendix B. Measurement Methods..... 26

Appendix C. Test Configuration Drawings.....28

Appendix D. Graphical Test Results.....32

**RAYMARINE LTD.**

**EMC Department**

**Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998**

---

**TEST REPORT**

**No. 555/1000**

**Page 3 of 72**

**Issue Date: 29-10-2002**

## **1. Client Information**

<b>Company Name</b>	Raymarine Ltd.
<b>Address:</b>	Robinson Way Anchorage Park Portsmouth Hampshire PO3 5TD England, U.K.
<b>Contact Name:</b>	Mr. C. Bird, Approvals Manager

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 4 of 72

Issue Date: 29-10-2002

## **2. Equipment Under Test (EUT)**

### **2.1. Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	Raymarine		
<b>Model Name or Number:</b>	'Pathfinder' RL72RC PLUS (Comprised of a Scanner with micropatch antenna and a Display Unit/Chartplotter)		
<b>Unique Type Identification:</b>	2D 2kW Scanner with 18" patch antenna	M92650	
	RL70RC Plus Display/Chartplotter	E52032	
<b>Serial Number:</b>	Scanner Unit:	EMC110	
	Display/Chartplotter:	EMC201	
<b>Country of Manufacture:</b>	England, U.K.		
<b>FCC ID Number:</b>	PJ5MTX2-S3		
<b>Date of Receipt:</b>	2 <sup>nd</sup> September, 2002		

### **2.2. Description of EUT**

The equipment under test is an X-band marine radar intended for use on leisure craft and small workboats, and is comprised of:

Scanner Unit: 2kW X-band transmitter with 18 inch microstrip patch array antenna.

Display Unit: 7 inch mono LCD with chart reader and with Seataalk, NMEA and hsb<sup>2</sup> interface ports.

### **2.3. Modifications incorporated in EUT**

The EUT has not been modified from what is described by the Model Name and Unique Type Identification stated above.

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 5 of 72

Issue Date: 29-10-2002

---

## **2.4. Additional information related to Testing**

<b>Power Supply Requirement:</b>	Nominal 12-24V DC supply
<b>Intended Operating Environment:</b>	Leisure Marine & Small Workboats
<b>Weight:</b>	Scanner: 6.5kg (14.3lbs) Display 1.2kg (2.6lbs)
<b>Dimensions:</b>	Scanner: 468mm dia x 227mm height Display: : w 223mm x h 205mm x d 75mm
<b>Interface Ports:</b>	Power and 2 x NMEA in Seataalk NMEA out hsb <sup>2</sup>

## **2.5. Support Equipment**

No support equipment was required to exercise the EUT during testing.

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 6 of 72

Issue Date: 29-10-2002

---

### **3. Test Specification, Methods and Procedures**

#### **3.1. Test Specification**

<b>Reference:</b>	FCC Part 80: 1998 and FCC Part 2:1998
<b>Title:</b>	Code of Federal Regulations, Part 80 (47CFR): 1998 Stations in the maritime services  Code of Federal Regulations, Part 2 (47CFR): 1998 Frequency Allocations and radio treaty matters; general rules and regulations
<b>Comments:</b>	The test facility used for the radiated emissions portions of these tests is an alternative test site as described in ANSI C63.4-2001, being a 3m test range within a semi-anechoic chamber and meeting the NSA +/-4dB criterion with antenna height scanning from 1 – 4 metres.
<b>Purpose of Test:</b>	To determine, for the purposes of certification, whether the equipment complied with the requirements of the specification following transmitter design changes to comply with ITU-R M1177, which is effective from January 1 <sup>st</sup> 2003.

#### **3.2. Methods and Procedures**

The methods and procedures used were as detailed in:

ANSI C63.2-1996

Title: American National Standard for Electromagnetic Noise and Field Strength Instrumentation, 10 Hz to 40 GHz – Specifications

ANSI C63.4-2001

Title: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI C63.5-1998

Title: American National Standard for Electromagnetic Compatibility – Radiated Emission Measurements in Electromagnetic Interference (EMI) Control – Calibration of Antennas (9 kHz to 40 GHz)

CISPR 16-1 (1999)

Title: Specification for radio disturbance and immunity measuring apparatus and methods  
Part 1: Radio disturbance and immunity measuring apparatus

CISPR 16-4 (2002)

Title: Specification for radio disturbance and immunity measuring apparatus and methods  
Part 4: Uncertainty in EMC measurements

**RAYMARINE LTD.**

**EMC Department**

**Test of:     Raymarine Ltd.  
                 Pathfinder RL72RC PLUS  
                 FCC Part 80:1998  
                 and FCC Part 2: 1998**

**TEST REPORT**

**No. 555/1000**

**Page 7 of 72**

**Issue Date: 29-10-2002**

---

### **3.3. Definition of Measurement Equipment**

The measurement equipment used complied with the requirements of the standards referenced in the Methods and Procedures section above. Appendix A contains a list of the test equipment used.

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

---

TEST REPORT

No. 555/1000

Page 8 of 72

Issue Date: 29-10-2002

#### **4. Deviations from the Test Specification**

2.1047(d) Modulation characteristics – *Other types of equipment*. No curves supplied



---

## **5. Operation of the EUT during Testing**

### **5.1. Operating Conditions**

5.1.1. Radiated Emissions, 9kHz to 40GHz: The EUT was located on a non-conducting support above a turntable on a 3m test range within a semi-anechoic chamber (Raymarine Site 3)

5.1.2. The EUT was located in a laboratory environment for all other tests.

5.1.3. During testing, the EUT was powered by a nominal 12V DC supply except when measuring Frequency Variation with Voltage. [FCC Part 2, 1055(d)]

### **5.2. Operating Modes**

The EUT was tested in the following operating modes:

5.2.1. Radiated emissions: Transmitting into a rotating non-reflective load with the transmitter set to a 450ns pulse width, 1.4kHz PRF. This mode is defined as being likely to be the worst case as regards EMC. Additionally, the longest and shortest pulse widths (1000ns and 75ns) were used, with the PRF appropriate to the pulse width in use, when measuring emissions in the vicinity of the magnetron frequency.

5.2.2. Conducted emissions: Transmitting into a fixed non-reflective load with the transmitter set to a 450ns pulse width, 1.4kHz PRF. This mode is defined as being likely to be the worst case as regards EMC. Additionally, the longest and shortest pulse widths (1000ns and 75ns) were used, with the PRF appropriate to the pulse width in use, when measuring emissions in the vicinity of the magnetron frequency.

5.2.3. Variation of transmit frequency with voltage and temperature: The transmitter was set to the half nautical mile range (75ns pulse width) and the six nautical mile range (1000ns pulse width).

5.2.4. Pulse width, PRF and Occupied Bandwidth. Transmitting into a fixed non-reflective load.

### **5.3. Configuration and peripherals**

5.3.1. The scanner unit was connected to the display unit with the standard cable of 15 m length. A transmit dummy load was connected to the scanner unit antenna port. All display unit interface ports were connected to dummy loads using the maximum length of cable specified for the particular port, or 20 m where this is less than the maximum specified. A 12V DC supply was connected to the Display Unit.

5.3.2. This configuration is defined as being likely to be the worst case as regards emissions.

5.3.3. Appendix A of this report contains a full list of test equipment used and Appendix C contains a schematic diagram of the test configuration.

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 10 of 72

Issue Date: 29-10-2002

---

## **6. Summary of Test Results**

### **6.1 Summary of Tests**

#### **6.1.1. Radiated Spurious Emissions**

Frequency Range	Specification Reference	Compliance Status
9kHz to 40GHz	2.1053 and 80.211(f)	Complied

#### **6.1.2. Conducted Spurious Emissions**

Frequency Range	Specification Reference	Compliance Status
9kHz to 40GHz	2.1051 and 80.211(f)	Complied

#### **6.1.3. RF Power Output**

##### **6.1.3.1. Peak Power**

Nominal Pulswidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1046(a) and 80.215(a)	Complied

##### **6.1.3.2. Average Power**

Nominal Pulswidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1046(a) and 80.215(a)	Complied

##### **6.1.3.3. Pulse Width**

Nominal Pulswidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1046(a) and 80.215(a)	Complied

##### **6.1.3.4. PRF**

Nominal Pulswidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1047(d) and 80.213(g)	Complied

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 11 of 72

Issue Date: 29-10-2002

---

#### **6.1.4. Variation of Frequency with Voltage**

##### **6.1.4.1. 75ns**

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
75	2.1055(d)	Complied

##### **6.1.4.2. 1000ns**

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
1000	2.1055(d)	Complied

#### **6.1.5. Variation of Frequency with Temperature**

##### **6.1.5.1. 75ns**

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
75	2.1055(a and b)	Complied

##### **6.1.5.2. 1000ns**

Nominal Pulsewidth (ns)	Specification Reference	Compliance Status
1000	2.1055(a and b)	Complied

#### **6.1.6. Occupied Bandwidth**

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	2.1049(i) and 80.205	Complied

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 12 of 72

Issue Date: 29-10-2002

---

#### **6.1.7. Transmitter Frequency Tolerance**

Nominal Pulsewidth Range (ns)	Specification Reference	Compliance Status
75 to 1000	80.209(b)	Complied

#### **6.1.8. Suppression of Interference Aboard Ships**

80.217. When the radar is in the Standby mode of operation, the local oscillator is automatically switched off.

#### **6.2. Location of Tests**

All the measurements described in this report were performed in the EMC Department at the premises of Raymarine Ltd., Robinson Way, Anchorage Park, Portsmouth, Hampshire PO3 5TD, England, U.K.

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 13 of 72

Issue Date: 29-10-2002

---

## **7. Measurements, Examinations and Derived Results**

### **7.1. General Comments**

- 7.1.1. This section contains test results only. Details of the test methods and procedures can be found in Appendix B of this report.
- 7.1.2. Measurement uncertainties are stated in accordance with the requirements of CISPR 16-4:2002. Please refer to Section 8 for details of measurement uncertainties.
- 7.1.3. The highest frequency generated by the EUT is 9.4GHz. Consequently, tests were performed up to 40GHz.

### **7.2. Field Strength Measurements**

#### **7.2.1. Magnetic Field Strength: Frequency Range 9 kHz to 30 MHz**

- 7.2.1.1. Plots of measurements using a peak detector can be found in Appendix D.
- 7.2.1.2. No emissions exceeded a level of 50dBuV/m.
- 7.2.1.3. Details of the limit line calculation can be seen in Appendix B (B1.1 – B1.5).

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 14 of 72

Issue Date: 29-10-2002

---

### **7.2.2.Electric Field Strength Measurements: Frequency Range 30 MHz to 1000 MHz**

7.2.2.1. Plots of measurements using a peak detector can be found in Appendix D.

7.2.2.2. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector.

7.2.2.3. Details of the limit line calculation can be seen in Appendix B.(B1.1 – B1.5)

Frequency (MHz)	Antenna Polarization	QP Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result
41.52	Vertical	21.0	106.2	85.2	Complied
190.02	Horizontal	46.7	106.2	59.5	Complied
266.04	Horizontal	52.9	106.2	53.3	Complied
380.04	Horizontal	41.3	106.2	64.9	Complied
456.06	Vertical	49.1	106.2	57.1	Complied
532.04	Horizontal	47.5	106.2	58.7	Complied
570.06	Horizontal	48.4	106.2	57.8	Complied
646.05	Vertical	43.1	106.2	63.1	Complied
677.94	Vertical	42.8	106.2	63.4	Complied
799.20	Horizontal	33.8	106.2	72.4	Complied

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 15 of 72

Issue Date: 29-10-2002

---

### **7.2.3. Electric Field Strength Measurements: Frequency Range: 1GHz to 40GHz**

7.2.3.1. Plots of measurements using a peak detector can be found in Appendix D.

7.2.2.2. The following table lists frequencies at which emissions were measured using Peak detector functions, and were found to be less than 20dB from the limit line. Levels which were found to be greater than 20dB below the limit line were not recorded.

7.2.2.3. Details of the limit line calculation can be seen in Appendix B. (B1.1 – B1.5).

Frequency (GHz)	Antenna Polarization	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Result
2.315	Horizontal	88.5	106.2	17.7	Complied
10.469	Vertical	94.5	106.2	11.7	Complied
17.335	Vertical	86.4	106.2	19.8	Complied
18.785	Vertical	98.2	106.2	8.0	Complied
23.440	Horizontal	89.3	106.2	16.9	Complied
28.176	Vertical	89.2	106.2	17.0	Complied
31.056	Vertical	87.7	106.2	18.5	Complied
35.950	Vertical	89.5	106.2	16.7	Complied

## 7.3 Conducted Emissions

### 7.3.1. Peak Detector measurements on RF port

7.3.1.1. The design of the RF coupling from the magnetron to the antenna forms an effective high pass/ bandpass filter arrangement. The radar peak energy level requires considerable attenuation in order to prevent the analyser from going into compression. This limits the maximum dBc figure that can be obtained without changing the resolution band-width of the analyser. Since the signal is wideband compared to the resolution bandwidth, it is critical to the measurement accuracy that the resolution bandwidth settings remain consistent throughout the testing where possible.

7.3.1.2. Due to the use of waveguide on the antenna port, the lowest frequency of measurement was increased to 6GHz. The following table lists frequencies at which emissions or the highest noise floor were measured using a Peak Detector. Note that for measurements above 26.5GHz, the mixer conversion process produces a "true" and "spurious" response for each signal. Only the true responses are detailed in the table - these are clearly identifiable as harmonics of the magnetron frequency. Plots of the scans can be found in Appendix D.

7.3.1.3. Measurements were performed from 6 GHz to 40GHz with the EUT set to 450ns. With the EUT set to both 75ns and 1000ns, measurements were performed within and around the transmitter frequency allocation.

#### 450ns Pulse

Frequency (GHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
8.906	-24.7	-13	11.7	Complied
18.79	-18.8	-13	5.8	Complied
28.19	-27.5	-13	14.5	Complied
37.49	-24.8	-13	11.8	Complied

#### 75ns Pulse

Frequency (GHz)	Level (dBm)	Limit (dBc)	Margin (dB)	Result
9.3099	2.36	-25	12.6	Complied
9.5148	-15.11	-25	27.7	Complied

#### 1000ns Pulse

Frequency (GHz)	Level (dBm)	Limit (dBc)	Margin (dB)	Result
9.3099	2.07	-25	12.9	Complied
9.5106	-18.80	-25	31.7	Complied



## **7.4 Peak Power**

7.4.1. These measurements were performed with the HP Peak Power Analyser and sensor connected to the EUT antenna port via a coupler and in-line attenuator.

<b>Pulse Width (ns)</b>	<b>Measured Power (dBm)</b>	<b>Corrected Power (kW)</b>
75	60.51	1124.60
100	61.07	1279.38
150	61.47	1402.81
250	61.67	1468.93
350	61.84	1527.57
450	62.02	1592.21
600	62.02	1592.21
1000	62.02	1592.21

Note 1: Power is measured at the antenna port and is less than the nominal 2kW magnetron output due to normal losses in the circulator and rotating joint.

Note 2: The power at the shorter pulse widths has been deliberately reduced to enhance short-range radar performance.

### **7.4.1. Pulse Width**

7.4.1.1. Plots can be found in Appendix D.

7.4.1.2. In order to determine the characteristics of the various pulses, the HP Peak Power Analyser was connected to the EUT antenna port via a coupler and inline attenuator.

<b>Nominal Pulse Width (ns)</b>	<b>Measured Pulse Width (ns)</b>
75	73.852
100	103.972
150	151.697
250	254.491
350	361.277
450	451.098
600	602.794
1000	1037.92

## 7.5. Pulse Repetition Frequency

7.5.1. Plots can be found in Appendix D.

7.5.2. In order to determine the characteristics of the various pulses, the HP Peak Power Analyser and sensor was connected to the EUT antenna port via a coupler and in-line attenuator.

Pulse Width (ns)	Measured P.R.F. (kHz)
75	3.05810
100	3.05810
150	3.05810
250	2.48139
350	1.79856
450	1.40056
600	1.00000
1000	0.74184

Note 1: As the P.R.F. is jittered, the average interval between pulses was measured in order to determine the P.R.F.

## 7.6. Average Power

Nominal Pulse Width (ns)	Peak Power (kW)	P.R.F. (kHz)	Measured Pulse Width (ns)	Average Power (Watts)
75	1.1246	3.0581	73.852	0.2540
100	1.27938	3.0581	103.972	0.4068
150	1.40281	3.0581	151.697	0.6508
250	1.46893	2.48139	254.491	0.9276
350	1.52757	1.79856	361.277	0.9926
450	1.59221	1.40056	451.098	1.0059
600	1.59221	1.0000	602.794	0.9598
1000	1.59221	0.74184	1037.92	1.2260

Note 1: The previous subsections detail the results required to make the above calculation.

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 19 of 72

Issue Date: 29-10-2002

---

### **7.7. Variation of frequency with input voltage**

7.7.1. The frequency of the EUT was measured at each voltage.

#### **75ns**

<b>% of Nominal Volts</b>	<b>Volts (dc)</b>	<b>Measured Frequency (GHz)</b>
85% of 12.0	10.2	9.399549
100% of 12.0	12.0	9.399843
100% of 24.0	24.0	9.399911
115% of 24.0	27.6	9.399949

#### **1000ns**

<b>% of Nominal Volts</b>	<b>Volts (dc)</b>	<b>Measured Frequency (GHz)</b>
85% of 12.0	10.2	9.393418
100% of 12.0	12.0	9.393524
100% of 24.0	24.0	9.393824
115% of 24.0	27.6	9.393924

Note: The equipment can be operated from any voltage within the nominal range 12 to 24V without requiring any adjustment. Therefore, the testing was performed from 85% of the lowest to 115% of the highest operating voltage.

### **7.8. Variation of frequency with temperature**

The EUT scanner unit was situated in an environmental test chamber and set for normal operation at the shortest pulse width. The antenna port was connected via a coupler, microwave cable and in-line attenuator to the input of the HP70000 analyser, which is equipped with a precision frequency reference module.

The chamber was then set to -20C. After a 30-minute delay to allow for temperature stabilisation, the EUT frequency was monitored until there was no measurable frequency change. The frequency was recorded. The EUT was then set for normal operation at the longest pulse width, and the frequency monitored until there was no measurable frequency change. The frequency was recorded.

The chamber temperature was then increased by 10C and the process repeated at this temperature, and at further increments of 10C up to and including +50C.

#### **75ns**

Temperature C	Measured Frequency (GHz)
-20	9.409306
-10	9.406531
0	9.404669
+10	9.402431
+20	9.399888
+30	9.398156
+40	9.397319
+50	9.394213

#### **1000ns**

Temperature C	Measured Frequency (GHz)
-20	9.404063
-10	9.401338
0	9.400313
+10	9.398269
+20	9.396906
+30	9.395219
+40	9.393769
+50	9.391869

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 21 of 72

Issue Date: 29-10-2002

---

### **7.9.Occupied Bandwidth**

7.9.1. Plots can be found in Appendix D.

7.9.2. The 99.5% (-23dBc) power bandwidth was measured for each pulse width using the delta and bandwidth marker functions of the HP70000 analyser. Owing to the shape of the pulse it was not always possible to measure the bandwidth at the exact -23db point. Consequently, the next lower point was taken. This has the effect of slightly increasing the measured bandwidth above the actual 99.5% bandwidth.

<b>Nominal Pulse Width (ns)</b>	<b>99.5% Power Bandwidth (MHz)</b>
75	53.20
100	40.37
150	35.32
250	25.82
350	18.19
450	14.59
600	10.43
1000	9.64

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 22 of 72

Issue Date: 29-10-2002

## **7.10. Transmitter Frequency Tolerance**

**7.10.1. Specification:** 80.209(b) – “When pulse modulation is used in land and ship radar stations operating in the bands above 2.4GHz the frequency at which maximum emission occurs must be within the authorised bandwidth and must not be closer than  $1.5/T$  MHz to the upper and lower limits of the authorised bandwidth where “T” is the pulse duration in microseconds.”

### **7.10.2. Calculation**

Authorised Bandwidth: 9300MHz to 9500MHz

Specification Limits: [Lower] 9300 +  $1.5/T$   
[Upper] 9500 -  $1.5/T$

Transmitter Frequency Tolerances FCC ID PJ5MTX2-S3			
Nominal Pulse Width (ns)	Actual Pulse Width (ns)	Specification Limits (MHz)	
		Lower	Upper
75	73.852	9320.31	9479.69
100	103.972	9314.43	9485.57
150	151.697	9309.89	9490.11
250	254.491	9305.89	9494.11
350	361.277	9304.15	9495.85
450	451.098	9303.33	9496.67
600	602.794	9302.49	9497.51
1000	1037.92	9301.45	9498.55

From examining the transmitter frequency data from the Variation of Frequency with Voltage and Variation of Frequency with Temperature results pages, it can be seen that the transmitter is within the calculated specification.

## 8. Measurement Uncertainty

- 8.1 Measurement uncertainty was calculated after reference to CISPR 16-4:2002. In order to determine compliance with the limit for emissions tests, the specification states that, where the calculated uncertainty exceeds the value of  $U_{CISPR}$ , the difference in dB is to be added to the instrument reading. The corrections shown in the table below were therefore added to the reported measurements before assessing compliance with the limits.

Measurement Type	Confidence Level	Calculated Uncertainty	$U_{CISPR}$	Correction
Radiated Emissions: Electric Field Strength 30MHz-1GHz	95%	+/- 6.8dB	4.5dB(<300MHz) 5.2dB(>300MHz)	+2.3dB(<300MHz) +1.6dB(>300MHz)
Radiated Emissions: Electric Field Strength 1GHz-26.5GHz	95%	+/- 7.3dB	Under consideration (5.2dB assumed)	+2.1dB
Radiated Emissions: Electric Field Strength 26.5-40GHz	95%	+/-7.6dB	Under consideration (5.2dB assumed)	+2.4dB

Note 1. All test equipment and antennae used for the tests described in this report have current traceable calibration to UKAS or equivalent standard.

Note 2. All reported measurements include the appropriate offsets for antenna factors, coupler and cable losses, etc.

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 24 of 72

Issue Date: 29-10-2002

## Appendix A. Test Equipment Used

Ref. No.	Device	Manufacturer	Model No.	Serial No.	Last Calibration
013	Dual PSU 0-30V @ 10A	TTI	CPX200	112718	Uncalibrated*
304	Environmental Chamber	Des.Env. Ltd	BS120-40	11-94-1830	Uncalibrated**
318	Peak Power Analyser	H-P	8991A	3248A00128	29.10.2001
400	Receiver 9kHz-30MHz	R & S	ESHS-10	840046/014	06.11.2002
401	Receiver 20MHz-1000MHz	R & S	ESVS-10	840241/002	07.11.2002
424	DVM	Fluke	83	63550394	08.05.2002
-----	Analyser 0.1kHz -26.5GHz	H-P	70000 series	As below	-----
425	Display Section	H-P	70004A	3040A01640	03.12.2001
426	I.F. Module	H-P	70902A	3206A03917	03.12.2001
427	I.F. Module	H-P	70903A	2923A02140	03.12.2001
428	L.O. Module	H-P	70900B	3345A01913	03.12.2001
429	External Mixer Interface	H-P	70907B	3533A00576	03.12.2001
430	Mainframe	H-P	70001A	3230A05180	03.12.2001
431	Digitizer Module	H-P	70700A	3716A01071	03.12.2001
432	Precision Freq. Reference	H-P	70310A	3127A02429	03.12.2001
433	RF Module	H-P	70909A	3136A00120	03.12.2001
434	Option 001 Preamplifier	H-P	70620B	3550A00850	03.12.2001
435	Receiver 9kHz-6.5GHz	H-P	8546A	3625A00329	13.11.2001
436	Filter Section	H-P	85460A	3448A00219	13.11.2001
440	PSU 3-15V 25A	Palstar	PS30M	92534722	22.05.2002
442	Antenna 0.09-30MHz	Schaffner	HLA6120	1122	15.11.2001
479	Peak Power Sensor	H-P	84812A	3318A01050	30.10.2001
482	Antenna 18-26.5GHz	Credowan	20-R-2843-0007	36755	19.08.2002
483	Antenna 26.5-40GHz	Credowan	S.G. Horn	None	19.08.2002
789	Mixer 26.5-40GHz	Agilent	11970A	3003A08859	01.07.2001***
852	Antenna 1.0-18.0GHz	Schwarzbeck	BBHA9120D	128	19.08.2002
968	Antenna 30-300MHz	Schwarzbeck	VHBB9124	9124-285	12.08.2002
969	Antenna 0.3-2.0GHz	Emco	EM6946	112	12.08.2002
EM04	Microwave Cable	Agilent	5061-5458	EMC Cable 4	02.08.2002
EM08	Microwave Cable	Agilent	5061-5458	EMC Cable 8	02.08.2002
EM14	Microwave Cable	Agilent	5061-5458	EMC Cable 14	02.08.2002
EM20	Low-loss RF cable 1.6m	Andrew	243290	EMC Cable 20	12.07.2002
EM21	Low-loss RF cable 1.6m	Andrew	243290	EMC Cable 21	12.07.2002
EM22	Low-loss RF cable 3m	Andrew		EMC Cable 22	12.07.2002
RD14	Microwave Coupler	Flann	16270-40-23	116317	02.08.2002
RD21	Inline Attenuator 10dB	Narda	4779-10	8	04.08.2002
RD24	Inline Attenuator 20dB	Narda	4779-20	5	04.08.2002
RD25	Inline Attenuator 20dB	Unknown	R411820	6	04.08.2002
RD27	Inline Attenuator 10dB	Unknown	R411810	7	04.08.2002
RD30	Inline Attenuator 50dB	Narda	4779-50	4	04.08.2002
RD33	Rotary w/g to N Adaptor	Raymarine	LAB2D-4DR	02	02.08.2002
RD36	Rotary w/g to WG16 Adaptor	Raymarine	LAB2D-4DF	04	02.08.2002
RD40	WG16 to N Adaptor	Flann	16094-NF10	100	02.08.2002
RD42	WG16 to N Adaptor	Mitec Europe	M0926-7-11	3711-2	02.08.2002
RD50	Microwave Power Load	Mitec Europe	M0929-7-11	6689/1	Uncalibrated
RD90	Thermocouple Module	Fluke	80TK	R90	23.10.2001



RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

TEST REPORT

No. 555/1000

Page 25 of 72

Issue Date: 29-10-2002

---

**Test Equipment Used (continued)**

**Notes:** \* Temperature settings monitored using Items 424 and RD90.

\*\* Voltages set using Item 424.

\*\*\* 3 year calibration cycle in accordance with manufacturer's recommendations.

All test equipment, except as noted, is on a calibration cycle in accordance with UKAS requirements.

---

## **Appendix B. Measurement Methods.**

### **B1. Calculating Radiated Emissions Limit Line**

B1.1 In defining the 106.2dBuV/m limit for the product, the EUT was placed on the test site with the measuring equipment located at a distance of three metres.

B1.2 The magnetron was disconnected and replaced with a WG16 to N-type coaxial connector adaptor, which was connected to a signal generator with an unmodulated output at 9.4GHz. The rotating joint was connected, via an adaptor and attenuator, to a power meter and sensor.

B1.3 The signal generator was unable to reproduce the actual peak power output of the intentional radiator – measured as 1.592kW by conducted methods. Consequently, a level of 1.592mW was reproduced at the antenna port, requiring a factor of +60dB to be applied at the analyser.

B1.4 The rotating joint adaptor, attenuator and power measurement equipment were removed and replaced with the 18 inch microstrip patch antenna. The patch antenna was aligned with the horn antenna connected to the spectrum analyser and adjusted to peak the analyser response. A reading of 181.26dBuV/m was obtained.

B1.5 The calculation for the limit line is:  $181.26 - 43 - 10\log_{10} 1592 = 106.25\text{dBuV/m}$

### **B2. Radiated Emissions (9 kHz to 1 GHz)**

B2.1. Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for a Peak detector.

B2.2. All testing was carried out within a semi-anechoic chamber at a distance of 3m from the centre of the EUT. For all tests, the 18" patch antenna was replaced with a rotating microwave load.

B2.3. Measurements were split into four subranges to accommodate receiver bandwidth and antenna changes. Over each range, the same measurement procedure was used. The antenna was initially set to a height of 1.5m. The receiver was set to step through the appropriate frequency range in "Peak and Hold" mode, with the antenna firstly in vertical polarisation and then in horizontal polarisation. The EUT was then rotated clockwise through 90 degrees, then 180 degrees and finally 270 degrees, with the measurement process repeated at each 90 degree point, thus building up a profile of peak emissions. Emissions of significance were noted. For each of these emissions, the antenna polarisation was changed to give the higher reading; the turntable was then rotated through 360 degrees to find the area of the EUT radiating the highest level and the antenna height was then varied between 1 and 4m above the groundplane to further maximise the signal before remeasurement.

B2.4. All measurements were performed using broadband antennas.

**RAYMARINE LTD.**

**EMC Department**

**Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998**

**TEST REPORT**

**No. 555/1000**

**Page 27 of 72**

**Issue Date: 29-10-2002**

---

### **B3. Radiated Emissions 1 GHz to 40 GHz**

B3.1. Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for a Peak detector.

B3.2. All testing was carried out within a semi-anechoic chamber at a distance of 3m from the centre of the EUT. The conducting groundplane between the antenna and the EUT was covered with ferrite and pyramidal absorbing material. For all tests, the 18" patch antenna was replaced with a rotating microwave load.


B3.3. Measurements were split into subranges to accommodate antenna and mixer changes. Over each range, the same measurement procedure was used. The antenna was set to a height of 1.5m. The analyser was set to sweep through the appropriate frequency range in "Peak and Hold" mode, with the antenna in vertical polarisation. The EUT was slowly rotated clockwise through 360 degrees and then back to 000 degrees, thus building up a profile of peak emissions. The antenna was then changed to horizontal polarisation and the process continued. Emissions of significance were noted. For each of these emissions, the antenna polarisation was changed to give the higher reading; the turntable was then rotated to find the area of the EUT radiating the highest level. Measurements within 20dB of the limit line were recorded.

B3.4. All measurements were performed using horn antennas.

## **Appendix C. Test Configuration Drawings**

The scanner and display unit were arranged in as near a representative configuration as was practicable. The display unit, interface leads and excess scanner interconnection cable were placed upon a non-conducting support on the turntable such that the surface of the support was 0.8m above the groundplane. For tests below 1GHz, the scanner unit was placed centrally above the display unit on a non-conducting support 0.38m high. Above 1GHz, this support was increased to 0.65m, aligning the magnetron and circulator assembly height with the receiving horn antenna. The power/NMEA IN lead was connected to a 12V power supply placed on the turntable; the screen of this cable was connected to the groundplane. The Seataalk, HSB and NMEA Out cables, terminated with dummy loads, were bundled with 0.4m loops and placed around the display unit. The scanner interconnection cable was coiled around the scanner support. Due to its size and construction, this cable cannot be bundled in the same manner as the other cables.

### **C.1. Connection diagram**

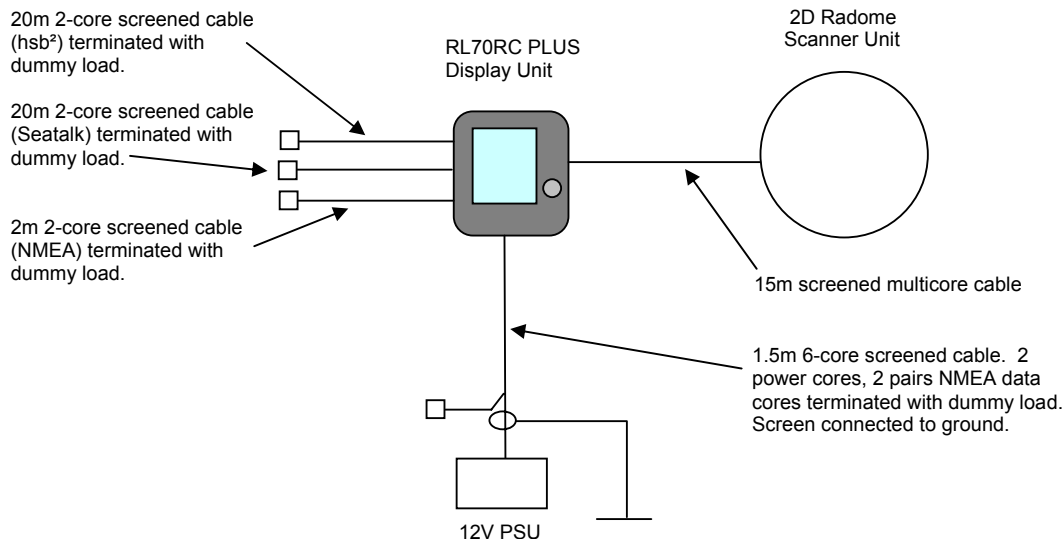

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998

---

TEST REPORT

No. 555/1000

Page 29 of 72


Issue Date: 29-10-2002

## C2. Radiated Emissions Setup – EUT General Arrangement




### C.3. Radiated Emissions 9 kHz to 1 GHz – General Arrangement

**NOT TO SCALE**

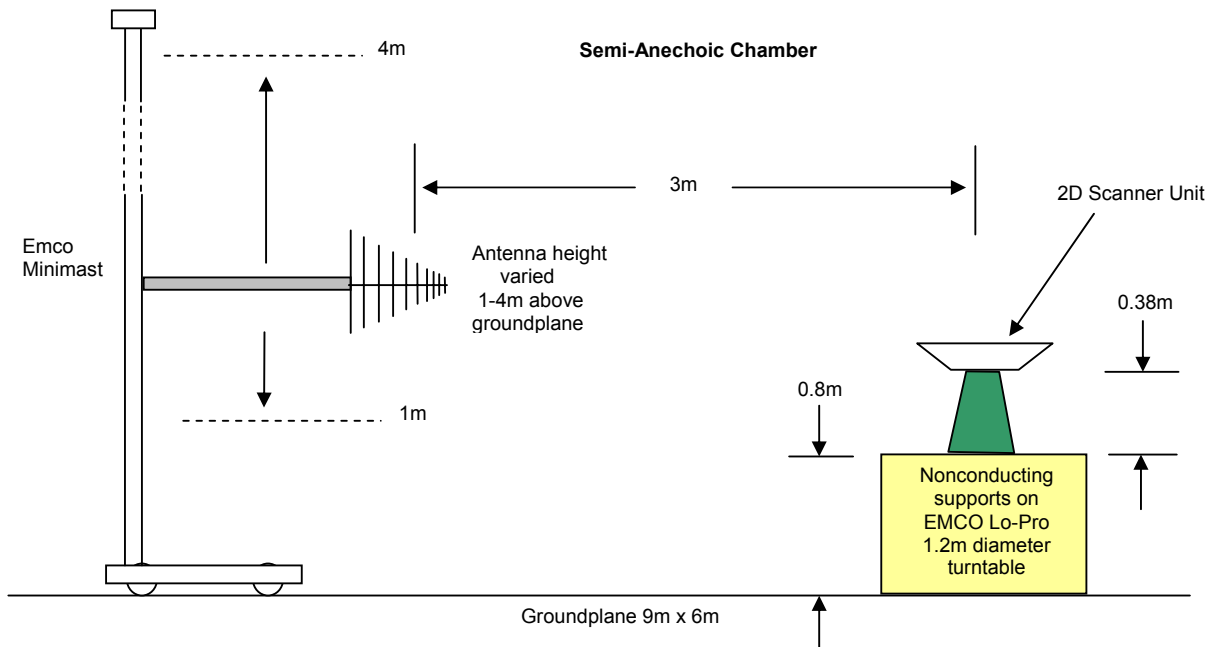

### C.4. Radiated Emissions 1GHz to 40 GHz – General Arrangement

**NOT TO SCALE**

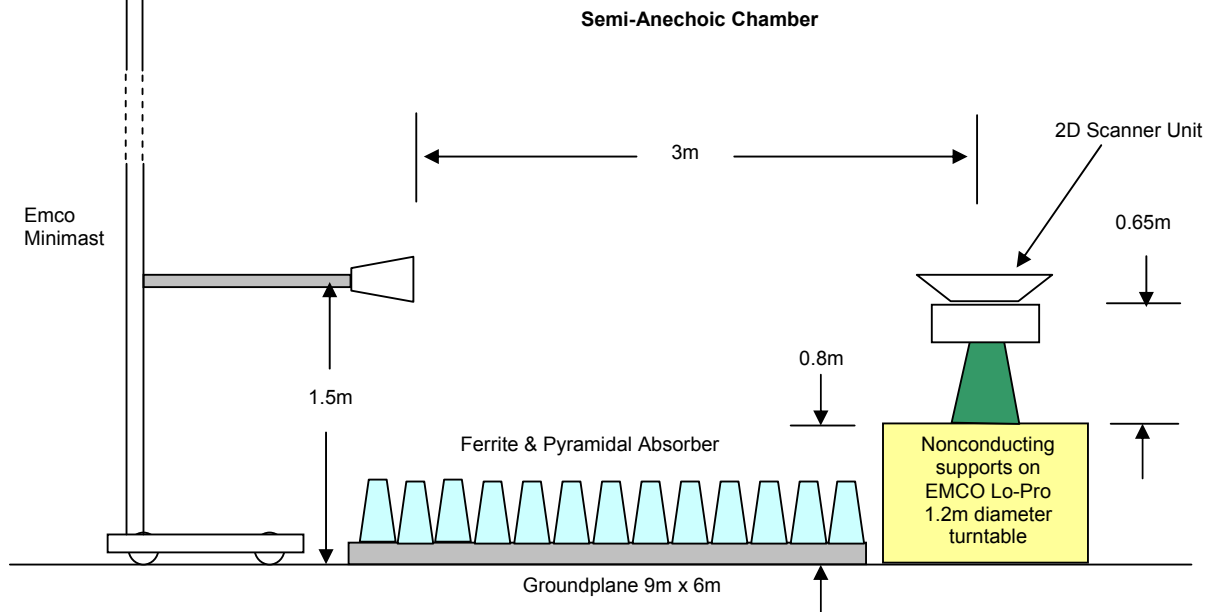

RAYMARINE LTD.

EMC Department

Test of: Raymarine Ltd.  
Pathfinder RL72RC PLUS  
FCC Part 80:1998  
and FCC Part 2: 1998


TEST REPORT

No. 555/1000

Page 31 of 72

Issue Date: 29-10-2002

### C.5. Power, Pulsewidth and P.R.F. Measurements – General Arrangement

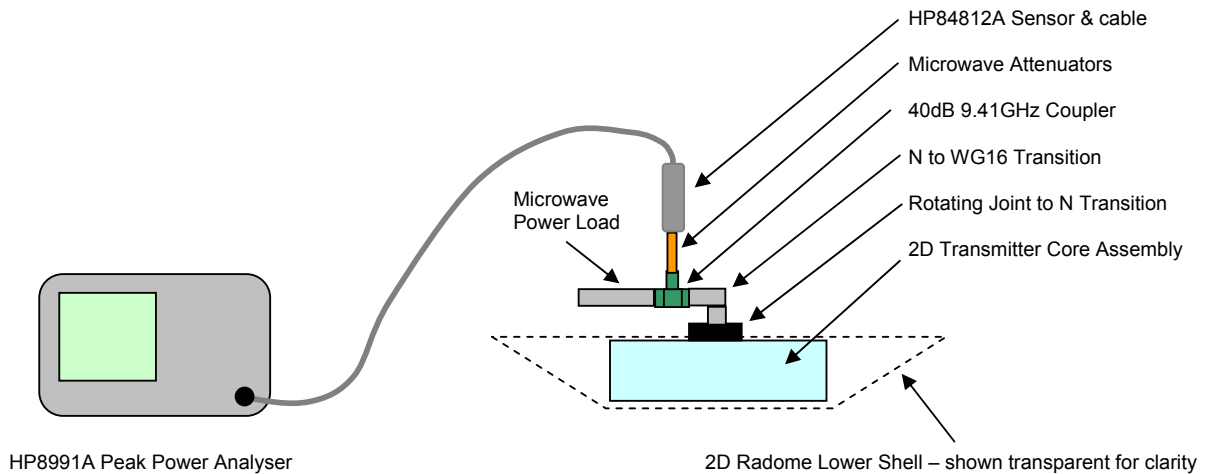

### C.6. Occupied Bandwidth, Frequency Variation & Antenna Port Conducted Emissions – General Arrangement

