



RF TEST REPORT

Report No.: SET2013-08165

Product: WCDMA Module

FCC ID: PJ7-1500

Model No.: WM620

Applicant: Shenzhen Neoway Technology Co.,Ltd.

Address: 4F-2#,Lianjian Science & Industry Park,Huarong
Road,Dalang,Bao'an District,Shenzhen.P.R.C.

Issued by: CCIC-SET

Lab Location: Electronic Testing Building, Shahe Road , Xili, Nanshan District,
Shenzh China

Tel: 86 755 26627338

Fax: 86 755 26627238

This test report consists of 146 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product: WCDMA Module

Brand Name: neoway

Trade Name: neoway

Applicant: Shenzhen Neoway Technology Co.,Ltd.


Applicant Address: 4F-2#,Lianjian Science & Industry Park,Huarong Road,Dalang,Bao'an District,Shenzhen.P.R.C.

Manufacturer: Shenzhen Eternity Technology Co.,Ltd

Manufacturer Address: Block A2,Yingzhan Industrial Zone, Longtian Community, KengziOffice,Pingshan New District,Shenzhen,Guangdong Province,P.R.China

Test Standards: 47 CFR Part 2(10-1-12 Edition) Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
47 CFR Part 22(10-1-12 Edition) Public Mobile Services
47 CFR Part 24(10-1-12 Edition)Personal Communications Services

Test Result: PASS

Tested by: 
2013.12.20
Lu Lei, Test Engineer

Reviewed by: 
2013.12.20
Shuangwen Zhang, Senior EGINEER

Product: 
2013.12.20
Wu Li'an, Manager



Table of Contents

1.	GENERAL INFORMATION	4
1.1	EUT Description	4
1.2	Test Standards and Results.....	6
1.3	Facilities and Accreditations.....	7
2.	47 CFR PART 2, PART 22H & 24E REQUIREMENTS	8
2.1	Conducted RF Output Power	8
2.2	Peak to Average Ratio	19
2.3	99% Occupied Bandwidth.....	30
2.4	Frequency Stability.....	62
2.5	Conducted Out of Band Emissions	68
2.6	Band Edge	94
2.7	Transmitter Radiated Power (EIRP/ERP)	103
2.8	Radiated Out of Band Emissions	112
ANNEX A	ACCREDITATION CERTIFICATE	145
ANNEX B	PHOTOGRAPHS OF THE EUT	146
ANNEX C	PHOTOGRAPHS OF THE TEST SETUP	147
1.	CONDUCTED MEASUREMENT SETUP	147
2.	RADIATED MEASUREMENT SETUP	147

Change History		
Issue	Date	Reason for change
1.0	Dec.20 2013	First edition

1. GENERAL INFORMATION

1.1 EUT Description

EUT Type.....: WCDMA Module
 Serial No.....: (n.a, marked #1 by test site)
 Hardware Version: 1500-V1.1
 Software Version: E8C33417
 Frequency Range.....: GSM 850MHz:
 Tx: 824.20 - 848.80MHz (at intervals of 200kHz);
 Rx: 869.20 - 893.80MHz (at intervals of 200kHz)
 GSM 1900MHz:
 Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz);
 Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz)
 WCDMA 850MHz
 Tx: 826.4 - 846.6MHz (at intervals of 200kHz);
 Rx: 871.4 - 891.6MHz (at intervals of 200kHz)
 WCDMA 1900MHz
 Tx: 1852.4 - 1907.6MHz (at intervals of 200kHz);
 Rx: 1932.4 - 1987.6MHz (at intervals of 200kHz)
 Modulation Type.....: GSM,GPRS Mode with GMSK Modulation
 EDGE Mode with 8PSK Modulation
 WCDMA Mode with QPSK Modulation
 HSDPA Mode with QPSK Modulation
 Multislot Class.....: GPRS: Multislot Class12, EGPRS: Multislot Class12
 Antenna Type.....: FIFA Antenna
 Emission Designators: GSM 850:248KGXW,GSM 1900:252KGXW
 GPRS 850:248KGXW;GRPS 1900:248KGXW
 EGPRS 850:244KG7W ;EGPRS 1900:244KG7W
 WCDMA 850:4M18F9W ,WCDMA1900:4M18F9W
 HSDPA 850: 4M18F9W;HSDPA1900: 4M18F9W

Note 1: The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula $F(n)=824.2+0.2*(n-128)$, $128 \leq n \leq 251$; the lowest, middle, highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).

Note 2: The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula $F(n)=1850.2+0.2*(n-512)$, $512 \leq n \leq 810$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

Note 3: The transmitter (Tx) frequency arrangement of the WCDMA 850MHz band used by the EUT can be represented with the formula $F(n)=826.4+0.2*(n-4132)$, $4132 \leq n \leq 4233$; the lowest,

middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4183(836.6MHz) and 4233 (846.6MHz).

Note 4: The transmitter (Tx) frequency arrangement of the WCDMA 1900MHz band used by the EUT can be represented with the formula $F(n)=1852.4+0.2*(n-9262)$, $9262 \leq n \leq 9538$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

Note 5: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer

1.2 Support Equipment

No.	Equipment	Brand Name	Model Name	Manufacturer	Serial No.
1	Notebook	DELL	PP11L	DELL	H5914A03

1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-12 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-12 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-12 Edition)	Personal Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.1046	Conducted RF Output Power	PASS
2	2.1049	99% Occupied Bandwidth	PASS
3	2.1055 22.355 24.235	Frequency Stability	PASS
4	2.1051 2.1057 22.917 24.238	Conducted Out of Band Emissions	PASS
5	2.1051 2.1057 22.917 24.238	Band Edge	PASS
6	22.913 24.232	Transmitter Radiated Power (EIPR/ERP)	PASS
7	2.1053 2.1057 22.917 24.238	Radiated Out of Band Emissions	PASS

NOTE: Measurement method according to TIA/EIA 603.D-2010



1.4 Facilities and Accreditations

1.4.1 Test Facilities

CNAS-Lab Code: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, Renewal date Nov. 19, 2011, valid time is until Nov. 18, 2014.

1.4.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa

2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS


2.1 Conducted RF Output Power

2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Test Description

1. Test Setup:

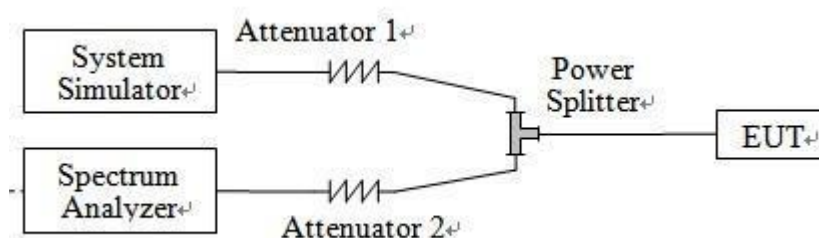

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
System Simulator	Agilent	E5515C	MY47510547	2014.09.13
Spectrum Analyzer	Agilent	E4407B	MY4510810	2014.06.09
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.06.09
Power Meter	Agilent	E4418B	GB43318055	2014.06.09
Power Splitter	Weinschel	1506A	NW521	2014.06.11
Attenuator 1	MCE/weinschel	10dB	BN3693	2014.06.11
Attenuator 2	Resnet	3dB	(n.a.)	2014.06.09

2.1.3 Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

1. GSM Model Test Verdict:

Band	Channel	Frequency (MHz)	Measured Output Power		Verdict
			dBm	Refer to Plot	
GSM 850MHz	128	824.2	32.84	Plot A1 to A3	PASS
	190	836.6	32.82		PASS
	251	848.8	32.80		PASS
GSM 1900MHz	512	1850.2	30.39	Plot B1 to B3	PASS
	661	1880.0	30.62		PASS
	810	1909.8	30.69		PASS
GPRS 850MHz	128	824.2	32.22	Plot C1 to C3Note 1	PASS
	190	836.6	32.36		PASS
	251	848.8	32.18		PASS
GPRS 1900MHz	512	1850.2	30.02	Plot D1 to D3Note 1	PASS
	661	1880.0	30.15		PASS
	810	1909.8	30.23		PASS
EGPRS 850MHz	128	824.2	31.82	Plot E1 to E3Note 1	PASS
	190	836.6	31.81		PASS
	251	848.8	31.79		PASS
EGPRS 1900MHz	512	1850.2	29.80	Plot F1 to F3Note 1	PASS
	661	1880.0	29.85		PASS
	810	1909.8	29.92		PASS

Note 1: For the GPRS and EGPRS model, all the slots were tested and just the worst data was record in this report.

2. WCDMA Model Test Verdict:

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4183	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	22.75	22.66	22.58	22.59	22.68	22.71
HSDPA	1	22.26	22.31	22.29	22.06	22.16	22.24
	2	22.21	22.29	22.25	22.23	22.37	22.56
	3	21.75	21.83	21.81	21.77	21.83	21.73
	4	21.72	21.80	21.79	21.73	22.49	21.78
Note:	The Conducted RF Output Power test of WCDMA /HSDPA was tested by power meter.						



Ref 47 dBm *Att 40 dB SWT 2.5 ms 824.28000000 MHz

Marker 1 [T1] 32.84 dBm

Offset 17 dB

1 PK MAXH

Center 824.2 MHz 1 MHz/ Span 10 MHz

Ref 47 dBm *Att 40 dB SWT 2.5 ms 836.700000000 MHz

Offset 17 dB

1 PK
MAXH


Marker 1 [T1] 32.82 dBm

1 MHz/


Span 10 MHz

3dB



CCIC-SET/T (00)

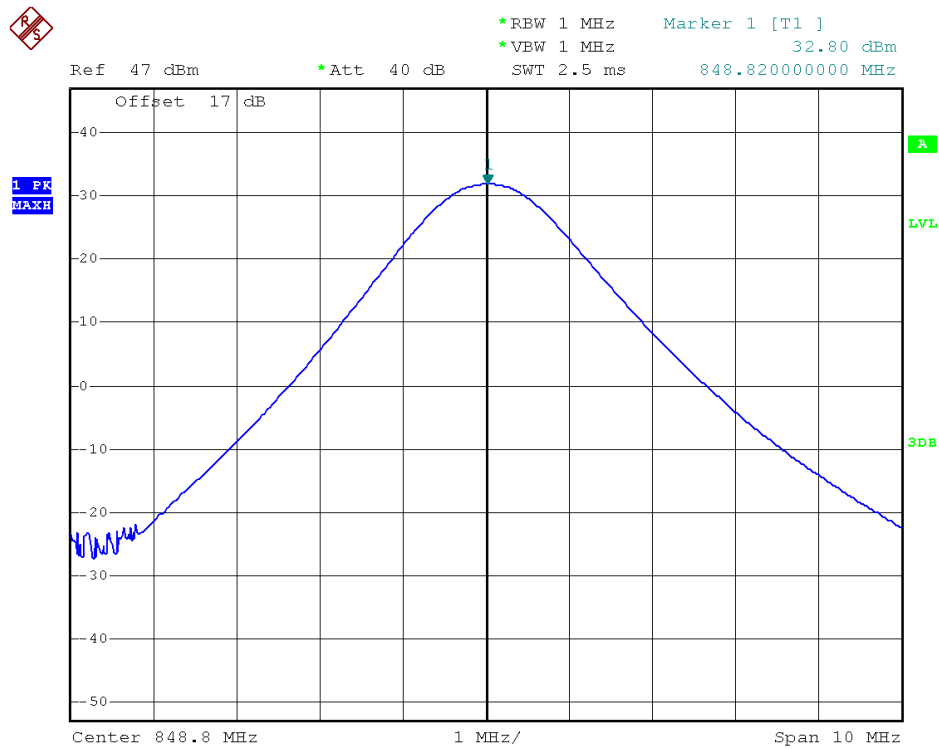



(Plot A3: GSM 850MHz Channel = 251)

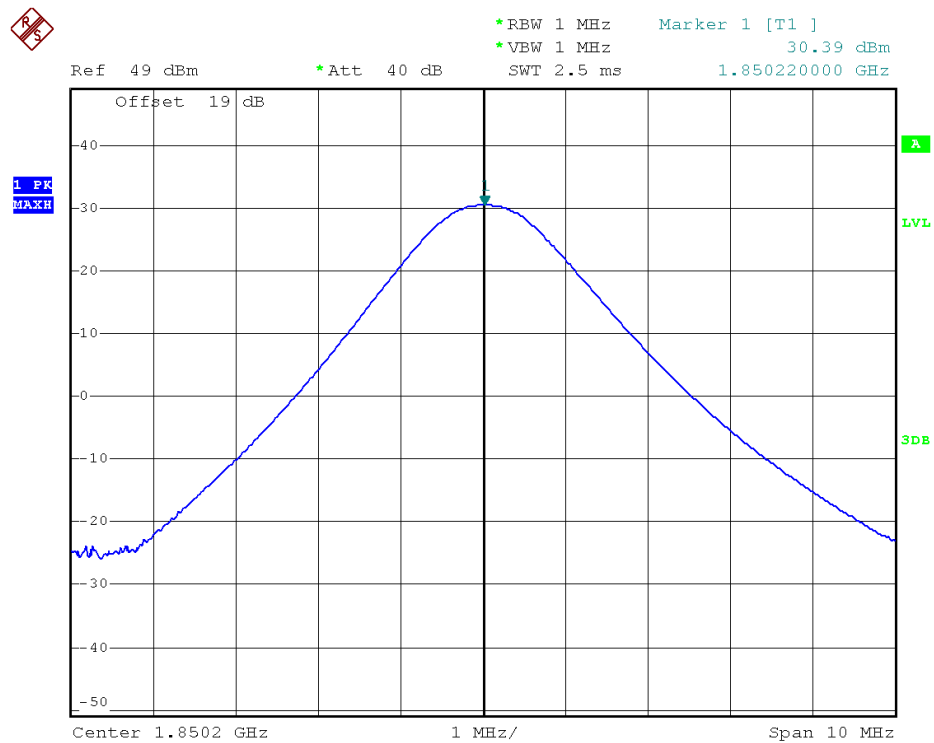


(Plot B1: GSM 1900MHz Channel = 512)

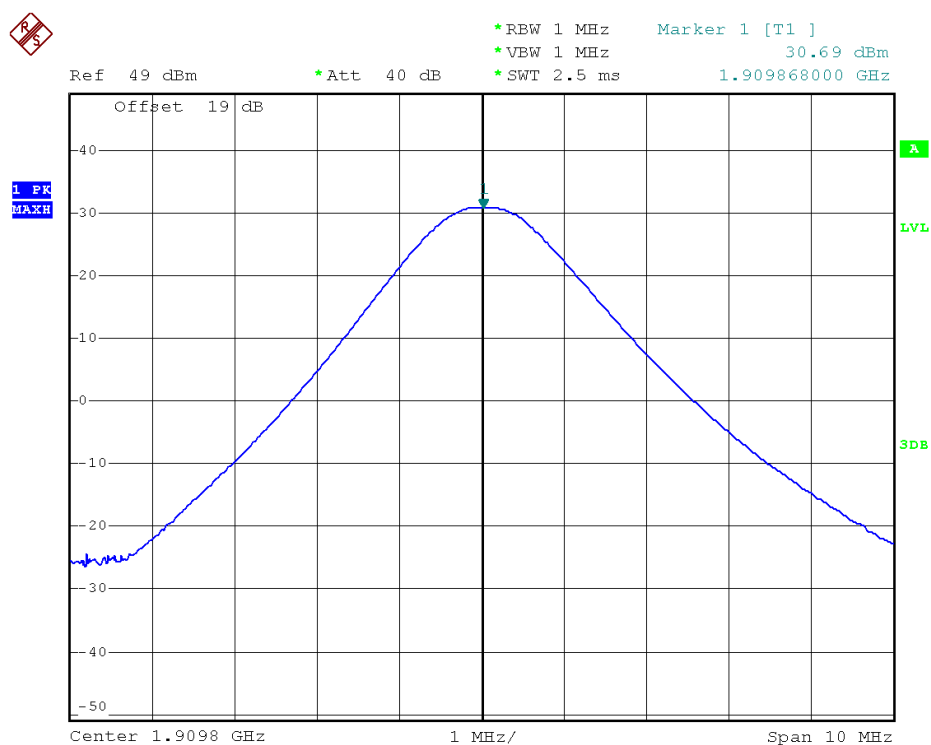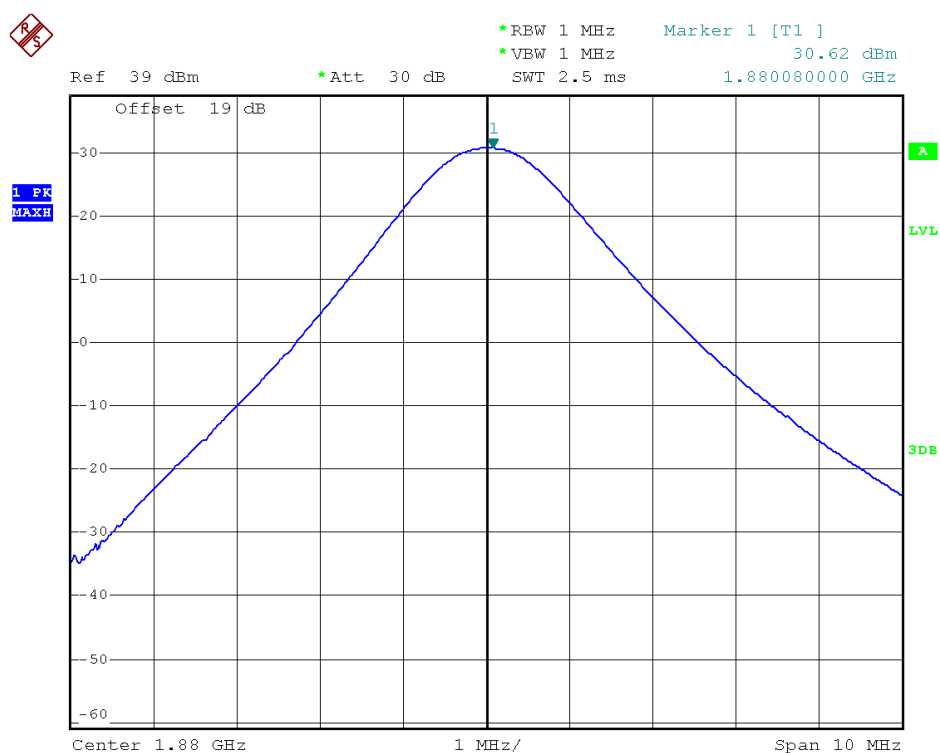


4. GPRS Model Test Plots:

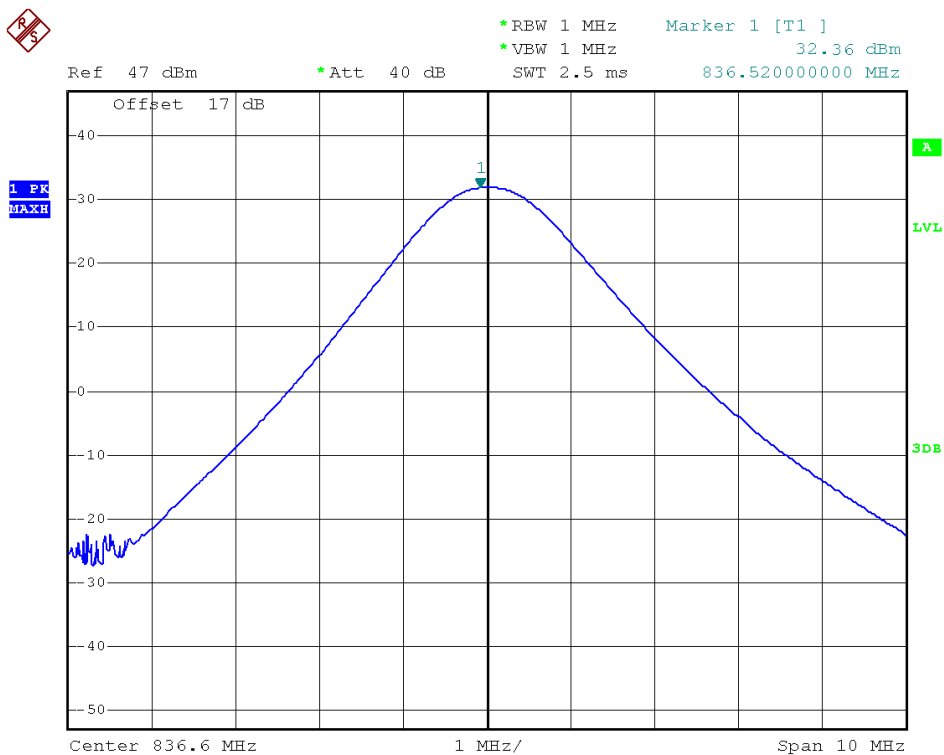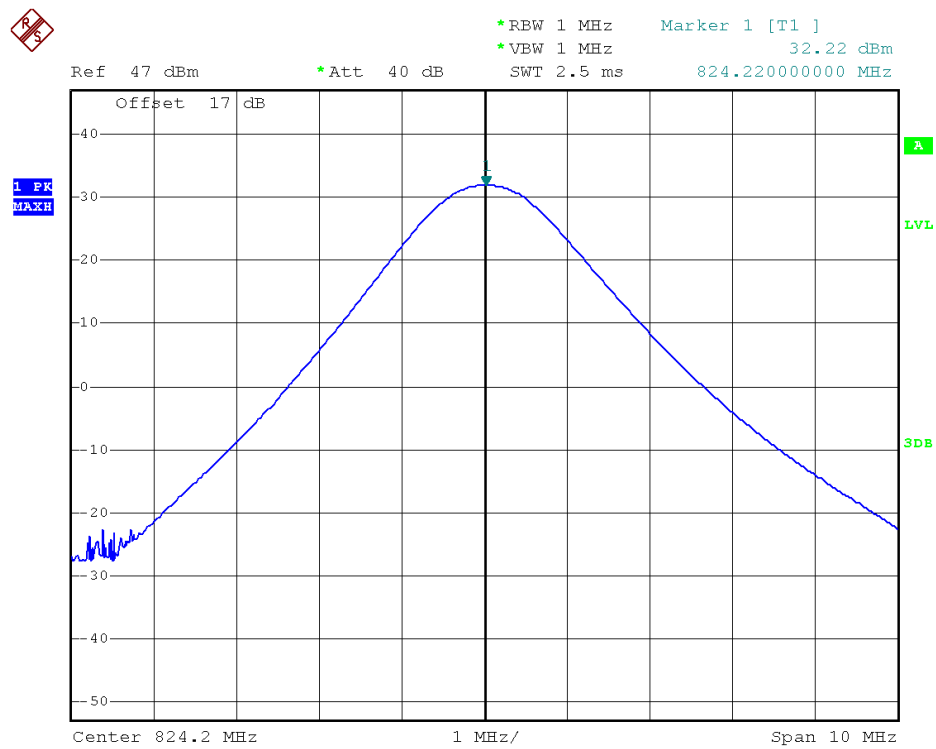


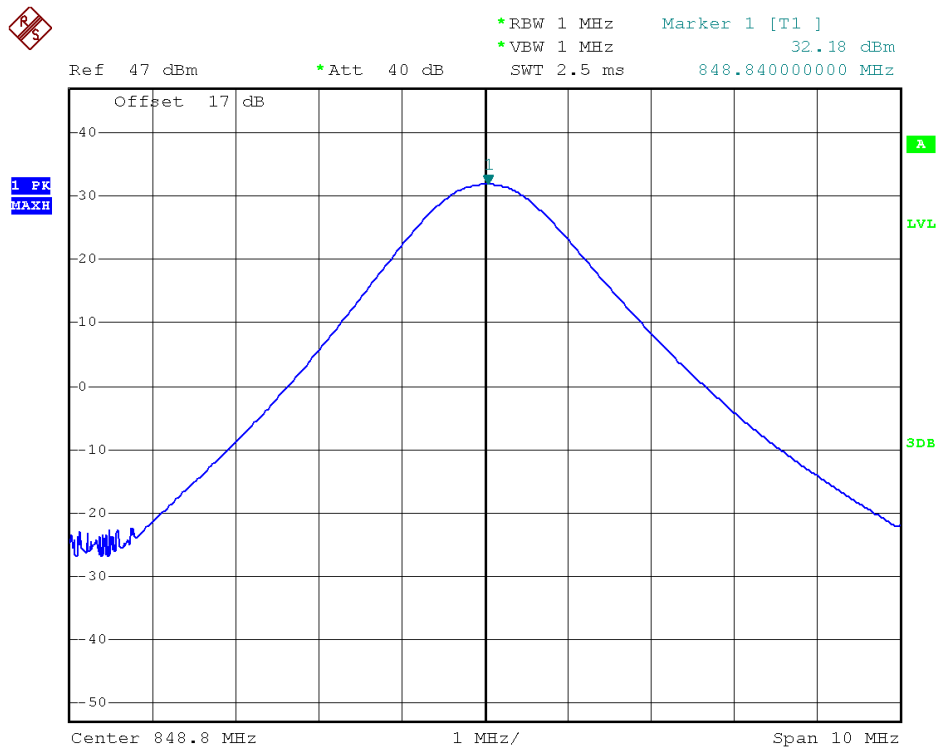


(Plot C3: GPRS 850MHz Channel = 251)

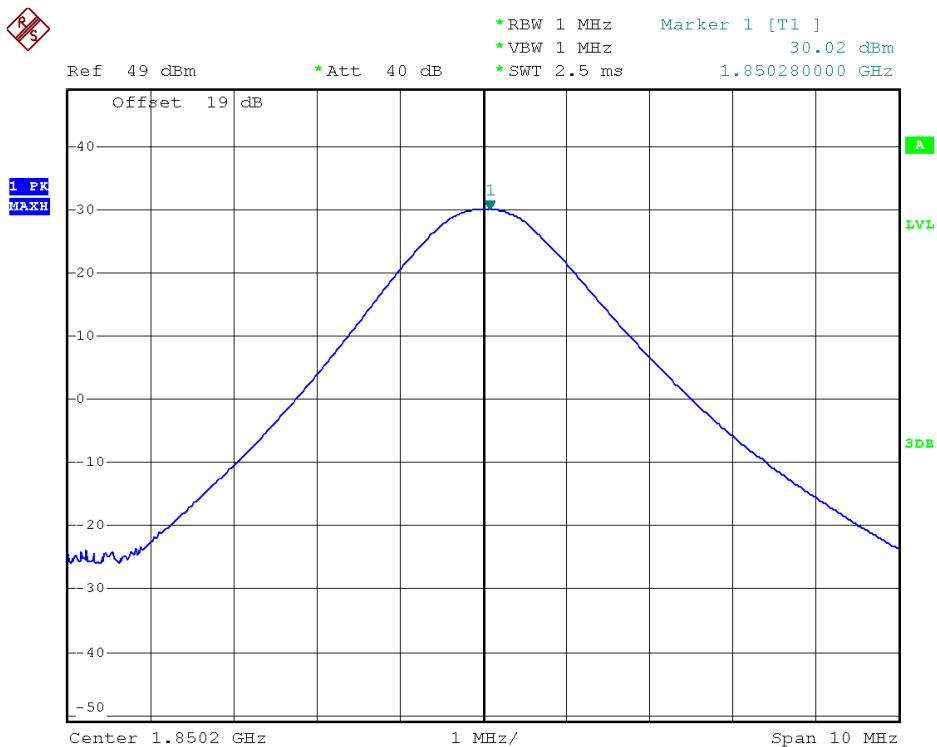


(Plot D1: GPRS 1900MHz Channel = 512)

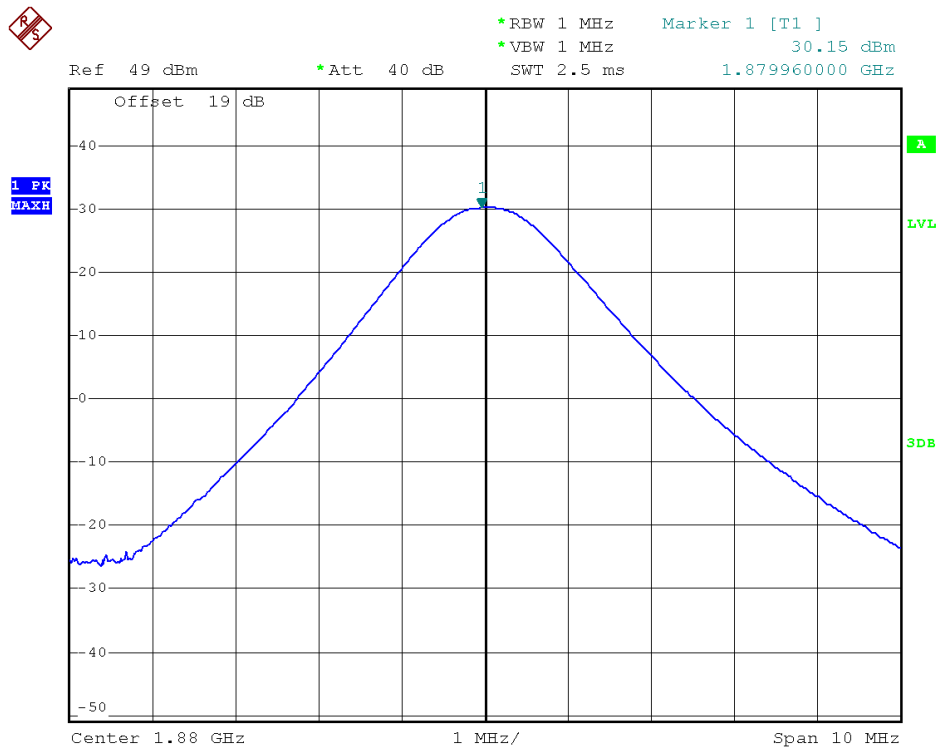


(Plot D2: GPRS 1900MHz Channel = 661)

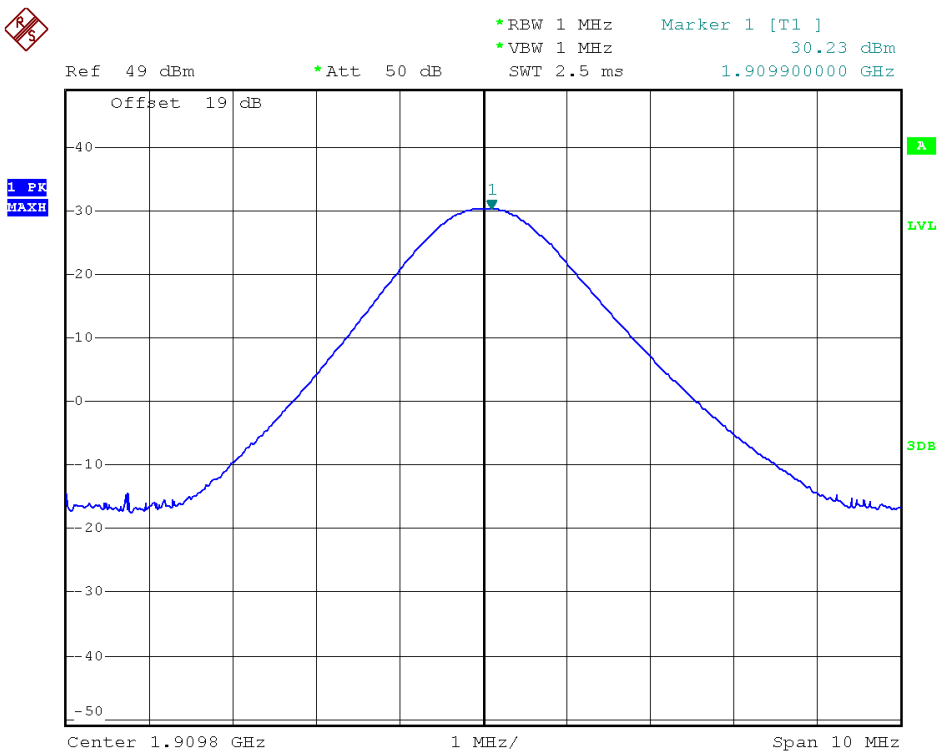


(Plot D3: GPRS 1900Hz Channel = 810)

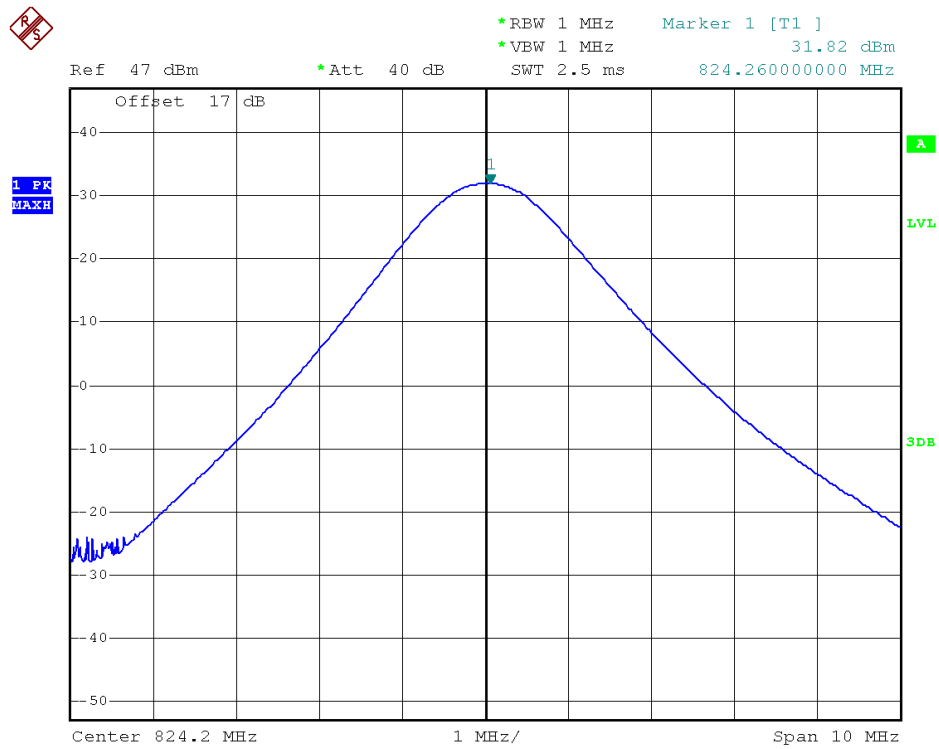


(Plot E1: EDGE 850MHz Channel = 128)

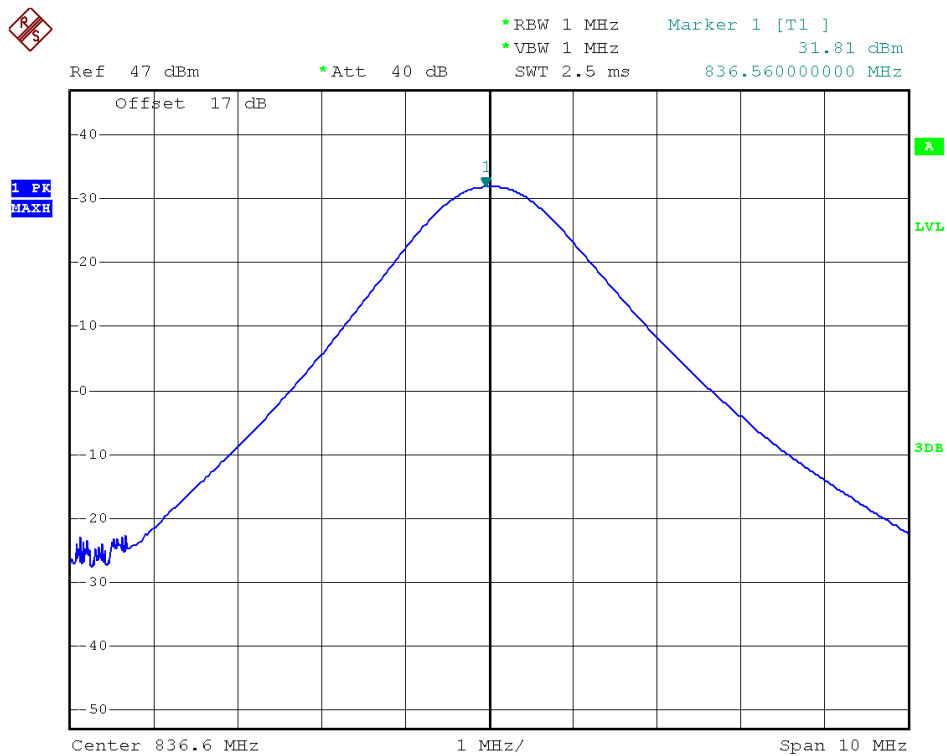


(Plot E2: EDGE 850MHz Channel = 190)

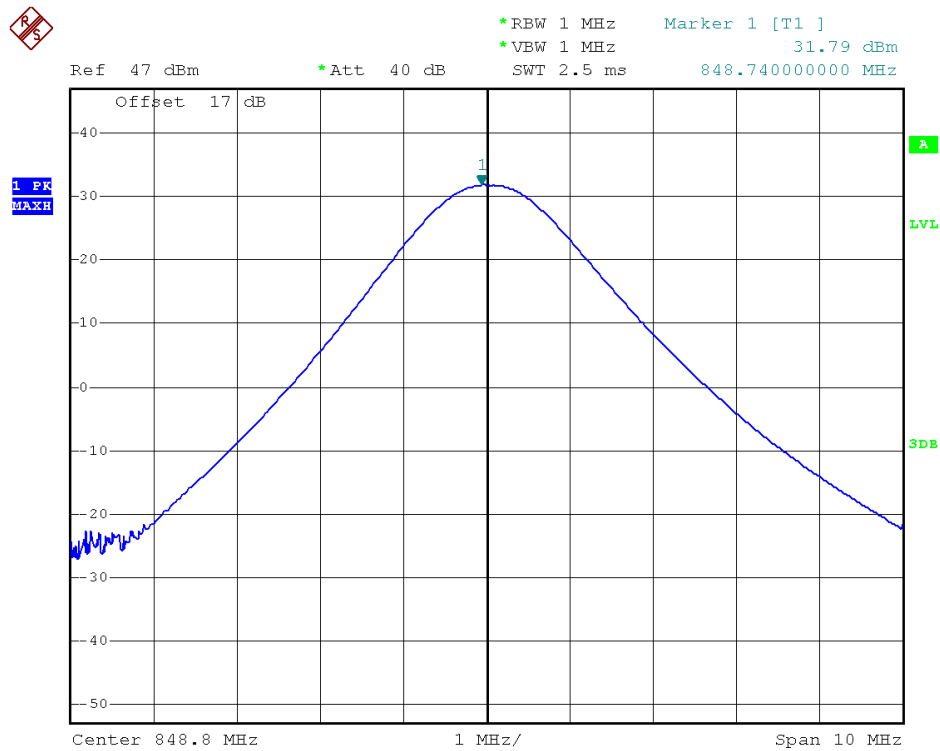


(Plot E3: EDGE 850MHz Channel = 251)

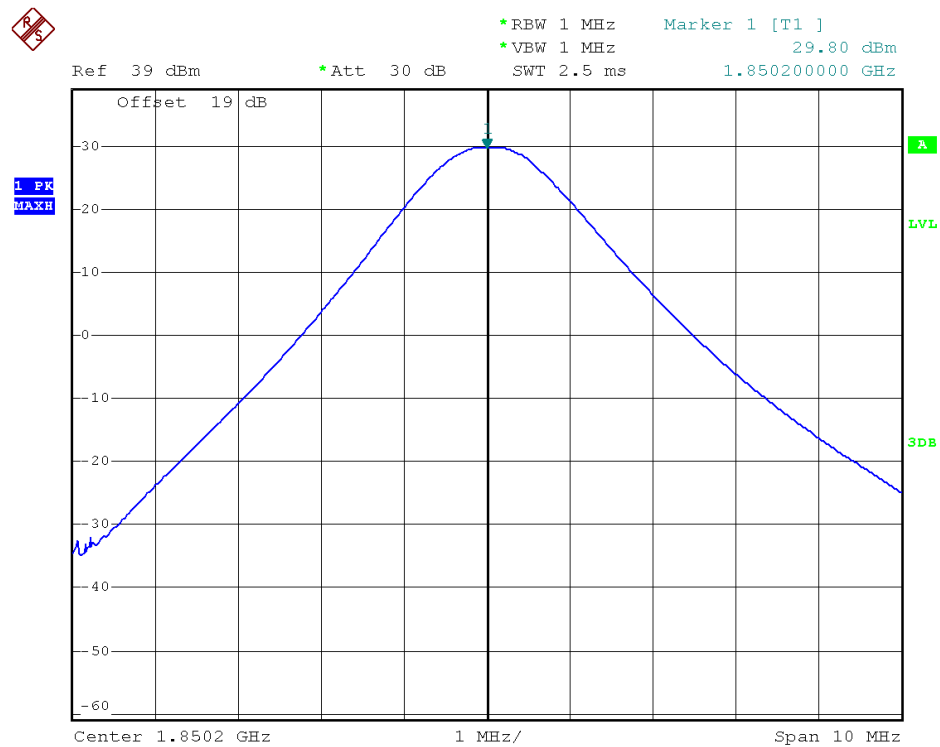

(Plot F1: EDGE 1900MHz Channel = 512)

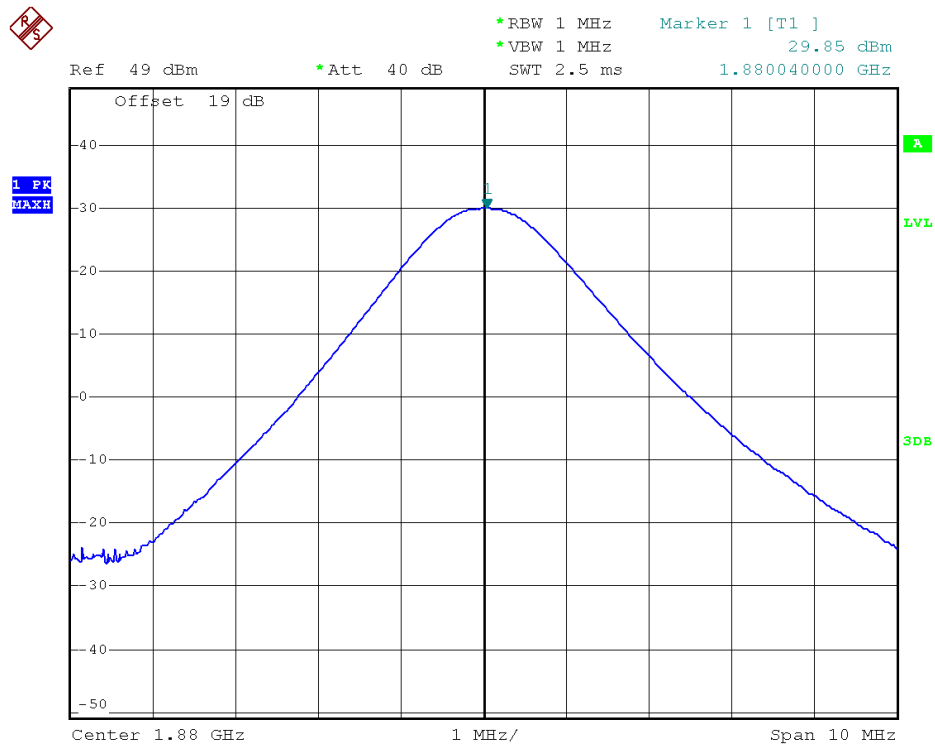

(Plot F2: EDGE 1900MHz Channel = 661)

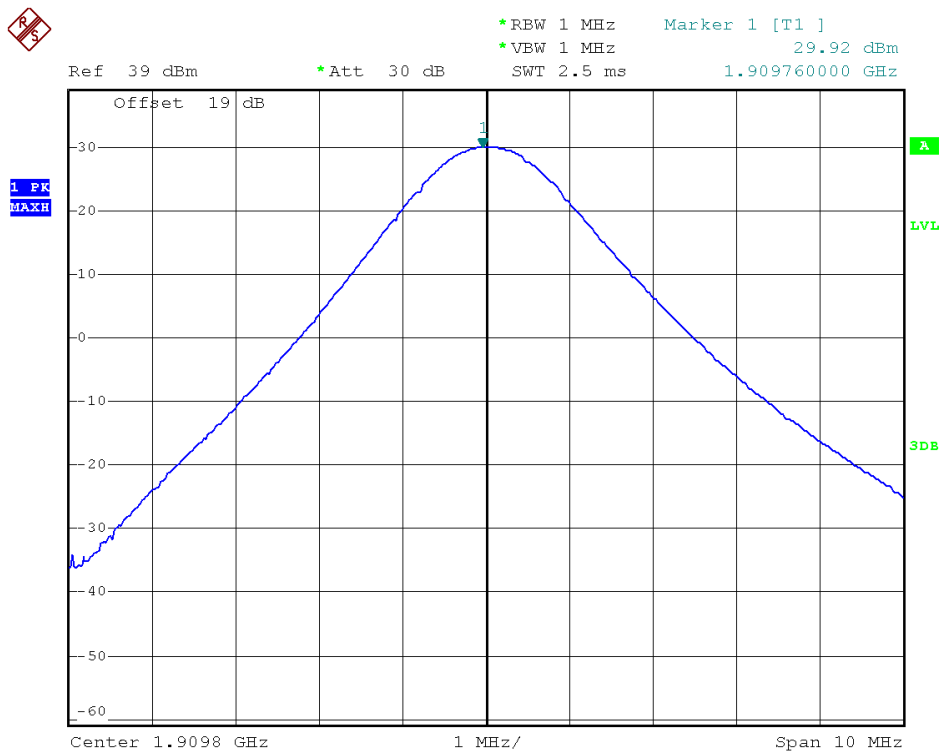

(Plot F3: EDGE 1900Hz Channel = 810)

2.2 Peak to Average Ratio

2.2.1 Definition

According to FCC section 2.1049 and FCC 24.232(d), the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Test Description

See section 2.1.2 of this report.

2.2.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

Test procedures:

A. For GSM operating mode:

- a. Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
- b. Set EUT in maximum output power, and triggered the burst signal.
- c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.


B. For UMTS operating mode:


- a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.




1. Test Verdict:


Band	Channel	Frequency (MHz)	Peak to Average ratio		Limit	Verdict
			dBm	Refer to Plot	dBm	
GSM 1900MHz	512	1850.2	0.13	Plot A1 to A3	13	PASS
	661	1880.0	0.12			PASS
	810	1909.8	0.12			PASS
EDGE 1900MHz	512	1850.2	0.11	Plot B1 toB3	13	PASS
	661	1880.0	0.10			PASS
	810	1909.8	0.12			PASS
WCDMA 1900MHz	9262	1852.4	3.04	Plot C1 toC3	13	PASS
	9400	1880.0	3.23			PASS
	9538	1907.6	3.16			PASS
HSDPA 1900MHz	9262	1852.4	3.58	Plot D1 toD3	13	PASS
	9400	1880.0	3.55			PASS
	9538	1907.6	3.43			PASS

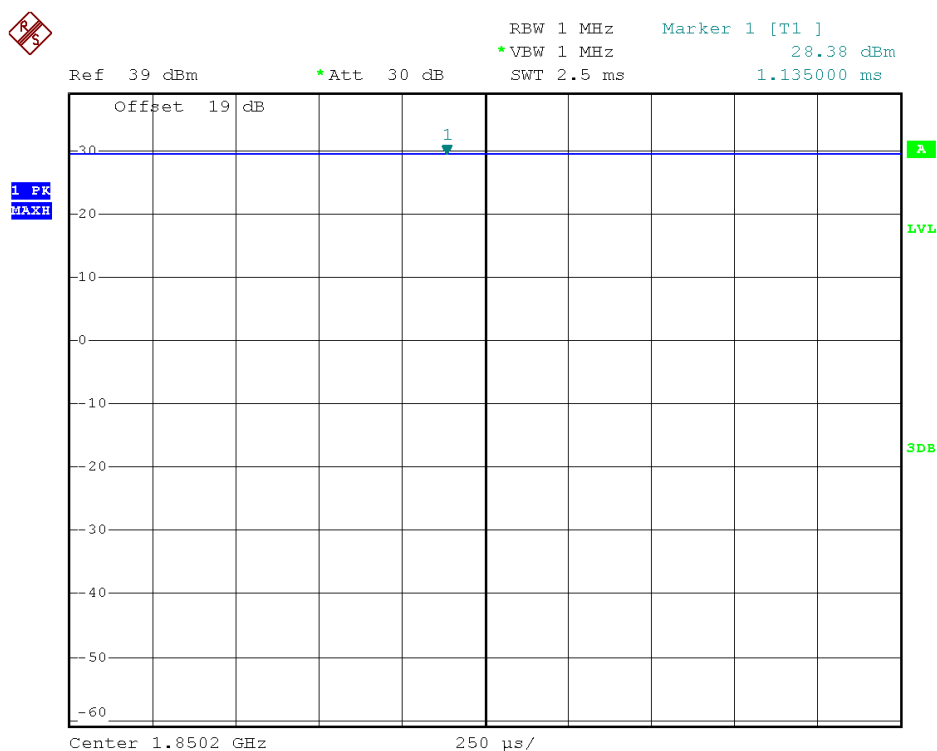

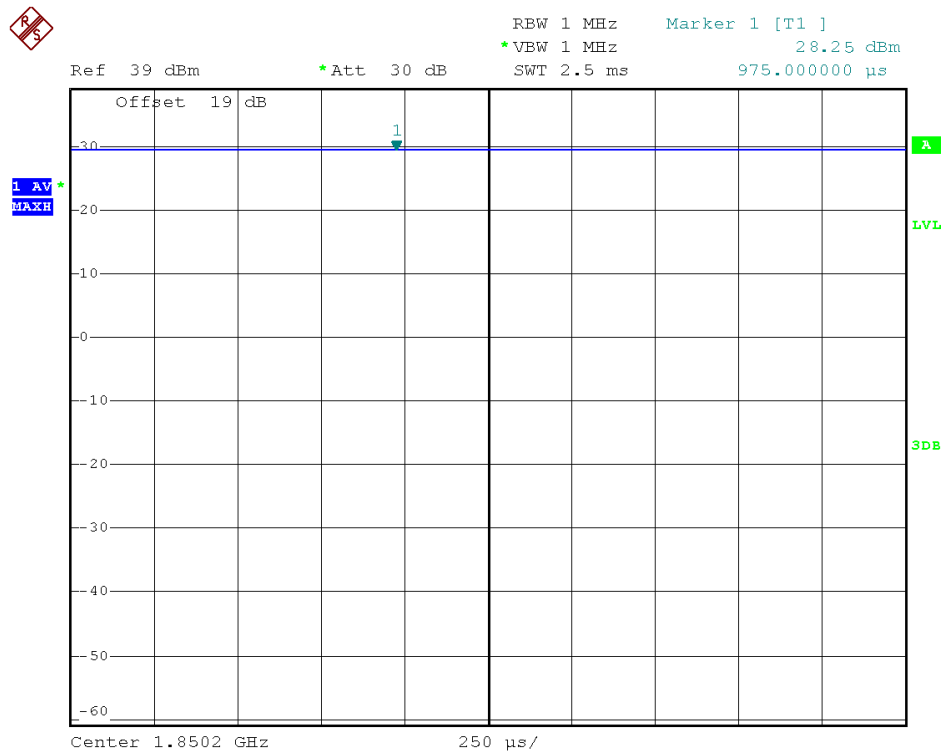



(Plot A1: GSM 1900 MHz Channel = 512)

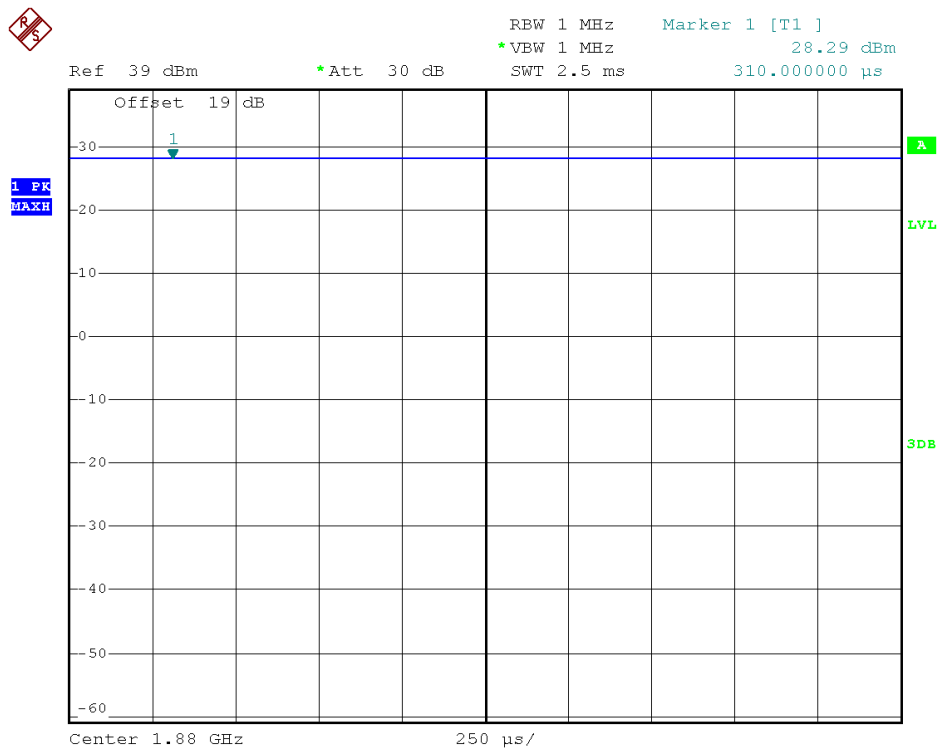

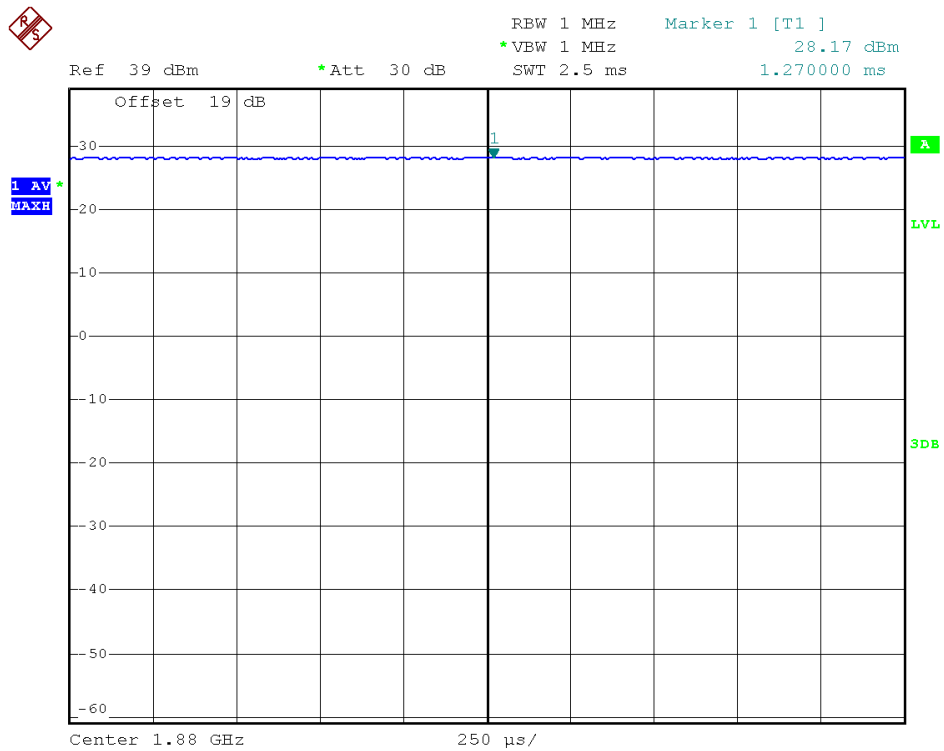



(Plot A2: GSM 1900 MHz Channel = 661)

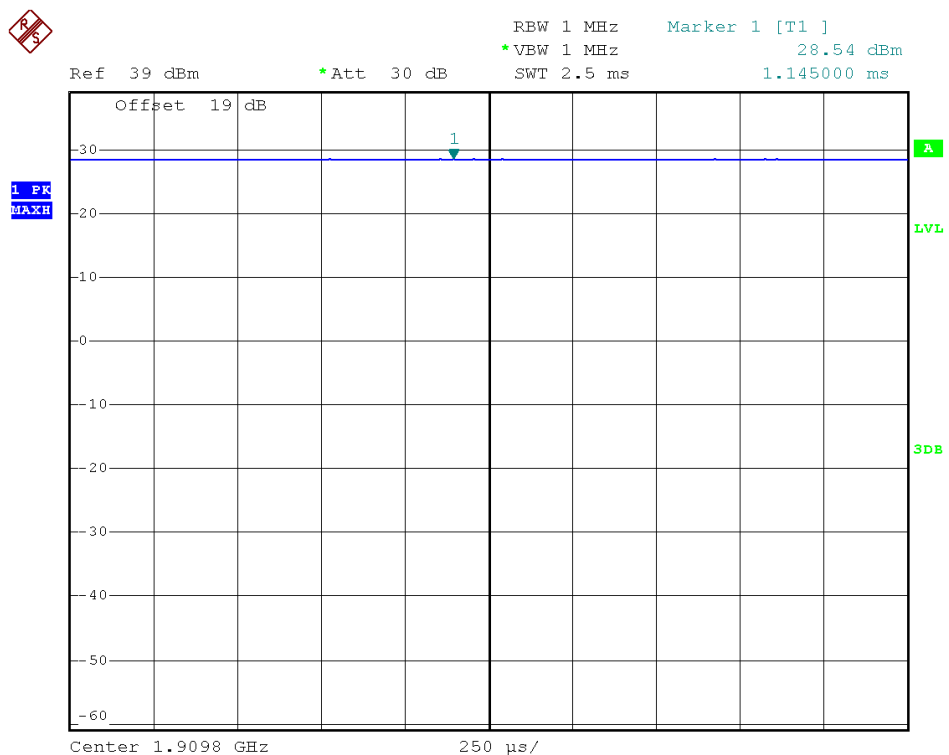

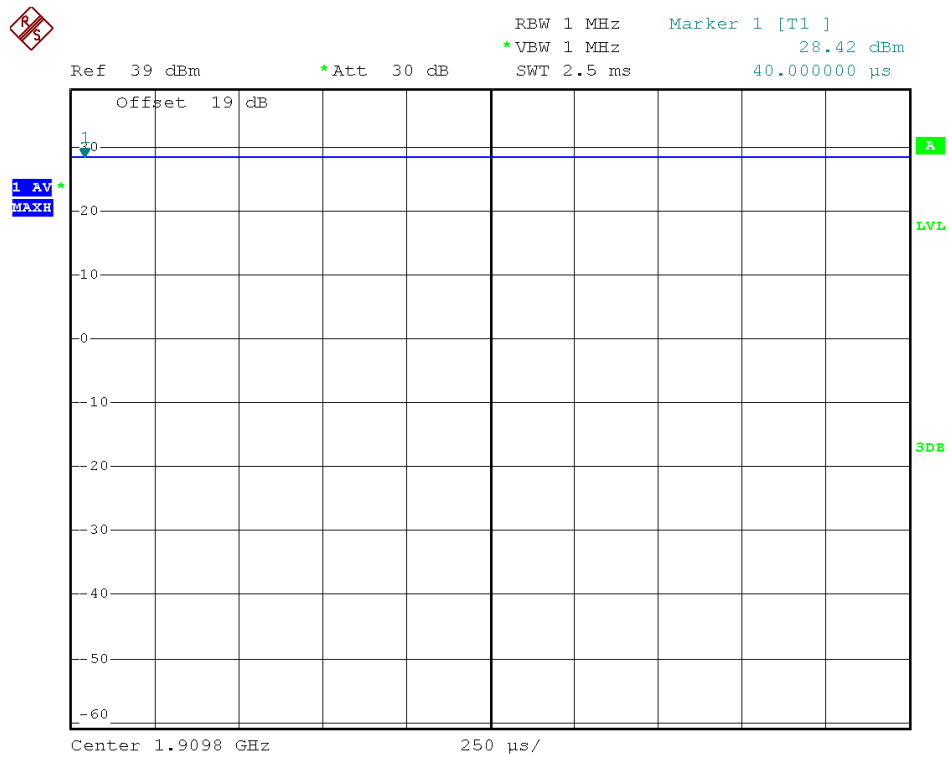



(Plot A3: GSM 1900MHz Channel = 810)

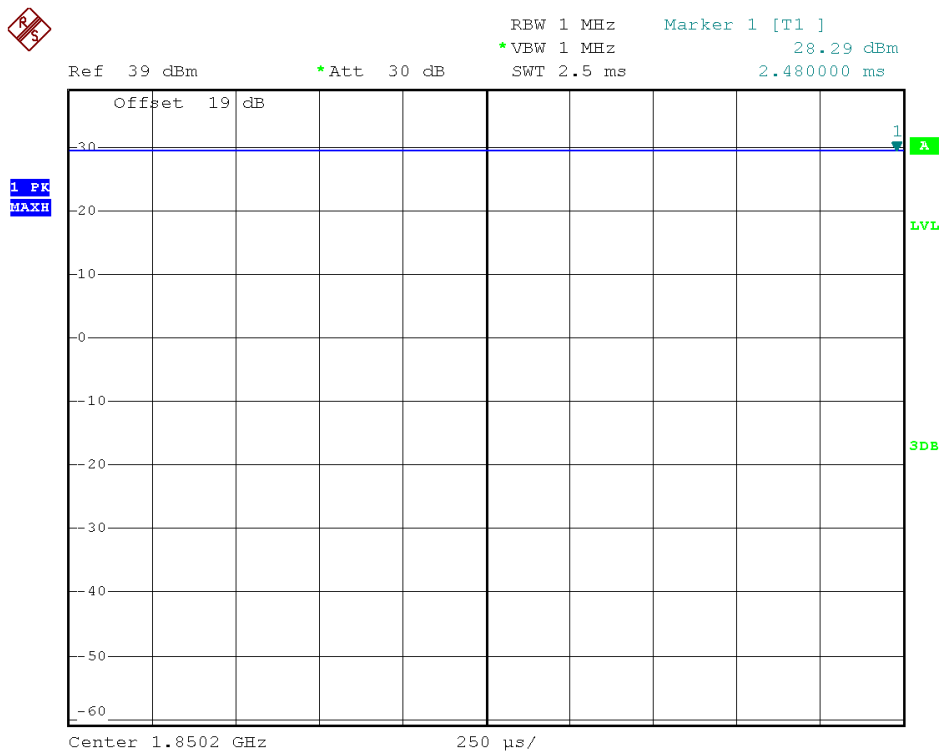

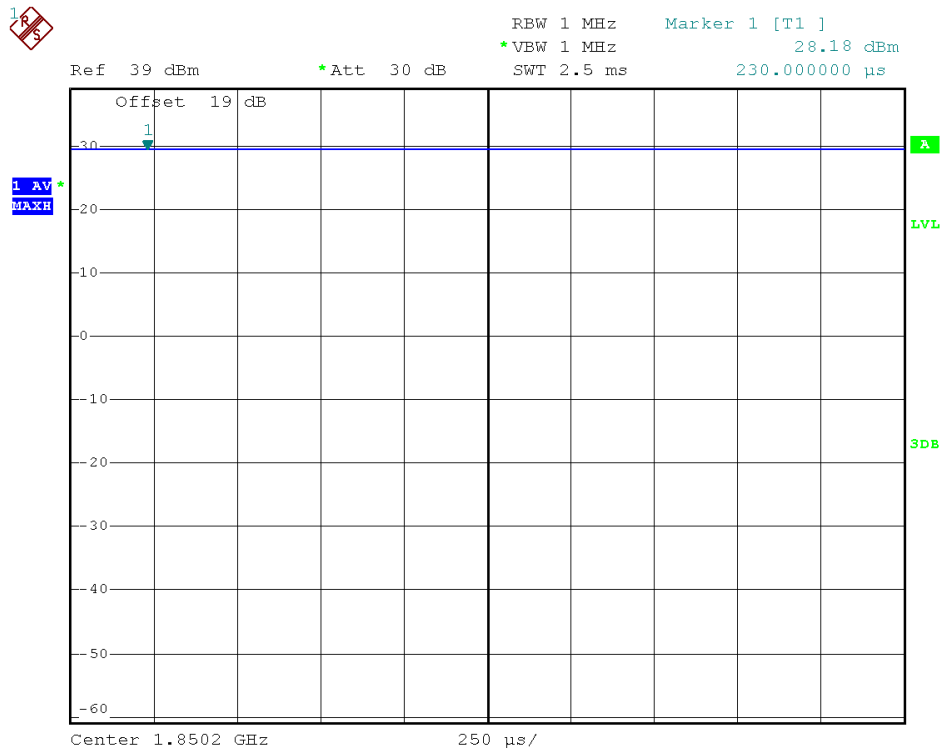



(Plot B1: EDGE 1900 MHz Channel = 512)

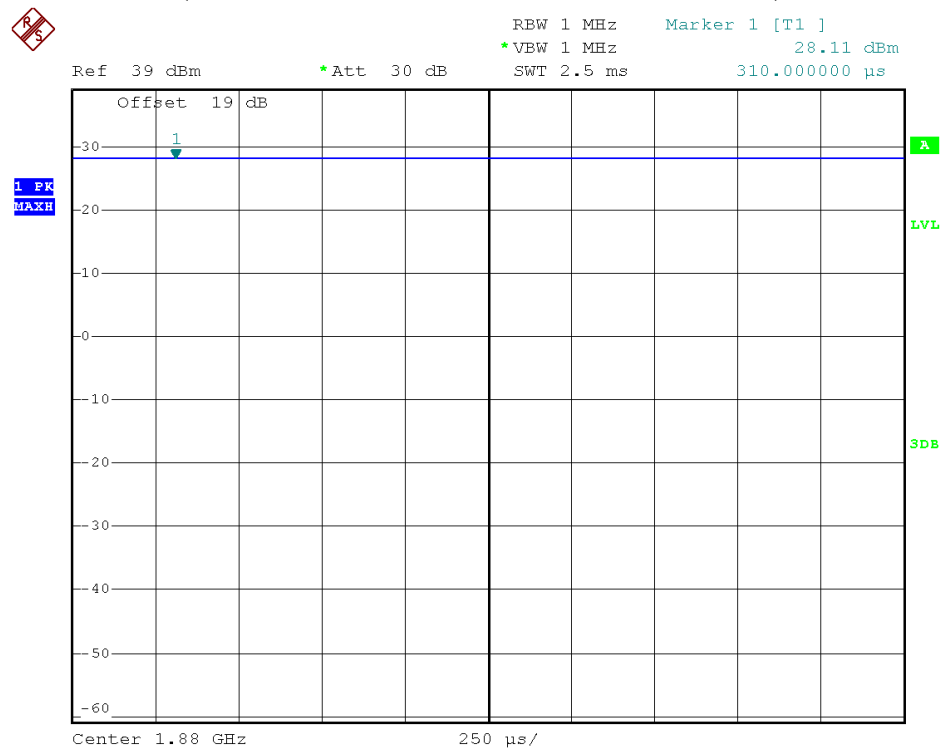

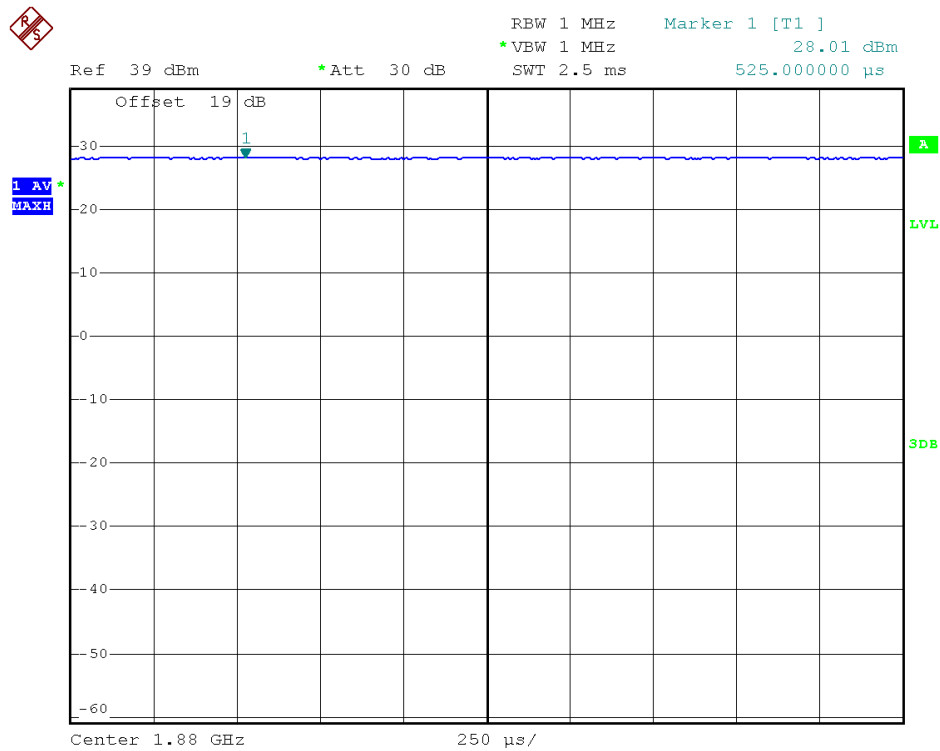


(Plot B2: EDGE 1900 MHz Channel = 661)

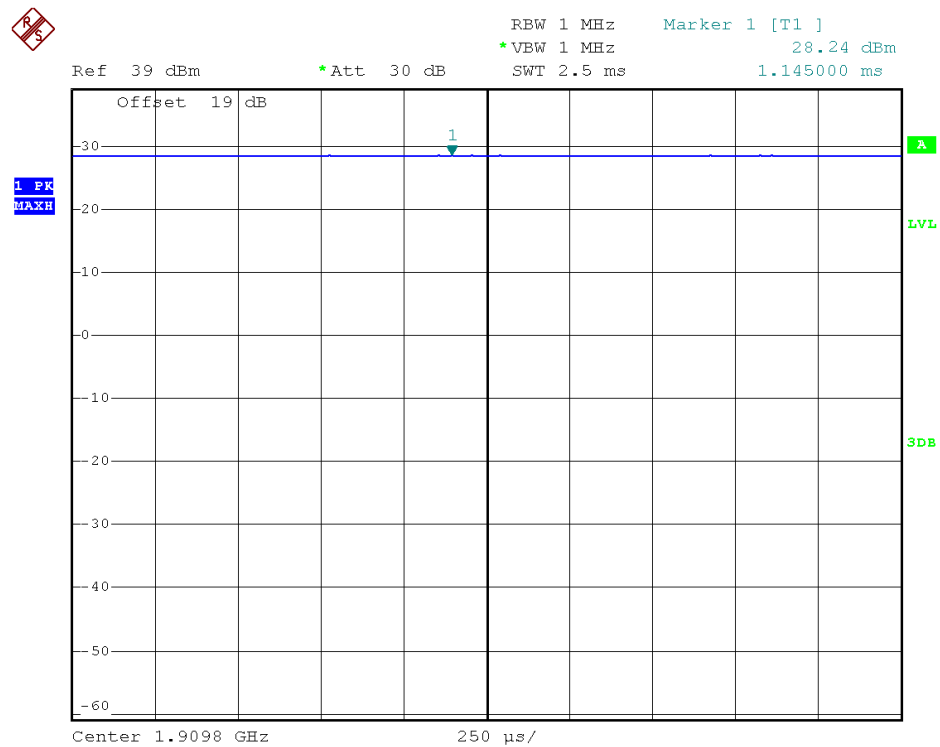


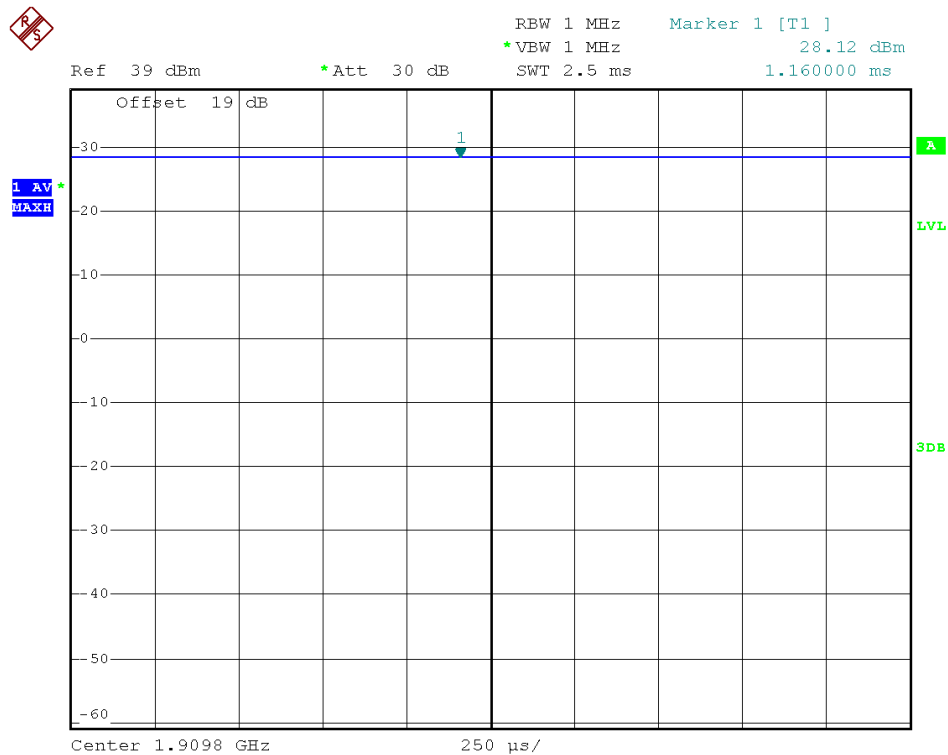


(Plot B3: EDGE 1900MHz Channel = 810)

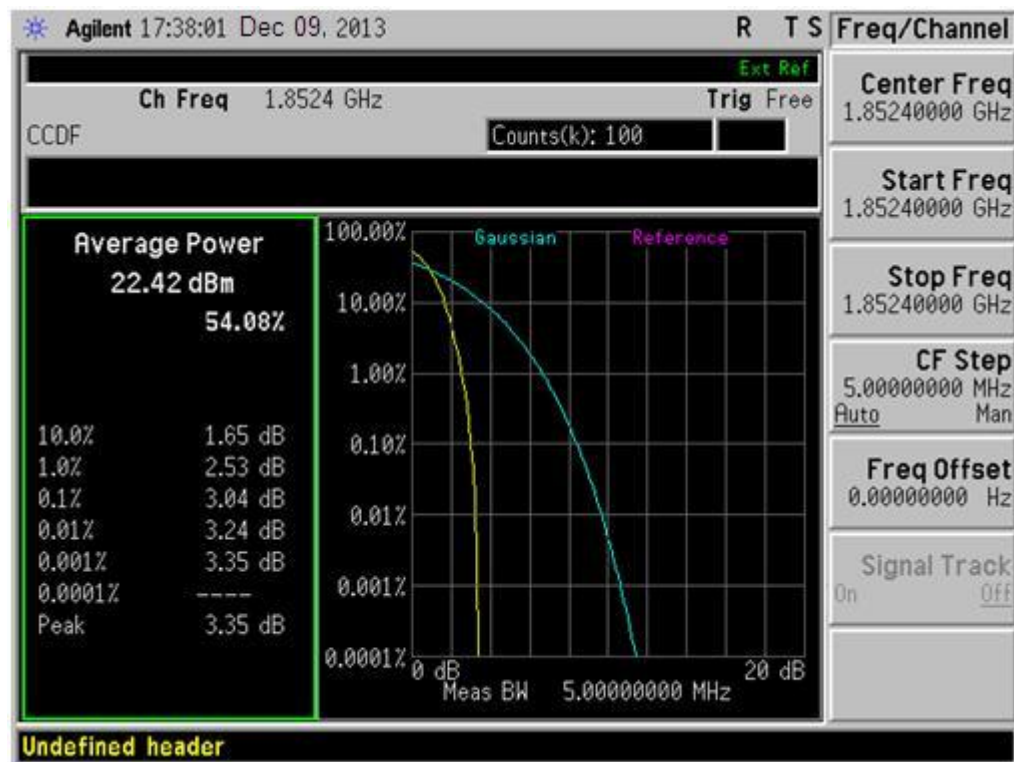


(Plot C1: WCDMA 1900MHz Channel = 9262)

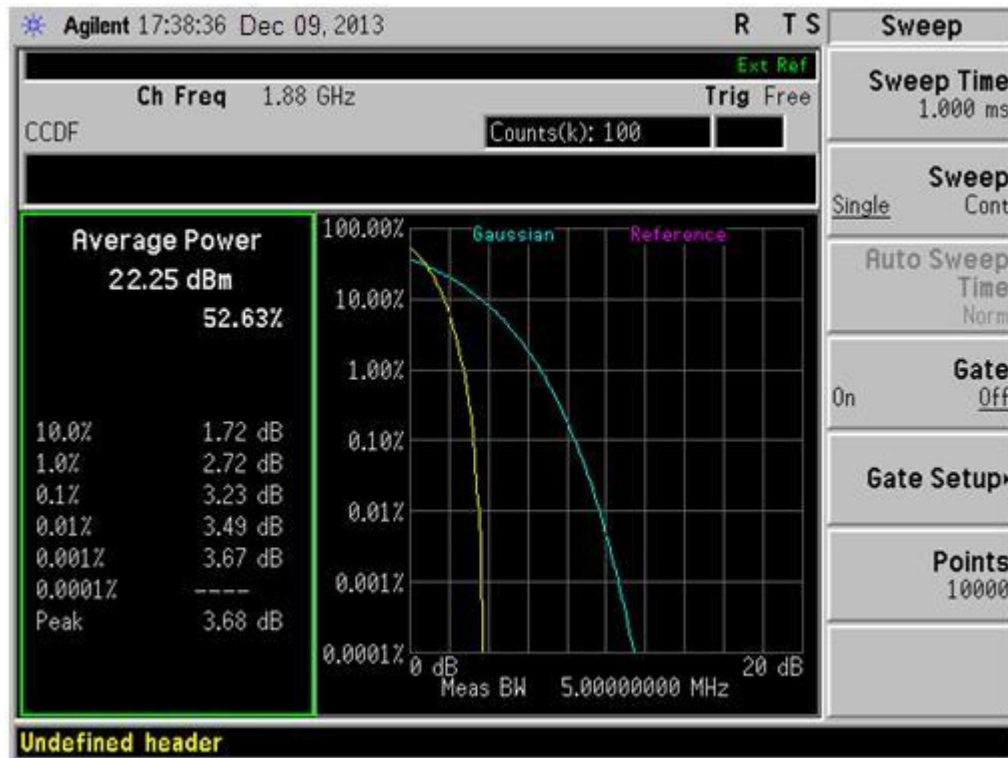


(Plot C2: WCDMA 1900MHz Channel = 9400)

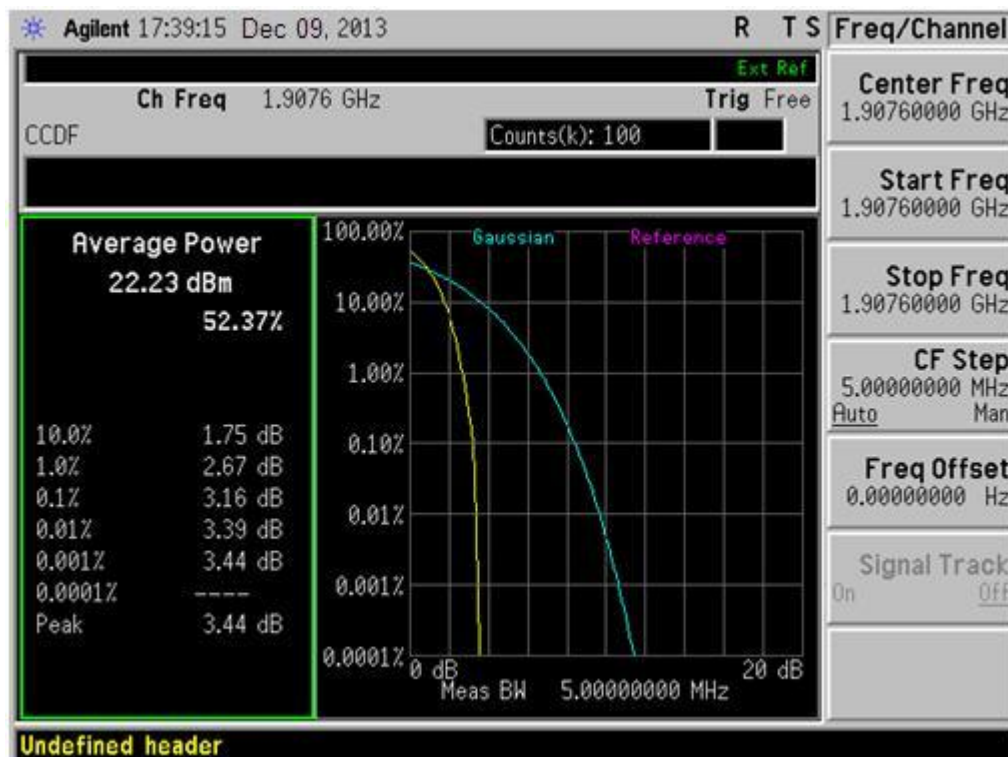


(Plot C3: WCDMA 1900MHz Channel = 9538)

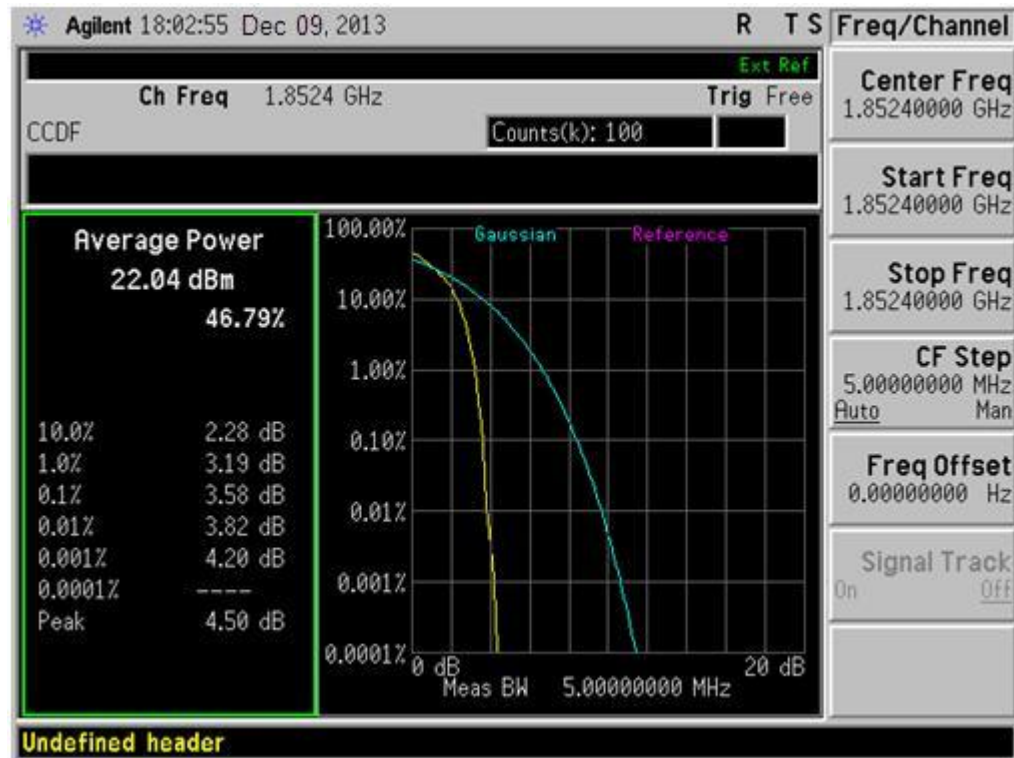

(Plot D1: HSDPA 1900MHz Channel = 9262)

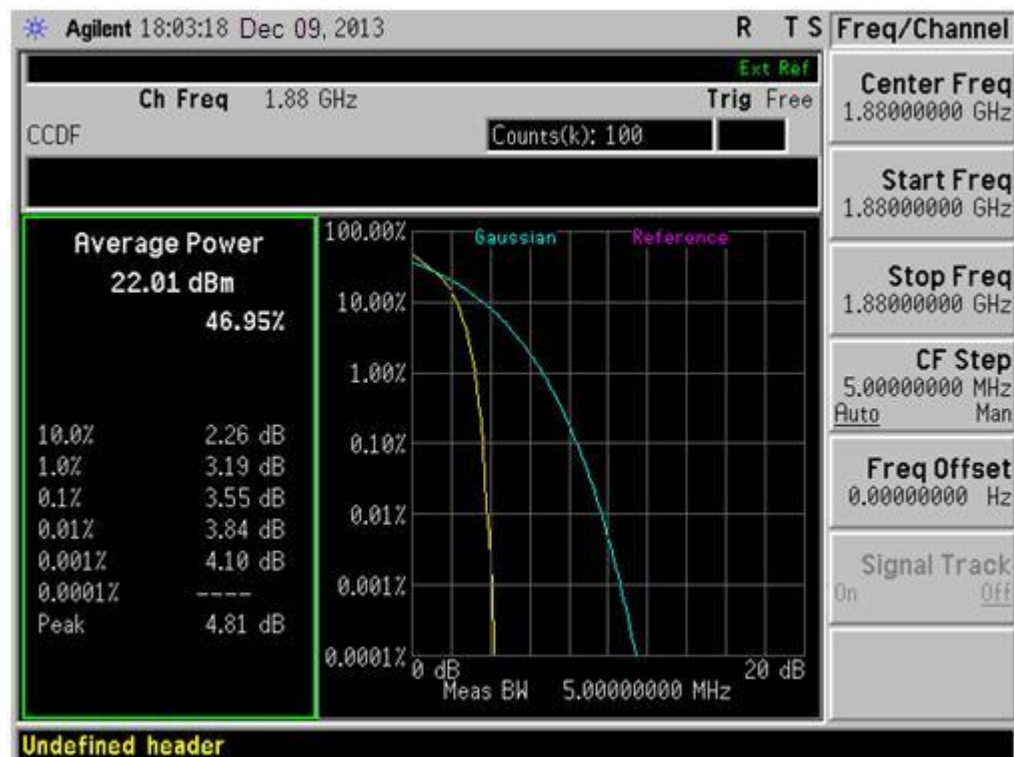

(Plot D2: HSDPA 1900MHz Channel = 9400)

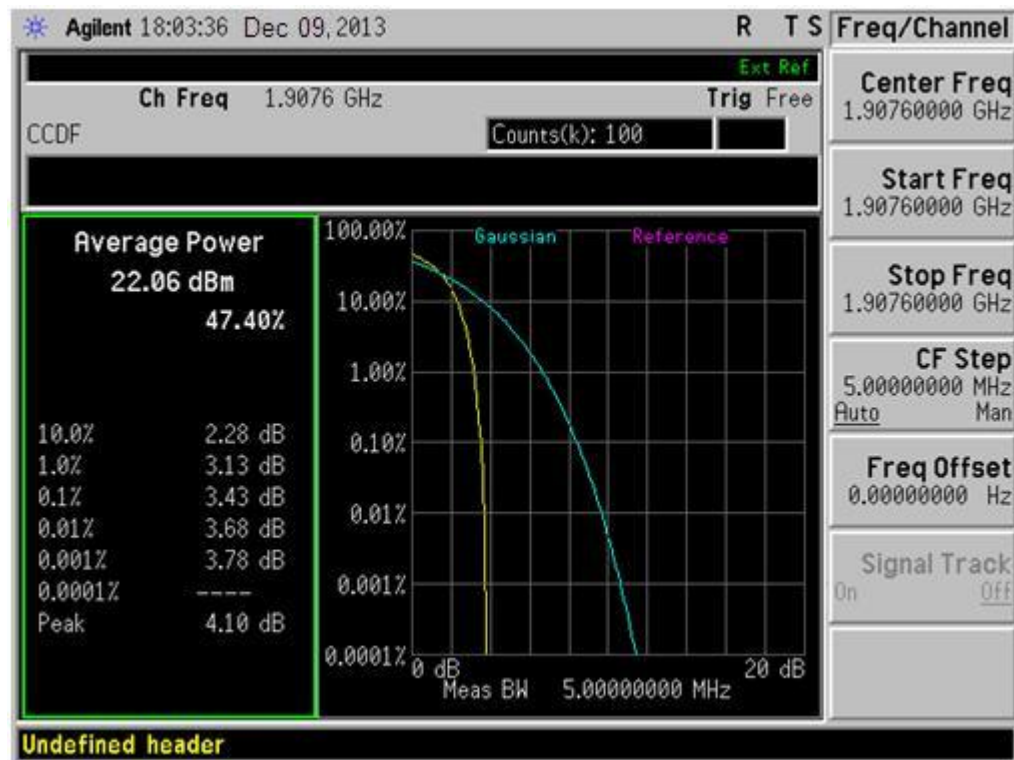

(Plot D3: HSDPA 1900MHz Channel = 9538)

2.3 99% Occupied Bandwidth

2.3.1 Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth,

2.3.2 Test Description

See section 2.1.2 of this report.

2.3.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the 99% occupied bandwidth.


1. Test Verdict:


Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
WCDMA 850MHz	4132	826.4	4.68 MHz	4.16 MHz	Plot A
	4183	836.6	4.70 MHz	4.18 MHz	Plot B
	4233	846.6	4.70 MHz	4.16 MHz	Plot C
WCDMA 1900MHz	9262	1852.4	4.72 MHz	4.14 MHz	Plot D
	9400	1880	4.70 MHz	4.16 MHz	Plot E
	9538	1907.6	4.74 MHz	4.18 MHz	Plot F
HSDPA 850MHz	4132	826.4	4.70 MHz	4.18 MHz	Plot G
	4183	836.6	4.72 MHz	4.18 MHz	Plot H
	4233	846.6	4.70 MHz	4.16 MHz	Plot I
HSDPA 1900MHz	9262	1852.4	4.68 MHz	4.18 MHz	Plot J
	9400	1880	4.72 MHz	4.18 MHz	Plot K
	9538	1907.6	4.74 MHz	4.16 MHz	Plot L
GSM 850MHz	128	824.2	320.00 KHz	248.00 KHz	Plot M
	190	836.6	324.00 KHz	248.00 KHz	Plot N
	251	848.8	320.00 KHz	240.00 KHz	Plot O
GSM 1900MHz	512	1850.2	320.00 KHz	244.00 KHz	Plot P
	661	1880.0	320.00 KHz	252.00 KHz	Plot Q
	810	1909.8	320.00 KHz	252.00 KHz	Plot R
GPRS 850MHz	128	824.2	316.00 KHz	244.00 KHz	Plot S




Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
	190	836.6	320.00 KHz	244.00 KHz	Plot T
	251	848.8	320.00 KHz	248.00 KHz	Plot U
GPRS 1900MHz	512	1850.2	312.00 KHz	248.00 KHz	Plot V
	661	1880.0	316.00 KHz	248.00 KHz	Plot W
	810	1909.8	320.00 KHz	248.00 KHz	Plot X
EDGE 850MHz	128	824.2	316.00KHz	244.00KHz	Plot Y
	190	836.6	316.00KHz	244.00KHz	Plot Z
	251	848.8	320.00KHz	244.00KHz	Plot A1
EDGE 1900MHz	512	1850.2	316.00KHz	244.00KHz	Plot B1
	661	1880.0	324.00KHz	244.00KHz	Plot C1
	810	1909.8	316.00KHz	244.00KHz	Plot D1


2. Test Plots:

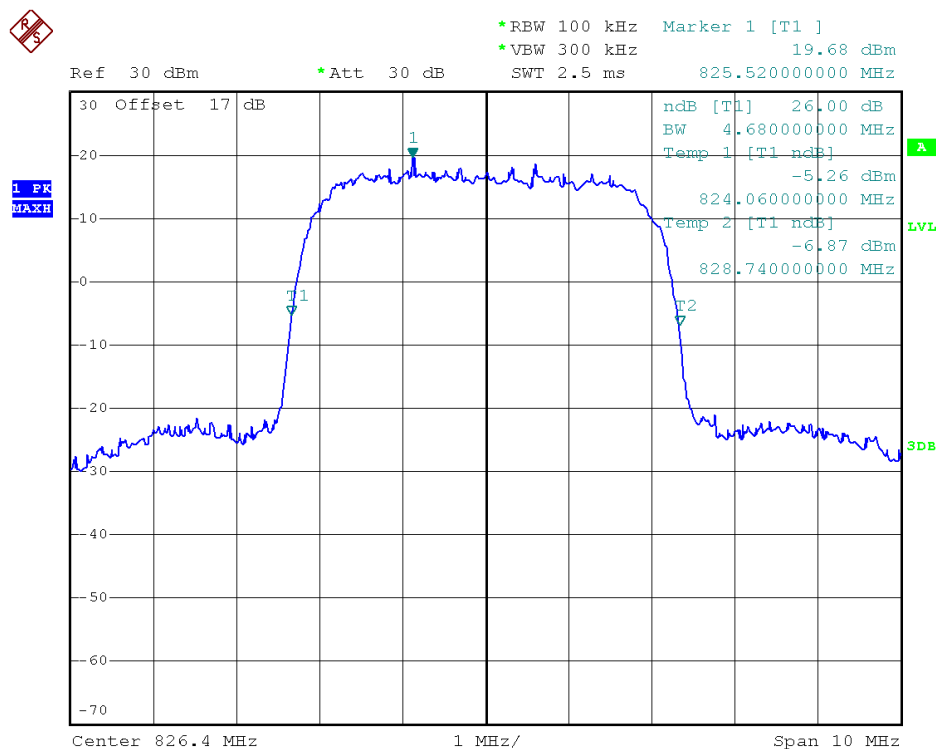

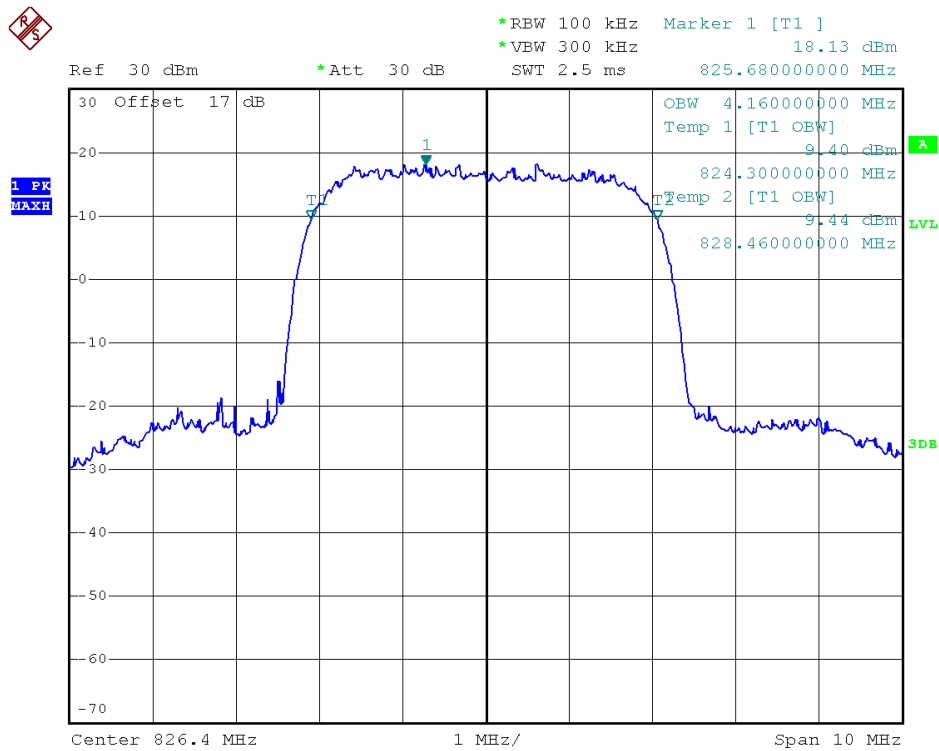



(Plot A: WCDMA 850MHz Channel = 4132)

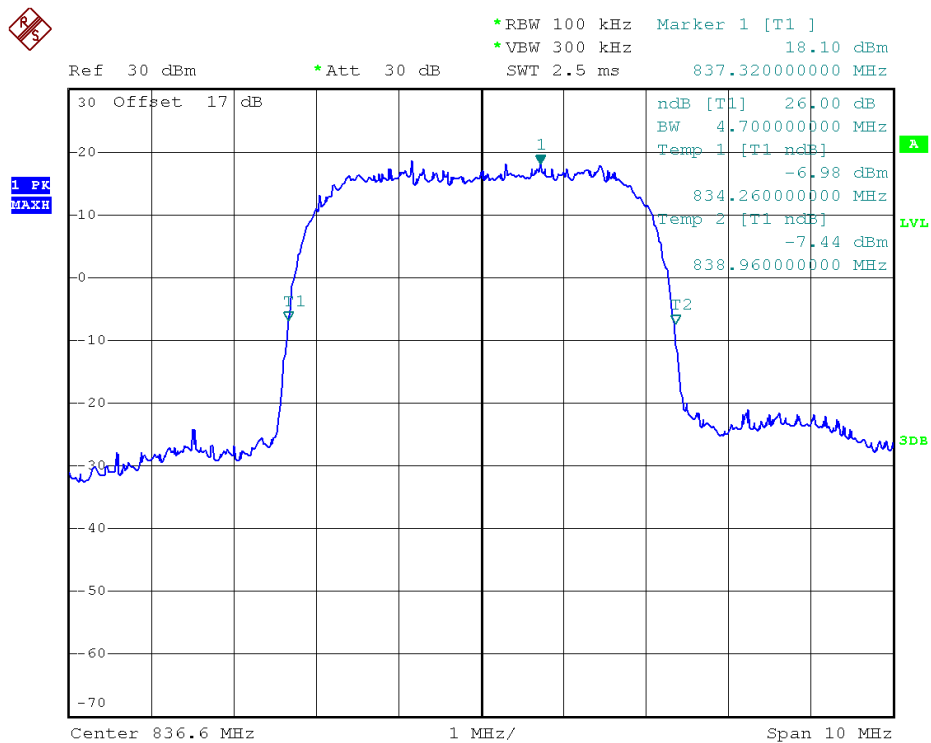

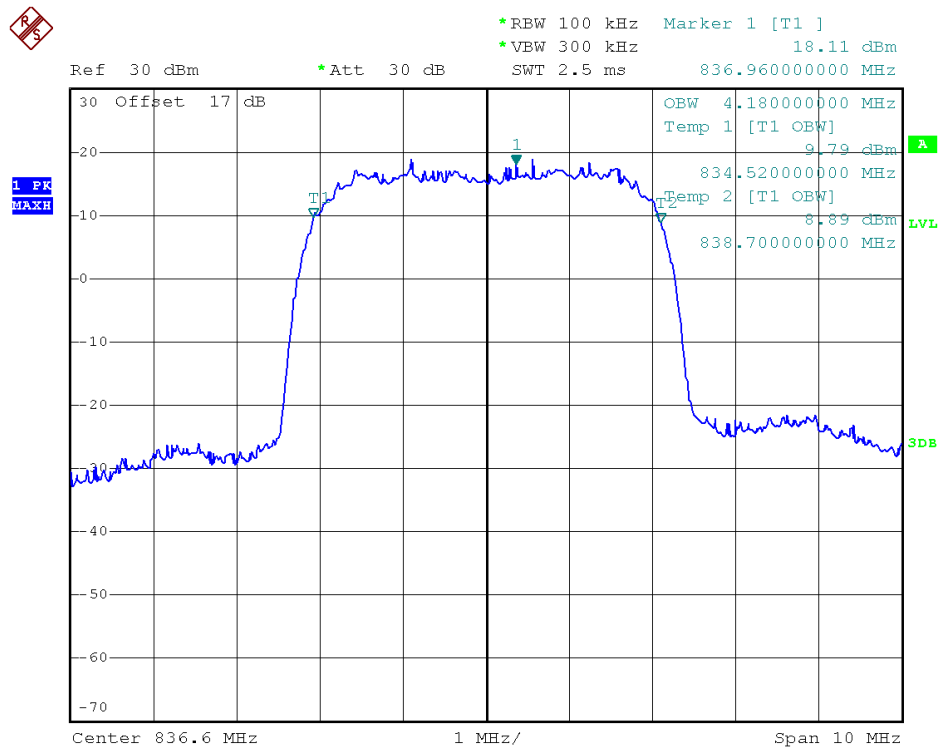



(Plot B: WCDMA 850 MHz Channel = 4183)

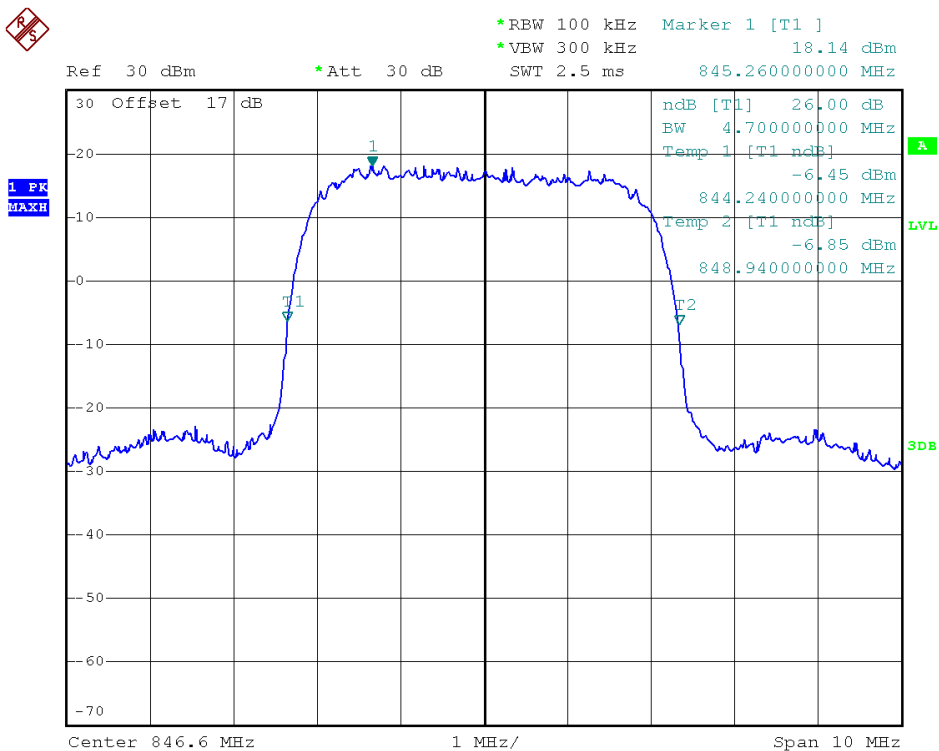

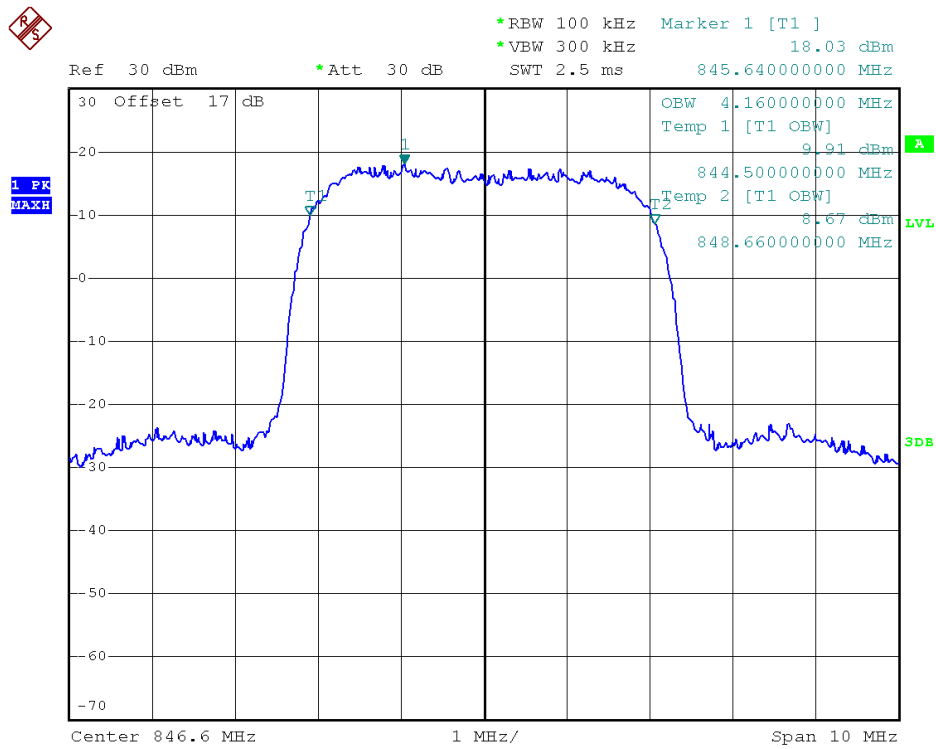



(Plot C: WCDMA 850MHz Channel = 4233)

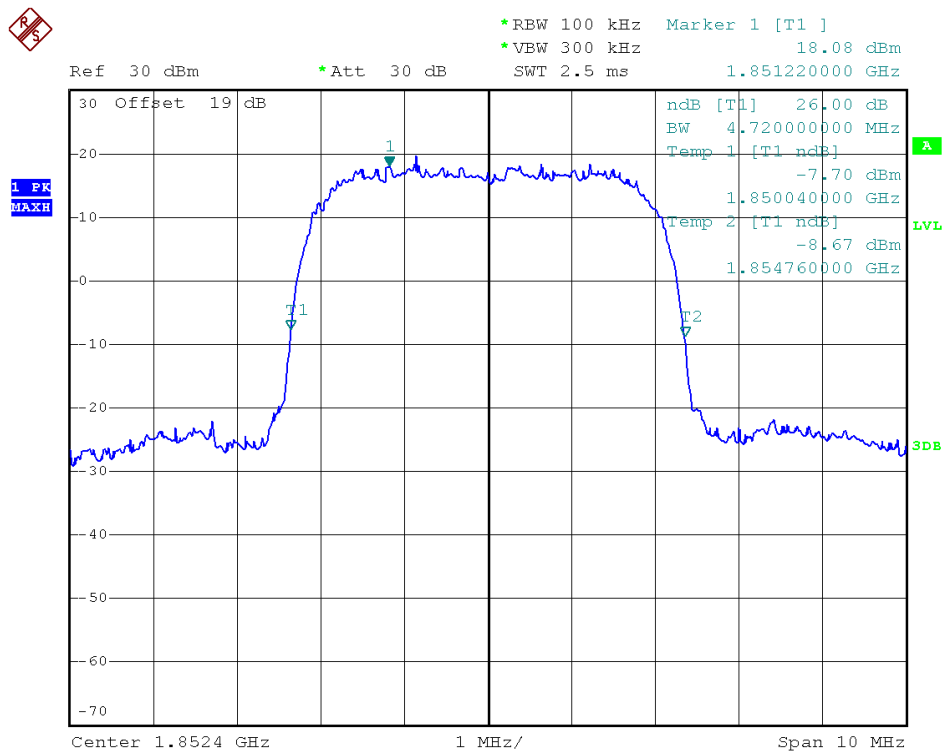

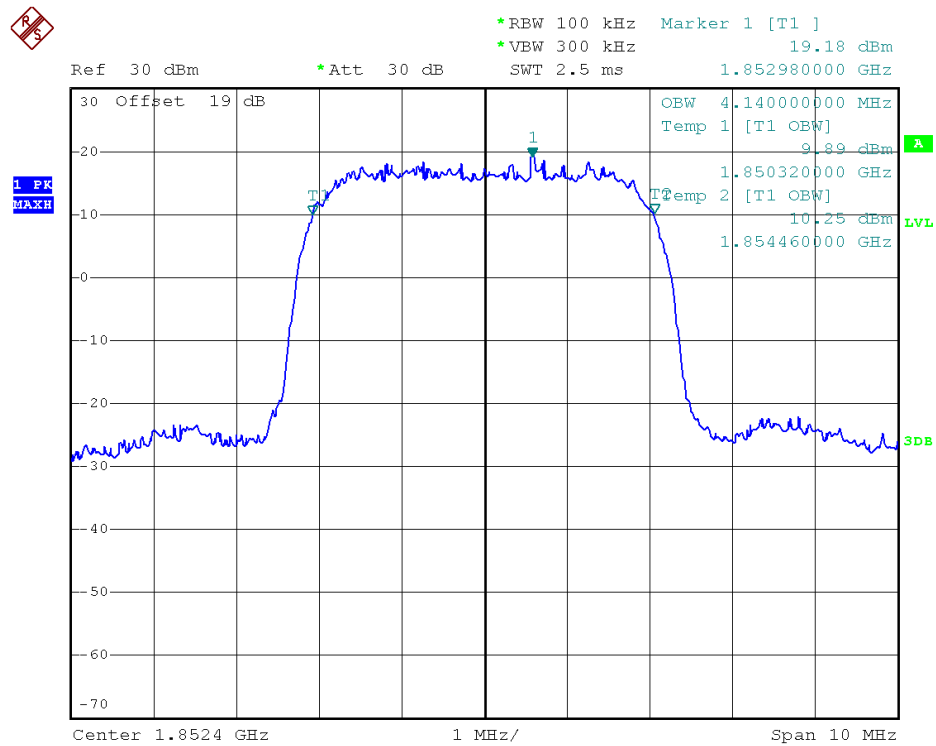



(Plot D: WCDMA 1900MHz Channel = 9262)

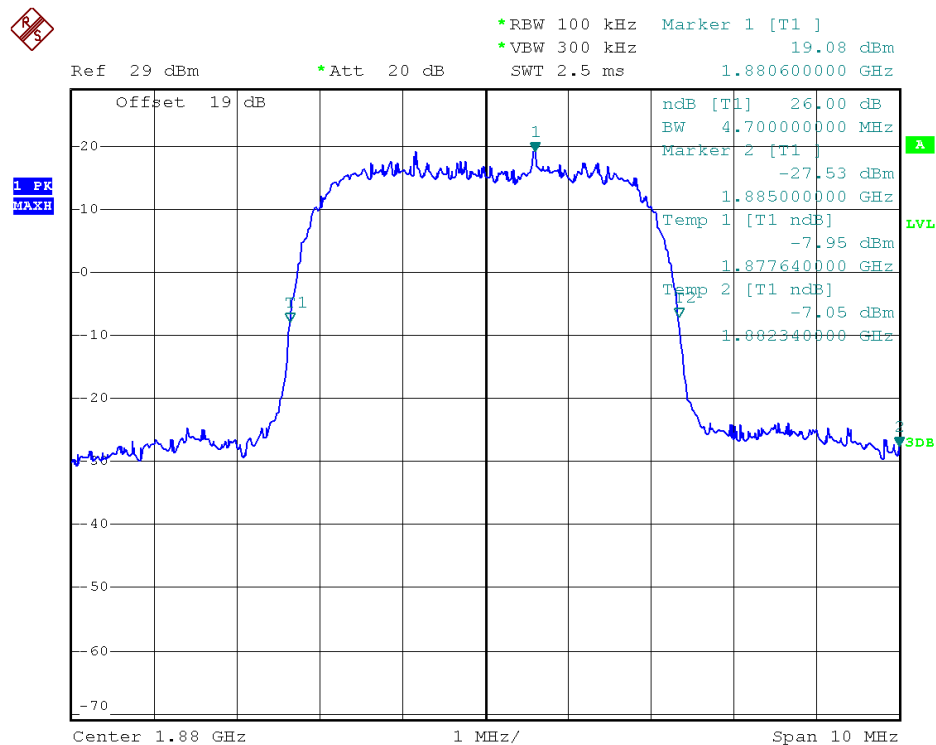

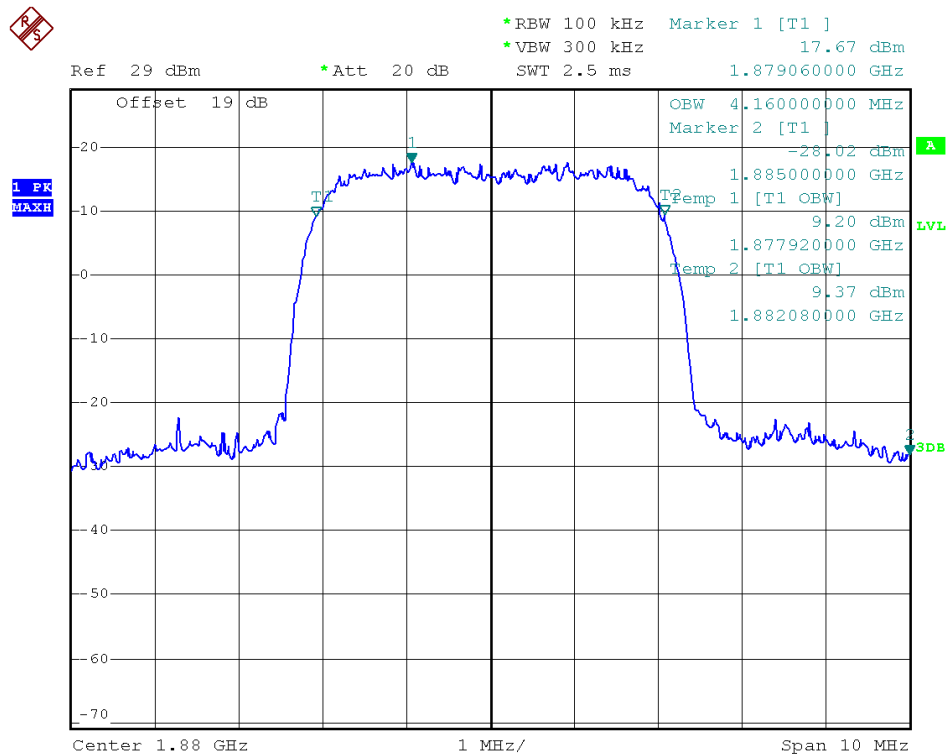



(Plot E: WCDMA 1900 MHz Channel = 9400)

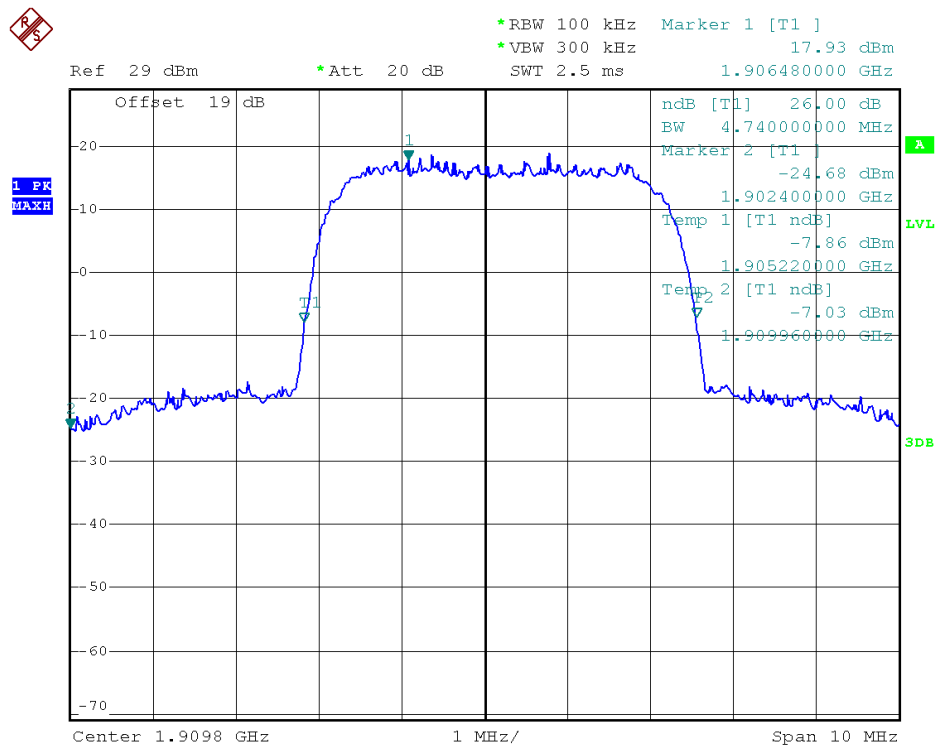

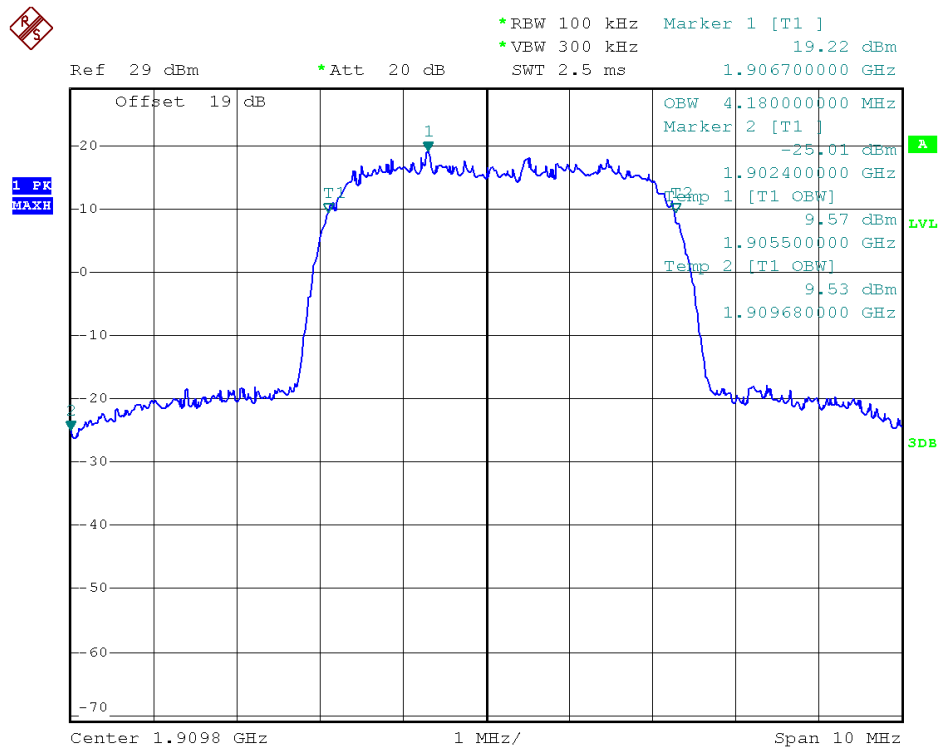



(Plot F: WCDMA1900MHz Channel = 9538)

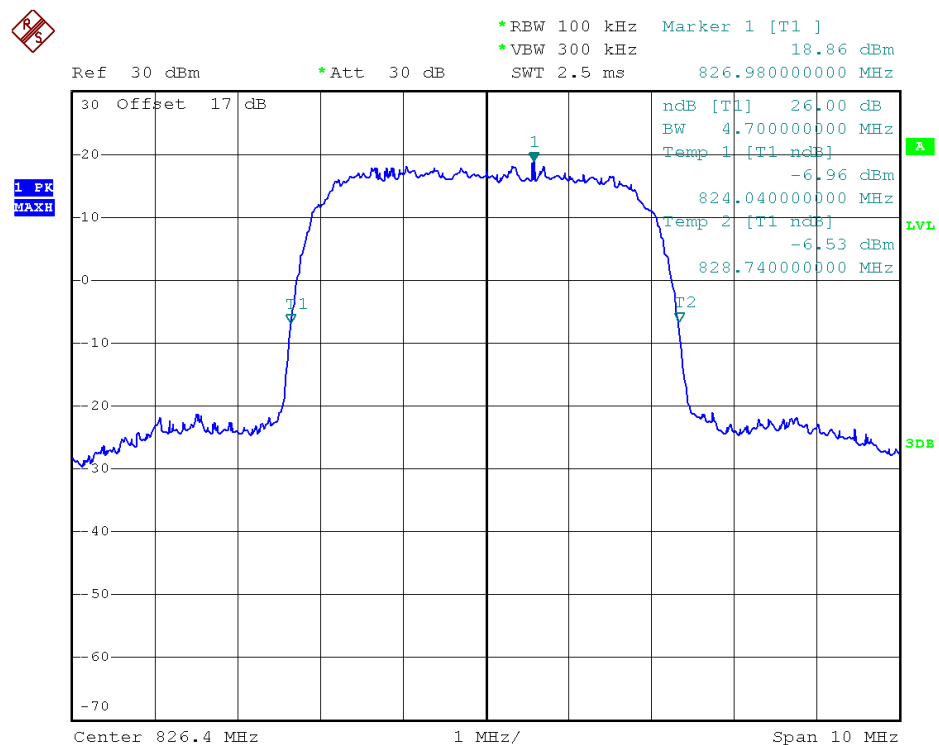

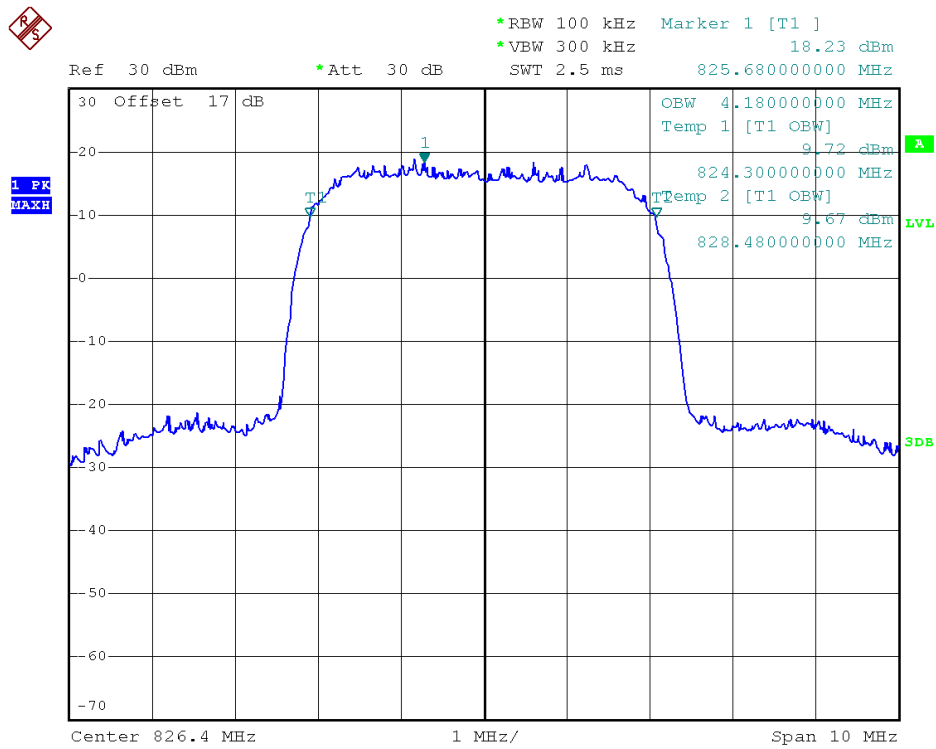



(Plot G: HSDPA 850MHz Channel = 4132)

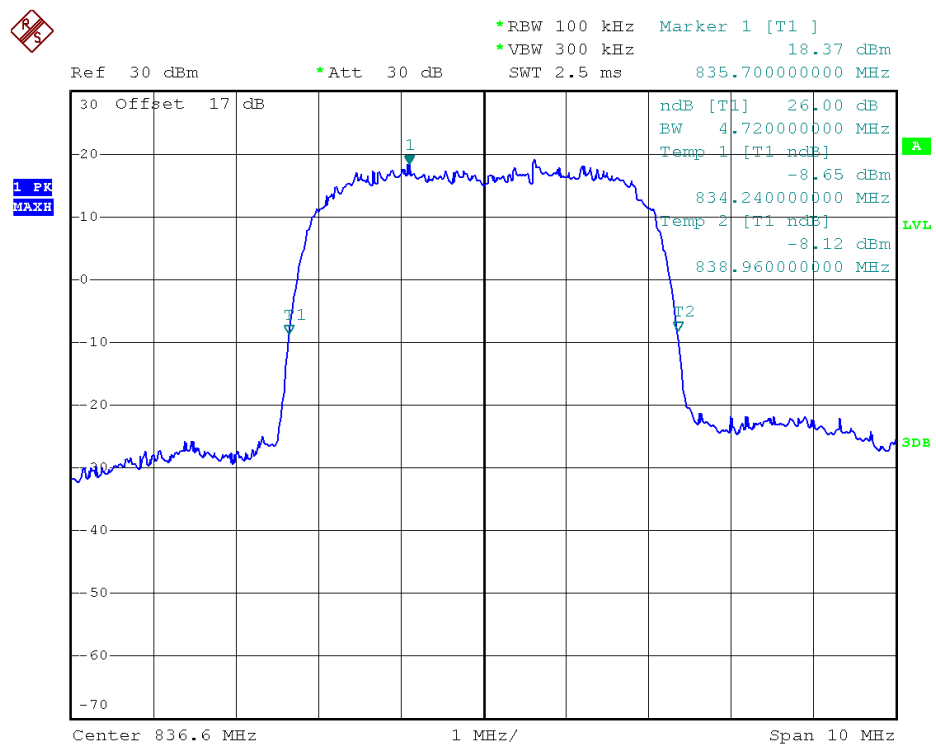

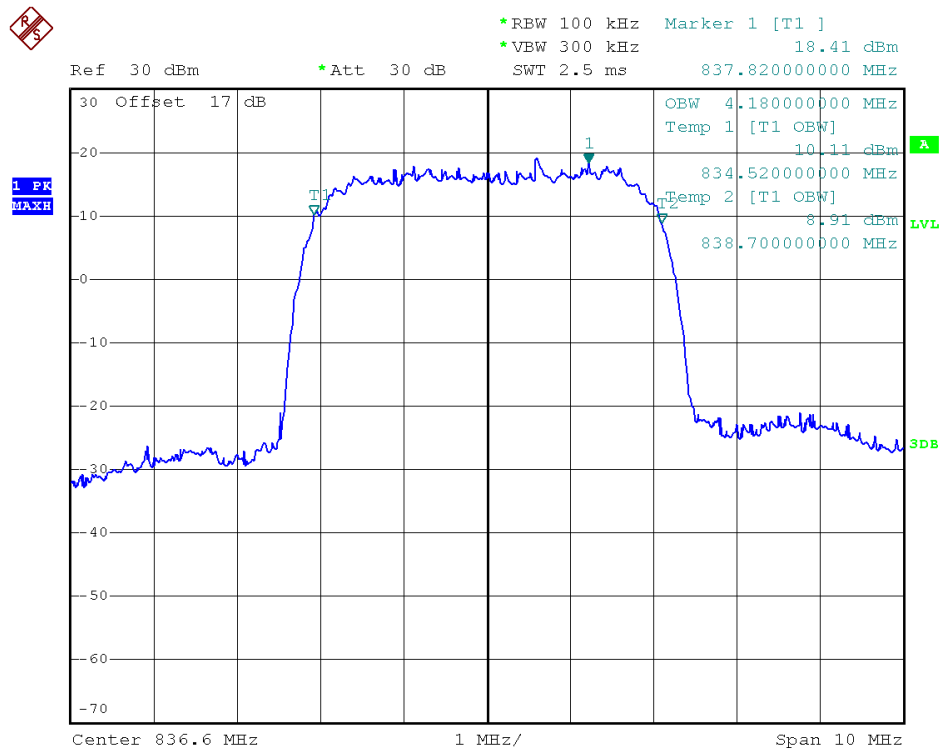



(Plot H: HSDPA850 MHz Channel = 4183)

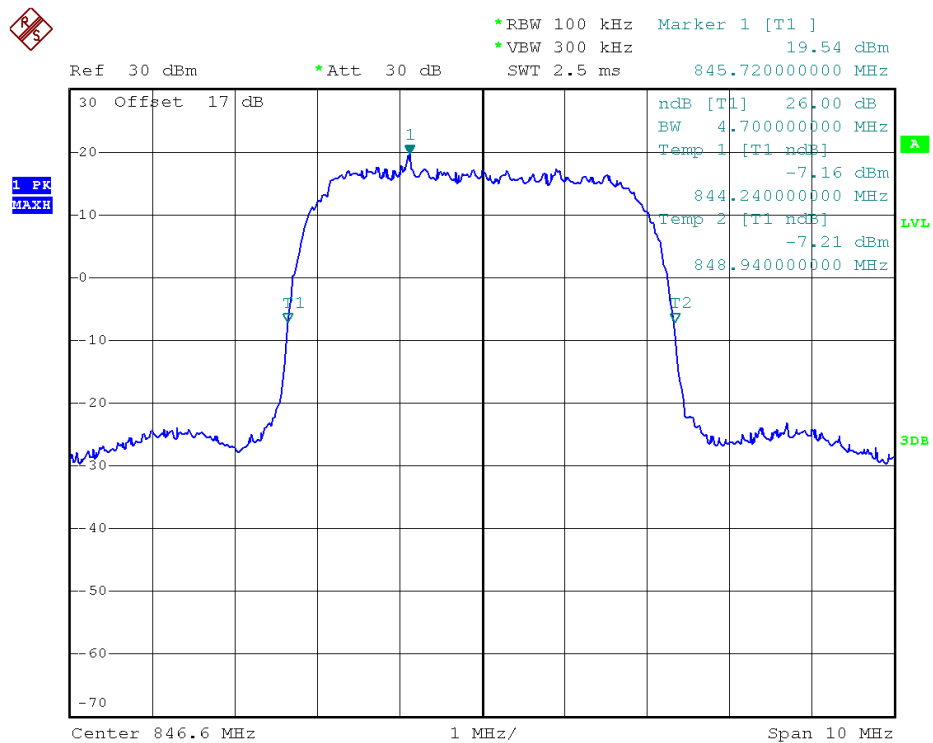

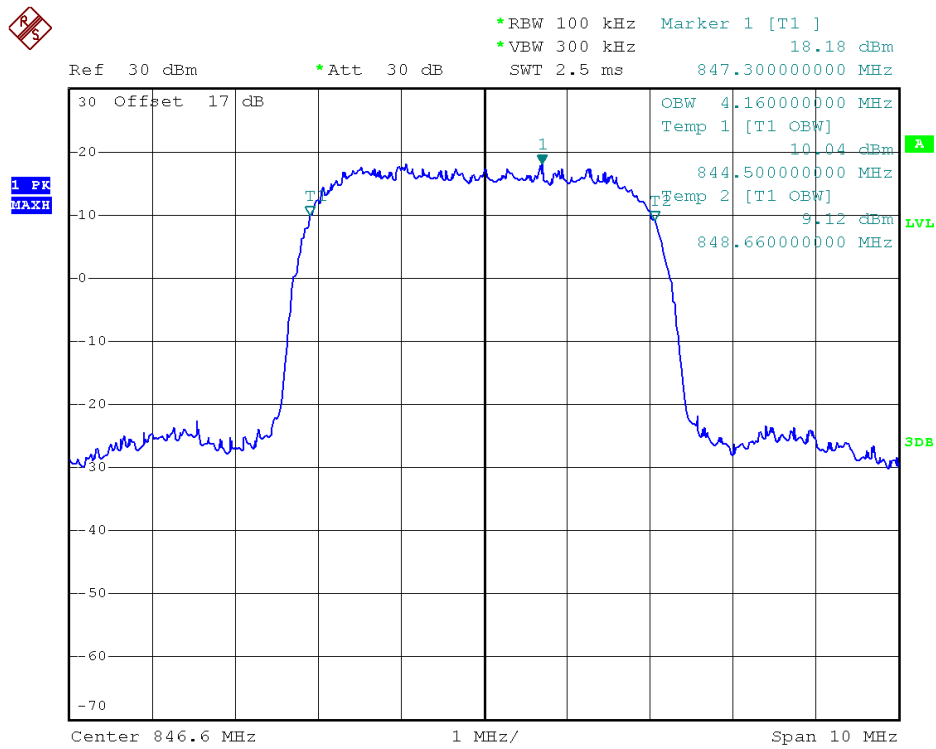



(Plot I: HSDPA 850 MHz Channel = 4233)

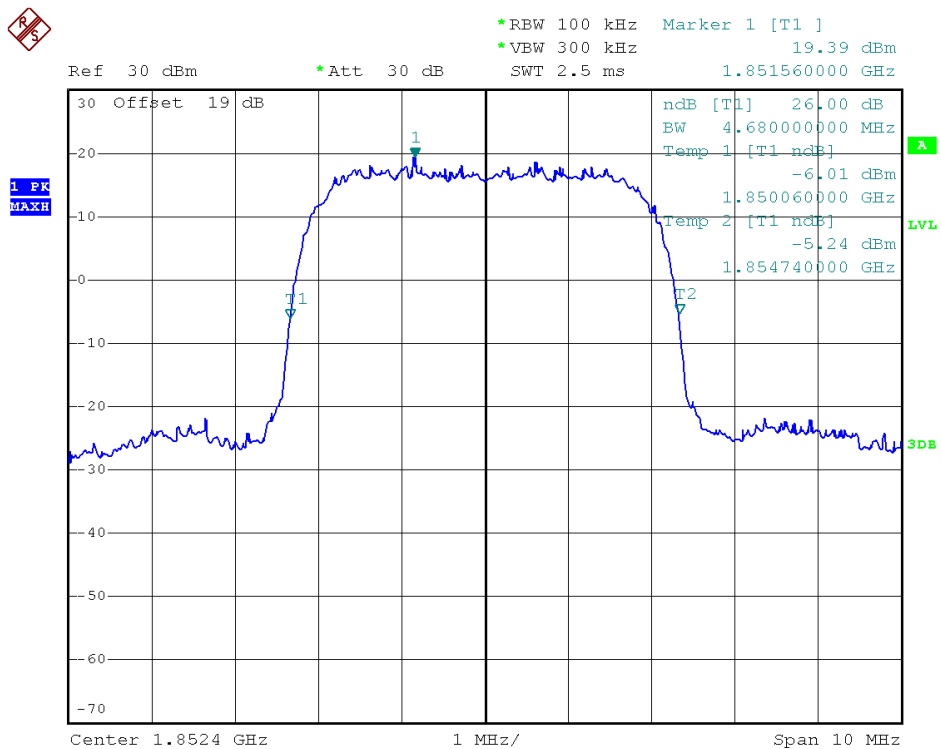

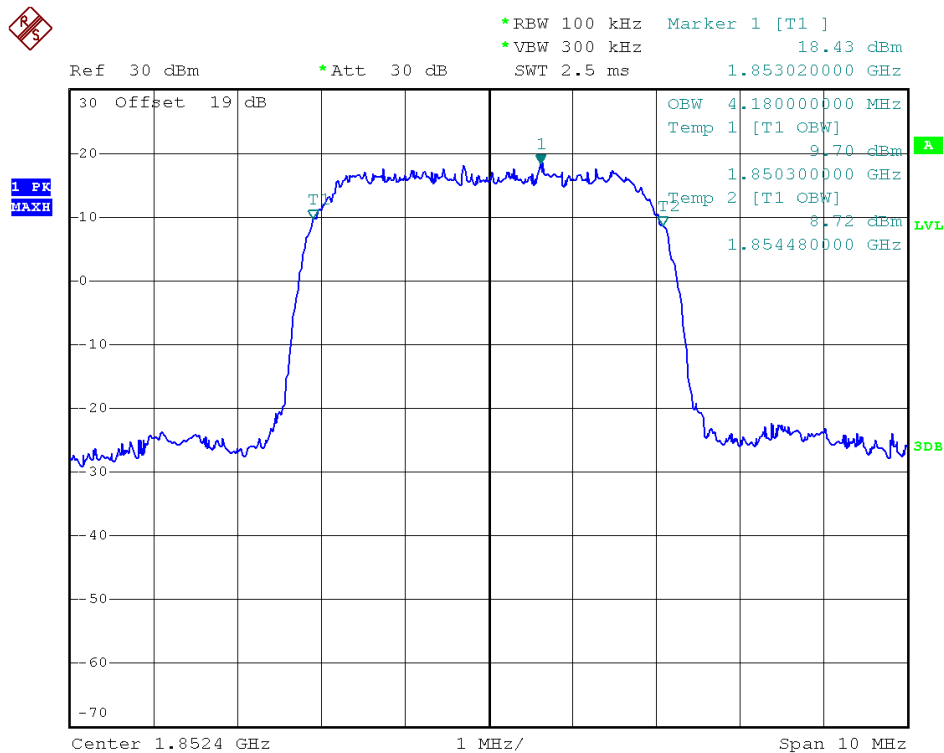



(Plot J: HSDPA1900 MHz Channel = 9262)

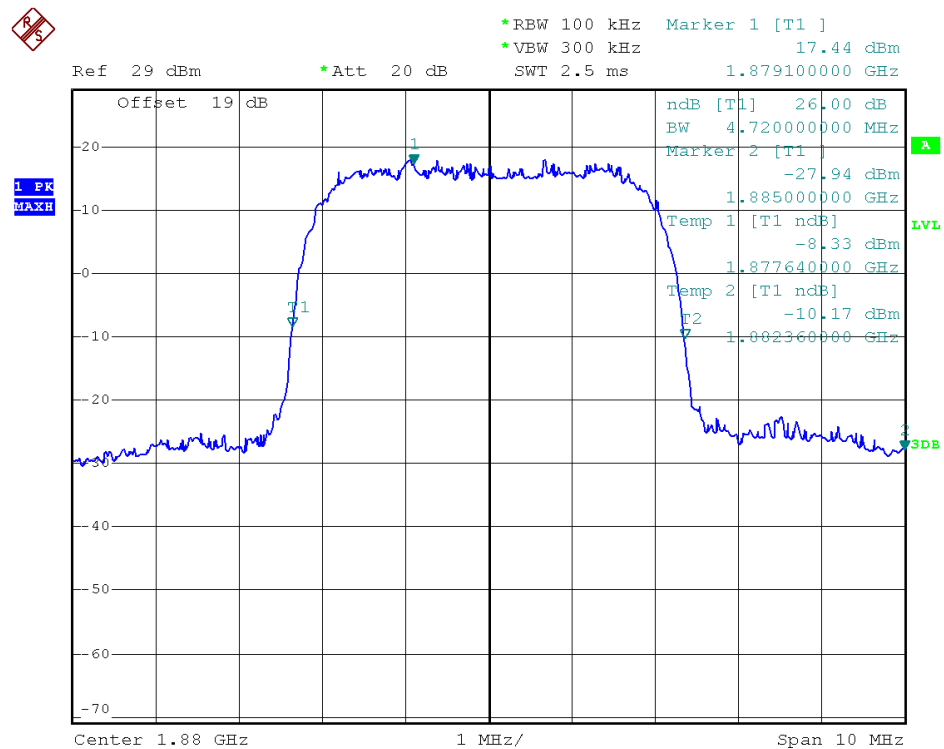

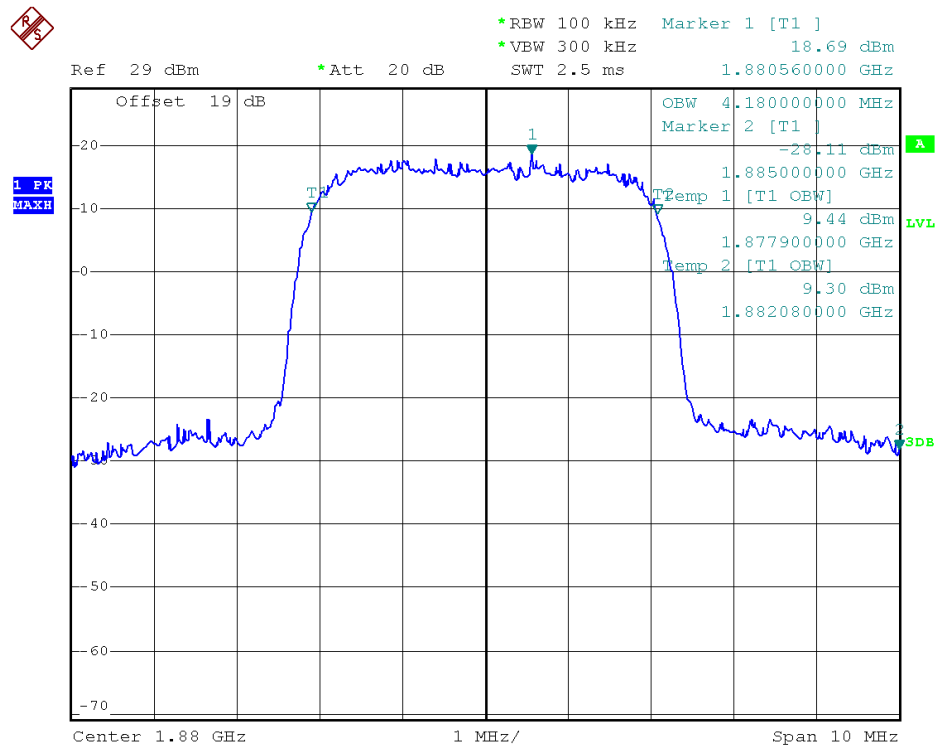



(Plot K: HSDPA 1900 MHz Channel = 9400)

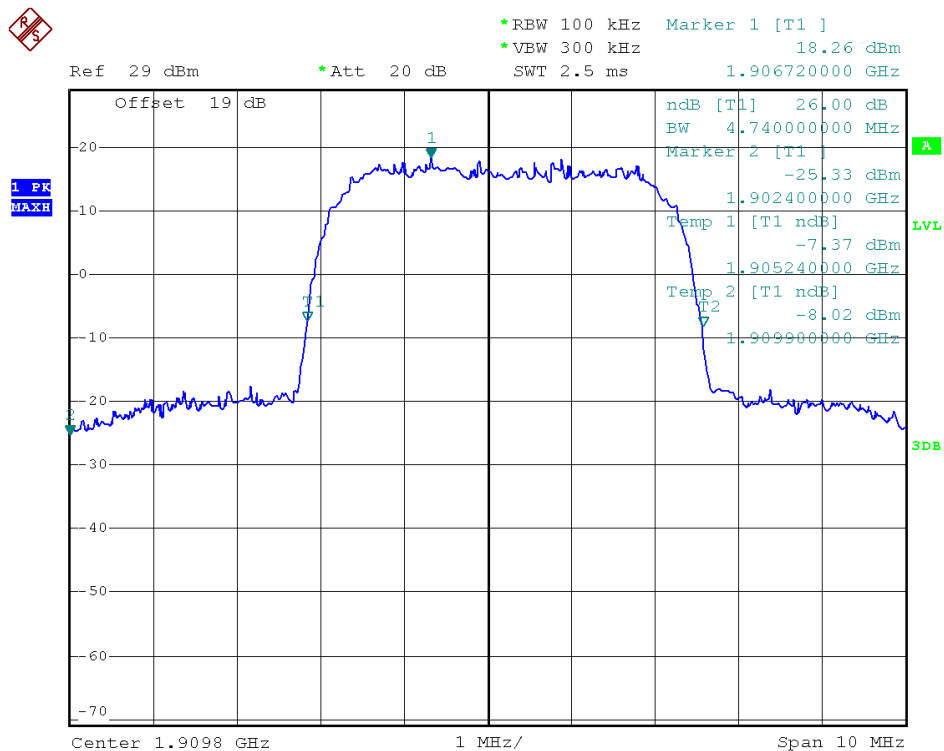

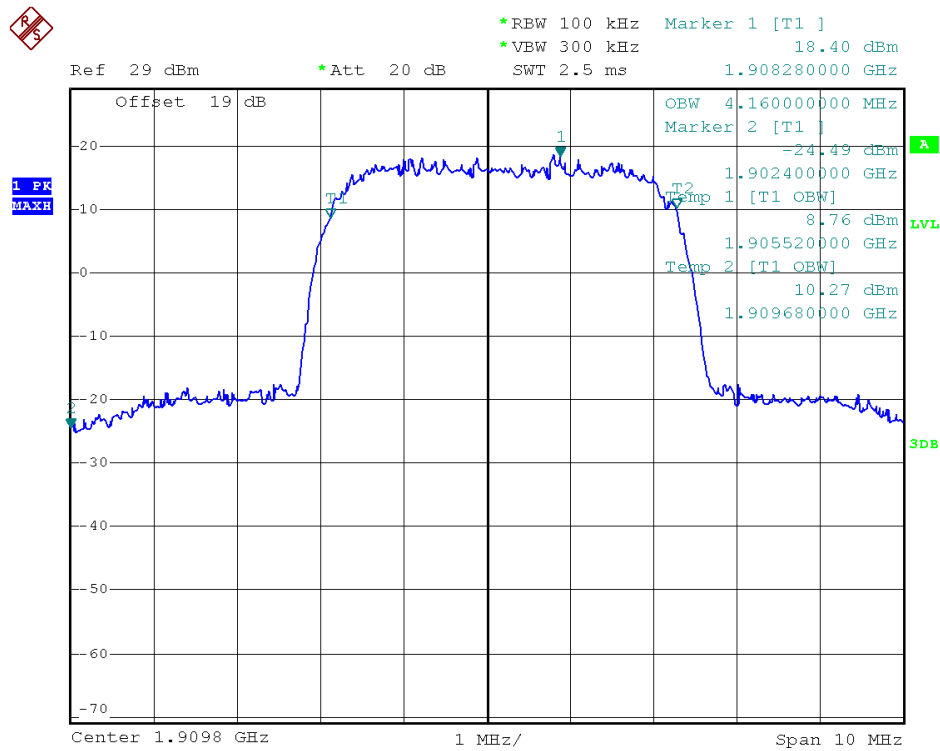



(Plot L: HSDPA1900 MHz Channel = 9538)

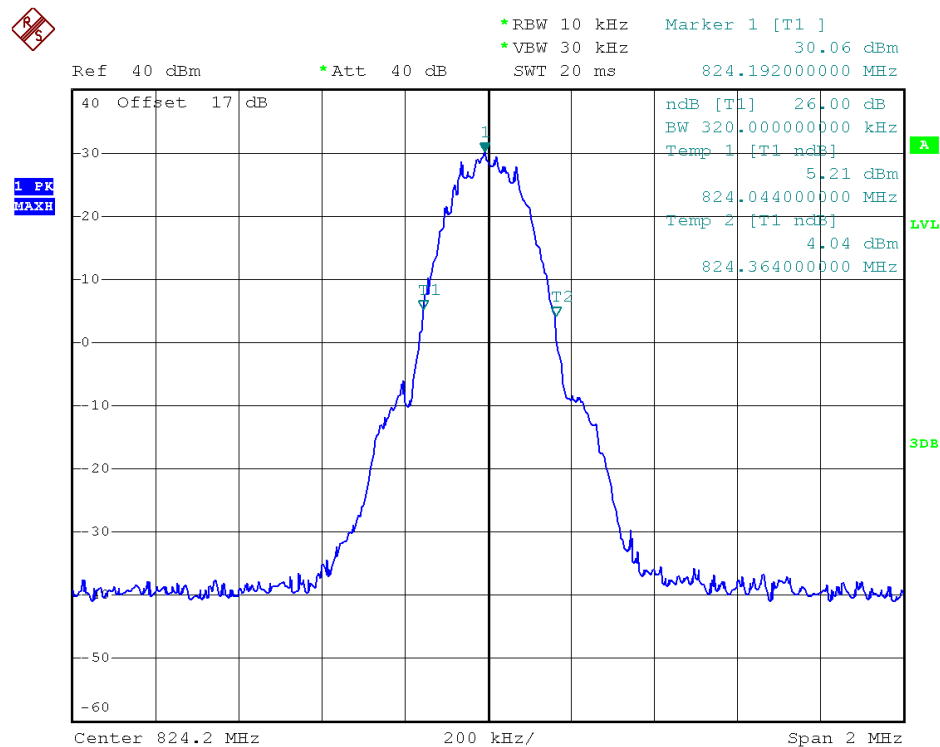

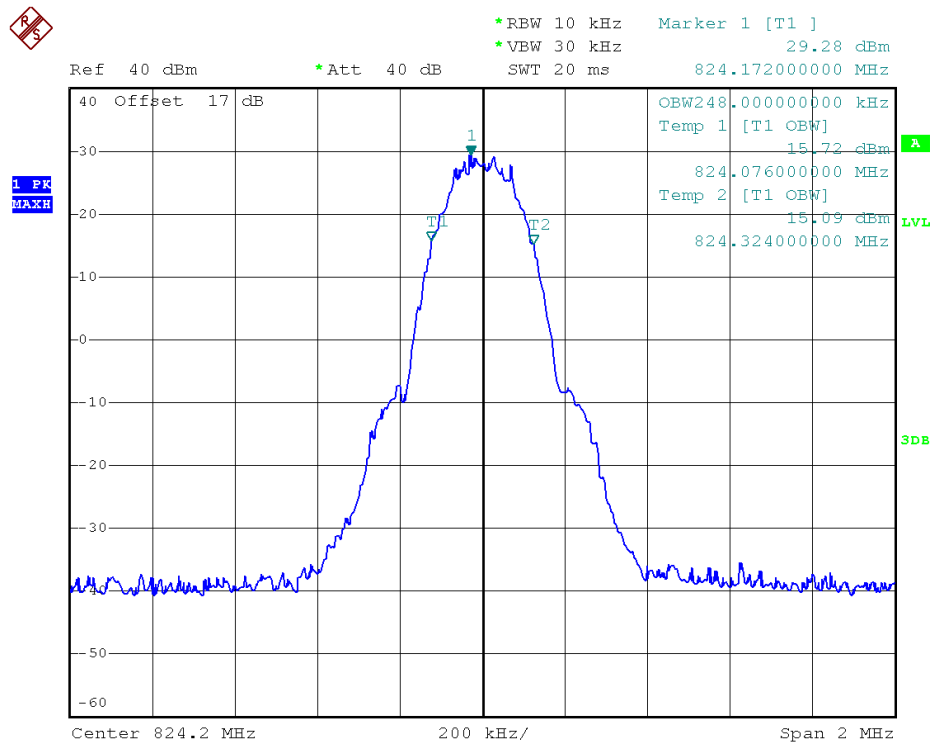



(Plot M: GSM 850MHz Channel = 128)

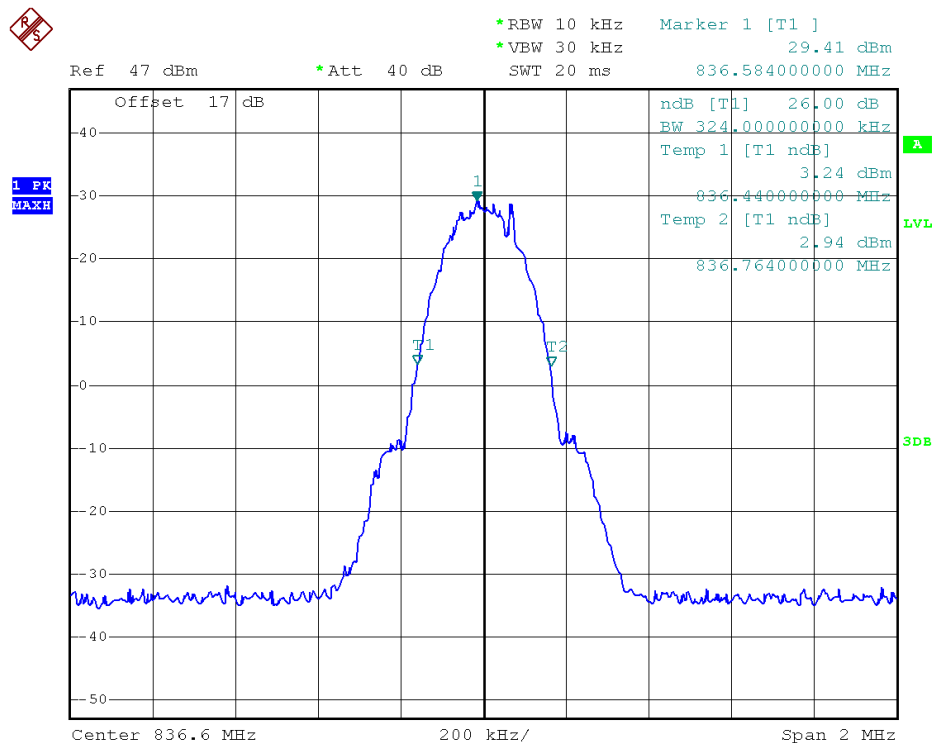

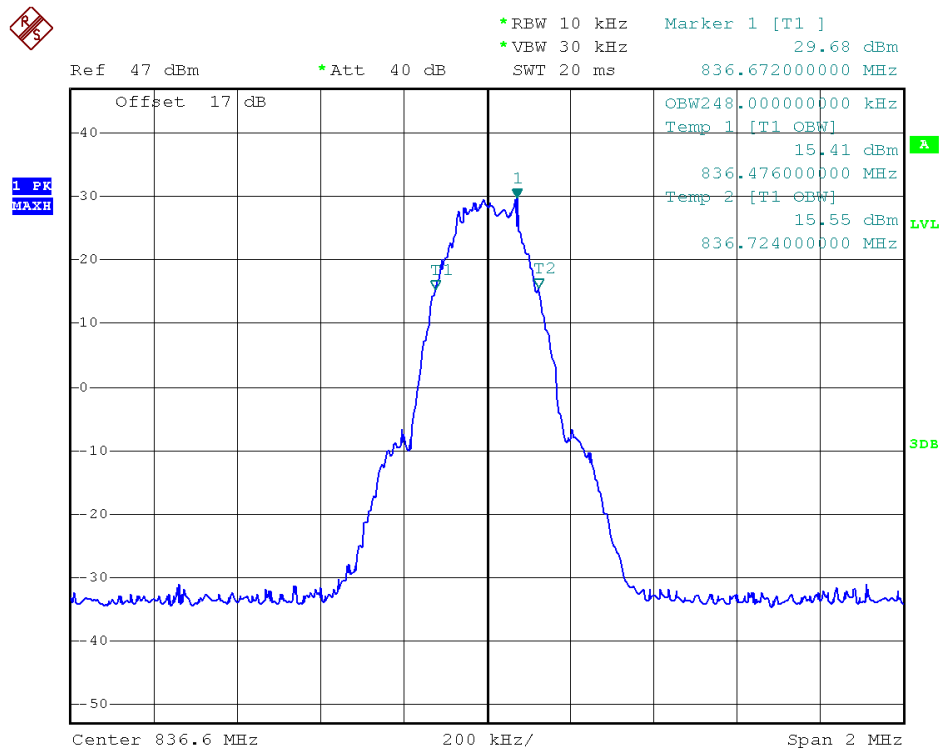



(Plot N: GSM 850MHz Channel = 190)

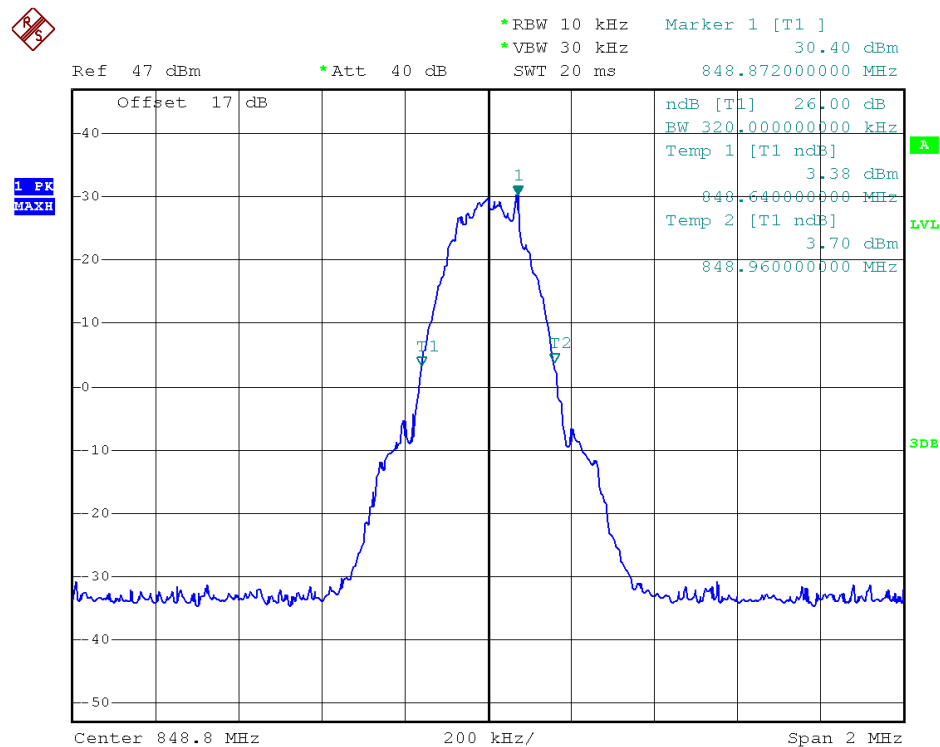

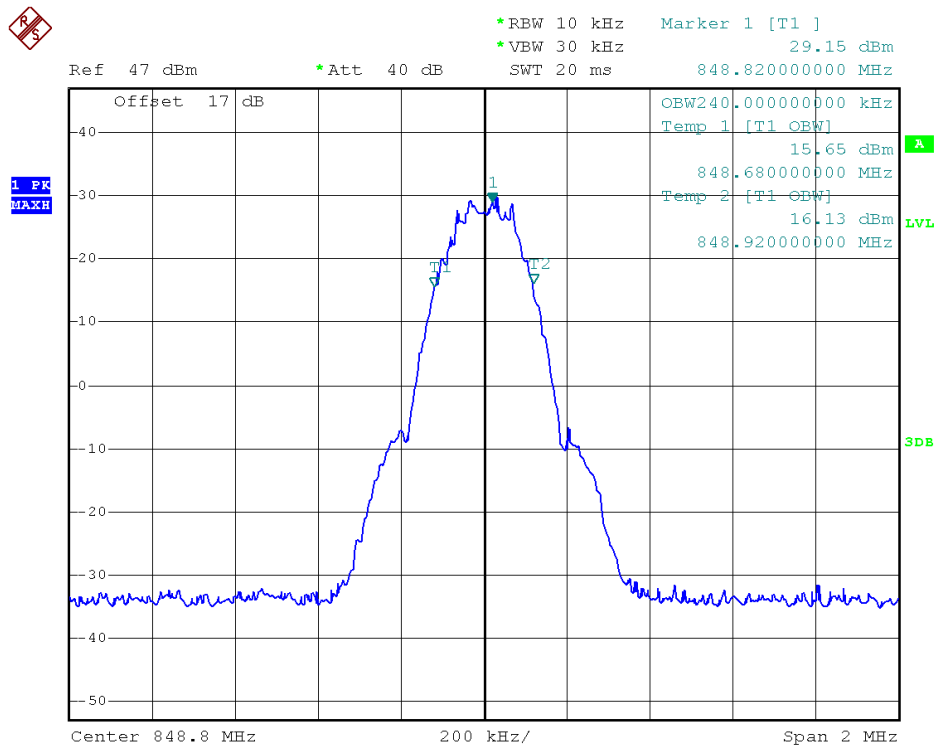



(Plot O: GSM 850MHz Channel = 251)

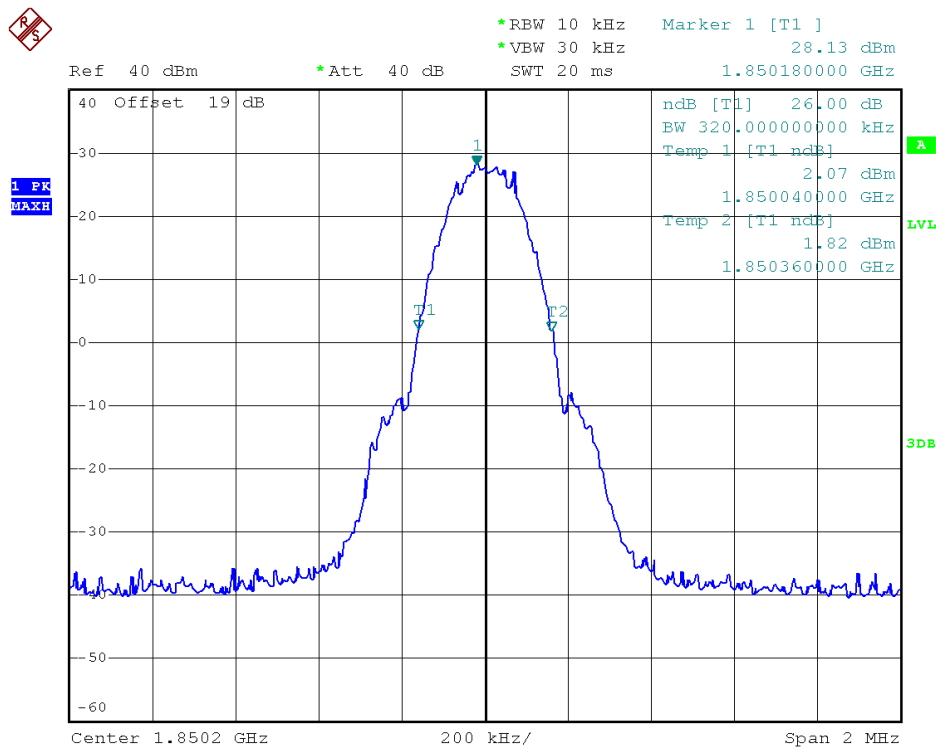

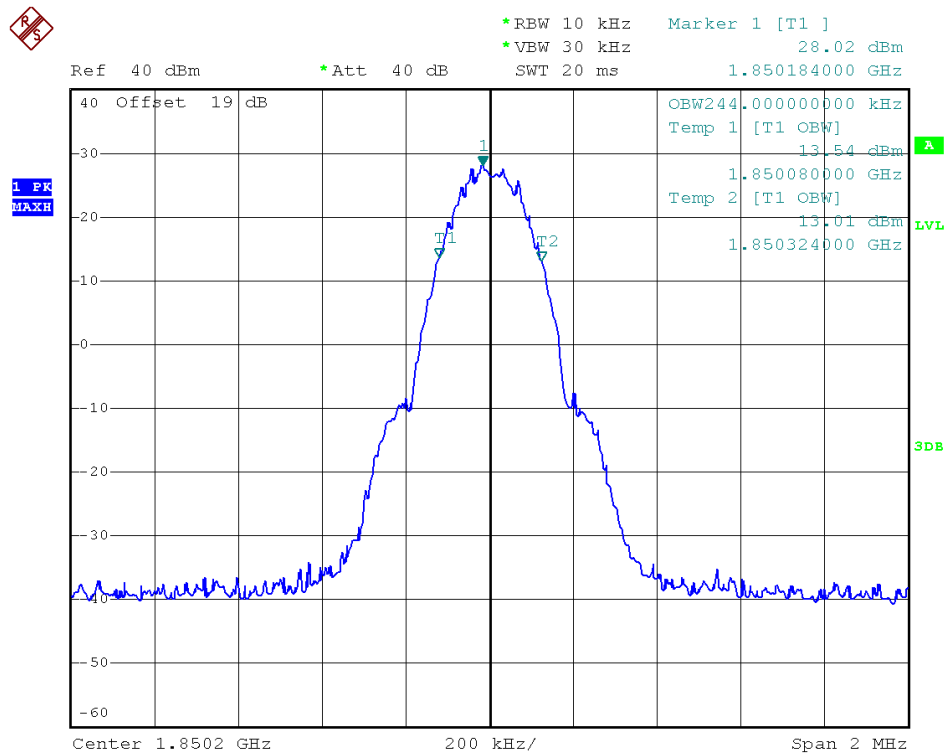



(Plot P: GSM 1900MHz Channel = 512)

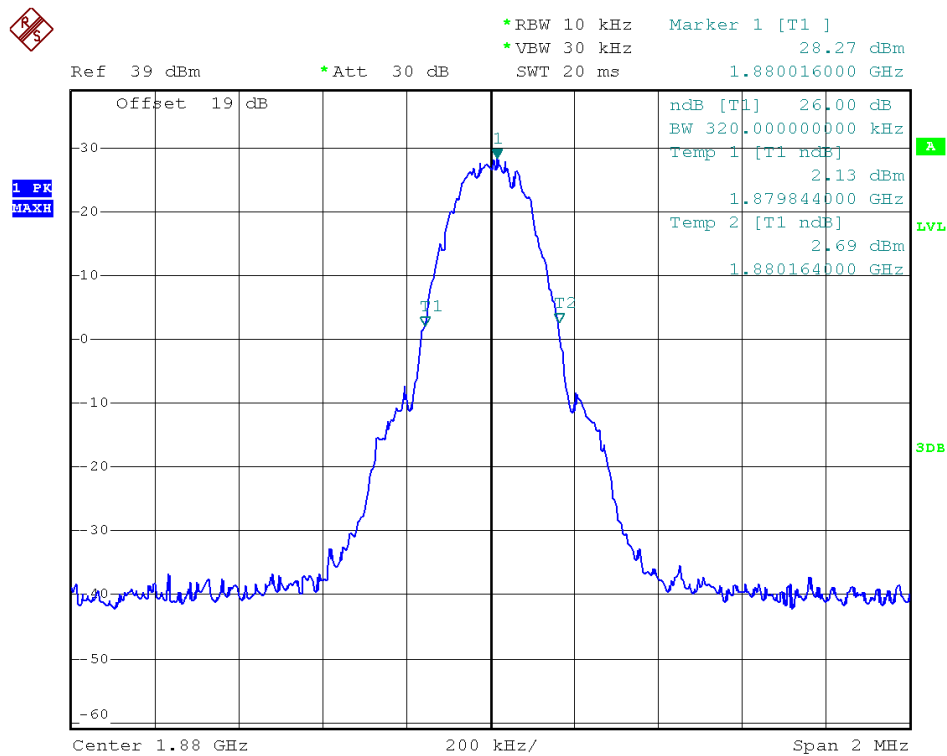

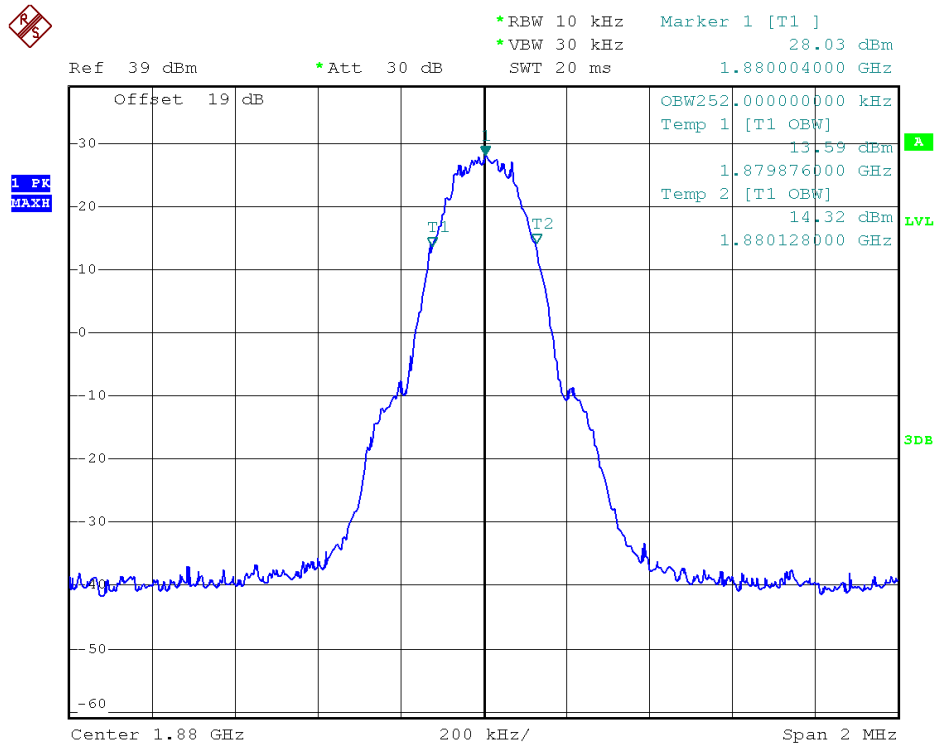



(Plot Q: GSM 1900MHz Channel = 661)

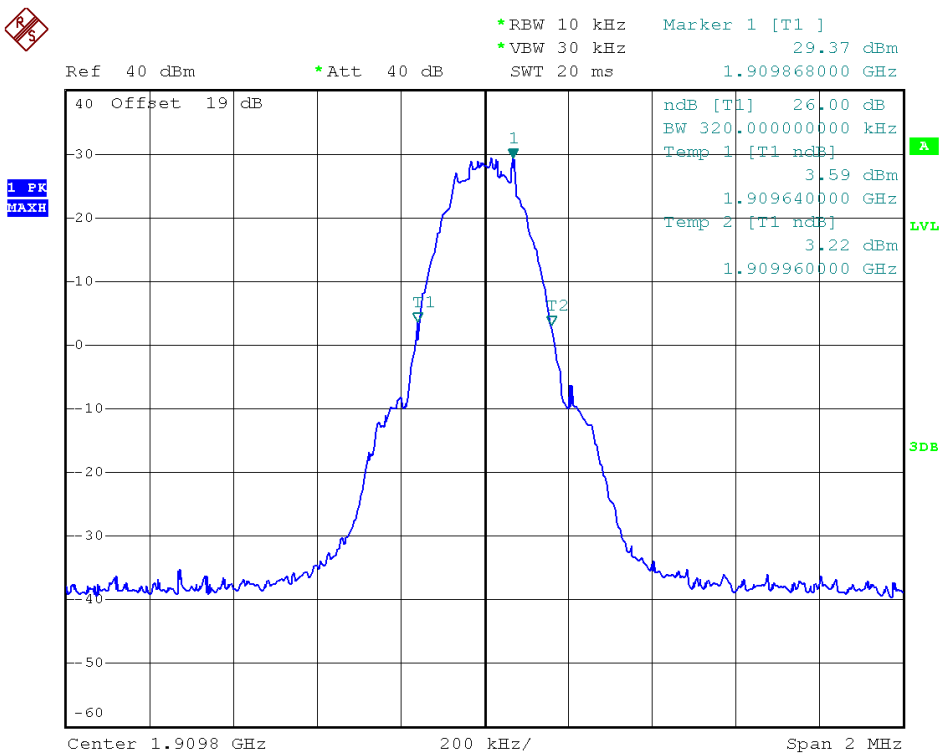

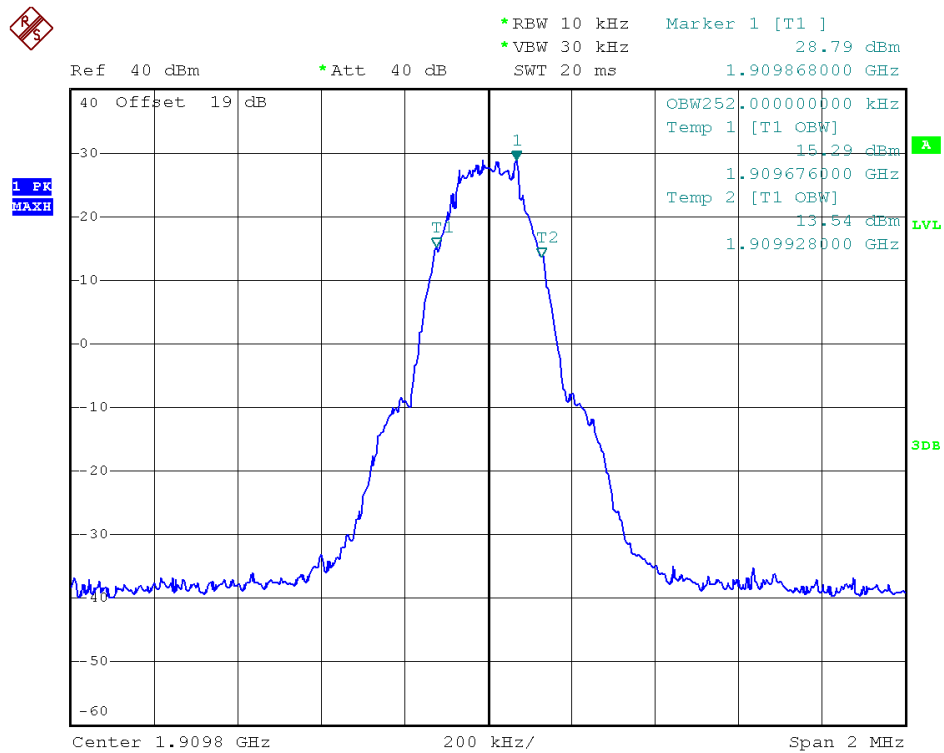



(Plot R: GSM 1900MHz Channel = 810)

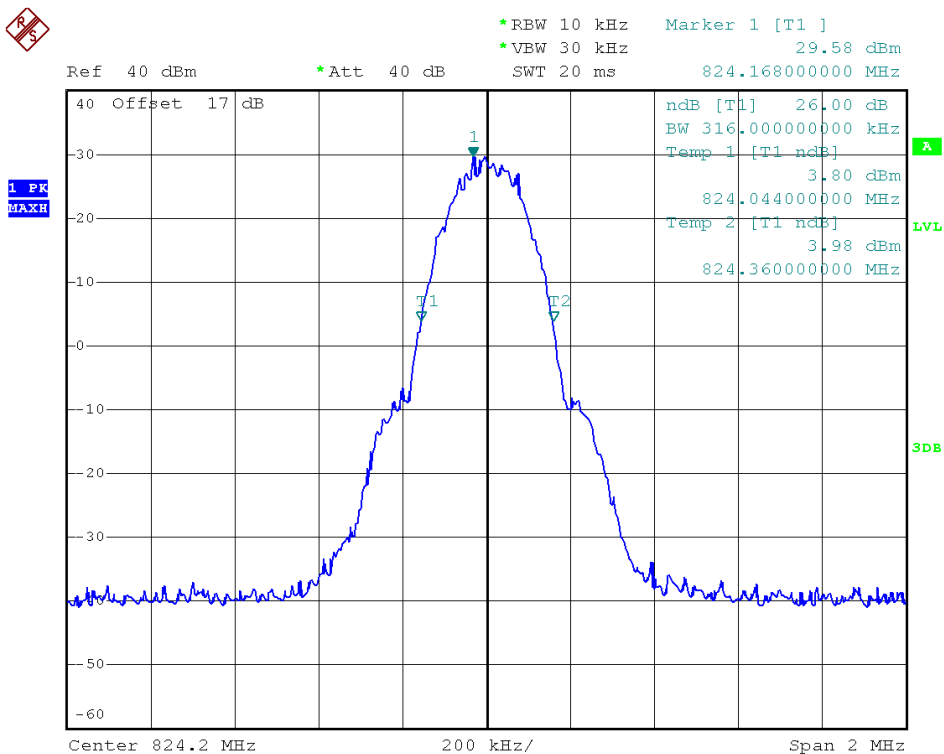

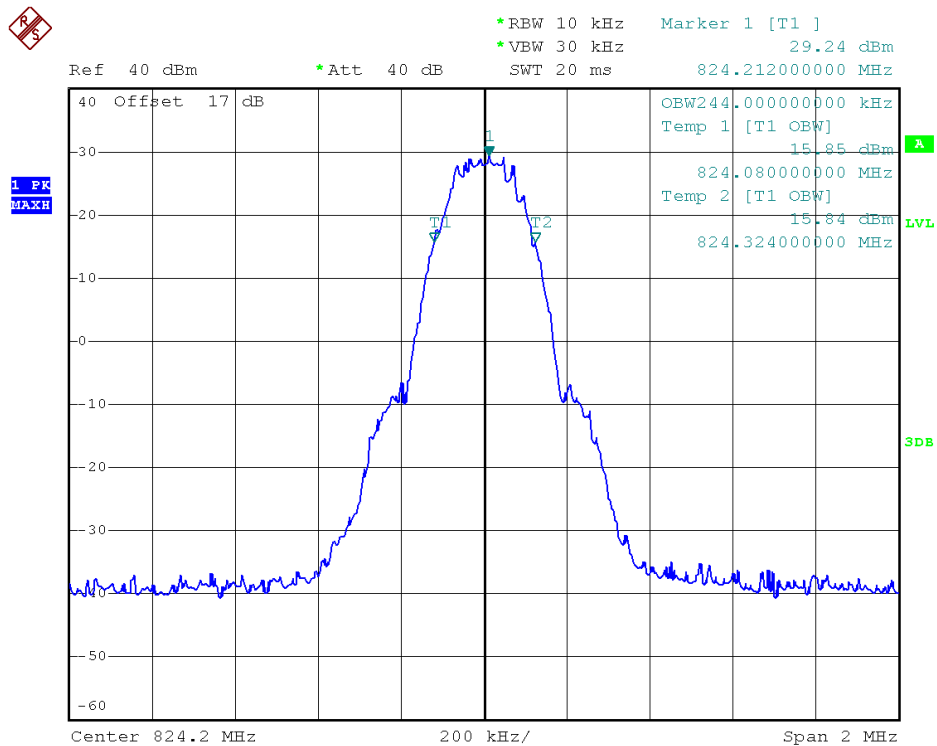



(Plot S: GPRS 850MHz Channel = 128)

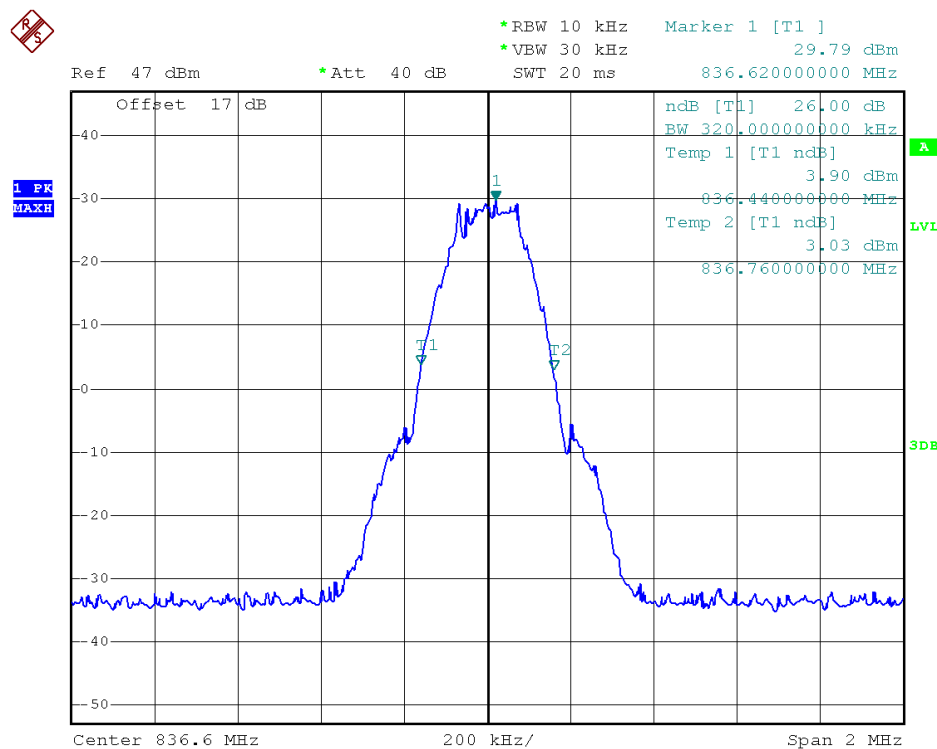

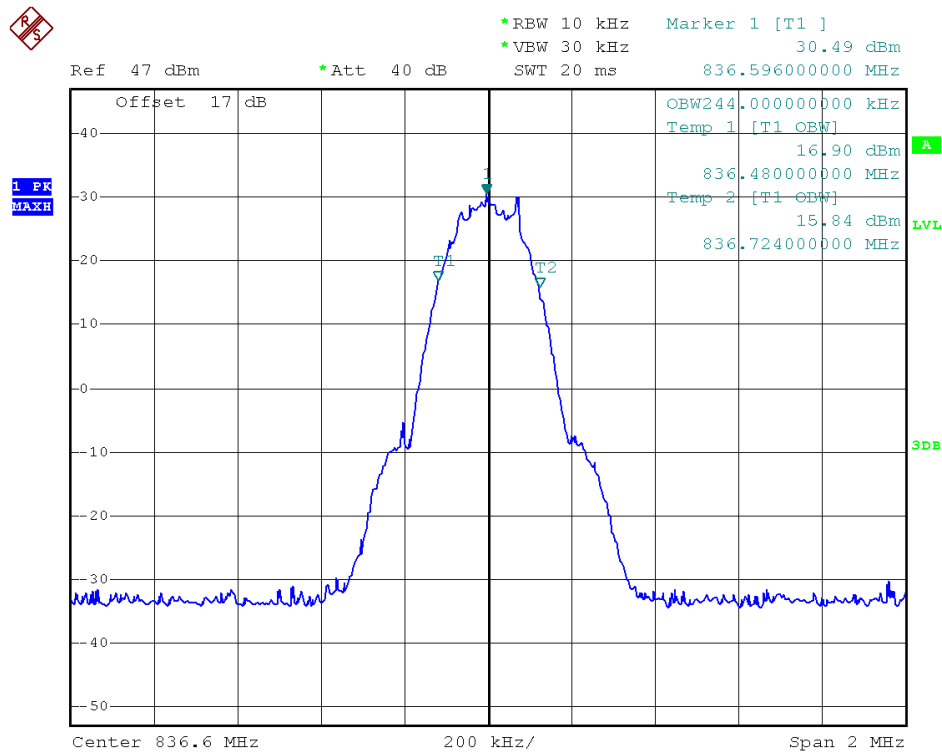



(Plot T: GPRS 850MHz Channel = 190)

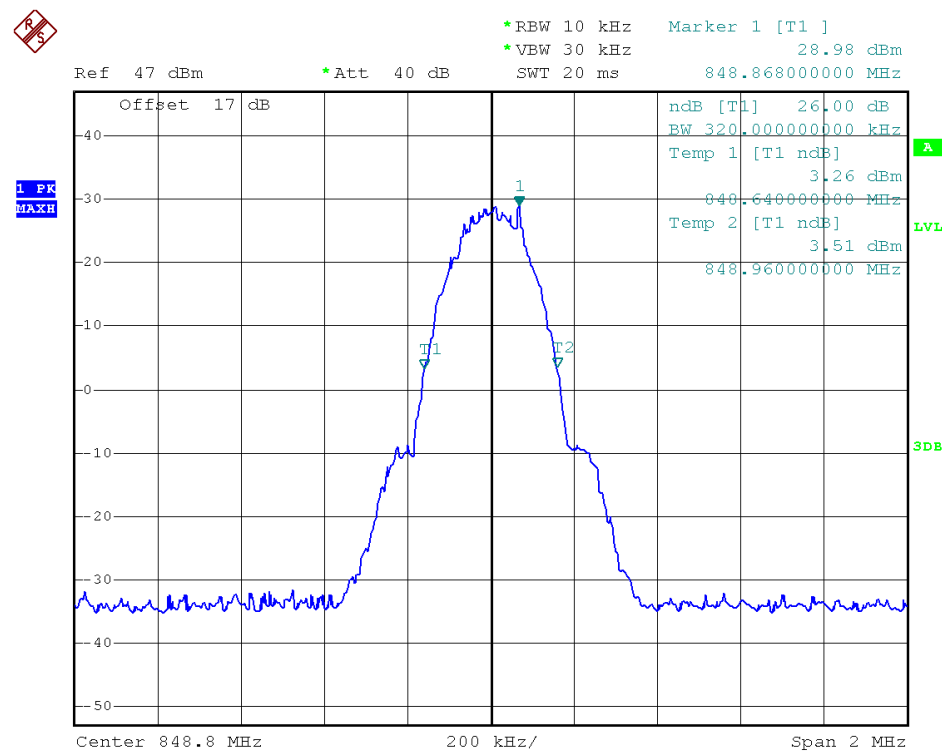

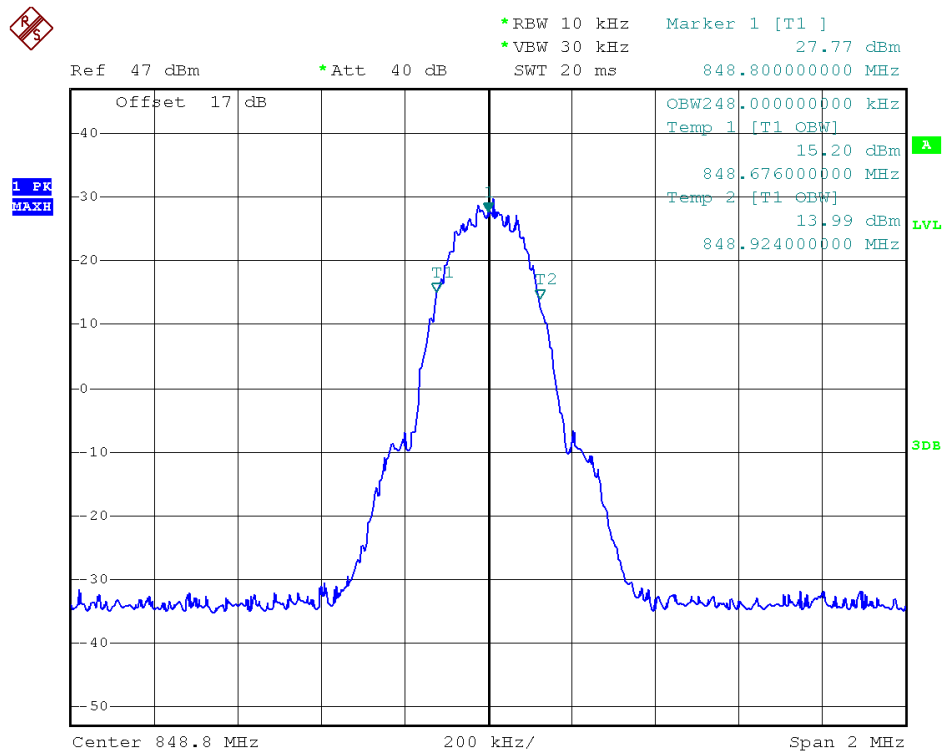



(Plot U: GPRS850MHz Channel = 251)

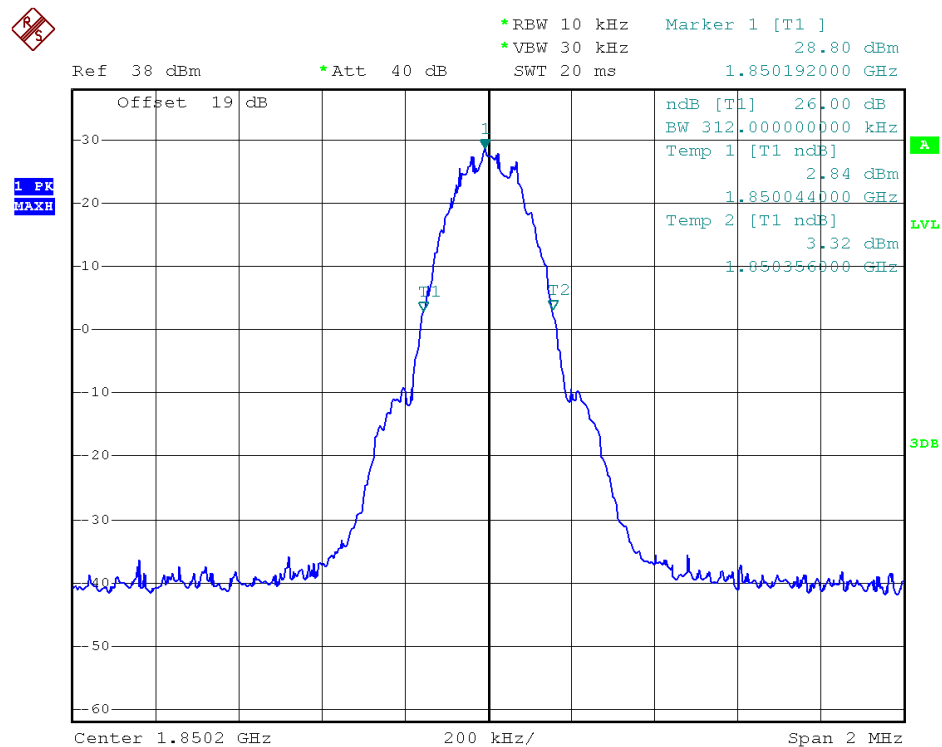

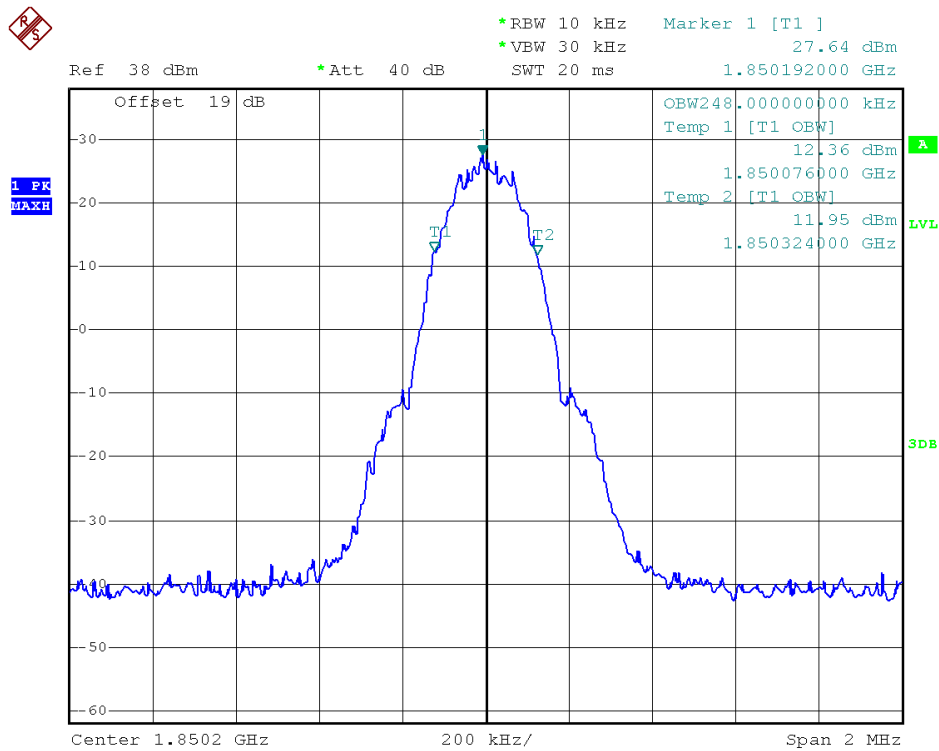



(Plot V: GPRS 1900MHz Channel = 512)

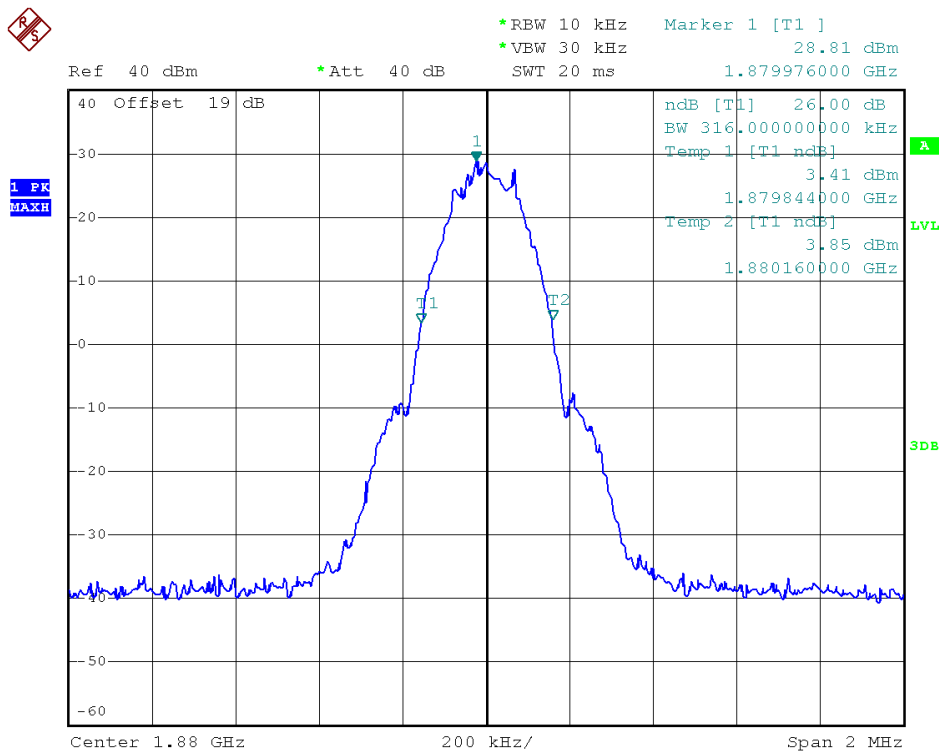

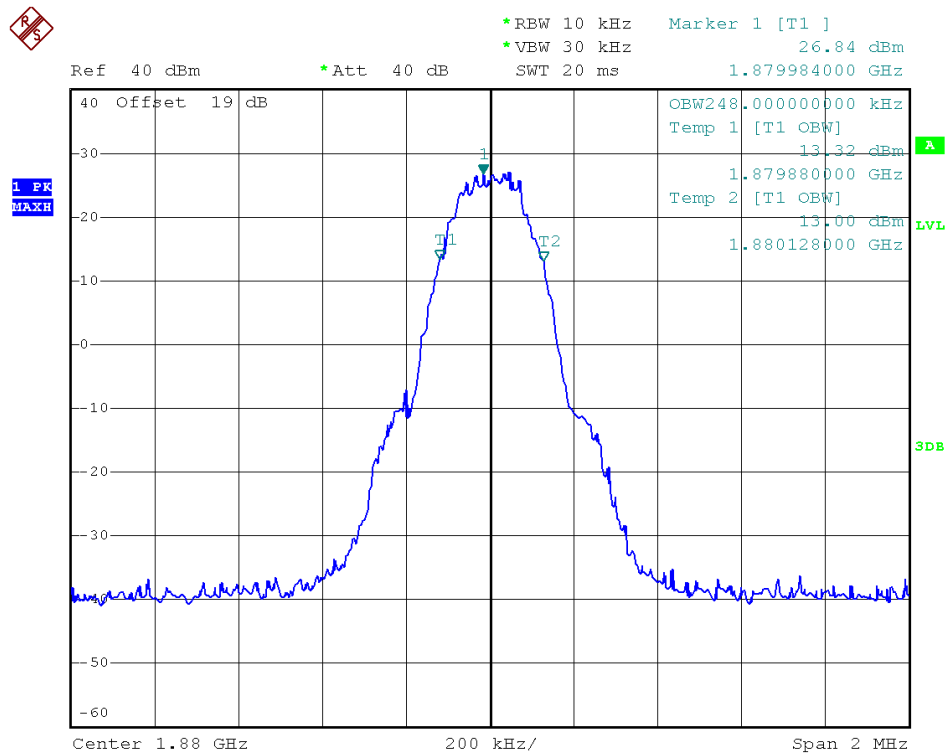



(Plot W: GPRS 1900MHz Channel = 661)

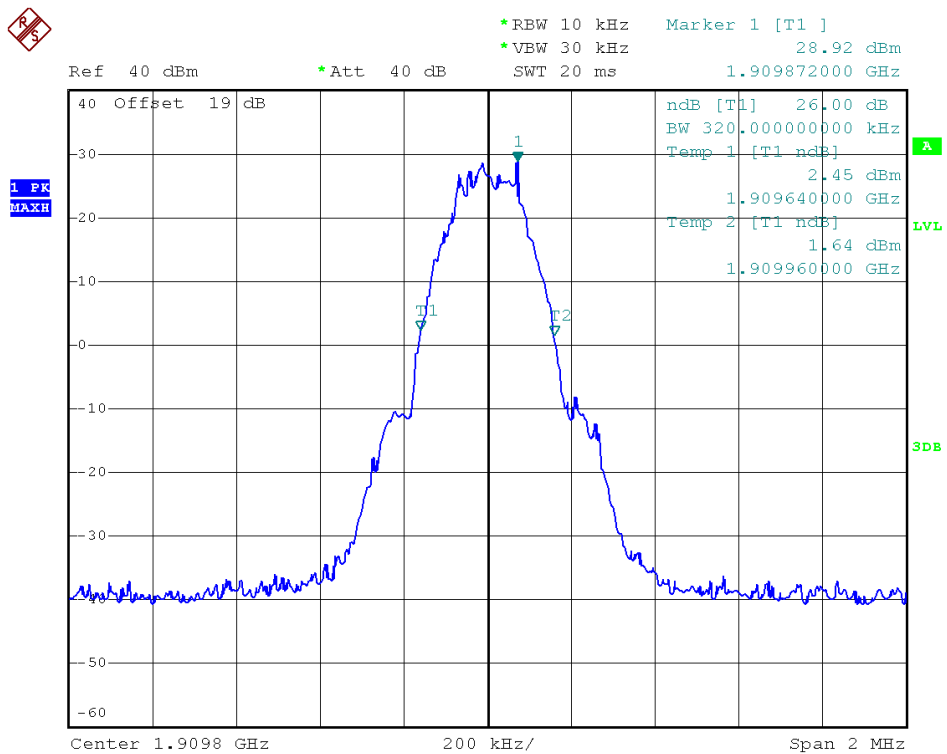

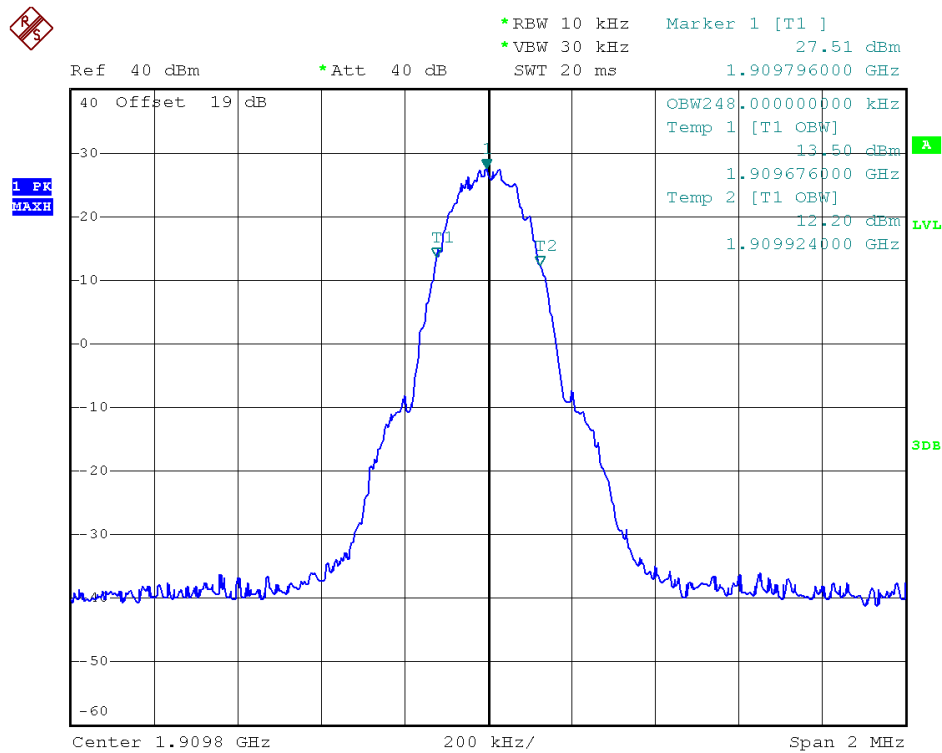




(Plot X: GPRS 1900MHz Channel = 810)

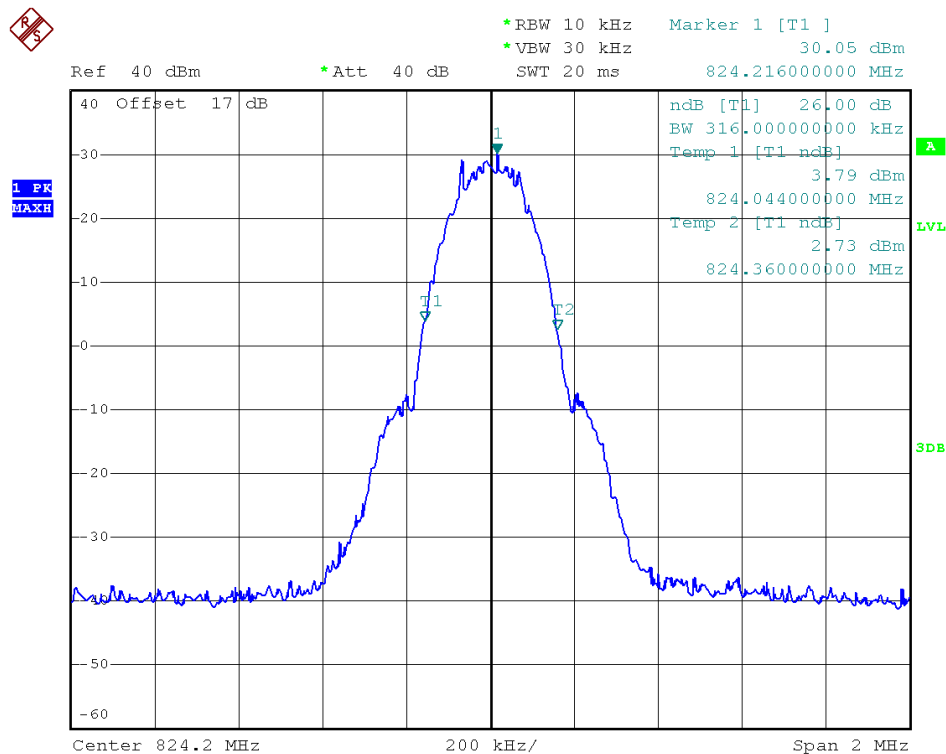


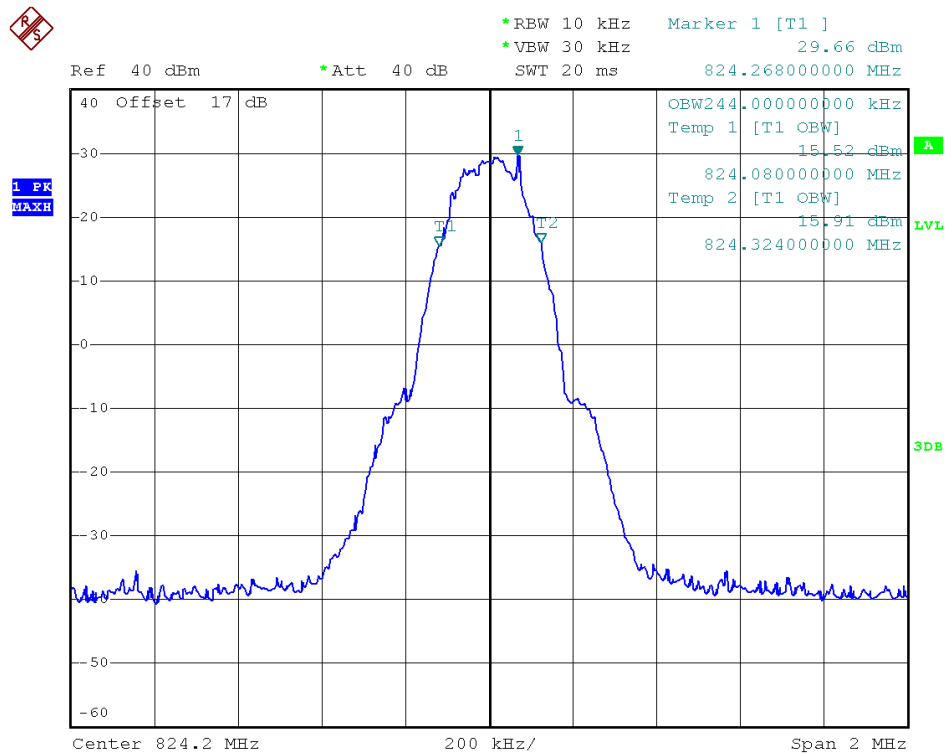


(Plot Y: EDGE 850MHz Channel = 128)

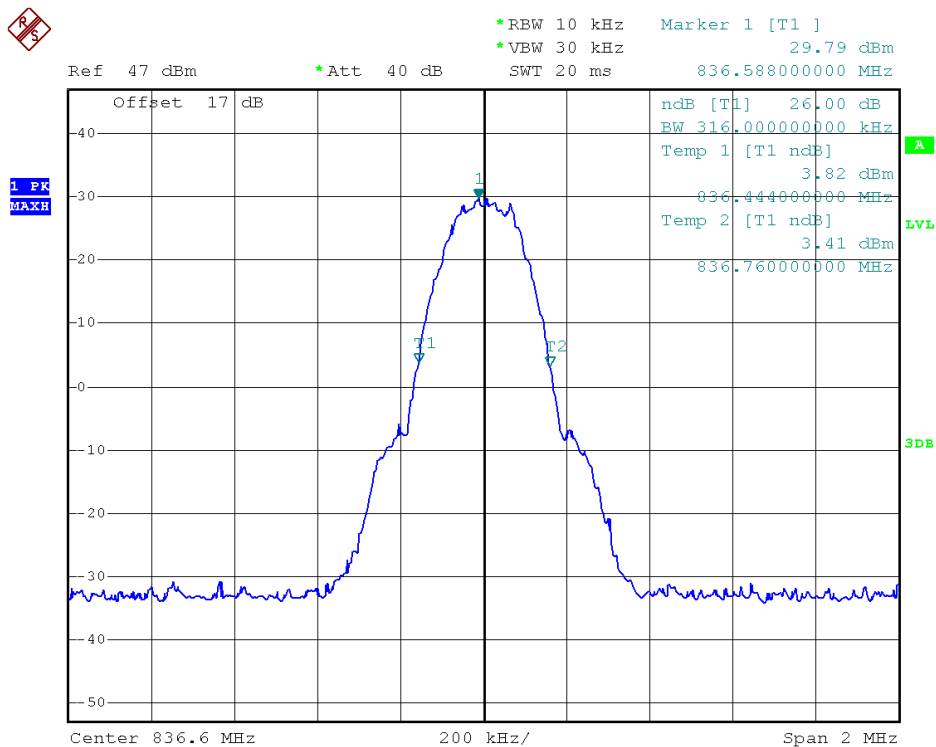


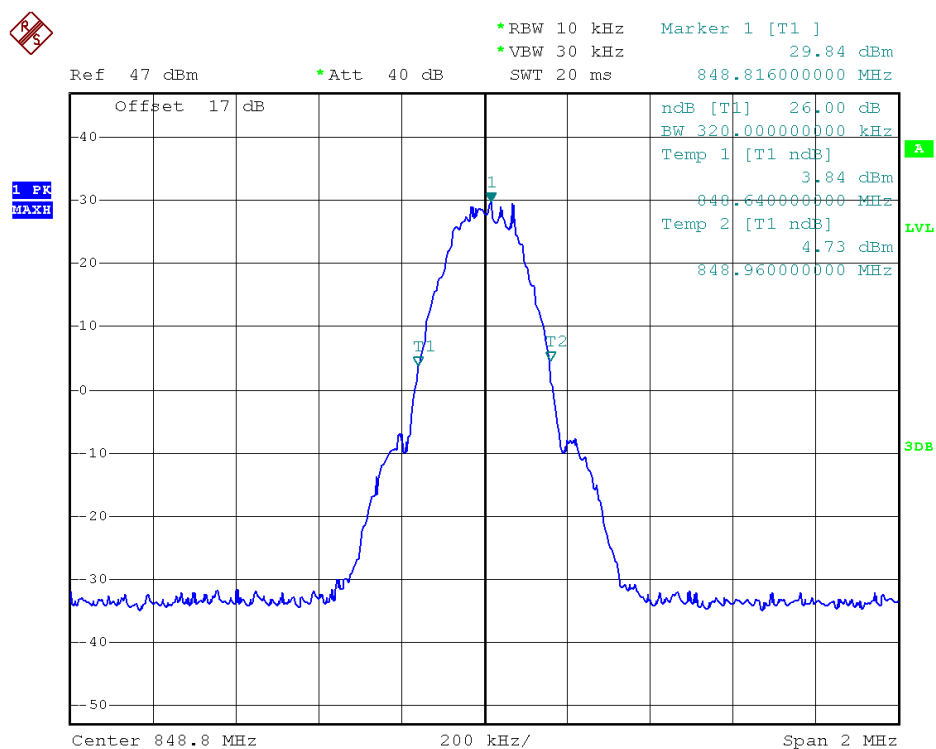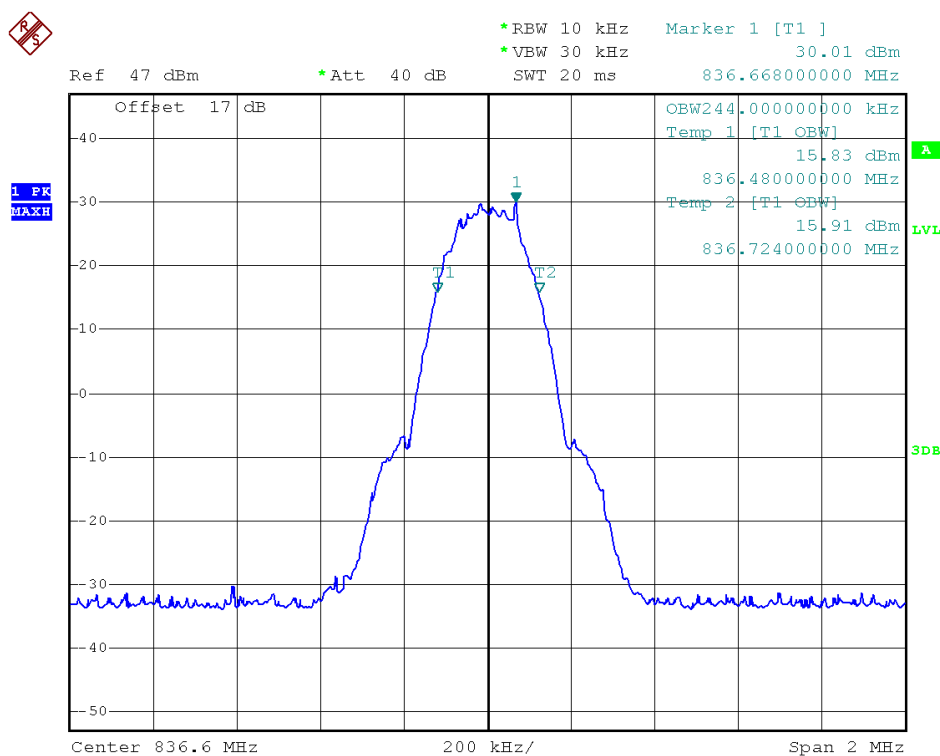

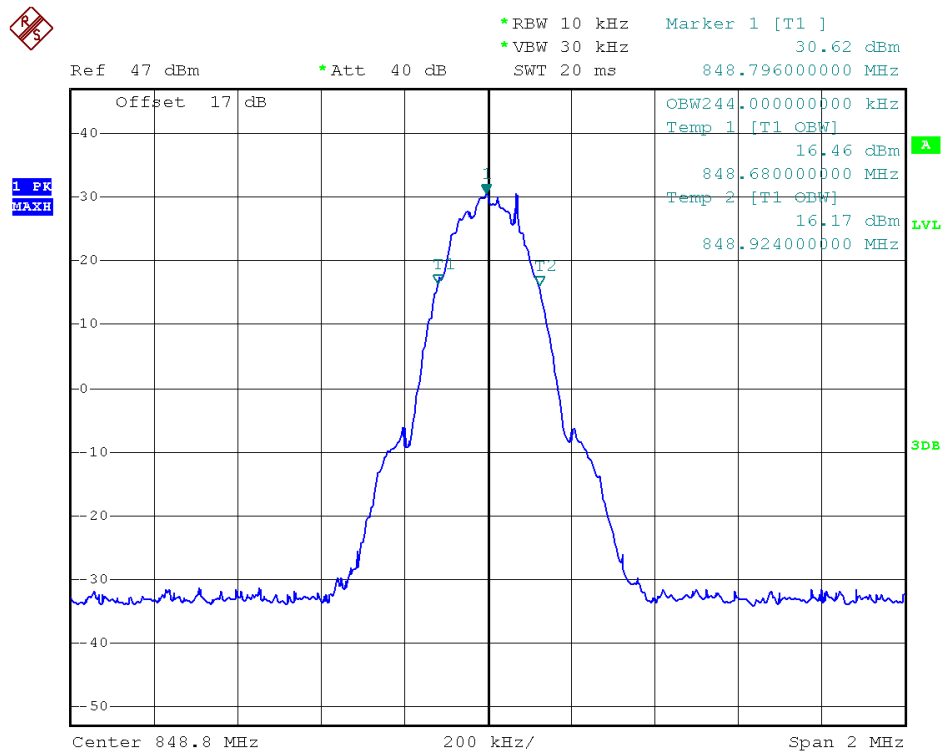



(Plot A1: EDGE 850MHz Channel = 251)

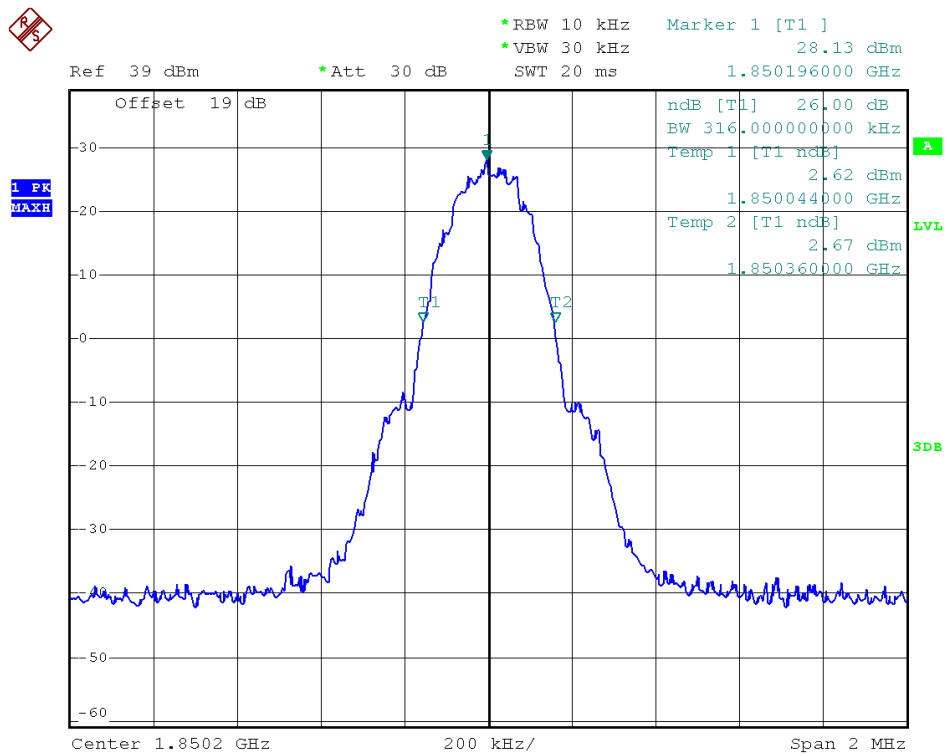

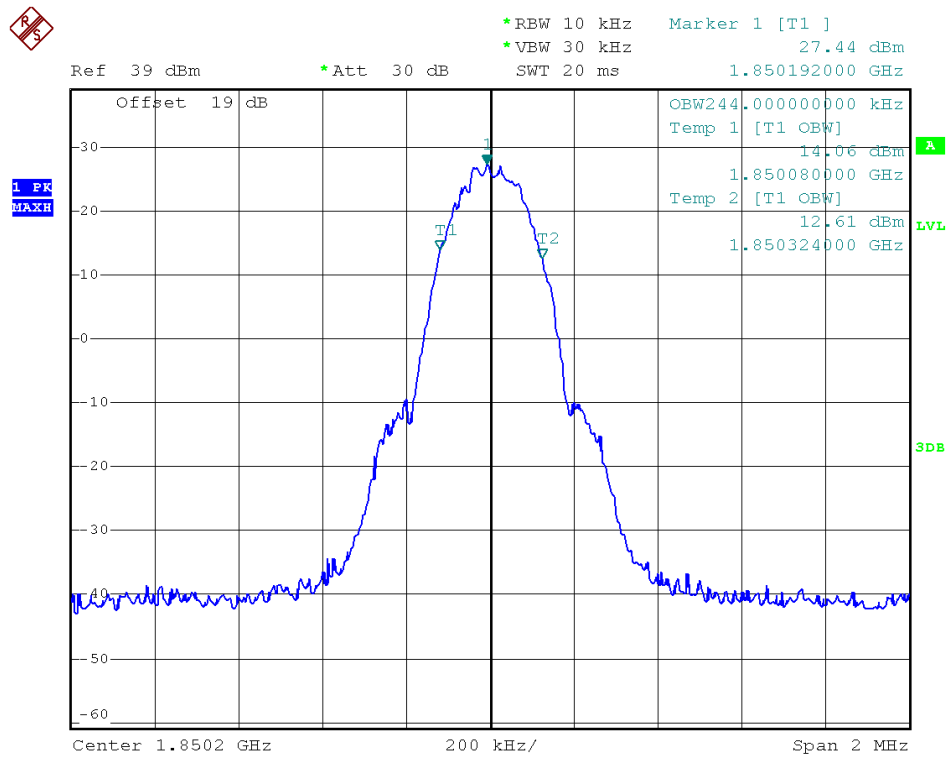



(Plot B1: EDGE 1900MHz Channel = 512)

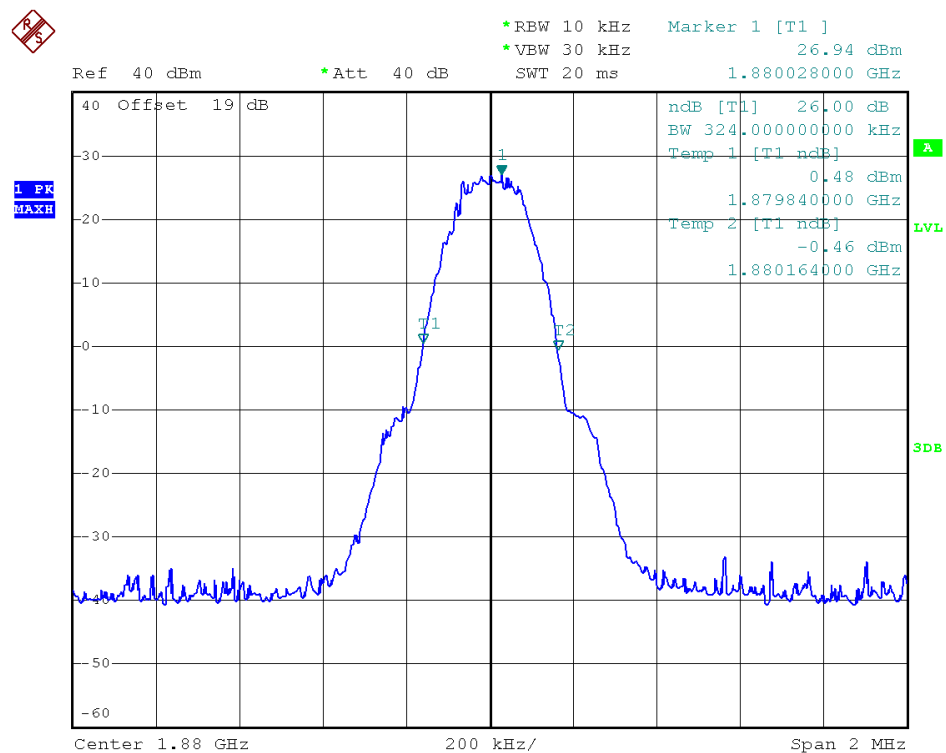

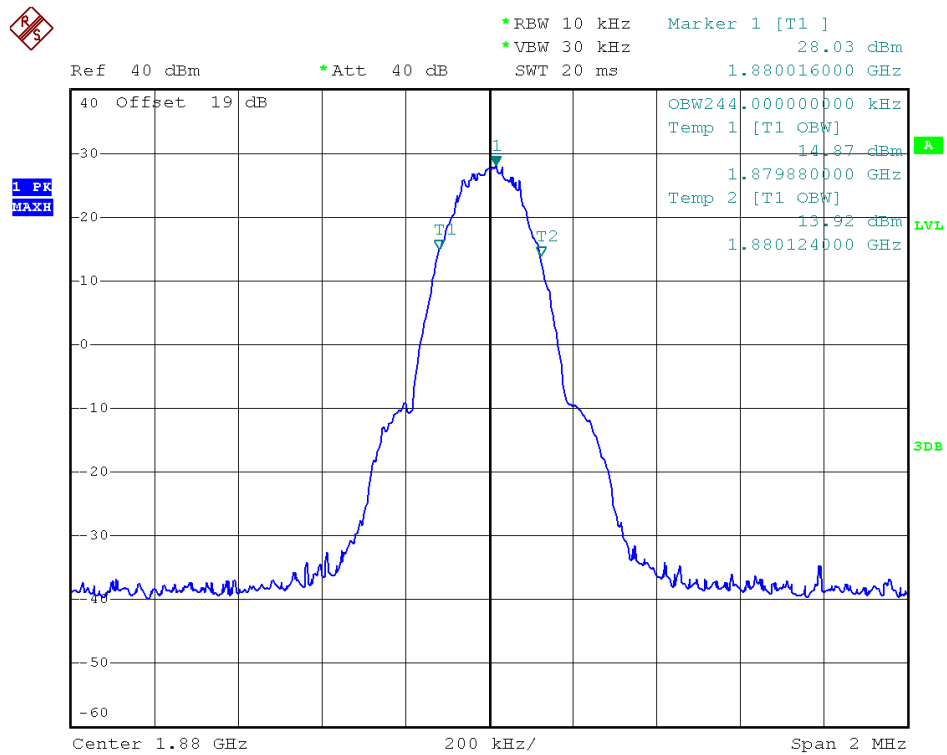

(Plot C1: EDGE 1900MHz Channel = 661)

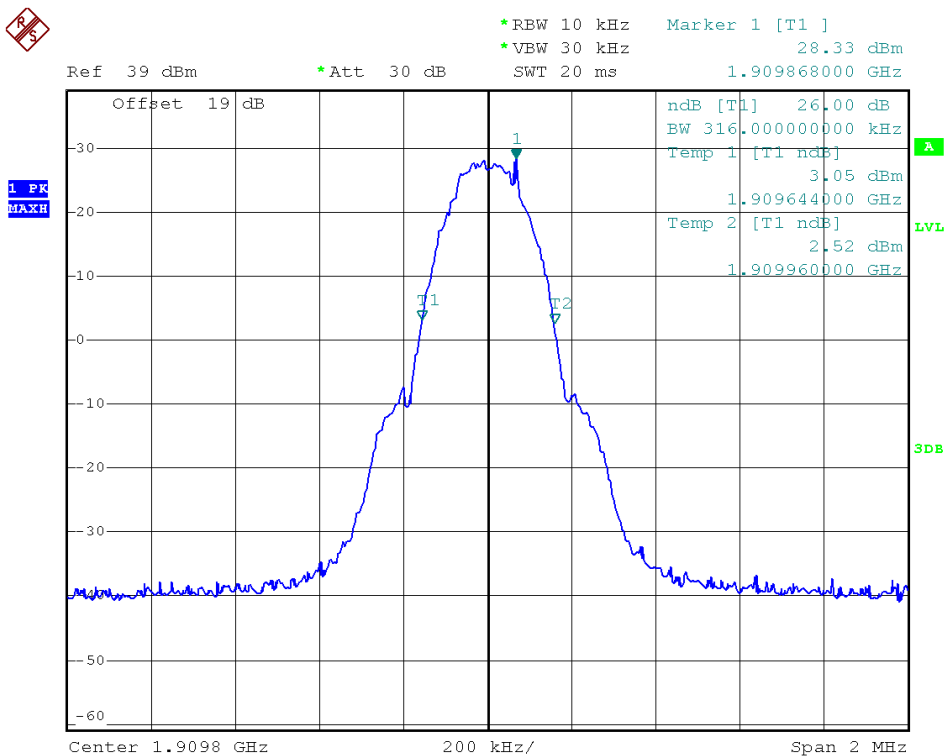

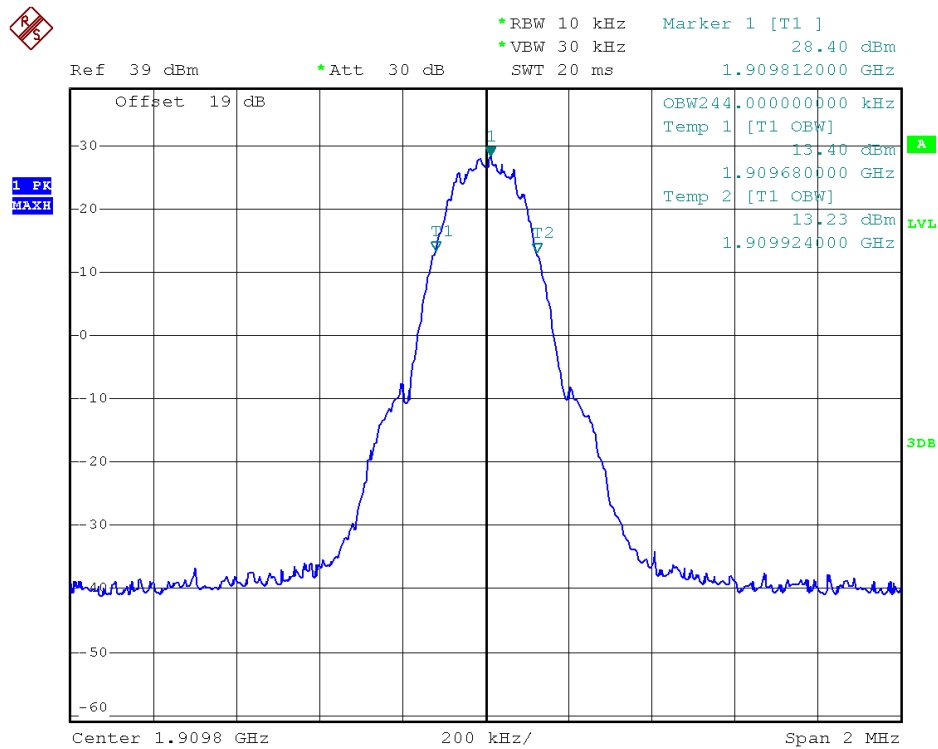

(Plot D1: EDGE 1900MHz Channel = 810)

2.4 Frequency Stability


2.4.1 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30 °C to +80 °C at intervals of not more than 10 °C.
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Test Description

1. Test Setup:

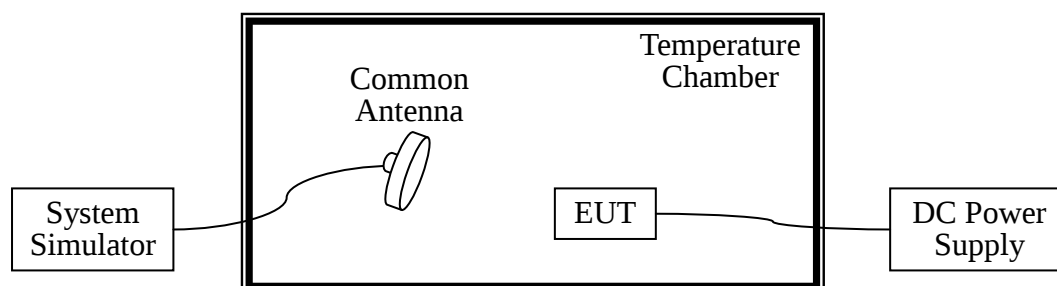

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Due Data
System Simulator	Agilent	E5515C	GB43130131	2014.05.10
DC Power Supply	Good Will	GPS-3030DD	EF920938	2014.05.10
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2014.05.10

2.4.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.8VDC, 4.2VDC and 3.3VDC, which are specified by the applicant; the normal temperature here used is 25 °C. The frequency

deviation limit of 850MHz band is $\pm 2.5\text{ppm}$, and 1900MHz is $\pm 1\text{ppm}$

1. GSM 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.9	-30	24.89	±2060.5	4.43	±2091.5	5.30	±2122	PASS
	-20	38.66		-15.01		37.67		
	-10	41.47		34.03		-12.80		
	0	13.21		44.86		39.77		
	+10	10.35		51.87		45.48		
	+20	-12.03		51.00		9.68		
	+30	21.03		38.12		-12.23		
	+40	25.80		17.07		5.04		
	+50	27.93		29.71		2.61		
	+60	25.42		12.04		4.56		
	+70	-10.22		10.88		5.38		
	+80	8.96		-10.25		19.98		
4.2	+25	3.71		42.55		42.18		
3.3	+25	25.57		43.57		40.27		

2. GSM 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperatur e (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.9	-30	-5.19	±1850.2	28.91	±1880.0	29.27	±1909.8	PASS
	-20	19.00		11.01		-8.57		
	-10	38.22		15.79		36.13		
	0	25.23		41.59		-14.70		
	+10	-1.45		-10.89		-8.71		
	+20	6.94		-7.13		-15.98		
	+30	21.13		29.44		21.63		
	+40	41.23		-10.34		-2.73		
	+50	30.96		15.41		8.69		
	+60	22.25		-5.97		6.66		
	+70	17.64		17.79		12.29		
	+80	-3.99		-15.29		7.45		
4.2	+25	-5.63		32.72		48.24		

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperatur e (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.3	+25	20.67		9.80		36.41		

3. EDGE 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.9	-30	-21.55	±2060.5	20.32	±2091.5	17.44	±2122	PASS
	-20	19.15		16.31		-11.07		
	-10	-2.15		-17.56		15.22		
	0	30.16		32.11		7.05		
	+10	21.99		-25.03		3.02		
	+20	-19.16		-17.19		10.52		
	+30	35.26		19.36		-13.21		
	+40	42.63		19.64		-2.11		
	+50	35.28		22.27		-12.99		
	+60	20.56		15.08		10.99		
	+70	-2.38		-3.89		-5.97		
	+80	12.36		-10.89		12.09		
4.2	+25	-14.73		28.95		-51.58		
3.3	+25	-17.02		31.09		16.11		

4. EDGE 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.9	-30	21.88	±1850.2	39.06	±1880.0	39.43	±1909.8	PASS
	-20	17.62		48.73		39.04		
	-10	-1.53		32.16		37.00		
	0	-6.03		19.61		17.81		
	+10	9.99		53.81		42.53		
	+20	35.96		18.77		38.33		
	+30	10.10		15.01		19.75		

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperatur e (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)			
		Hz	Limits	Hz	Limits	Hz	Limits		
	+40	51.32		0.50		32.86			
	+50	14.47		-0.56		4.44			
	+60	12.53		-5.99		10.36			
	+70	-5.59		9.99		4.36			
	+80	10.35		-6.67		2.08			
	4.2	+25		-2.21		19.71			42.20
	3.3	+25		26.45		23.51			33.04

5. WCDMA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4183 (836.6MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.9	-30	-4.32	±2066	27.18	±2091.5	5.05	±2116.5	PASS
	-20	35.25		30.07		7.49		
	-10	-19.21		5.48		0.19		
	0	27.75		-1.82		34.30		
	+10	-13.73		19.02		45.99		
	+20	-6.95		44.78		-16.51		
	+30	48.07		21.99		19.46		
	+40	42.00		17.67		-6.80		
	+50	38.85		-19.44		7.58		
	+60	24.15		22.35		2.36		
	+70	10.29		-10.29		-2.88		
	+80	-10.29		5.69		15.56		
4.2	+25	31.42		-6.76		3.11		
3.3	+25	4.49		14.09		-4.93		

6. WCDMA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.9	-30	-0.97	±1852.4	21.25		1.12	±1907.6	PASS

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
	-20	35.71		51.56	±1880.0	8.81		
	-10	54.73		48.10		22.21		
	0	25.45		43.19		47.37		
	+10	18.46		6.50		14.85		
	+20	20.42		3.76		33.63		
	+30	0.36		7.11		38.27		
	+40	26.25		5.70		57.38		
	+50	24.14		-5.74		21.22		
	+60	12.25		-2.39	12.56			
	+70	18.89		-19.95	-3.89			
	+80	20.23		20.30	20.36			
4.2	+25	12.46			32.11		20.98	
3.3	+25	26.55			5.31		0.95	

7. HSDPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4183 (836.6MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.9	-30	20.79	±2066	46.68	±2091.5	22.69	±2116.5	PASS
	-20	44.54		28.10		2.39		
	-10	10.45		-4.27		64.53		
	0	10.88		36.69		12.66		
	+10	54.76		13.61		50.37		
	+20	2.46		12.15		-5.39		
	+30	27.07		23.94		35.13		
	+40	-8.66		13.56		-0.53		
	+50	14.23		47.64		37.40		
	+60	12.29		-7.89		-6.67		
	+70	-5.69		18.83		8.89		
	+80	6.66		12.37		-18.64		
4.2	+25	63.35		52.86		31.75		
3.3	+25	35.82		3.68		58.60		



8. HSDPA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.9	-30	0.96	±1852.4	8.16	±1880	14.33	± 1907.6	PASS
	-20	24.44		36.72		17.07		
	-10	53.46		57.55		32.92		
	0	23.70		-1.82		14.63		
	+10	8.80		40.78		53.06		
	+20	18.68		13.96		46.26		
	+30	6.60		35.78		38.25		
	+40	38.46		44.01		44.36		
	+50	4.47		24.16		52.56		
	+60	12.23		9.86		20.13		
	+70	10.33		-2.38		-8.82		
	+80	-9.69		15.29		23.33		
4.2	+25	15.78		42.99		24.27		
3.3	+25	23.33		26.70		13.43		

2.5 Conducted Out of Band Emissions

2.5.1 Requirement

According to FCC section 22.917(a) and FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.


1. Test Verdict:

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-28.28	Plot A1toA1.1	-13	PASS
	190	836.6	-28.40	Plot A2toA2.1		PASS
	251	848.8	-28.36	Plot A3toA3.1		PASS
GSM 1900MHz	512	1850.2	-18.17	Plot B1toB1.1	-13	PASS
	661	1880.0	-19.65	Plot B2toB2.1		PASS
	810	1909.8	-19.56	Plot B3toB3.1		PASS
EDGE 850MHz	128	824.2	-28.36	Plot C1toC1.1	-13	PASS
	190	836.6	-27.67	Plot C2toC2.1		PASS
	251	848.8	-27.42	Plot C3toC3.1		PASS
EDGE 1900MHz	512	1850.2	-17.43	Plot D1toD1.1	-13	PASS
	661	1880.0	-18.76	Plot D2toD2.1		PASS
	810	1909.8	-17.67	Plot D3toD3.1		PASS
WCDMA 850MHz	4132	826.4	-28.18	Plot E1toE1.1	-13	PASS
	4183	836.6	-27.70	Plot E2toE2.1		PASS
	4233	846.6	-28.44	Plot E3toE3.1		PASS
WCDMA 1900MHz	9262	1852.4	-27.82	Plot F1toF1.1	-13	PASS
	9400	1880	-28.26	Plot F2toF2.1		PASS
	9538	1907.6	-27.34	Plot F3toF3.1		PASS
HSDPA	4132	826.4	-27.95	Plot G1toG1.1	-13	PASS


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
850MHz	4183	836.6	-28.08	Plot G2toG2.1		PASS
	4233	846.6	-28.79	Plot G3toG3.1		PASS
HSDPA 1900MHz	9262	1852.4	-28.50	Plot H1toH1.1	-13	PASS
	9400	1880	-27.97	Plot H2toH2.1		PASS
	9538	1907.6	-26.91	Plot H3toH3.1		PASS

2. Test Plots for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

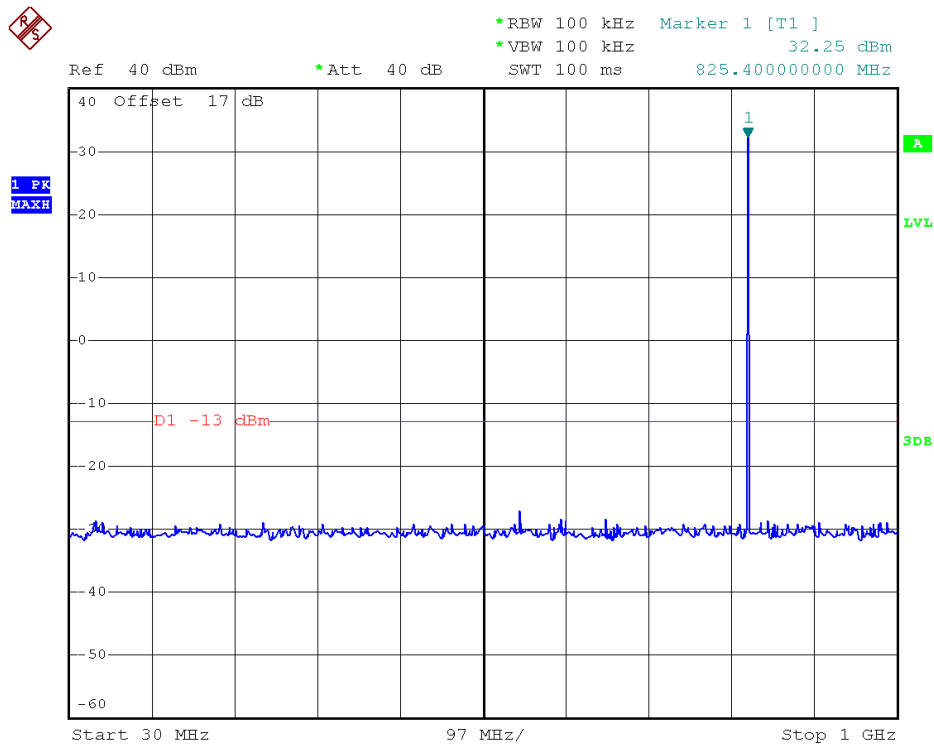


(Plot A1: GSM 850MHz Channel = 128, 30MHz to 1GHz)

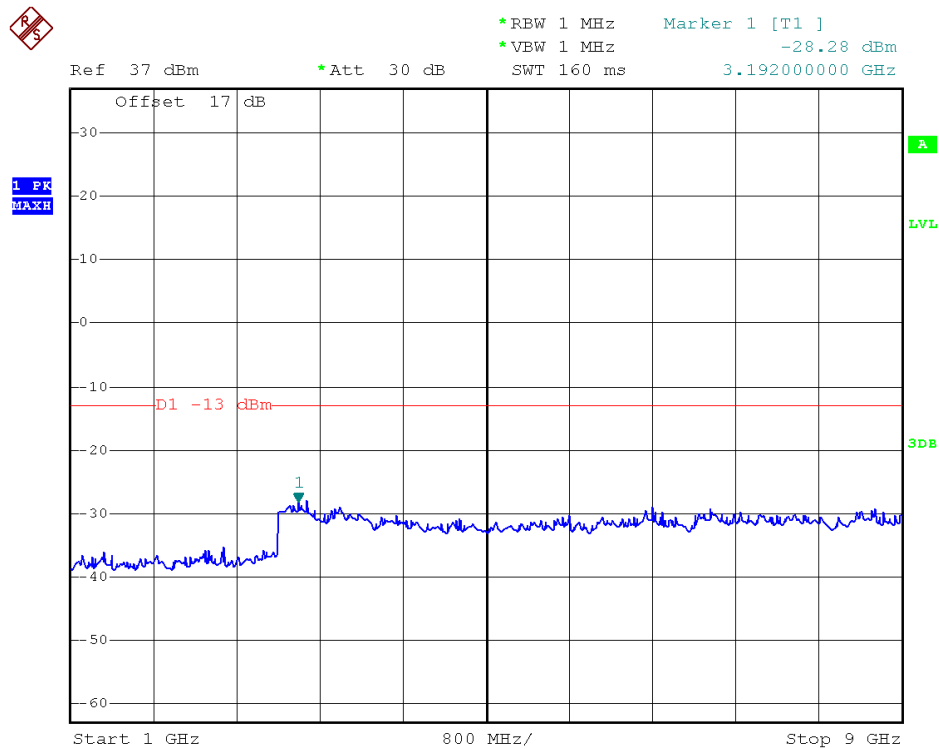


(Plot A1.1: GSM 850MHz Channel = 128, 1GHz to 9GHz)

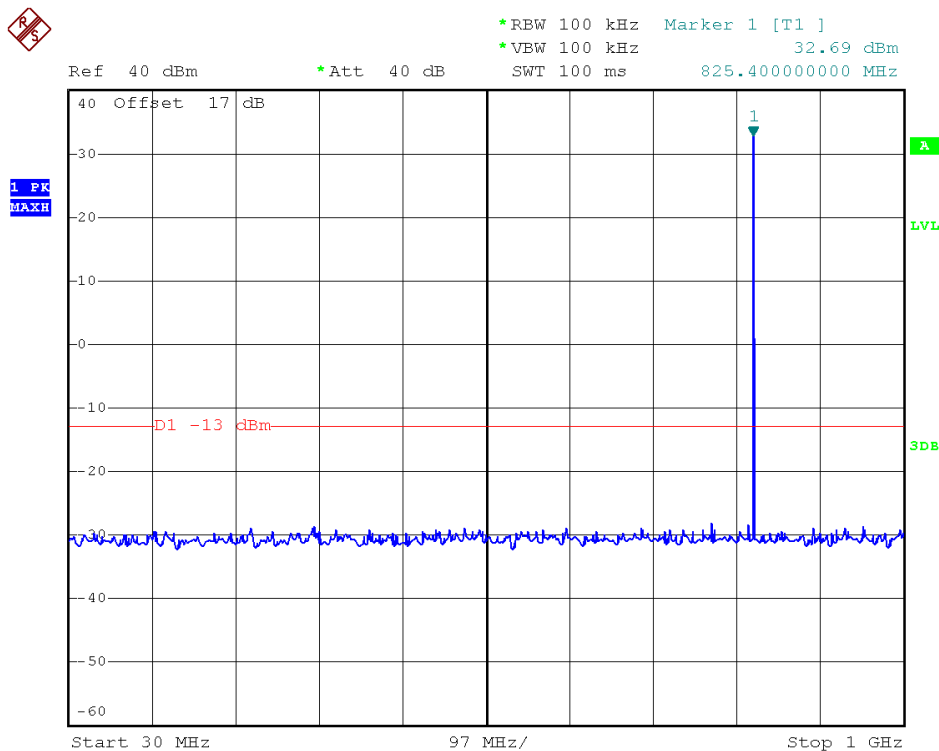


(Plot A2: GSM 850MHz Channel = 190, 30MHz to 1GHz)

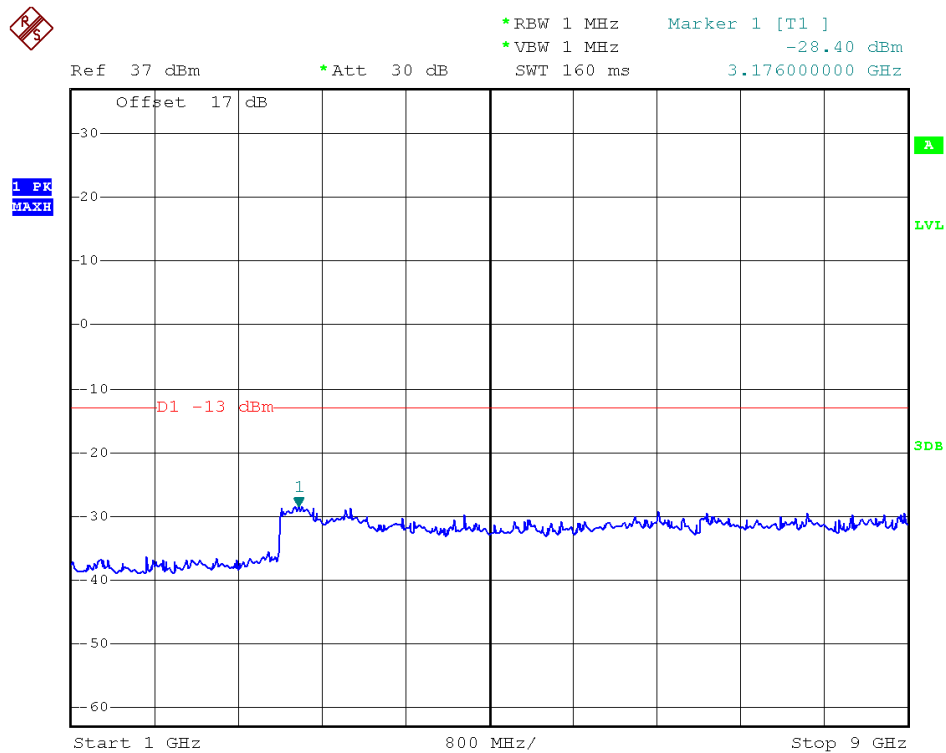


(Plot A2.1: GSM 850MHz Channel = 190, 1GHz to 9GHz)

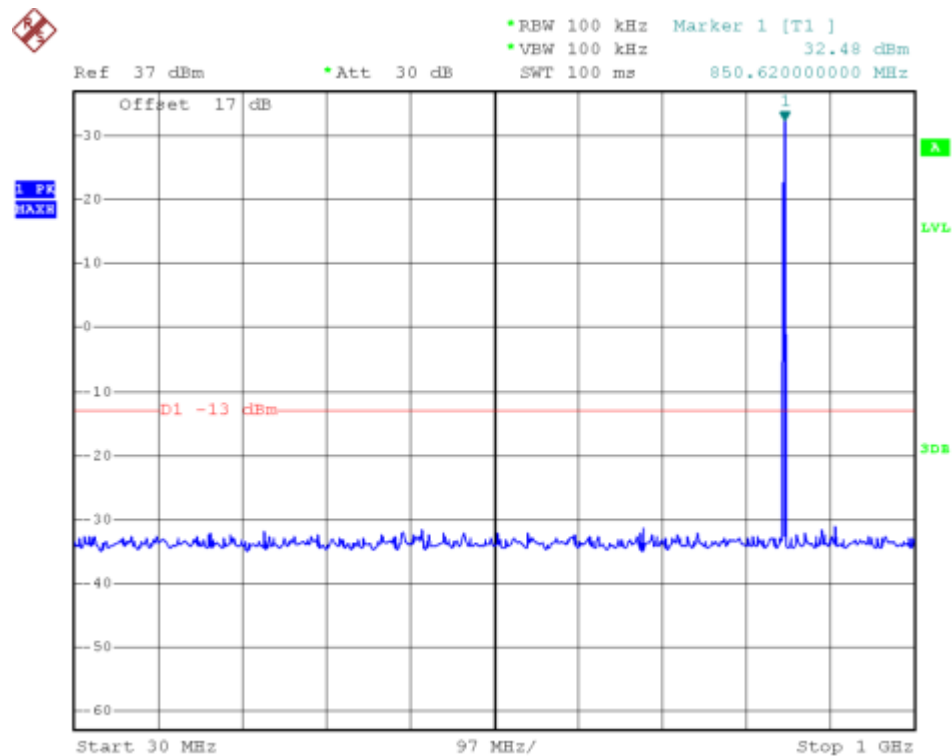


(Plot A3: GSM 850MHz Channel = 251, 30MHz to 1GHz)

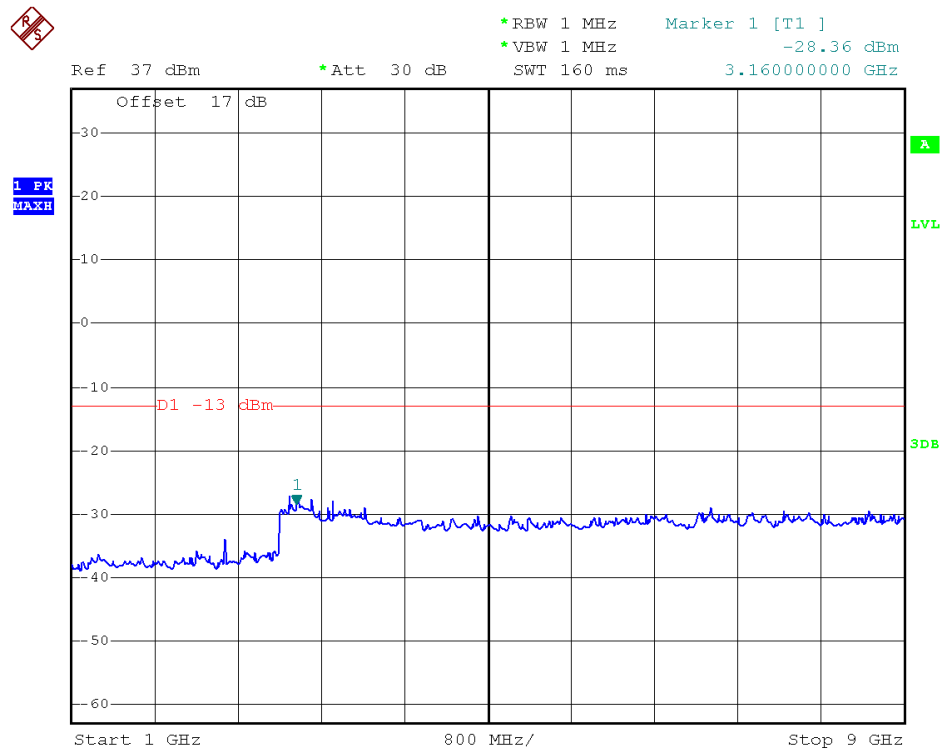


(Plot A3.1: GSM 850MHz Channel = 251, 1GHz to 9GHz)

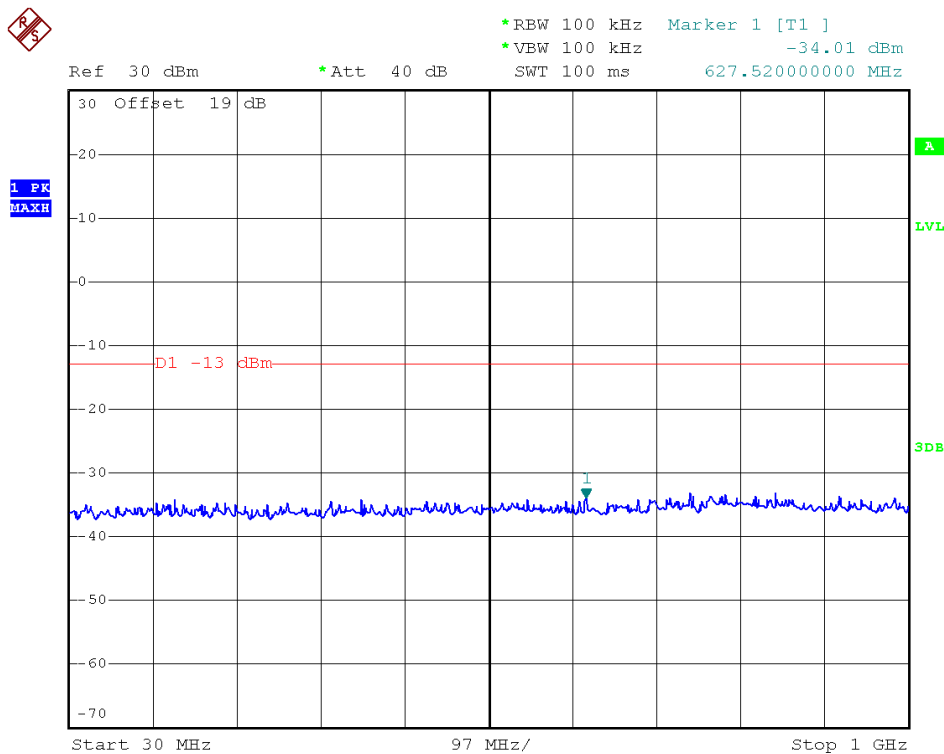


(Plot B1: GSM 1900MHz Channel = 512, 30MHz to 1GHz)

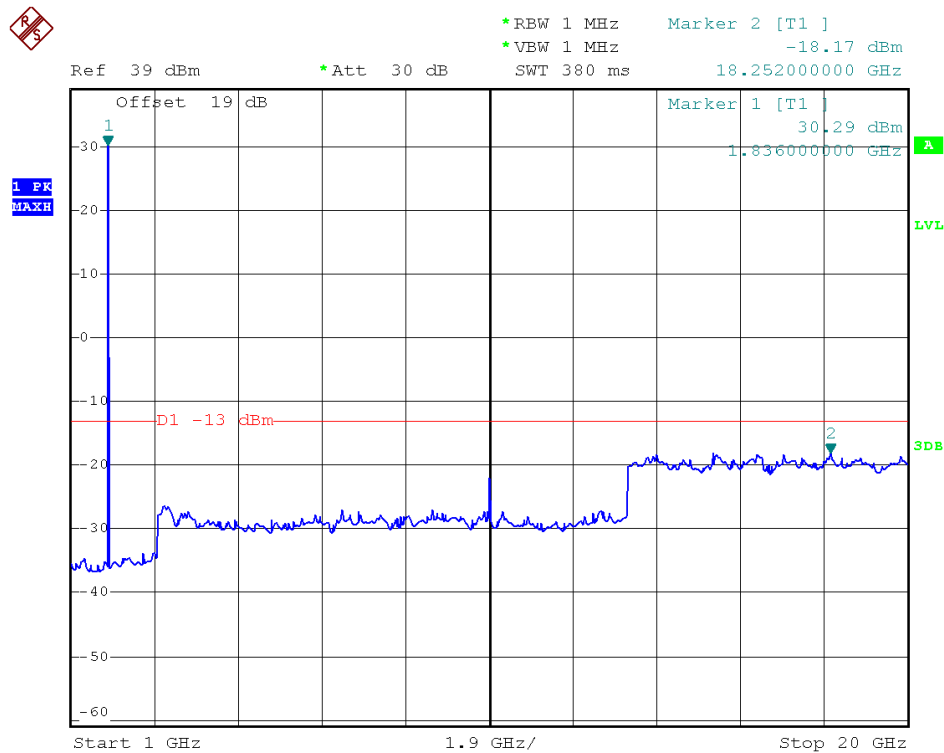


(Plot B1.1: GSM 1900MHz Channel = 512, 1GHz to 20GHz)

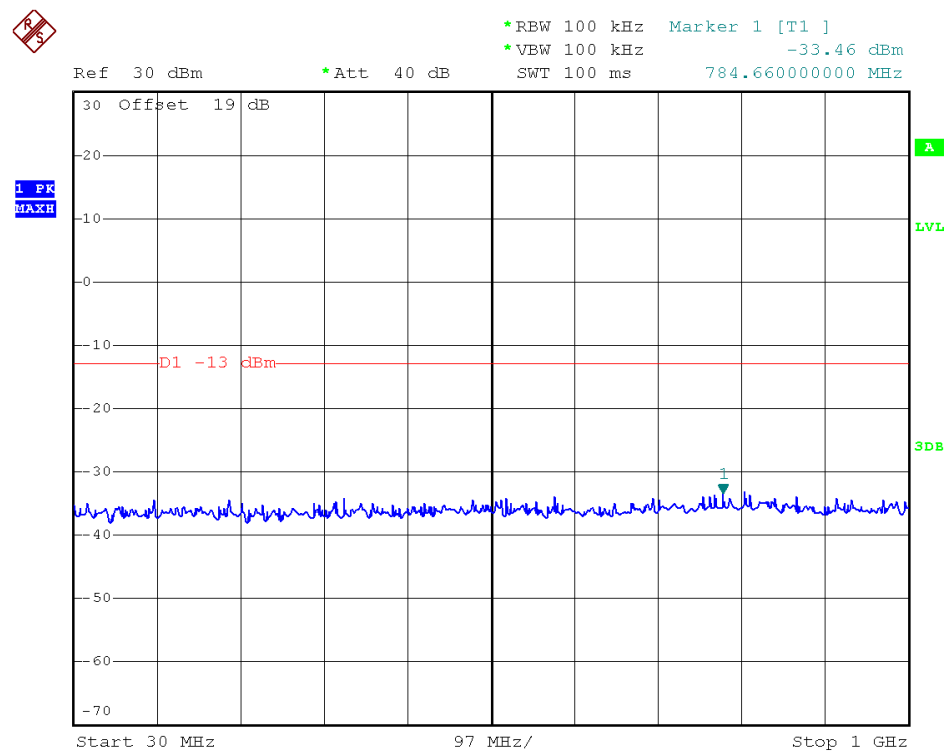


(Plot B2: GSM 1900MHz Channel = 661, 30MHz to 1GHz)

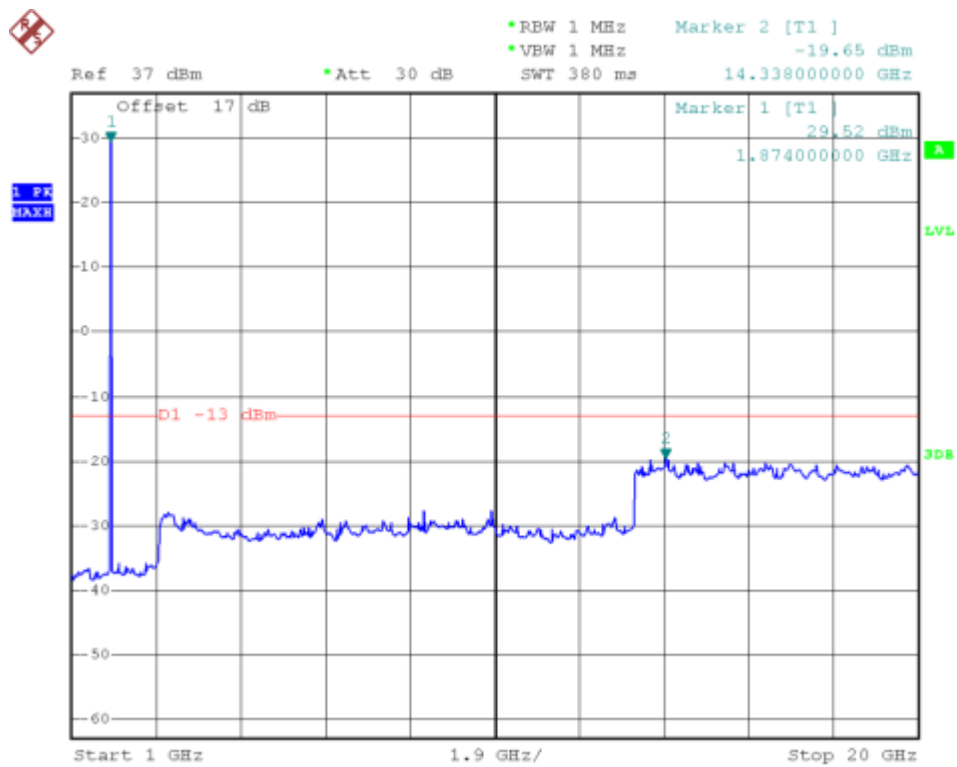


(Plot B2.1: GSM 1900MHz Channel = 661, 1GHz to 20GHz)

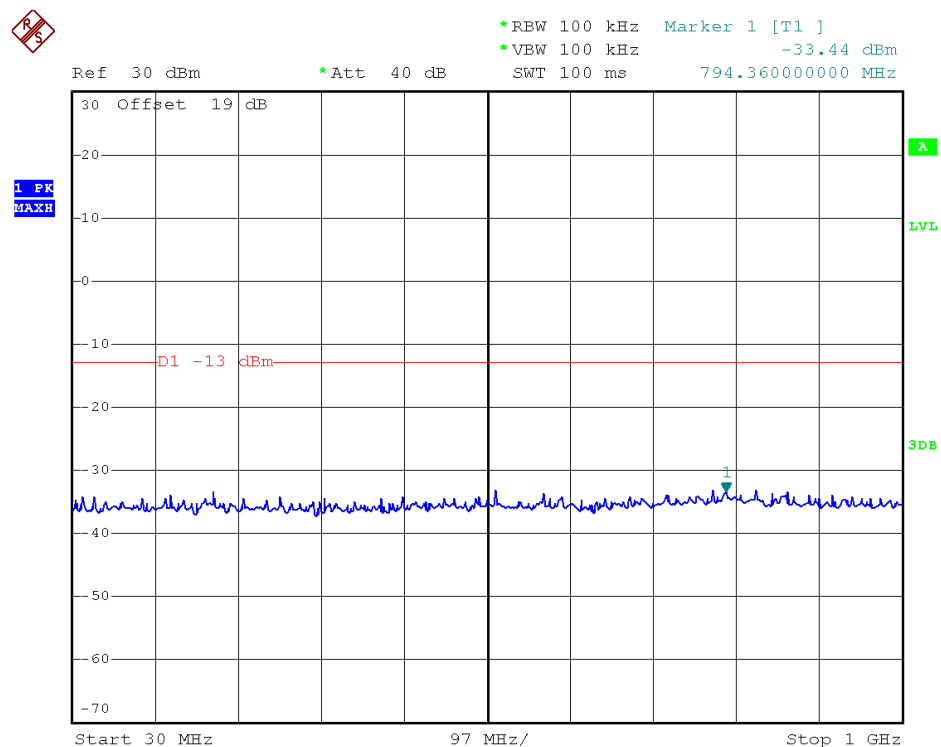


(Plot B3: GSM 1900MHz Channel = 810, 30MHz to 1GHz)

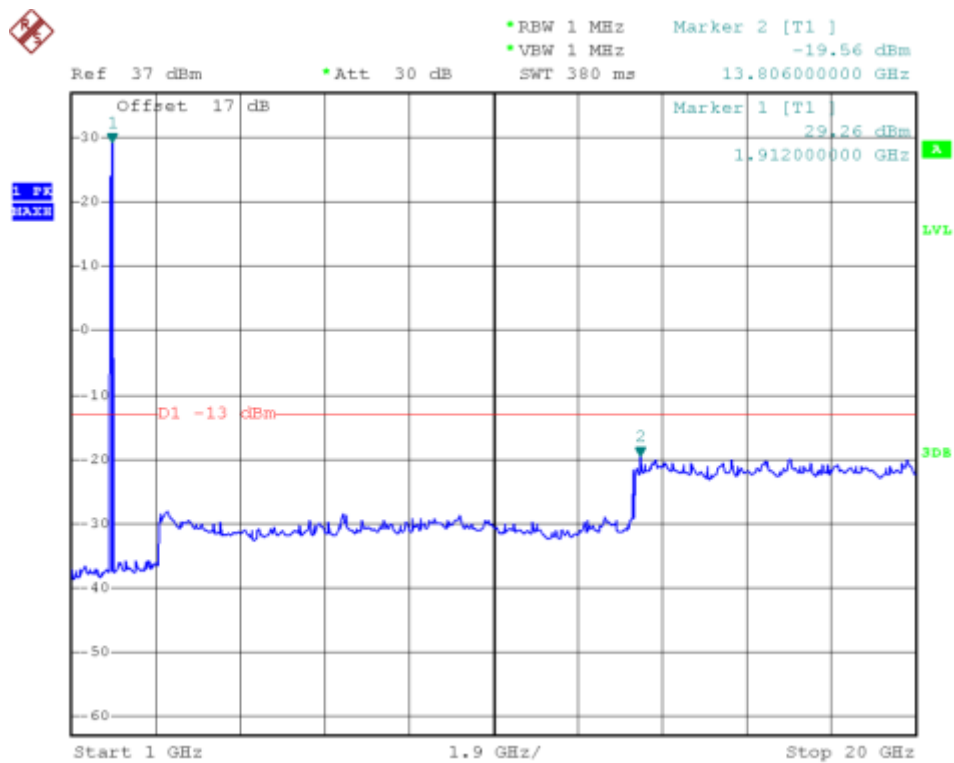


(Plot B3.1: GSM 1900MHz Channel = 810, 1GHz to 20GHz)

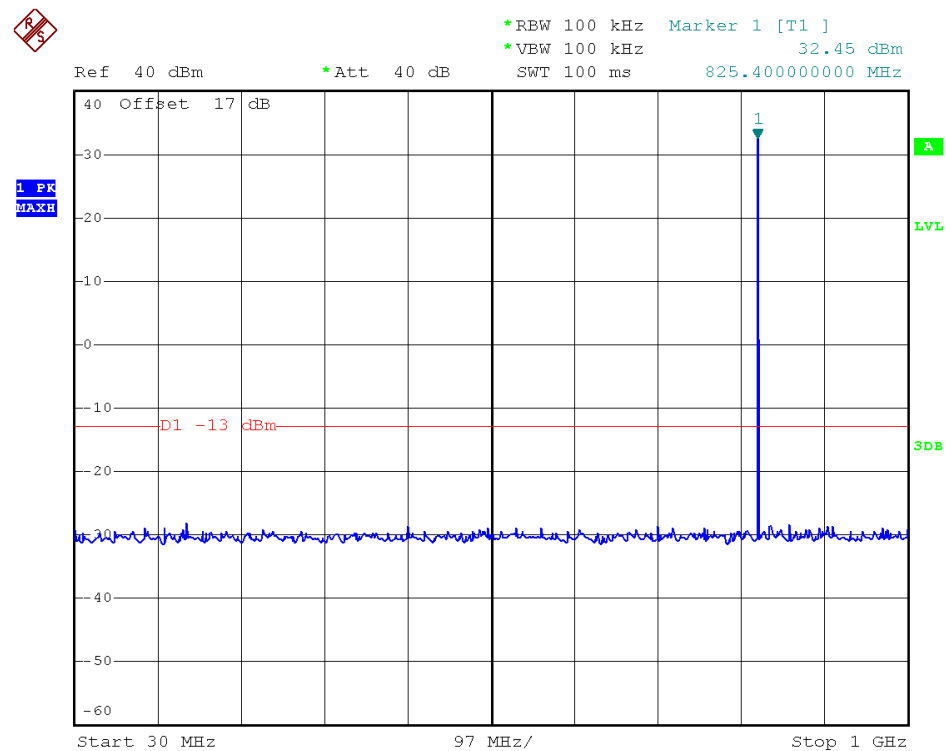


(Plot C1: EDGE 850MHz Channel = 128, 30MHz to 1GHz)

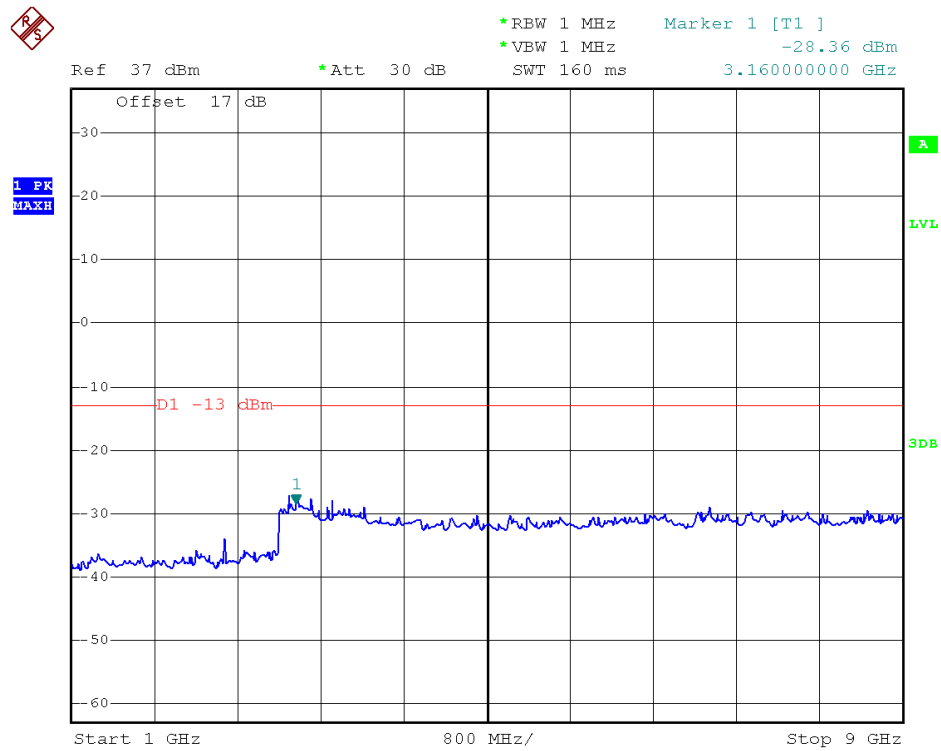


(Plot C1.1: EDGE 850MHz Channel = 128, 1Hz to 9GHz)

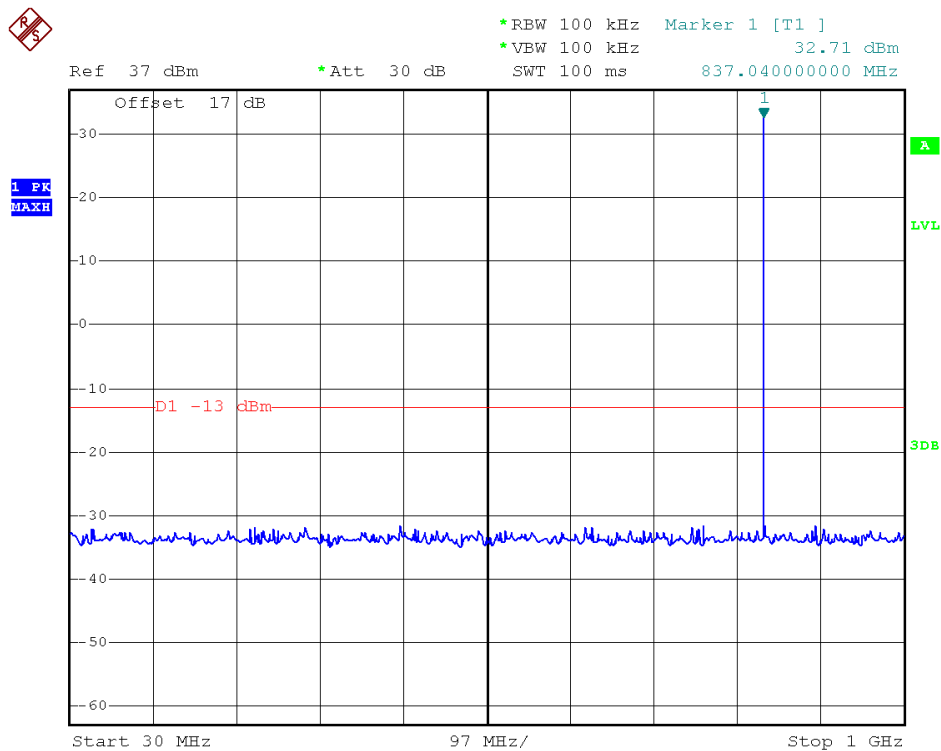


(Plot C2: EDGE 850MHz Channel = 190, 30MHz to 1GHz)

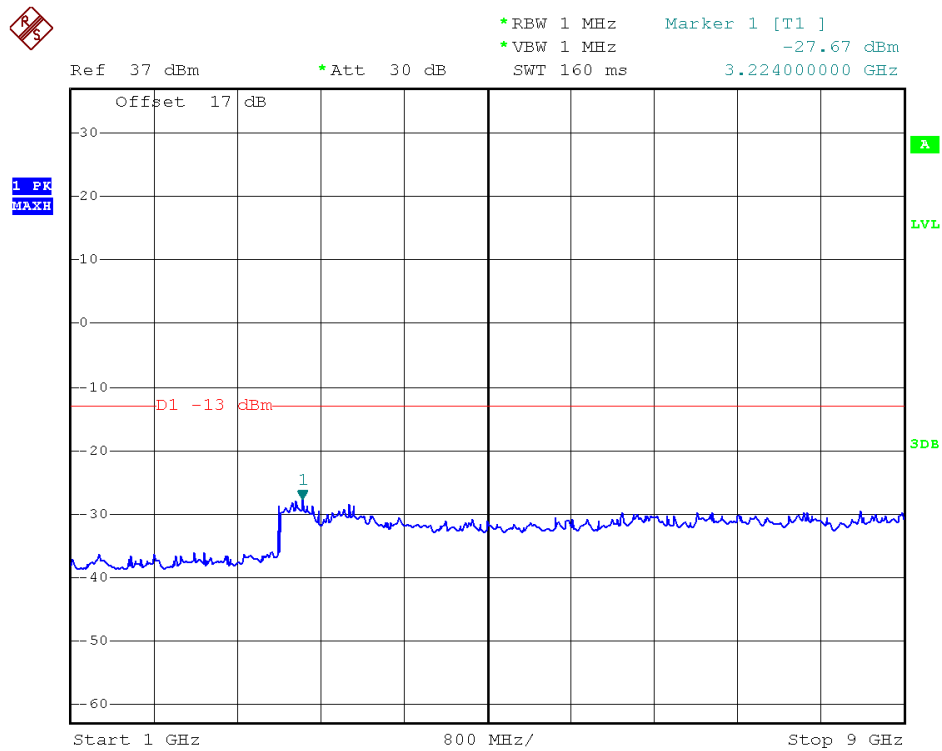


(Plot C2.1: EDGE 850MHz Channel = 190, 1Hz to 9GHz)

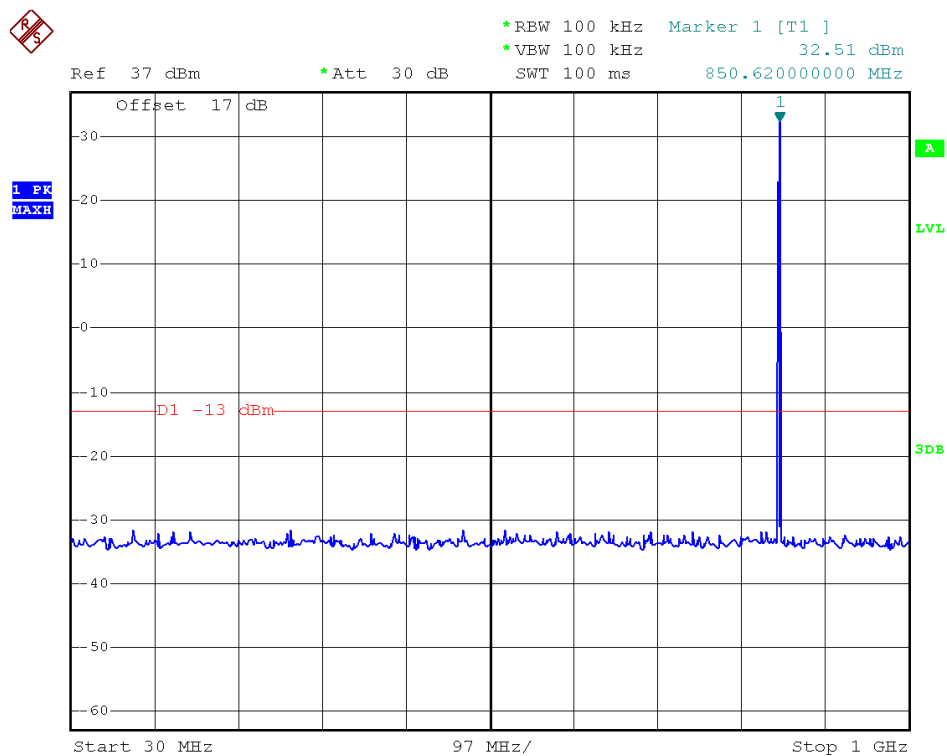


(Plot C3: EDGE 850MHz Channel = 251, 30MHz to 1GHz)

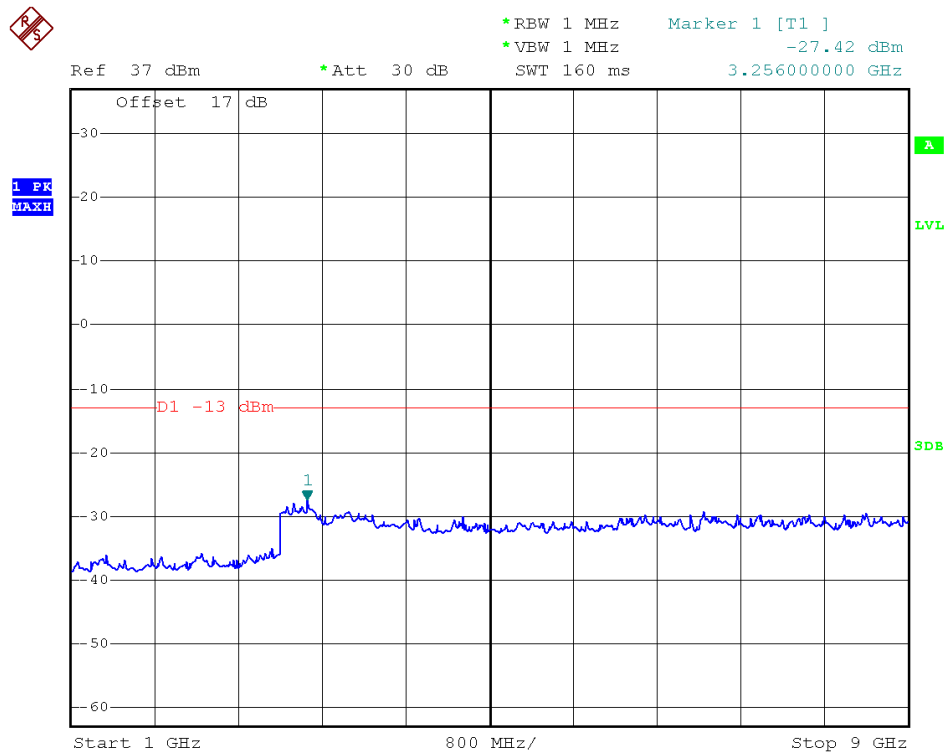


(Plot C3.1: EDGE 850MHz Channel = 251, 1GHz to 9GHz)

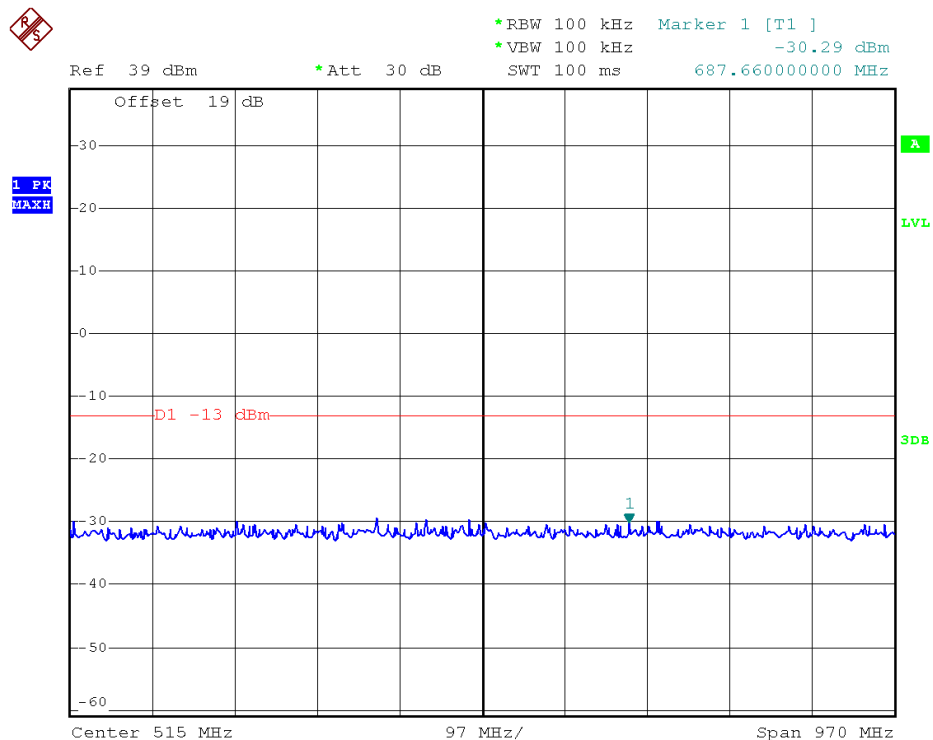


(Plot D1: EDGE 1900MHz Channel = 512, 30MHz to 1GHz)

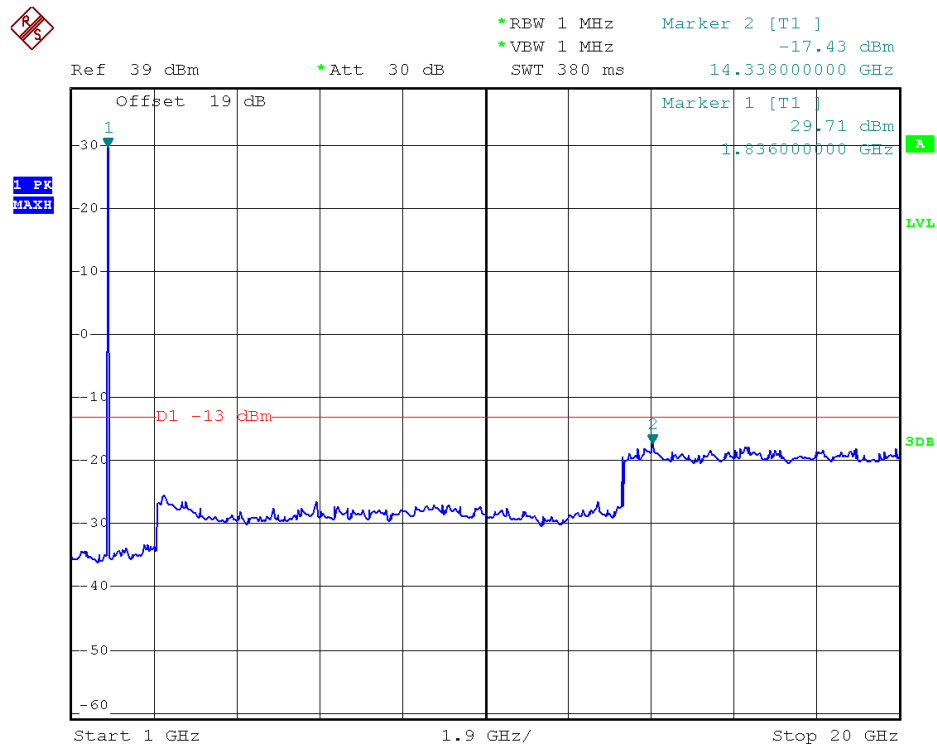


(Plot D1.1: EDGE 1900MHz Channel = 512, 1GHz to 20GHz)

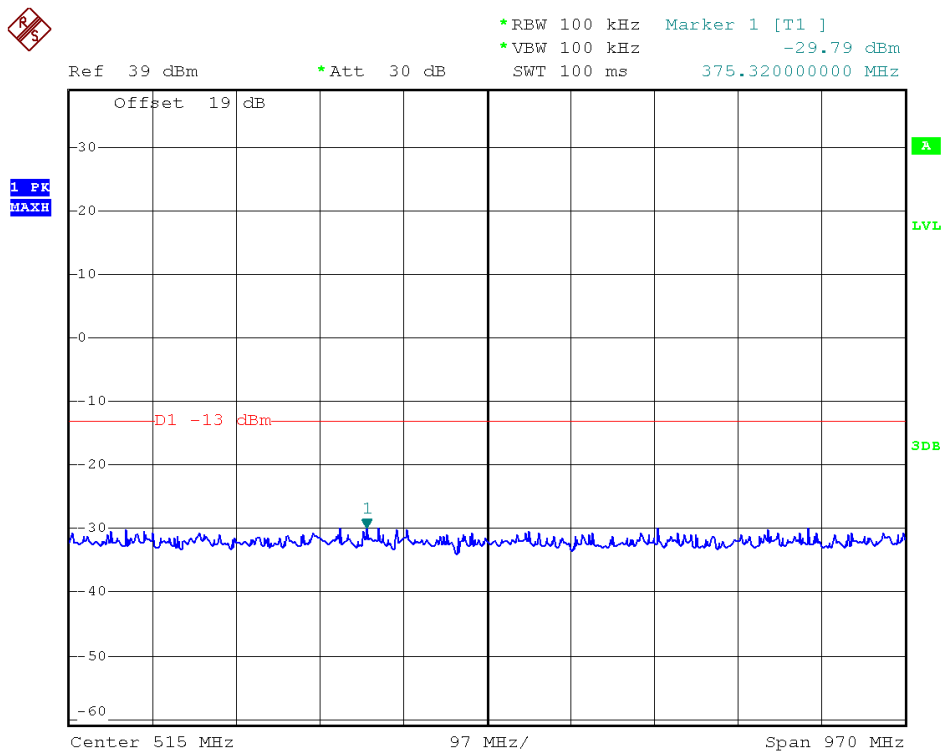


(Plot D2: EDGE 1900MHz Channel = 661, 30MHz to 1GHz)

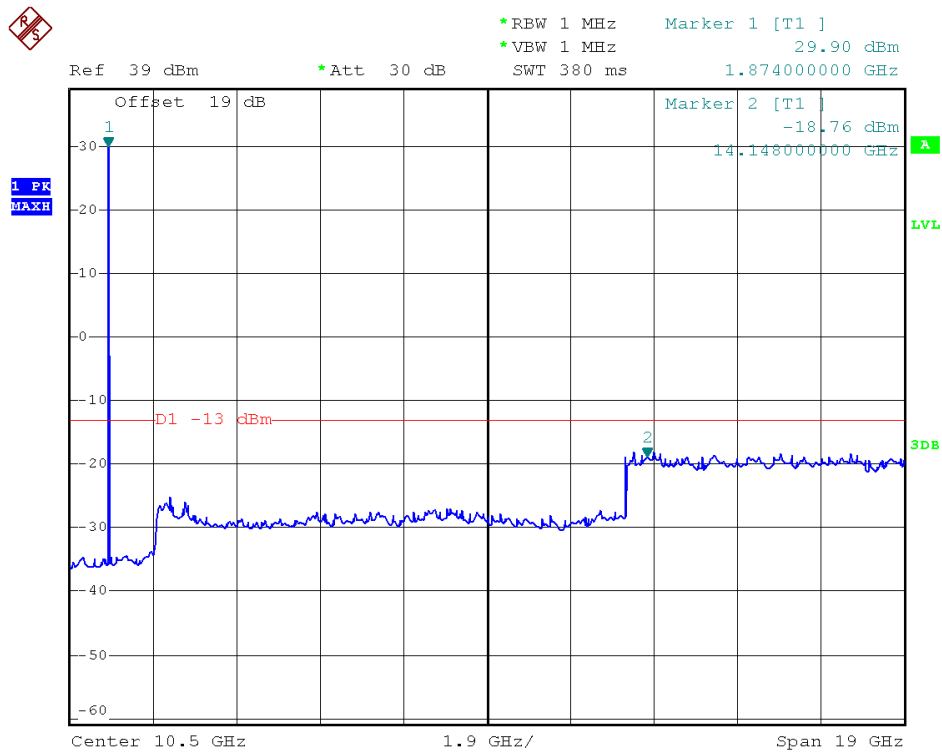


(Plot D2.1: EDGE 1900MHz Channel = 661, 1GHz to 20GHz)

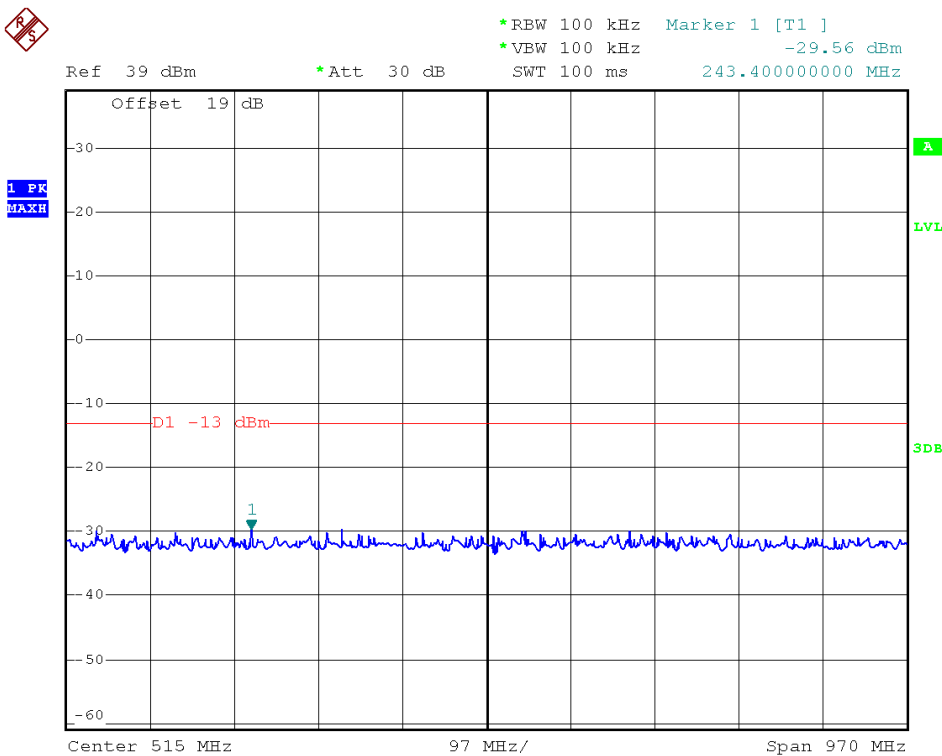


(Plot D3: EDGE 1900MHz Channel = 810, 30MHz to 1GHz)

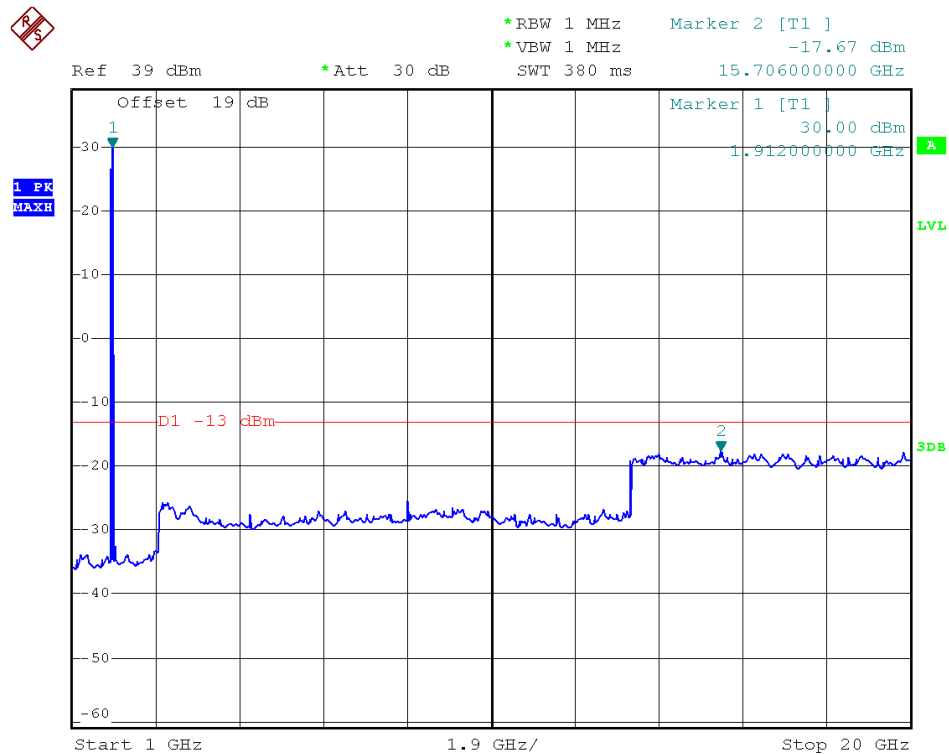


(Plot D3.1: EDGE 1900MHz Channel = 810, 1GHz to 20GHz)

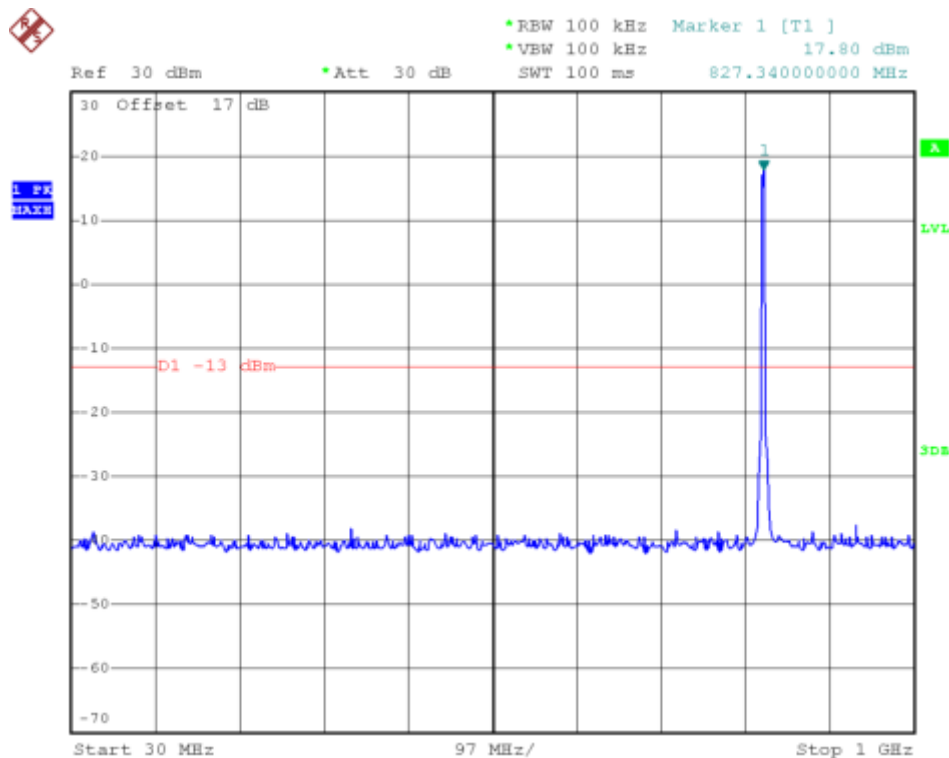


(Plot E1: WCDMA850MHz Channel = 4132, 30MHz to 1GHz)

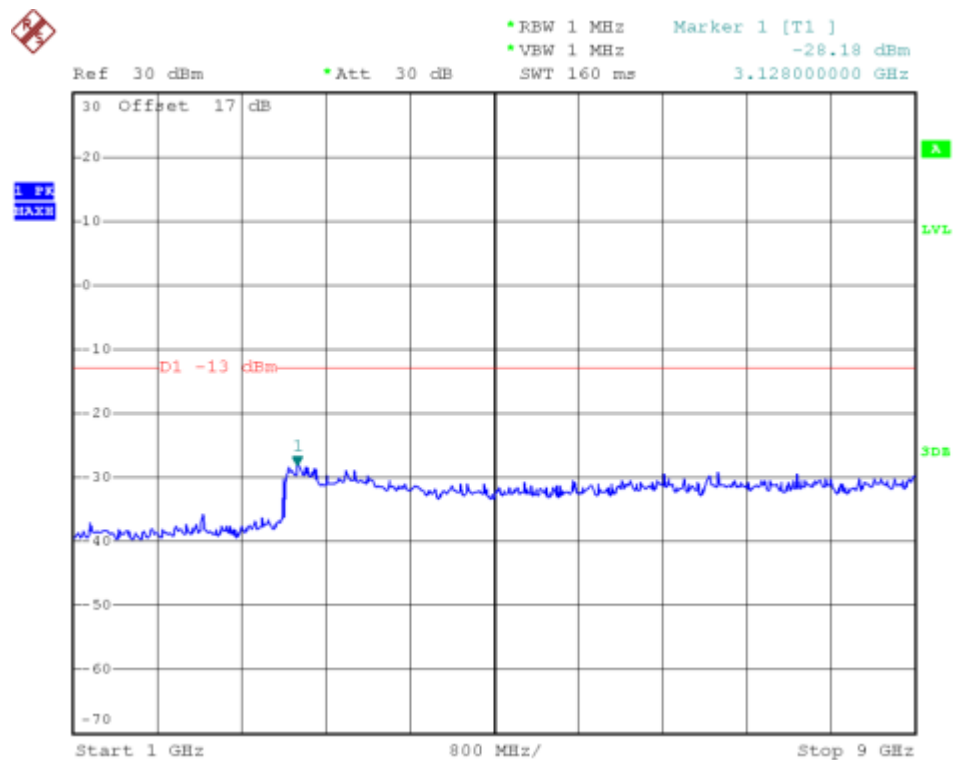


(Plot E1.1: WCDMA850MHz Channel = 4132, 1GHz to 9GHz)

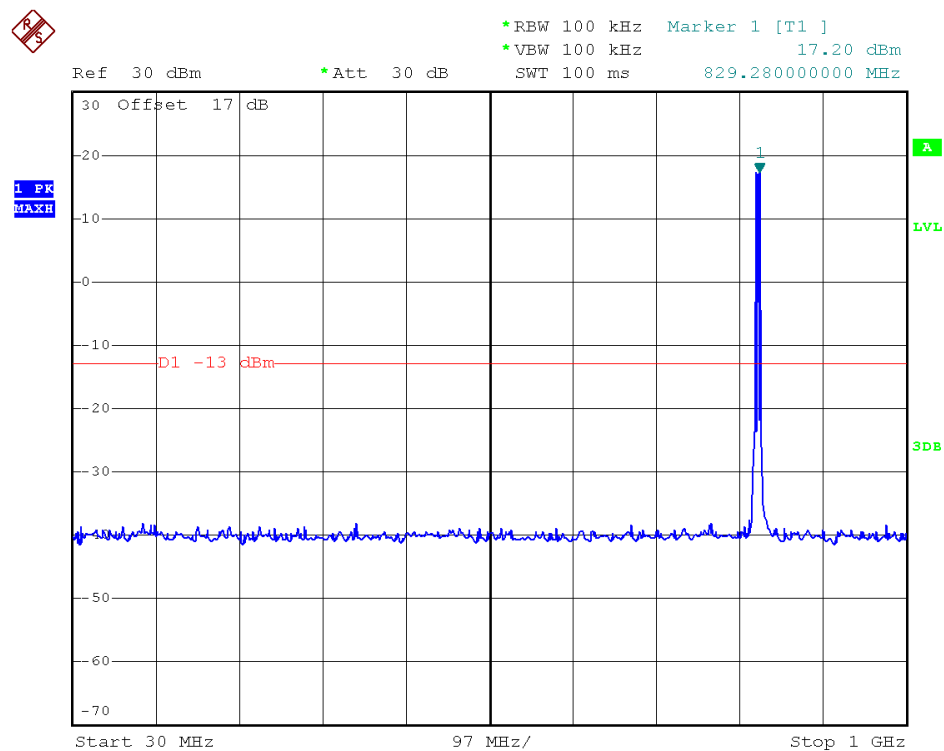


(Plot E2: WCDMA850MHz Channel = 4183, 30MHz to 1GHz)

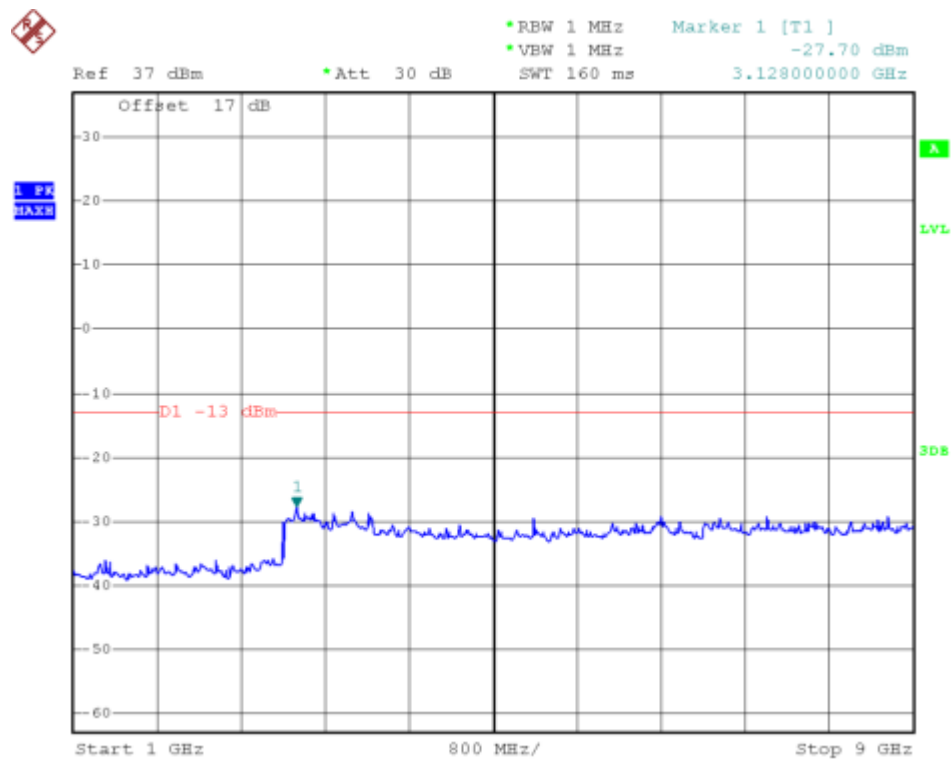


(Plot E2.1: WCDMA850MHz Channel = 4183, 1GHz to 9GHz)

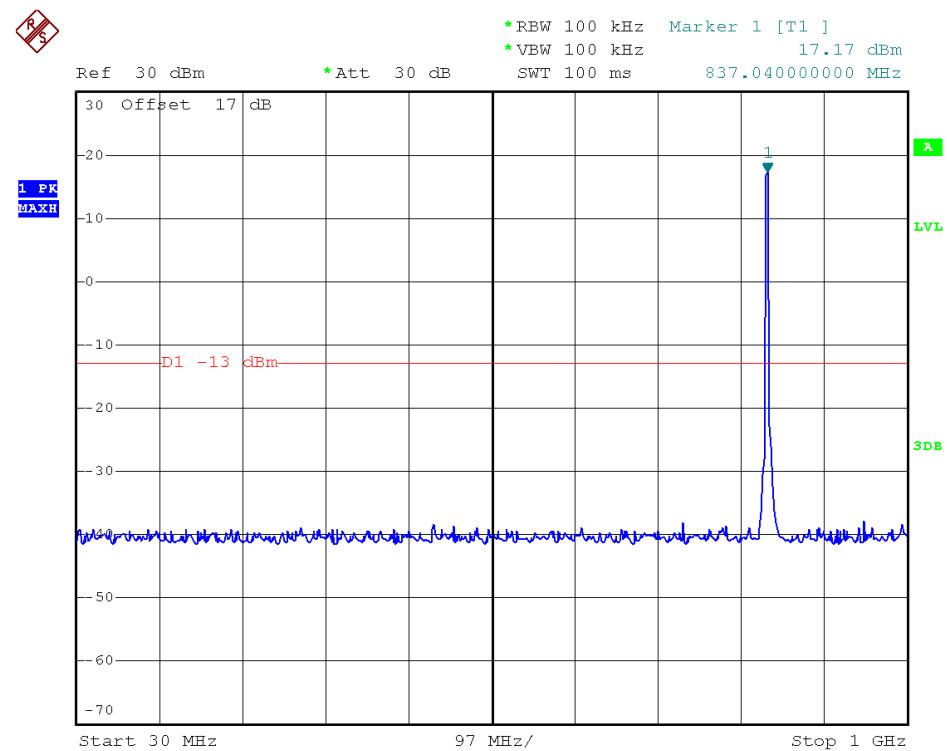


(Plot E3: WCDMA850MHz Channel = 4233, 30MHz to 1GHz)

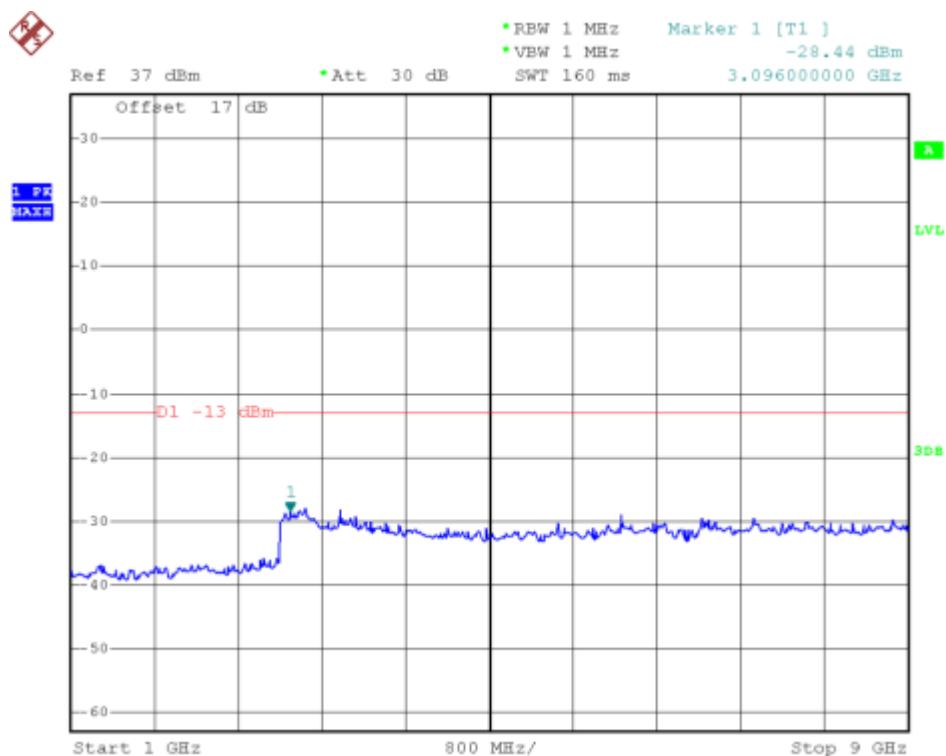


(Plot E3.1: WCDMA850MHz Channel = 4233, 1GHz to 9GHz)

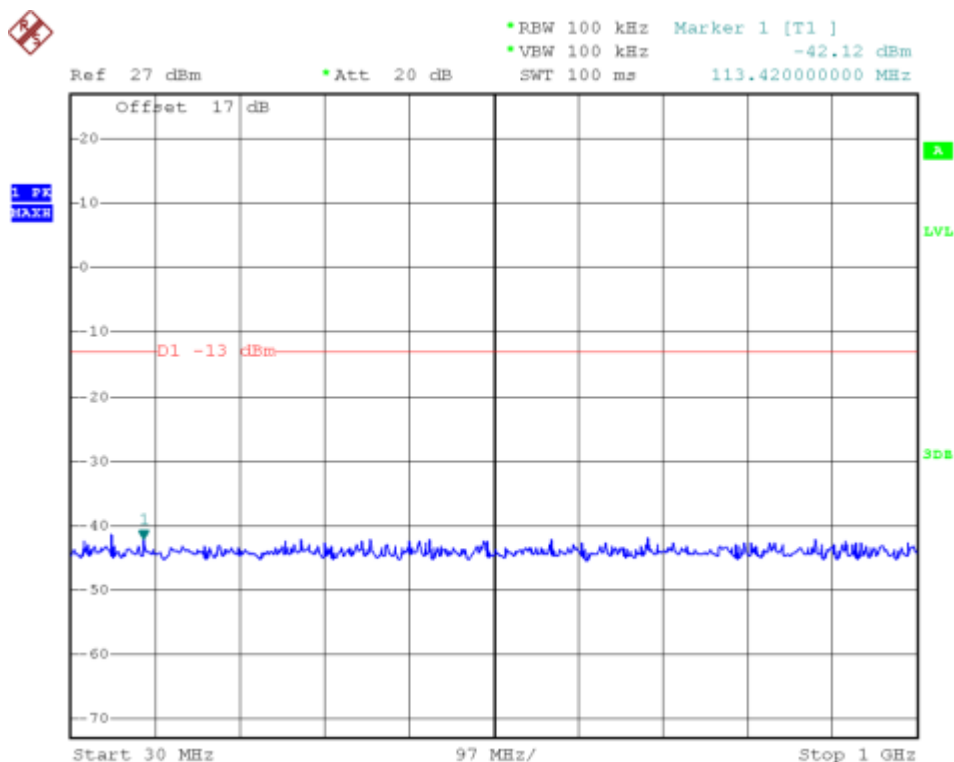


(Plot F1: WCDMA1900MHz Channel = 9262, 30MHz to 1GHz)

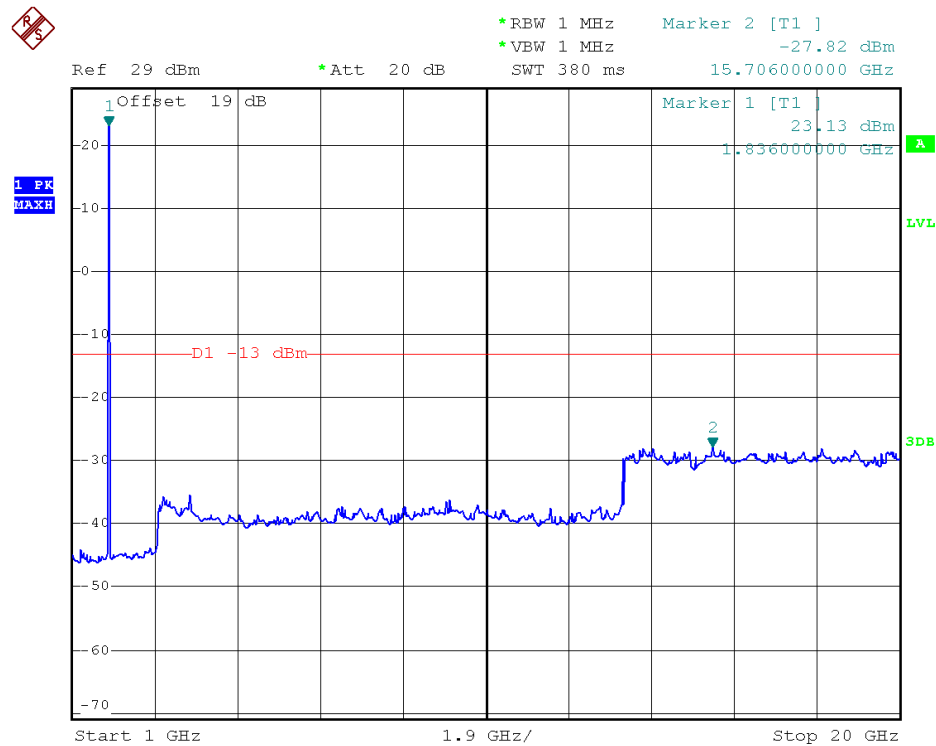


(Plot F1.1: WCDMA1900MHz Channel = 9262, 1GHz to 20GHz)

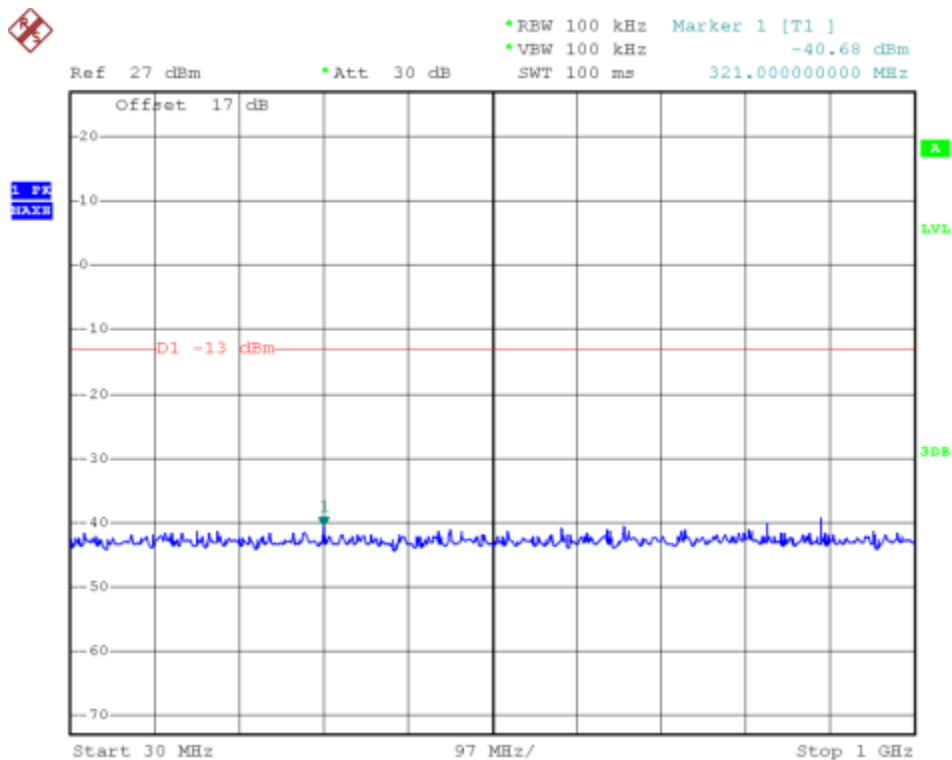


(Plot F2: WCDMA1900MHz Channel = 9400, 30MHz to 1GHz)

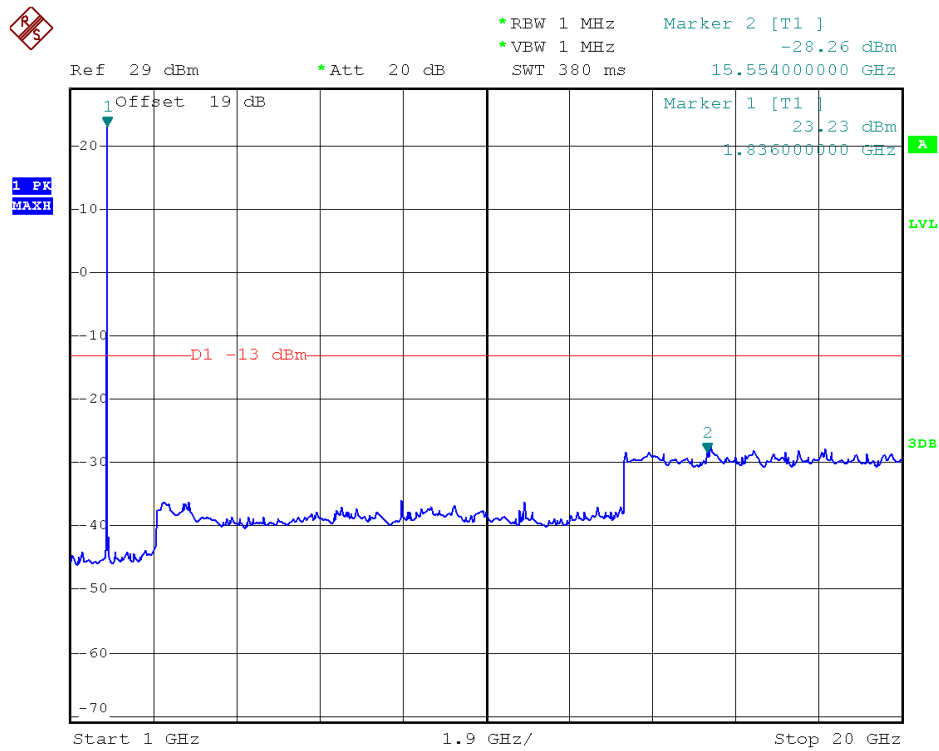


(Plot F2.1: WCDMA1900MHz Channel = 9400, 1GHz to 20GHz)

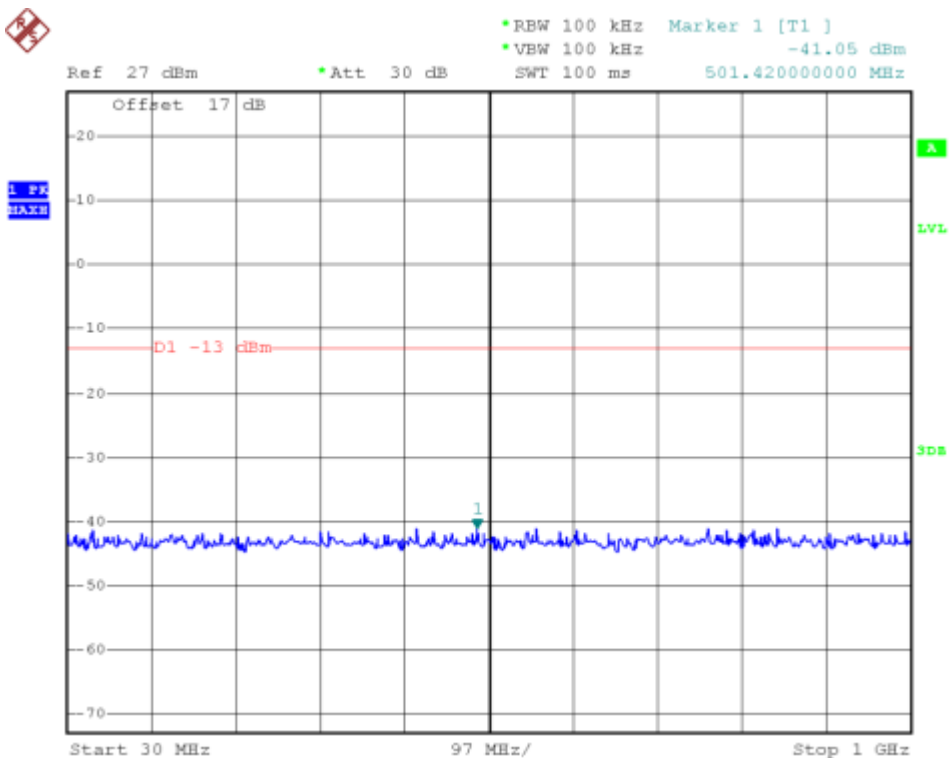


(Plot F3: WCDMA1900MHz Channel = 9538, 30MHz to 1GHz)

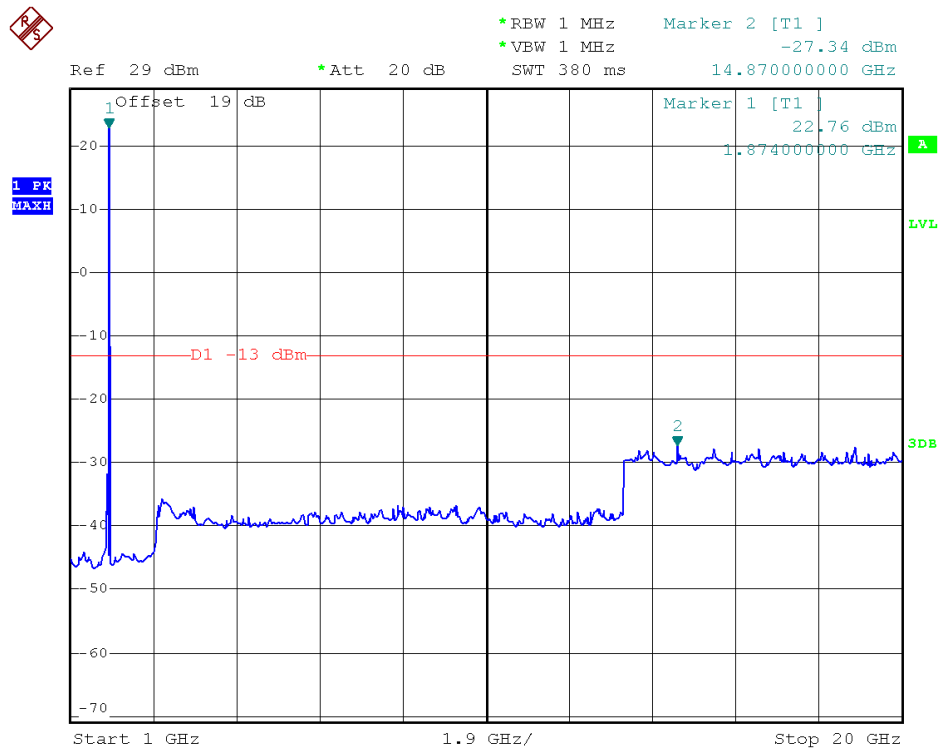


(Plot F3.1: WCDMA1900MHz Channel = 9538 1GHz to 20GHz)

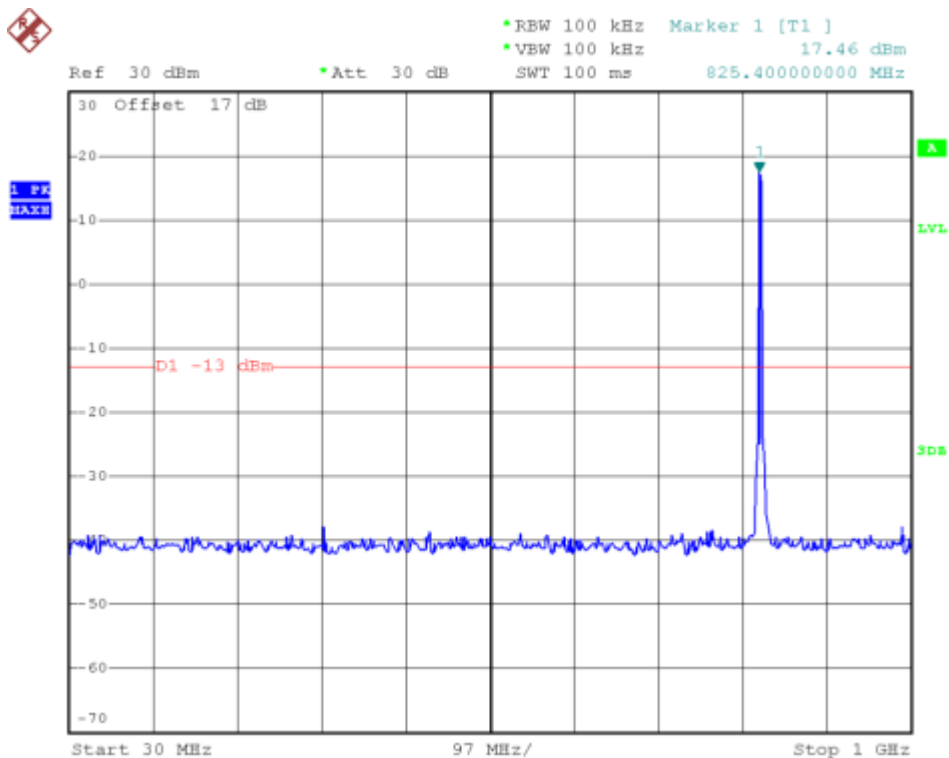


(Plot G1: HSDPA 850MHz Channel = 4132, 30MHz to 1GHz)

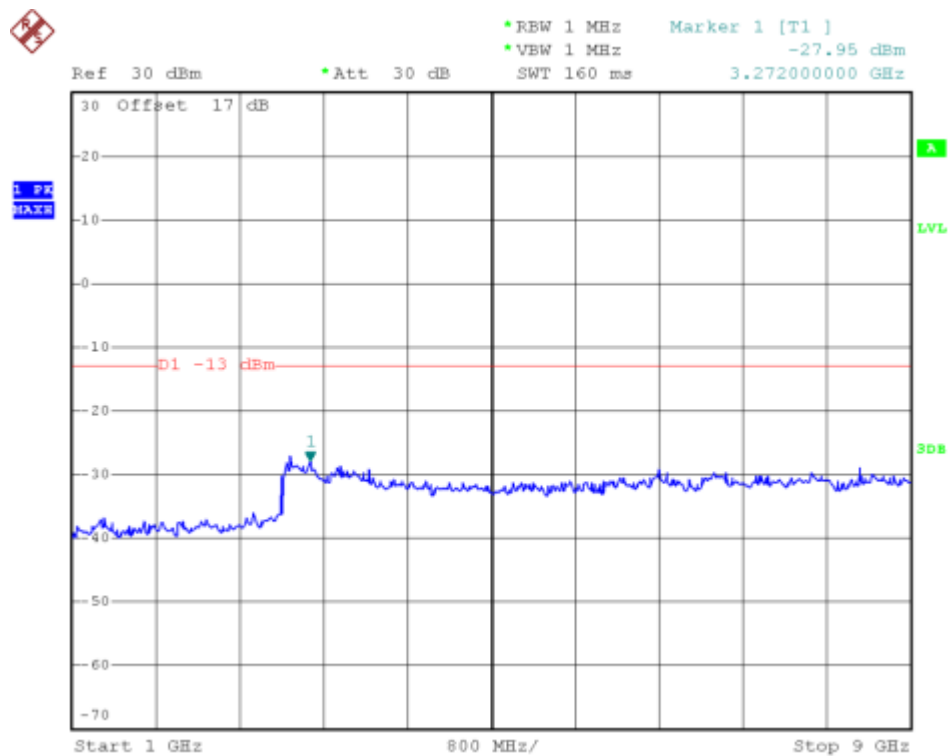


(Plot G1.1: HSDPA 850MHz Channel = 4132, 1GHz to 9GHz)

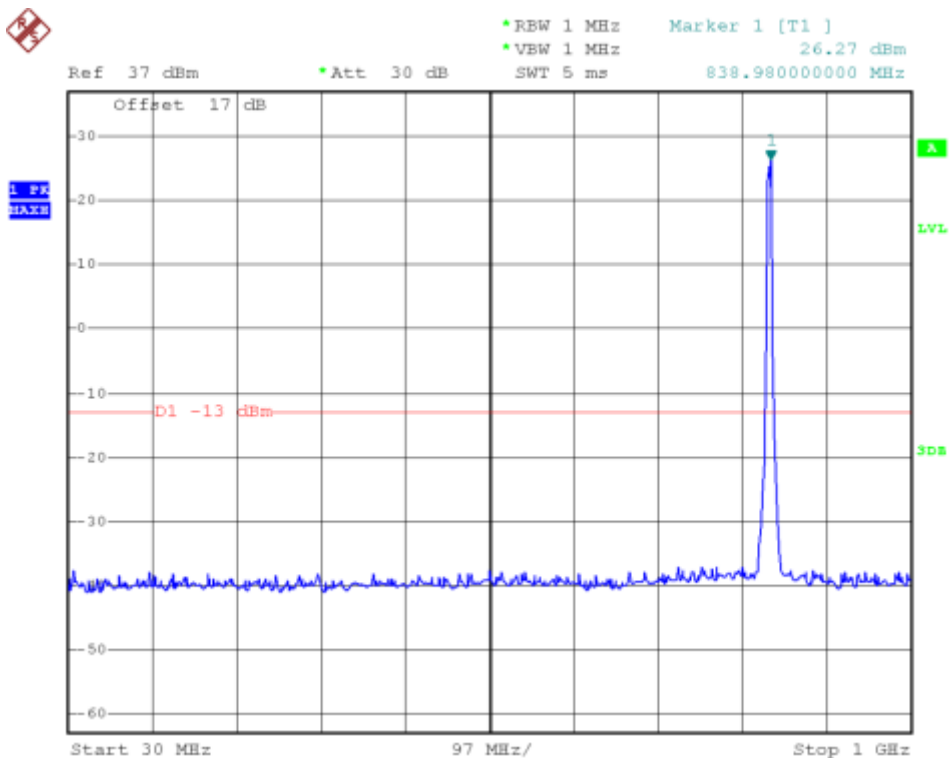


(Plot G2: HSDPA 850MHz Channel = 4183, 30MHz to 1GHz)

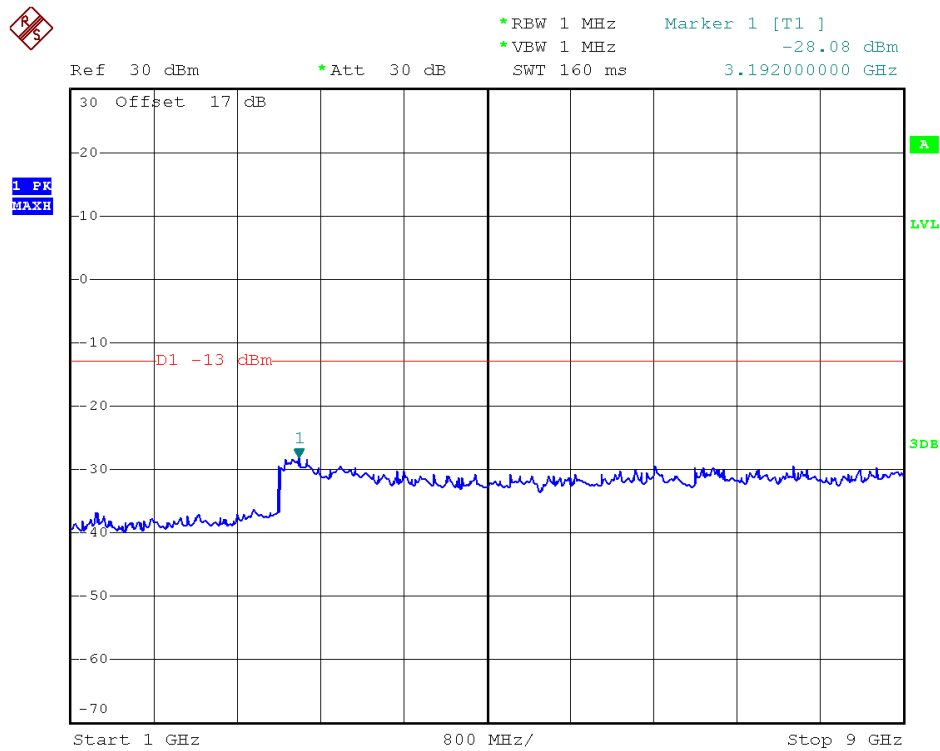


(Plot G2.1: HSDPA 850MHz Channel = 4183, 1GHz to 9GHz)

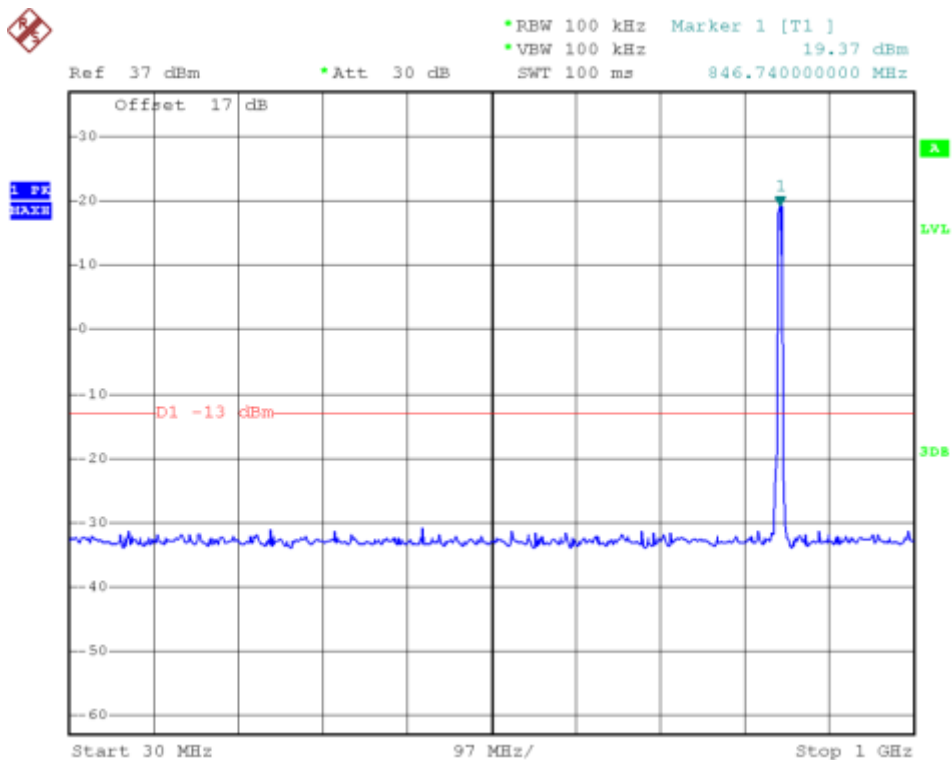


(Plot G3: HSDPA850MHz Channel = 4233, 30MHz to 1GHz)

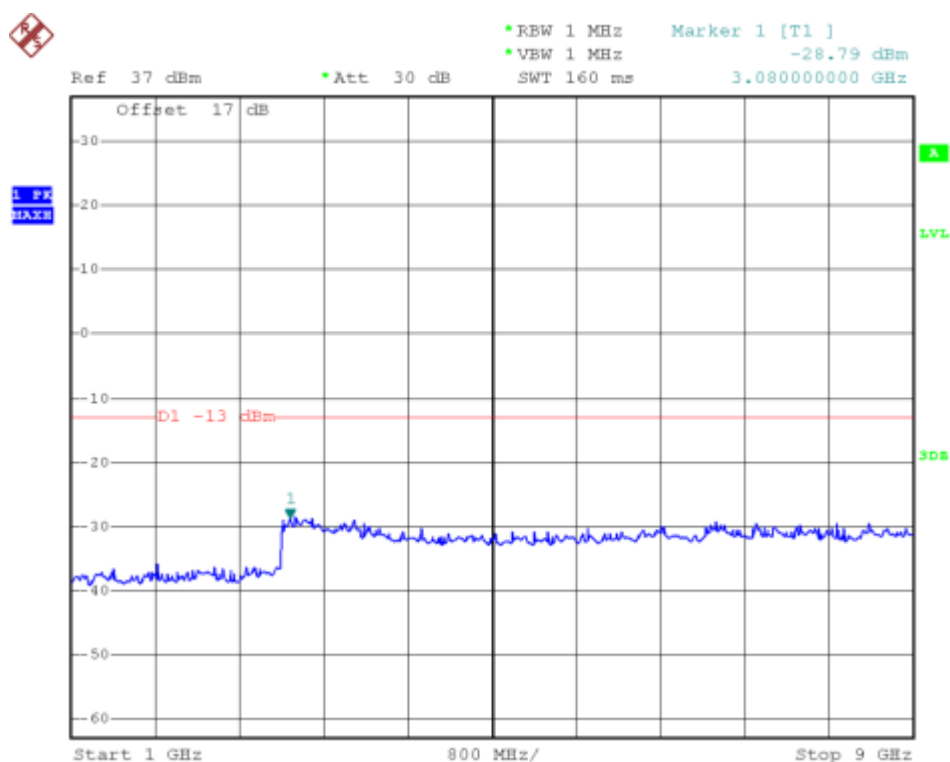


(Plot G3.1: HSDPA850MHz Channel = 4233, 1GHz to 9GHz)

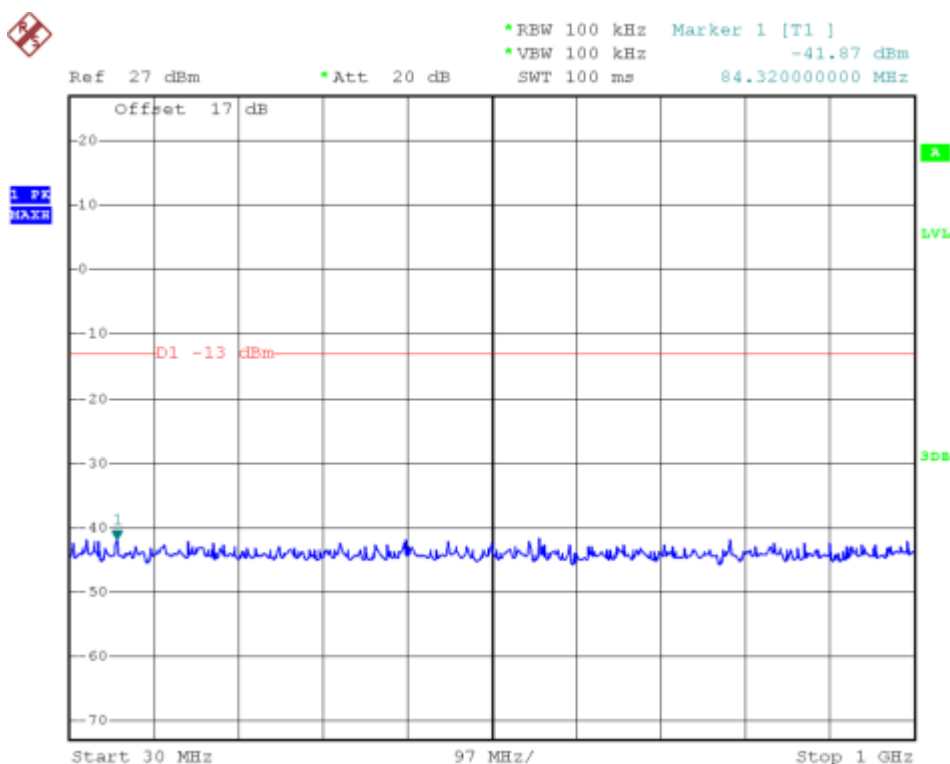


(Plot H1: HSDPA1900MHz Channel = 9262, 30MHz to 1GHz)

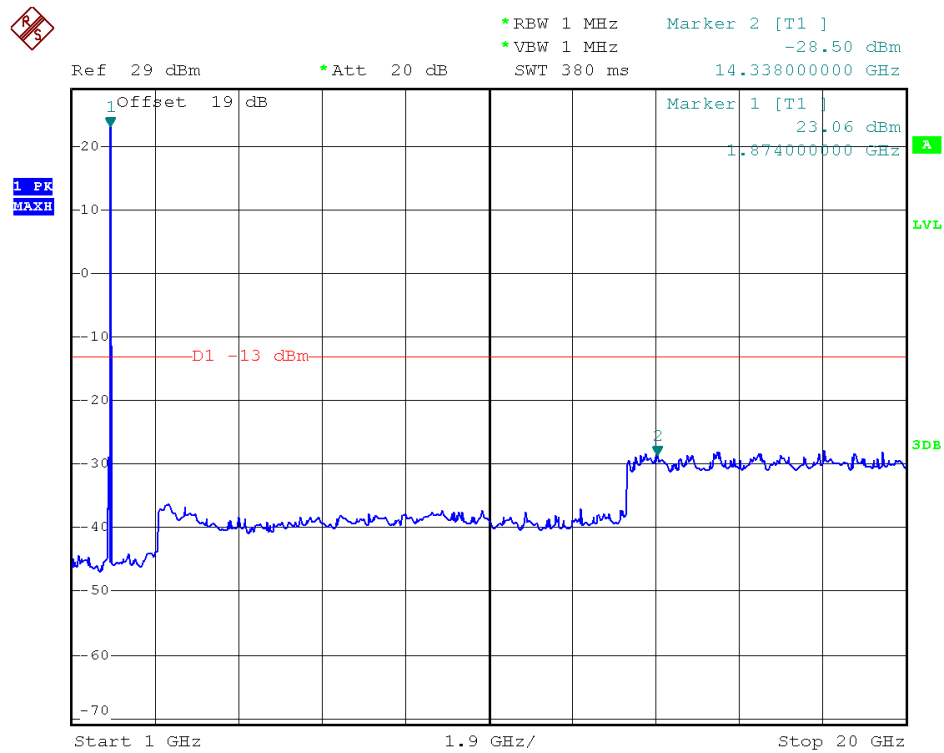


(Plot H1.1: HSDPA1900MHz Channel = 9262, 1GHz to 20GHz)

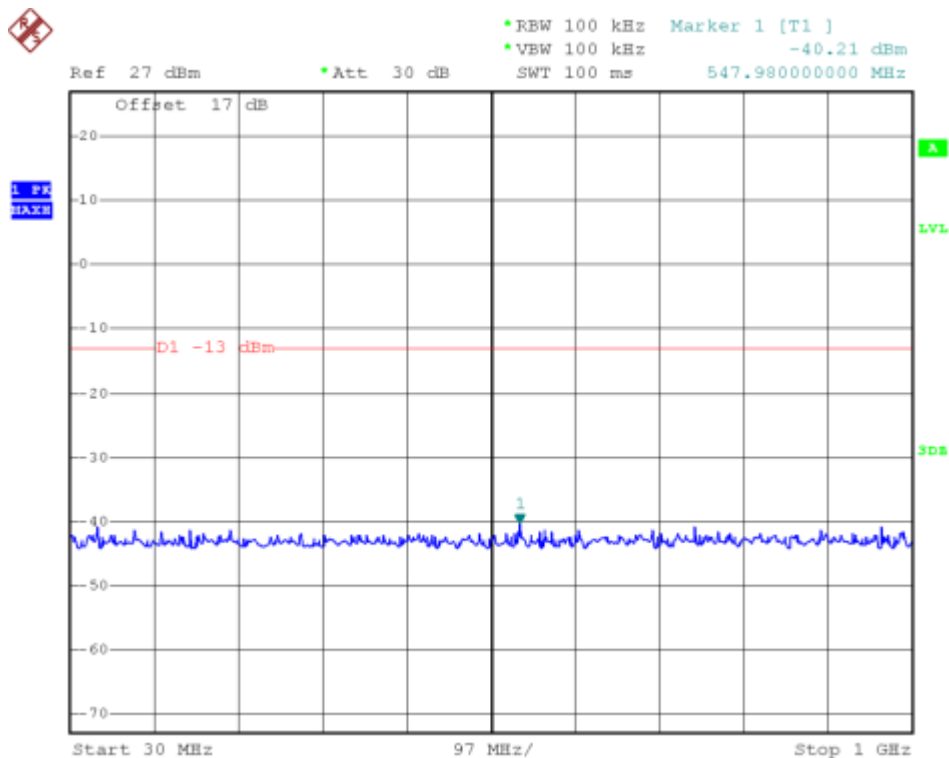


(Plot H2: HSDPA1900MHz Channel = 9400, 30MHz to 1GHz)

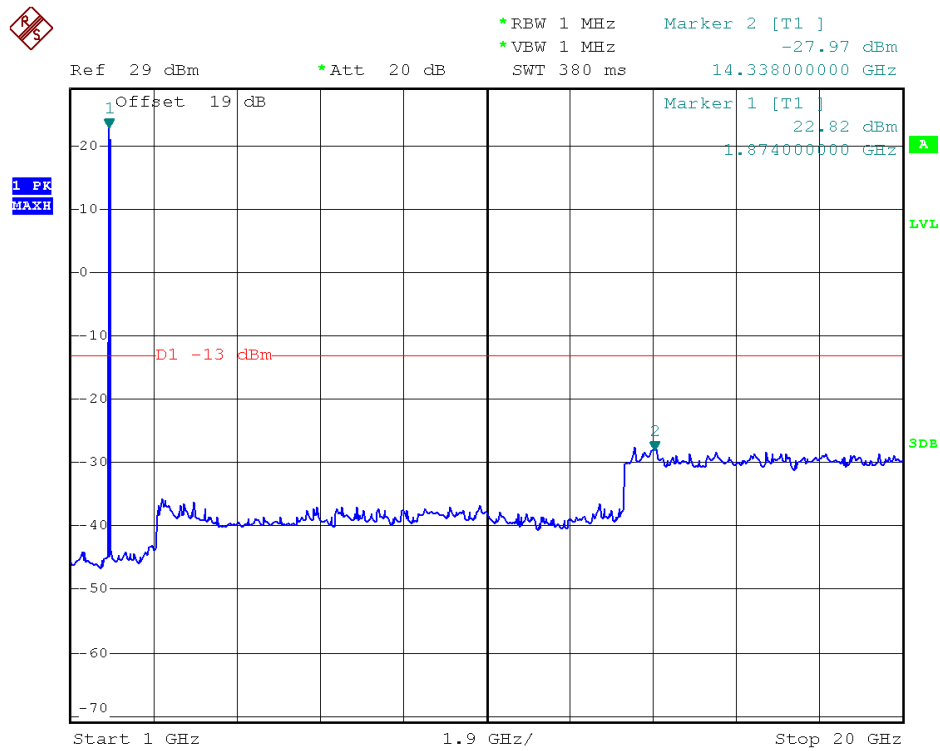

(Plot H2.1: HSDPA1900MHz Channel = 9400, 1GHz to 20GHz)

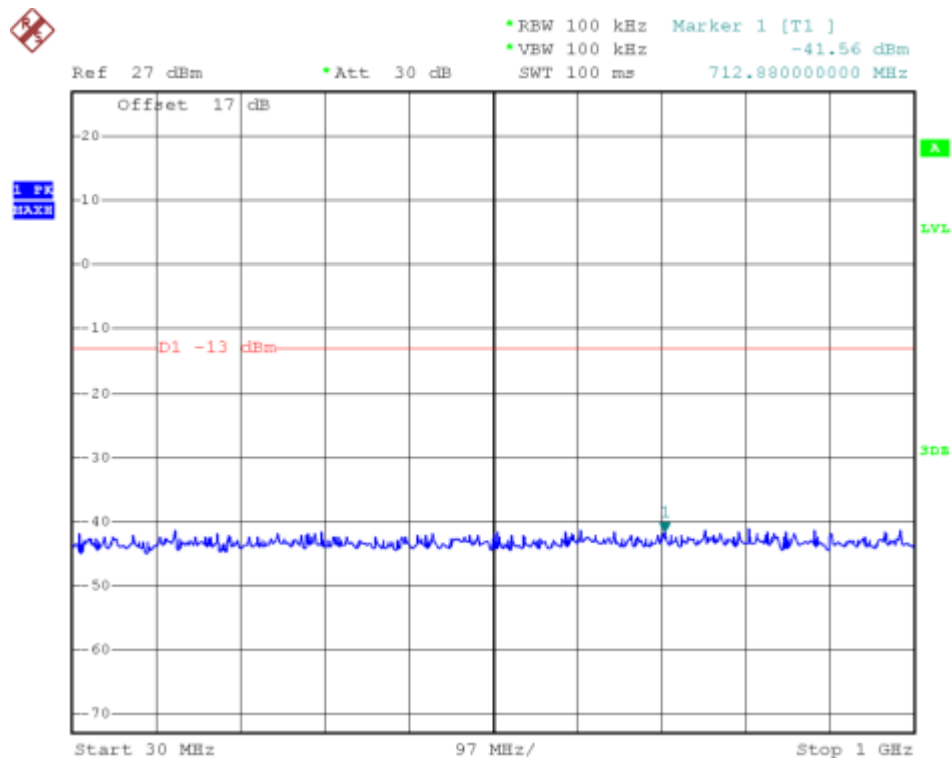

(Plot H3: HSDPA1900MHz Channel = 9538, 30MHz to 1GHz)

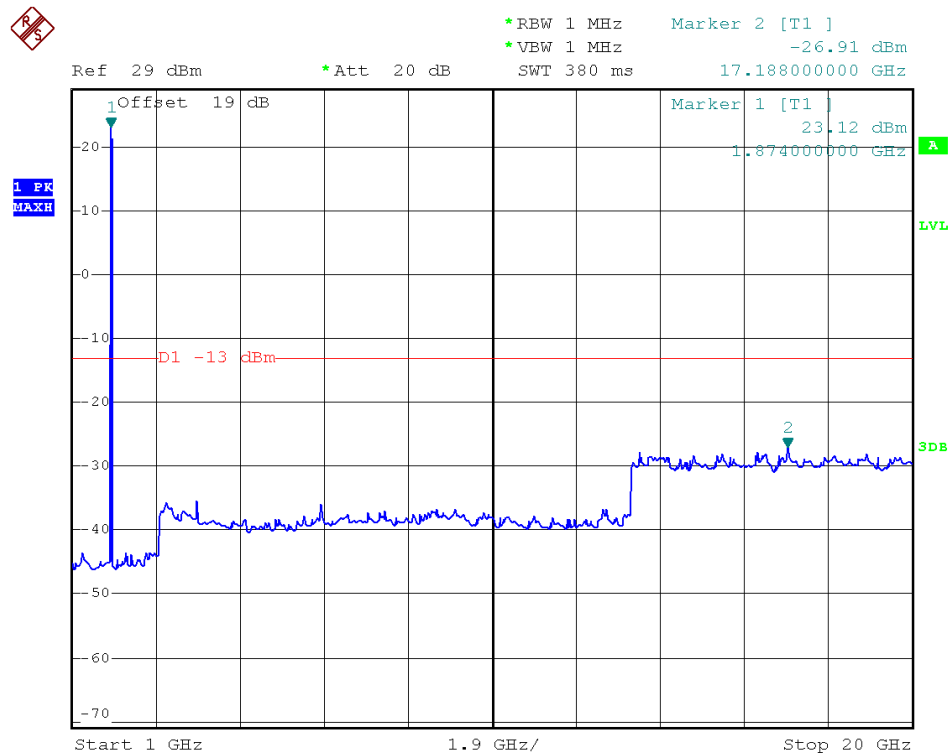

(Plot H3.1: HSDPA1900MHz Channel = 9538 1GHz to 20GHz)

2.6 Band Edge

2.6.1 Requirement

According to FCC section 22.917(b) and FCC section 24.238(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

2.6.2 Test Description

See section 2.1.2 of this report.


2.6.3 Test Result

The lowest and highest channels are tested to verify the band edge emissions.


1. Test Verdict:

Band	Channel	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-15.18	Plat A	-13	PASS
	251	848.8	-14.85	Plot B		PASS
GSM 1900MHz	512	1850.2	-14.42	Plat C	-13	PASS
	810	1909.8	-15.39	Plot D		PASS
EDGE 850MHz	128	824.2	-14.43	Plat E	-13	PASS
	251	848.8	-15.15	Plot F		PASS
EDGE 1900MHz	512	1850.2	-15.32	Plat G	-13	PASS
	810	1909.8	-15.92	Plot H		PASS
WCDMA 850MHz	4132	826.4	-20.99	Plat I	-13	PASS
	4233	846.6	-17.49	Plot J		PASS
WCDMA 1900MHz	9262	1852.4	-19.66	Plat K	-13	PASS
	9538	1907.6	-17.40	Plot L		PASS
HSDPA 850MHz	4132	826.4	-20.83	Plat M	-13	PASS
	4233	846.6	-17.16	Plot N		PASS
HSDPA 1900MHz	9262	1852.4	-19.32	Plat O	-13	PASS
	9538	1907.6	-16.90	Plot P		PASS


2. Test Plots:

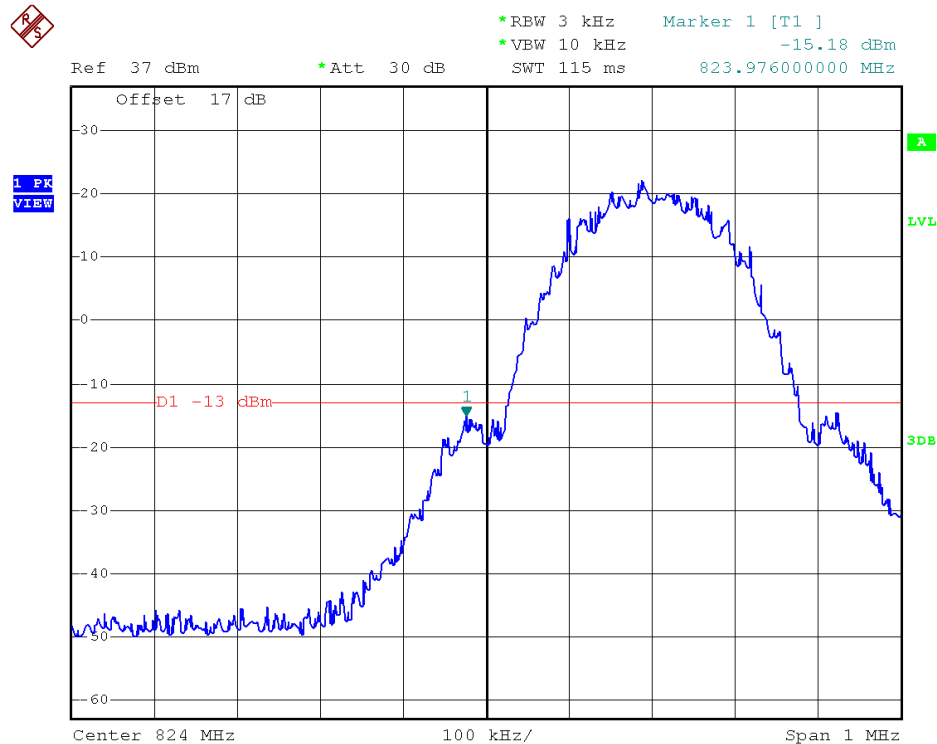


(Plot A: GSM 850 Channel = 128)

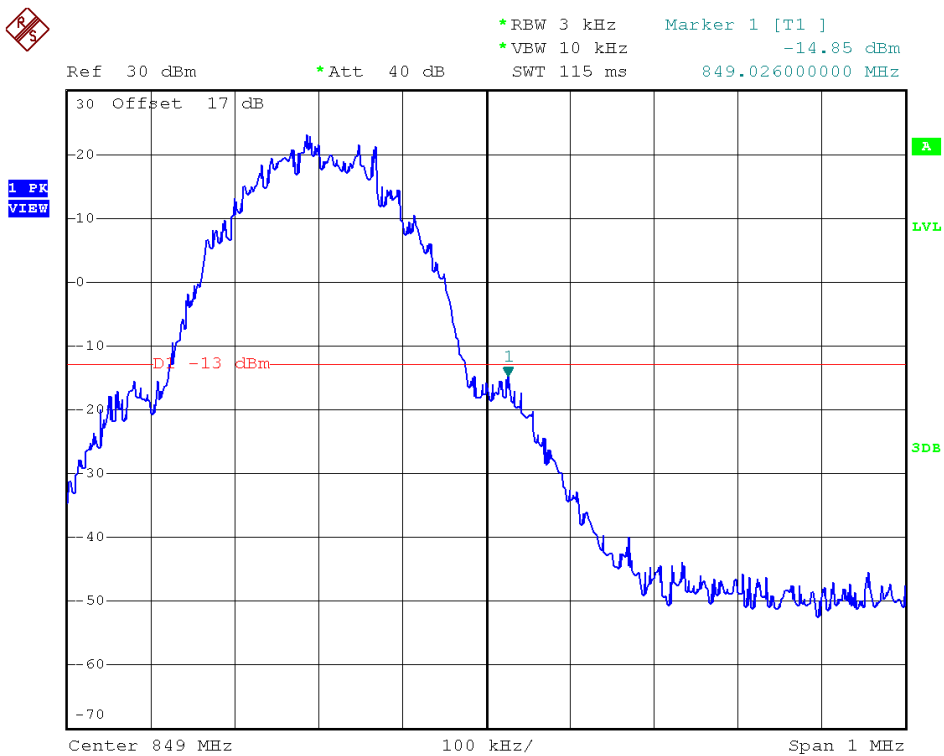


(Plot B: GSM 850 Channel = 251)

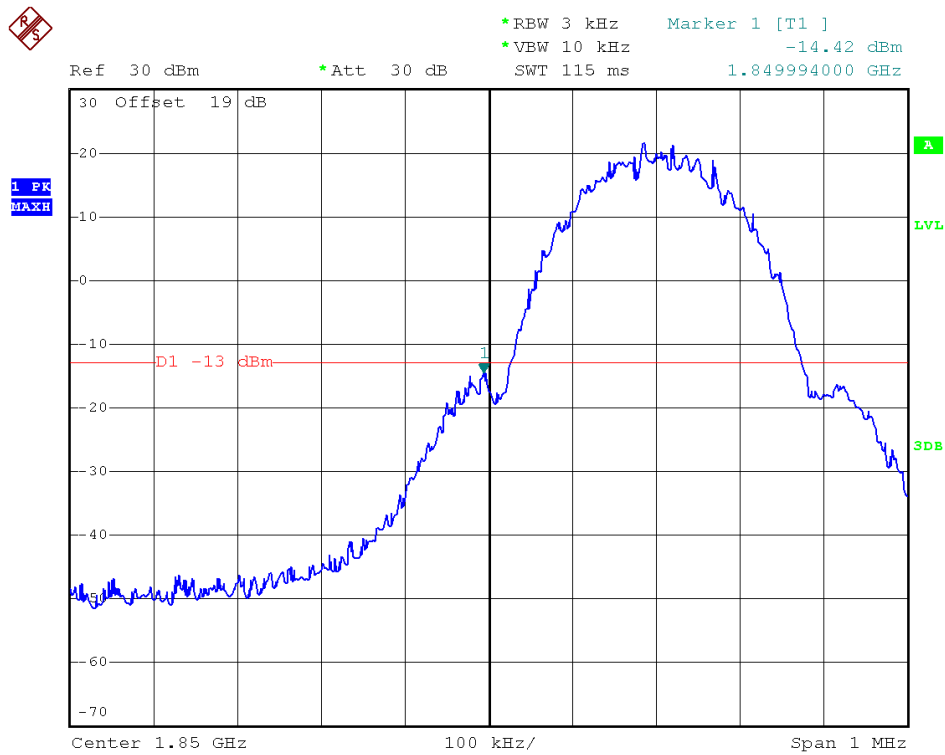


(Plot C: GSM 1900 Channel = 512)

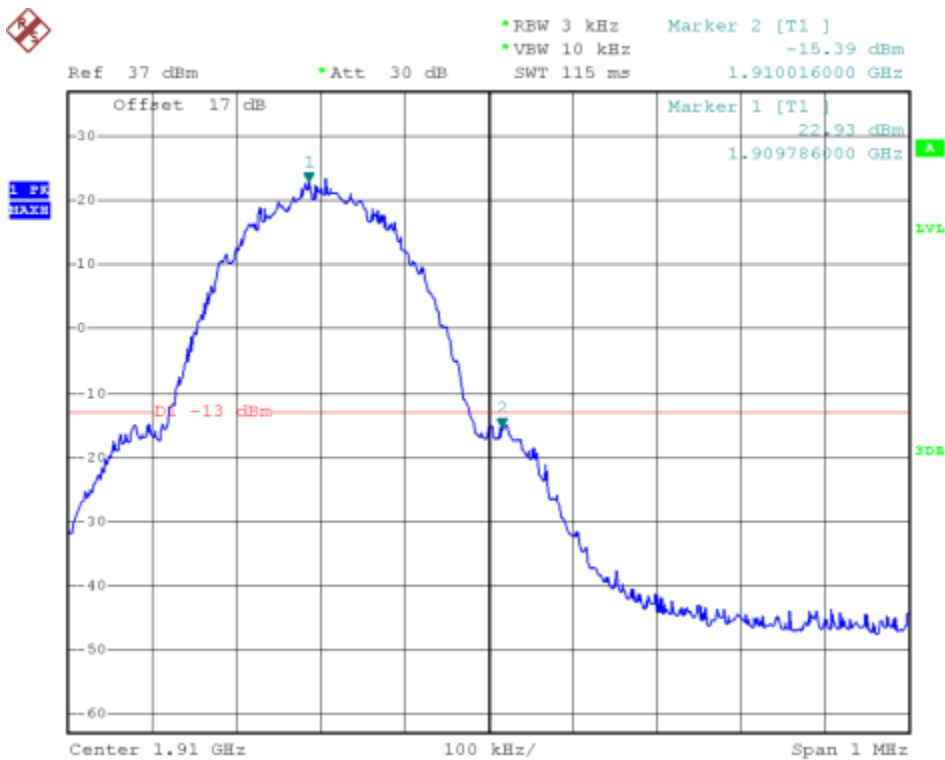


(Plot D: GSM 1900 Channel = 810)

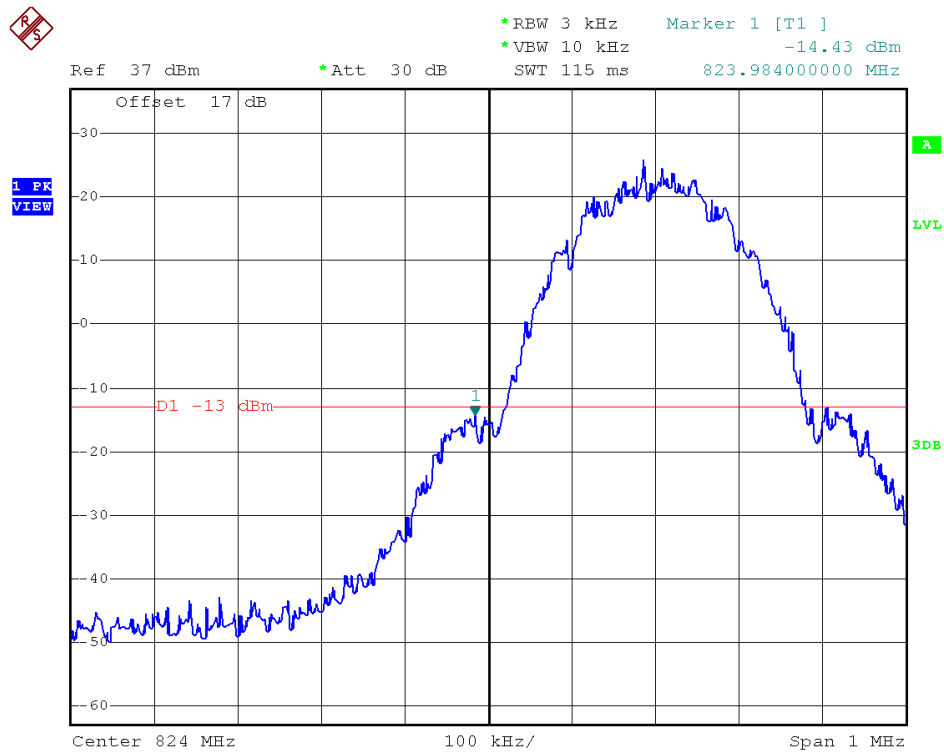

(Plot E: EDGE 850 Channel = 128)

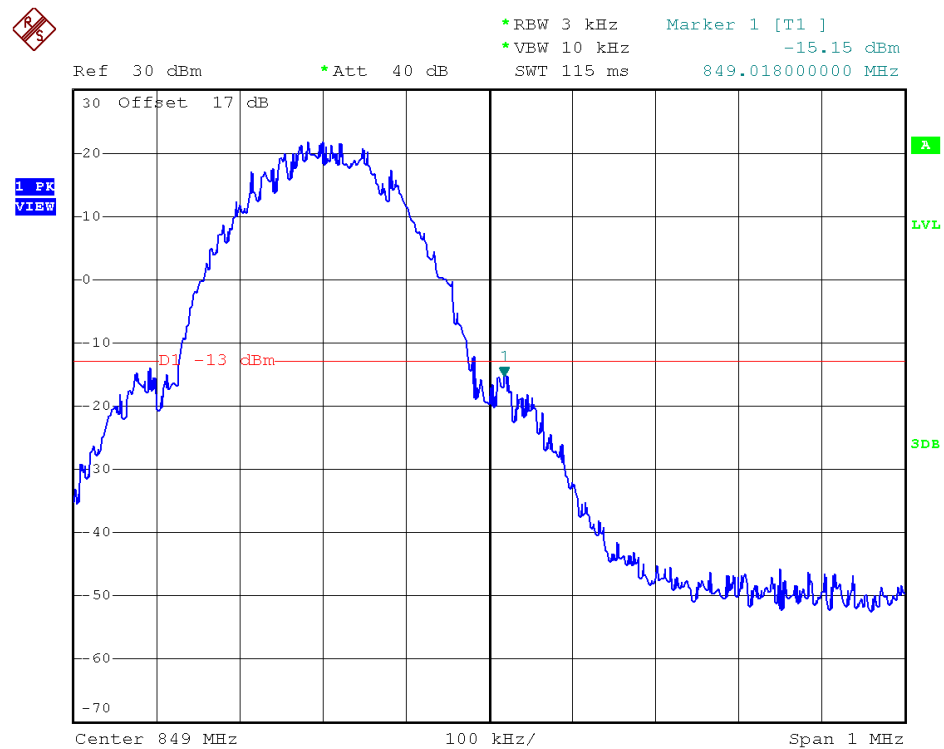


(Plot F: EDGE 850 Channel = 251)

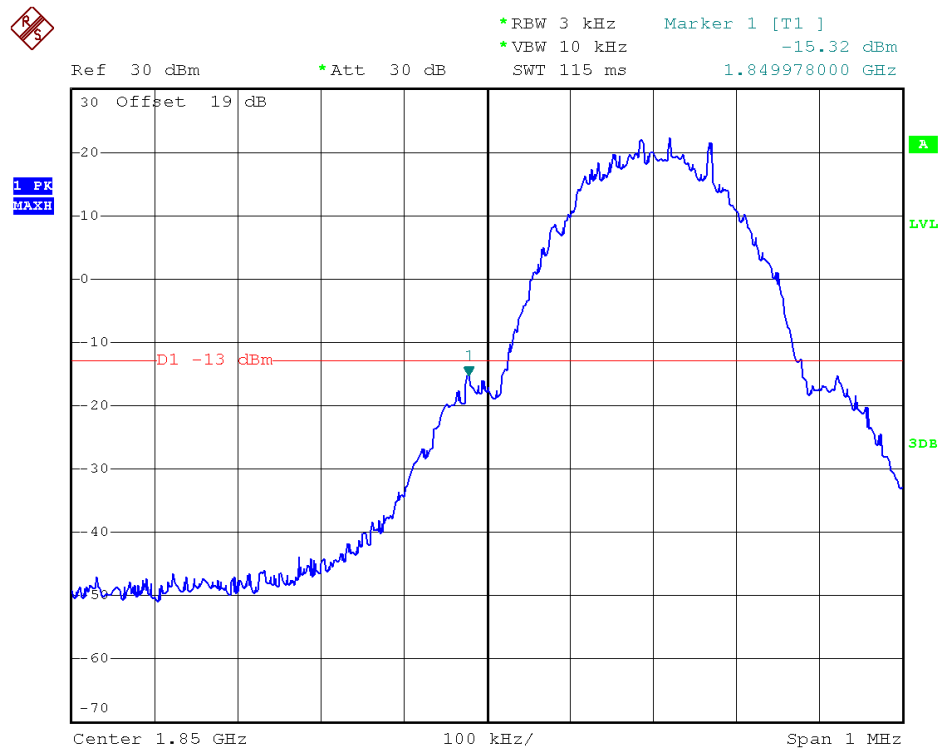


(Plot G: EDGE 1900 Channel = 512)




(Plot H: EDGE 1900 Channel = 810)

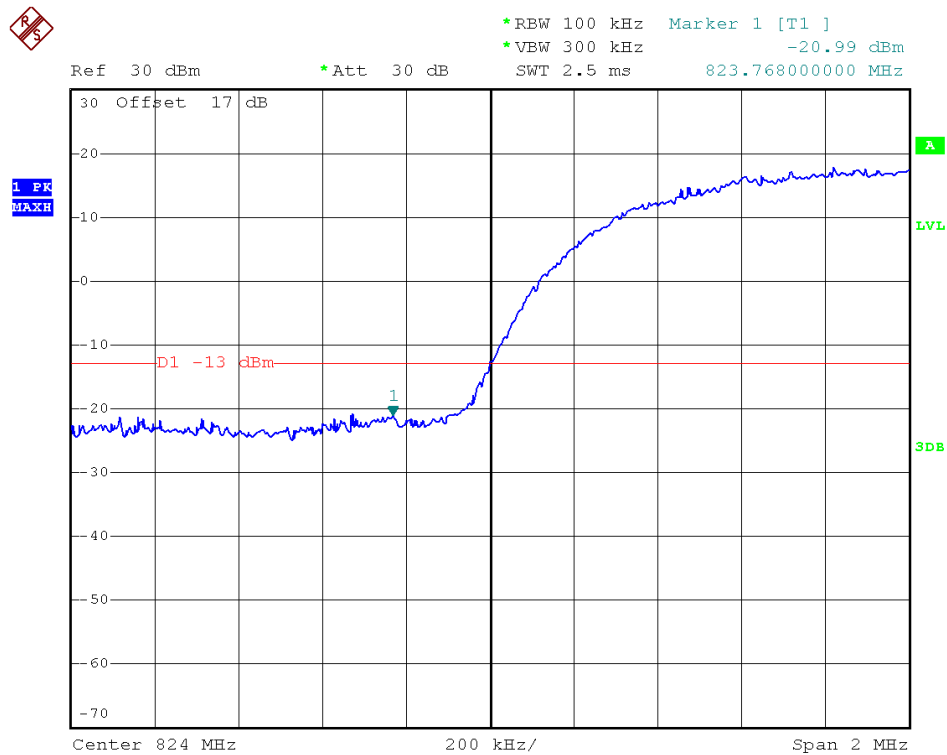


(Plot I: WCDMA 850 Channel = 4132)

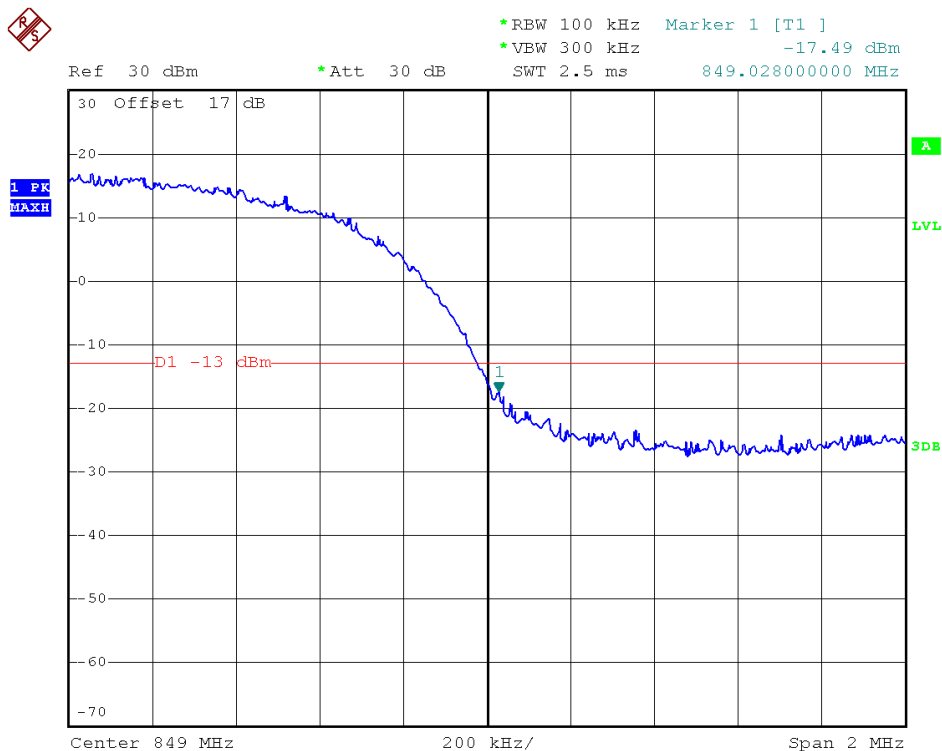


(Plot J: WCDMA 850 Channel = 4233)

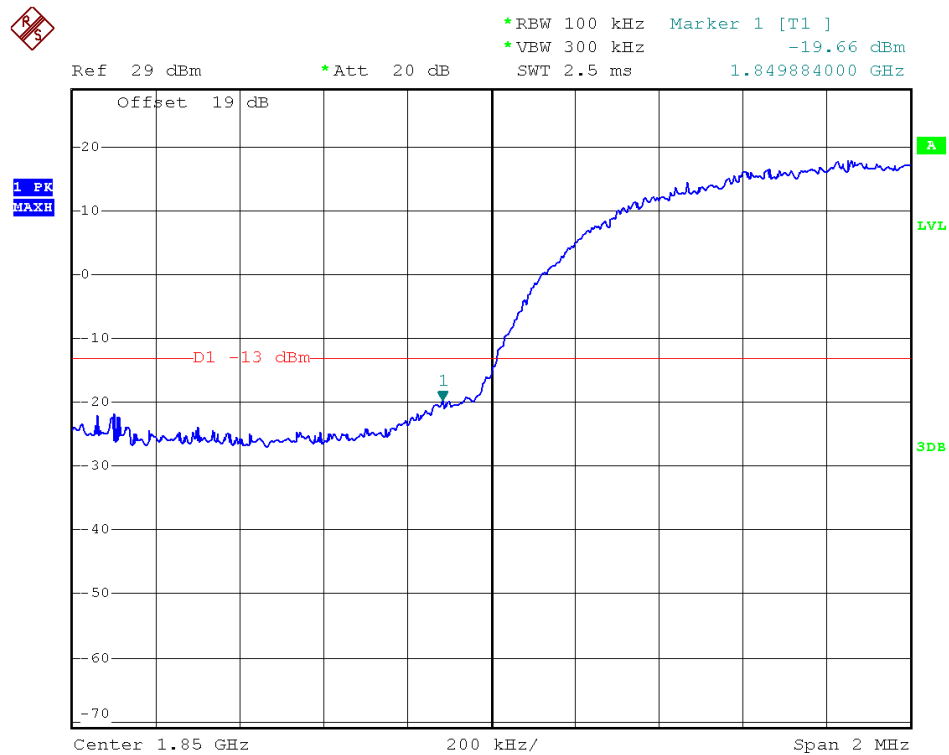


(Plot K: WCDMA 1900 Channel = 9262)

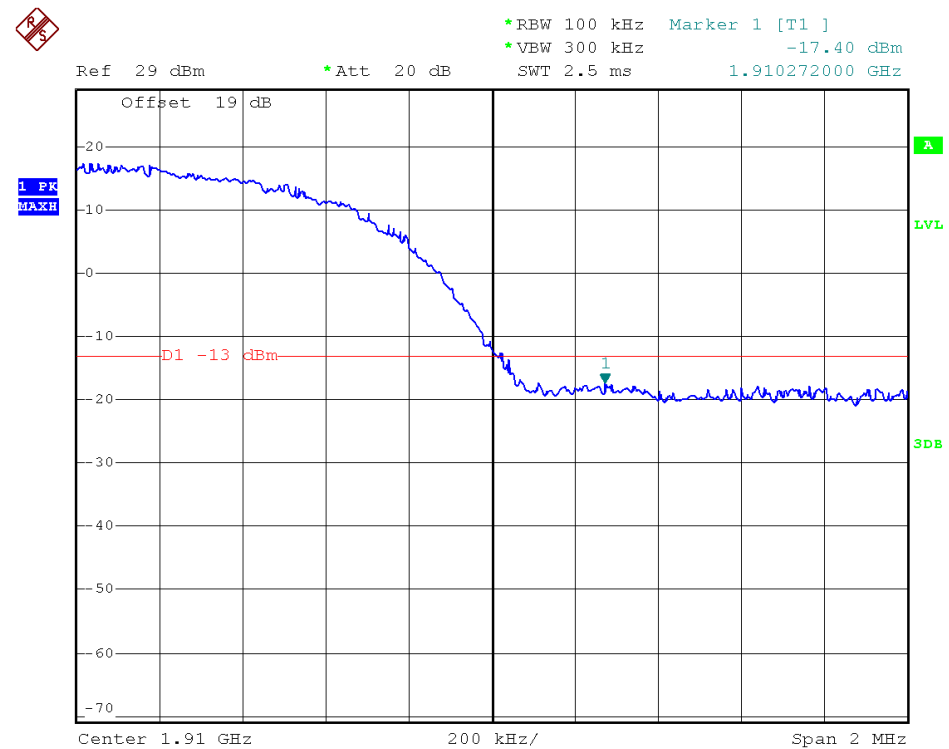


(Plot L: WCDMA 1900 Channel = 9538)

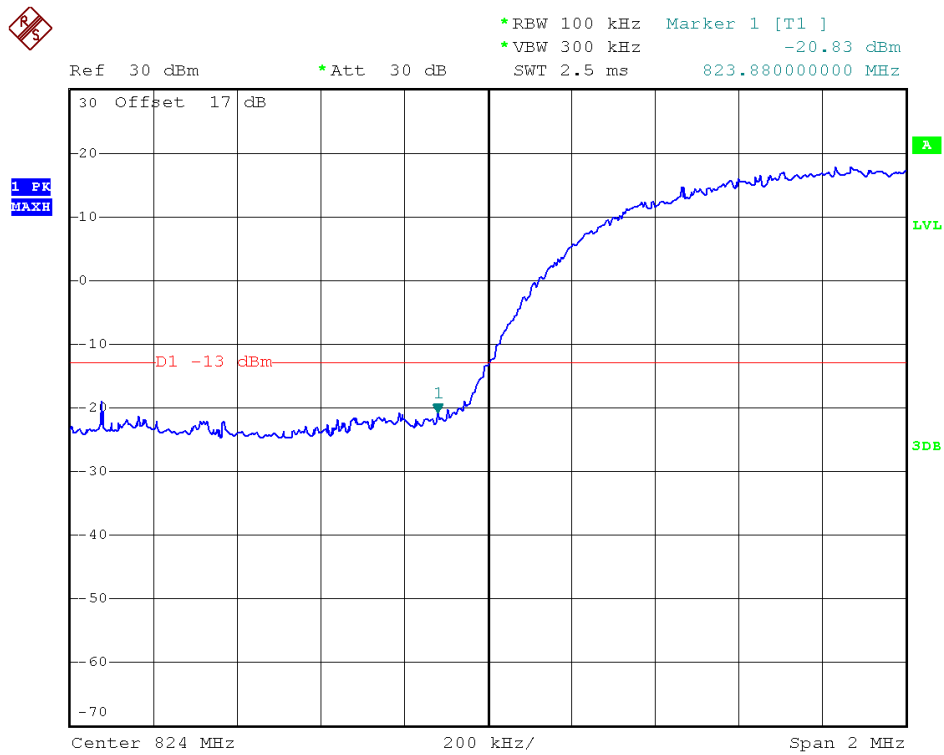


(Plot M: HSDPA 850 Channel = 4132)

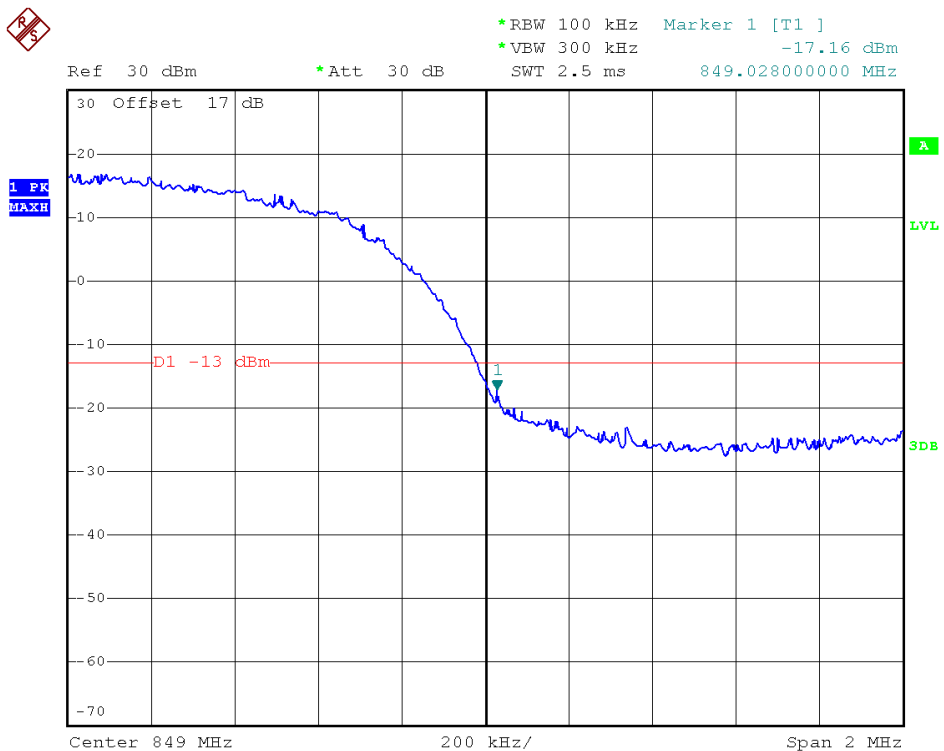

(Plot N: HSDPA850 Channel = 4233)

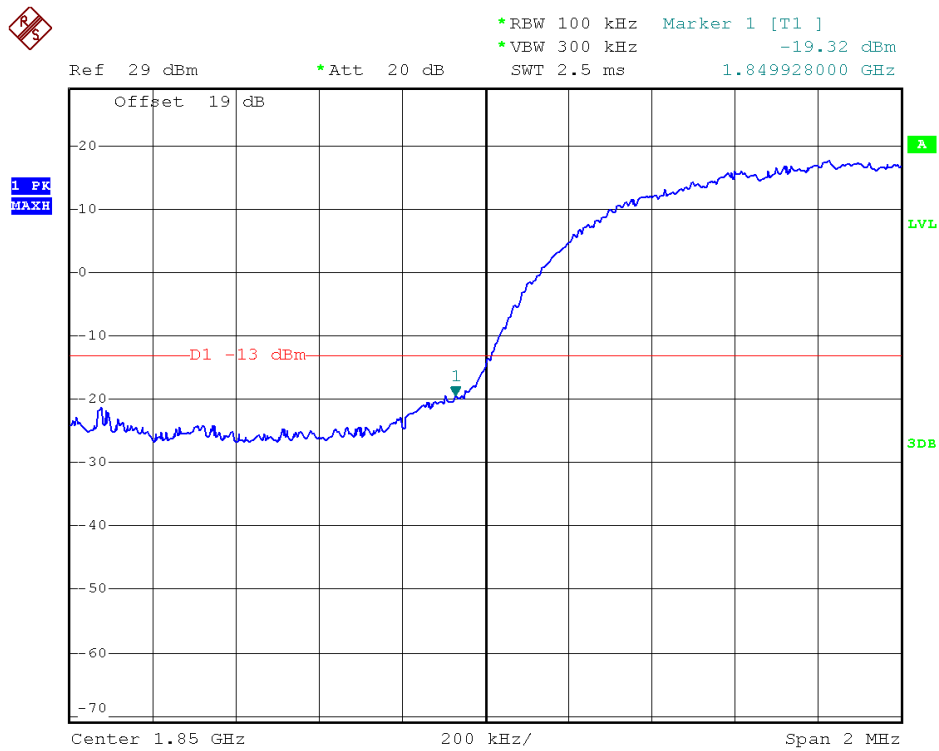

(Plot O: HSDPA 1900 Channel = 9262)

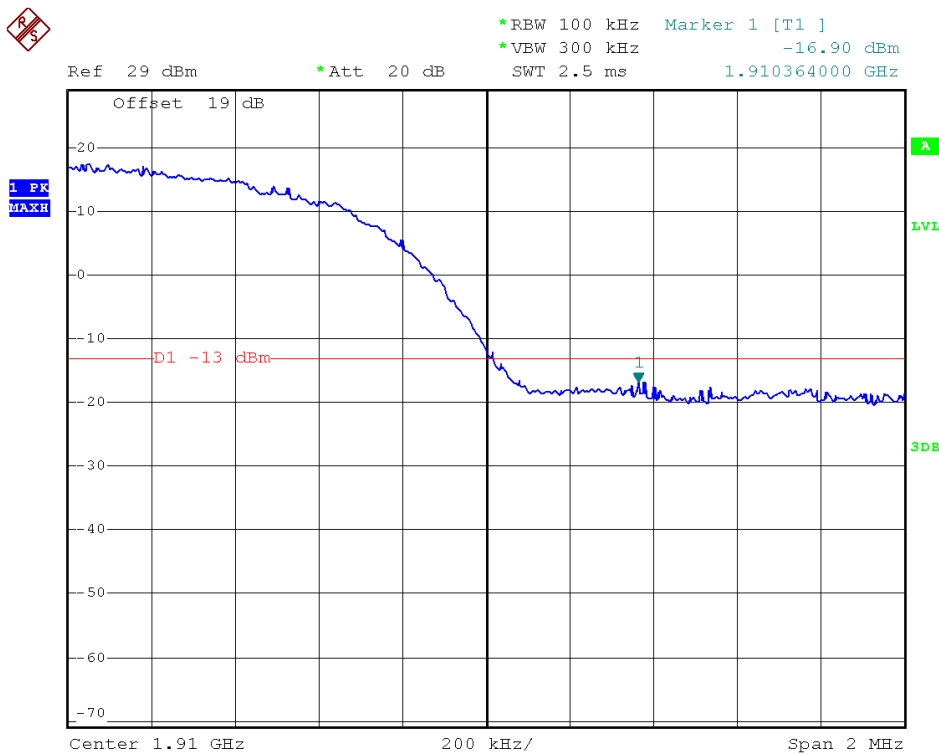

(Plot P: HSDPA 1900 Channel = 9538)


2.7 Transmitter Radiated Power (EIRP/ERP)

2.7.1 Requirement

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts, and FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power.

2.7.2 Test Description

1. Test Setup:

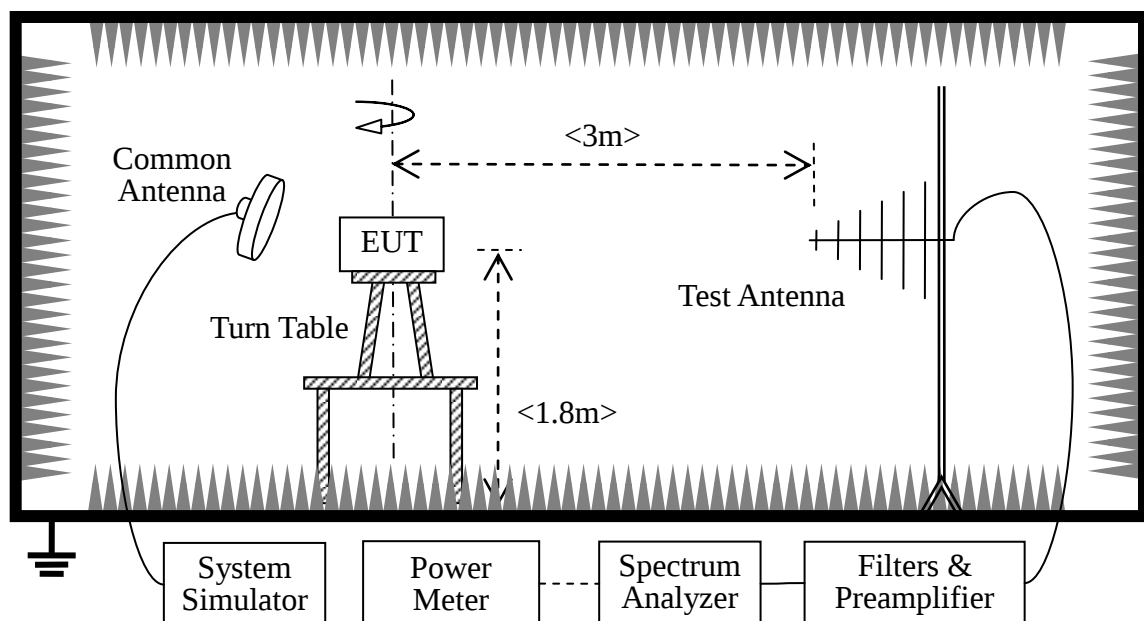

The EUT, which is powered by the Battery charged with the AC Adapter, is located in a 3m Full-Anechoic Chamber; the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. GSM850MHz band Power Control Level (PCL) = 5/19 and Power Class = 4, GSM1900MHz band Power Control Level (PCL) = 0/15 and Power Class = 1), and only the test result of the maximum output power was recorded.

- GSM Maximum RF output power: GSM 850 31.78dBm, GSM 1900 29.06dBm, WCDMA 850 22.78dBm, WCDMA 1900 22.68 dBm, Please refer to section 2.1.3 of this report.

- Step size (dB): 3dB

- Minimum RF power: GSM 850 3.1dBm, GSM 1900 0.3dBm, WCDMA 850 0.39dBm, WCDMA 1900 0.5dBm.

The Test Antenna is a Bi-Log one (used for 30MHz to 1GHz) or a Horn one (used for above 3GHz), and it's located at the same height as the EUT. The Filters consists of Notch Filters and High Pass Filter.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.06.10
Power Meter	Agilent	E4418B	GB43318055	2014.06.10
Full-Anechoic Chamber	Albatross~ Projects	12.8m*6.8m* 6.4m	A0412372	2014.01.14
Double ridge horn antenna	R&S	HF906	A0304225	2014.06.07
Ultra-wideband antenna	R&S	HL562	A0304224	2014.06.05
Loop antenna	R&S	HFH2-Z2	A0304226	2014.06.05

2.7.3 Test Result

The Turn Table is actuated to turn from 0 ° to 360 °, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST_TX}} - P_{\text{SUBST_RX}} - L_{\text{SUBST_CABLES}} + G_{\text{SUBST_TX_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

$P_{\text{SUBST_TX}}$ is signal generator level,

$P_{\text{SUBST_RX}}$ is receiver level,

$L_{\text{SUBST_CABLES}}$ is cable losses including TX cable,

$G_{\text{SUBST_TX_ANT}}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction

During the test, the data of A_{TOT} was added in the Test Spectrum Analyze, so Spectrum Analyze reading is the final values which contain the data of A_{TOT} .

1. GSM Model Test Verdict:

Band	Channel	Frequency (MHz)	PCL	Measured ERP			Limit		Verdict
				dBm	W	Refer to Plot	dBm	W	
GSM 850MHz	128	824.20	5	32.02	1.592	Plot A	38.5	7	PASS
	190	836.60	5	32.38	1.730				PASS
	251	848.80	5	32.35	1.718				PASS
GPRS 850MHz	128	824.20	5	31.59	1.442	Plot B ^{Note 1}	38.5	7	PASS
	190	836.60	5	31.27	1.340				PASS
	251	848.80	5	31.38	1.374				PASS
EDGE 850MHz	128	824.20	5	30.89	1.227	Plot C ^{Note 1}	38.5	7	PASS
	190	836.60	5	30.99	1.256				PASS
	251	848.80	5	31.04	1.271				PASS


Band	Channel	Frequency (MHz)	PCL	Measured EIRP			Limit		Verdict
				dBm	W	Refer to Plot	dBm	W	
GSM 1900MHz	512	1850.2	0	29.32	0.855	Plot D	33	2	PASS
	661	1880.0	0	29.30	0.851				PASS
	810	1909.8	0	29.35	0.861				PASS
GPRS 1900MHz	512	1850.2	0	29.12	0.817	Plot E ^{Note 1}	33	2	PASS
	661	1880.0	0	29.10	0.813				PASS
	810	1909.8	0	28.75	0.750				PASS
EDGE 1900MHz	512	1850.2	0	28.18	0.658	Plot F ^{Note 1}	33	2	PASS
	661	1880.0	0	28.08	0.643				PASS
	810	1909.8	0	28.34	0.682				PASS
Note 1:	For the GPRS and EDGE model, all the slots were tested and just the worst data was record in this report.								

2. WCDMA Model Test Verdict:


Band	Channel	Frequency (MHz)	Measured ERP			Limit		Verdict
			dBm	W	Refer to Plot	dBm	W	
WCDMA 850MHz	4132	826.4	27.39	0.548	Plot G	38.5	7	PASS
	4175	836.6	27.20	0.525				PASS
	4233	846.6	27.25	0.531				PASS
HSDPA 850MHz	4132	826.4	26.07	0.405	Plot H	38.5	7	PASS
	4175	836.6	26.41	0.438				PASS
	4233	846.6	26.47	0.444				PASS

Band	Channel	Frequency (MHz)	Measured EIRP			Limit		Verdict
			dBm	W		dBm	W	
WCDMA 1900MHz	9262	1852.4	26.29	0.426	Plot I	33	2	PASS
	9400	1880	26.32	0.429				PASS
	9538	1907.6	26.32	0.429				PASS
HSDPA 1900MHz	9262	1852.4	26.26	0.423	Plot J	33	2	PASS
	9400	1880	26.14	0.411				PASS
	9538	1907.6	26.26	0.422				PASS


3. Test Plots:

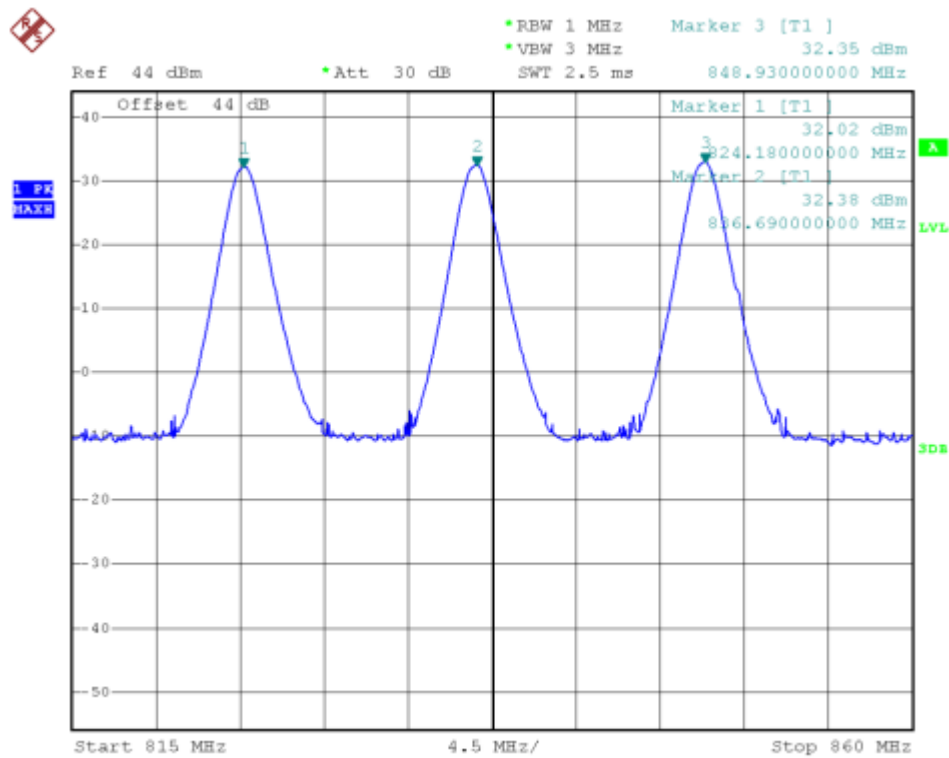


(Plot A: GSM 850MHz Channel = 128, 190, 251)

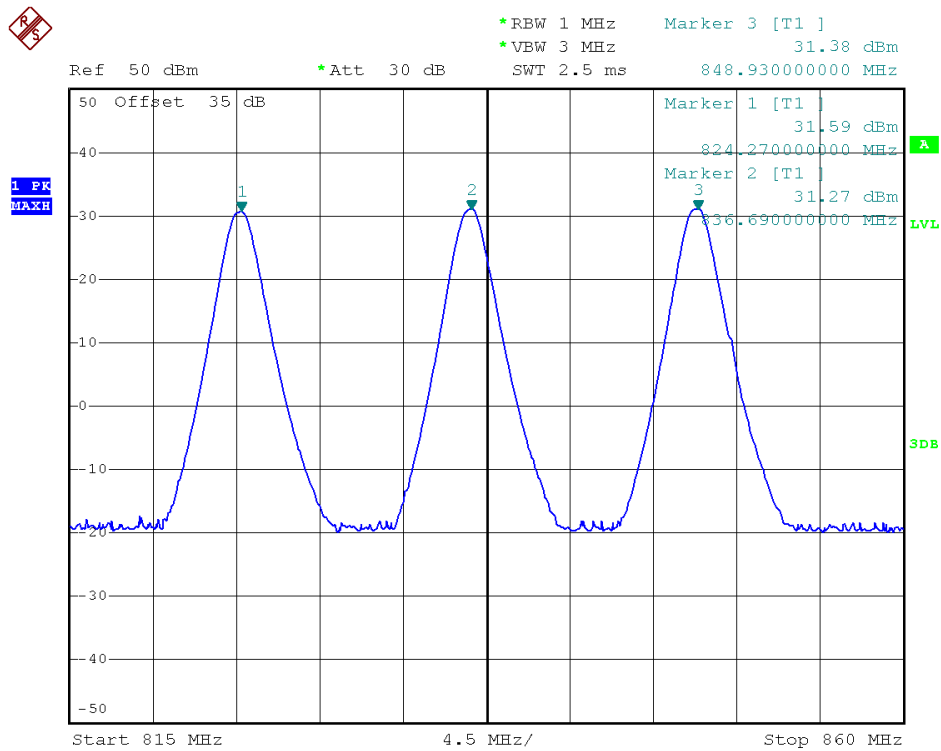


(Plot B: GPRS 850MHz Channel = 128, 190, 251)

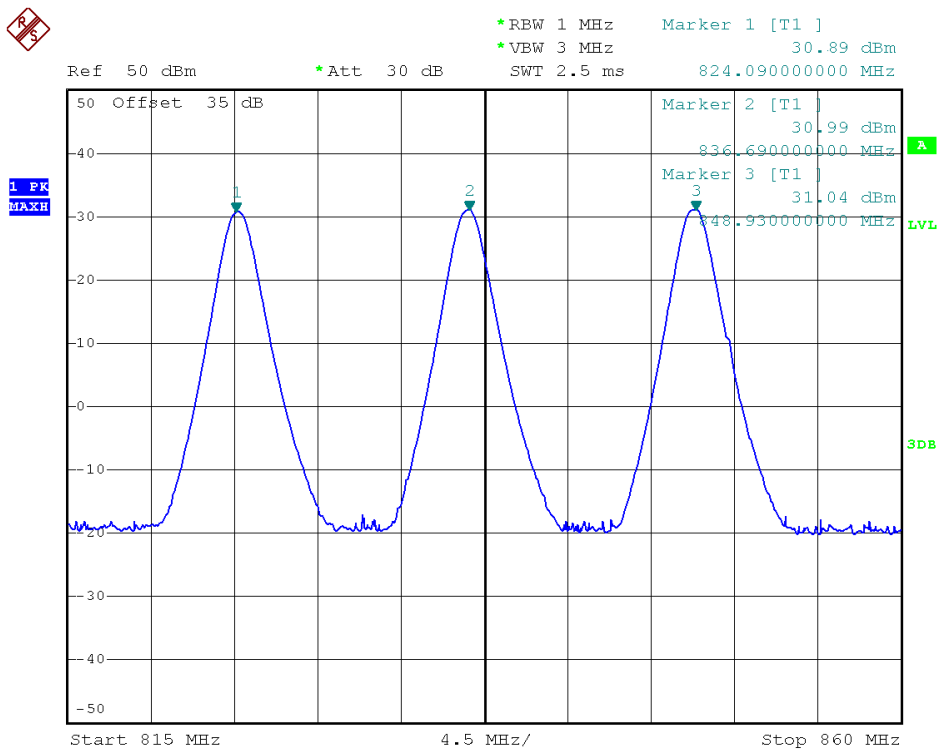


(Plot C: EDGE 850MHz Channel = 128, 190, 251)

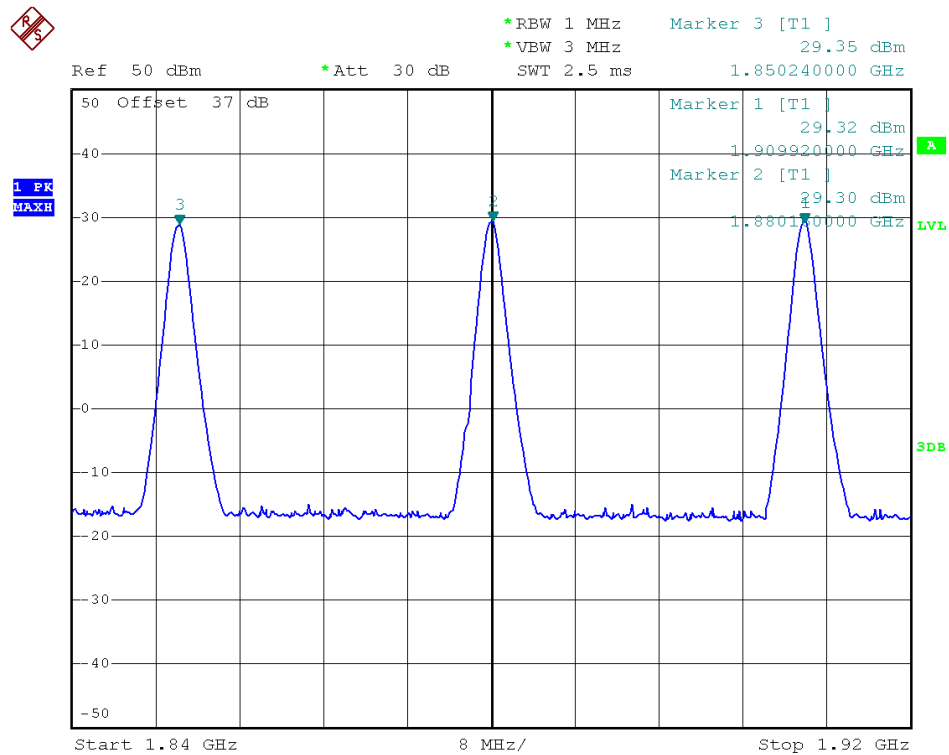


(Plot D: GSM1900MHz Channel = 512, 661, 810)

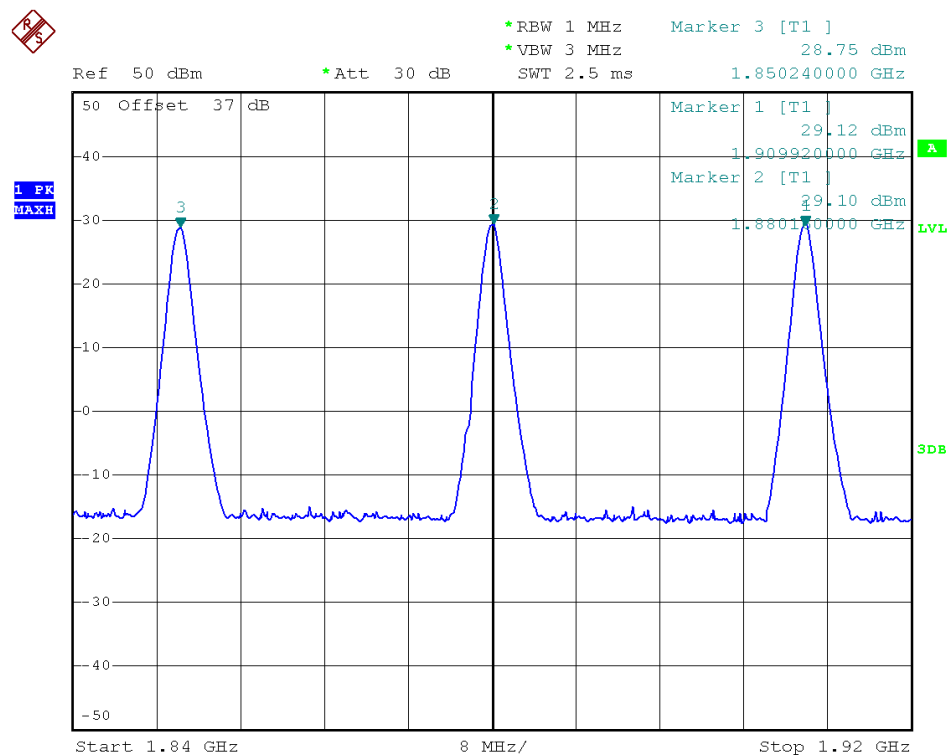


(Plot E: GPRS 1900MHz Channel = 512, 661, 810)

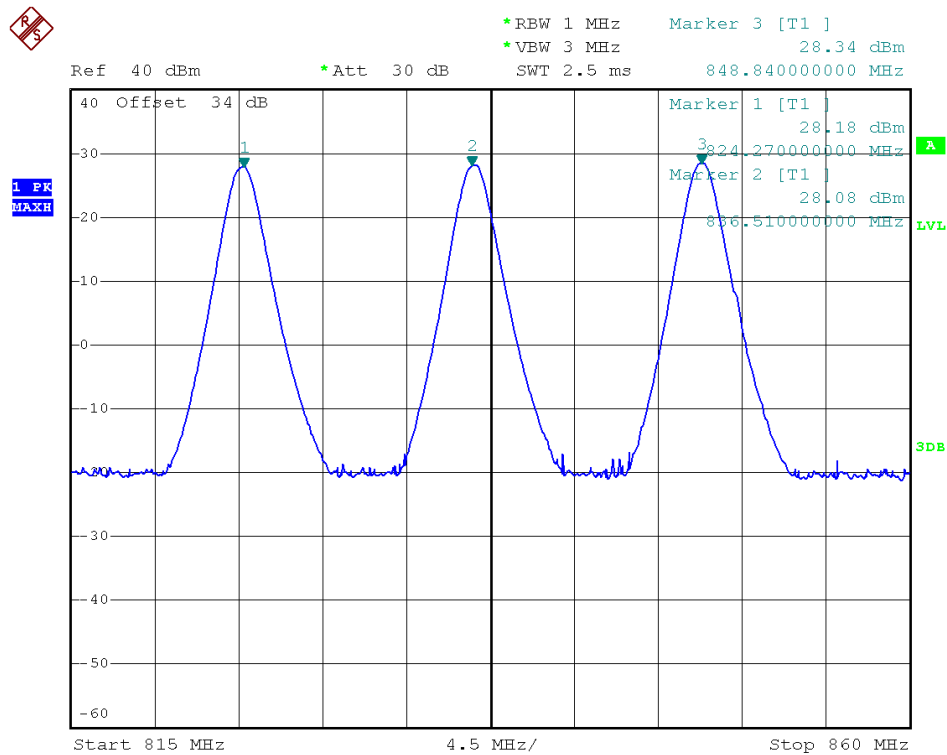


(Plot F: EDGE 1900MHz Channel = 512, 661, 810)

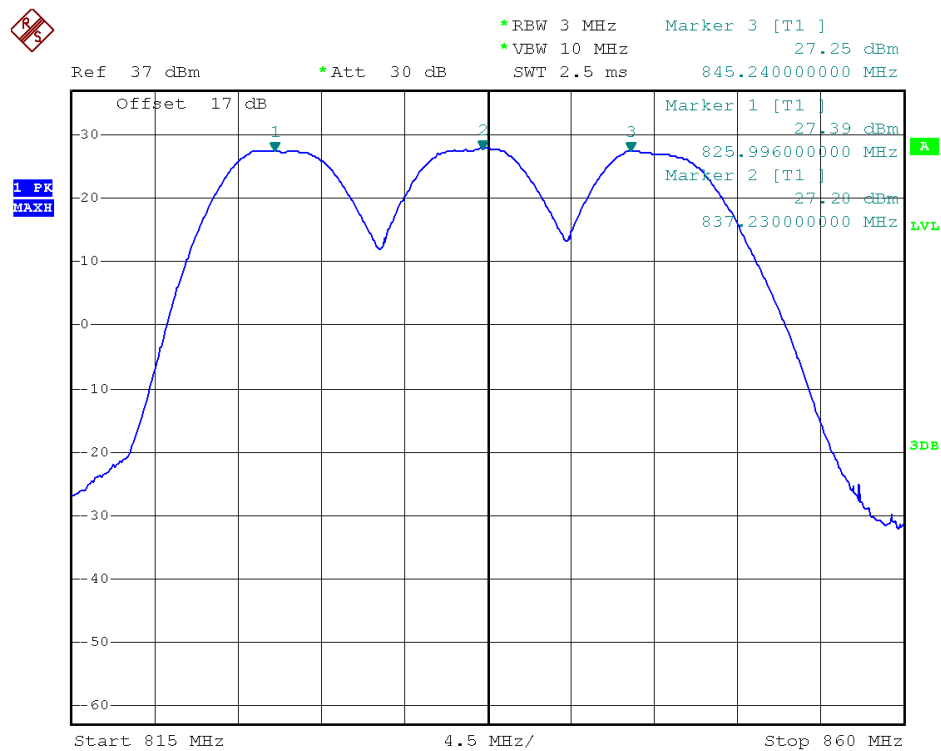


(Plot G: WCDMA 850 MHz Channel = 4132, 4175, 4233)

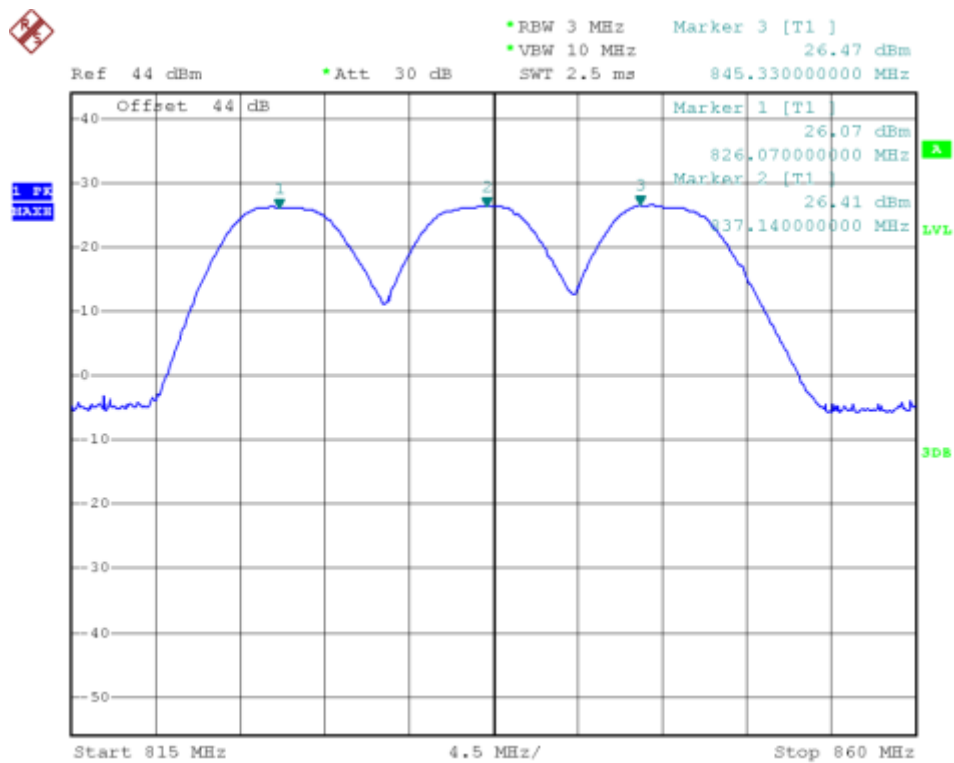

(Plot H: HSDPA 850 MHz Channel = 4132, 4175, 4233)

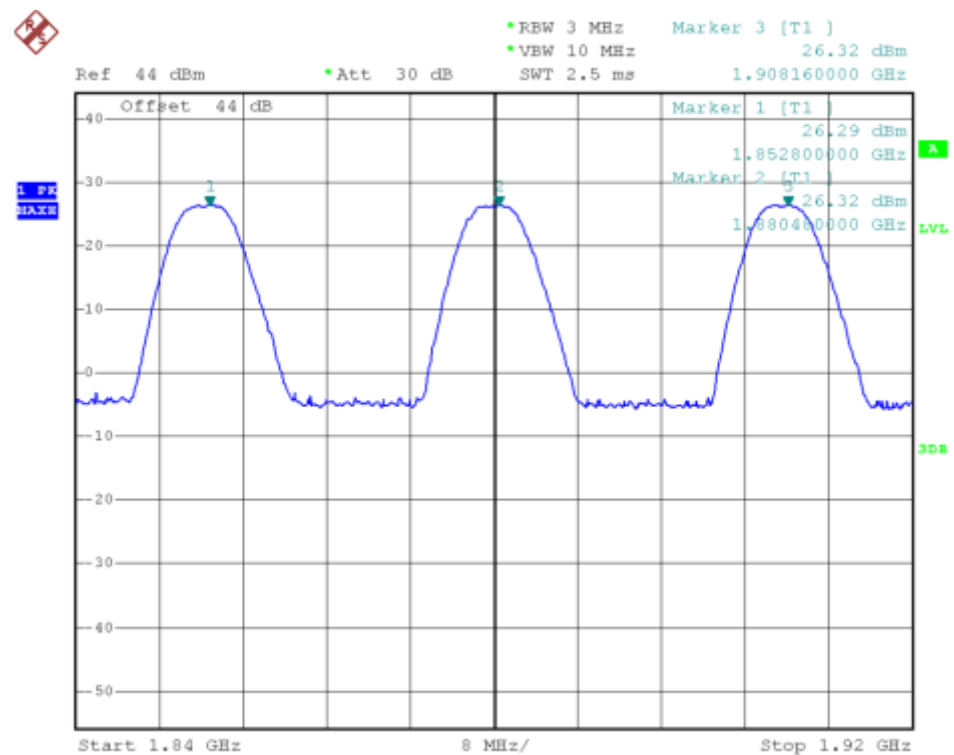

(Plot I: WCDMA 1900 MHz Channel = 9262, 9400, 9538)

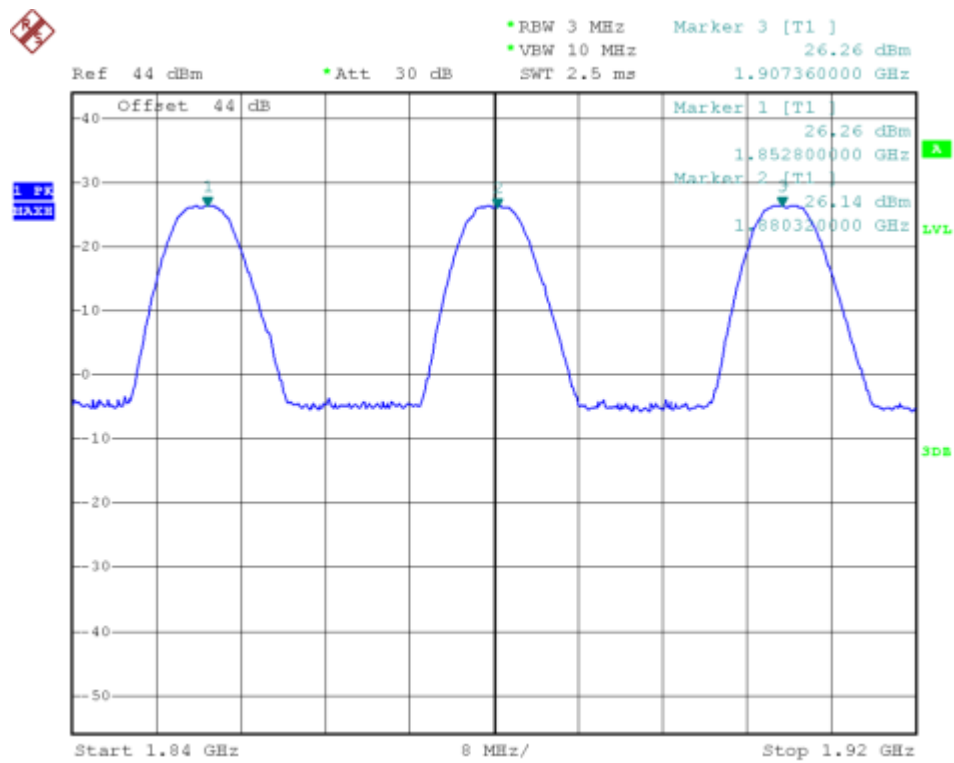

(Plot J: HSDPA1900 MHz Channel = 9262, 9400, 9538)

2.8 Radiated Out of Band Emissions

2.8.1 Requirement

According to FCC section 22.917(a) and section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.8.2 Test Description

See section 2.7.2 of this report.

Equipment List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.06.10
Power Meter	Agilent	E4418B	GB43318055	2014.06.10
Full-Anechoic Chamber	Albatross~ Projects	12.8m*6.8m* 6.4m	A0412372	2014.01.14
Double ridge horn antenna	R&S	HF906	A0304225	2014.06.07
Ultra-wideband antenna	R&S	HL562	A0304224	2014.06.05
Loop antenna	R&S	HFH2-Z2	A0304226	2014.06.05

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.8.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0 ° to 360 °, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.



1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
			Test Antenna Horizontal	Test Antenna Vertical			
GSM 850MHz	128	824.2	< -25	< -25	Plot A.1/A.2	-13	PASS
	190	836.6	< -25	< -25	Plot A.3/A.4		PASS
	251	848.8	< -25	< -25	Plot A.5/A.6		PASS
GSM 1900MHz	512	1850.2	< -25	< -25	Plot B.1/B.2	-13	PASS
	661	1880.0	< -25	< -25	Plot B.3/B.4		PASS
	810	1909.8	< -25	< -25	Plot B.5/B.6		PASS
GPRS 850MHz	128	824.2	< -25	< -25	Plot C.1/C.2	-13	PASS
	190	836.6	< -25	< -25	Plot C.3/C.4		PASS
	251	848.8	< -25	< -25	Plot C.5/C.6		PASS
GPRS 1900MHz	512	1850.2	< -25	< -25	Plot D.1/D.2	-13	PASS
	661	1880.0	< -25	< -25	Plot D.3/D.4		PASS
	810	1909.8	< -25	< -25	Plot D.5/D.6		PASS
EDGE 850MHz	128	824.2	< -25	< -25	Plot E.1/E.2	-13	PASS
	190	836.6	< -25	< -25	Plot E.3/E.4		PASS
	251	848.8	< -25	< -25	Plot E.5/E.6		PASS
EDGE 1900MHz	512	1850.2	< -25	< -25	Plot F.1/F.2	-13	PASS
	661	1880.0	< -25	< -25	Plot F.3/F.4		PASS
	810	1909.8	< -25	< -25	Plot F.5/F.6		PASS
WCDMA 850MHz	4132	826.4	< -25	< -25	Plot G.1/G.2	-13	PASS
	4183	836.6	< -25	< -25	Plot G.3/G.4		PASS
	4233	846.6	< -25	< -25	Plot G.5/G.6		PASS
WCDMA 1900MHz	9262	1852.4	< -25	< -25	Plot H.1/H.2	-13	PASS
	9400	1880.0	< -25	< -25	Plot H.3/H.4		PASS
	9538	1907.6	< -25	< -25	Plot H.5/H.6		PASS
HSDPA 850MHz	4132	826.4	< -25	< -25	Plot I.1/I.2	-13	PASS
	4183	836.6	< -25	< -25	Plot I.3/I.4		PASS
	4233	846.6	< -25	< -25	Plot I.5/I.6		PASS
HSDPA 1900MHz	9262	1852.4	< -25	< -25	Plot J.1/J.2	-13	PASS
	9400	1880	< -25	< -25	Plot J.3/J.4		PASS
	9538	1907.6	< -25	< -25	Plot J.5/J.6		PASS
HSUPA 850MHz	4132	826.4	< -25	< -25	Plot K.1/K.2	-13	PASS
	4183	836.6	< -25	< -25	Plot K.3/K.4		PASS
	4233	846.6	< -25	< -25	Plot K.5/K.6		PASS
HSUPA 1900MHz	9262	1852.4	< -25	< -25	Plot L.1/L.2	-13	PASS
	9400	1880.0	< -25	< -25	Plot L.3/L.4		PASS

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
			Test Antenna Horizontal	Test Antenna Vertical			
	9538	1907.6	< -25	< -25	Plot L.5/L.6		PASS


2. Test Plots for the Whole Measurement Frequency Range:

Note1: the power of the EUT transmitting frequency should be ignored.


Note2: All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

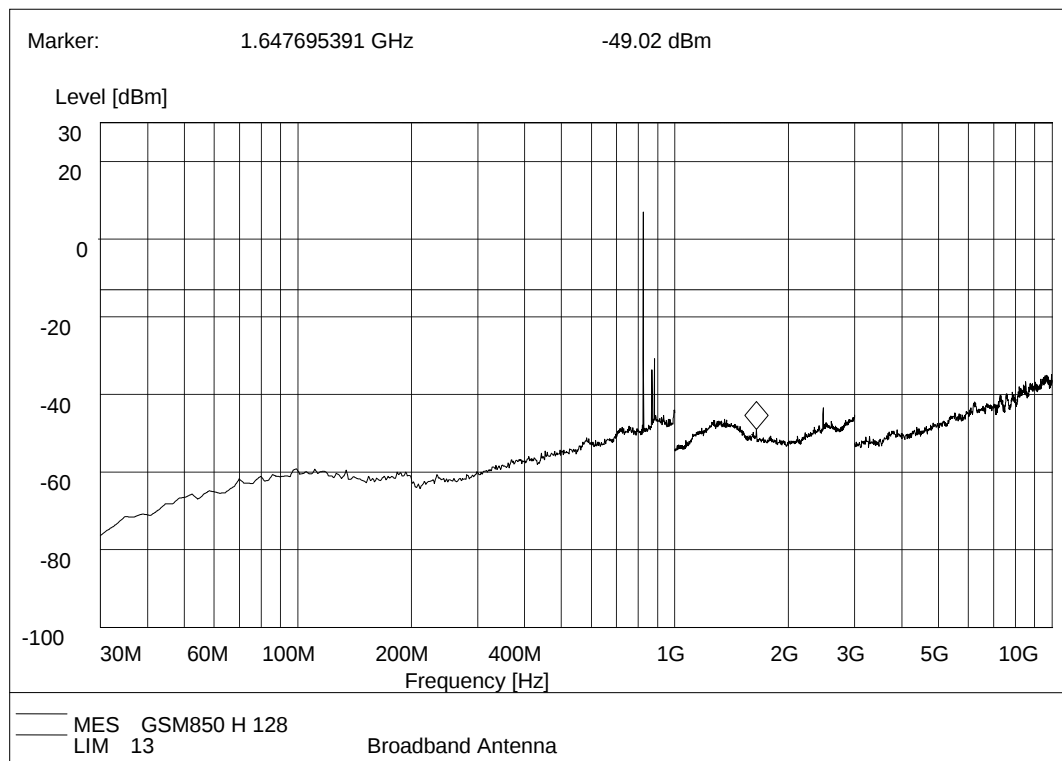


(Plot A.1: GSM 850MHz Channel = 128, Test Antenna Horizontal)

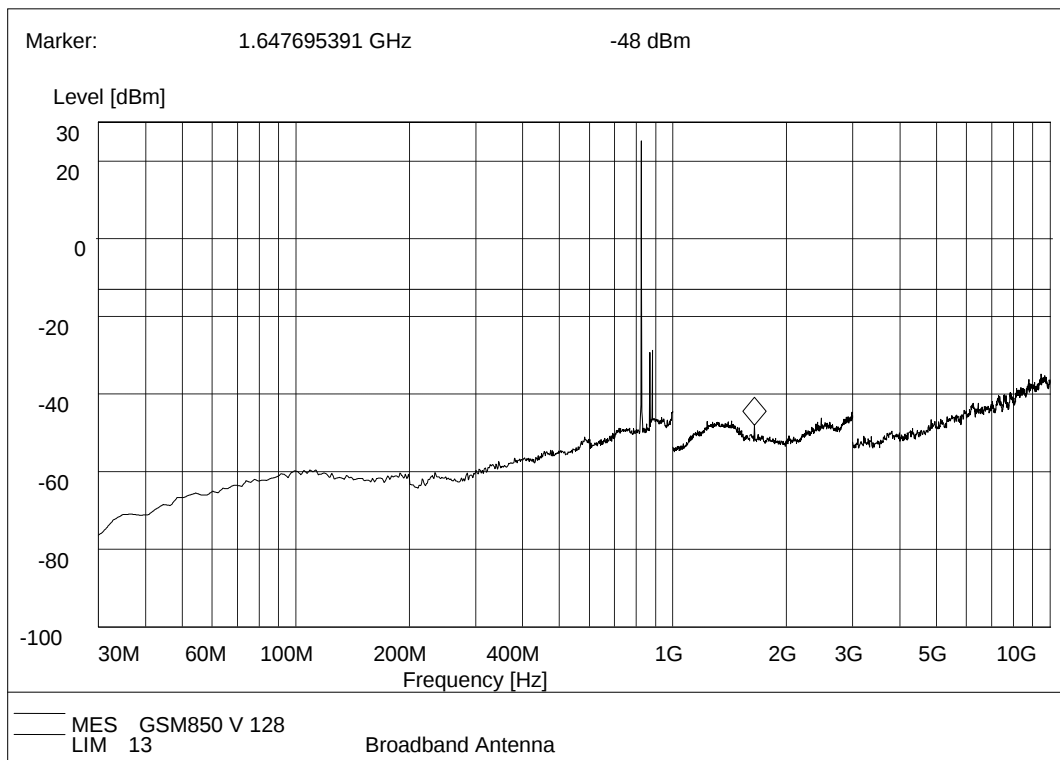


(Plot A.2: GSM 850MHz Channel = 128, Test Antenna Vertical)

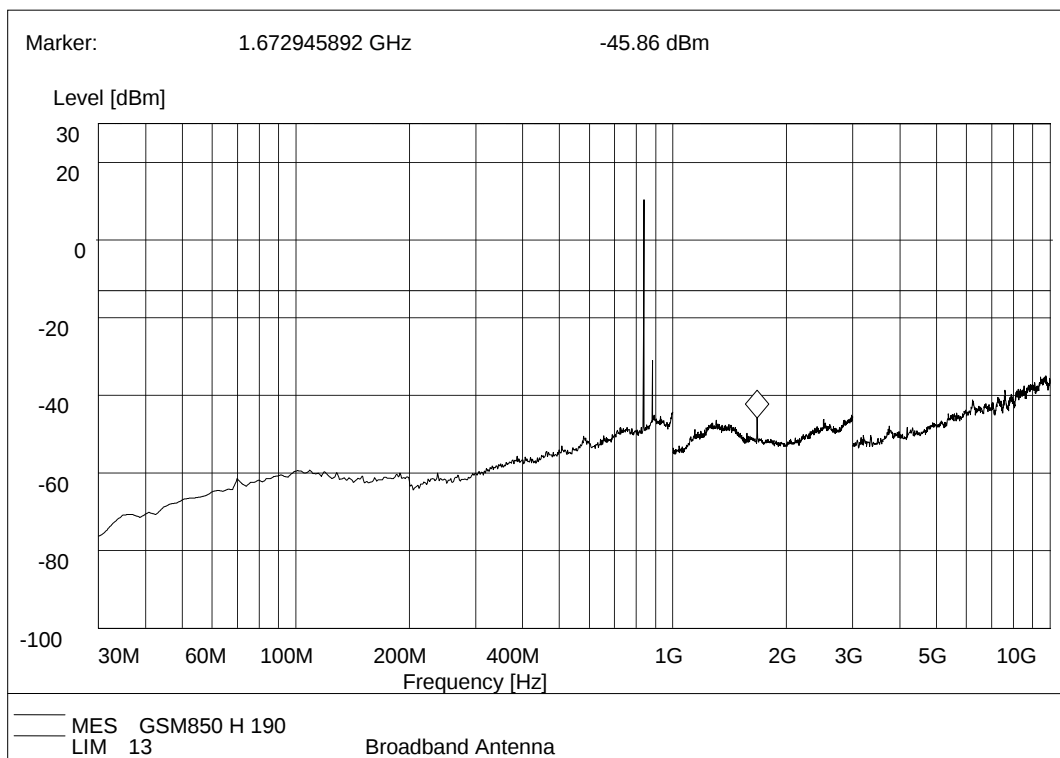


(Plot A.3: GSM 850MHz Channel = 190, Test Antenna Horizontal)

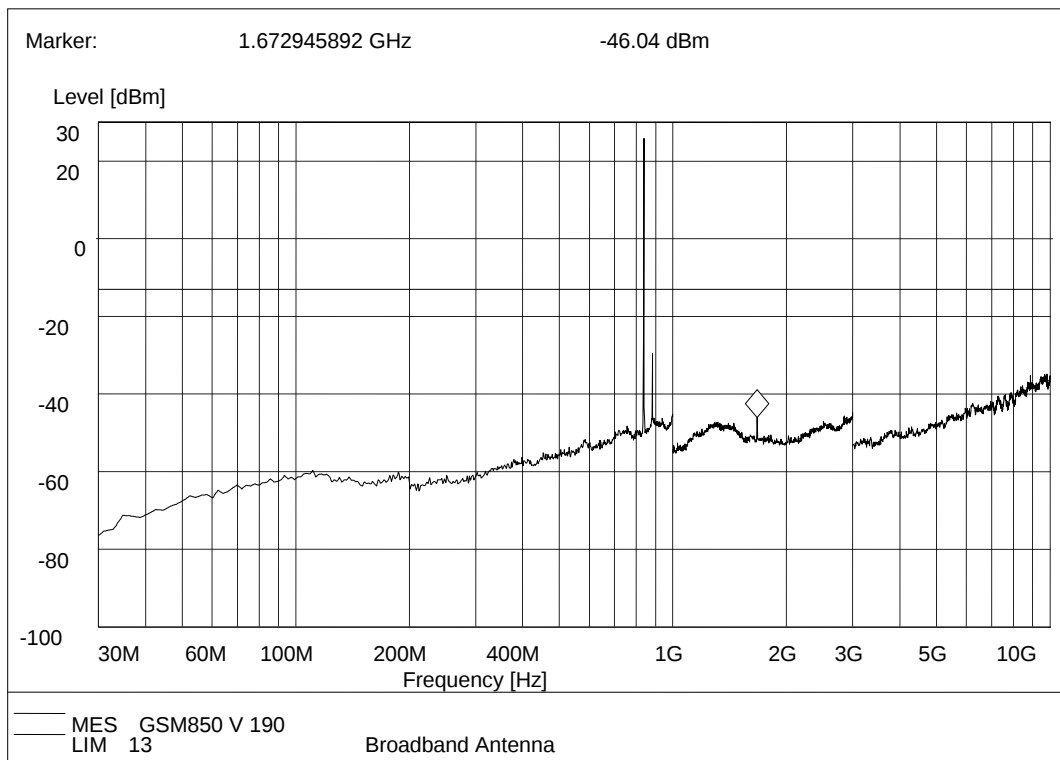


(Plot A.4: GSM 850MHz Channel = 190, Test Antenna Vertical)

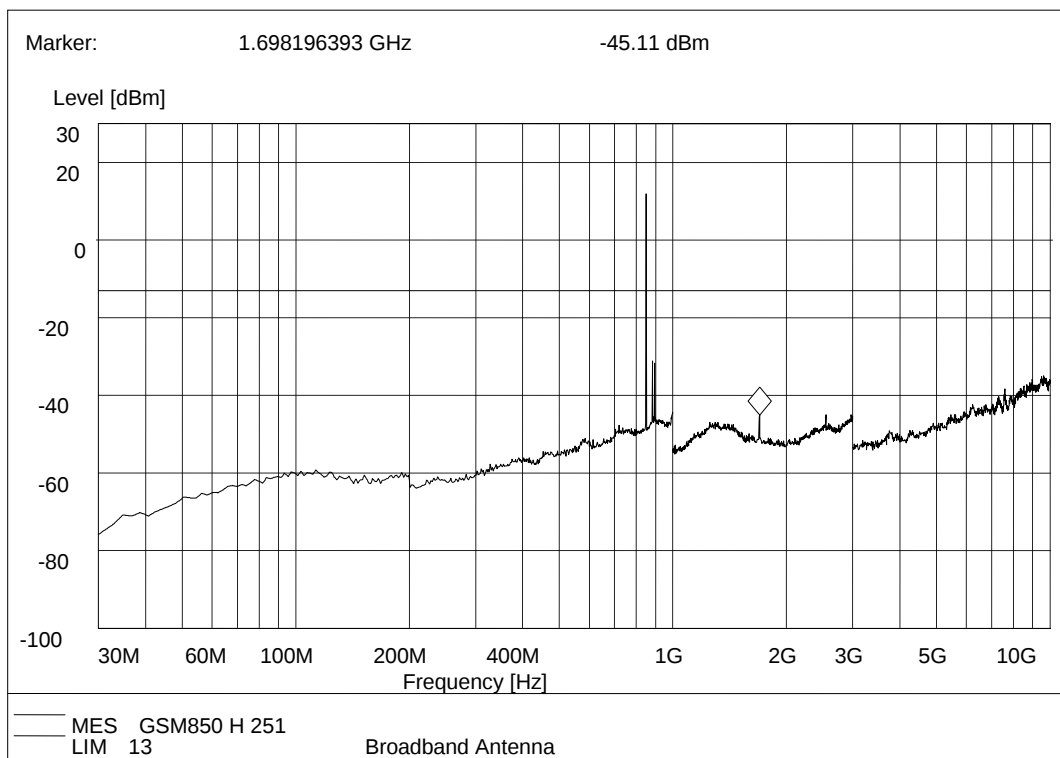


(Plot A.5: GSM 850MHz Channel = 251, Test Antenna Horizontal)

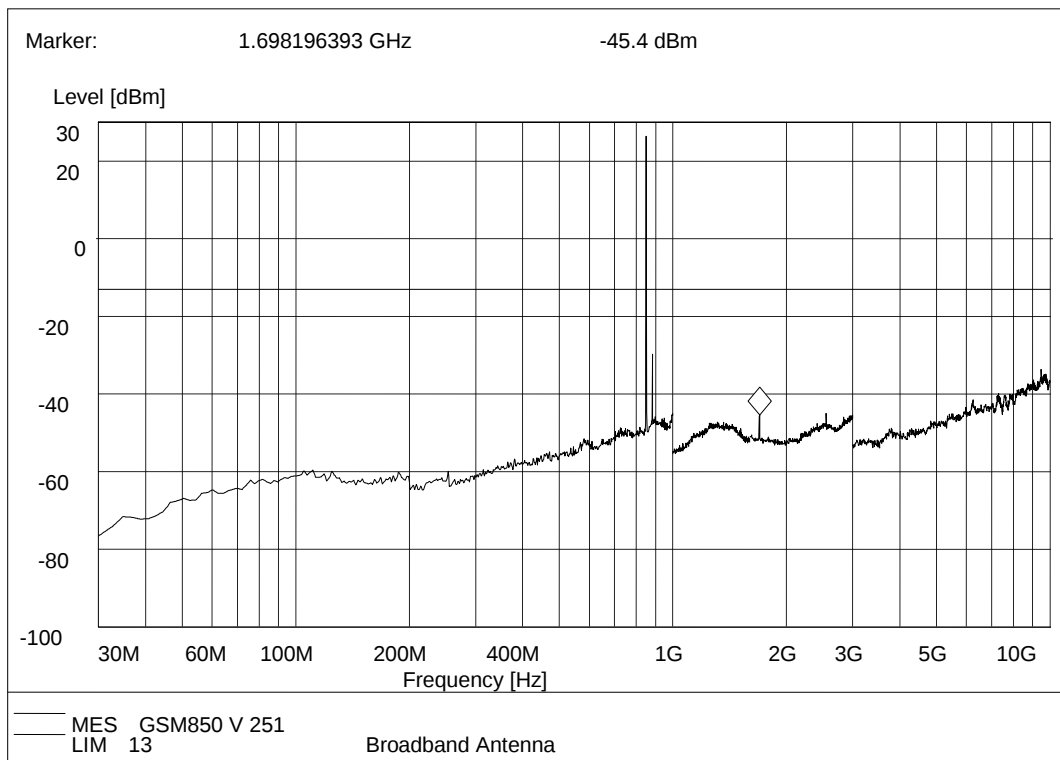


(Plot A.6: GSM 850MHz Channel = 251, Test Antenna Vertical)

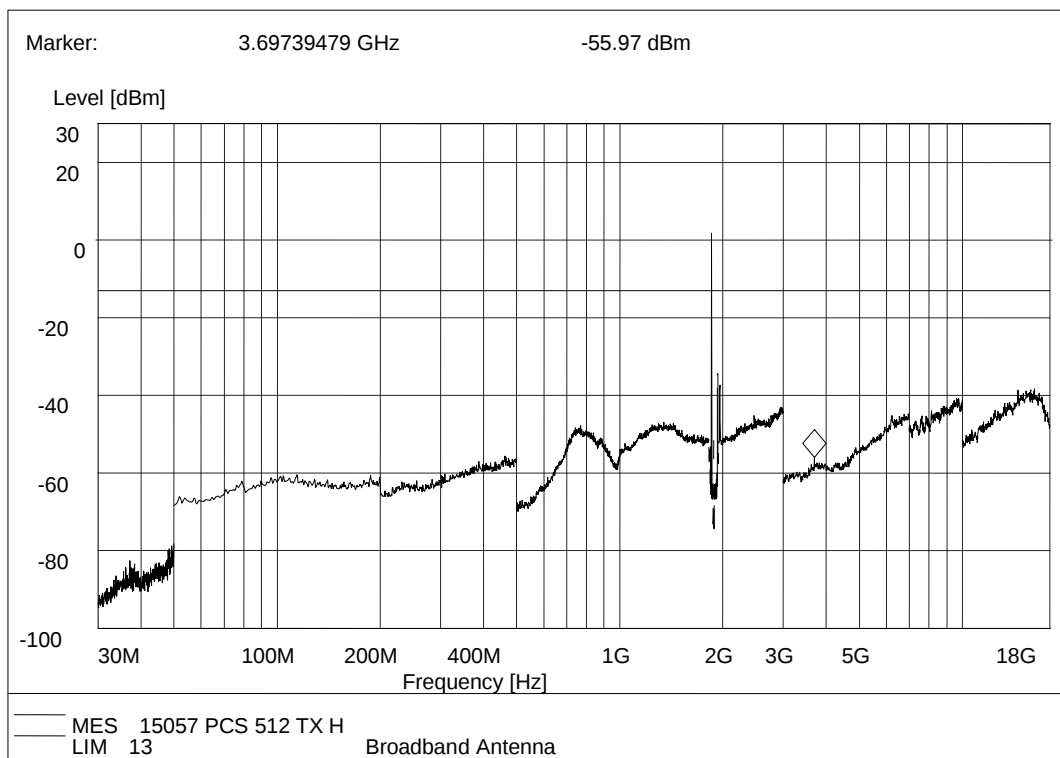


(Plot B.1: GSM 1900MHz Channel = 512, Test Antenna Horizontal)

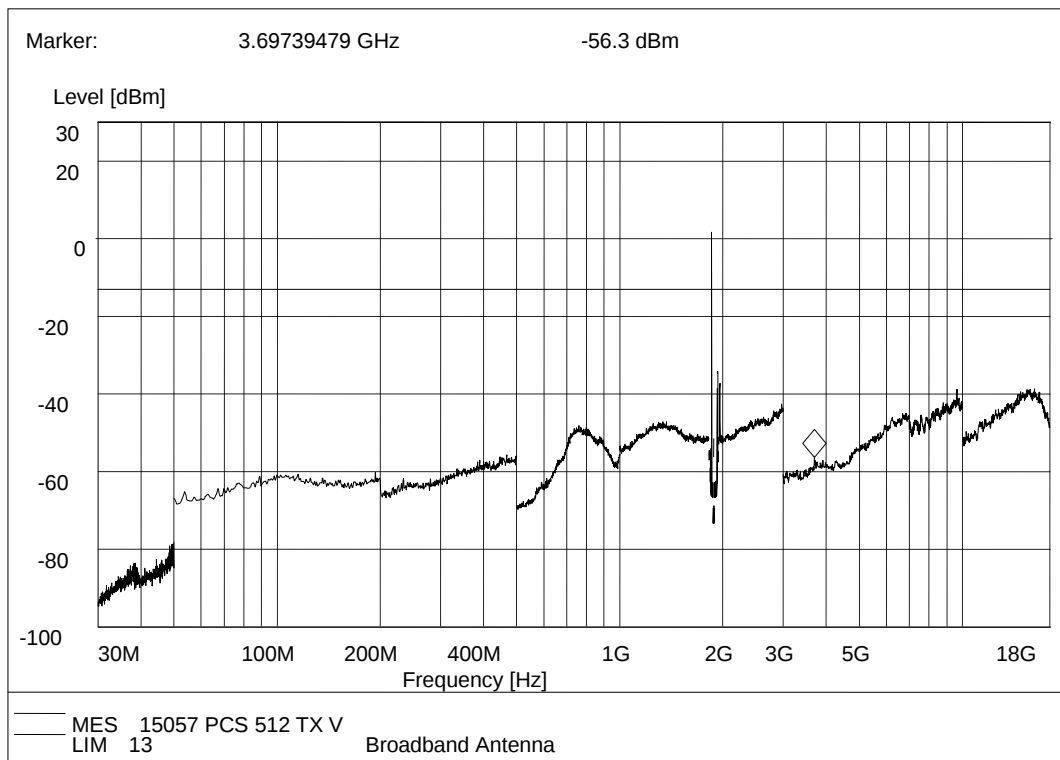


(Plot B.2: GSM 1900MHz Channel = 512, Test Antenna Vertical)

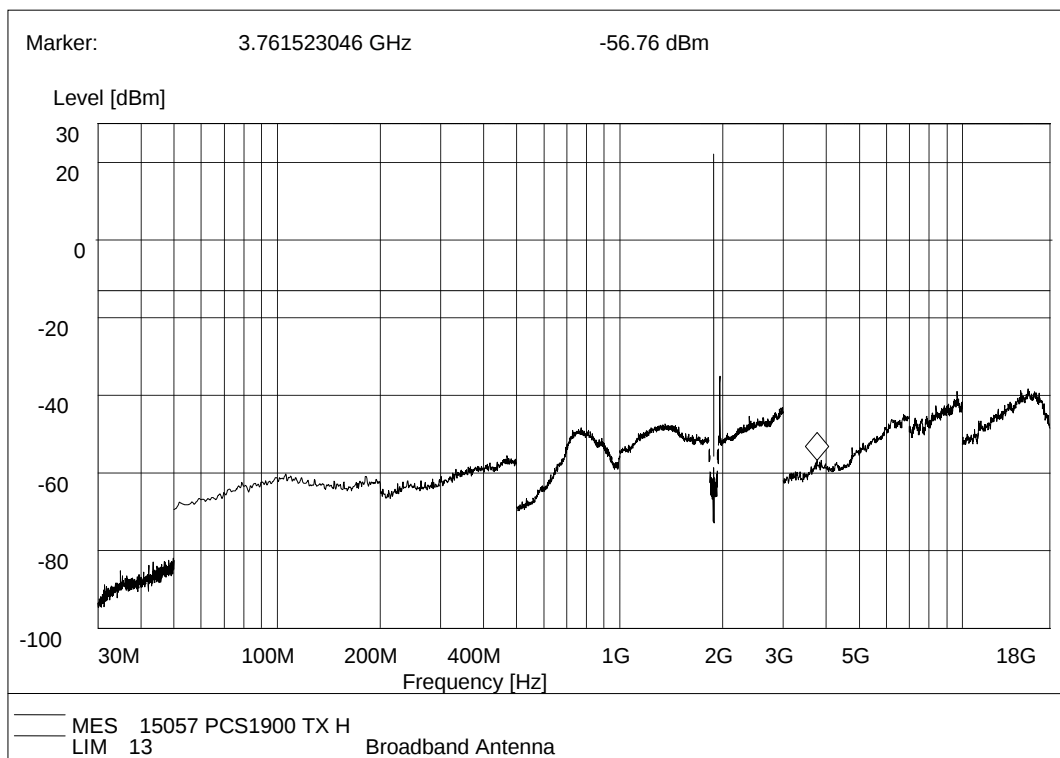


(Plot B.3: GSM 1900MHz Channel = 661, Test Antenna Horizontal)

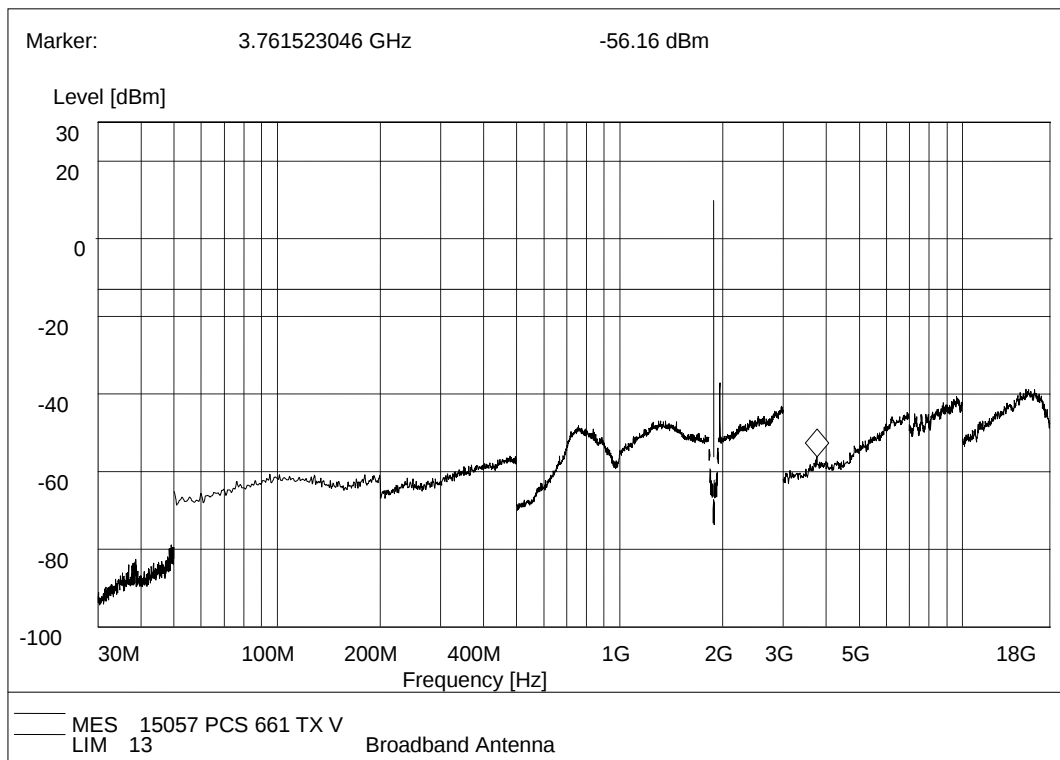


(Plot B.4: GSM 1900MHz Channel = 661, Test Antenna Vertical)

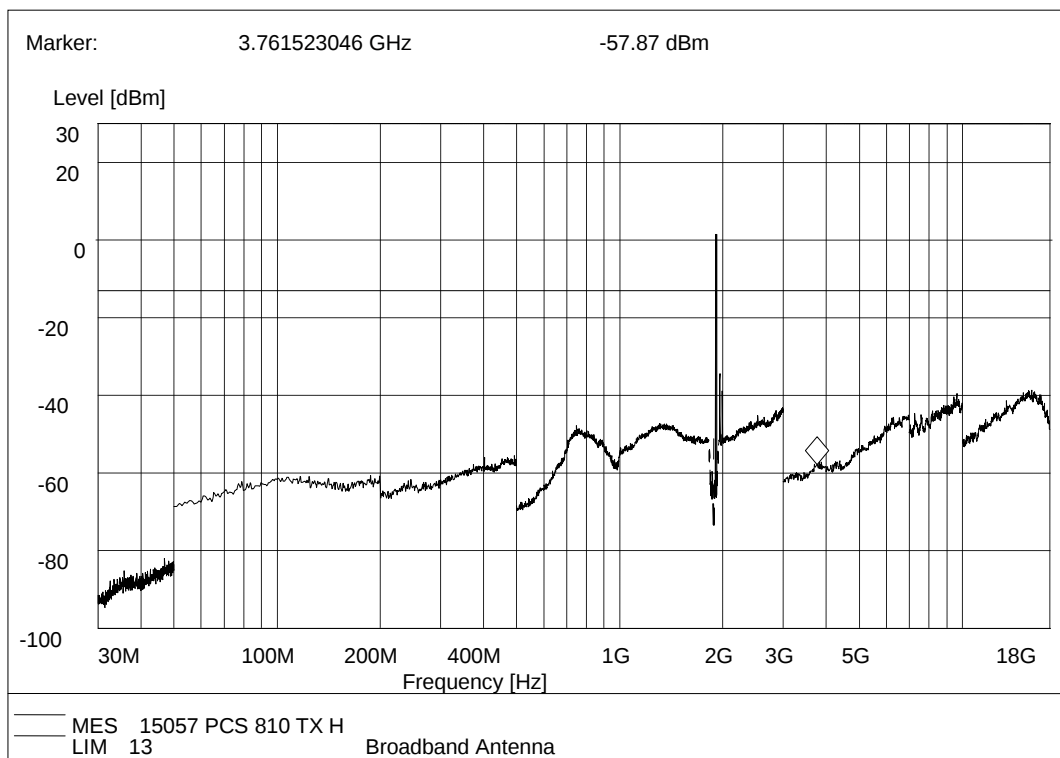


(Plot B.5: GSM 1900MHz Channel = 810, Test Antenna Horizontal)

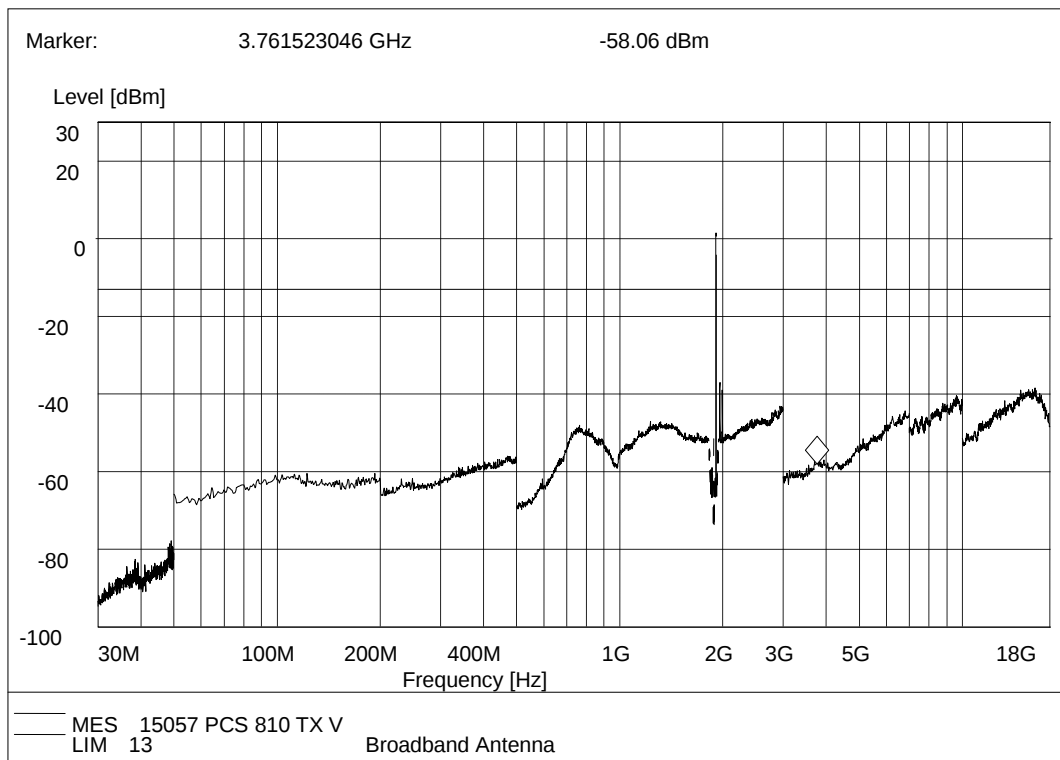


(PlotB.6: GSM 1900MHz Channel = 810, Test Antenna Vertical)

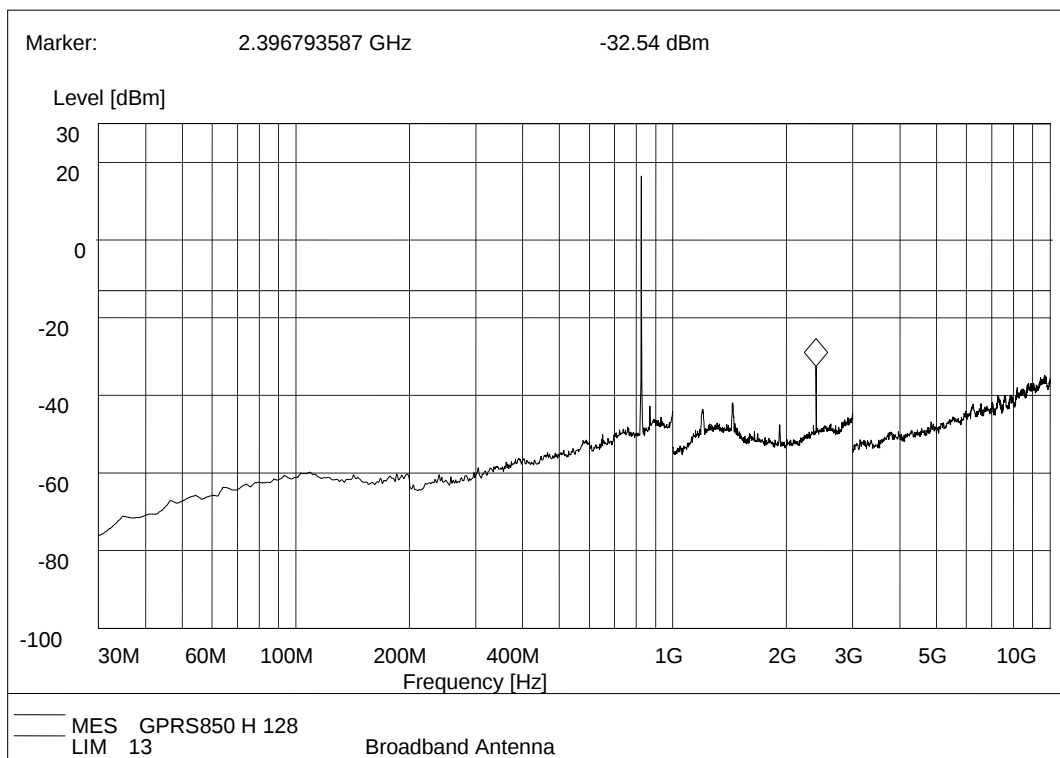


(Plot C.1: GPRS 850MHz Channel = 128, Test Antenna Horizontal)

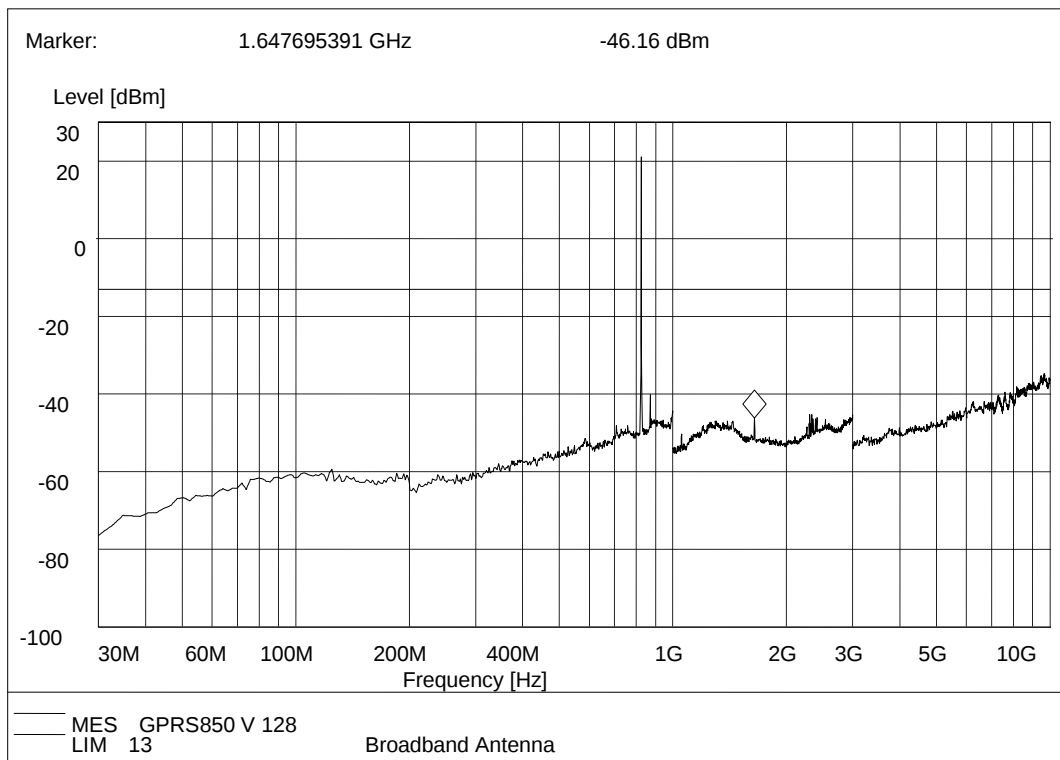


(PlotC.2: GPRS 850MHz Channel = 128, Test Antenna Vertical)

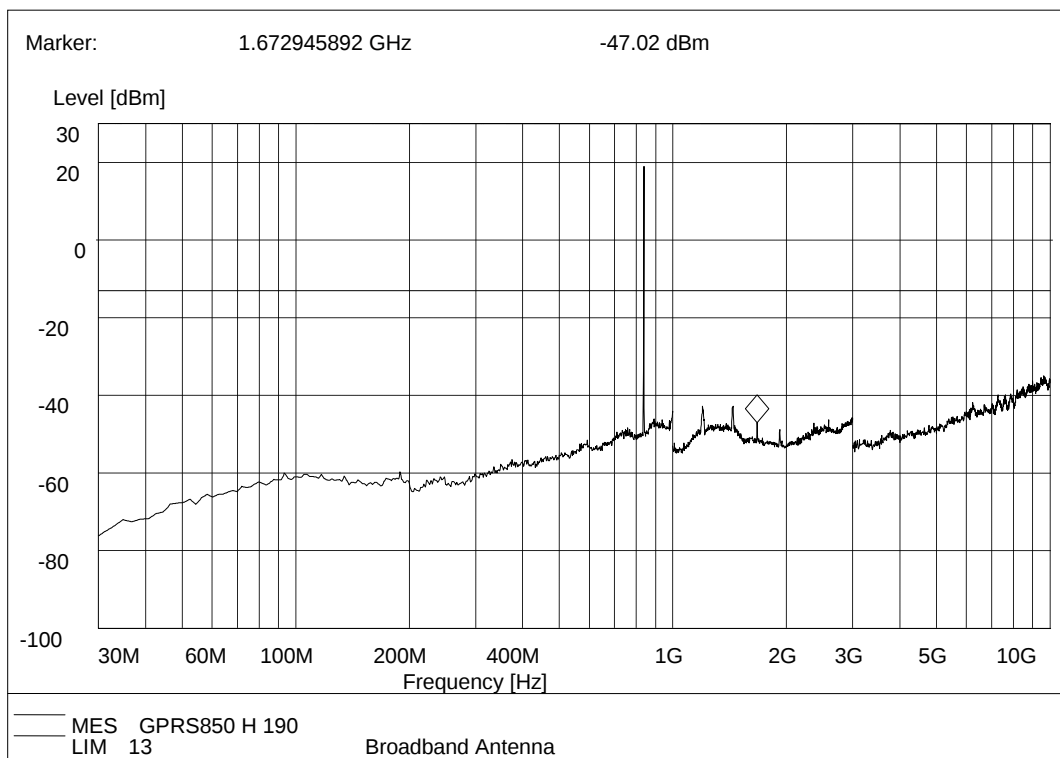


(Plot C.3: GPRS 850MHz Channel = 190, Test Antenna Horizontal)

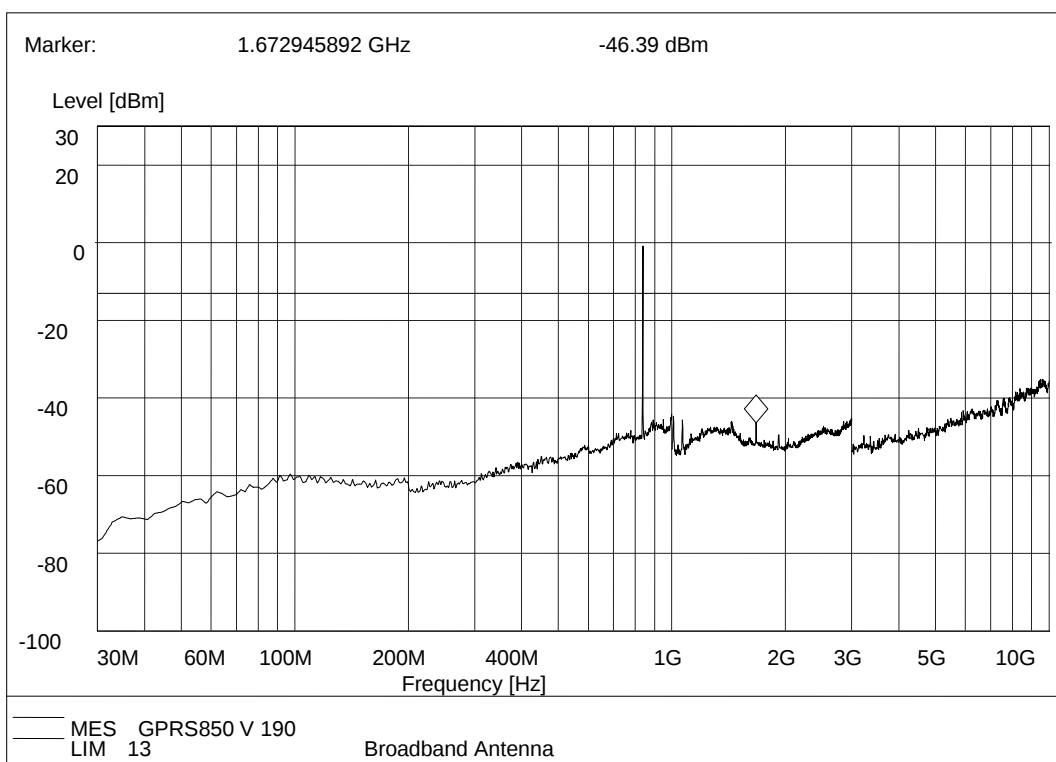


(PlotC.4: GPRS 850MHz Channel = 190, Test Antenna Vertical)

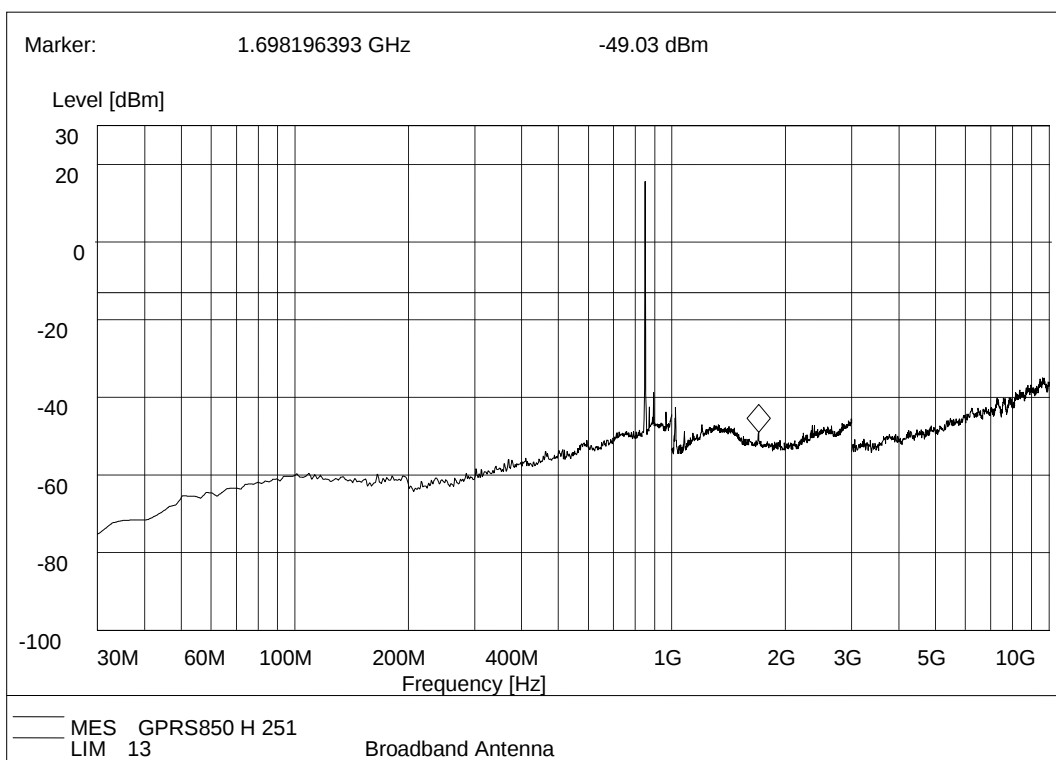


(Plot C.5: GPRS 850MHz Channel = 251, Test Antenna Horizontal)

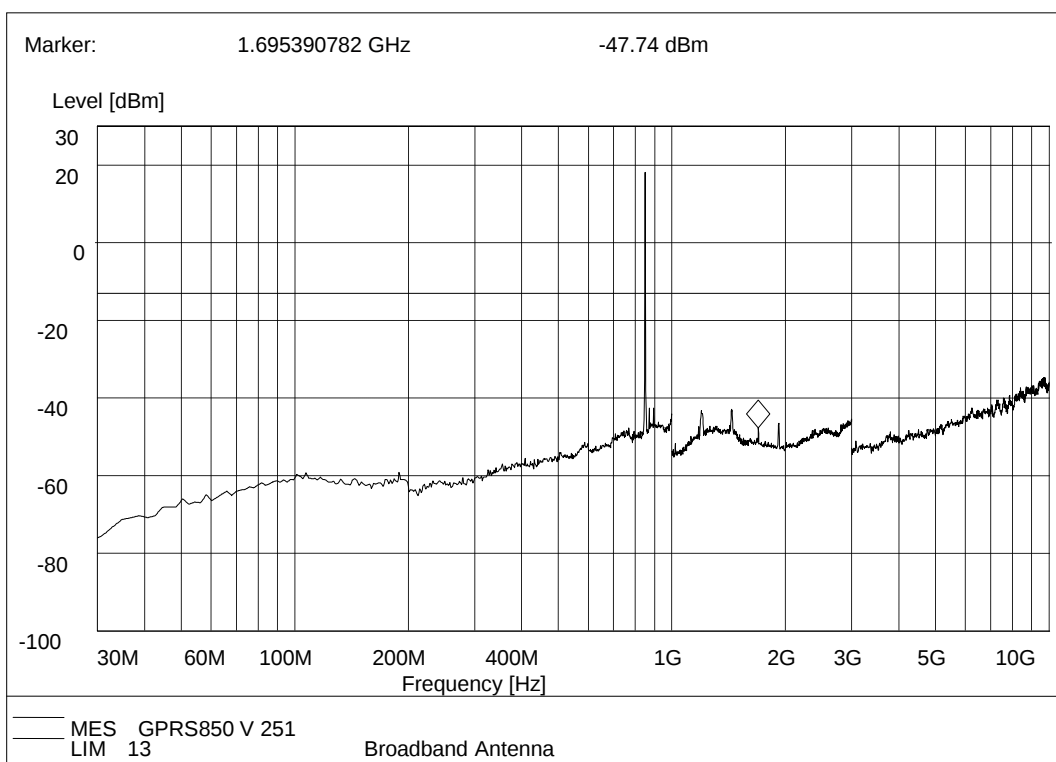


(PlotC.6: GPRS 850MHz Channel = 251, Test Antenna Vertical)

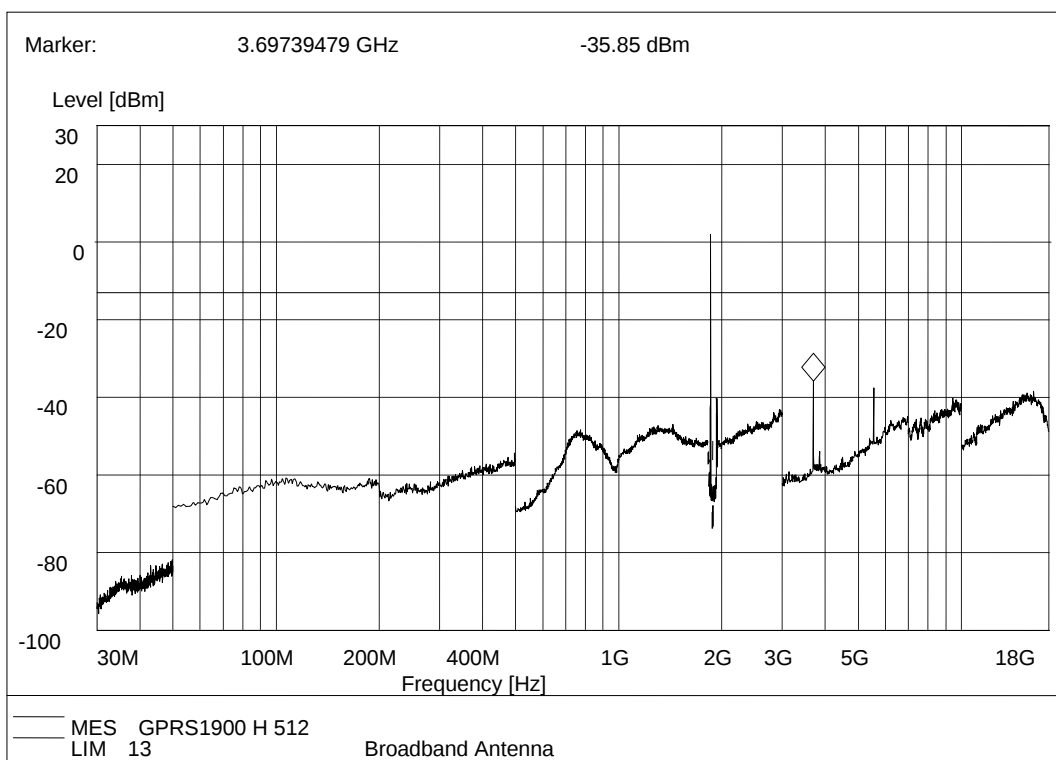


(Plot D.1: GPRS 1900MHz Channel = 512, Test Antenna Horizontal)

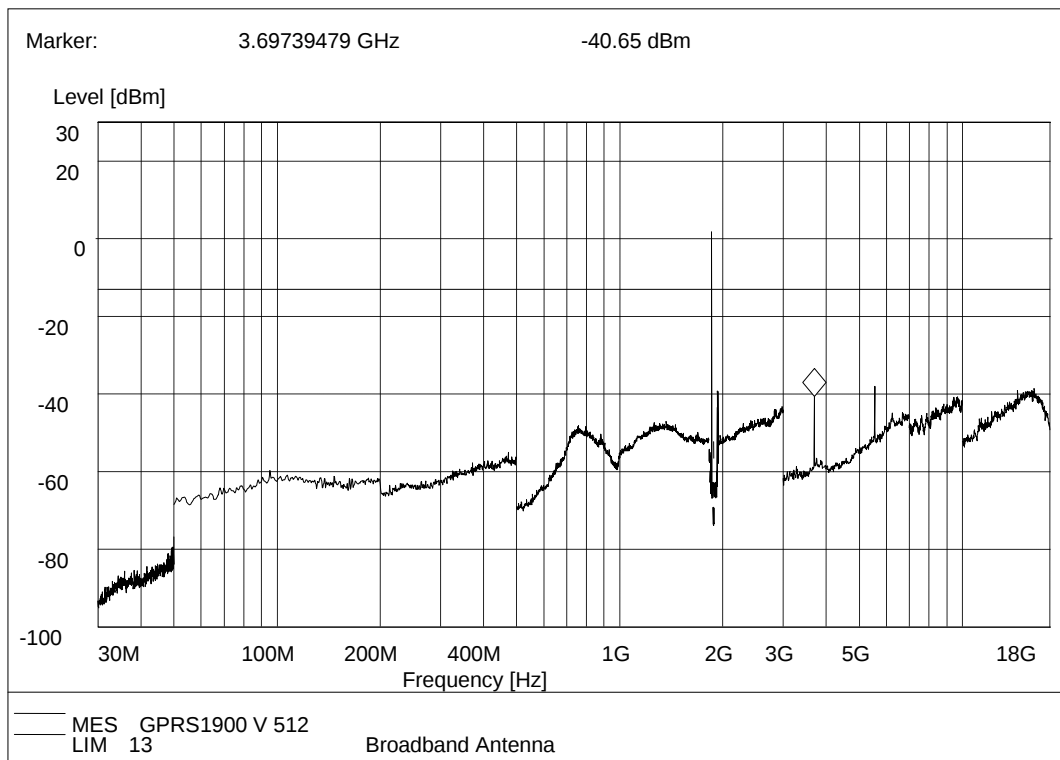


(PlotD.2: GPRS 1900MHz Channel = 512, Test Antenna Vertical)

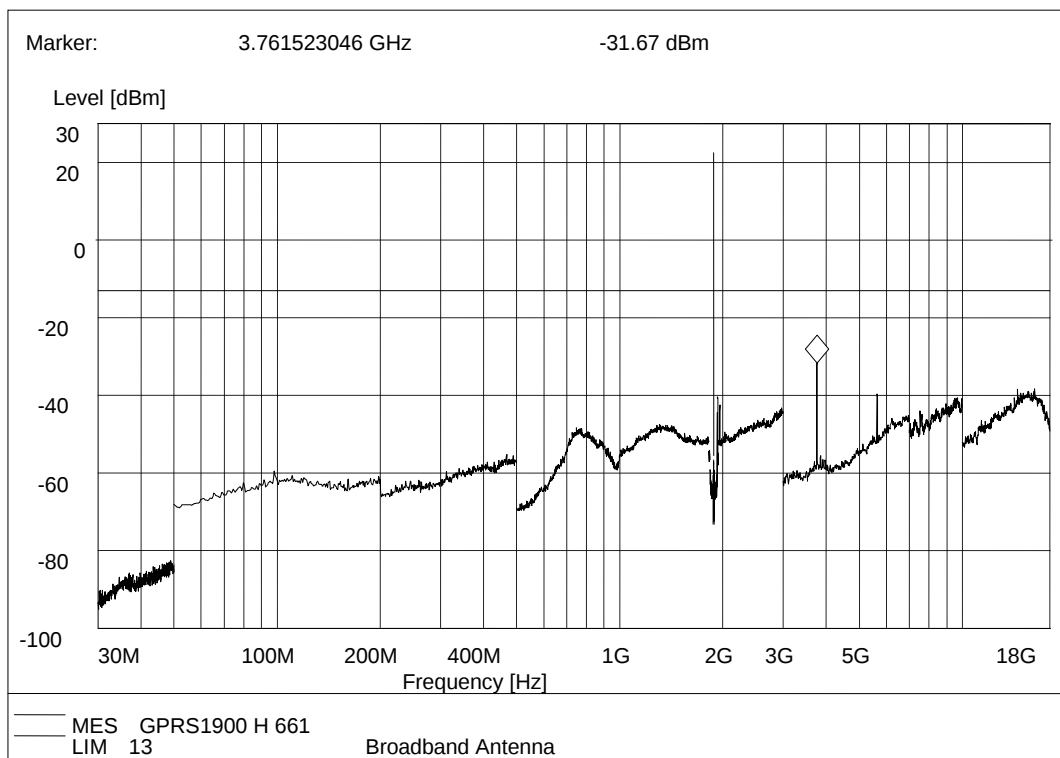


(Plot D.3: GPRS 1900MHz Channel = 661, Test Antenna Horizontal)

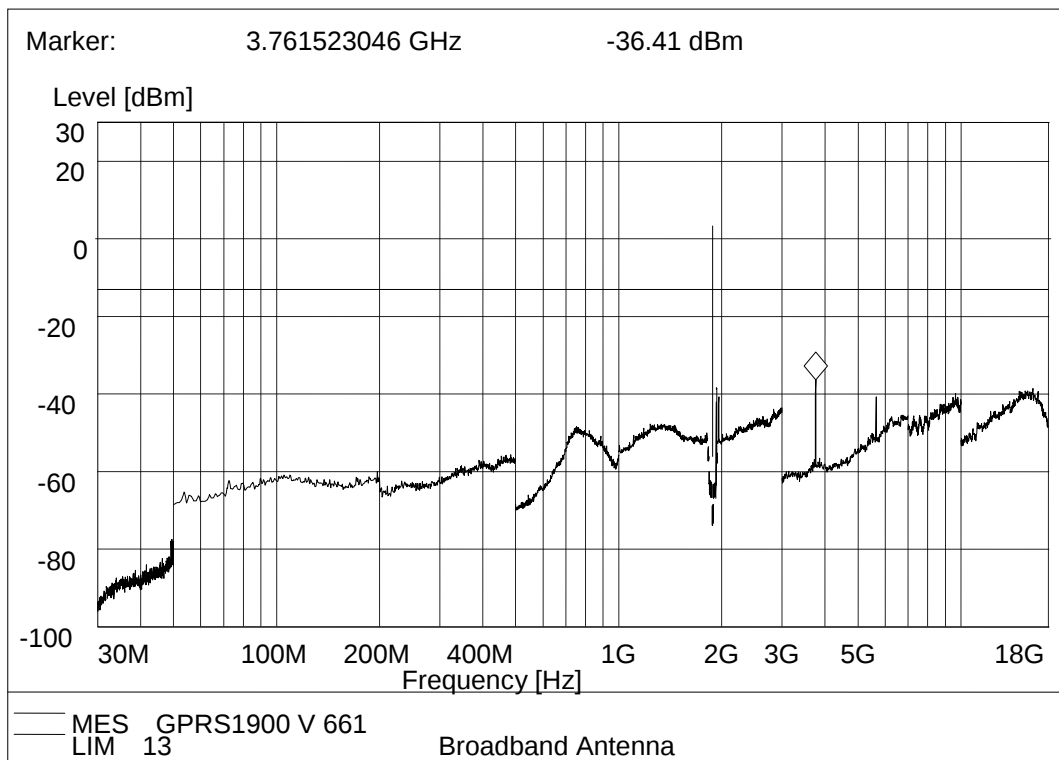


(PlotD.4: GPRS 1900MHz Channel = 661, Test Antenna Vertical)

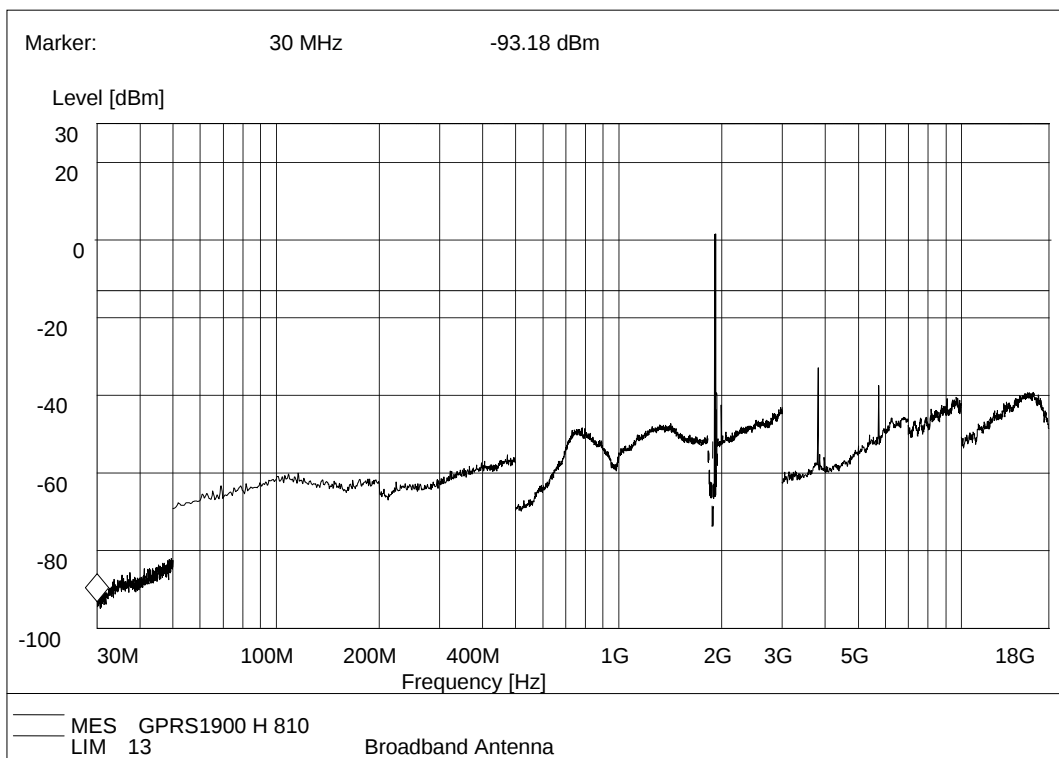


(Plot D.5: GPRS 1900MHz Channel = 810, Test Antenna Horizontal)

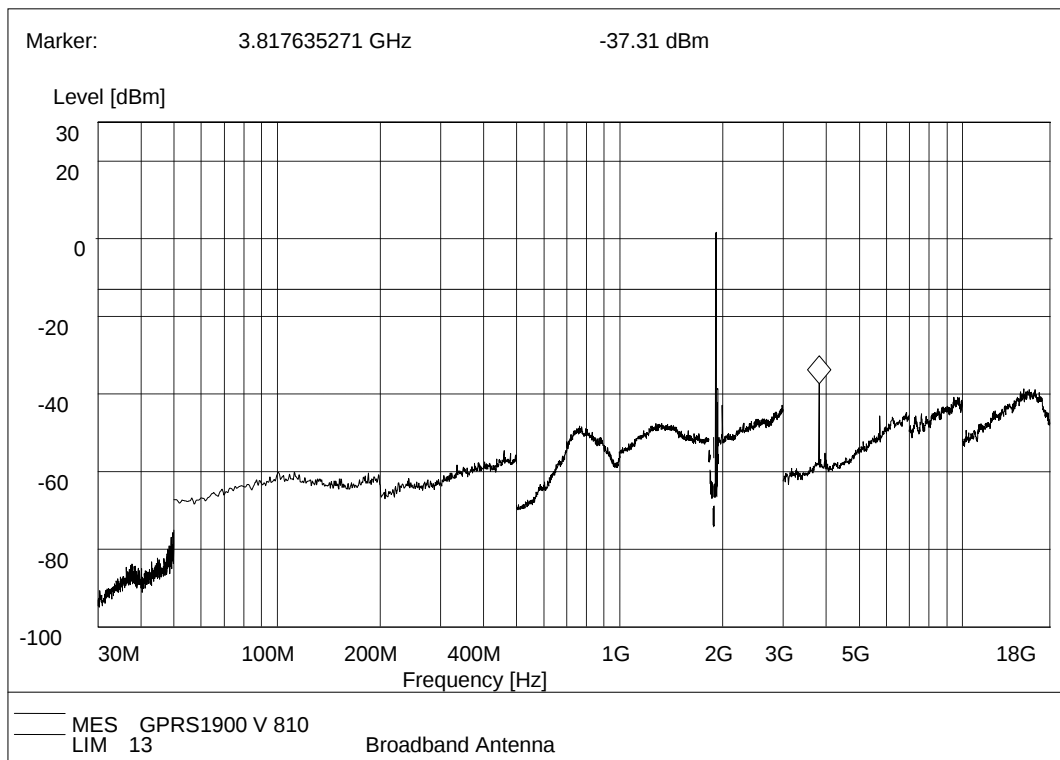


(PlotD.6: GPRS 1900MHz Channel = 810, Test Antenna Vertical)

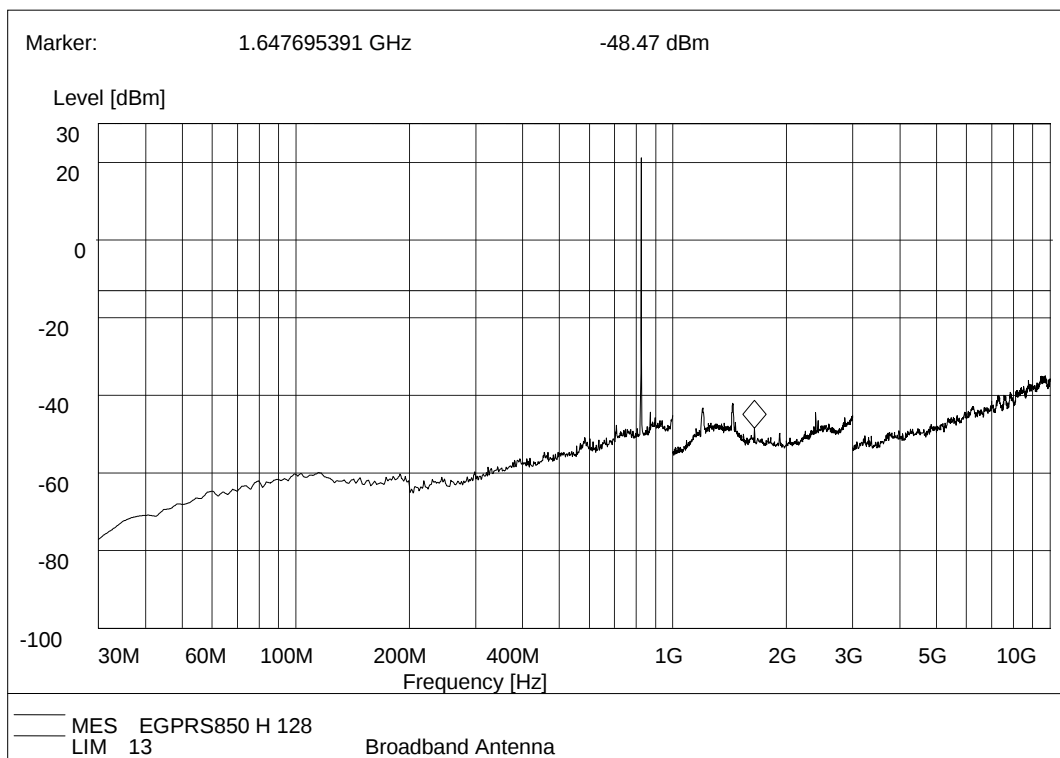


(Plot E.1: EDGE 850MHz Channel = 128, Test Antenna Horizontal)

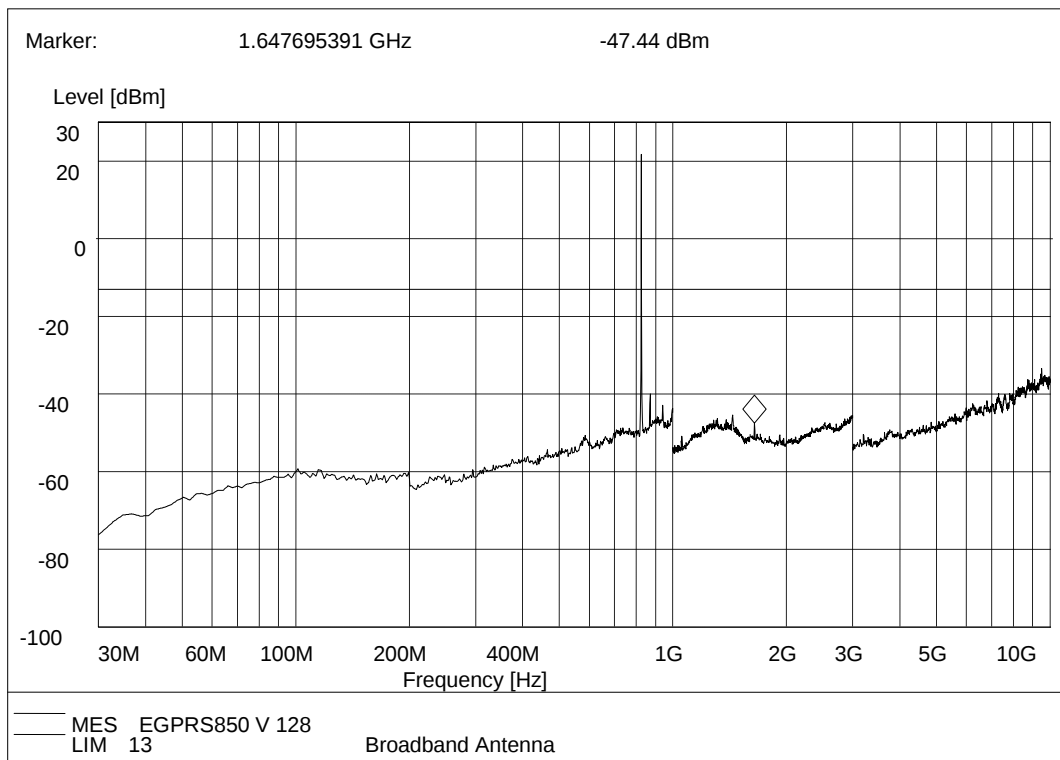


(Plot E.2: EDGE 850MHz Channel = 128, Test Antenna Vertical)

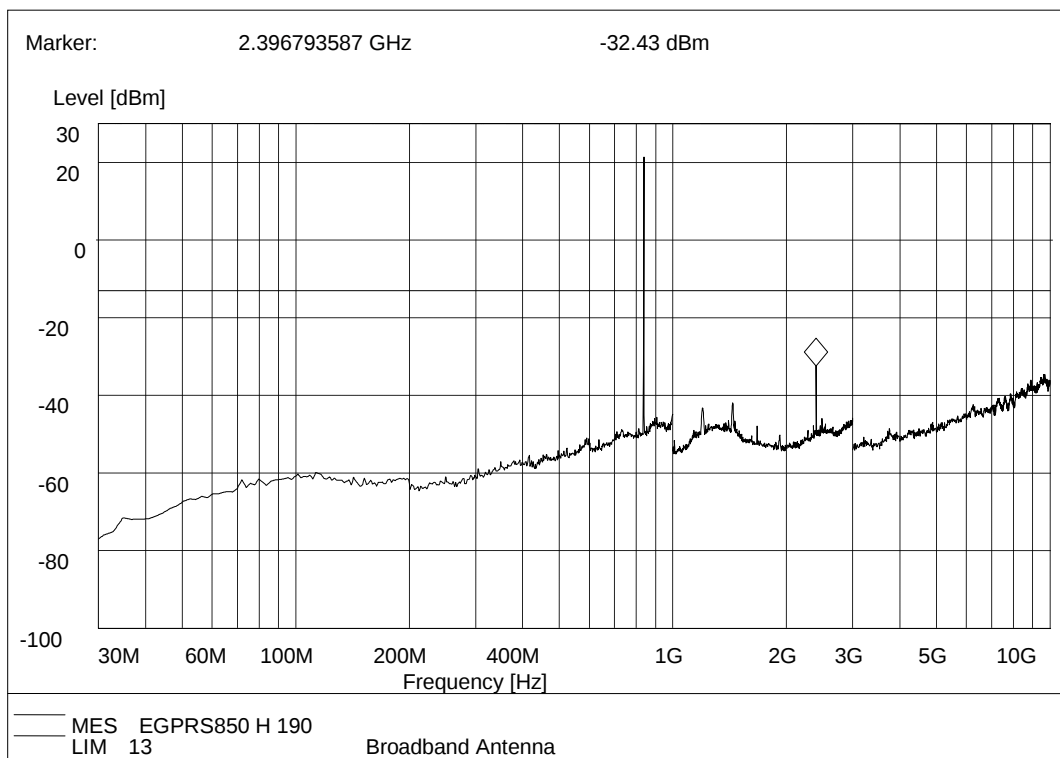


(Plot E.3: EDGE 850MHz Channel = 190, Test Antenna Horizontal)

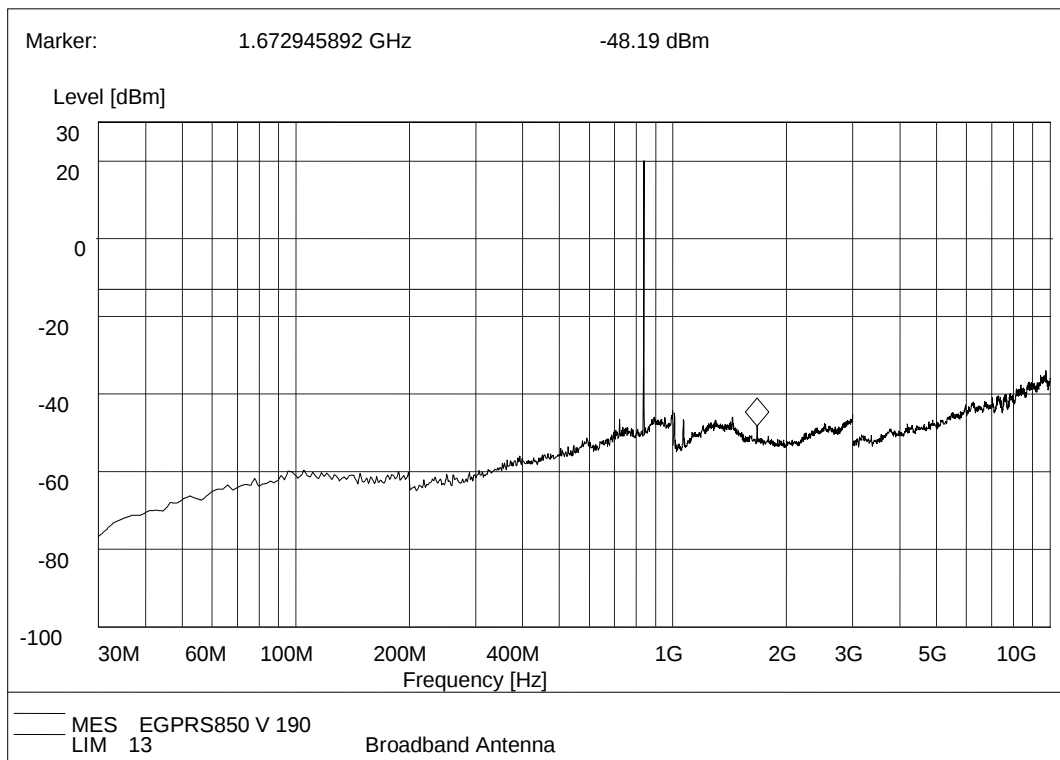


(Plot E.4: EDGE 850MHz Channel = 190, Test Antenna Vertical)

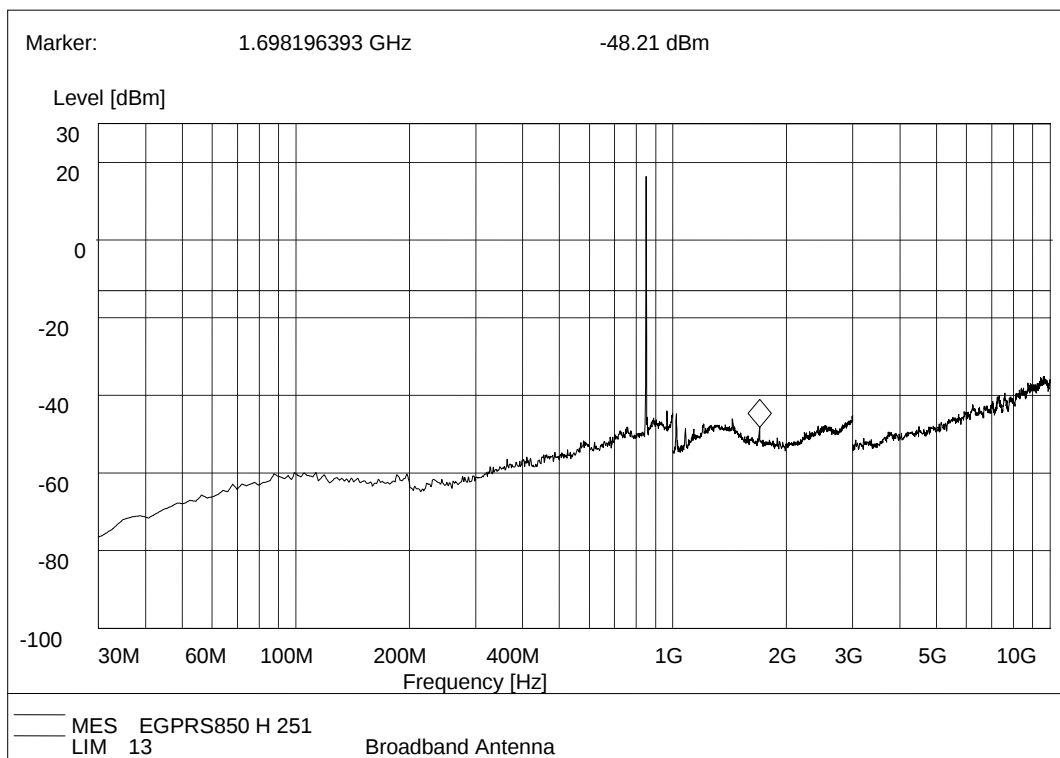


(Plot E.5: EDGE 850MHz Channel = 251, Test Antenna Horizontal)

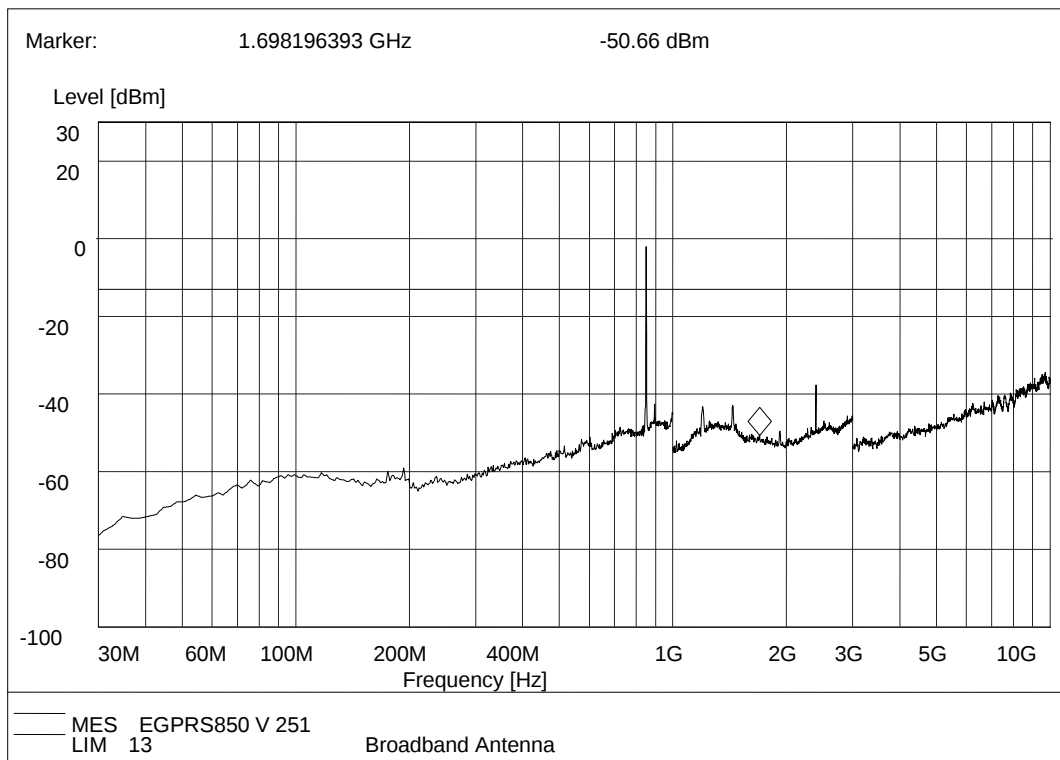


(Plot E.6: EDGE 850MHz Channel = 251, Test Antenna Vertical)

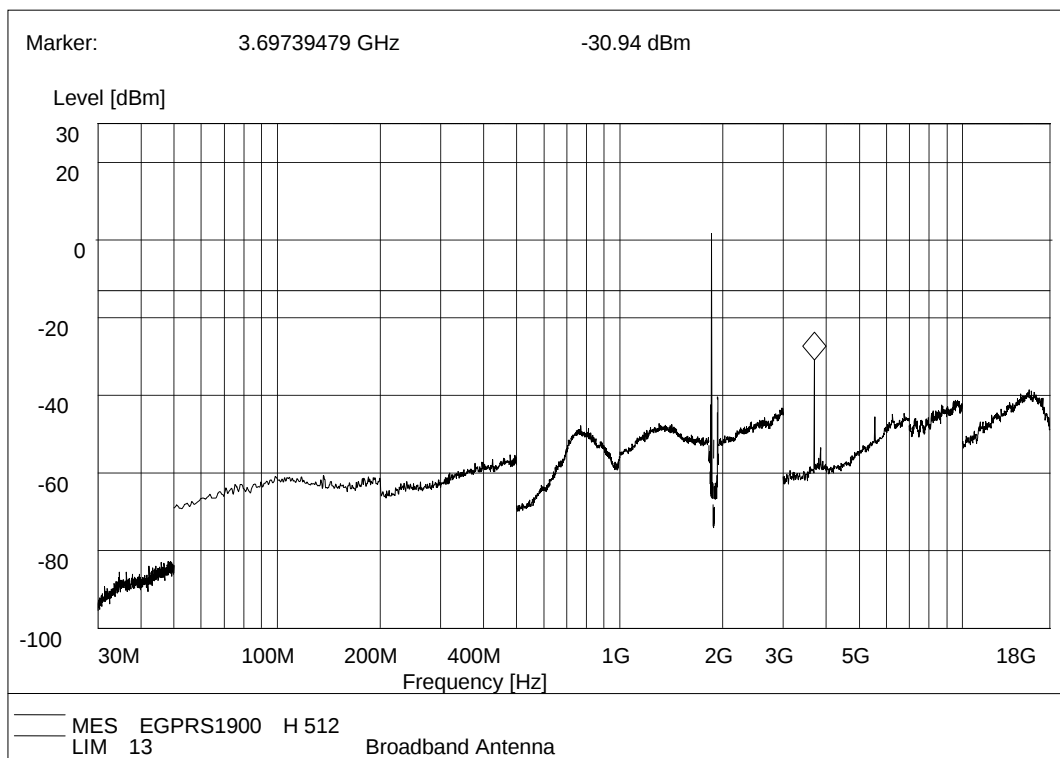


(Plot F.1: EDGE 1900MHz Channel = 512, Test Antenna Horizontal)

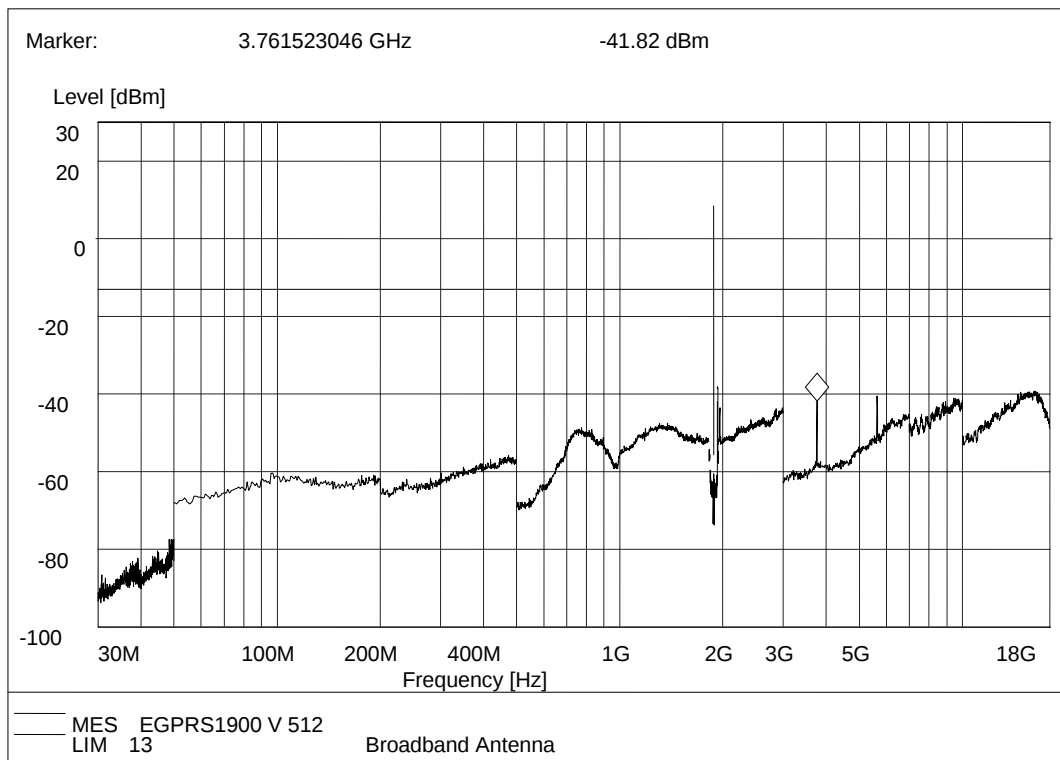


(Plot F.2: EDGE 1900MHz Channel = 512, Test Antenna Vertical)

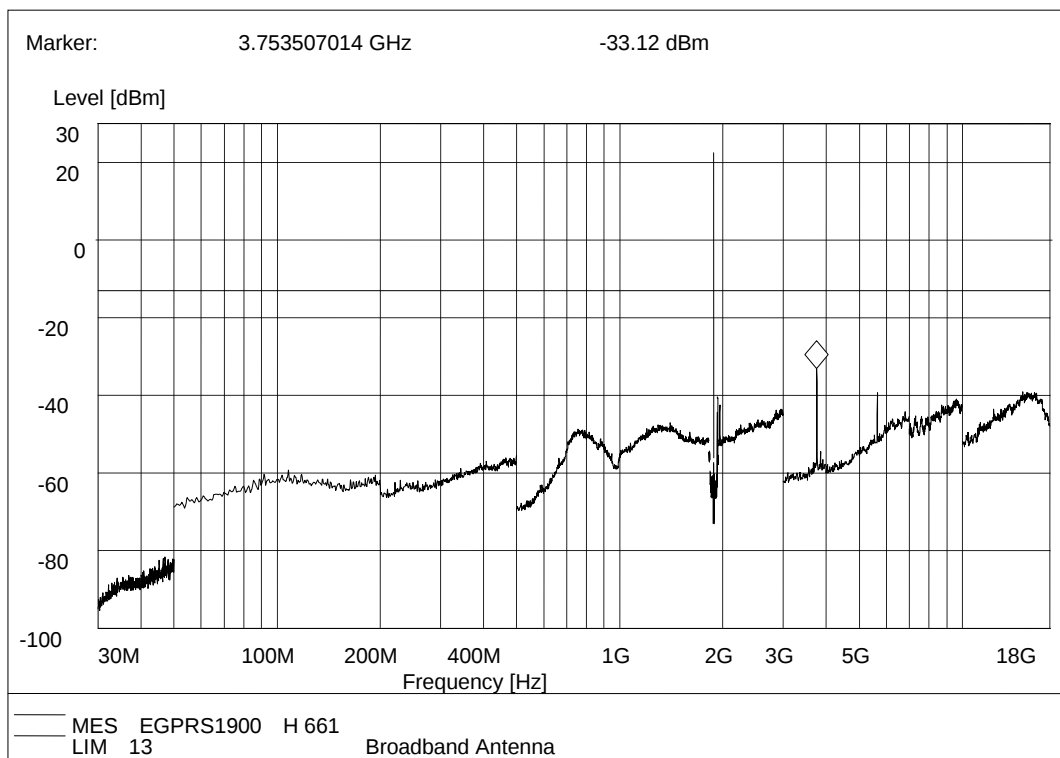


(Plot F.3: EDGE 1900MHz Channel = 661, Test Antenna Horizontal)

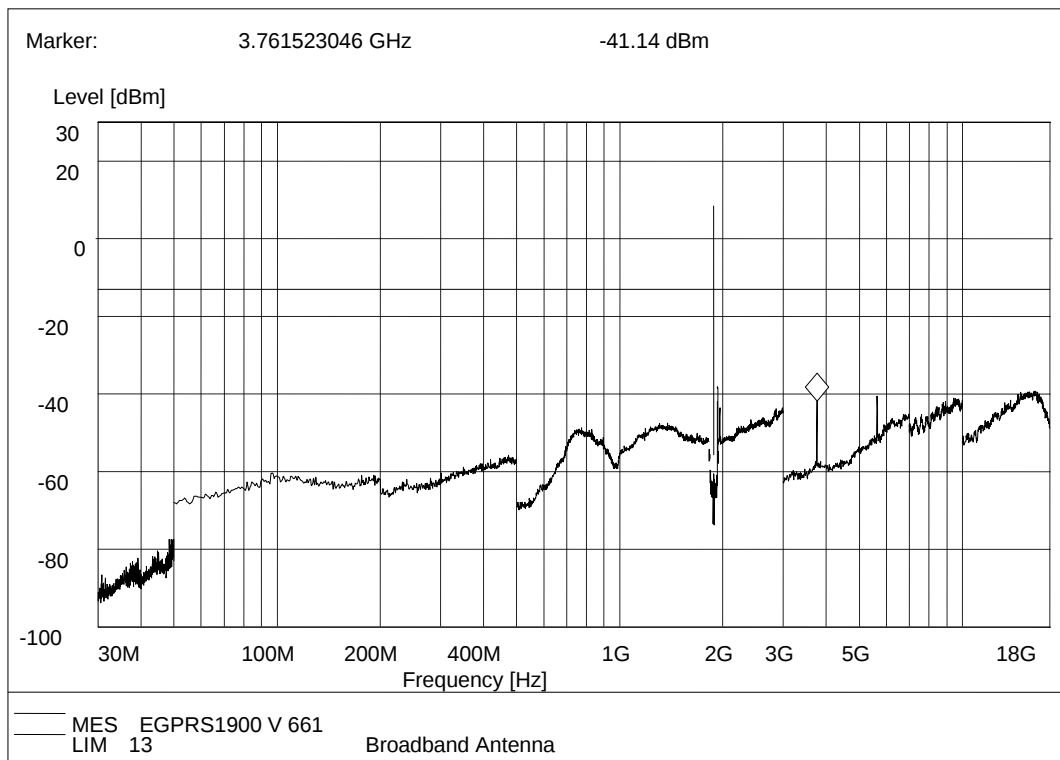


(Plot F.4: EDGE 1900MHz Channel = 661, Test Antenna Vertical)

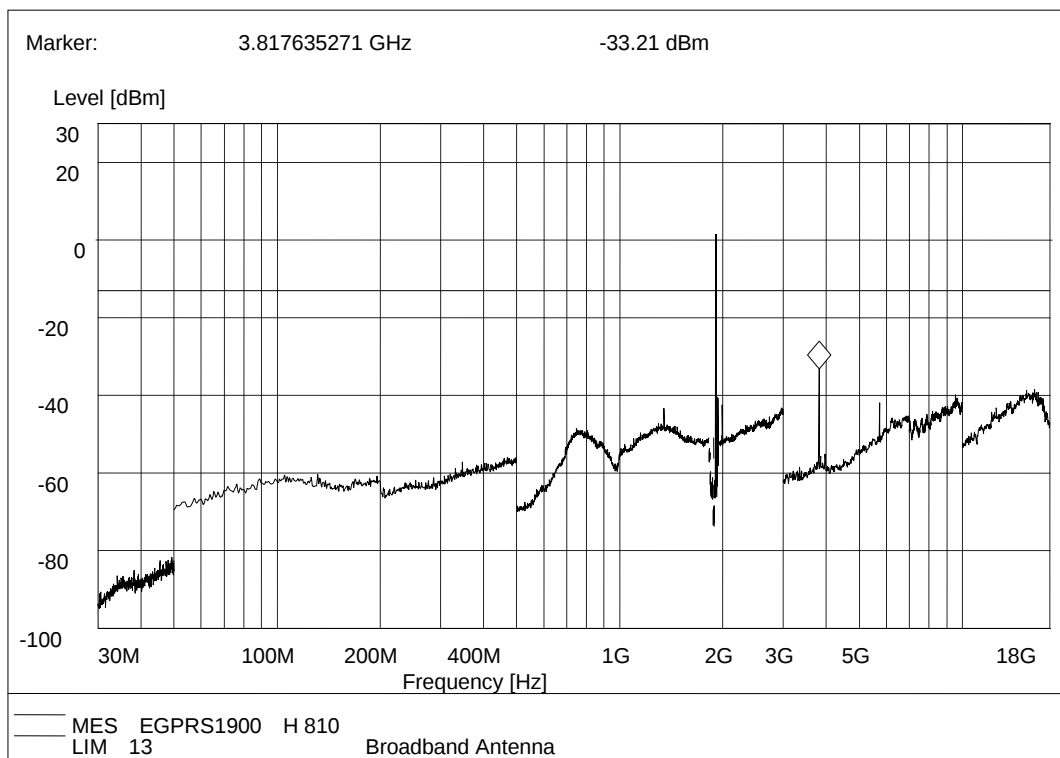


(Plot F.5: EDGE 1900MHz Channel = 810, Test Antenna Horizontal)

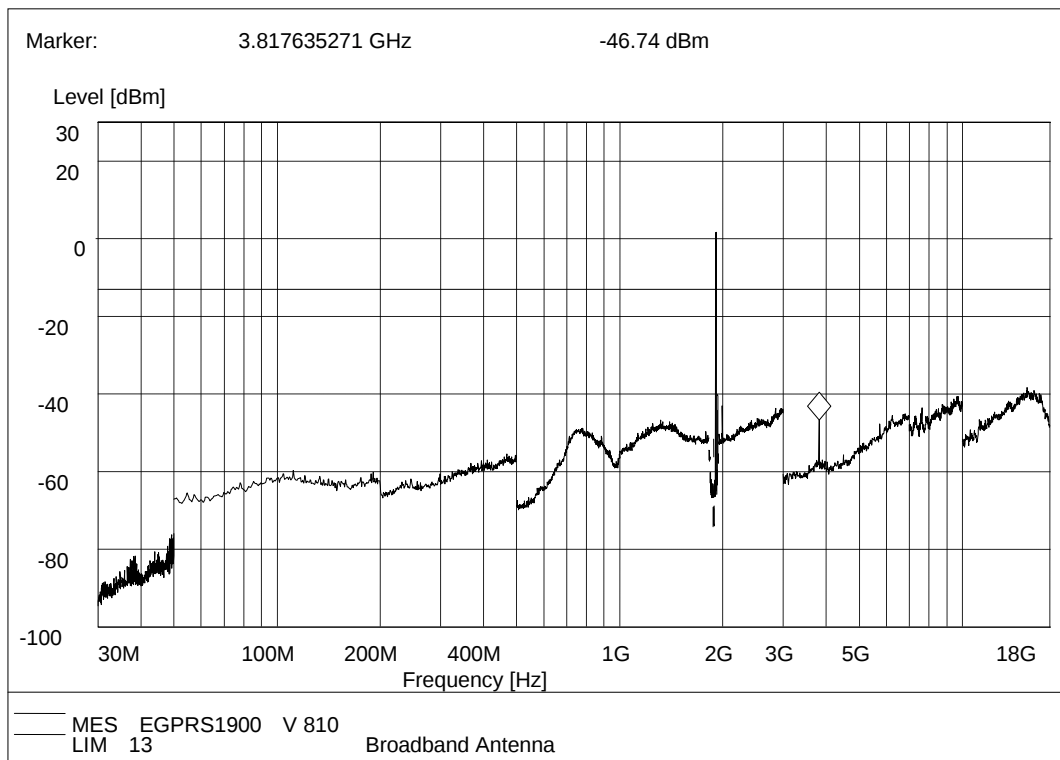


(Plot F.6: EDGE 1900MHz Channel = 810, Test Antenna Vertical)

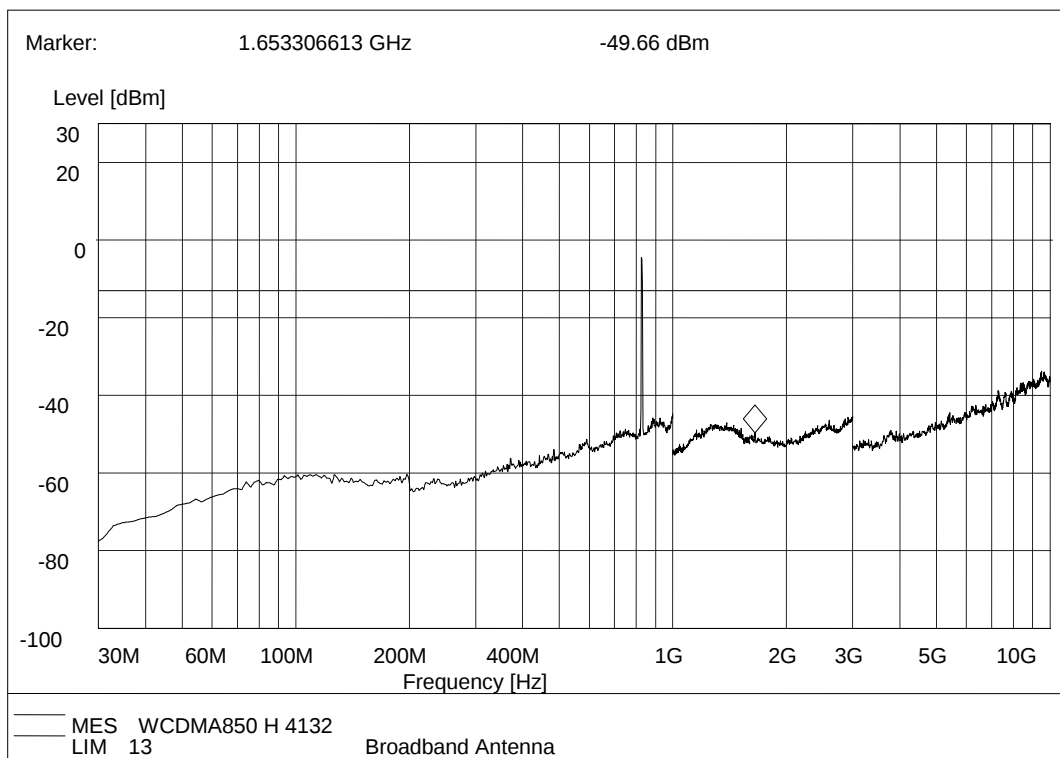


(Plot G.1: WCDMA 850MHz Channel = 4132, Test Antenna Horizontal)

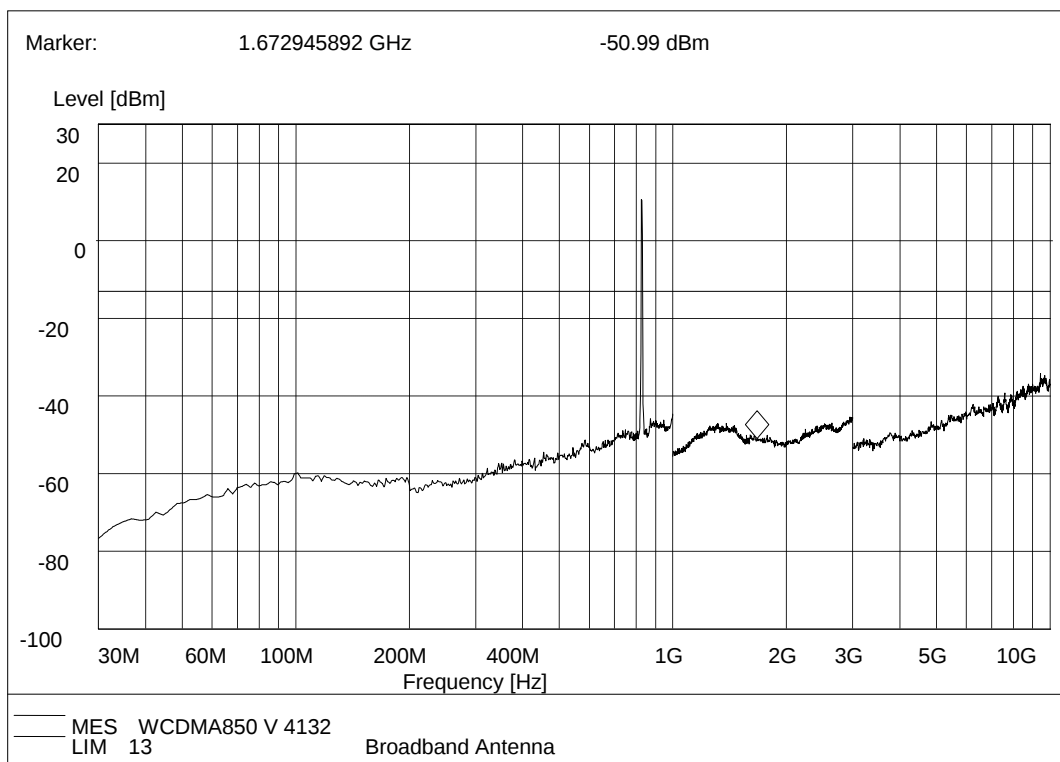


(Plot G.2: WCDMA 850MHz Channel = 4132, Test Antenna Vertical)

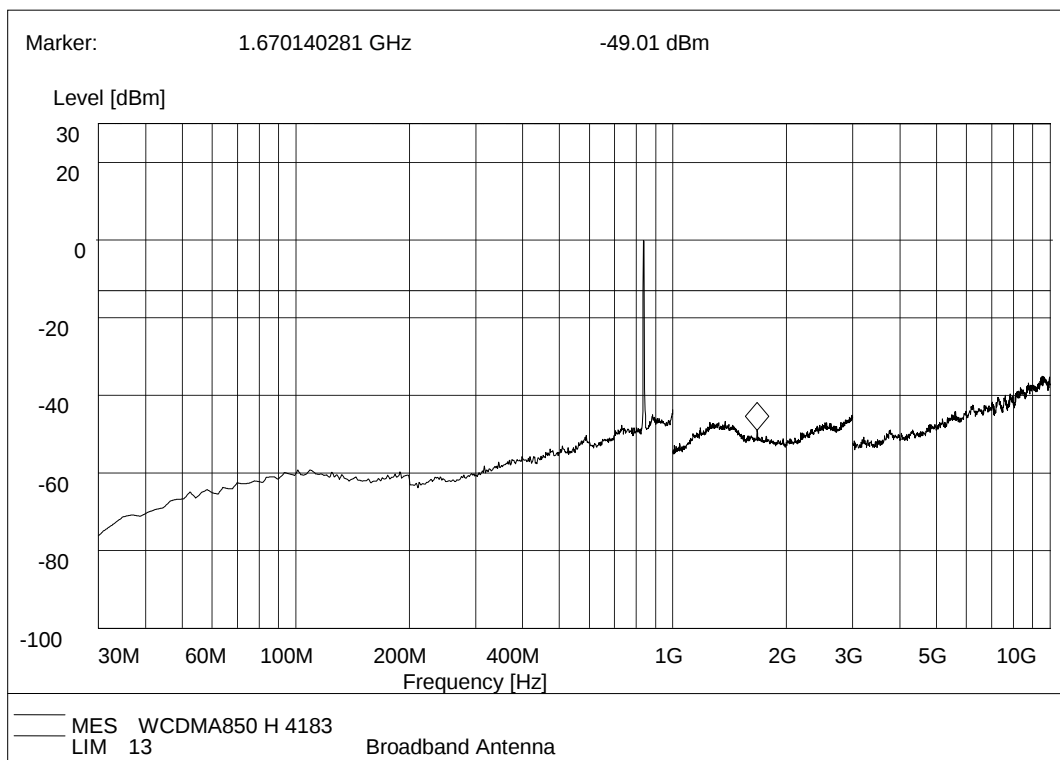


(Plot G.3: WCDMA 850MHz Channel = 4183, Test Antenna Horizontal)

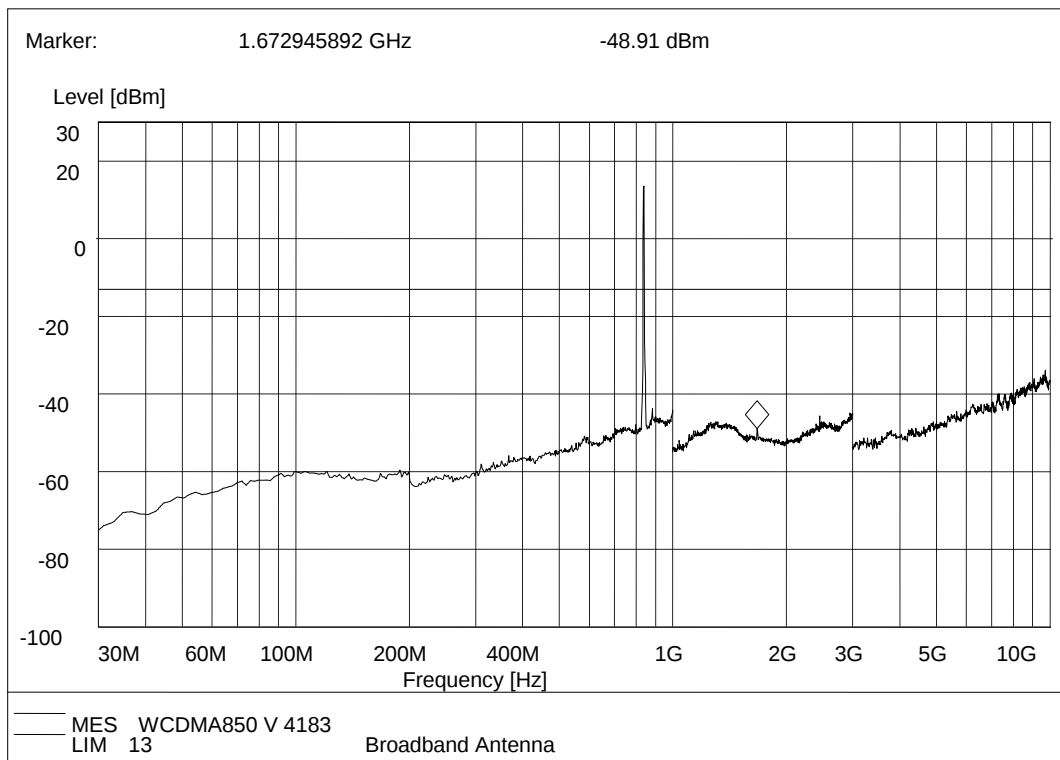


(Plot G.4: WCDMA 850MHz Channel = 4183, Test Antenna Vertical)

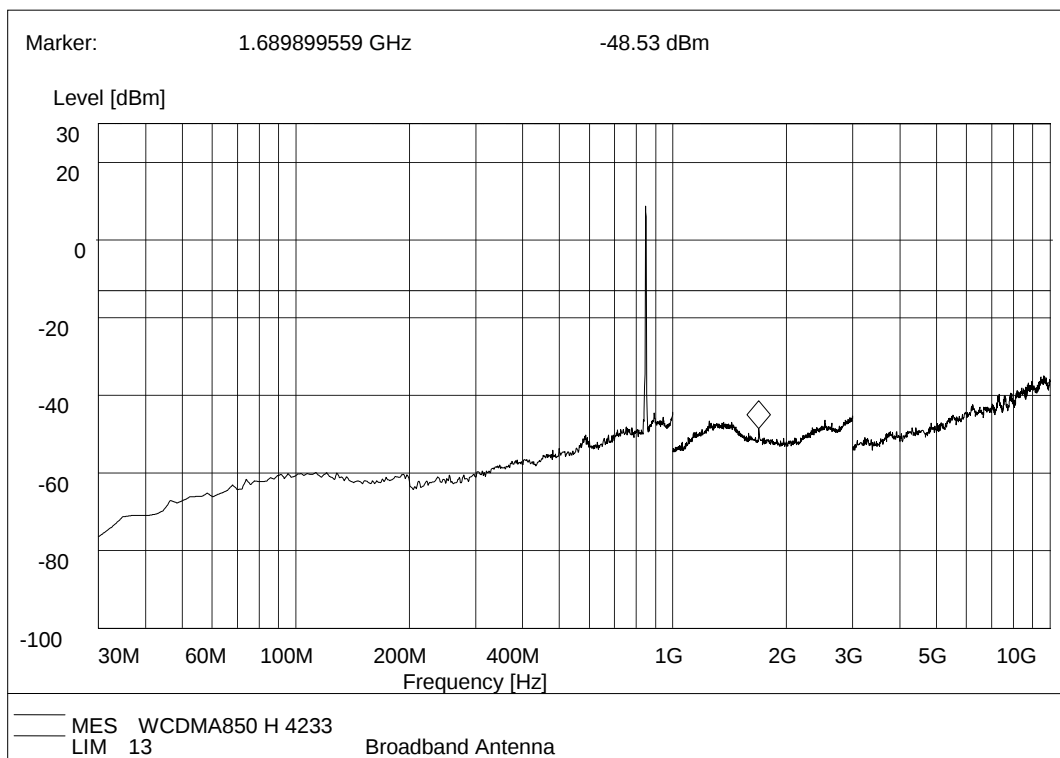

(Plot G.5: WCDMA 850MHz Channel = 4233, Test Antenna Horizontal)

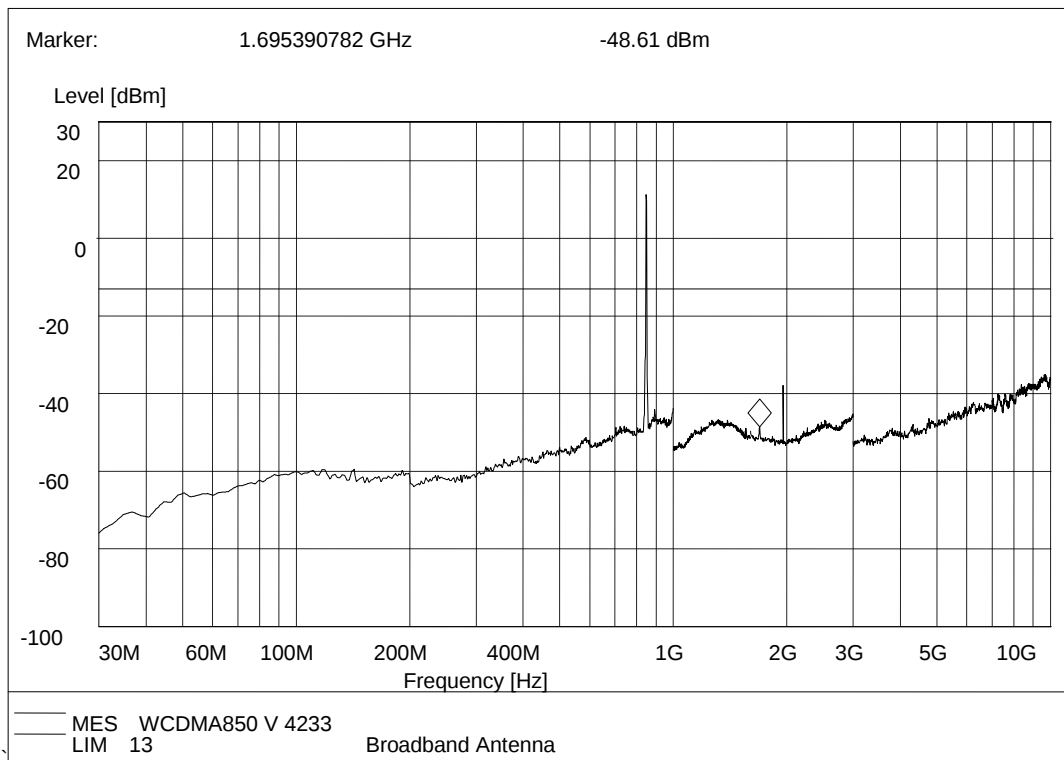


(Plot G.6: WCDMA 850MHz Channel = 4233, Test Antenna Vertical)

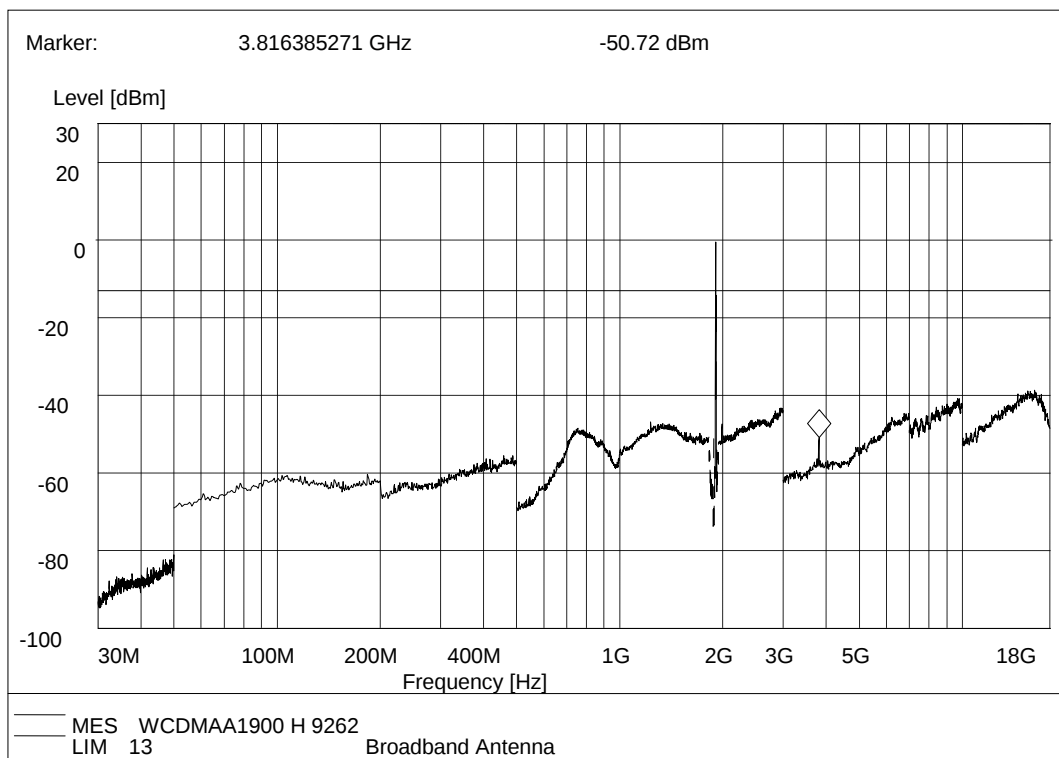


(Plot H.1: WCDMA 1900MHz Channel = 9262, Test Antenna Horizontal)




(Plot H.2: WCDMA 1900MHz Channel = 9262, Test Antenna Vertical)

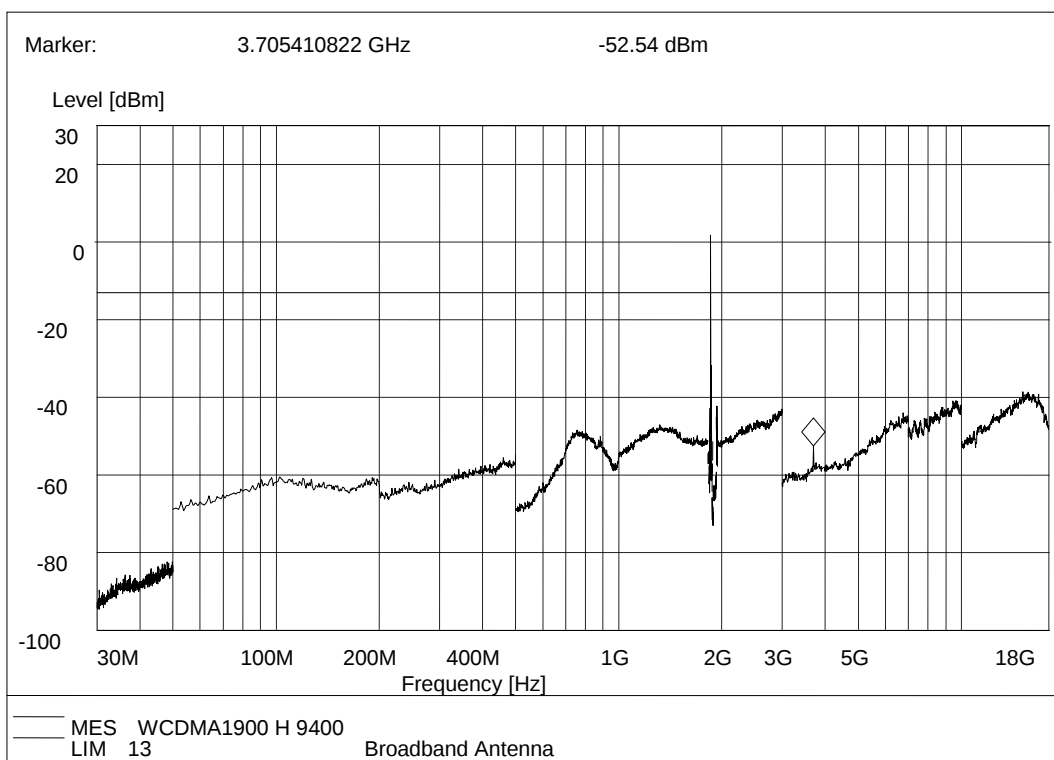


(Plot H.3: WCDMA 1900MHz Channel = 9400, Test Antenna Horizontal)

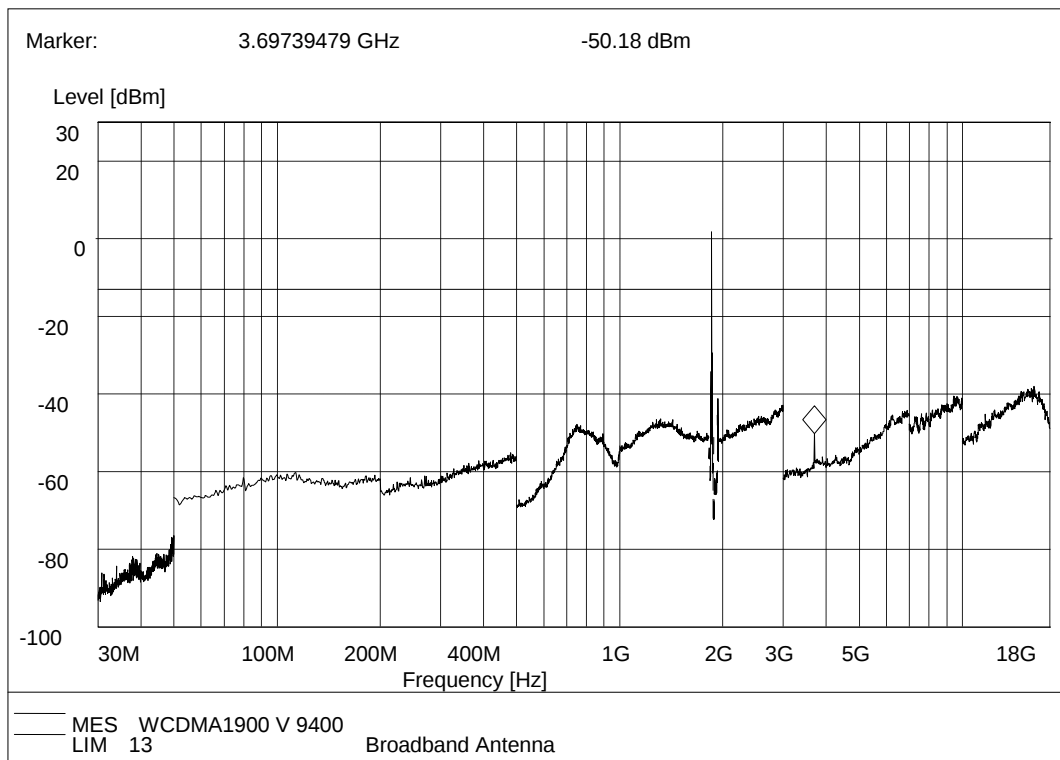


(Plot H.4: WCDMA 1900MHz Channel = 9400, Test Antenna Vertical)

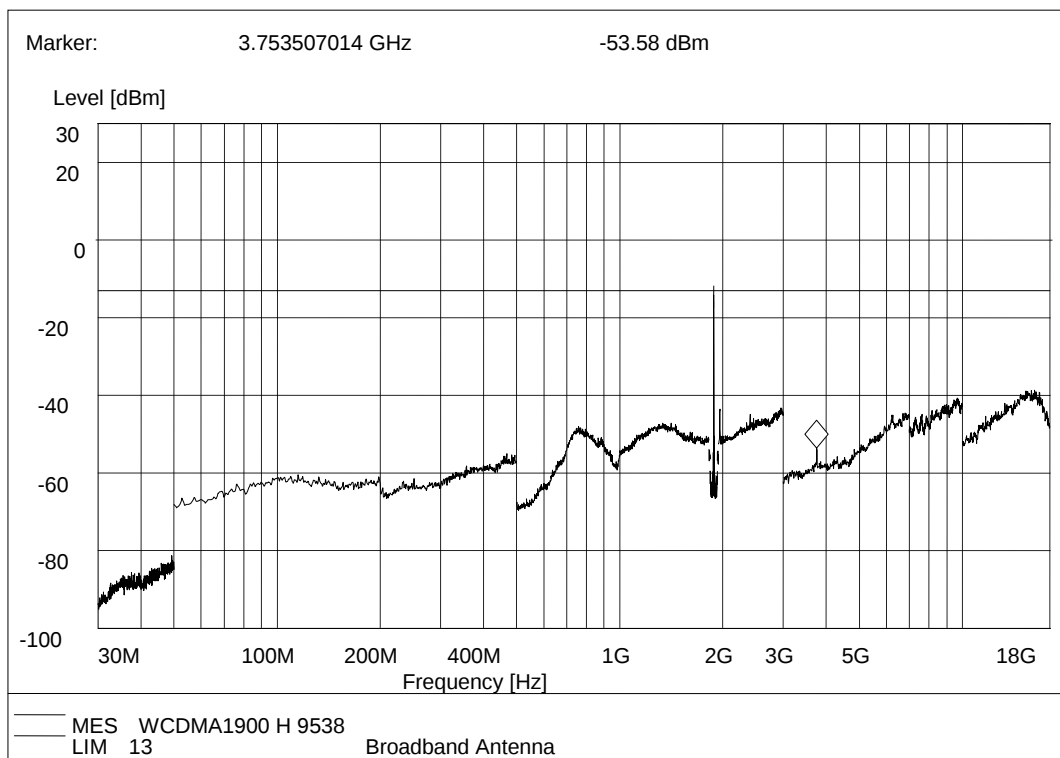


(Plot H.5: WCDMA 1900MHz Channel = 9538, Test Antenna Horizontal)

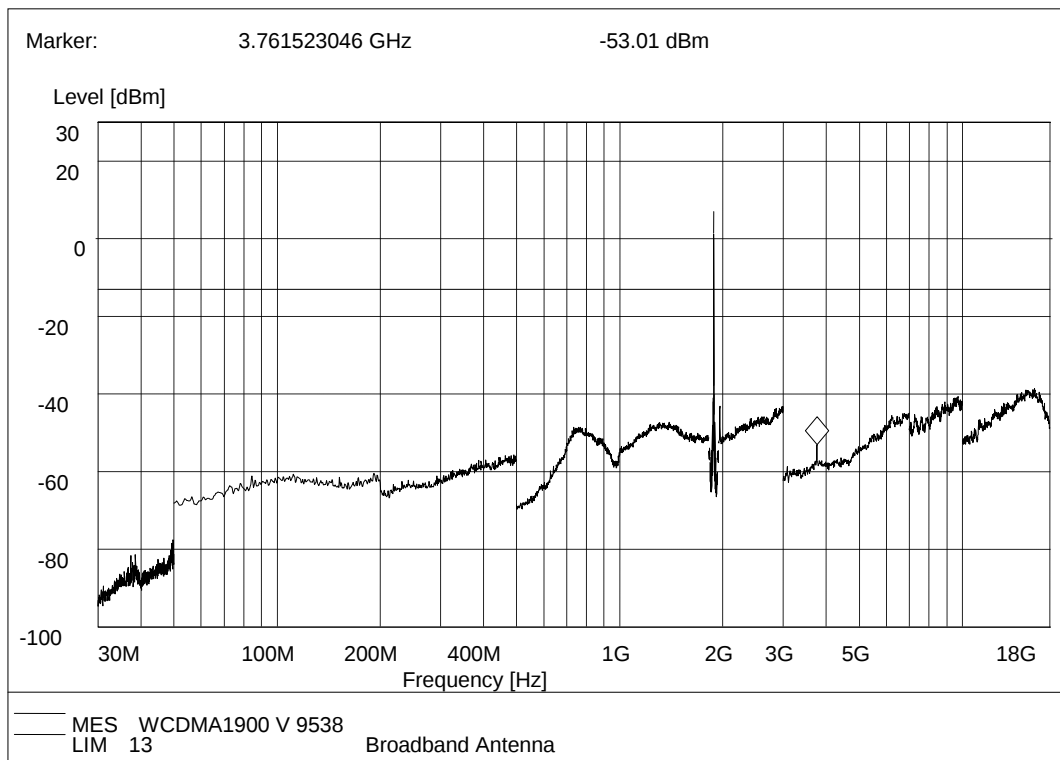


(Plot H.6: WCDMA 1900MHz Channel = 9538, Test Antenna Vertical)

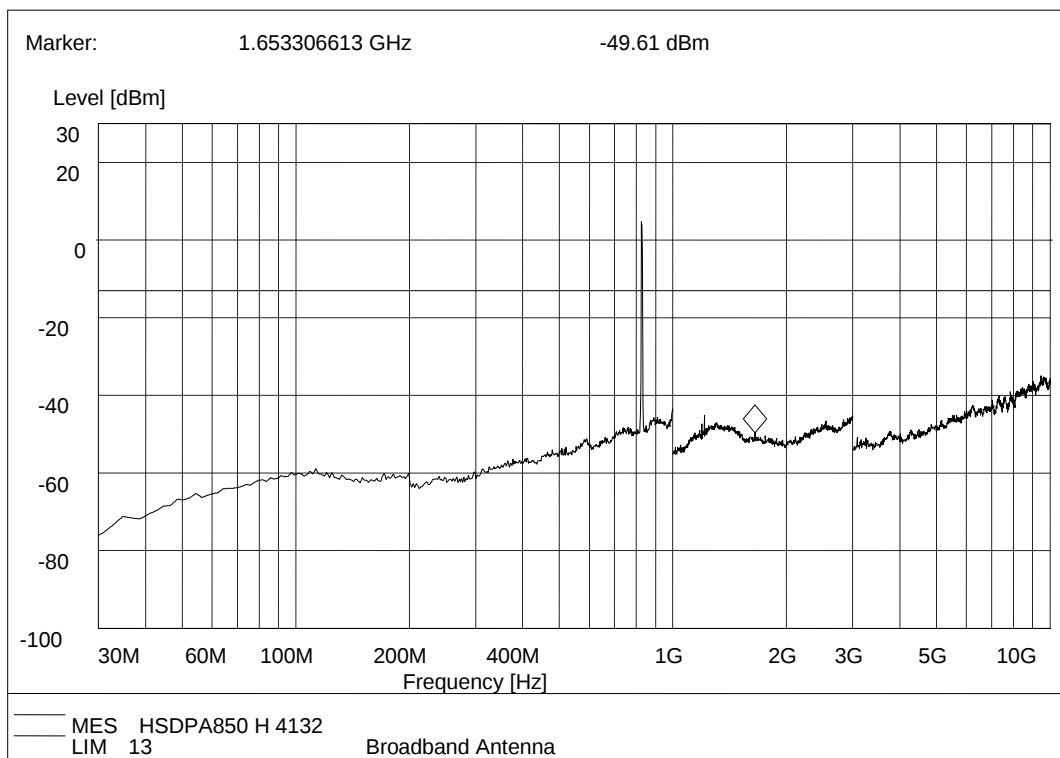


(Plot I.1: HSDPA 850MHz Channel = 4132, Test Antenna Horizontal)

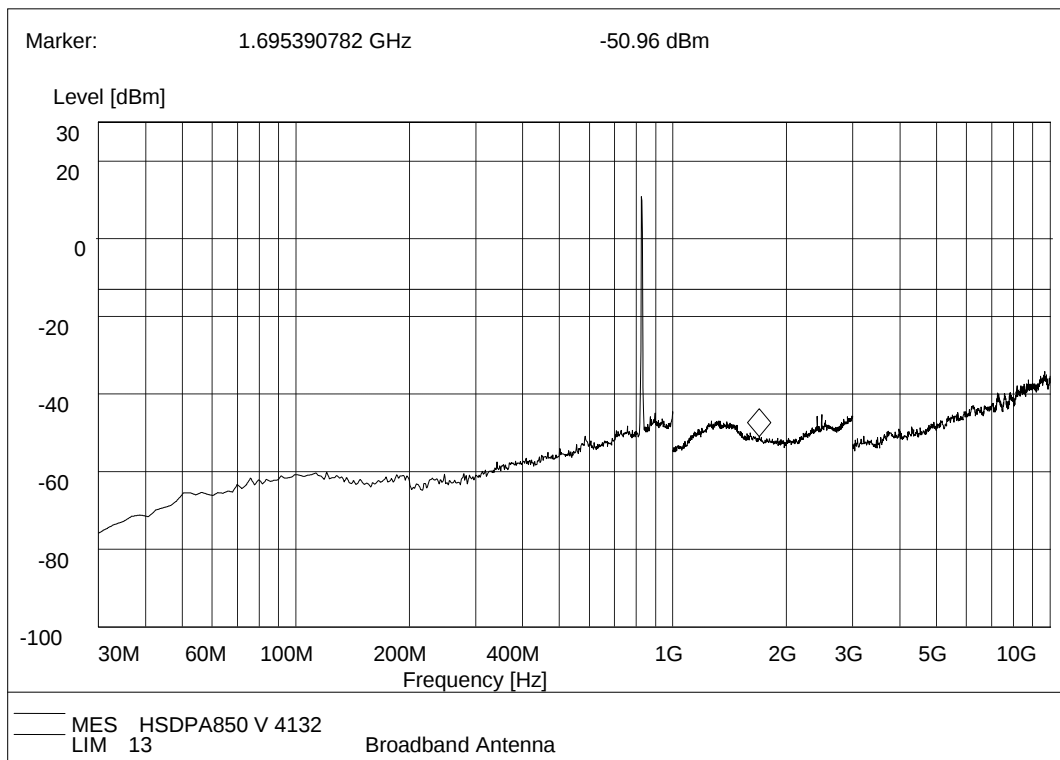


(Plot I.2: HSDPA 850MHz Channel = 4132, Test Antenna Vertical)

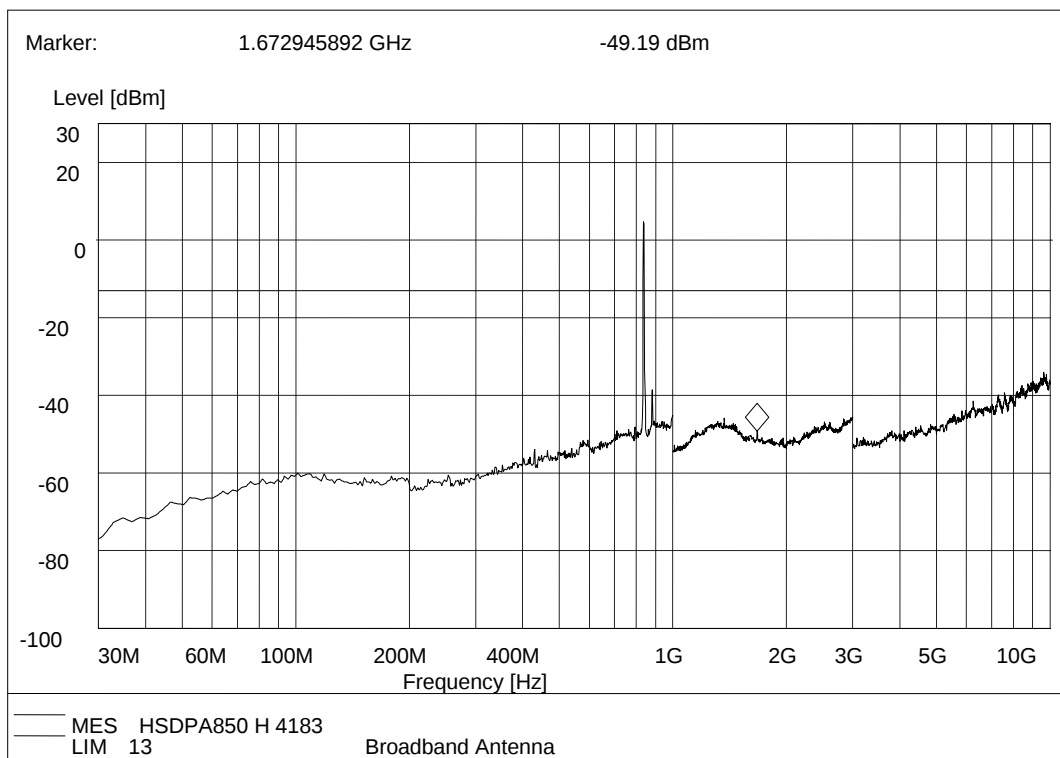


(Plot I.3: HSDPA 850MHz Channel = 4183, Test Antenna Horizontal)

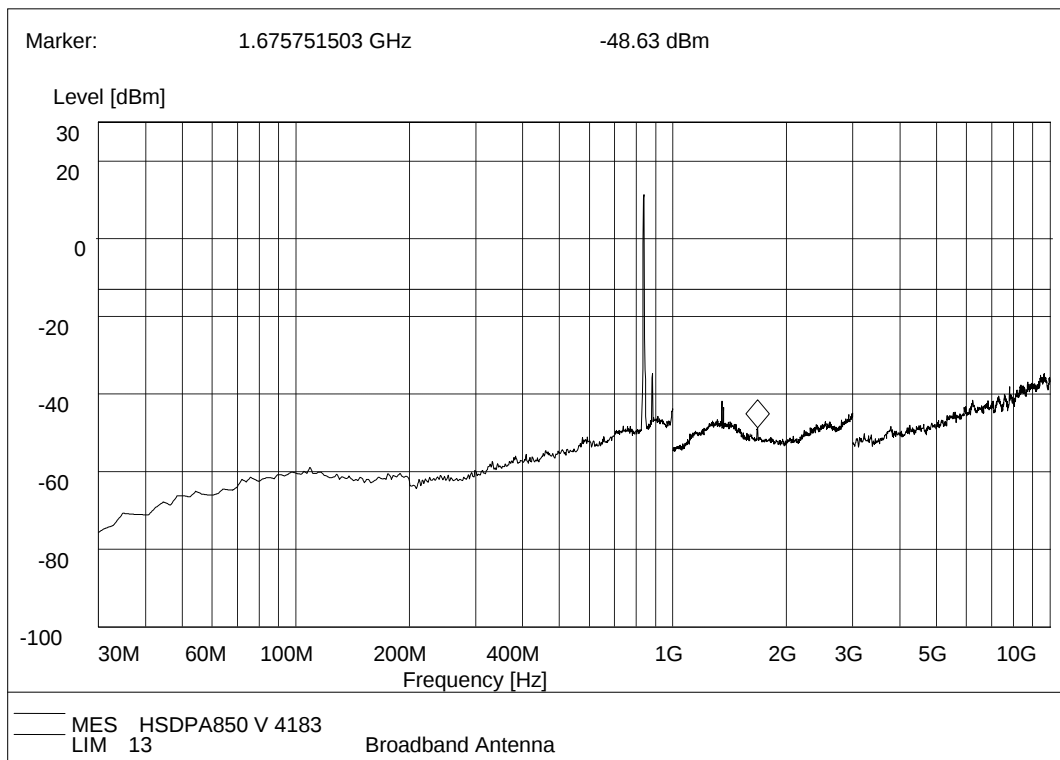


(Plot I.4: HSDPA 850MHz Channel = 4183, Test Antenna Vertical)

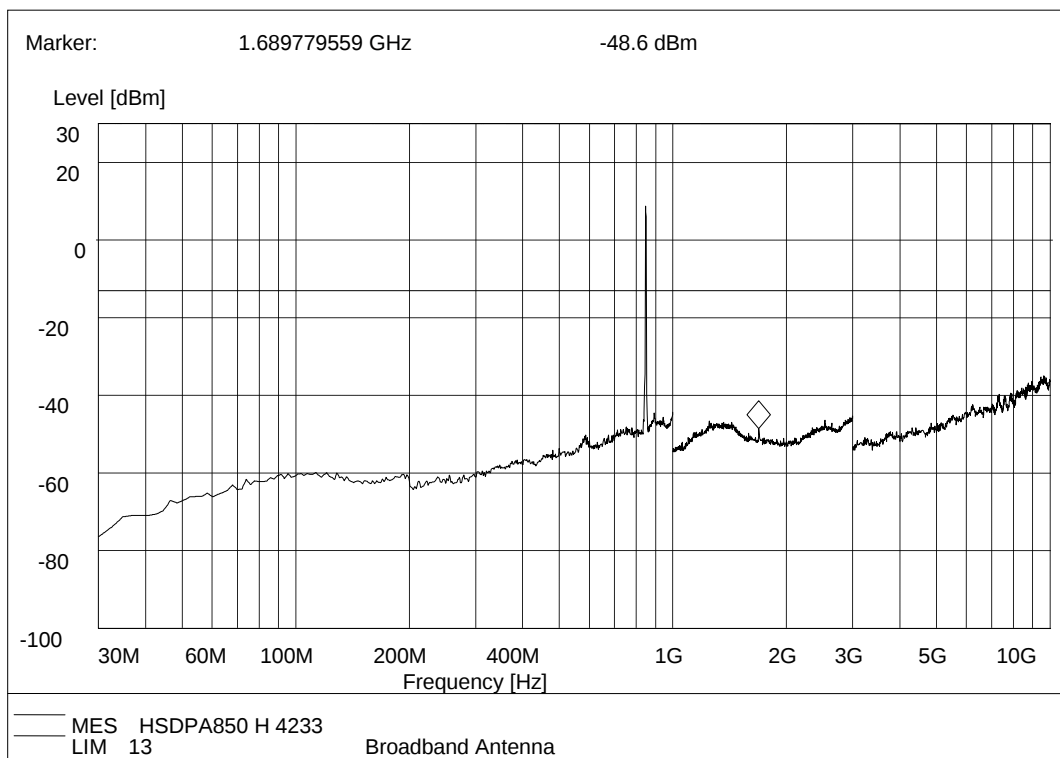


(Plot I.5: HSDPA 850MHz Channel = 4233, Test Antenna Horizontal)

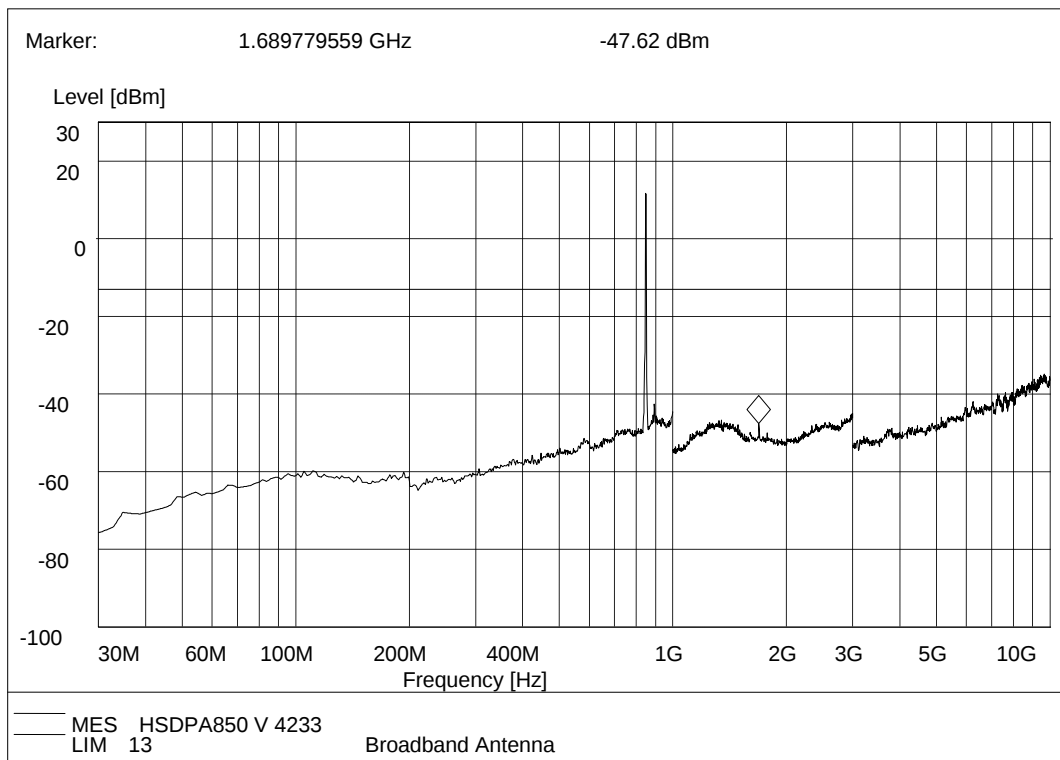


(Plot I.6: HSDPA 850MHz Channel = 4233, Test Antenna Vertical)

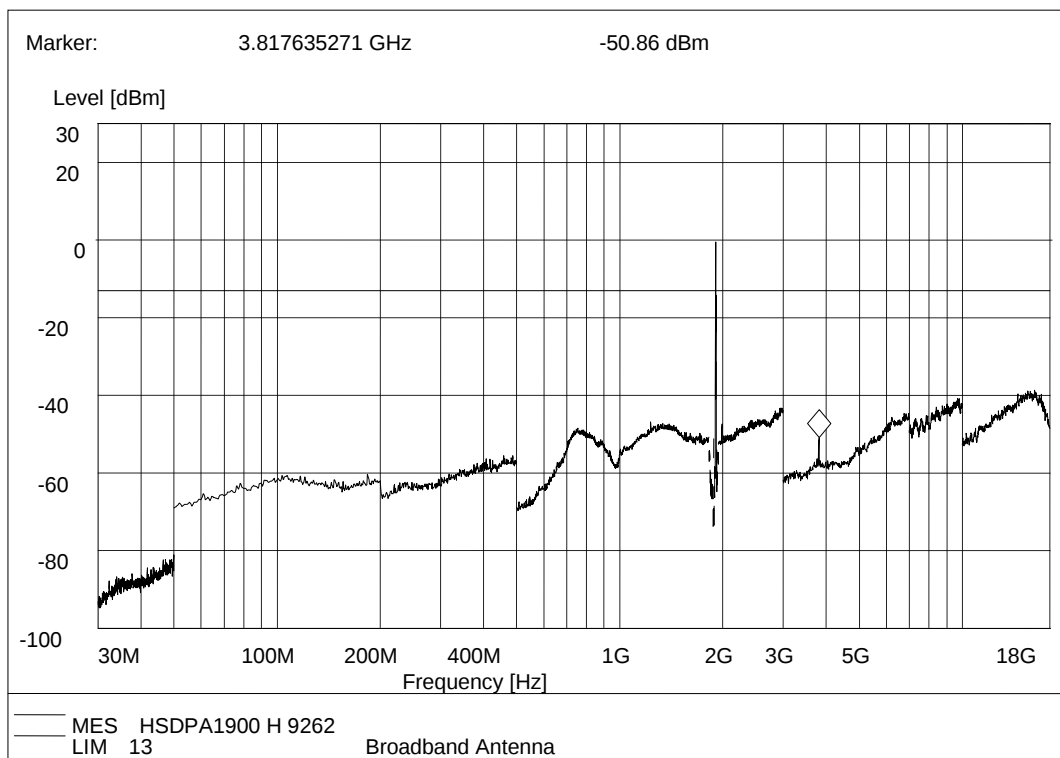


(Plot J.1: HSDPA 1900 MHz Channel = 9262, Test Antenna Horizontal)

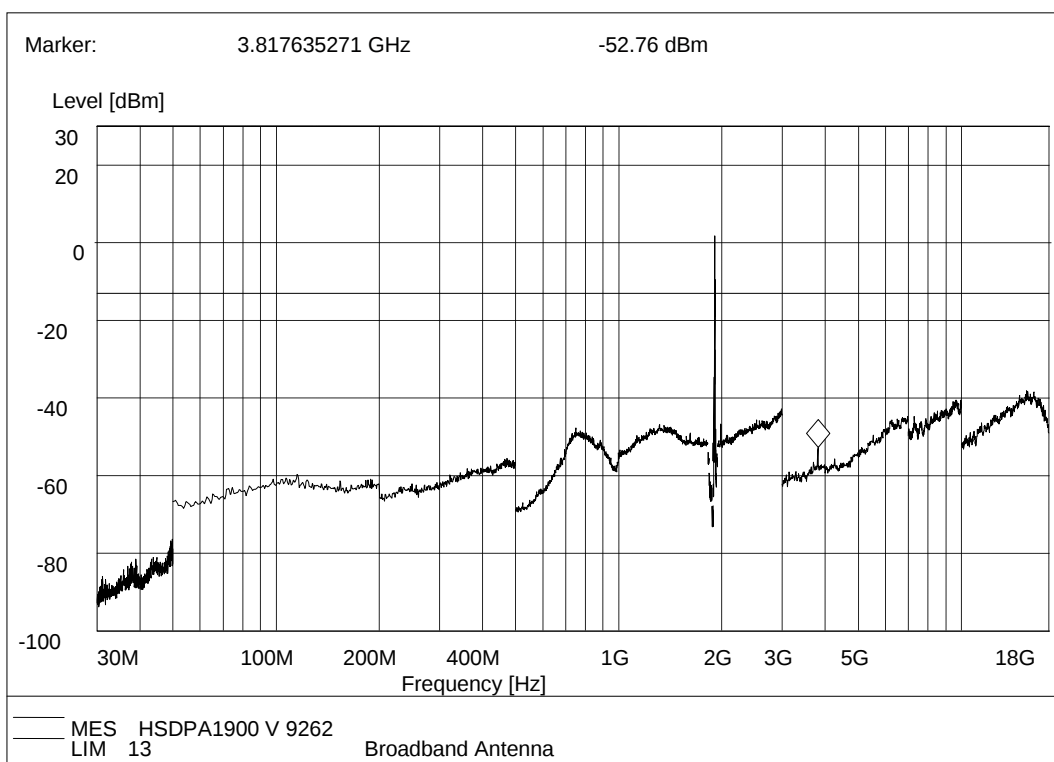


(Plot J.2: HSDPA 1900 MHz Channel = 9262, Test Antenna Vertical)

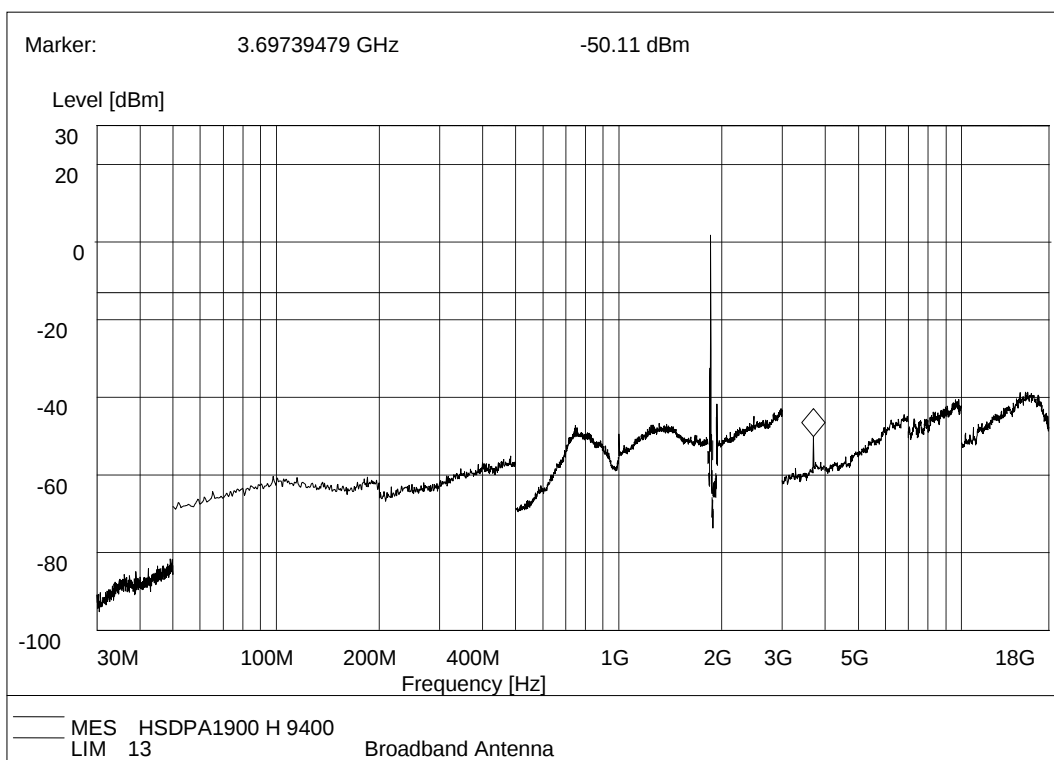


(Plot J.3: HSDPA 1900 MHz Channel = 9400, Test Antenna Horizontal)

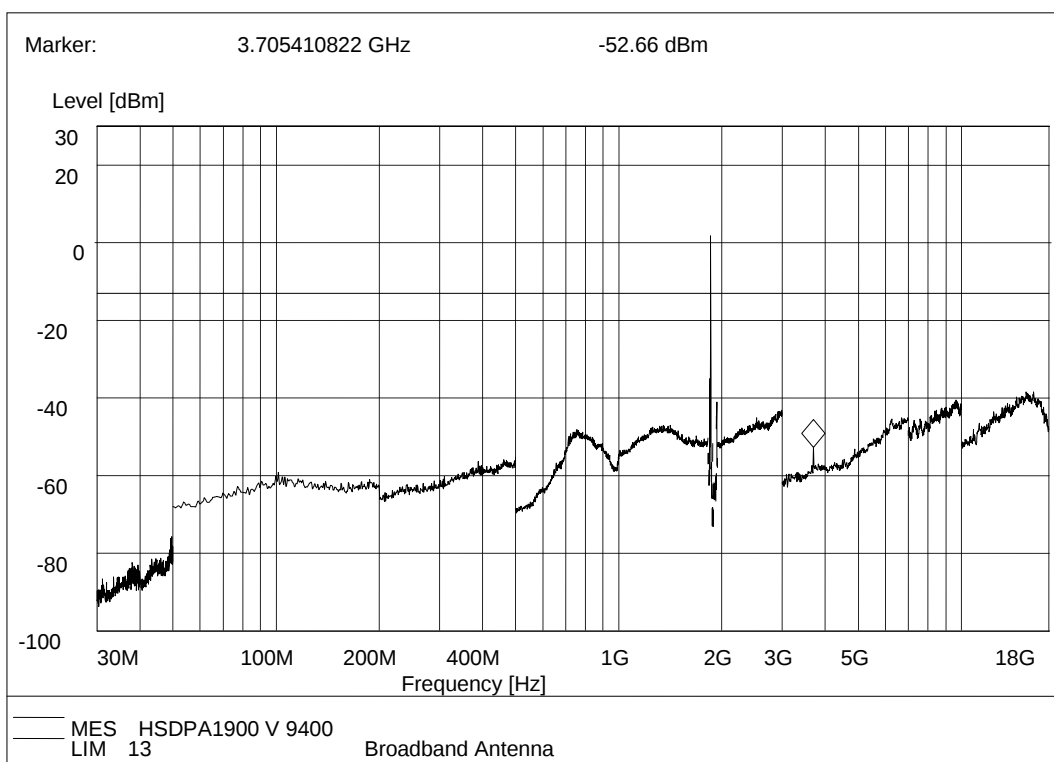

(Plot J.4: HSDPA 1900 MHz Channel = 9400, Test Antenna Vertical)

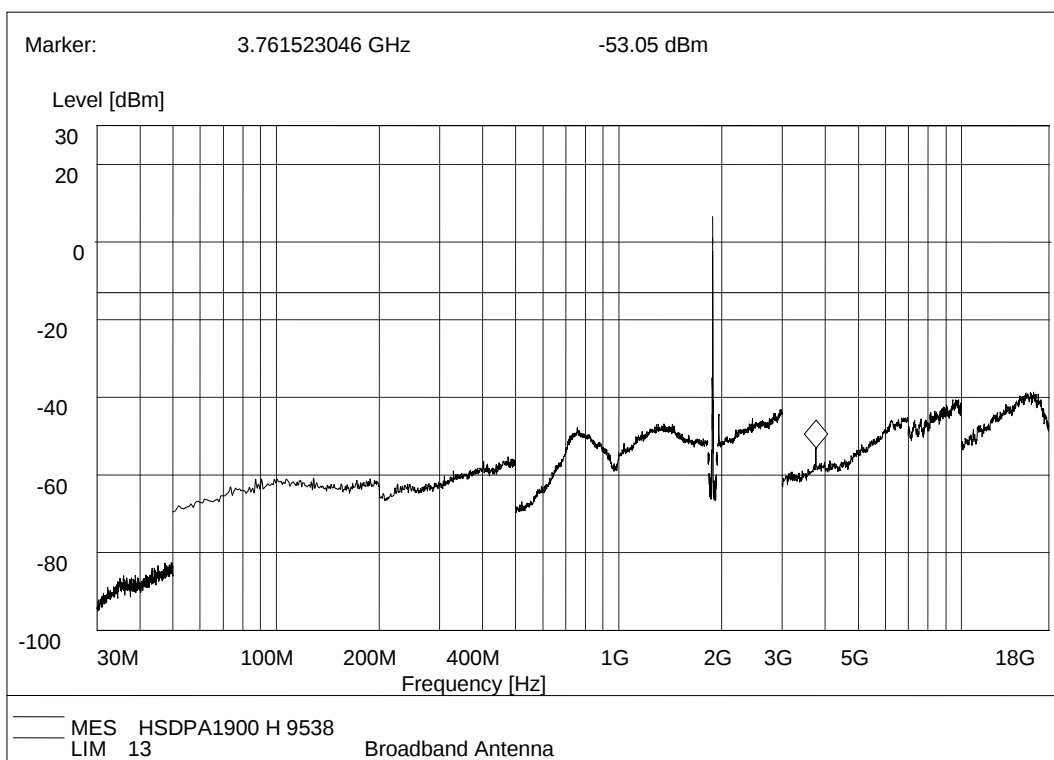



(Plot J.5: HSDPA 1900 MHz Channel = 9538, Test Antenna Horizontal)

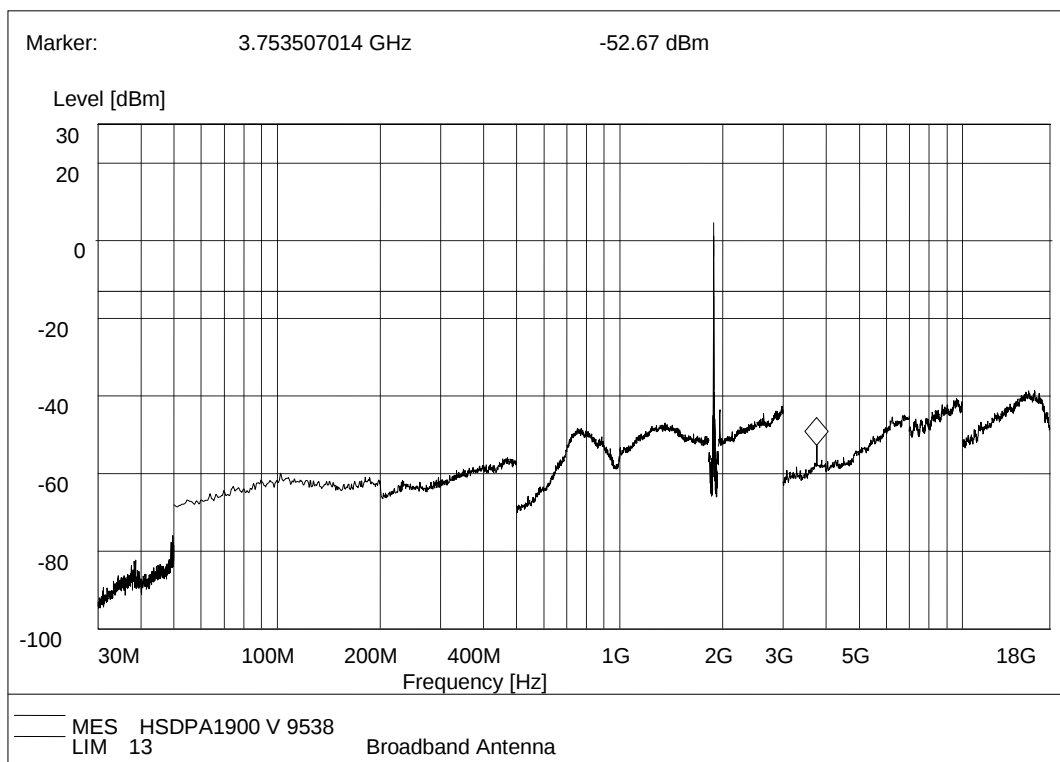

(Plot J.6: HSDPA 1900 MHz Channel = 9538, Test Antenna Vertica

Annex A Accreditation Certificate

 
China National Accreditation Service for Conformity Assessment
LABORATORY ACCREDITATION CERTIFICATE
(Registration No. CNAS L1659)
CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. <u>Building 28/29, Shigudong, Xili Industrial Area, Xili Street,</u> <u>Nanshan District, Shenzhen, Guangdong, China</u>
<i>is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing and calibration.</i> <i>The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.</i>
Date of Issue: 2012-09-29 Date of Expiry: 2015-09-28 Date of Initial Accreditation: 1999-08-03 Date of Update: 2012-09-29
 Signed on behalf of China National Accreditation Service for Conformity Assessment
China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).
No.CNAS AL 2 0005210

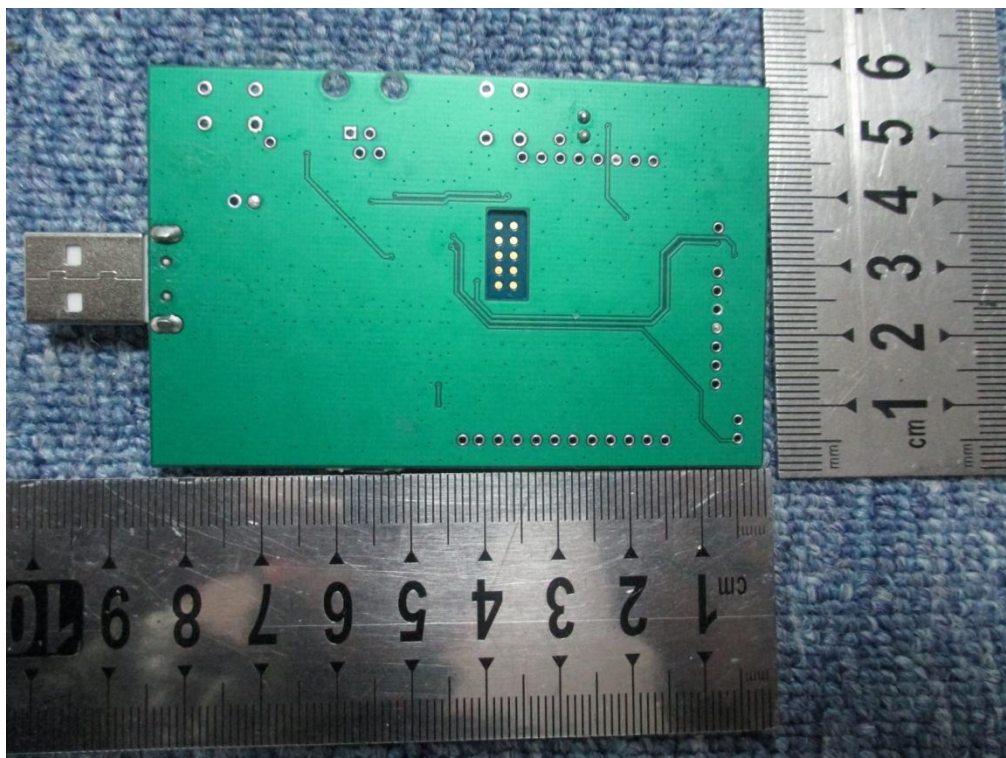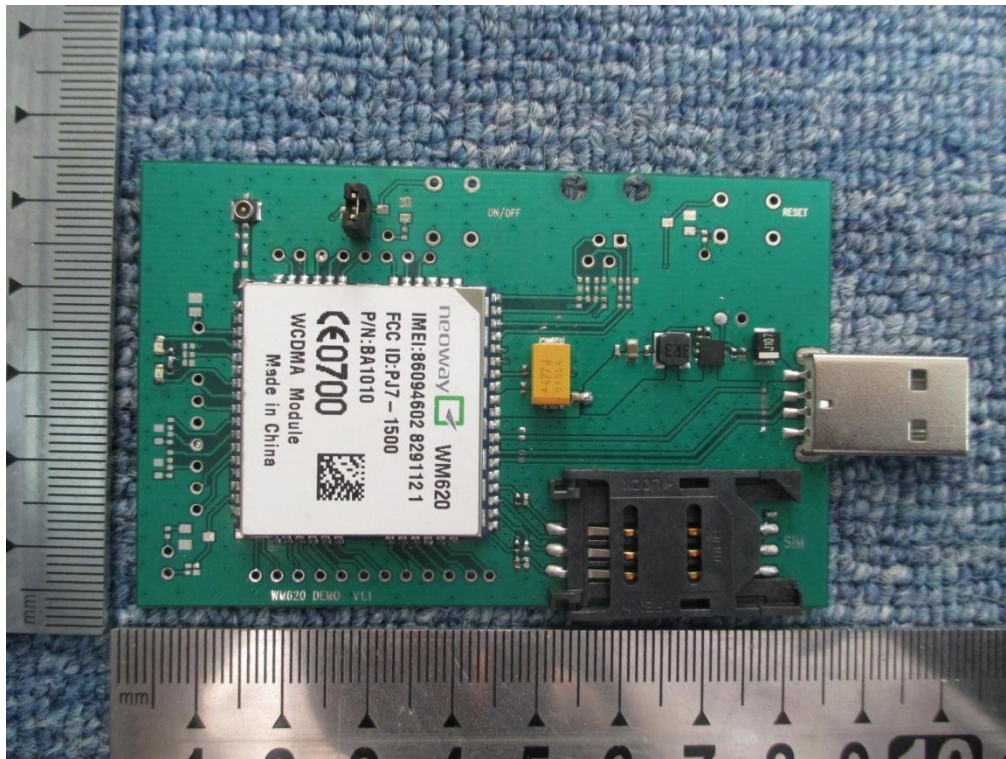Annex B PHOTOGRAPHS OF THE EUT

Annex C PHOTOGRAPHS OF THE TEST SETUP

1. Conducted Measurement Setup



2. Radiated Measurement Setup



**** END OF REPORT ****