


Report No.: TRE1706002502 Page: 113 of 268 Issued: 2017-06-27

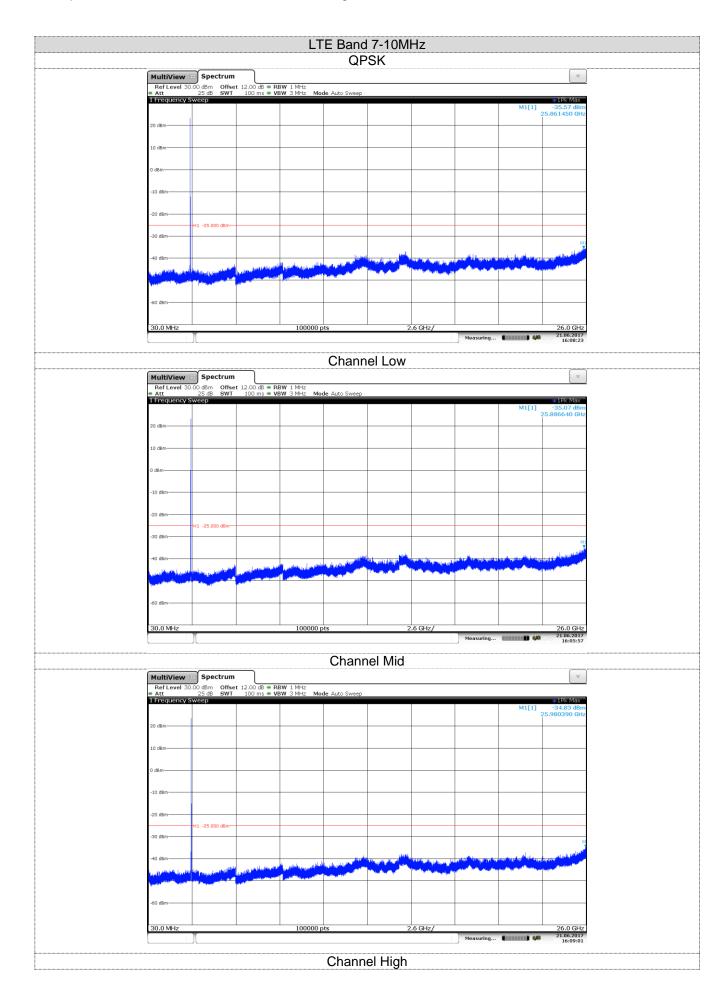


Report No.: TRE1706002502 Page: 114 of 268 Issued: 2017-06-27

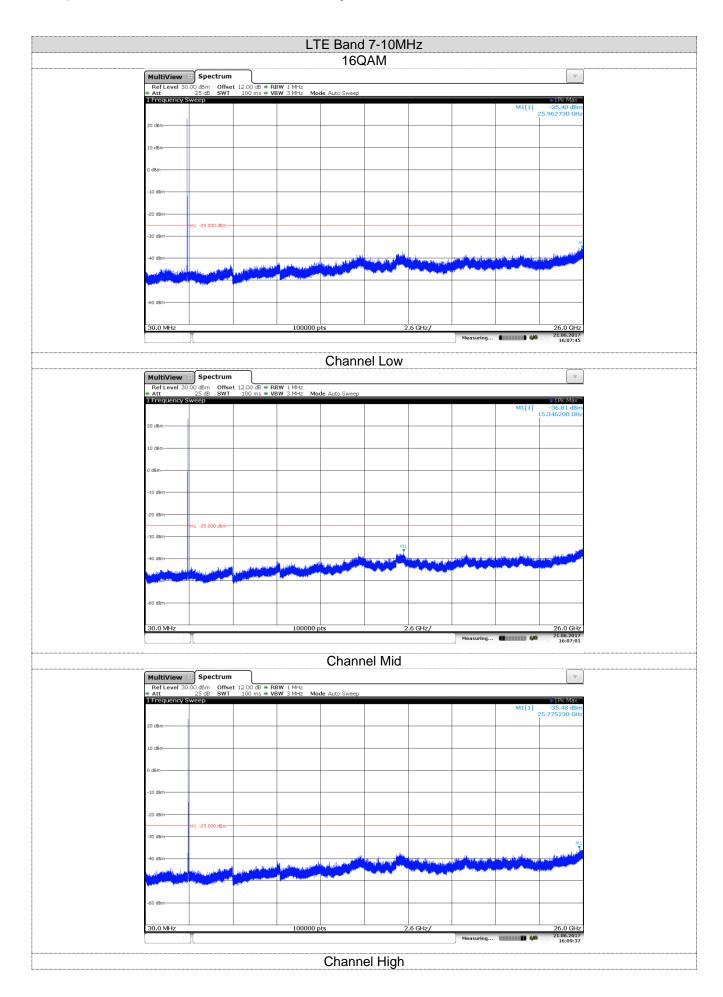


Report No.: TRE1706002502 Page: 115 of 268 Issued: 2017-06-27

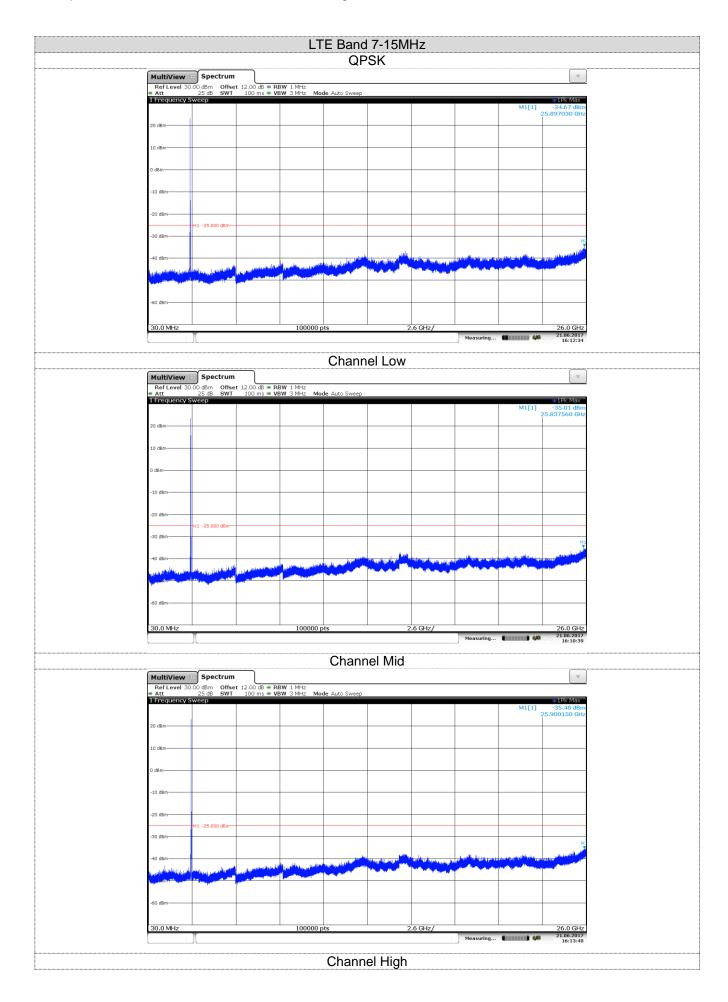


Report No.: TRE1706002502 Page: 116 of 268 Issued: 2017-06-27

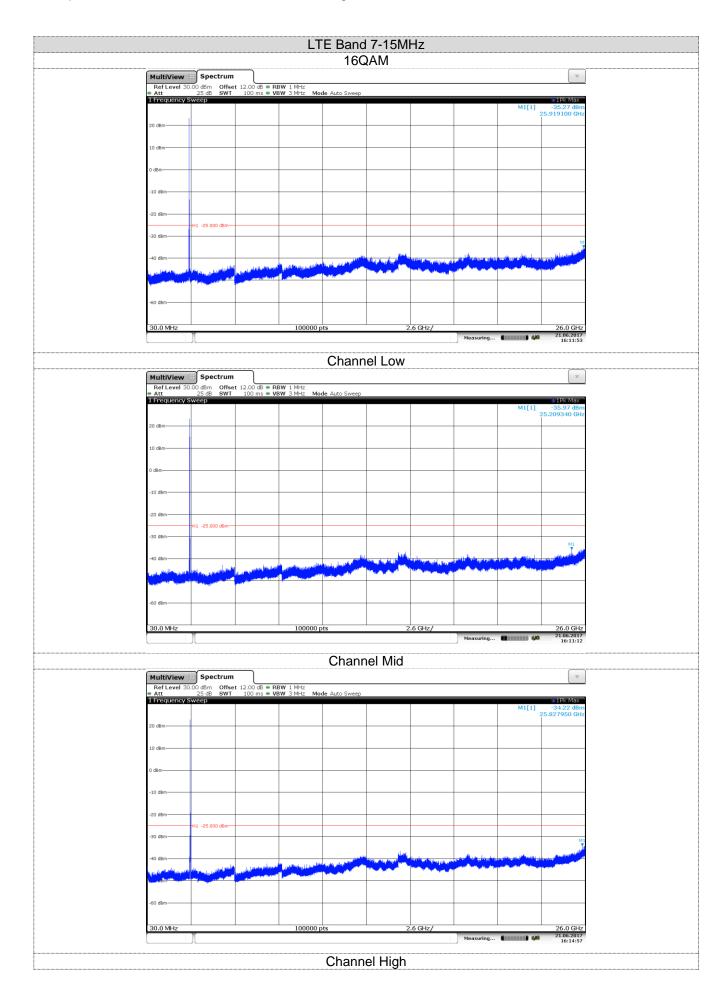


Report No.: TRE1706002502 Page: 117 of 268 Issued: 2017-06-27

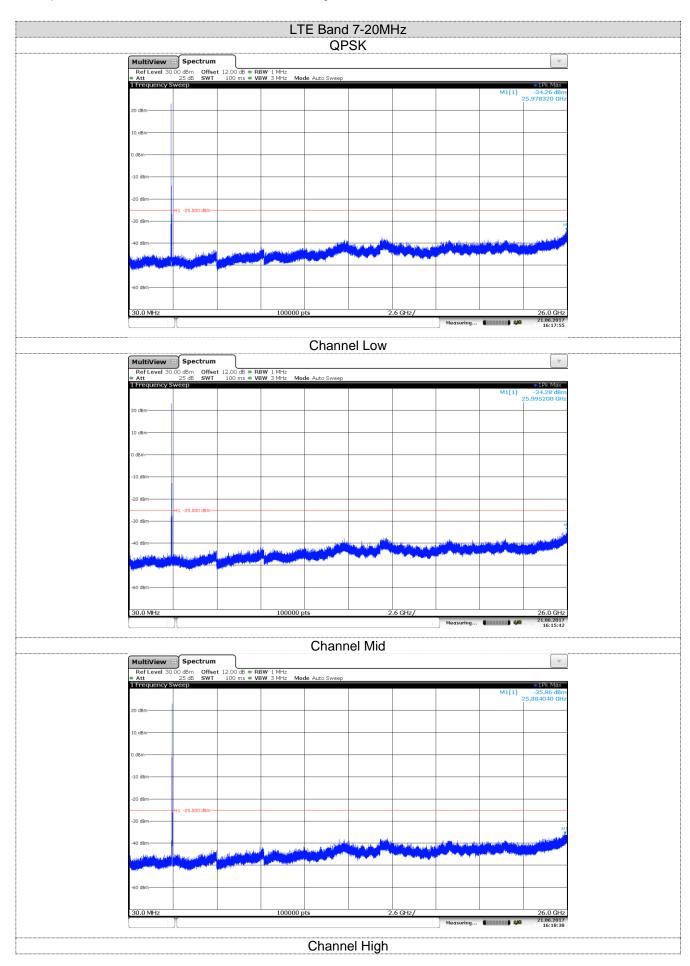


Report No.: TRE1706002502 Page: 118 of 268 Issued: 2017-06-27

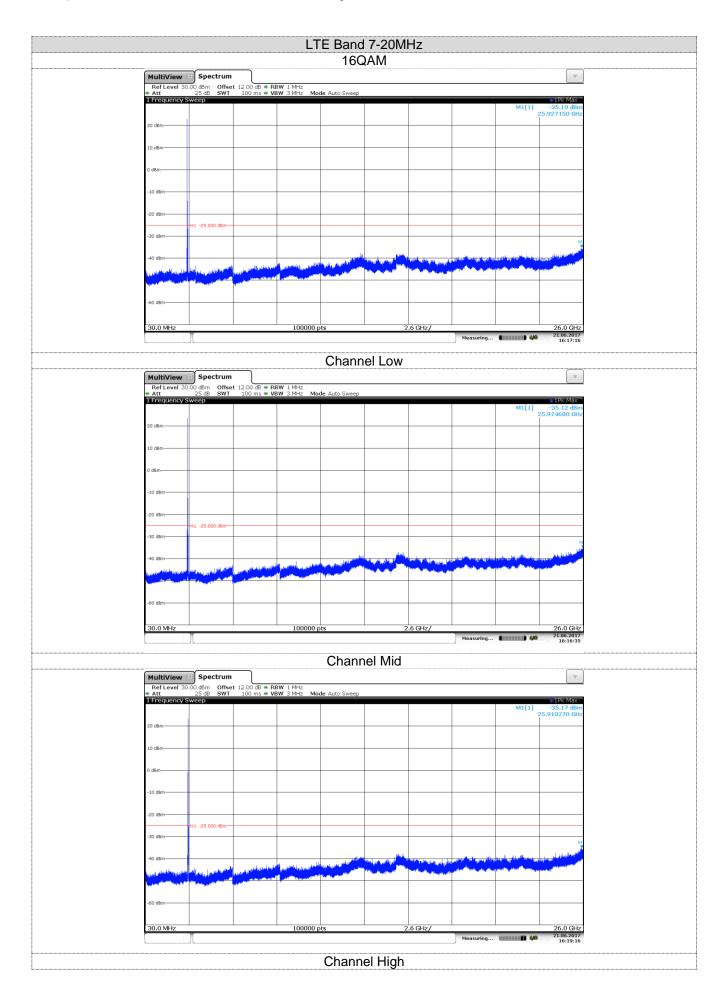


Report No.: TRE1706002502 Page: 119 of 268 Issued: 2017-06-27

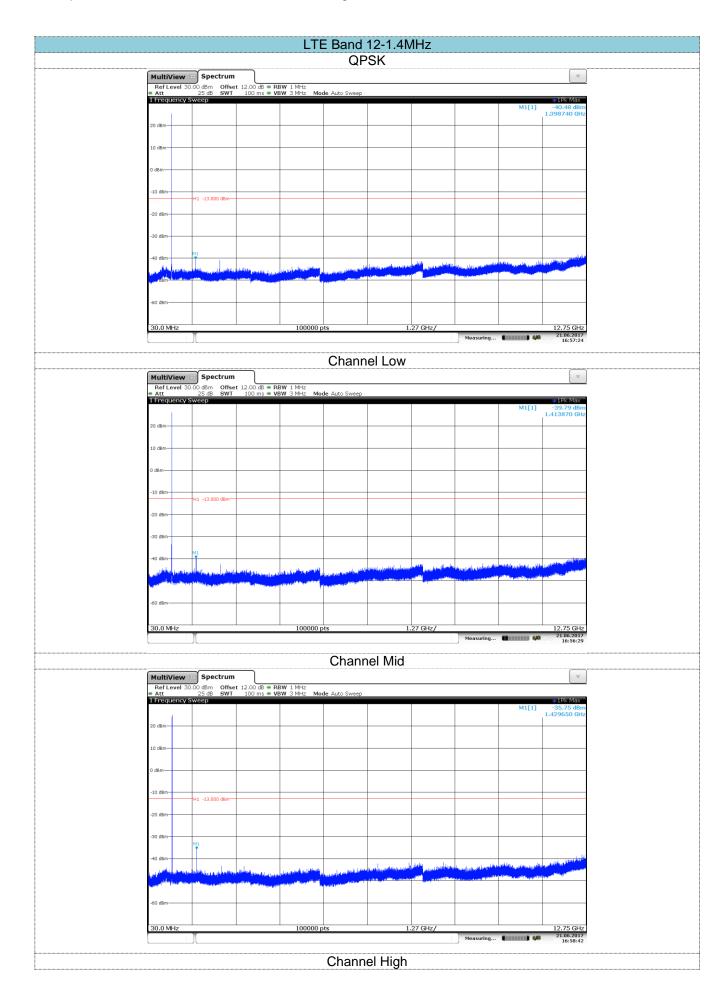


Report No.: TRE1706002502 Page: 120 of 268 Issued: 2017-06-27

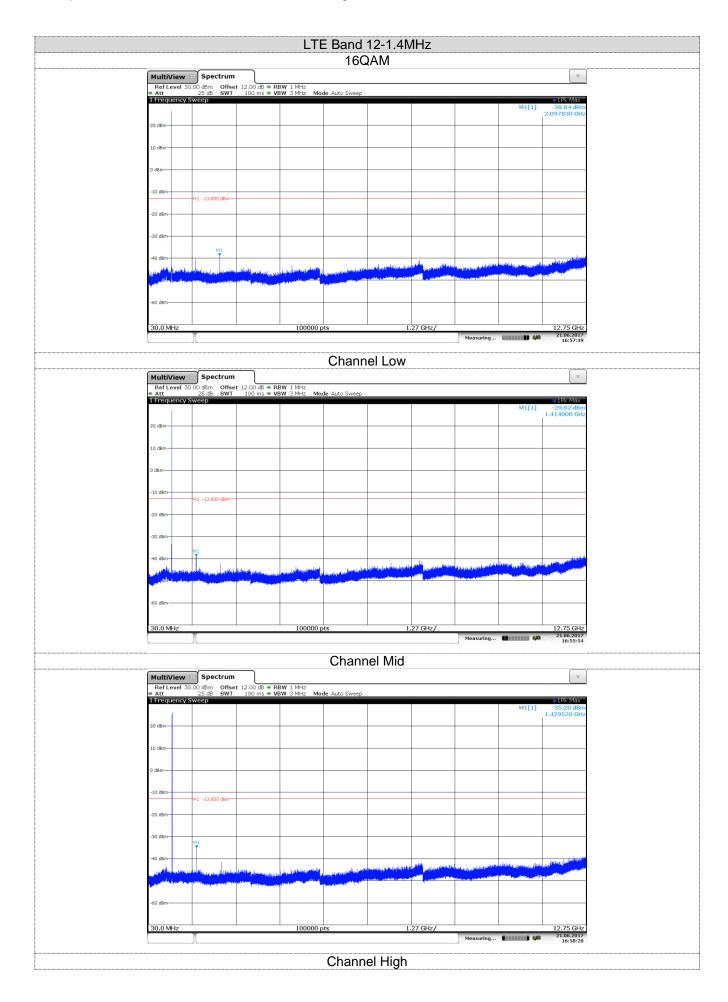


Report No.: TRE1706002502 Page: 121 of 268 Issued: 2017-06-27

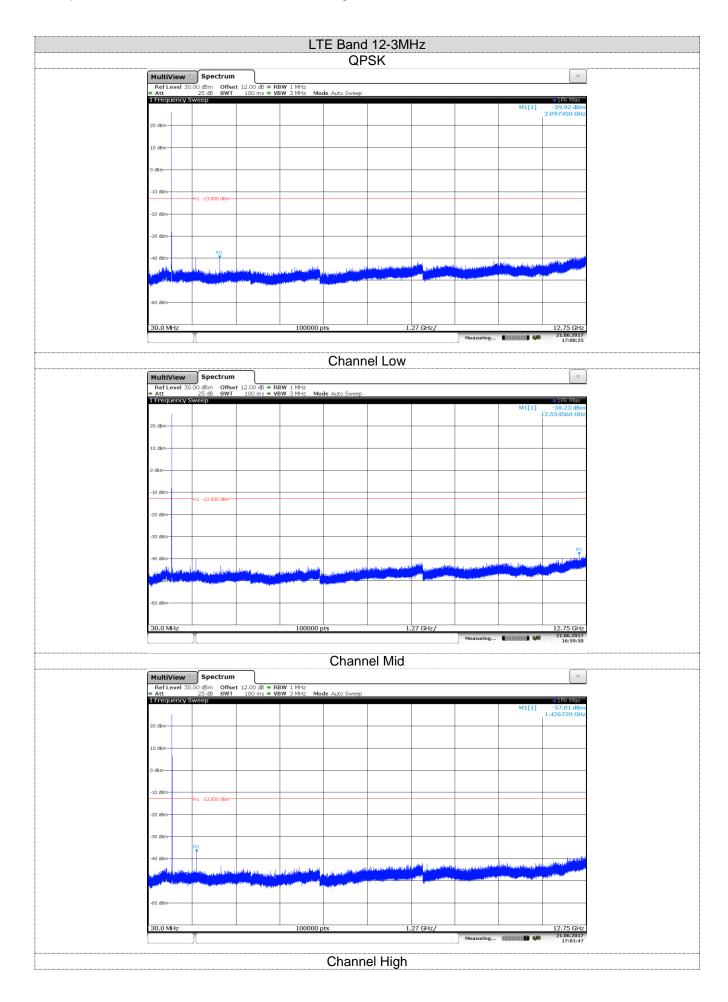


Report No.: TRE1706002502 Page: 122 of 268 Issued: 2017-06-27

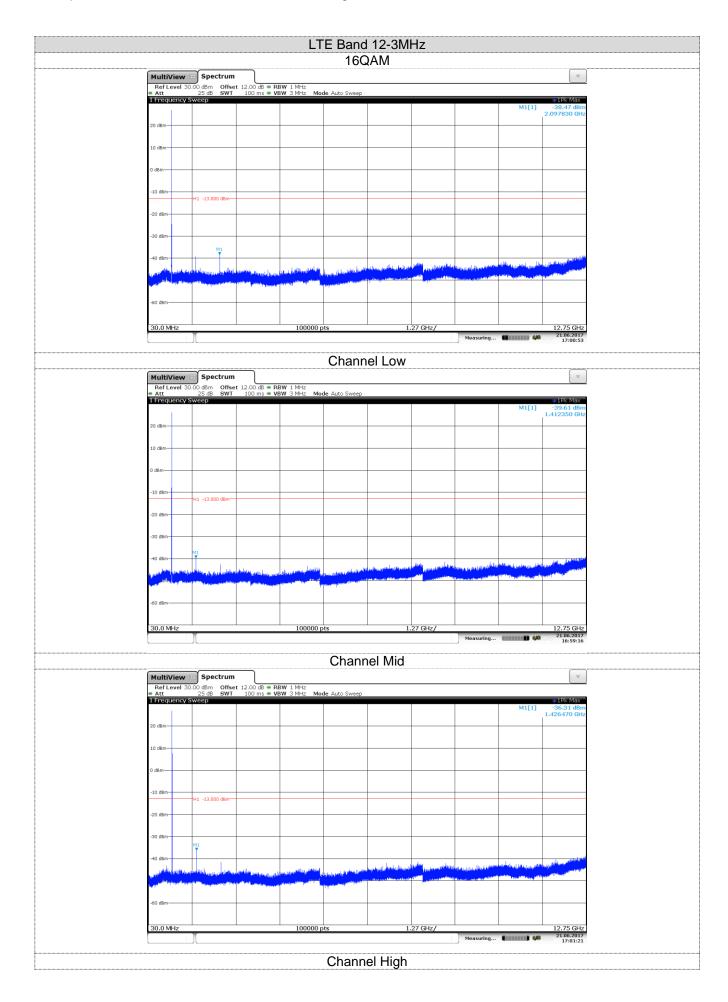


Report No.: TRE1706002502 Page: 123 of 268 Issued: 2017-06-27

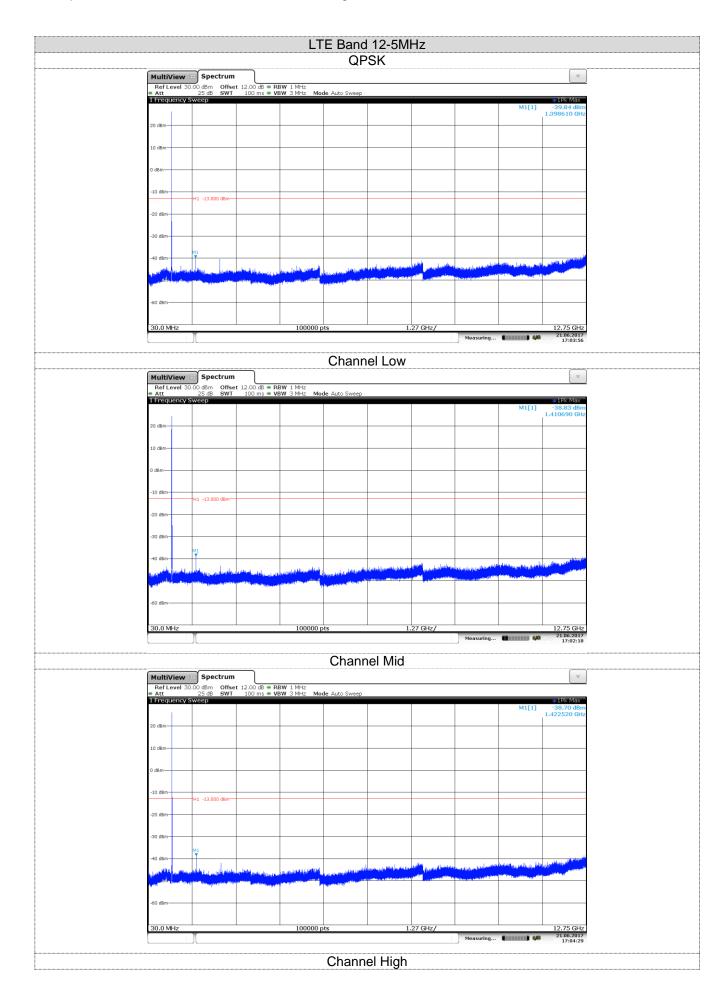


Report No.: TRE1706002502 Page: 124 of 268 Issued: 2017-06-27

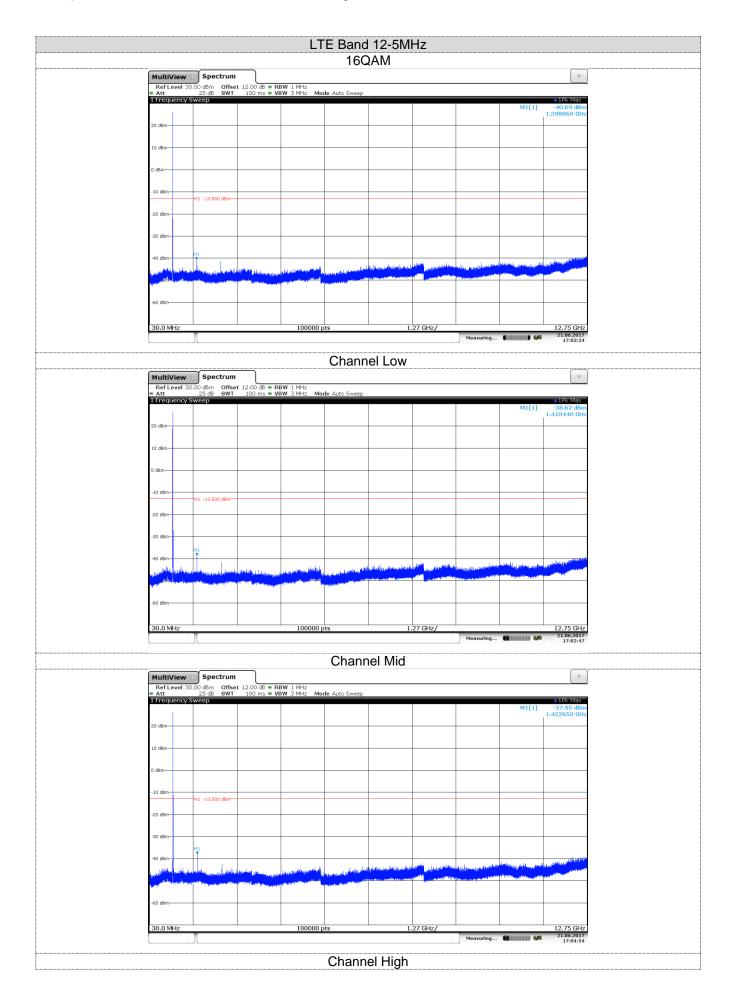


Report No.: TRE1706002502 Page: 125 of 268 Issued: 2017-06-27

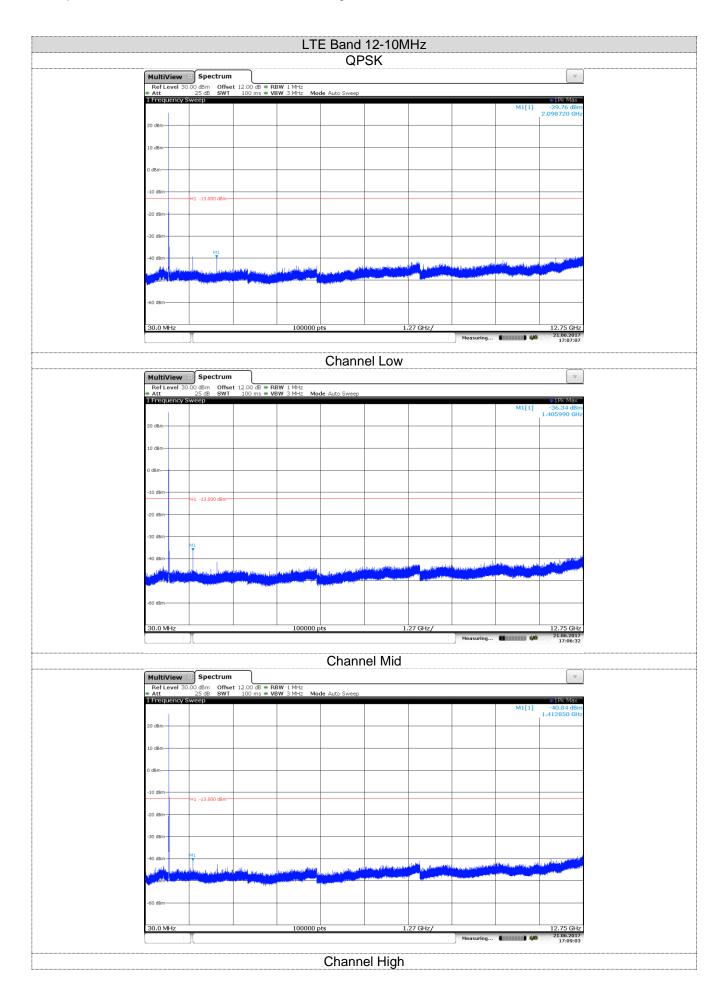


Report No.: TRE1706002502 Page: 126 of 268 Issued: 2017-06-27

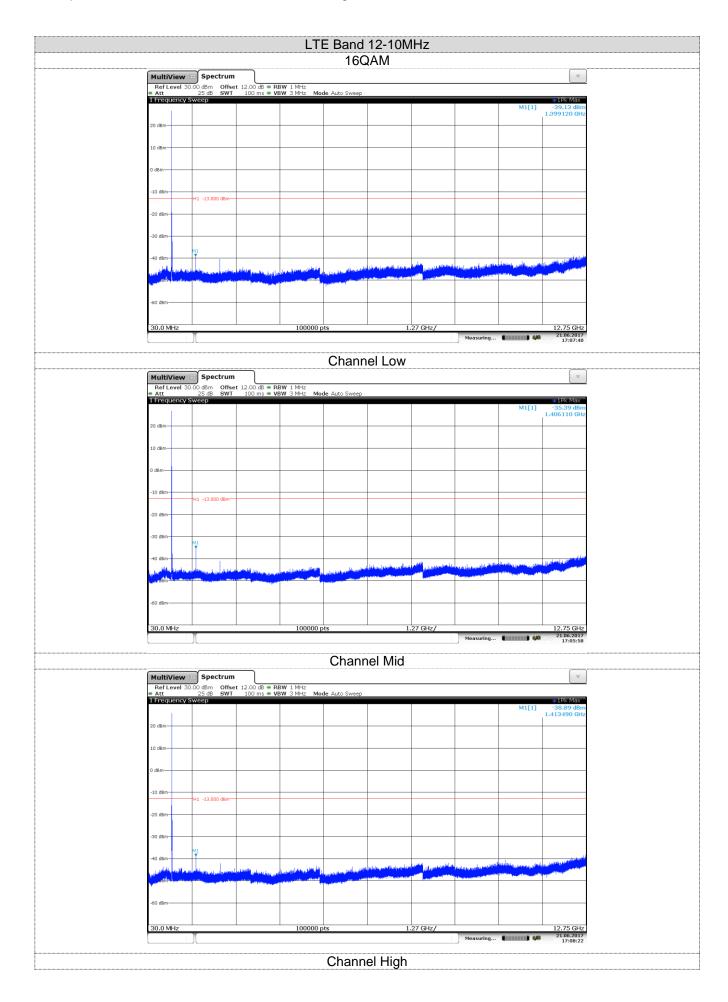


Report No.: TRE1706002502 Page: 127 of 268 Issued: 2017-06-27

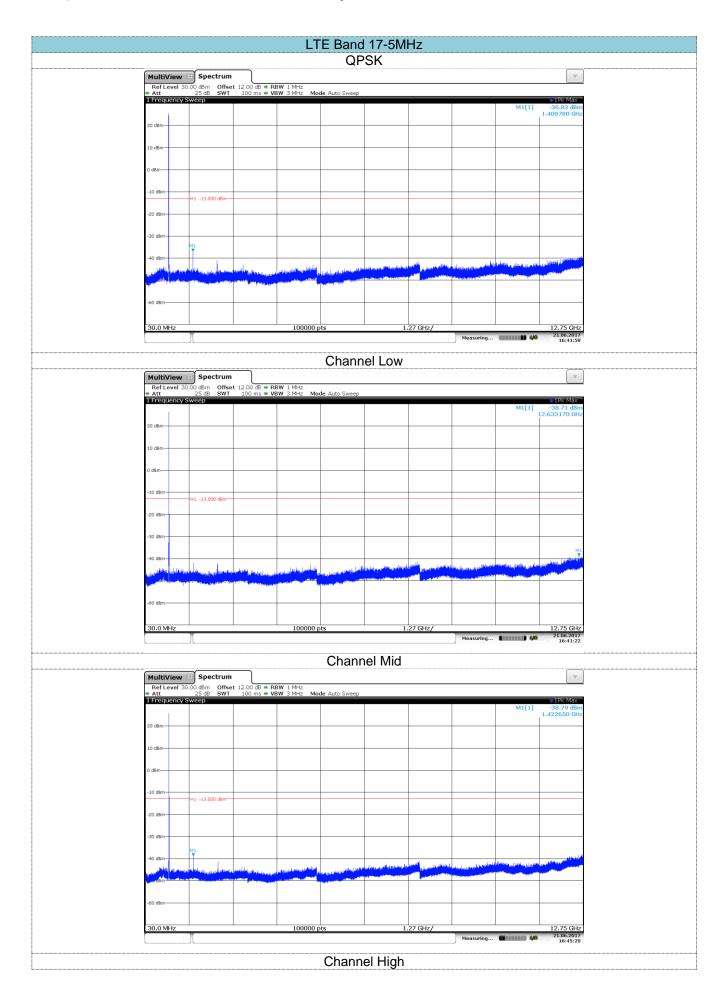


Report No.: TRE1706002502 Page: 128 of 268 Issued: 2017-06-27

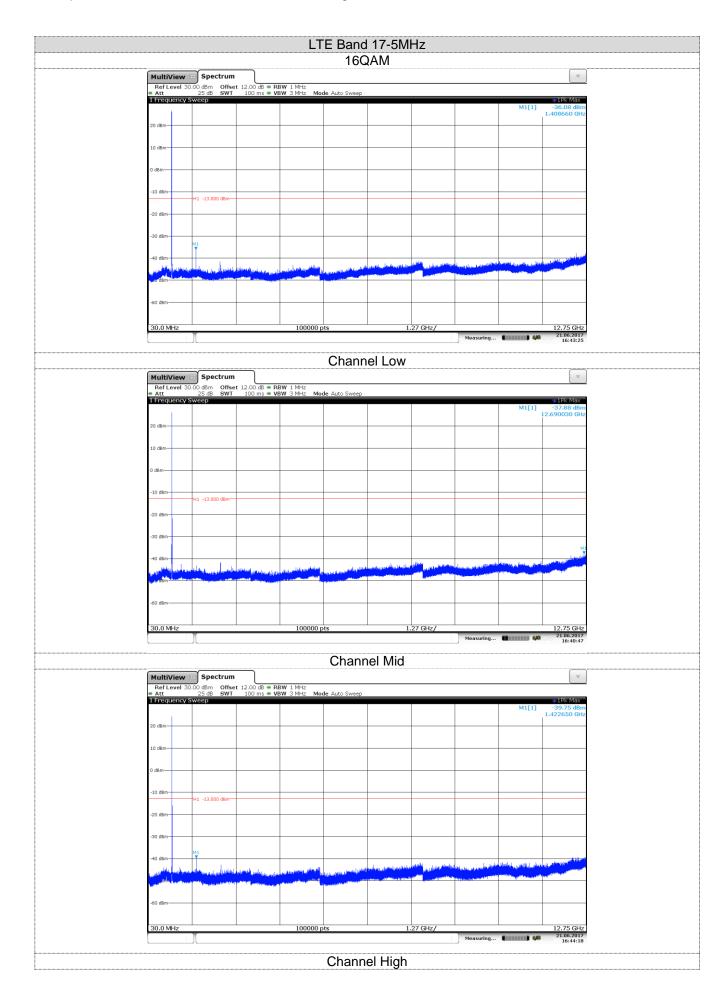

Report No.: TRE1706002502 Page: 129 of 268 Issued: 2017-06-27

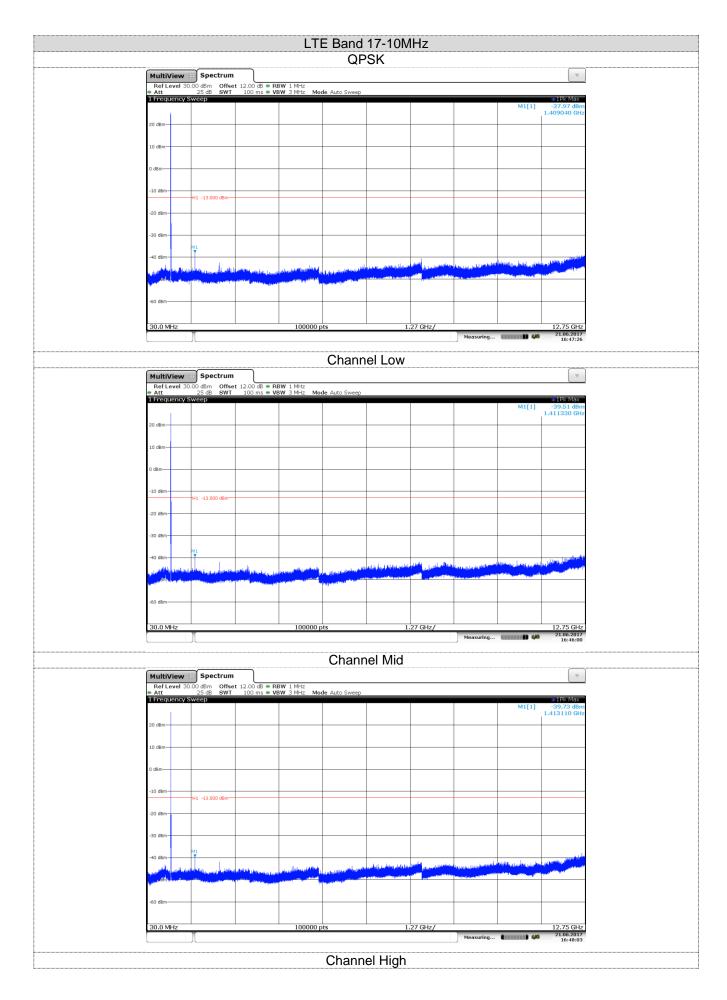

Report No.: TRE1706002502 Page: 130 of 268 Issued: 2017-06-27

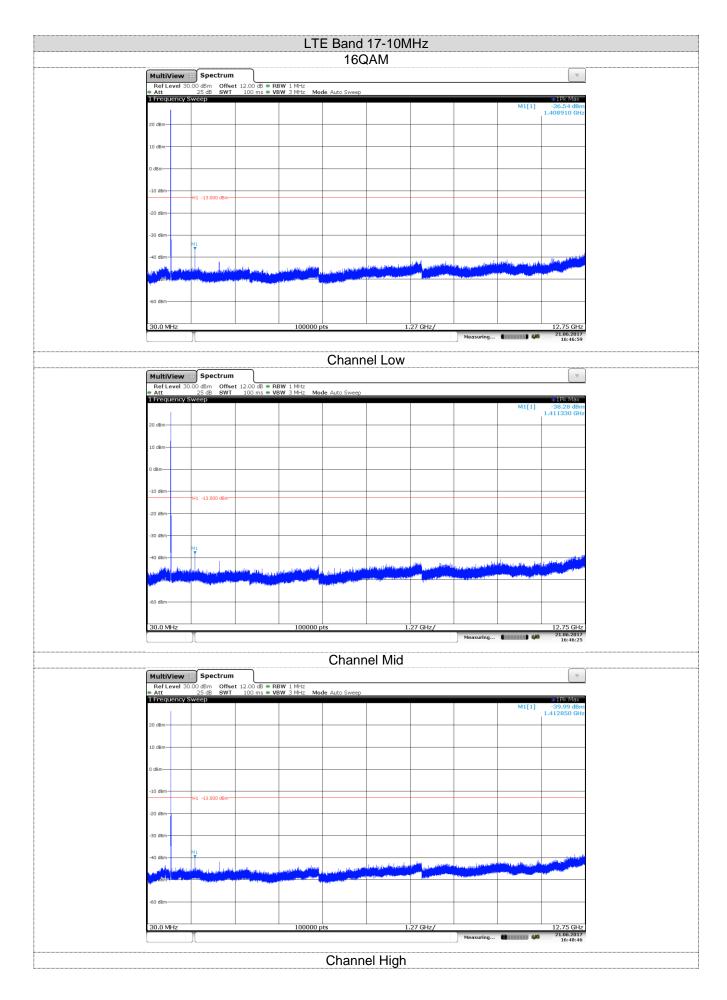

Report No.: TRE1706002502 Page: 131 of 268 Issued: 2017-06-27

# 5.4. Band Edge

### **LIMIT**


Part 24.238 and Part 22.917 and Part 27.53h(1) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### LTE Band 7

Part 27.53 m(4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

#### **TEST CONFIGURATION**

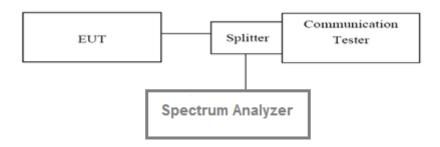


## **TEST PROCEDURE**

- 1. The RF output of the transceiver was connected to a spectrum analyzer through appropriateattenuation.
- 2. The band edges of low and high channels for the highest RF powers were measured. Set RBW>= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 3. Set spectrum analyzer with RMS detector.


## **TEST MODE:**

Please refer to the clause 3.3


### **TEST RESULTS**

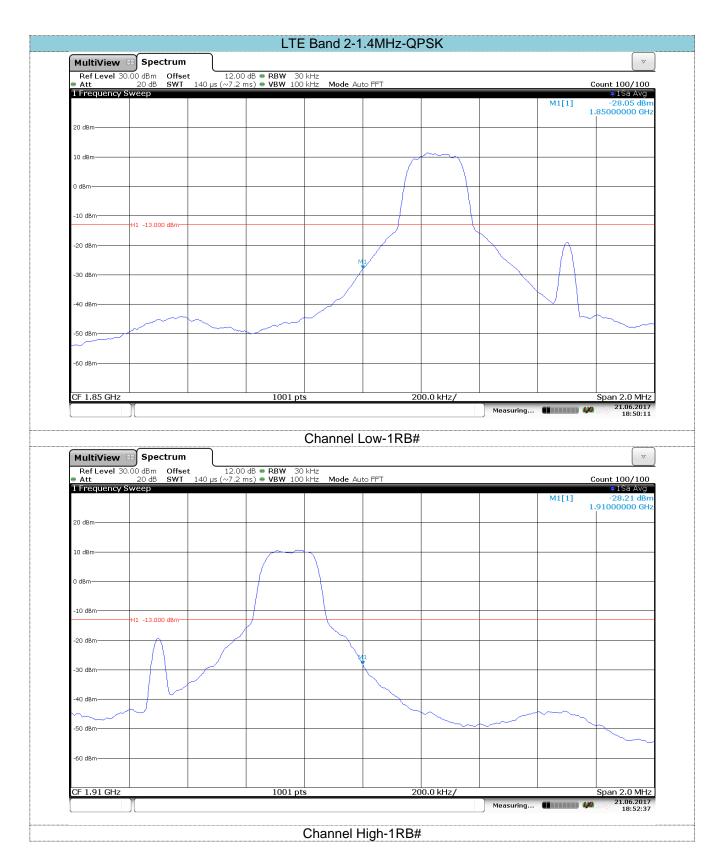





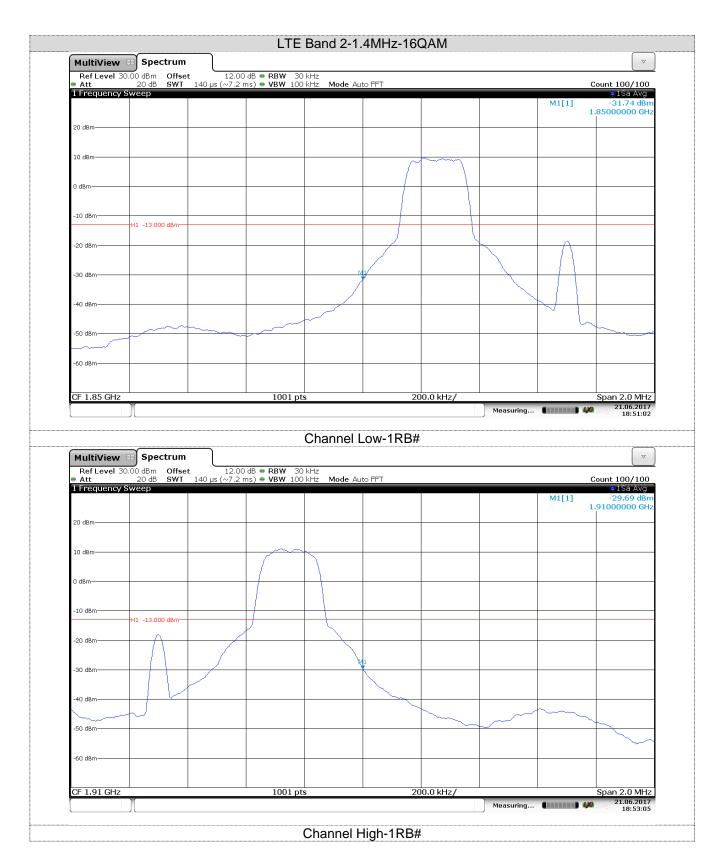





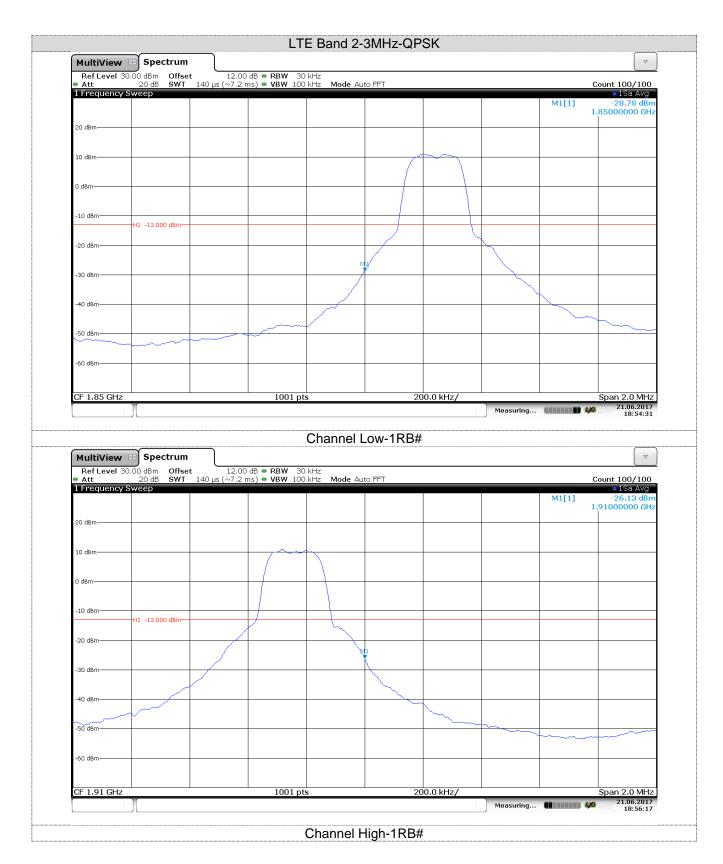

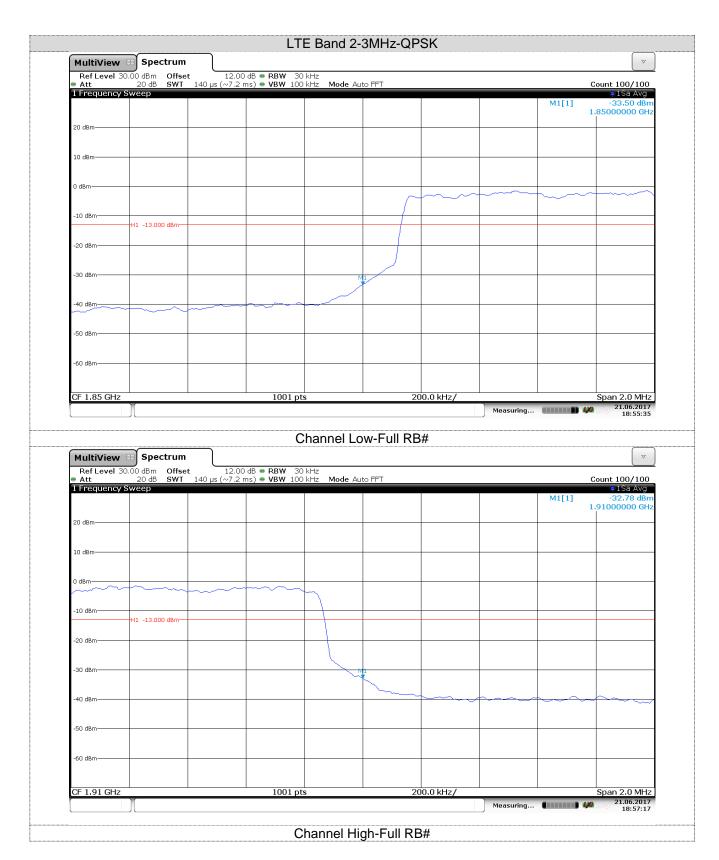


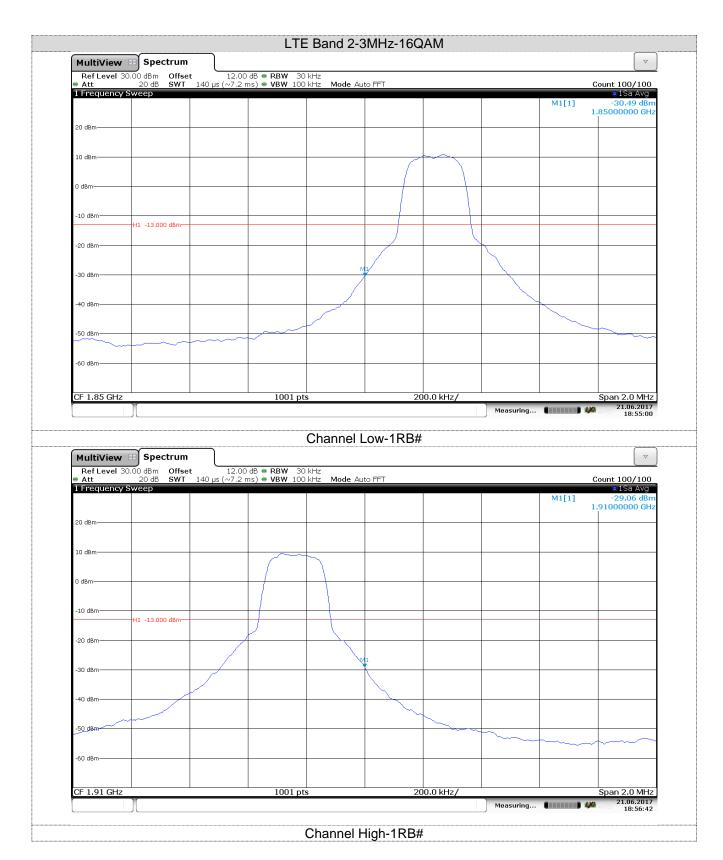

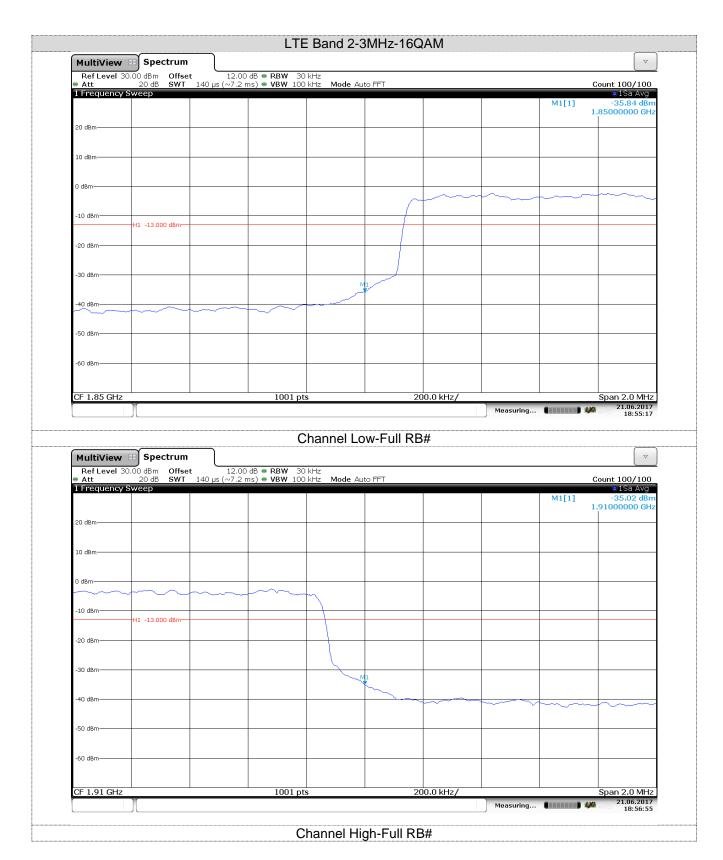


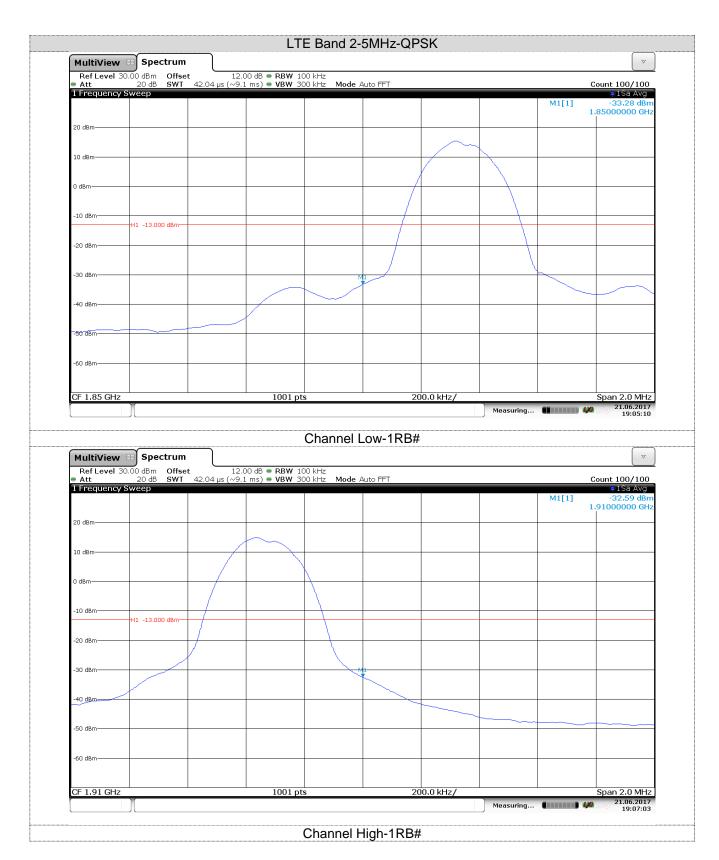





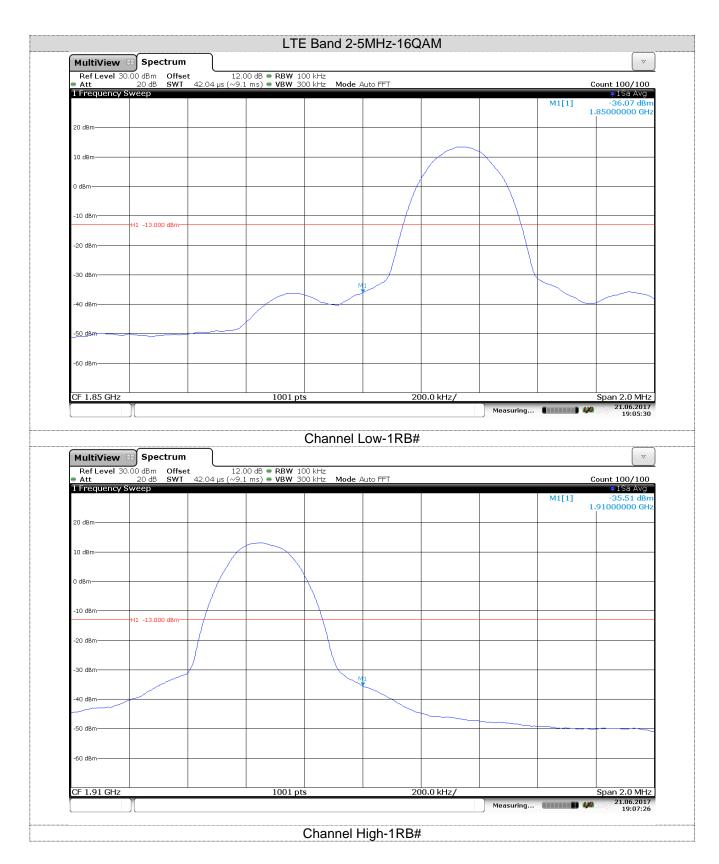





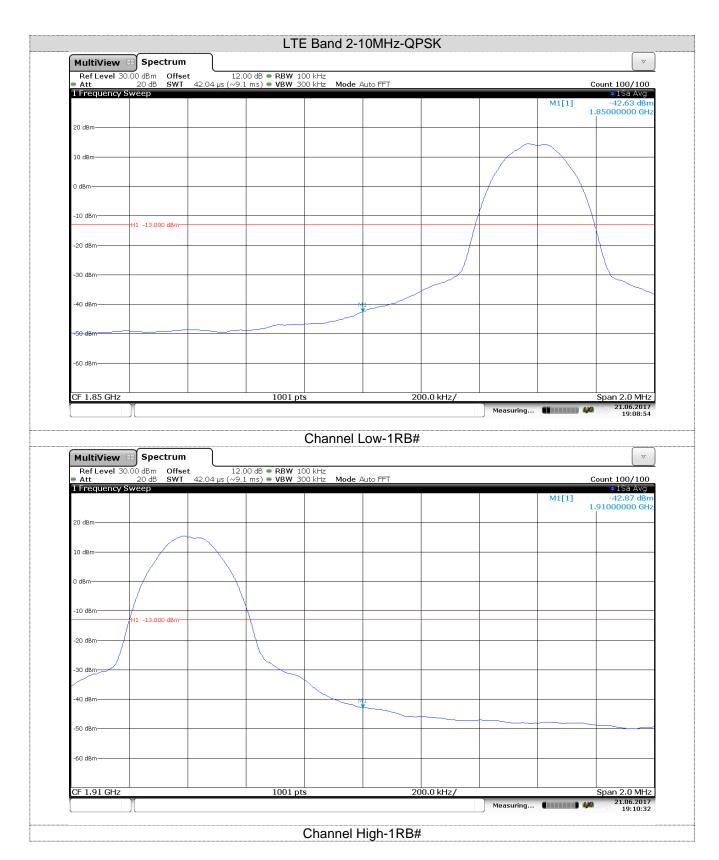


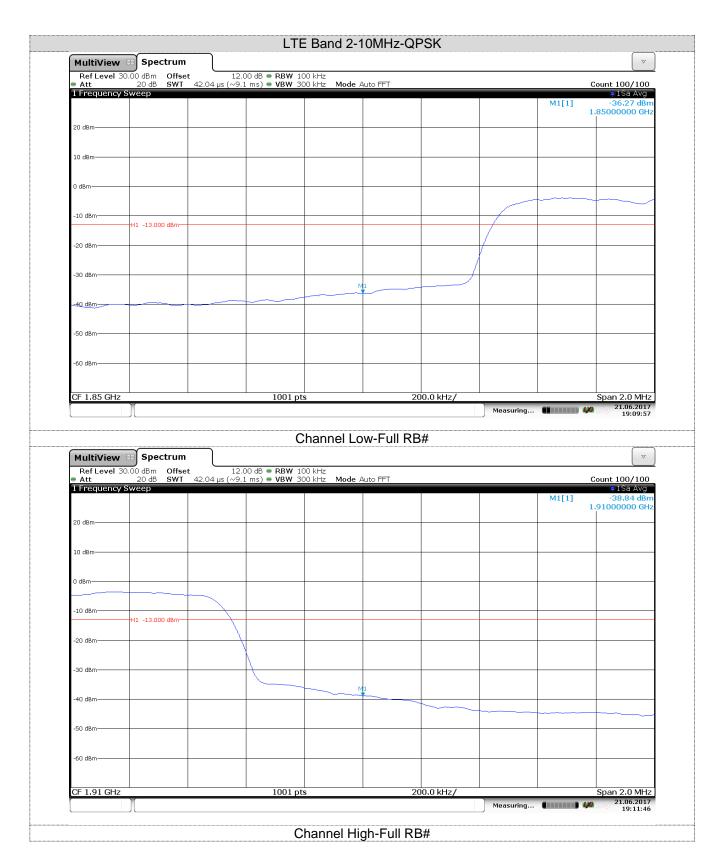

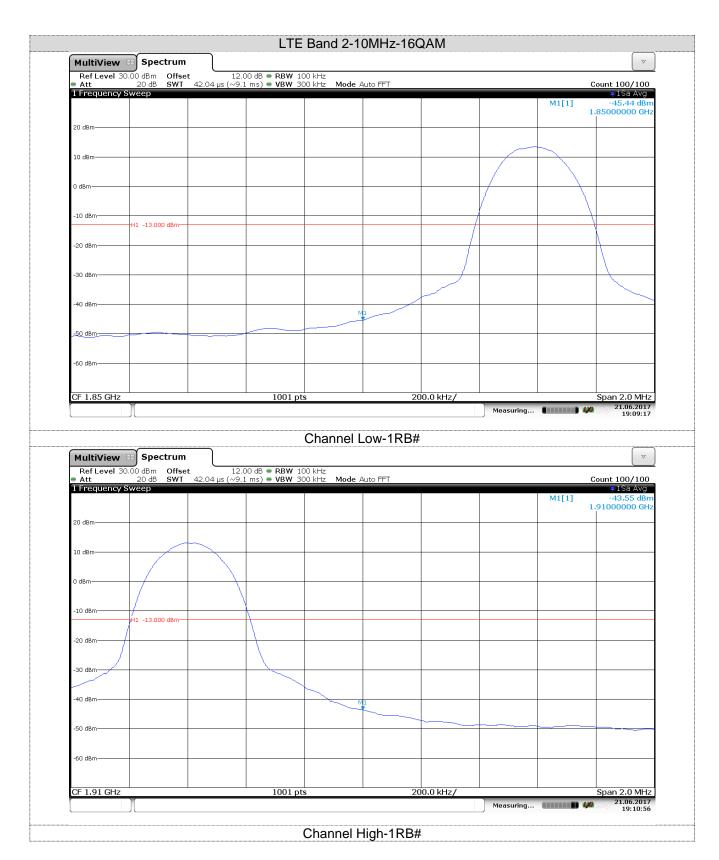

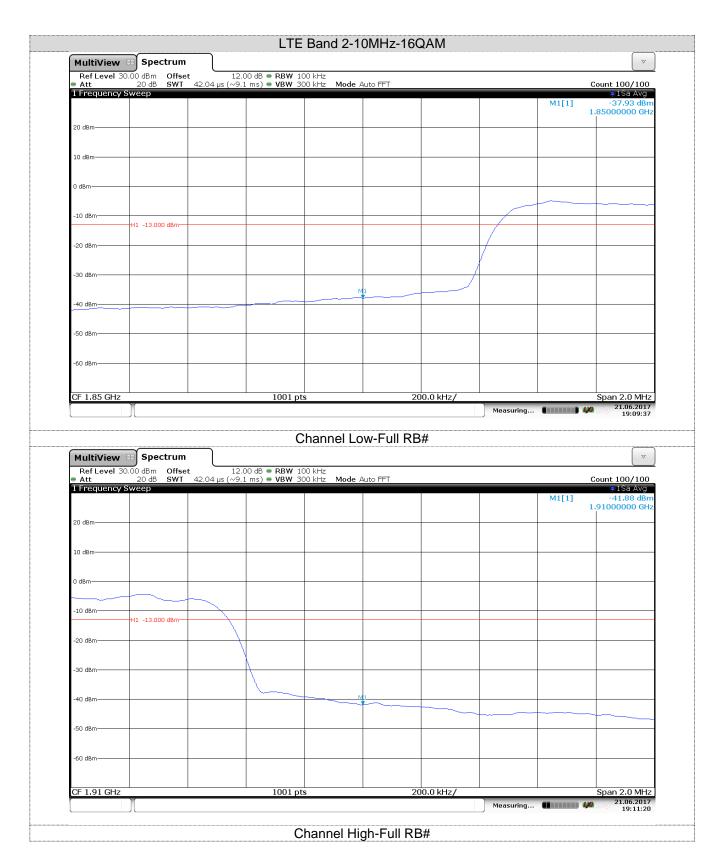


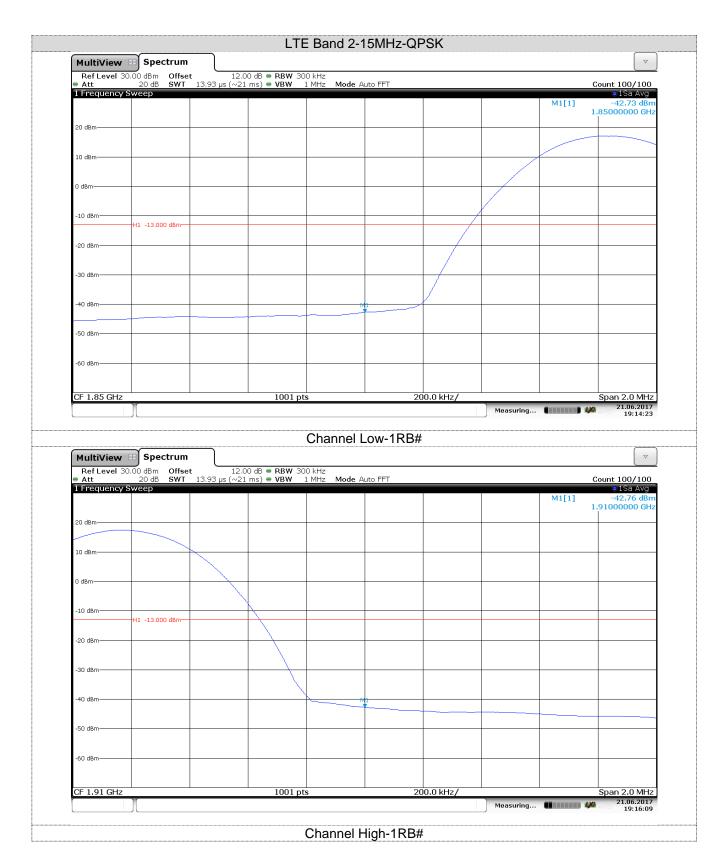

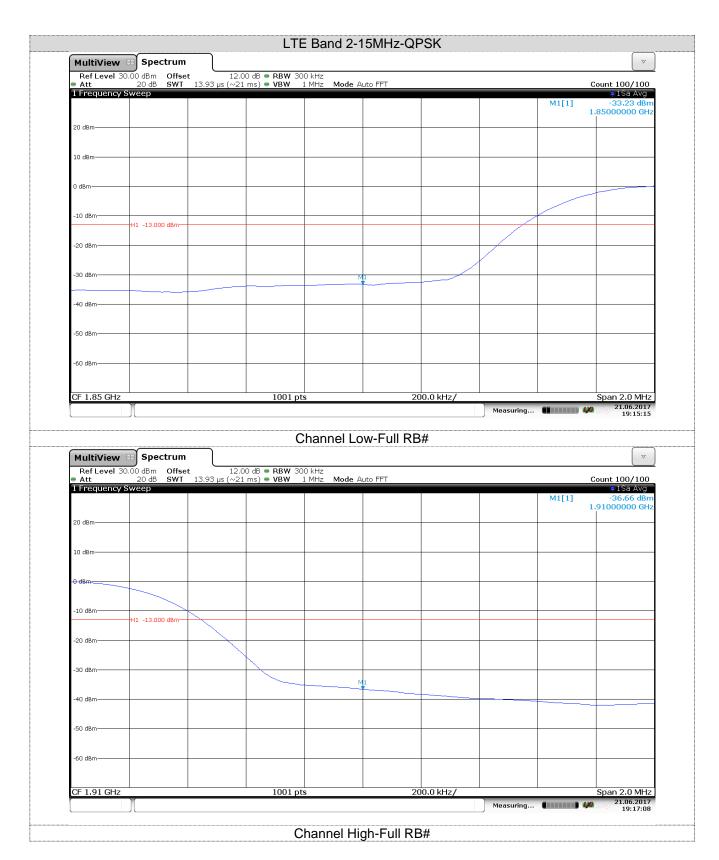

Report No.: TRE1706002502 Page: 150 of 268 Issued: 2017-06-27



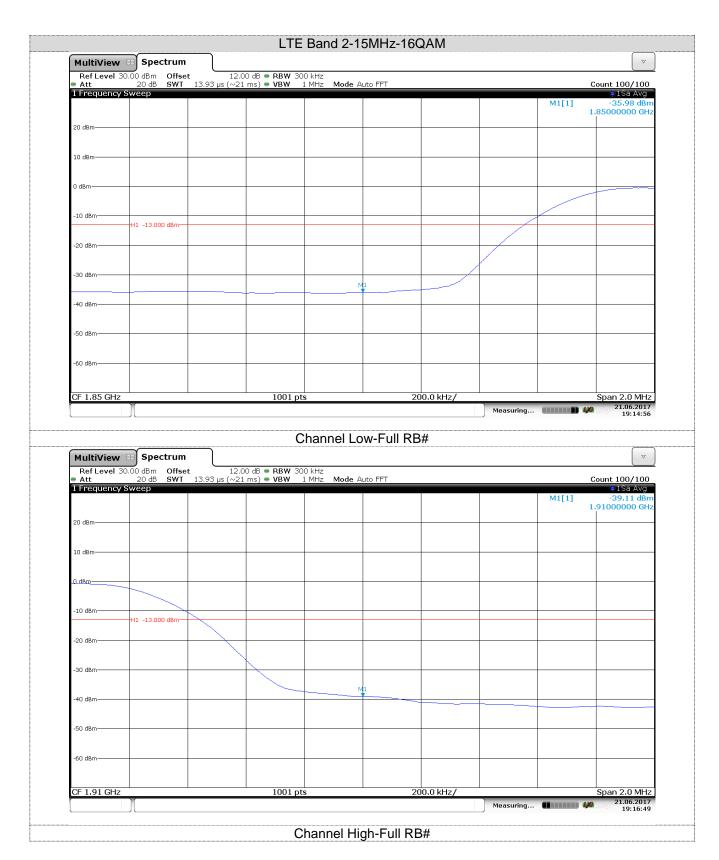

Report No.: TRE1706002502 Page: 152 of 268 Issued: 2017-06-27

