



Report No.: TRE1706002502 Page: 196 of 268 Issued: 2017-06-27




Report No.: TRE1706002502 Page: 197 of 268 Issued: 2017-06-27

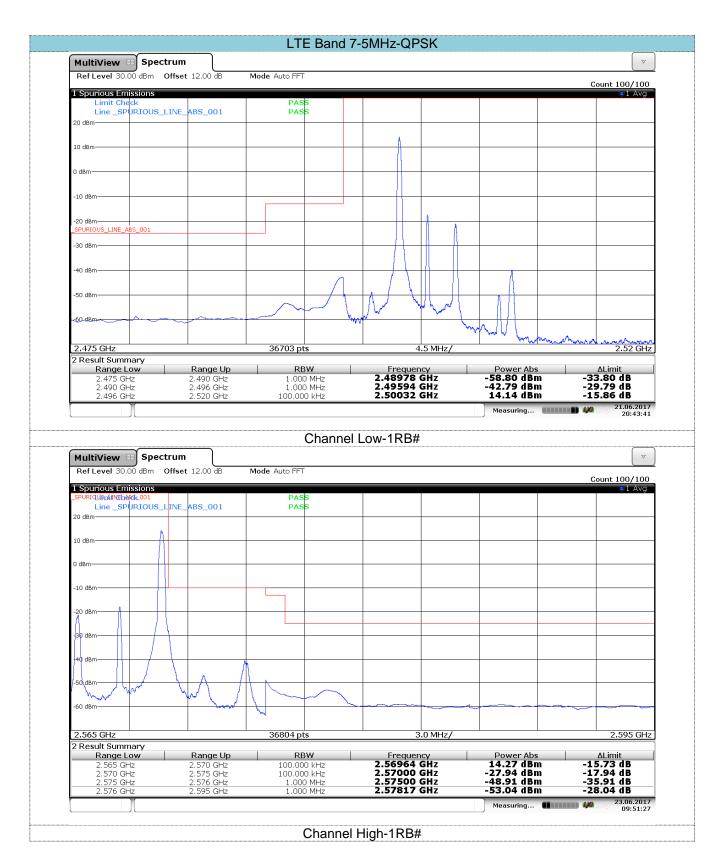


Report No.: TRE1706002502 Page: 198 of 268 Issued: 2017-06-27

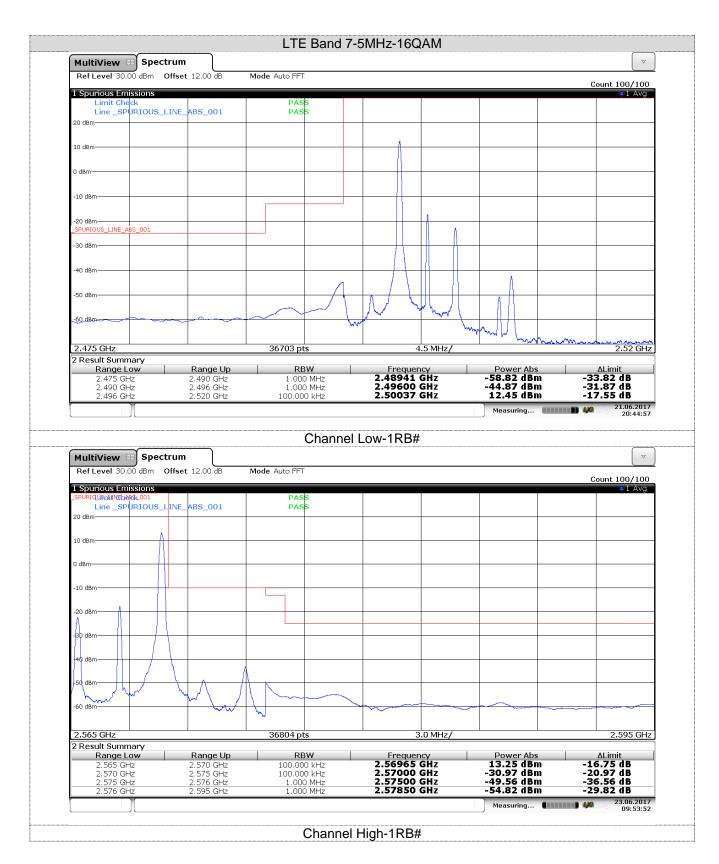


Report No.: TRE1706002502 Page: 199 of 268 Issued: 2017-06-27

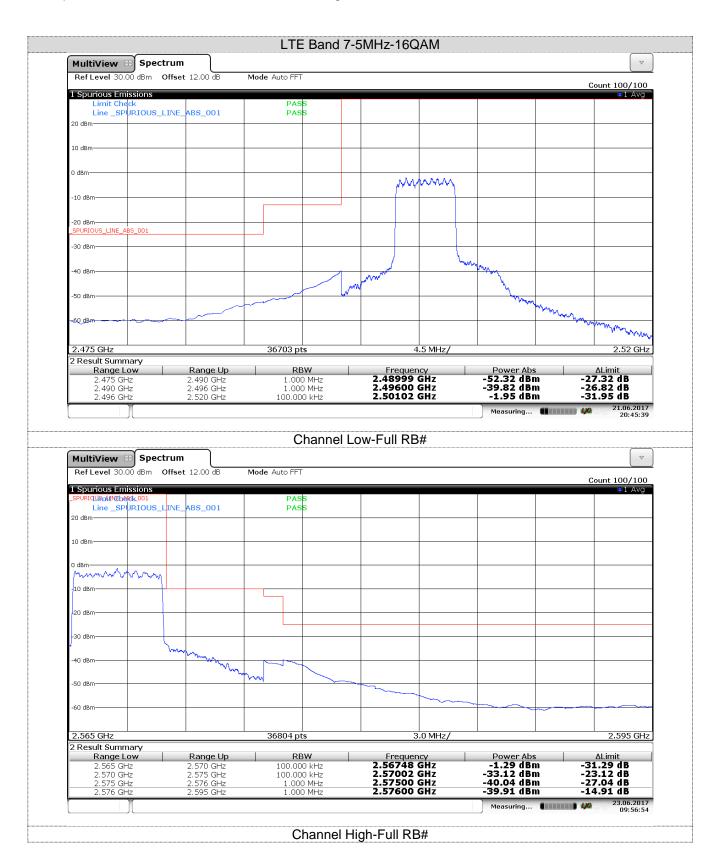


Report No.: TRE1706002502 Page: 200 of 268 Issued: 2017-06-27

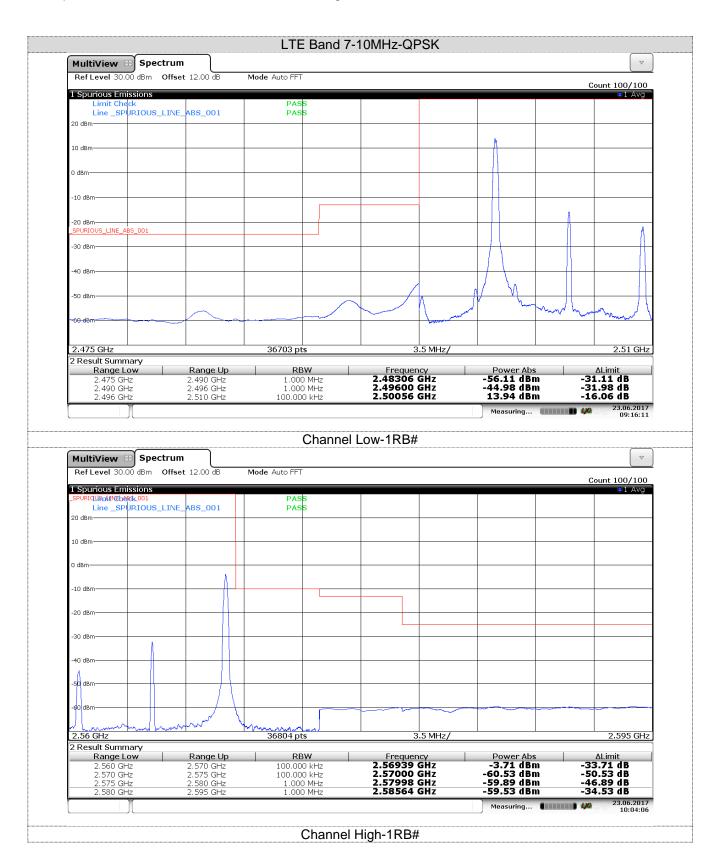


Report No.: TRE1706002502 Page: 201 of 268 Issued: 2017-06-27

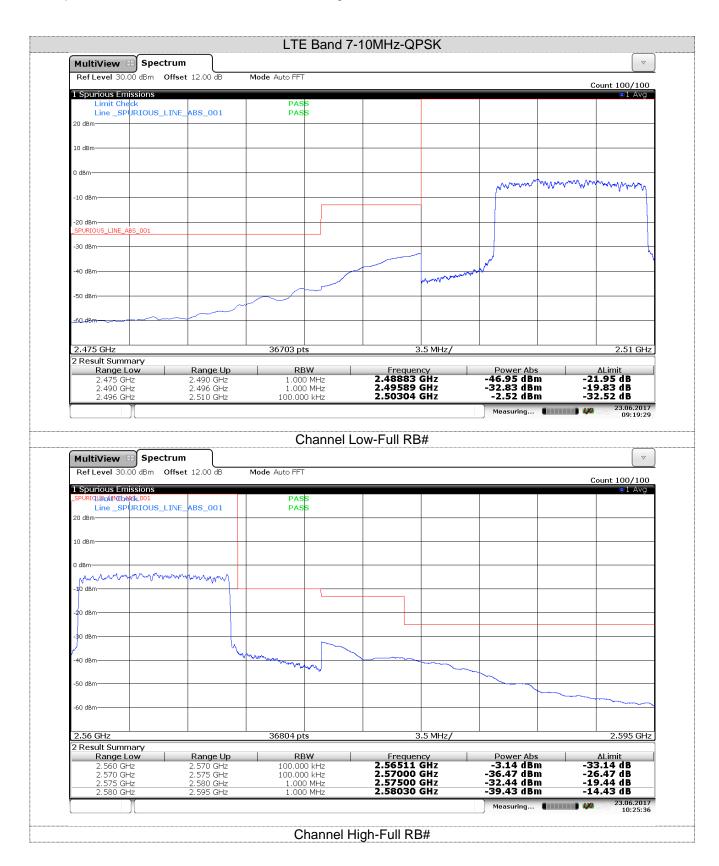


Report No.: TRE1706002502 Page: 202 of 268 Issued: 2017-06-27

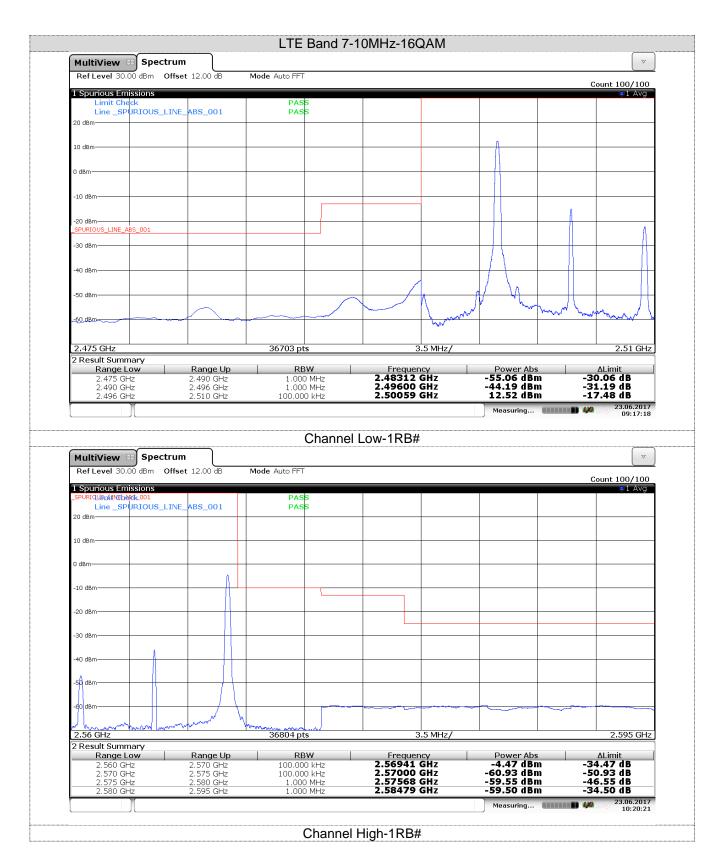


Report No.: TRE1706002502 Page: 203 of 268 Issued: 2017-06-27

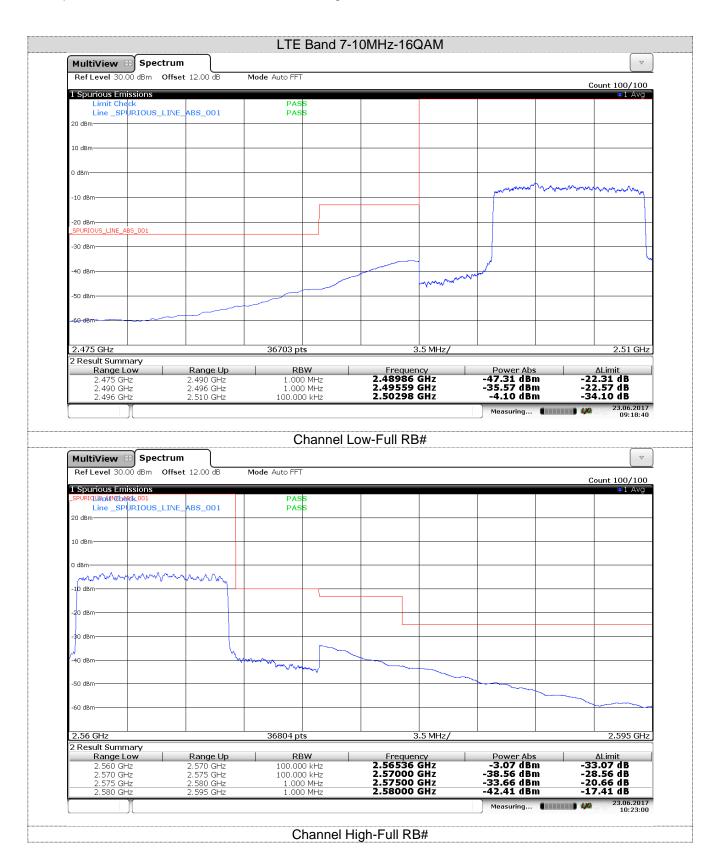


Report No.: TRE1706002502 Page: 204 of 268 Issued: 2017-06-27

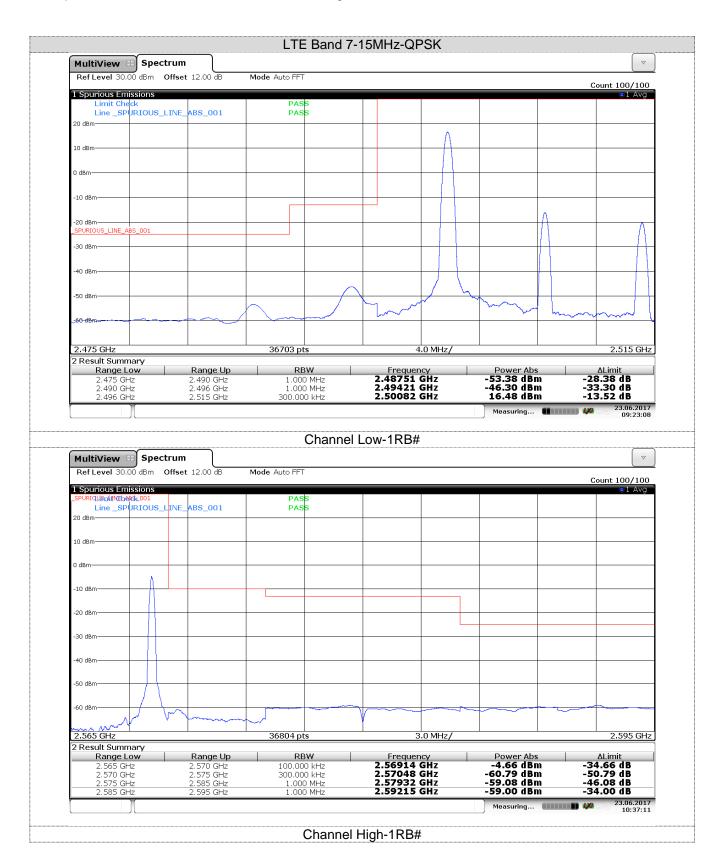

Report No.: TRE1706002502 Page: 205 of 268 Issued: 2017-06-27

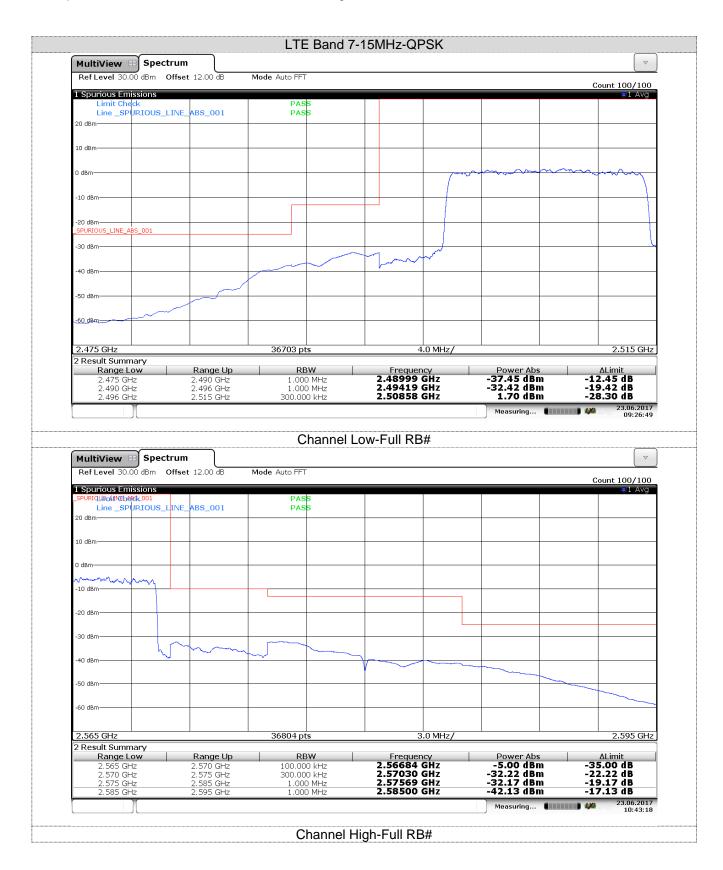


Report No.: TRE1706002502 Page: 206 of 268 Issued: 2017-06-27

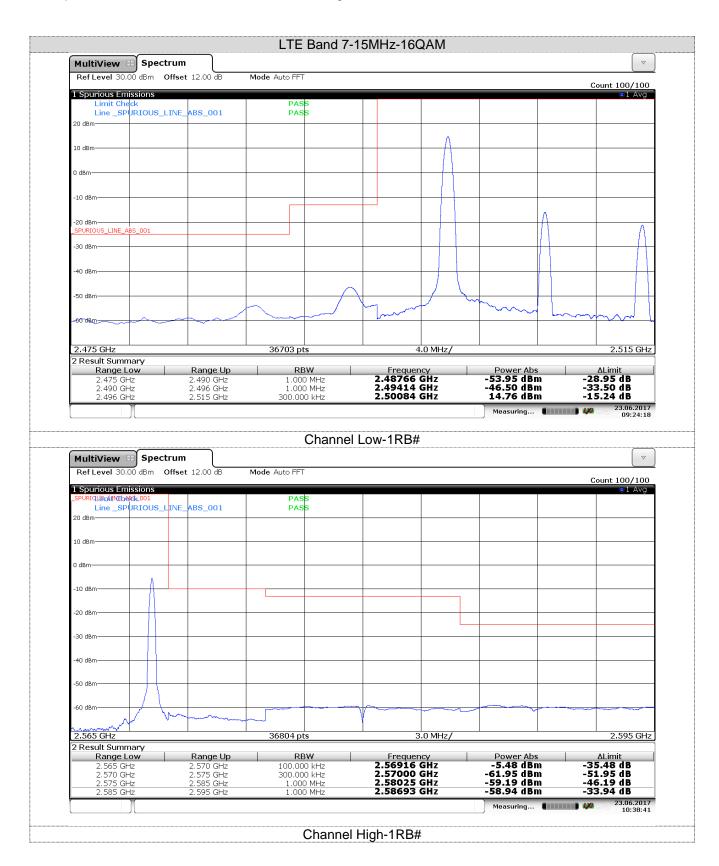


Report No.: TRE1706002502 Page: 207 of 268 Issued: 2017-06-27




Report No.: TRE1706002502 Page: 208 of 268 Issued: 2017-06-27

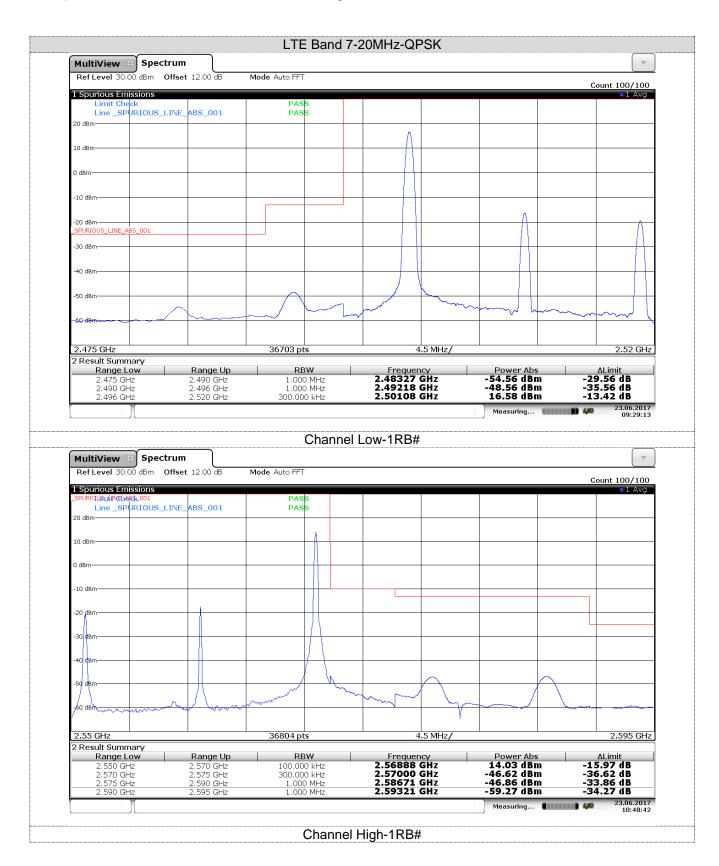


Report No.: TRE1706002502 Page: 209 of 268 Issued: 2017-06-27

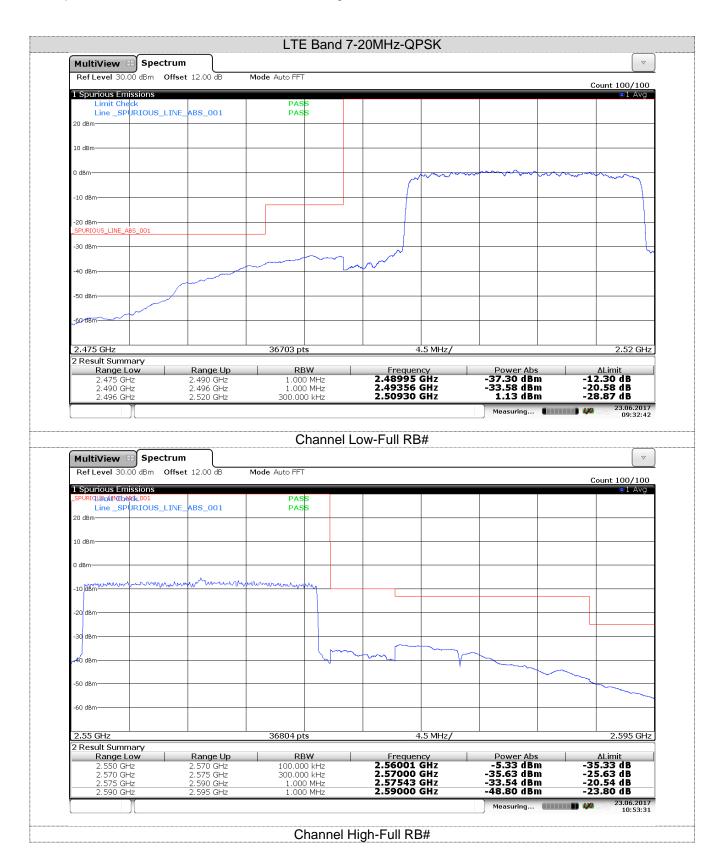


Report No.: TRE1706002502 Page: 210 of 268 Issued: 2017-06-27

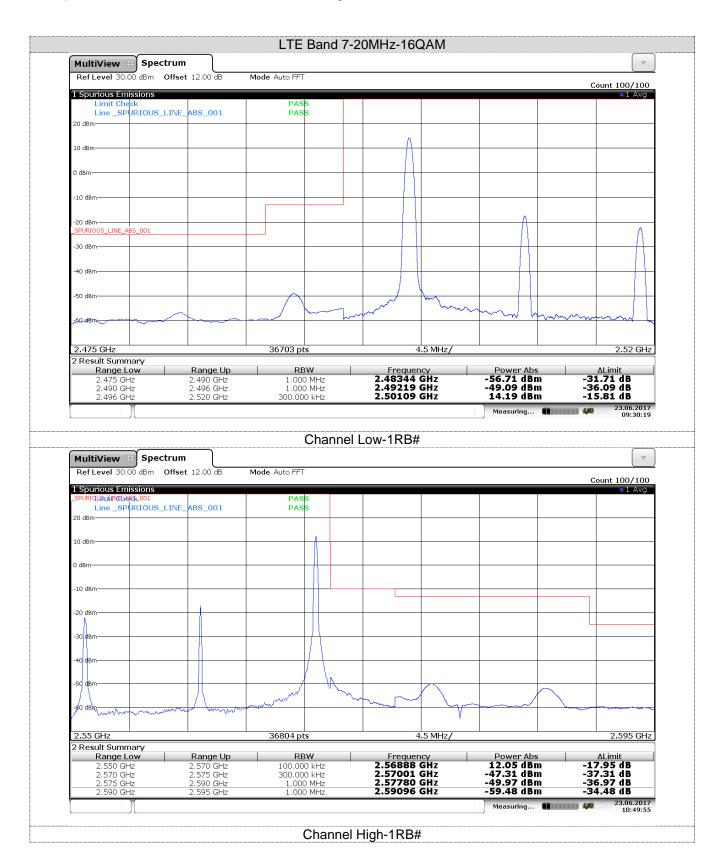


Report No.: TRE1706002502 Page: 211 of 268 Issued: 2017-06-27

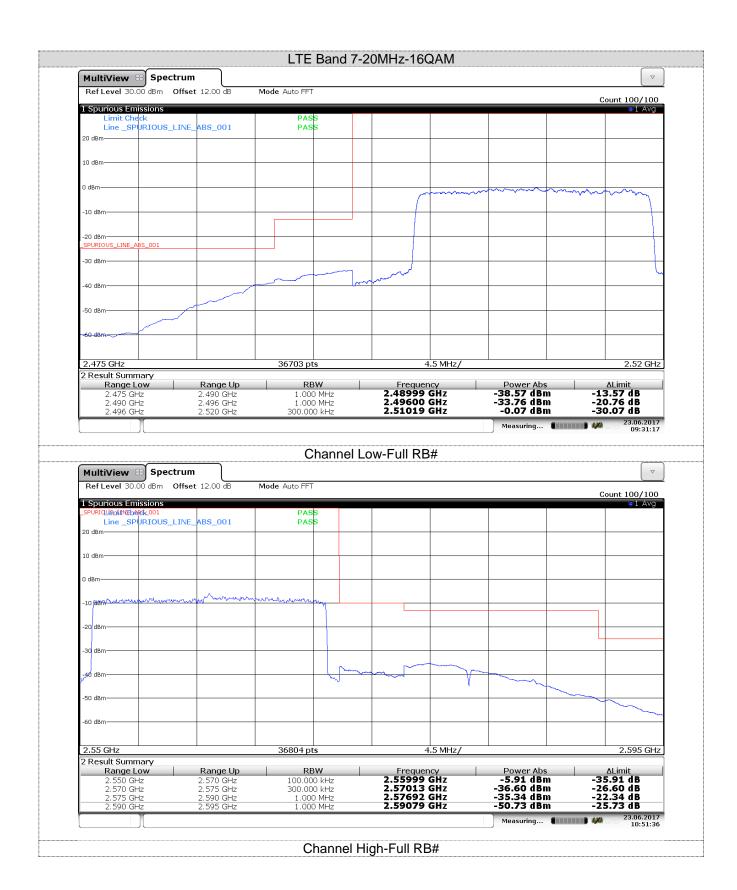


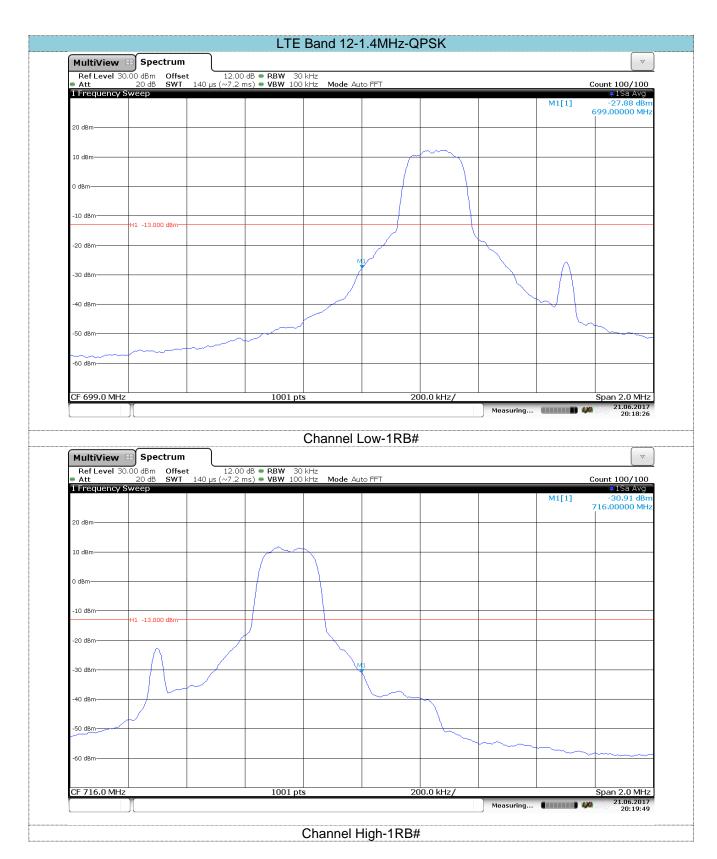





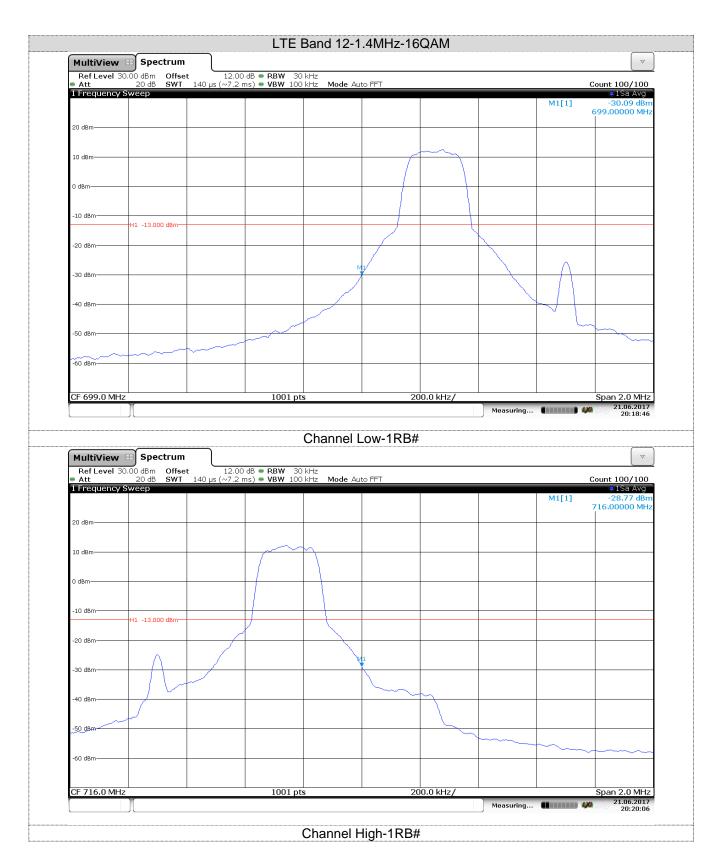





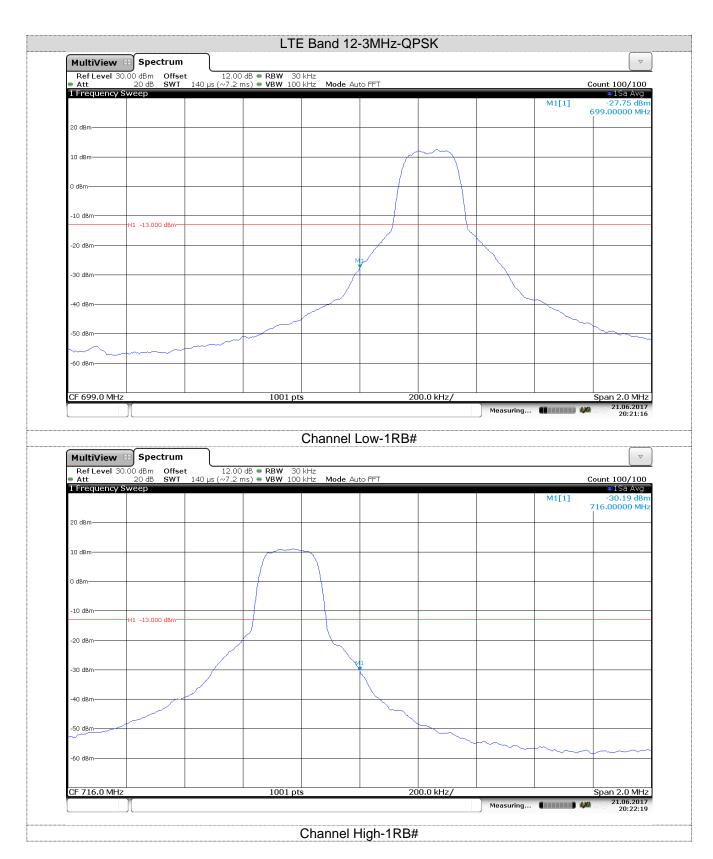


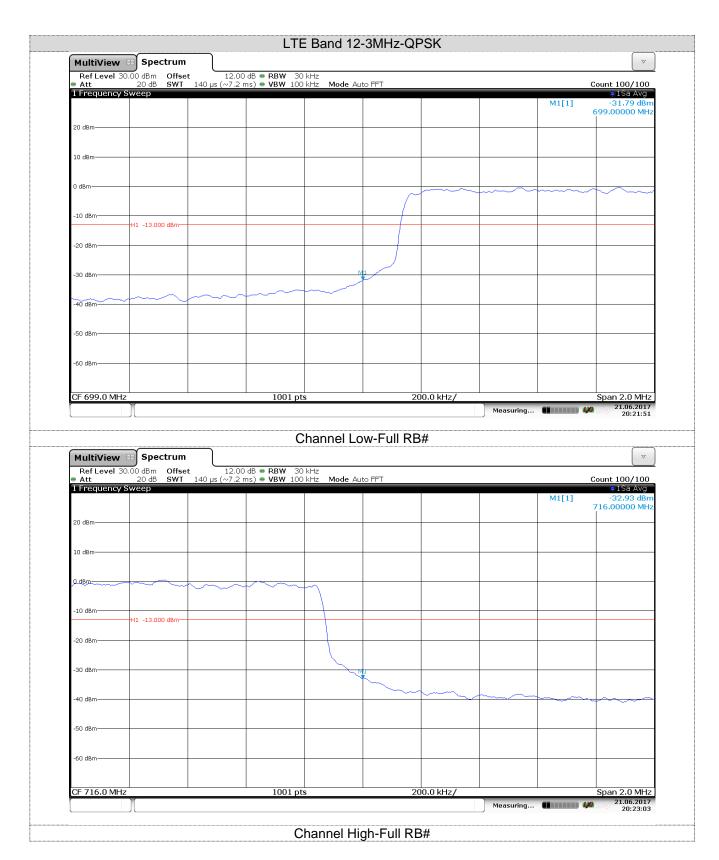


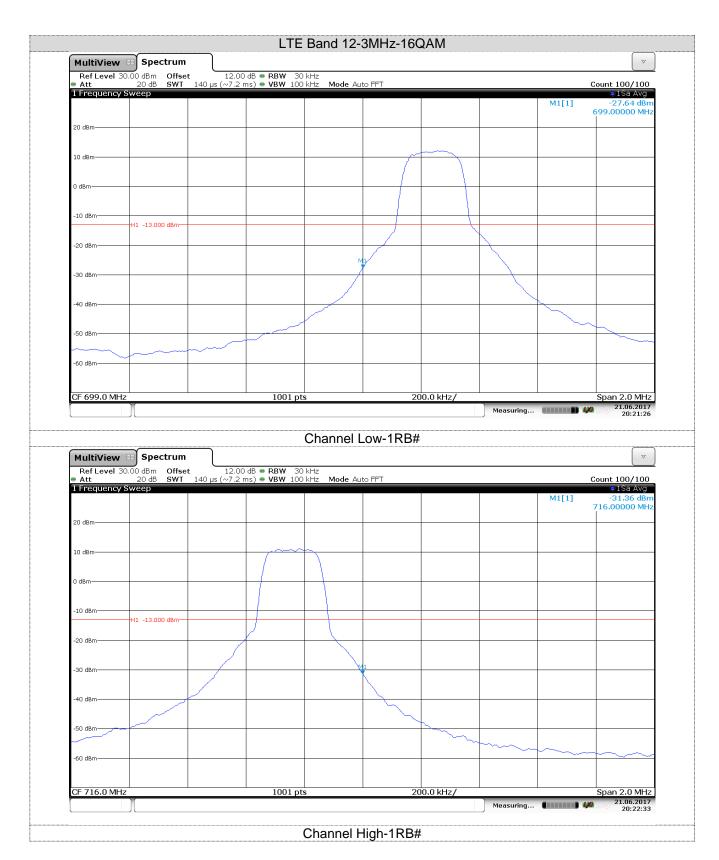


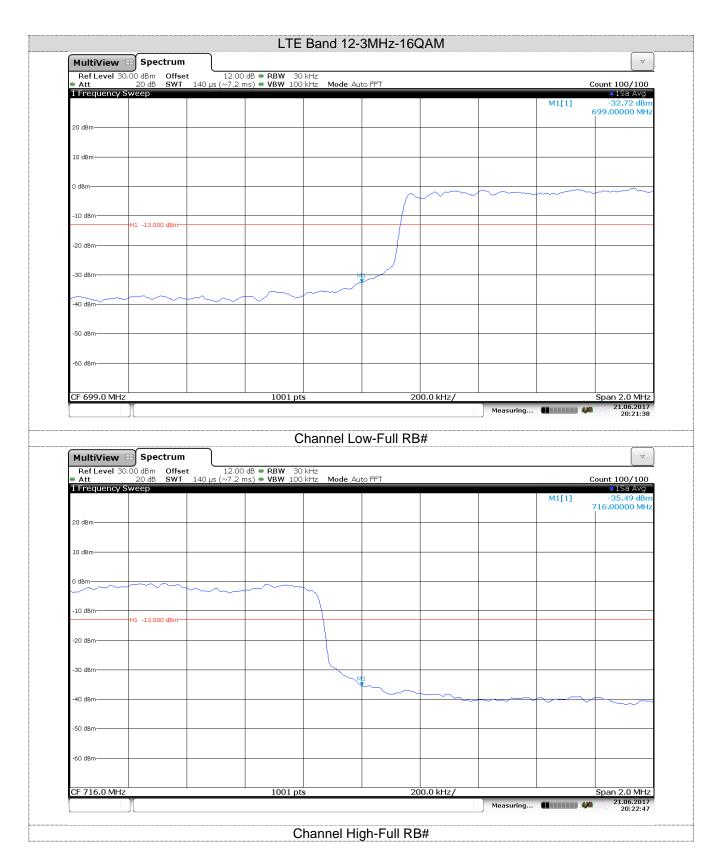


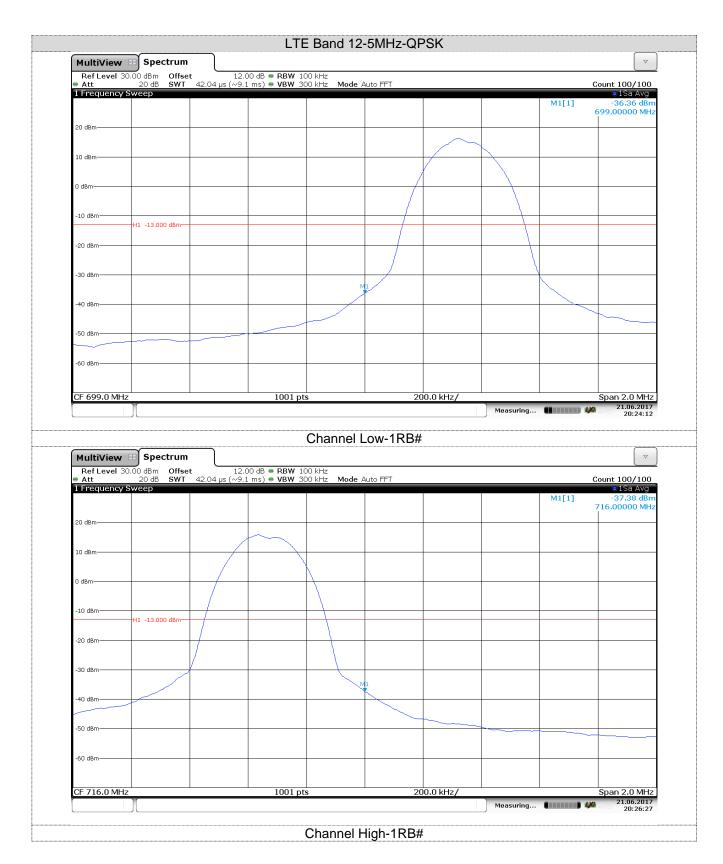


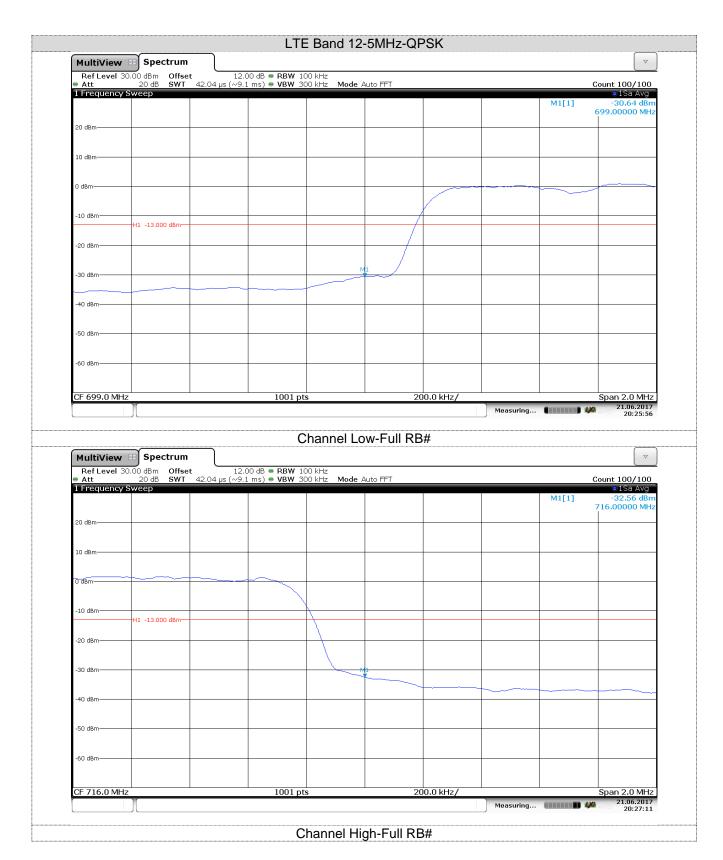


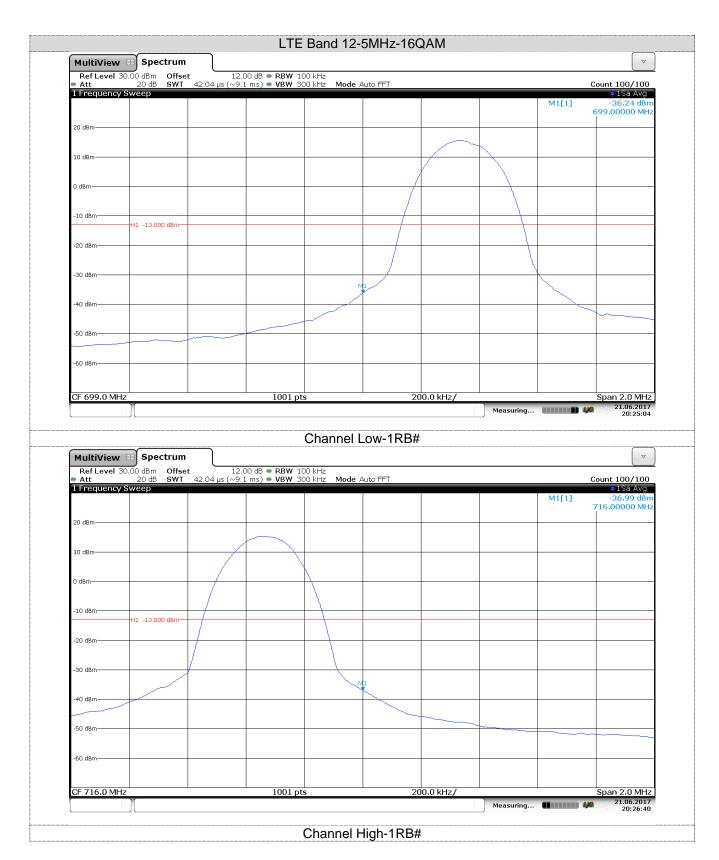


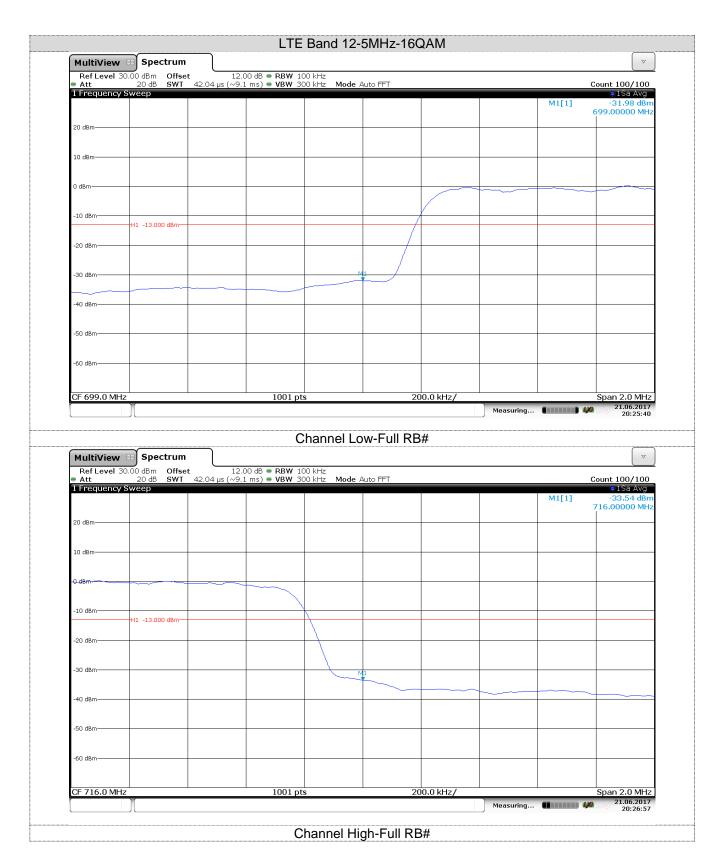


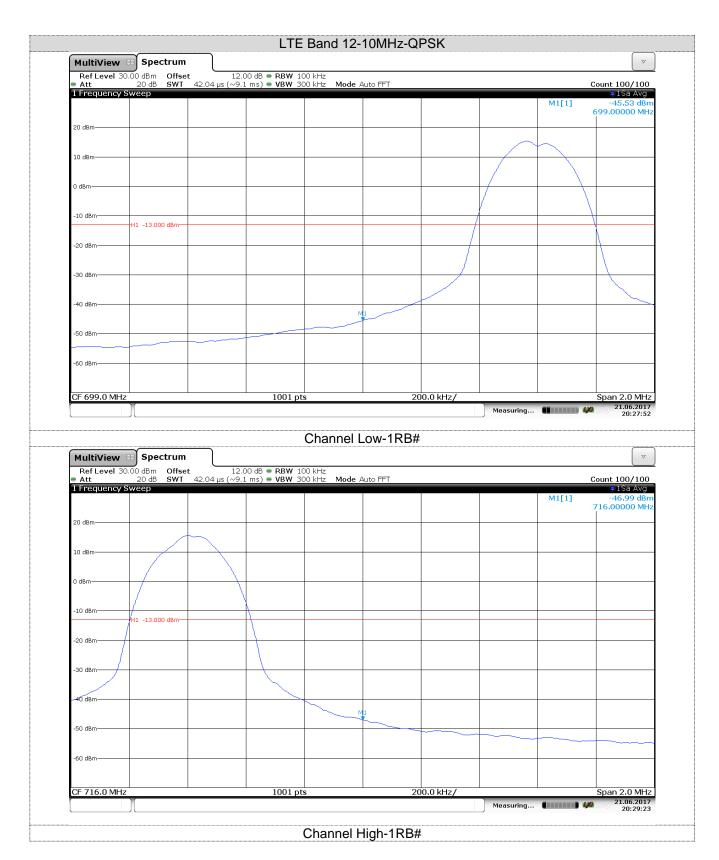


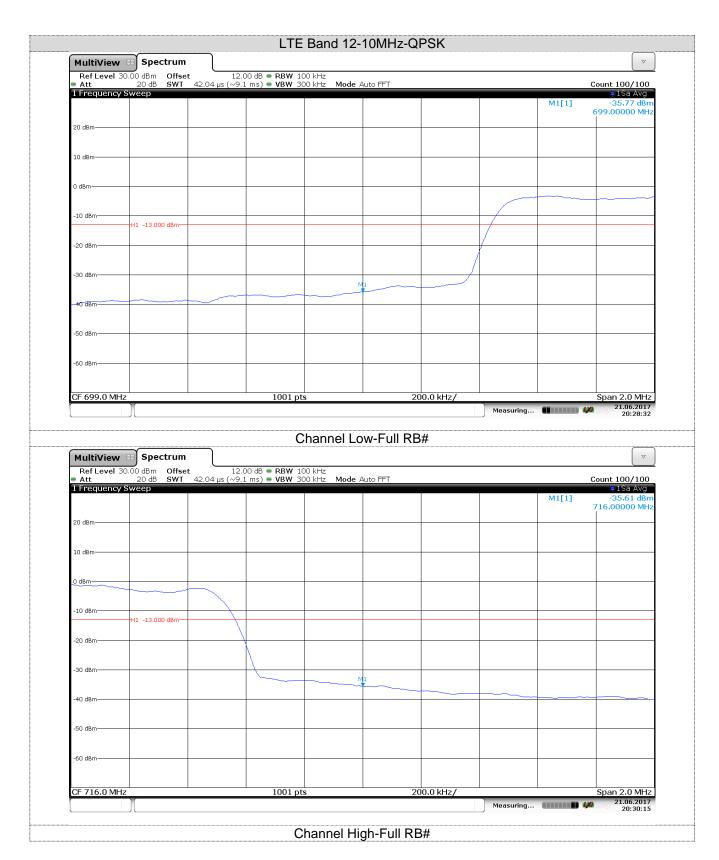


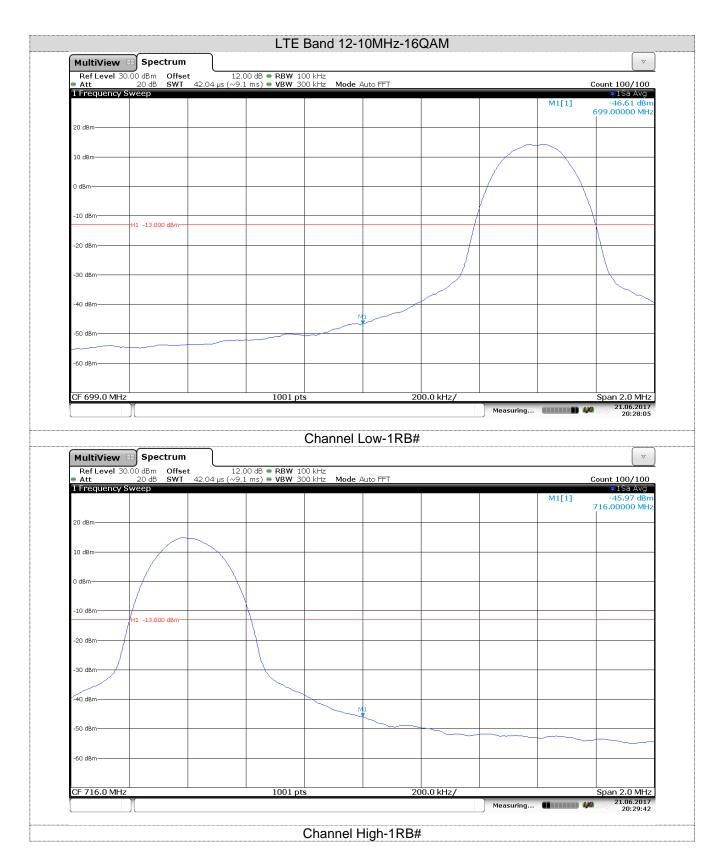


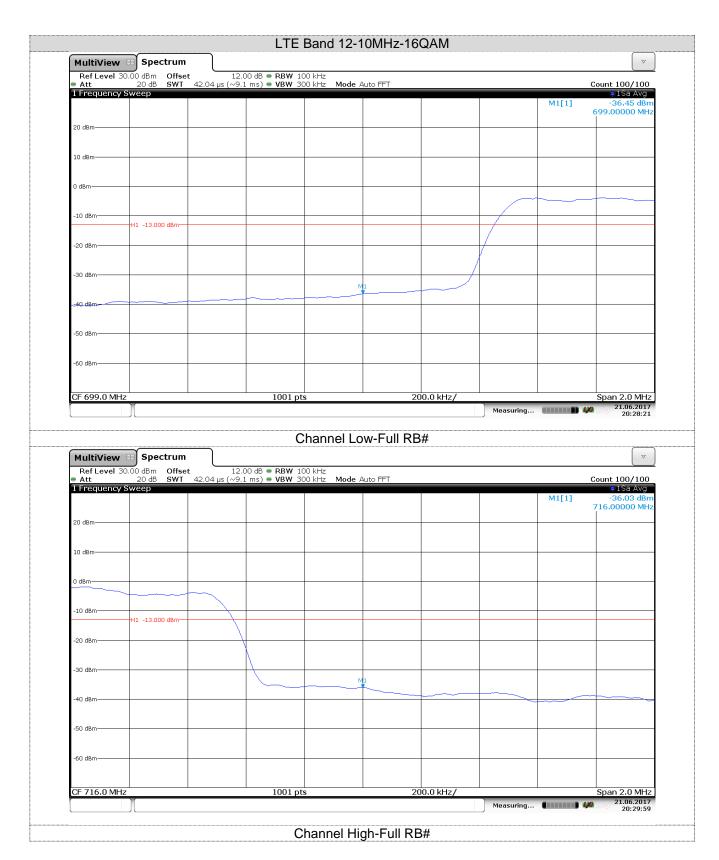


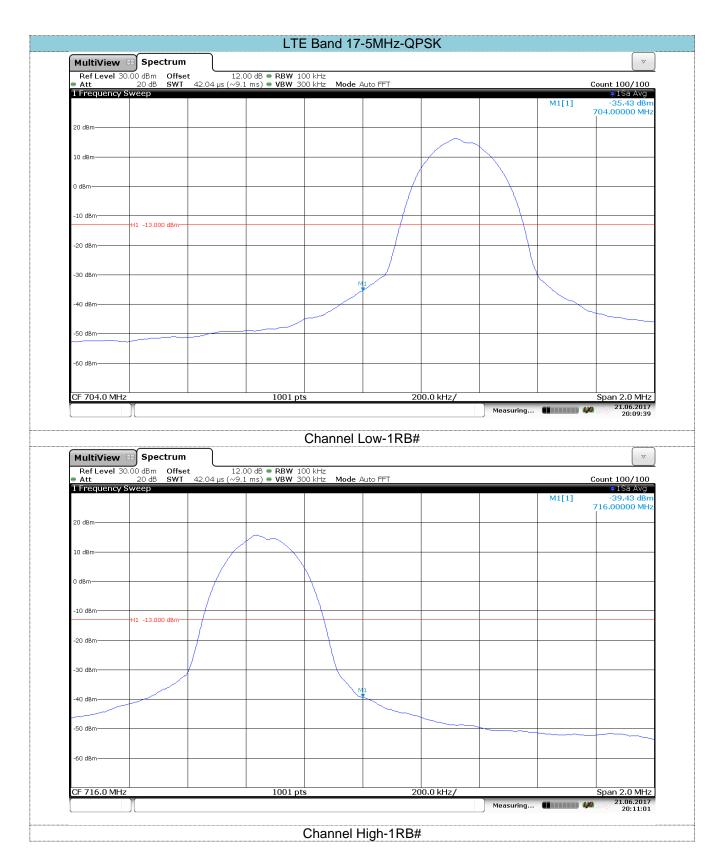


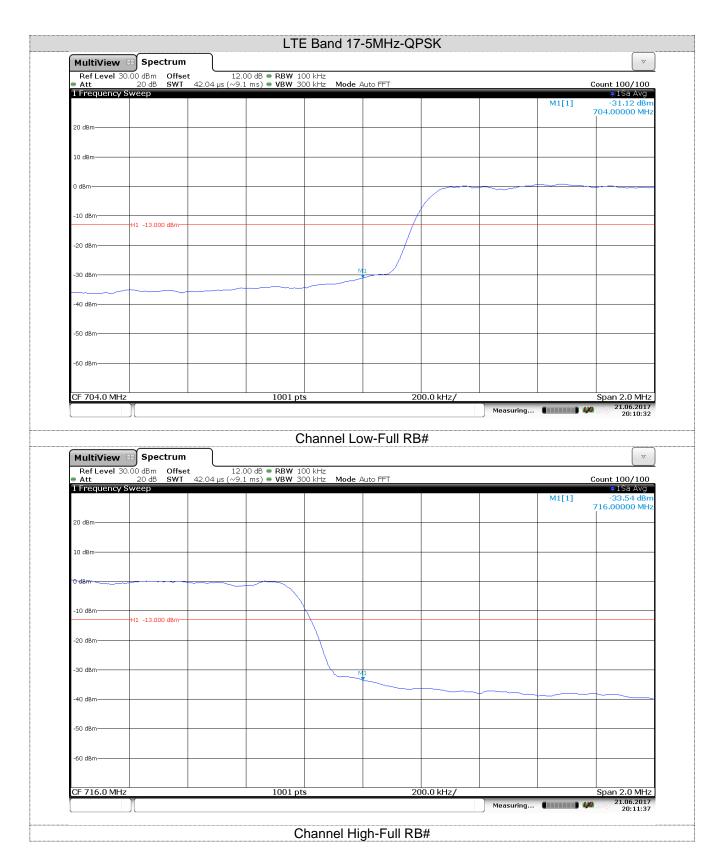


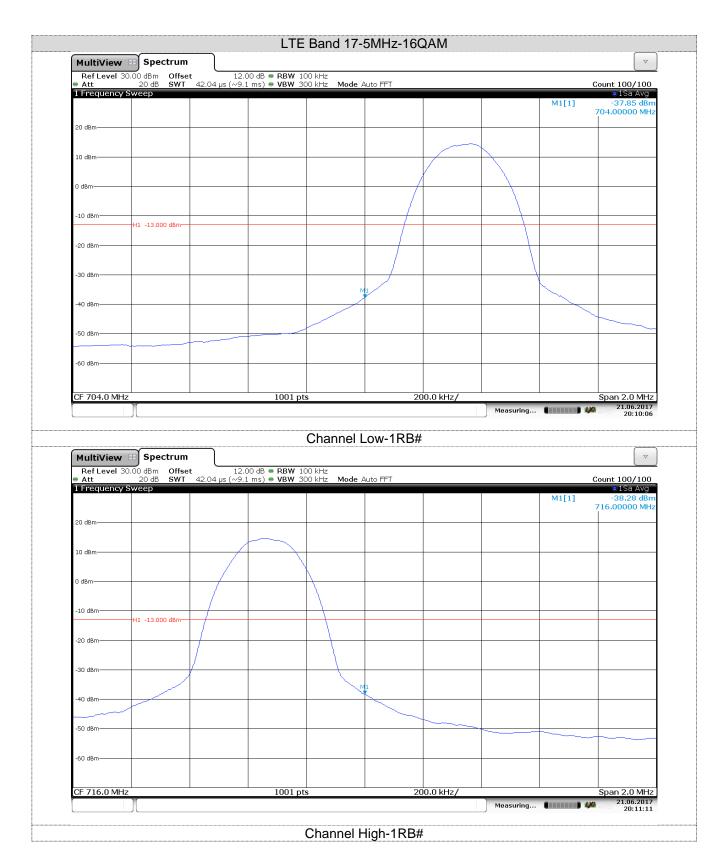


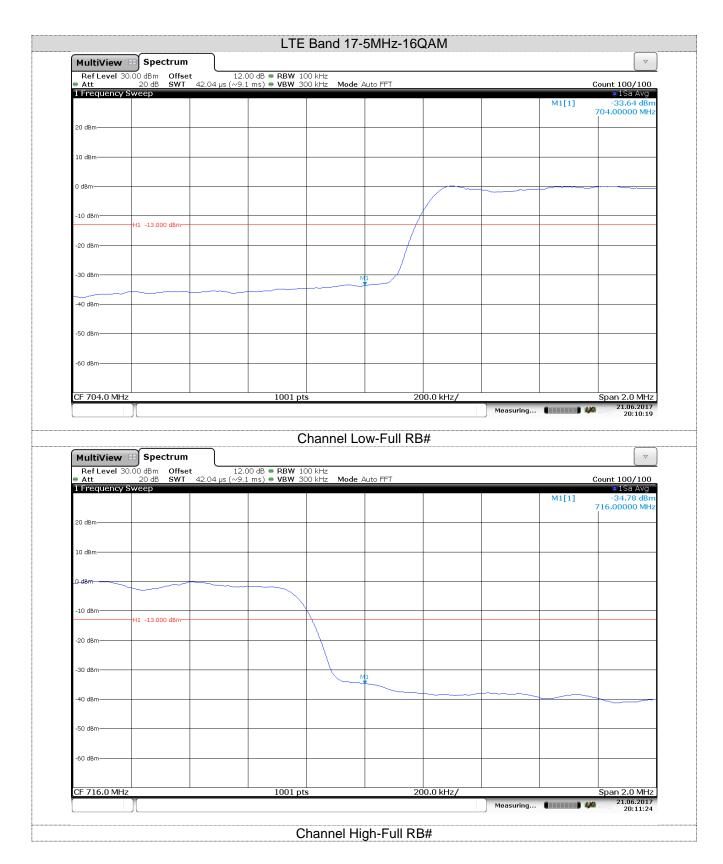

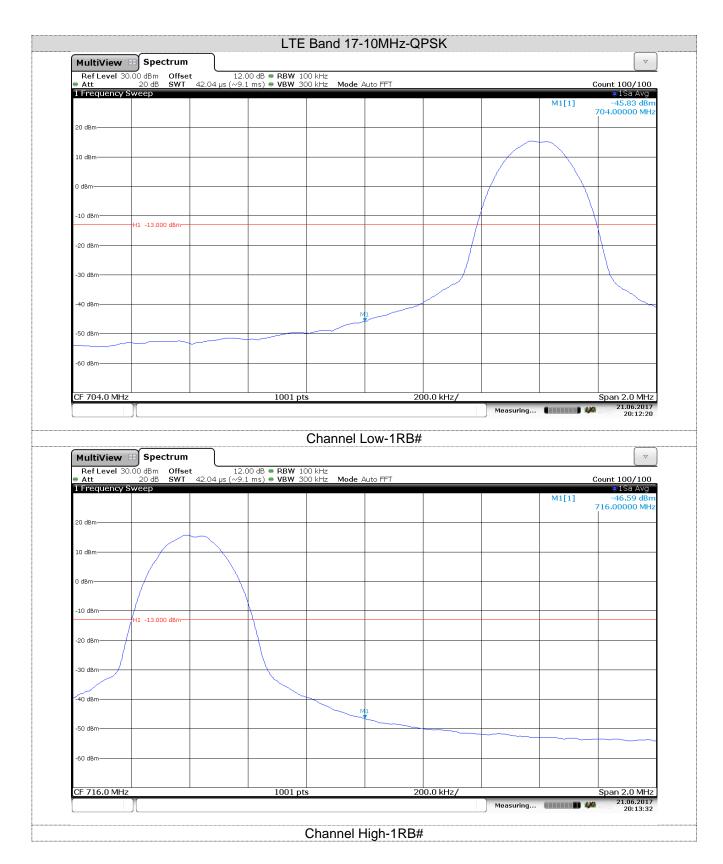

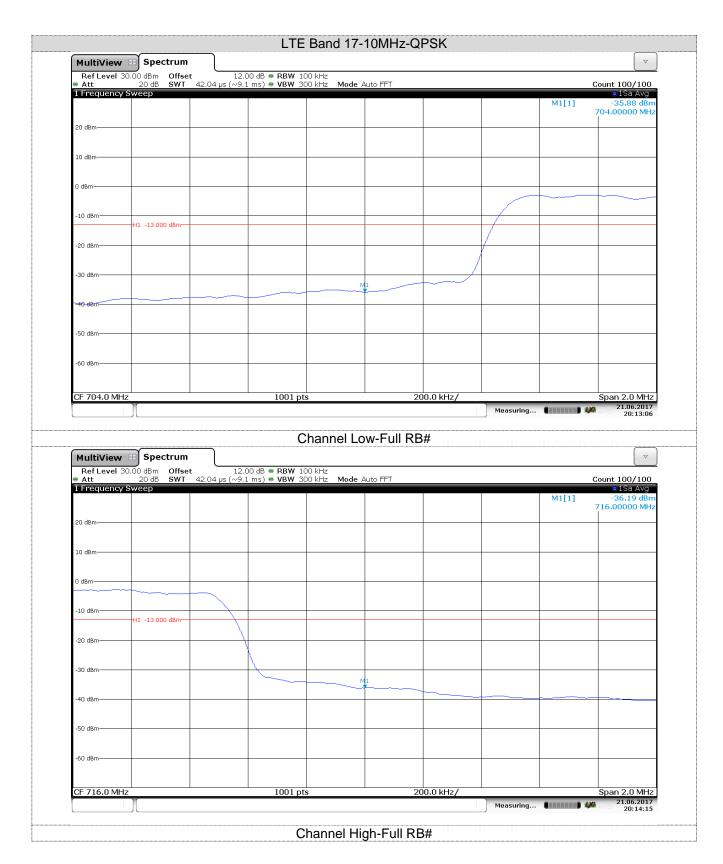

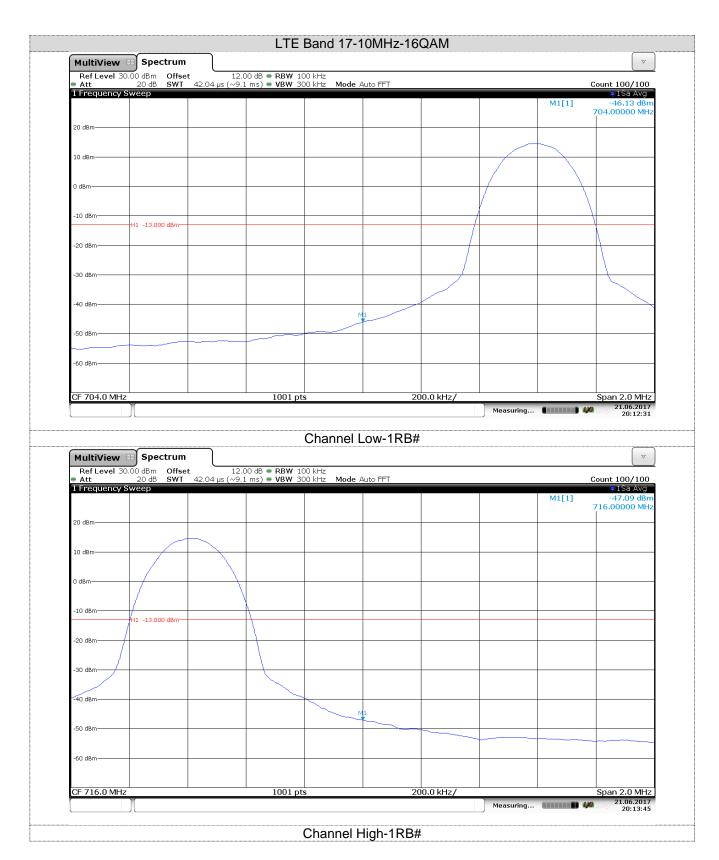

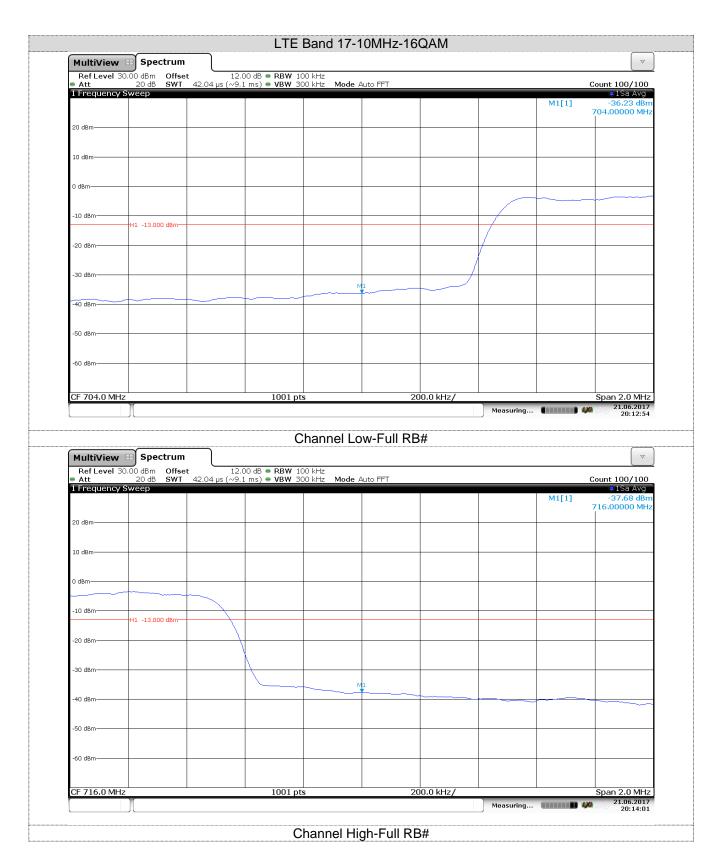


Report No.: TRE1706002502 Page: 236 of 268 Issued: 2017-06-27

5.5. ERP AND EIRP

LIMIT

LTE Band 2: EIRP<2W ,LTE Band 4:EIRP<1W,LTE Band 5:ERP<7W,LTE Band 7:EIRP<2W, LTE Band 12/17:ERP<3W

TEST CONFIGURATION

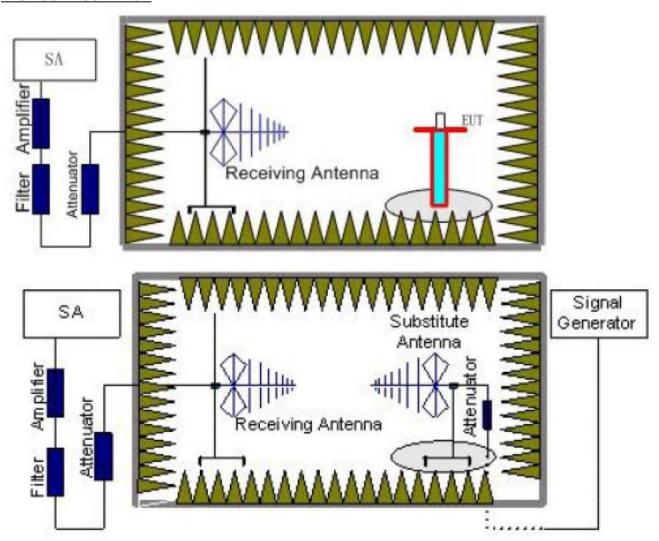

TEST PROCEDURE

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed

Report No.: TRE1706002502 Page: 237 of 268 Issued: 2017-06-27

to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 6. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below:

Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

 Report No.: TRE1706002502 Page: 238 of 268 Issued: 2017-06-27

LTE Band 2-1.4MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dRm)	Result				
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.45	18.52						
QPSK	Mid	20.36	18.55		PASS				
	High	20.47	18.52	22.00					
	Low	20.00	18.60	33.00					
16QAM	Mid	20.02	18.48		PASS				
	High	20.34	18.45						

	LTE Band 2-3MHz								
Modulation		EIRP	(dBm)	Limit (dDm)	Popult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.58	18.85	-					
QPSK	Mid	20.66	18.47		PASS				
	High	20.43	18.58						
	Low	20.24	18.78	33.00					
16QAM	Mid	20.16	18.34		PASS				
	High	20.47	18.59						

	LTE Band 2-5MHz								
Modulation	Channel	EIRP (dBm)		Limit (dPm)	Dogult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.33	18.43						
QPSK	Mid	20.47	18.58		PASS				
	High	20.65	18.64	22.00					
	Low	19.91	18.43	33.00					
16QAM	Mid	20.05	18.58		PASS				
	High	20.99	18.71						

LTE Band 2-10MHz									
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result				
Woddiation	Chamilei	Vertical	Horizontal	Lilliit (dbill)	Nesuit				
	Low	20.11	18.45	-					
QPSK	Mid	20.41	18.37		PASS				
	High	20.80	18.47						
	Low	20.07	18.11	33.00					
16QAM	Mid	20.54	18.44		PASS				
	High	20.69	18.34						

Report No.: TRE1706002502 Page: 239 of 268 Issued: 2017-06-27

LTE Band 2-15MHz									
Modulation	Channel	EIRP	EIRP (dBm)		Result				
Modulation	Chamilei	Vertical	Horizontal	Limit (dBm)	Nesuit				
	Low	20.35	18.65	22.00					
QPSK	Mid	20.42	18.34		PASS				
	High	20.45	18.43						
	Low	19.84	18.65	33.00					
16QAM	Mid	20.42	18.34		PASS				
	High	20.32	18.43						

LTE Band 2-20MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Dogult				
iviodulation		Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.45	18.52						
QPSK	Mid	20.52	18.33		PASS				
	High	20.45	18.50	22.00					
	Low	19.98	18.42	33.00					
16QAM	Mid	19.82	18.15		PASS				
	High	20.52	18.52						

LTE Band 4-1.4MHz									
Modulation	Channel	EIRP (dBm)		Limit (dRm)	Desuit				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.65	18.98	-					
QPSK	Mid	21.34	18.52		PASS				
	High	21.58	18.66						
	Low	21.06	19.04	30.00					
16QAM	Mid	21.08	18.46		PASS				
	High	21.32	18.60						

	LTE Band 4-3MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.52	18.66						
QPSK	Mid	21.43	18.37		PASS				
	High	21.52	18.88						
	Low	21.26	18.61	30.00					
16QAM	Mid	21.05	18.27		PASS				
	High	21.54	18.88						

Report No.: TRE1706002502 Page: 240 of 268 Issued: 2017-06-27

	LTE Band 4-5MHz									
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Result					
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result					
	Low	21.58	18.44							
QPSK	Mid	21.65	18.52		PASS					
	High	21.43	18.37							
	Low	22.26	18.59	30.00						
16QAM	Mid	20.97	18.39		PASS					
	High	21.97	18.49							

LTE Band 4-10MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dDm)	Popult			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	21.43	18.52					
QPSK	Mid	21.52	18.43		PASS			
	High	21.35	18.55	30.00				
	Low	21.43	18.54	30.00				
16QAM	Mid	21.50	18.41		PASS			
	High	21.51	18.53					

	LTE Band 4-15MHz								
Modulation	Channel	EIRP (dBm)		Limit (dPm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.30	18.45						
QPSK	Mid	21.45	18.52		PASS				
	High	21.52	18.45	20.00					
	Low	21.70	18.45	30.00					
16QAM	Mid	21.45	18.52		PASS				
	High	21.62	18.45						

	LTE Band 4-20MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.52	18.34						
QPSK	Mid	20.45	18.45		PASS				
	High	20.35	18.36						
	Low	20.89	18.42	30.00					
16QAM	Mid	21.00	18.59		PASS				
	High	19.83	18.24						

Report No.: TRE1706002502 Page: 241 of 268 Issued: 2017-06-27

LTE Band 5-1.4MHz									
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result				
Modulation	Channel	Vertical	Horizontal	LIIIII (UDIII)	Nesull				
	Low	19.45	16.52						
QPSK	Mid	19.46	16.85		PASS				
	High	19.52	16.74	20.50					
	Low	19.37	16.58	38.50					
16QAM	Mid	19.52	16.79		PASS				
	High	19.25	16.80						

LTE Band 5-3MHz								
Martine.	Channel	ERP (dBm)		Limit (dDm)	Result			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	19.65	16.58					
QPSK	Mid	19.87	16.52		PASS			
	High	19.48	16.37	20 50				
	Low	19.38	16.52	38.50				
16QAM	Mid	19.47	16.42		PASS			
	High	19.50	16.38					

	LTE Band 5-5MHz								
Modulation	Channel	ERP (dBm)		Limit (dDm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm) 38.50	Result				
	Low	19.68	16.45						
QPSK	Mid	19.45	16.58	00.50	PASS				
	High	19.37	16.44						
	Low	18.97	16.61	38.50					
16QAM	Mid	20.00	16.46		PASS				
	High	19.90	16.56						

	LTE Band 5-10MHz								
Modulation	Channel	ERP	ERP (dBm)		Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.14	16.85						
QPSK	Mid	19.48	16.44		PASS				
	High	19.58	16.55	20.50					
	Low	19.93	16.79	38.50					
16QAM	Mid	20.03	16.33		PASS				
	High	20.41	16.67						

Report No.: TRE1706002502 Page: 242 of 268 Issued: 2017-06-27

LTE Band 7-5MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dRm)	Result				
iviodulation	Chamilei	Vertical	Horizontal	Limit (dBm) 33.00	Result				
	Low	20.65	17.35						
QPSK	Mid	20.43	17.38		PASS				
	High	20.84	17.85	22.00					
	Low	20.51	17.46	33.00					
16QAM	Mid	20.54	17.27		PASS				
	High	20.36	17.96						

LTE Band 7-10MHz								
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Result			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Resuit			
	Low	20.65	17.55					
QPSK	Mid	20.47	17.34		PASS			
	High	20.43	17.52					
	Low	20.17	17.45	33.00				
16QAM	Mid	19.76	17.16		PASS			
	High	20.50	17.54					

	LTE Band 7-15MHz								
Modulation	Channal	EIRP (dBm)		Limit (dDm)	Dogult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.65	17.84						
QPSK	Mid	20.42	17.63		PASS				
	High	20.51	17.43	22.00					
	Low	20.83	17.80	33.00					
16QAM	Mid	20.28	17.66		PASS				
	High	20.37	17.40						

	LTE Band 7-20MHz								
Modulation	Channel	EIRP	EIRP (dBm)		Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Nesuit				
	Low	20.54	17.43						
QPSK	Mid	20.66	17.36		PASS				
	High	20.47	17.38						
	Low	20.34	17.75	33.00					
16QAM	Mid	20.52	17.69		PASS				
	High	20.26	17.37						

Report No.: TRE1706002502 Page: 243 of 268 Issued: 2017-06-27

LTE Band 12-1.4MHz									
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result				
Modulation	Channel	Vertical	Horizontal	LIIIII (UDIII)	Result				
	Low	21.44	19.43						
QPSK	Mid	21.58	19.37		PASS				
	High	21.38	19.52						
	Low	21.33	19.52	34.8					
16QAM	Mid	21.66	19.29		PASS				
	High	21.01	19.60						

LTE Band 12-3MHz								
M. L.L.C.	Channal	ERP (dBm)		ERP (dBm)		Limit (dDm)	Dogult	
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	21.43	19.85					
QPSK	Mid	21.36	19.43		PASS			
	High	21.88	19.75					
	Low	21.06	19.77	34.8				
16QAM	Mid	20.81	19.29		PASS			
	High	21.92	19.76					

LTE Band 12-5MHz								
Modulation	Channel	ERP (dBm)		Lineit (dDne)	Result			
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)	Nesuit			
	Low	21.44	19.48					
QPSK	Mid	21.52	19.52	04.0	PASS			
	High	21.36	19.38					
	Low	21.80	19.40	34.8				
16QAM	Mid	21.24	19.58		PASS			
	High	21.09	19.32					

	LTE Band 12-10MHz								
Modulation	Channel	ERP	(dBm)	Limit (dPm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.33	19.38						
QPSK	Mid	21.65	19.52	04.0	PASS				
	High	21.43	19.36						
	Low	20.94	19.31	34.8					
16QAM	Mid	21.37	19.64		PASS				
	High	21.02	19.26						

Report No.: TRE1706002502 Page: 244 of 268 Issued: 2017-06-27

LTE Band 17-5MHz							
Modulation	Channel	ERP	ERP (dBm)		D !!		
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result		
	Low	20.55	18.05	-			
QPSK	Mid	20.65	18.43		PASS		
	High	20.64	18.55				
	Low	20.69	17.94	34.8			
16QAM	Mid	20.55	18.53		PASS		
	High	21.10	18.45				

LTE Band 17-10MHz							
Modulation	Channel	ERP	(dBm)	Limit (dBm)	Pocult		
Modulation	Channel	Vertical	Horizontal	Limit (dbm)	Result		
	Low	20.46	18.74	24.0			
QPSK	Mid	20.37	18.52		PASS		
	High	20.66	18.33				
	Low	20.92	18.84	34.8			
16QAM	Mid	21.05	18.69		PASS		
	High	20.72	18.34				


Report No.: TRE1706002502 Page: 245 of 268 Issued: 2017-06-27

5.6. Radiated Spurious Emssion

LIMIT

LTE Band 2/4/5/12/17:<-13dBm;LTE Band 7<-25dBm

TEST CONFIGURATION

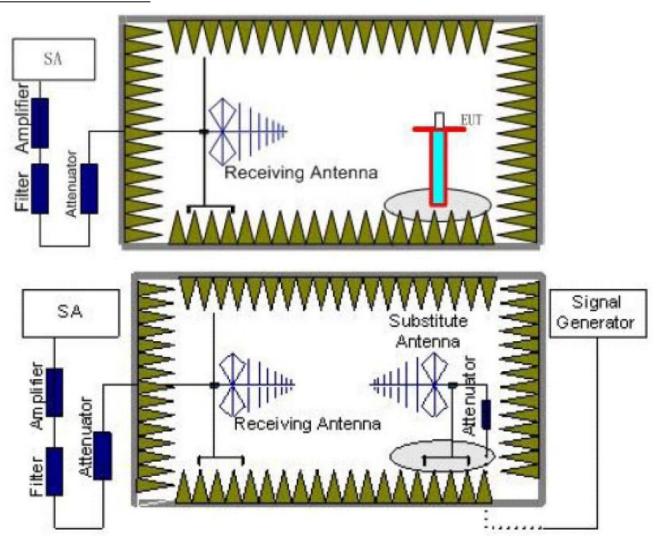

TEST RESULTS

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the

Report No.: TRE1706002502 Page: 246 of 268 Issued: 2017-06-27

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 6. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below: Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST	MODE:
------	-------

Please refer to the clause 3.3

TEST RESULTS

 Report No.: TRE1706002502 Page: 247 of 268 Issued: 2017-06-27

LTE Band 2-1.4MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	D !!		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3701.4	Vertical	-44.52				
	5552.1	V	-40.58	-13.00	Pass		
Low	7402.8	V					
LOW	3701.4	Horizontal	-49.58				
	5552.1	Н	-42.66	-13.00	Pass		
	7402.8	Н					
	3760	Vertical	-44.21	-13.00	Pass		
	5640	V	-40.64				
Mid	7520	V					
iviiu	3760	Horizontal	-49.51				
	5640	Н	-42.59	-13.00	Pass		
	7520	Н					
	3818.6	Vertical	-44.33				
	5727.9	V	-40.75	-13.00	Pass		
High	7637.2	V					
High	3818.6	Horizontal	-49.52				
	5727.9	Н	-42.59	-13.00	Pass		
	7637.2	Н					

Remark:

- Remark"---" means that the emission level is too low to be measured
- The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-3MHz						
Channel	Frequency	Spurious	Emission	Limit (dDm)	D !	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	3703	Vertical	-44.81			
	5554.5	V	-40.51	-13.00	Pass	
Low	7406	V				
LOW	3703	Horizontal	-45.15			
	5554.5	Н	-40.44	-13.00	Pass	
	7406	Н				
	3760	Vertical	-45.09		Pass	
	5640	V	-40.21	-13.00		
Mid	7520	V				
IVIIU	3760	Horizontal	-44.95		Pass	
	5640	Н	-39.68	-13.00		
	7520	Н				
	3817	Vertical	-45.86			
	5725.5	V	-39.86	-13.00	Pass	
Lligh	7634	V				
High	3817	Horizontal	-45.46			
	5725.5	Н	-39.77	-13.00	Pass	
	7634	Н				

- Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 248 of 268 Issued: 2017-06-27

LTE Band 2-5MHz							
Channal	Frequency	Spurious I	Emission	Limit (dDm)	D !!		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3705	Vertical	-45.05				
	5557.5	V	-40.68	-13.00	Pass		
Low	7410	V					
LOW	3705	Horizontal	-44.26				
	5557.5	Н	-40.84	-13.00	Pass		
	7410	Н					
	3760	Vertical	-44.39	-13.00	Pass		
	5640	V	-41.37				
Mid	7520	V					
IVIIU	3760	Horizontal	-43.87				
	5640	Н	-41.05	-13.00	Pass		
	7520	Н					
	3815	Vertical	-44.42				
	5722.5	V	-41.15	-13.00	Pass		
Lliah	7630	V					
High	3815	Horizontal	-44.98				
	5722.5	Н	-41.27	-13.00	Pass		
	7630	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-10MHz							
Channal	Frequency	Spurious	Emission	Limit (dDm)	D !!		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3710	Vertical	-44.49				
	5565	V	-40.98	-13.00	Pass		
Low	7420	V					
Low	3710	Horizontal	-43.14				
	5565	Н	-41.26	-13.00	Pass		
	7420	Н					
	3760	Vertical	-43.37	-13.00	Pass		
	5640	V	-42.15				
Mid	7520	V					
iviiu	3760	Horizontal	-42.47				
	5640	Н	-43.33	-13.00	Pass		
	7520	Н					
	3810	Vertical	-40.43				
	5715	V	-42.95	-13.00	Pass		
High	7620	V					
riigii	3810	Horizontal	-39.67		_		
	5715	Н	-42.79	-13.00	Pass		
	7620	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 249 of 268 Issued: 2017-06-27

LTE Band 2-15MHz							
Channal	Frequency	Spurious I	Emission	Limit (dPm)	D !!		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3705	Vertical	-43.54				
	5557.5	V	-41.37	-13.00	Pass		
Low	7410	V					
LOW	3705	Horizontal	-41.76		Pass		
	5557.5	Н	-41.74	-13.00			
	7410	Н					
	3760	Vertical	-42.05	-13.00	Pass		
	5640	V	-42.92				
Mid	7520	V					
iviiu	3760	Horizontal	-40.87				
	5640	Н	-43.17	-13.00	Pass		
	7520	Н					
	3815	Vertical	-40.43				
	5722.5	V	-43.09	-13.00	Pass		
Lliah	7630	V					
High	3815	Horizontal	-40.68				
	5722.5	Н	-43.14	-13.00	Pass		
	7630	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-20MHz						
Channal	Frequency	Spurious	Emission	Limit (dDm)	D II	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	3720	Vertical	-42.28			
	5580	V	-41.81	-13.00	Pass	
Low	7440	V				
Low	3720	Horizontal	-40.27			
	5580	Н	-42.23	-13.00	Pass	
	7440	Н				
	3760	Vertical	-40.60	-13.00	Pass	
	5640	V	-43.56			
Mid	7520	V				
IVIIU	3760	Horizontal	-39.27		Pass	
	5640	Н	-44.45	-13.00		
	7520	Н				
	3800	Vertical	-37.73			
	5700	V	-44.16	-13.00	Pass	
High	7600	V				
riigii	3800	Horizontal	-39.15			
	5700	Н	-44.45	-13.00	Pass	
	7600	Н				

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 250 of 268 Issued: 2017-06-27

LTE Band 4-1.4MHz						
Channel	Frequency	Spurious	Emission	Limit (dDm)	D 1	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	3421.4	Vertical	-37.00			
	5132.1	V	-38.49	-13.00	Pass	
Low	6842.8	V				
LOW	3421.4	Horizontal	-39.88			
	5132.1	Н	-44.56	-13.00	Pass	
	6842.8	Н				
	3465	Vertical	-37.08	-13.00	Pass	
	5197.5	V	-38.41			
Mid	6930	V				
IVIIU	3465	Horizontal	-39.78			
	5197.5	Н	-44.48	-13.00	Pass	
	6930	Н				
	3508.6	Vertical	-37.21			
	5262.9	V	-38.54	-13.00	Pass	
Lligh	7017.2	V				
High	3508.6	Horizontal	-39.79			
	5262.9	Н	-44.49	-13.00	Pass	
	7017.2	Н				

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-3MHz						
Channal	Frequency	Spurious	Emission	Limit (dDm)	D II	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	3423	Vertical	-37.35			
	5134.5	V	-38.43	-13.00	Pass	
Low	6846	V				
LOW	3423	Horizontal	-39.72			
	5134.5	Н	-44.51	-13.00	Pass	
	6846	Н				
	3465	Vertical	-37.39	-13.00	Pass	
	5197.5	V	-38.47			
Mid	6930	V				
IVIIU	3465	Horizontal	-39.64		Pass	
	5197.5	Н	-44.58	-13.00		
	6930	Н				
	3507	Vertical	-37.52			
	5260.5	V	-38.36	-13.00	Pass	
High	7014	V				
riigii	3423	Horizontal	-39.58			
	5134.5	Н	-44.64	-13.00	Pass	
	6846	Н				

- 1. Remark"--- means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 251 of 268 Issued: 2017-06-27

LTE Band 4-5MHz							
Channal	Frequency	Spurious I	Emission	Limit (dDm)	D !!		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3425	Vertical	-37.53				
	5137.5	V	-38.60	-13.00	Pass		
Low	6850	V					
LOW	3425	Horizontal	-39.75				
	5137.5	Н	-44.80	-13.00	Pass		
	6850	Н					
	3465	Vertical	-37.40	-13.00	Pass		
	5197.5	V	-38.48				
Mid	6930	V	-				
IVIIQ	3465	Horizontal	-39.61				
	5197.5	Н	-44.68	-13.00	Pass		
	6930	Н					
	3505	Vertical	-37.60				
	5257.5	V	-38.66	-13.00	Pass		
Lliah	7010	V	-				
High	3505	Horizontal	-39.73				
	5257.5	Н	-44.80	-13.00	Pass		
	7010	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 4-10MHz		
Channal	Frequency	Spurious	Emission	Limait (dDma)	D 14
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3430	Vertical	-36.97		
	5145	V	-38.90	-13.00	Pass
Low	6860	V			
LOW	3430	Horizontal	-39.31		
	5145	Н	-44.45	-13.00	Pass
	6860	Н			
	3465	Vertical	-37.19		Pass
	5197.5	V	-39.11	-13.00	
Mid	6930	V			
IVIIU	3465	Horizontal	-39.34		Pass
	5197.5	Н	-44.47	-13.00	
	6930	Н	-		
	3500	Vertical	-37.16		
	5250	V	-39.08	-13.00	Pass
Lliah	7000	V	-		
High	3500	Horizontal	-39.17		
	5250	Н	-44.31	-13.00	Pass
	7000	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 252 of 268 Issued: 2017-06-27

LTE Band 4-15MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	D !!		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3435	Vertical	-36.02				
	5152.5	V	-39.29	-13.00	Pass		
Low	6870	V					
LOW	3435	Horizontal	-39.56				
	5152.5	Н	-43.94	-13.00	Pass		
	6870	Н					
	3465	Vertical	-36.31	-13.00	Pass		
	5197.5	V	-39.57				
Mid	6930	V					
IVIIU	3465	Horizontal	-39.66				
	5197.5	Н	-44.02	-13.00	Pass		
	6930	Н					
	3490	Vertical	-36.18				
	5235	V	-39.45	-13.00	Pass		
Lliah	6980	V					
High	3490	Horizontal	-39.60				
	5235	Н	-43.97	-13.00	Pass		
	6980	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-20MHz							
Channel	Frequency	Spurious	Emission	Limit (dPm)	Daguit		
Chamilei	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3440	Vertical	-34.76				
	5160	V	-39.89	-13.00	Pass		
Low	6880	V					
LOW	3440	Horizontal	-39.19				
	5160	Н	-44.32	-13.00	Pass		
	6880	Н					
	3465	Vertical	-34.45	-13.00	Pass		
	5197.5	V	-39.93				
Mid	6930	V					
IVIIU	3465	Horizontal	-39.22				
	5197.5	Н	-44.29	-13.00	Pass		
	6930	Н					
	3490	Vertical	-34.40				
	5235	V	-44.27	-13.00	Pass		
High	6980	V					
High	3490	Horizontal	-38.87		_		
	5235	Н	-44.03	-13.00	Pass		
	6980	Н		1			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 253 of 268 Issued: 2017-06-27

LTE Band 5-1.4MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Result		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	1649.4	Vertical	-36.47				
	2474.1	V	-40.88	-13.00	Pass		
Low	3298.8	V					
LOW	1649.4	Horizontal	-40.58				
	2474.1	Н	-44.67	-13.00	Pass		
	3298.8	Н					
	1673	Vertical	-36.33	-13.00	Pass		
	2509.5	V	-40.75				
Mid	3346	V					
IVIIU	1673	Horizontal	-40.43				
	2509.5	Н	-44.55	-13.00	Pass		
	3346	Н					
	1696.6	Vertical	-36.53				
	2544.9	V	-40.93	-13.00	Pass		
High	3393.2	V	-				
riigii	1696.6	Horizontal	-40.47				
	2544.9	Н	-44.59	-13.00	Pass		
	3393.2	Н					

Remark:

- Remark"---" means that the emission level is too low to be measured
- 1. 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 5-3MHz							
Channal	Frequency	Spurious	Emission	Line it (dDay)	D 14		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	1651	Vertical	-36.51				
	2476.5	V	-40.84	-13.00	Pass		
Low	3302	V					
Low	1651	Horizontal	-40.74				
	2476.5	Н	-44.71	-13.00	Pass		
	3302	Н					
	1673	Vertical	-36.64	-13.00	Pass		
	2509.5	V	-40.96				
Mid	3346	V					
IVIIU	1673	Horizontal	-40.48				
	2509.5	Н	-44.91	-13.00	Pass		
	3346	Н					
	1696.6	Vertical	-37.53				
	2544.9	V	-42.43	-13.00	Pass		
High	3393.2	V					
High	1696.6	Horizontal	-41.96				
	2544.9	Н	-46.32	-13.00	Pass		
	3393.2	Н					

- Remark"---" means that the emission level is too low to be measured 1.
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 254 of 268 Issued: 2017-06-27

LTE Band 5-5MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Danult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	1653	Vertical	-36.34				
	2479.5	V	-41.01	-13.00	Pass		
Low	3306	V					
LOW	1653	Horizontal	-40.01				
	2479.5	Н	-44.54	-13.00	Pass		
	3306	Н					
	1673	Vertical	-35.75	-13.00	Pass		
	2509.5	V	-40.50				
Mid	3346	V					
iviiu	1673	Horizontal	-40.39				
	2509.5	Н	-39.18	-13.00	Pass		
	3346	Н					
	1695	Vertical	-34.44				
	2542.5	V	-38.33	-13.00	Pass		
∐iah	3390	V					
High	1695	Horizontal	-41.47		_		
	2542.5	Н	-40.20	-13.00	Pass		
	3390	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 5-10MHz						
Channal	Frequency	Spurious Emission		Lineit (dDne)	D !!		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	1658	Vertical	-36.60				
	2487	V	-40.75	-13.00	Pass		
Low	3316	V					
LOW	1658	Horizontal	-41.13				
	2487	Н	-44.79	-13.00	Pass		
	3316	Н					
	1673	Vertical	-37.50	-13.00	Pass		
	2509.5	V	-41.54				
Mid	3346	V					
IVIIG	1673	Horizontal	-39.92		Pass		
	2509.5	Н	-44.58	-13.00			
	3346	Н					
	1688	Vertical	-37.12				
	2532	V	-41.88	-13.00	Pass		
High	3376	V	-				
riigri	1688	Horizontal	-39.80				
	2532	Н	-44.69	-13.00	Pass		
	3376	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 255 of 268 Issued: 2017-06-27

LTE Band 7-5MHz							
Channel	Frequency	Spurious I	Emission	Limit (dDm)	Danult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	5005	Vertical	-28.75				
	7507.5	V	-29.46	-25.00	Pass		
Low	10010	V					
LOW	5005	Horizontal	-33.47				
	7507.5	Н	-35.87	-25.00	Pass		
	10010	Н					
	5070	Vertical	-28.11	-25.00	Pass		
	7605	V	-28.90				
Mid	10140	V					
iviiu	5070	Horizontal	-32.81				
	7605	Н	-29.40	-25.00	Pass		
	10140	Н					
	5135	Vertical	-28.62				
	7702.5	V	-29.74	-25.00	Pass		
High	10270	V					
riigii	5135	Horizontal	-32.65				
	7702.5	Н	-29.77	-25.00	Pass		
	10270	Н					

Remark:

- Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-10MHz						
Channal	Frequency	ency Spurious Emission		1: "(15.)	Dooult	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	5010	Vertical	-28.76			
	7515	V	-29.45	-25.00	Pass	
Low	10020	V				
Low	5010	Horizontal	-33.53			
	7515	Н	-35.88	-25.00	Pass	
	10020	Н				
	5070	Vertical	-28.81	-25.00	Pass	
	7605	V	-29.49			
Mid	10140	V				
IVIIU	5070	Horizontal	-33.08			
	7605	Н	-29.83	-25.00	Pass	
	10140	Н				
	5130	Vertical	-29.16			
	7695	V	-30.06	-25.00	Pass	
Lliah	10260	V				
High	5130	Horizontal	-33.01		· · · · · · · · · · · · · · · · · · ·	
	7695	Н	-30.08	-25.00	Pass	
	10260	Н				

- Remark"---" means that the emission level is too low to be measured 1.
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 256 of 268 Issued: 2017-06-27

LTE Band 7-15MHz							
Channal	Frequency	Spurious Emission		Limit (dDm)	Danish		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	5015	Vertical	-28.74				
	7522.5	V	-29.47	-25.00	Pass		
Low	10030	V					
LOW	5015	Horizontal	-33.44				
	7522.5	Н	-35.86	-25.00	Pass		
	10030	Н					
	5070	Vertical	-28.67	-25.00	Pass		
	7605	V	-29.40				
Mid	10140	V					
IVIIU	5070	Horizontal	-34.89				
	7605	Н	-28.28	-25.00	Pass		
	10140	Н					
	5125	Vertical	-27.55				
	7687.5	V	-27.55	-25.00	Pass		
High	10250	V					
riigii	5125	Horizontal	-34.11				
	7687.5	Н	-27.72	-25.00	Pass		
	10250	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-20MHz							
Channal	Frequency	Spurious Emission		Limait (dDms)	D !!		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	5015	Vertical	-28.97				
	7522.5	V	-29.24	-25.00	Pass		
Low	10030	V					
LOW	5015	Horizontal	-34.41				
	7522.5	Н	-36.08	-25.00	Pass		
	10030	Н					
	5070	Vertical	-29.75	-25.00	Pass		
	7605	V	-29.93				
Mid	10140	V					
IVIIG	5070	Horizontal	-32.96				
	7605	Н	-31.04	-25.00	Pass		
	10140	Н					
	5125	Vertical	-30.86				
	7687.5	V	-31.77	-25.00	Pass		
Lligh	10250	V					
High	5125	Horizontal	-32.17				
	7687.5	Н	-31.93	-25.00	Pass		
	10250	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 257 of 268 Issued: 2017-06-27

LTE Band 12-1.4MHz							
Channel	Frequency	Spurious I	Emission	Limit (dDm)	D !!		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	1399.4	Vertical	-40.52				
	2099.1	V	-45.65	-25.00	Pass		
Low	2099.1	V					
LOW	1399.4	Horizontal	-43.52				
	2099.1	Н	-47.52	-25.00	Pass		
	2099.1	Н					
	1415	Vertical	-40.49	-25.00	Pass		
	2122.5	V	-45.62				
Mid	2830	V					
iviiu	1415	Horizontal	-43.61				
	2122.5	Н	-47.59	-25.00	Pass		
	2830	Н					
	1430.6	Vertical	-40.36				
	2145.9	V	-45.50	-25.00	Pass		
□iah	2861.2	V	-				
High	1430.6	Horizontal	-43.62				
	2145.9	Н	-47.61	-25.00	Pass		
	2861.2	Н					

Remark:

- Remark"---" means that the emission level is too low to be measured
- 1. 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 12-3MHz			
Channel	Frequency	Spurious	Emission	Limit (dDm)	Result	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	1401	Vertical	-40.50			
	2101.5	V	-45.67	-25.00	Pass	
Low	2802	V				
Low	1401	Horizontal	-43.44			
	2101.5	Н	-47.50	-25.00	Pass	
	2802	Н				
	1415	Vertical	-40.44		Pass	
	2122.5	V	-45.61	-25.00		
Mid	2830	V				
IVIIU	1415	Horizontal	-43.76			
	2122.5	Н	-47.25	-25.00	Pass	
	2830	Н				
	1429	Vertical	-39.33			
	2143.5	V	-43.78	-25.00	Pass	
∐iah	2858	V				
High	1429	Horizontal	-41.92			
	2143.5	Н	-45.50	-25.00	Pass	
	2858	Н				

- Remark"---" means that the emission level is too low to be measured 1.
- The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 258 of 268 Issued: 2017-06-27

		LTE Band	d 12-5MHz			
Channal	Frequency	Spurious I	Emission	Limit (dDm)	Dooult	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	1403	Vertical	-40.45			
	2104.5	V	-45.72	-25.00	Pass	
Low	2806	V				
LOW	1403	Horizontal	-43.24			
	2104.5	Н	-47.46	-25.00	Pass	
	2806	Н				
	1415	Vertical	-40.29		Pass	
	2122.5	V	-45.57	-25.00		
Mid	2830	V			<u> </u>	
IVIIU	1415	Horizontal	-43.31			
	2122.5	Н	-45.34	-25.00	Pass	
	2830	Н				
	1427	Vertical	-40.05			
	2140.5	V	-45.18	-25.00	Pass	
∐igh	2854	V				
High	1427	Horizontal	-43.34			
	2140.5	Н	-45.37	-25.00	Pass	
	2854	Н				

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Band	d 12-10MHz			
Channal	Frequency	Spurious	Emission	Limait (dDma)	Danult	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	1408	Vertical	-40.46			
	2112	V	-45.71	-25.00	Pass	
Low	4928	V				
LOW	1408	Horizontal	-43.25			
	2112	Н	-47.46	-25.00	Pass	
	4928	Н				
	1415	Vertical	-40.47		Pass	
	2122.5	V	-45.72	-25.00		
Mid	2830	V				
IVIIG	1415	Horizontal	-42.74		Pass	
	2122.5	Н	-47.37	-25.00		
	2830	Н				
	1422	Vertical	-40.31			
	2133	V	-45.87	-25.00	Pass	
High	2844	V	-			
riigii	1422	Horizontal	-42.72			
	2133	Н	-47.39	-25.00	Pass	
	2844	Н				

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706002502 Page: 259 of 268 Issued: 2017-06-27

		LTE Ban	d 17-5MHz			
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dooult	
Chamei	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	1413	Vertical	-47.33			
	2119.5	V	-48.52	-13.00	Pass	
Low	2826	V				
LOW	1413	Horizontal	-50.15			
	2119.5	Н	-51.47	-13.00	Pass	
	2826	Н				
	1420	Vertical	-46.83		Pass	
	2130	V	-48.08	-13.00		
Mid	2840	V				
iviiu	1420	Horizontal	-51.09			
	2130	Н	-47.35	-13.00	Pass	
	2840	Н				
	1427	Vertical	-46.10			
	2140.5	V	-46.88	-13.00	Pass	
Lliah	2854	V				
High	1427	Horizontal	-50.76			
	2140.5	Н	-46.95	-13.00	Pass	
	2854	Н				

Remark:

- 1.
- Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 17-10MHz								
Channel	Frequency	Spurious I	Emission	Limit (dDm)	Dooult				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	1418	Vertical	-47.37						
	2127	V	-48.48	-13.00	Pass				
Low	2836	V							
LOW	1418	Horizontal	-50.34						
	2127	Н	-51.51	-13.00	Pass				
	2836	Н							
	1420	Vertical	-47.52		Pass				
	2130	V	-48.61	-13.00					
Mid	2840	V			<u> </u>				
IVIIG	1420	Horizontal	-49.68						
	2130	Н	-49.12	-13.00	Pass				
	2840	Н							
	1422	Vertical	-48.03						
	2133	V	-49.45	-13.00	Pass				
∐iah	2844	V							
High	1422	Horizontal	-49.51						
	2133	Н	-49.48	-13.00	Pass				
	2844	Н							

- 1. 2. Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report


Report No.: TRE1706002502 Page: 260 of 268 Issued: 2017-06-27

5.7. Frequency stability V.S. Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

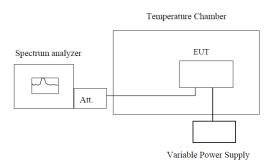

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

- 1. The equipment under test was connected to an external DC power supply and input rated voltage.
- 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- 3. The EUT was placed inside the temperature chamber.
- Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
- 5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

 Report No.: TRE1706002502 Page: 261 of 268 Issued: 2017-06-27

Re	eference Frequency	y: LTE Band	2 Middle ch	nannel=188	0MHz,20MHz	Bandwidth	
			Freque				
Power supplied (Vdc)	Temperature (°C)	QP	SK	16	6QAM	Limit (ppm)	Result
(• 40)	(0)	Hz	ppm	Hz	ppm	(PPIII)	
	-30	25	0.013	24	0.013		
	-20	19	0.010	20	0.011		
	-10	22	0.012	19	0.010		
	0	20	0.011	17	0.009		
5.00	10	19	0.010	16	0.009	2.50	Pass
	20	12	0.006	20	0.011		
	30	16	0.009	15	0.008		
	40	18	0.010	16	0.009		
	50	18	0.010	20	0.011	-	
Ref	erence Frequency	: LTE Band	4 Middle cha	annel=1732	.5MHz,20MHz	Bandwidth	
			Freque	ncy error			
Power supplied (Vdc)	• •		SK	16	6QAM	Limit	Result
(vuc)	(°C)	Hz	ppm	Hz	ppm	(ppm)	
	-30	19	0.011	19	0.011		
	-20	20	0.012	16	0.009		
	-10	19	0.011	13	0.008		
	0	10	0.006	15	0.009		
5.00	10	11	0.006	15	0.009	2.50	Pass
	20	18	0.010	14	0.008		
	30	12	0.007	10	0.006		
	40	11	0.006	12	0.007		
	50	14	0.008	19	0.011		
Re	ference Frequency	: LTE Band	5 Middle ch	annel=836.	5MHz,10MHz	Bandwidth	
			Freque	ency error			
Power supplied (Vdc)	Temperature (°C)	QP	SK	16	6QAM	Limit (ppm)	Result
(vuc)	(0)	Hz	ppm	Hz	ppm	(ррііі)	
	-30	18	0.022	19	0.023		
	-20	13	0.016	16	0.019		
	-10	13	0.016	10	0.012		
	0	10	0.012	11	0.013		
5.00	10	9	0.011	15	0.018	2.50	Pass
	20	13	0.016	13	0.016		
	30	18	0.022	10	0.012		
	40	11	0.013	17	0.020		
	50	14	0.017	14	0.017		

Report No.: TRE1706002502 Page: 262 of 268 Issued: 2017-06-27

Re	eference Frequency	y: LTE Band	7 Middle ch	nannel=253	5MHz,20MHz	Bandwidth	
	•			ncy error			
Power supplied (Vdc)	Temperature (°C)	QP			6QAM	Limit (ppm)	Result
(v do)	(0)	Hz	ppm	Hz	ppm	(PPIII)	
	-30	21	0.008	19	0.007		
	-20	19	0.007	18	0.007		
	-10	18	0.007	20	0.008		
	0	16	0.006	18	0.007		
5.00	10	15	0.006	12	0.005	2.50	Pass
	20	11	0.004	16	0.006		
	30	14	0.006	15	0.006		
	40	18	0.007	20	0.008		
	50	17	0.007	17	0.007		
Ref	erence Frequency	LTE Band	12 Middle cl	nannel=707	.5MHz,10MHz	Bandwidth	
D !! !			Freque	ncy error		1	
Power supplied (Vdc)	Temperature (°C)	QP	SK	16	6QAM	Limit (ppm) Result	
(Vuc)	(0)	Hz	ppm	Hz	ppm	(ppiii)	
	-30	21	0.030	16	0.023		
	-20	19	0.027	21	0.030		
	-10	18	0.025	20	0.028		
	0	16	0.023	20	0.028		
5.00	10	15	0.021	19	0.027	2.50	Pass
	20	11	0.016	16	0.023		
	30	15	0.021	18	0.025		
	40	16	0.023	17	0.024		
	50	18	0.025	19	0.027		
Re	ference Frequency	y: LTE Band	17 Middle	channel=710	OMHz,10MHz I	Bandwidth	
Device everylic l	Townsanton		Freque	ncy error		l imali	
Power supplied (Vdc)	Temperature (°C)	QP	SK	16	QAM	Limit (ppm)	Result
(v do)	(0)	Hz	ppm	Hz	ppm	(PPIII)	
	-30	19	0.027	20	0.028		
	-20	16	0.023	21	0.030		
	-10	17	0.024	19	0.027		
	0	15	0.021	18	0.025		
5.00	10	19	0.027	15	0.021	2.50	Pass
	20	16	0.023	16	0.023		
	30	20	0.028	16	0.023		
	40	16	0.023	20	0.028		
	50	18	0.025	19	0.027	1	


Report No.: TRE1706002502 Page: 263 of 268 Issued: 2017-06-27

5.8. Frequency stability V.S. Voltagemeasurement

LIMIT

2.5ppm

TEST CONFIGURATION

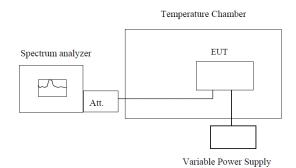

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

- 1. Set chamber temperature to 25°C. Use a variable DC power source topower the EUT and set the voltage to rated voltage.
- 2. Set the spectrum analyzer RBW lowenough to obtain the desired frequency resolution and recorded the frequency.
- 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, recordthe maximum frequency change.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

 Report No.: TRE1706002502 Page: 264 of 268 Issued: 2017-06-27

Refe	erence Frequency	y: LTE Ban	d 2 Middle c	hannel=1880	MHz,20MHz	Bandwidth	
	Power			ency error			
Temperature (°C)	supplied	QF	PSK	16	QAM	Limit	Result
, , ,	(Vdc)	Hz	ppm	Hz	ppm	(ppm)	
	5.50	16	0.009	19	0.010		
25	5.00	19	0.010	16	0.009	2.50	Pass
	4.50	20	0.011	15	0.008		
Refe	ence Frequency	: LTE Band	4 Middle ch	annel=1732	5MHz,20MHz	z Bandwidth	
	Power		Frequ	ency error		1.220	
Temperature (°C)	supplied	QF	PSK	16	QAM	Limit (ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(ррііі)	
	5.50	13	0.008	12	0.007		
25	5.00	16	0.009	10	0.006	2.50	Pass
	4.50	15	0.009	18	0.010		
Refe	rence Frequency	: LTE Band	d 5 Middle cl	nannel=836.	5MHz,10MHz	Bandwidth	
	Power		Frequ	ency error		Linait	
Temperature (°C)	supplied	QF	PSK	16	QAM	Limit (ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(PPIII)	
	5.50	19	0.023	12	0.014		
25	5.00	22	0.026	18	0.022	2.50	Pass
	4.50	18	0.022	17	0.020		
Refe	erence Frequency	y: LTE Ban	d 7 Middle c	hannel=253	5MHz,20MHz	Bandwidth	
	Power		Frequ	ency error		Limit	
Temperature (°C)	supplied	QPSK		16	QAM	(ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(11 /	
	5.50	18	0.007	17	0.007		
25	5.00	16	0.006	16	0.006	2.50	Pass
	4.50	18	0.007	15	0.006		
Refe	ence Frequency	LTE Band	12 Middle o	hannel=707	.5MHz,10MHz	Bandwidth	
		Frequency error					
	Power		Frequ	ency error		Limit	
Temperature (°C)	supplied		PSK	16	QAM	Limit (ppm)	Result
Temperature (°C)		QF Hz			QAM ppm	Limit (ppm)	Result
Temperature (°C)	supplied		PSK	16	1		Result
Temperature (°C)	supplied (Vdc)	Hz	PSK ppm	16 Hz	ppm		Result Pass
25	supplied (Vdc) 5.50 5.00 4.50	Hz 16 15 19	ppm 0.023 0.021 0.027	16 Hz 17 16 15	ppm 0.024 0.023 0.021	2.50	
25	supplied (Vdc) 5.50 5.00	Hz 16 15 19	ppm 0.023 0.021 0.027 d 17 Middle	16 Hz 17 16 15 channel=710	ppm 0.024 0.023 0.021	2.50	
25	supplied (Vdc) 5.50 5.00 4.50 erence Frequency	Hz 16 15 19 y: LTE Band	ppm 0.023 0.021 0.027 d 17 Middle Frequency	16 Hz 17 16 15 channel=710 ency error	ppm 0.024 0.023 0.021 0MHz,10MHz	2.50	Pass
25	supplied (Vdc) 5.50 5.00 4.50 Prence Frequency Supplied	Hz 16 15 19 y: LTE Ban	ppm 0.023 0.021 0.027 d 17 Middle	16 Hz 17 16 15 channel=710 ency error	ppm 0.024 0.023 0.021	2.50 Bandwidth Limit	
25	supplied (Vdc) 5.50 5.00 4.50 Prence Frequency Power supplied (Vdc)	Hz 16 15 19 y: LTE Band QF Hz	ppm 0.023 0.021 0.027 d 17 Middle Freque	16 Hz 17 16 15 channel=710 ency error 16 Hz	ppm 0.024 0.023 0.021 0MHz,10MHz QAM ppm	2.50	Pass
25 Refe Temperature (°C)	supplied (Vdc) 5.50 5.00 4.50 Prence Frequence Power supplied (Vdc) 5.50	Hz 16 15 19 y: LTE Band QF Hz	ppm 0.023 0.021 0.027 d 17 Middle Freque PSK ppm 0.025	16 Hz 17 16 15 channel=710 ency error 16 Hz 17	ppm 0.024 0.023 0.021 0MHz,10MHz QAM ppm 0.024	2.50 Bandwidth Limit (ppm)	Pass Result
25	supplied (Vdc) 5.50 5.00 4.50 Prence Frequency Power supplied (Vdc)	Hz 16 15 19 y: LTE Band QF Hz	ppm 0.023 0.021 0.027 d 17 Middle Freque	16 Hz 17 16 15 channel=710 ency error 16 Hz	ppm 0.024 0.023 0.021 0MHz,10MHz QAM ppm	2.50 Bandwidth Limit	Pass


Report No.: TRE1706002502 Page: 265 of 268 Issued: 2017-06-27

5.9. Peak-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

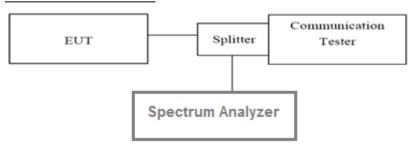

TEST PROCEDURE

According with KDB 971168

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. Forcontinuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burstransmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

 Report No.: TRE1706002502 Page: 266 of 268 Issued: 2017-06-27

LTE Band 2-20MHz								
Modulation	QP:	SK	16Q	SQAM Limit(dB) Bo		Dooult		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	6.50	6.48	6.55	6.56	13.00	Pass		
Mid	6.74	6.55	7.15	7.47	13.00	Pass		
High	6.58	6.78	6.38	6.52	13.00	Pass		

LTE Band 4-20MHz								
Modulation	QP	SK	16Q	AM	Limit/dD)	Dooult		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	7.55	6.48	6.88	6.74	13.00	Pass		
Mid	6.45	6.75	6.47	6.52	13.00	Pass		
High	6.36	6.69	6.52	6.38	13.00	Pass		

LTE Band 5-10MHz								
Modulation	QP:	SK	16Q	AM	Limit/dD\	Decult		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	3.45	3.59	3.49	3.45	13.00	Pass		
Mid	3.76	3.47	3.66	3.43	13.00	Pass		
High	3.58	3.88	3.52	3.76	13.00	Pass		

LTE Band 7-20MHz							
Modulation	QPS	SK	16Q	AM	Limit/dD\	Dogult	
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result	
Low	7.58	6.85	6.88	6.42	13.00	Pass	
Mid	7.46	6.94	6.45	6.85	13.00	Pass	
High	7.37	6.43	6.37	6.44	13.00	Pass	


LTE Band 12-10MHz									
Modulation	QPSK		16QAM		Limit/dD\	Dogult			
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result			
Low	7.64	7.15	6.98	6.96	13.00	Pass			
Mid	7.52	7.42	6.75	6.88	13.00	Pass			
High	7.38	7.35	6.48	6.52	13.00	Pass			


LTE Band 17-10MHz										
Modulation	QPSK		16QAM		Limit/dD\	Result				
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Resuit				
Low	5.43	5.44	5.45	5.28	13.00	Pass				
Mid	5.38	5.38	5.66	5.39	13.00	Pass				
High	5.65	5.36	5.37	5.65	13.00	Pass				

Report No.: TRE1706002502 Page: 267 of 268 Issued: 2017-06-27

6. Test Setup Photos of the EUT

Radiated emission:

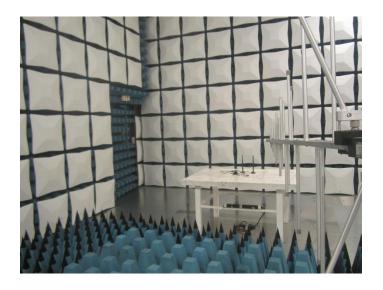

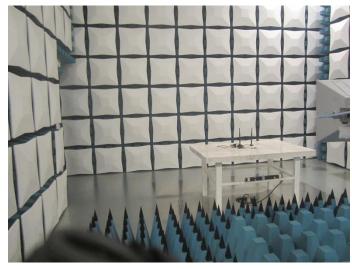



Report No.: TRE1706002502 Page: 268 of 268 Issued: 2017-06-27

7. External and Internal Photos of the EUT

Reference to the test report No.: TRE1706002501.

End of Report.....