




10MHz / QPSK


CHANNEL 20000

FREQUENCY RANGE : 30MHz~18GHz

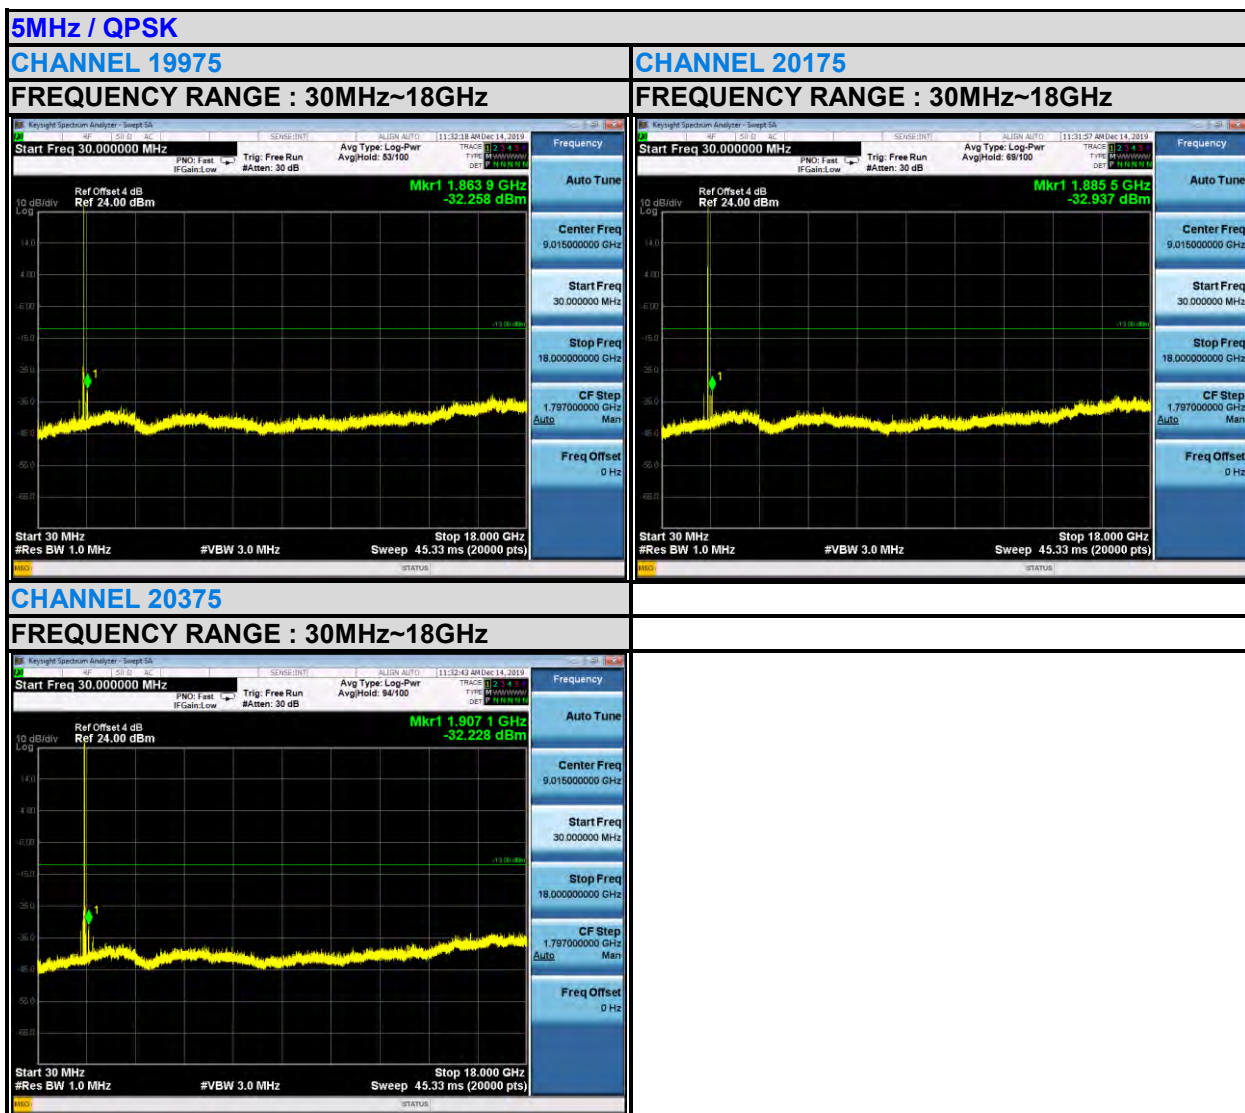


CHANNEL 20175


FREQUENCY RANGE : 30MHz~18GHz

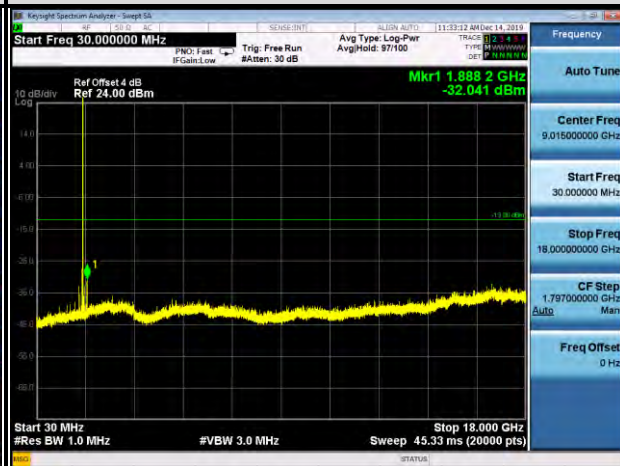

CHANNEL 20350

FREQUENCY RANGE : 30MHz~18GHz

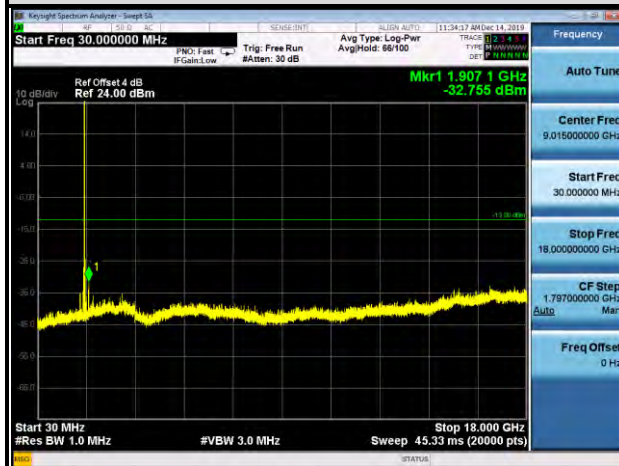


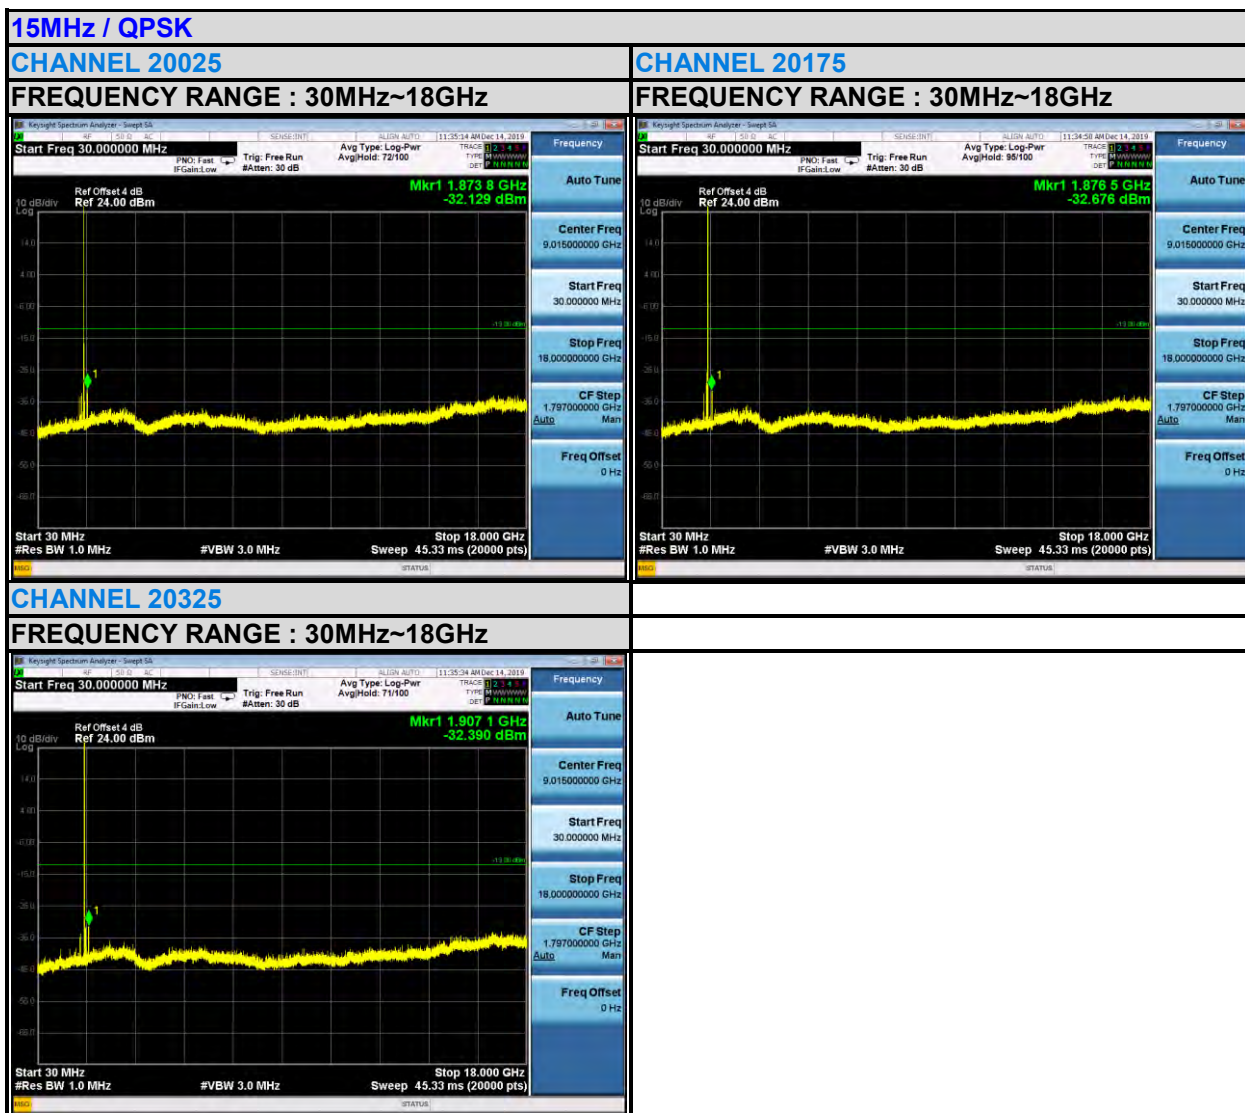

20MHz / QPSK


CHANNEL 20050

FREQUENCY RANGE : 30MHz~18GHz

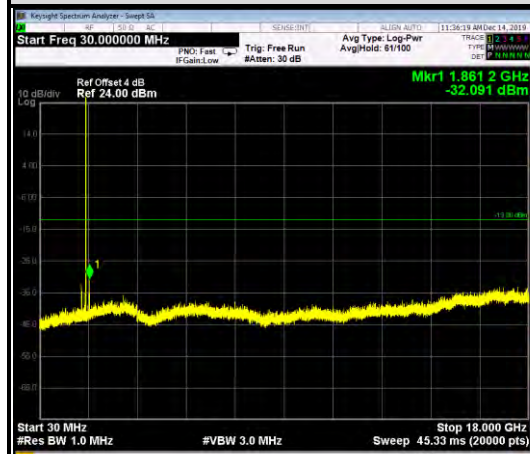


CHANNEL 20175

FREQUENCY RANGE : 30MHz~18GHz

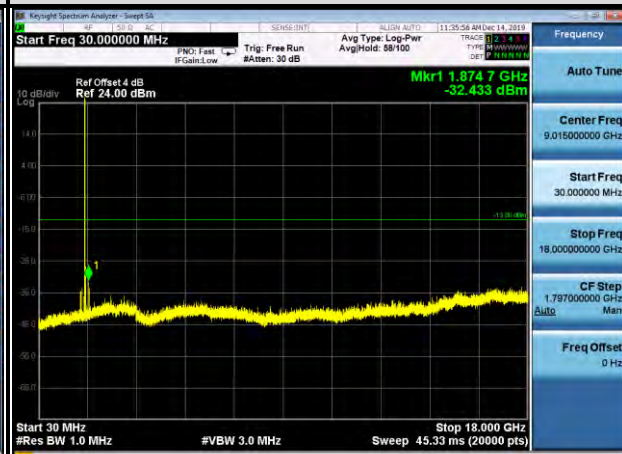

CHANNEL 20300

FREQUENCY RANGE : 30MHz~18GHz

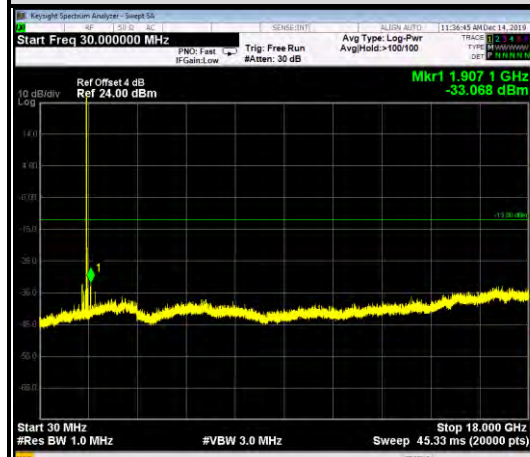


LTE CAT-M1 BAND 66

1.4MHz / QPSK

CHANNEL 131979

FREQUENCY RANGE : 30MHz~18GHz

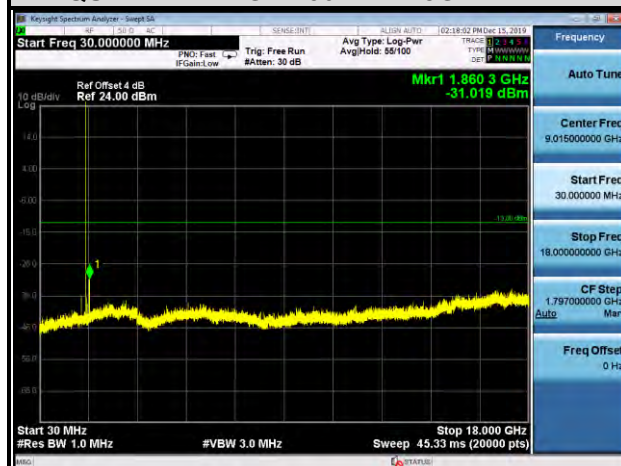


CHANNEL 132322


FREQUENCY RANGE : 30MHz~18GHz




CHANNEL 132665

FREQUENCY RANGE : 30MHz~18GHz

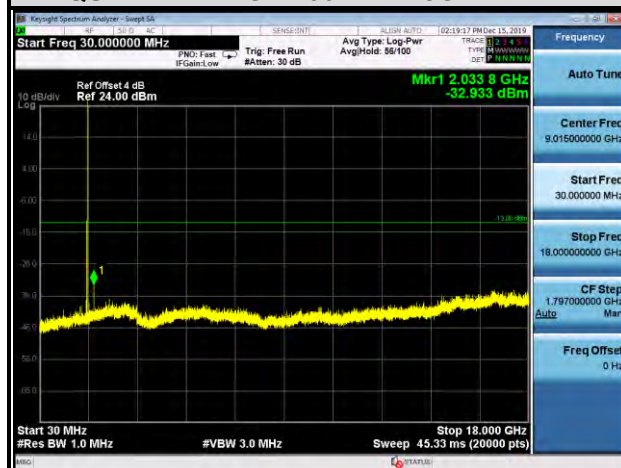

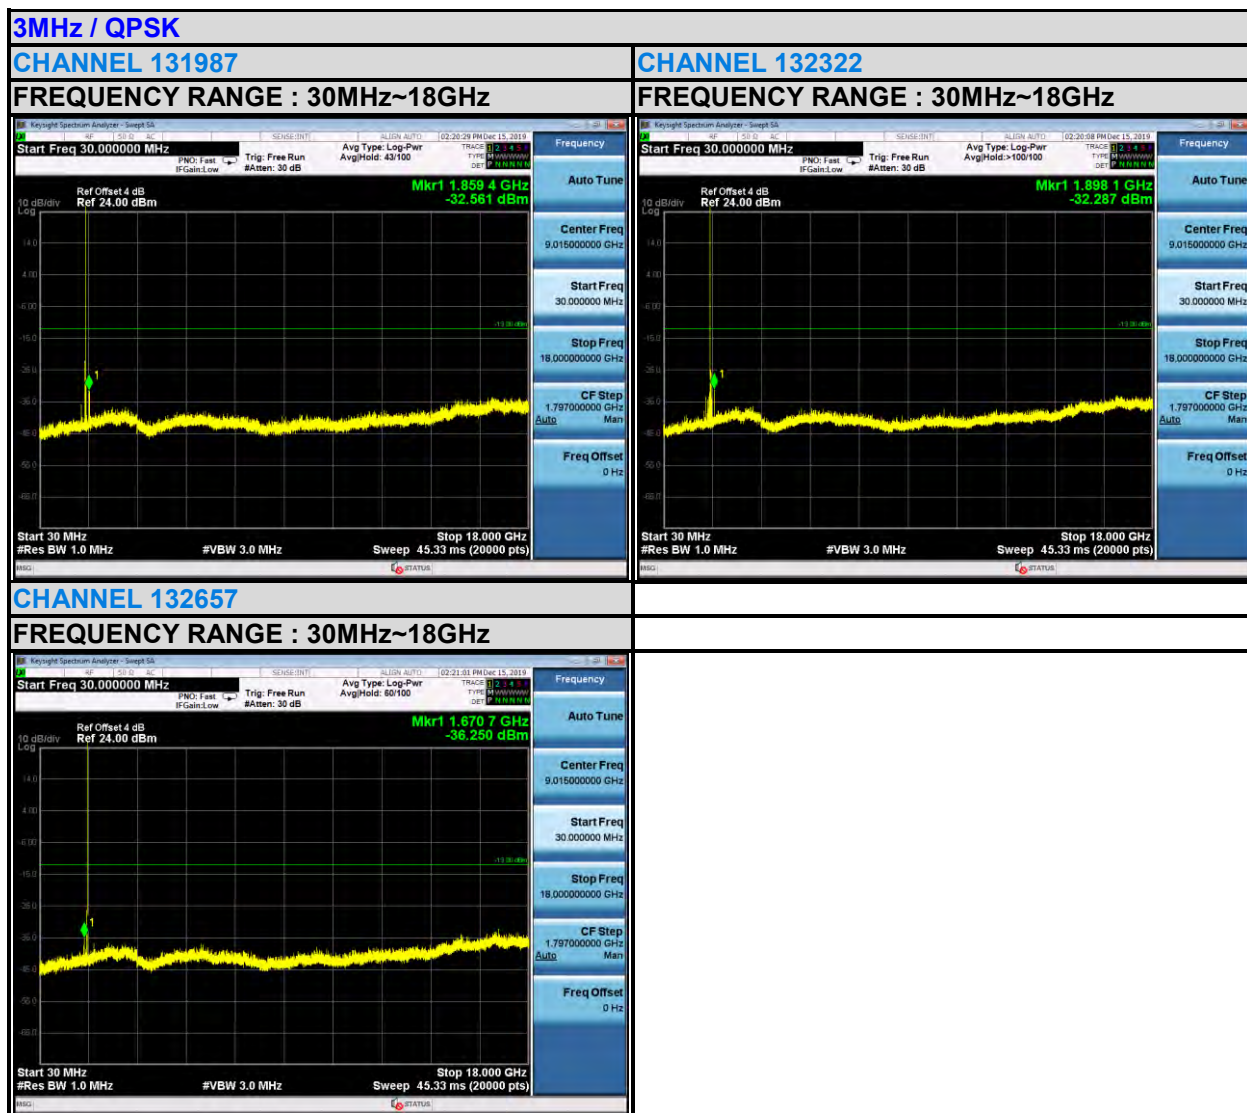

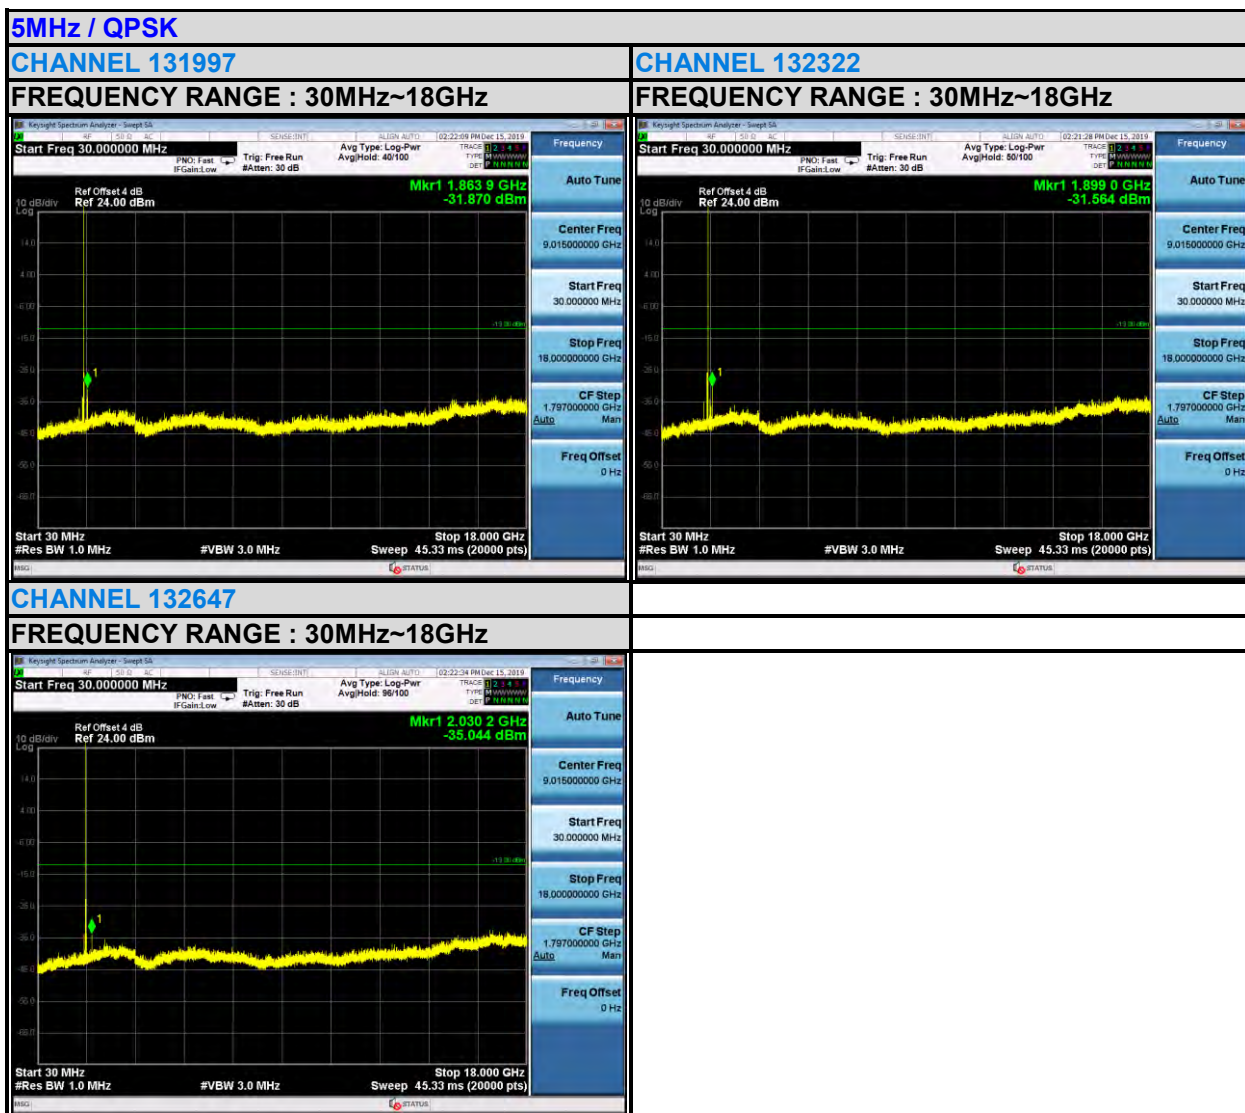

10MHz / QPSK


CHANNEL 132022

FREQUENCY RANGE : 30MHz~18GHz



CHANNEL 132322


FREQUENCY RANGE : 30MHz~18GHz

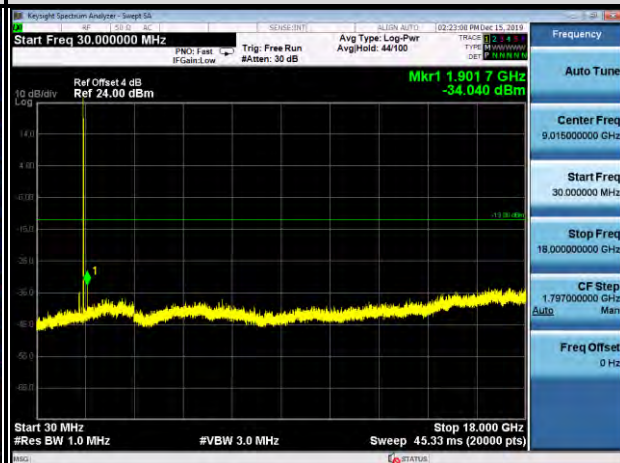


CHANNEL 132622

FREQUENCY RANGE : 30MHz~18GHz



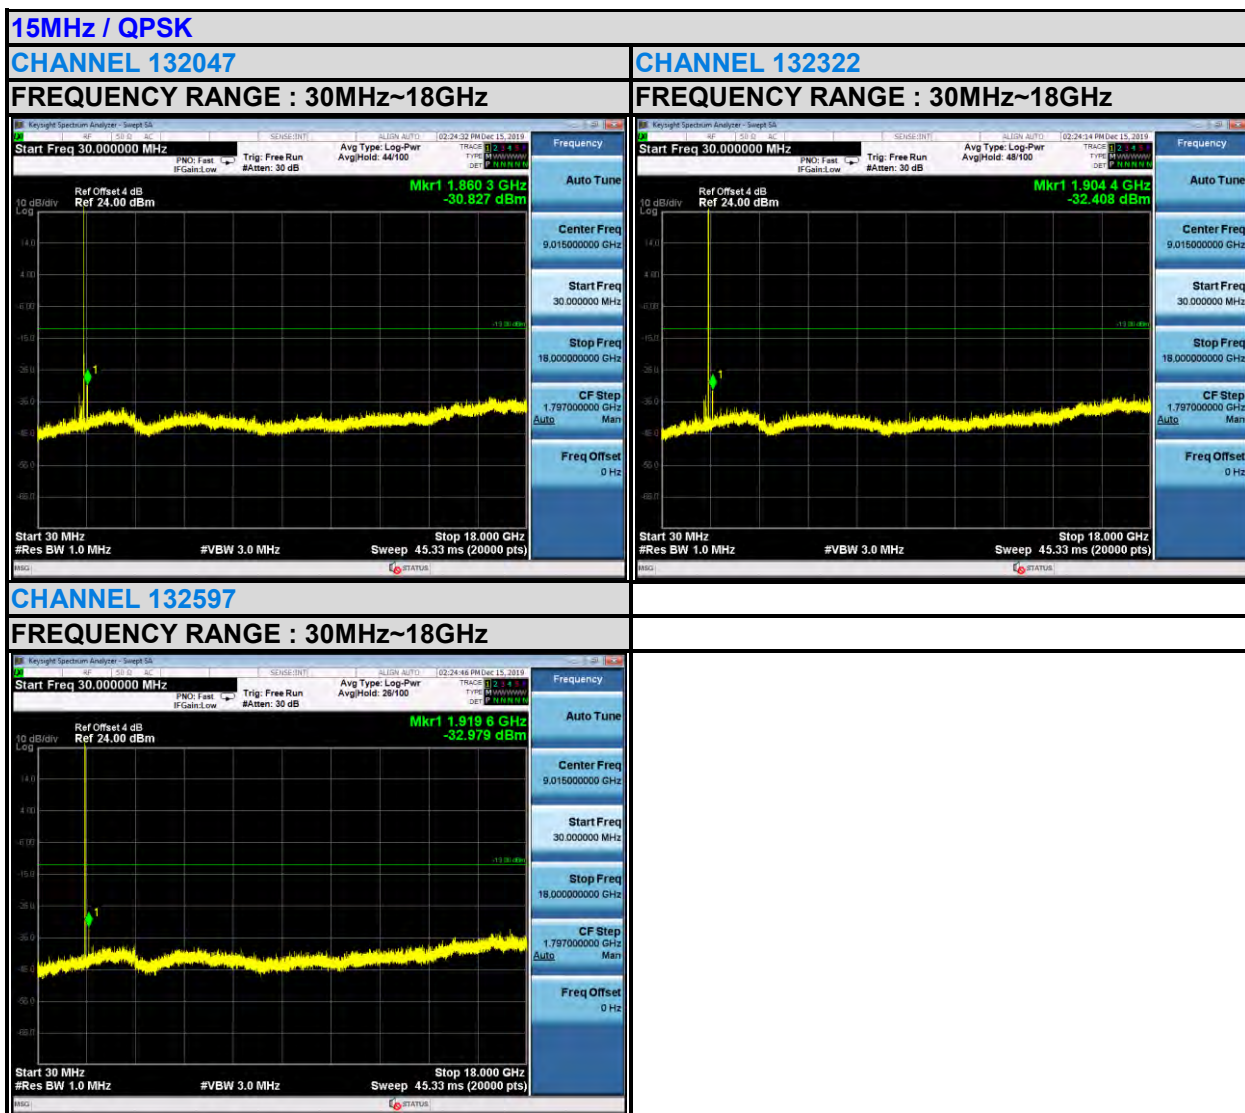

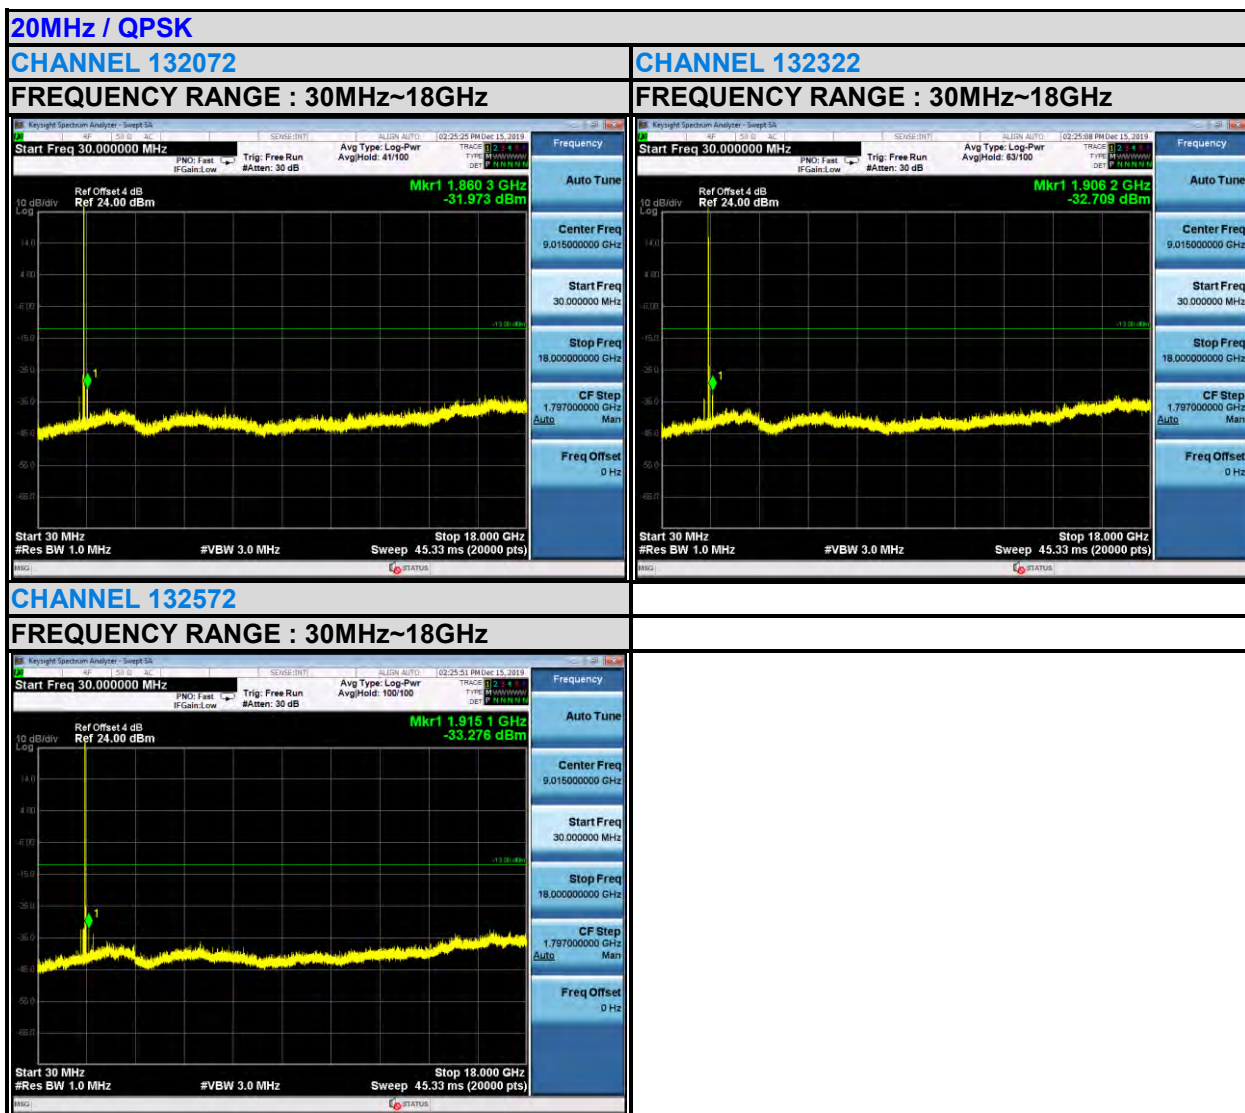

3.7 RADIATED EMISSION MEASUREMENT

3.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

3.7.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}.$


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.7.3 DEVIATION FROM TEST STANDARD


No deviation

3.7.4 TEST SETUP

< Frequency Range 30MHz~1GHz >

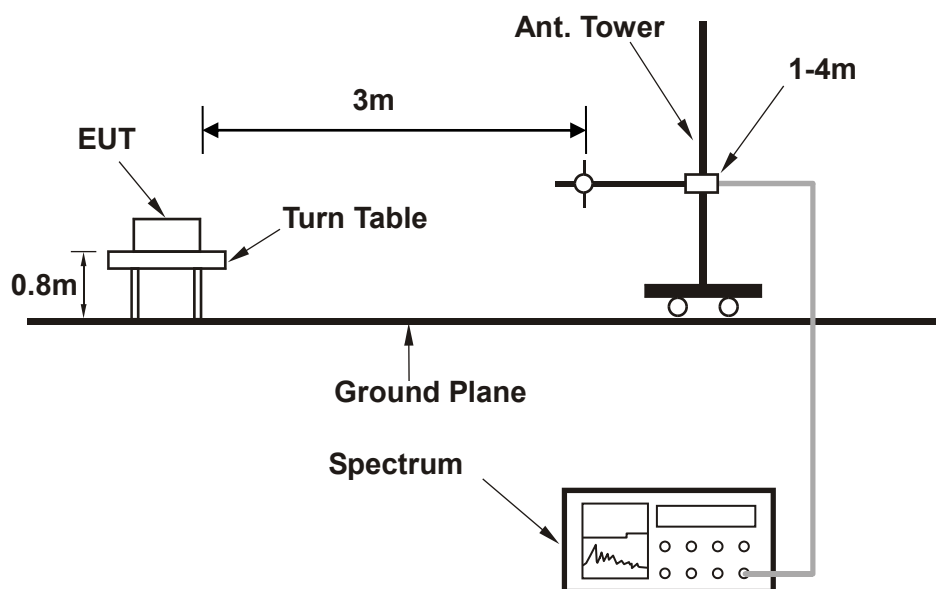

<Frequency Range above 1GHz>

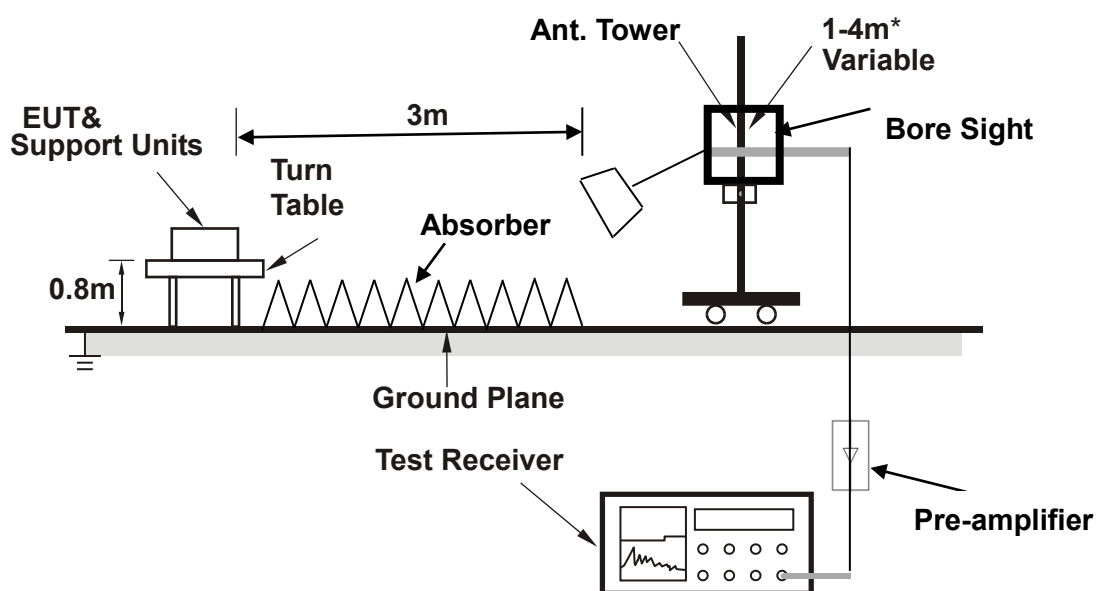

Note: Above 1G is a directional antenna

depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.7.5 TEST RESULTS


BELOW 1GHz WORST-CASE DATA

30 MHz – 1GHz data:

LTE CAT-M1 BAND 66


MODE	TX channel 132322	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	64.920	-45.84	-37.25	-13.00	-32.84	-8.59	Peak	Horizontal
2		98.870	-47.24	-37.64	-13.00	-34.24	-9.60	Peak	Horizontal
3		163.860	-47.46	-30.80	-13.00	-34.46	-16.66	Peak	Horizontal
4		232.730	-50.23	-35.57	-13.00	-37.23	-14.66	Peak	Horizontal
5		278.320	-50.60	-37.86	-13.00	-37.60	-12.74	Peak	Horizontal
6		324.880	-59.32	-48.66	-13.00	-46.32	-10.66	Peak	Horizontal

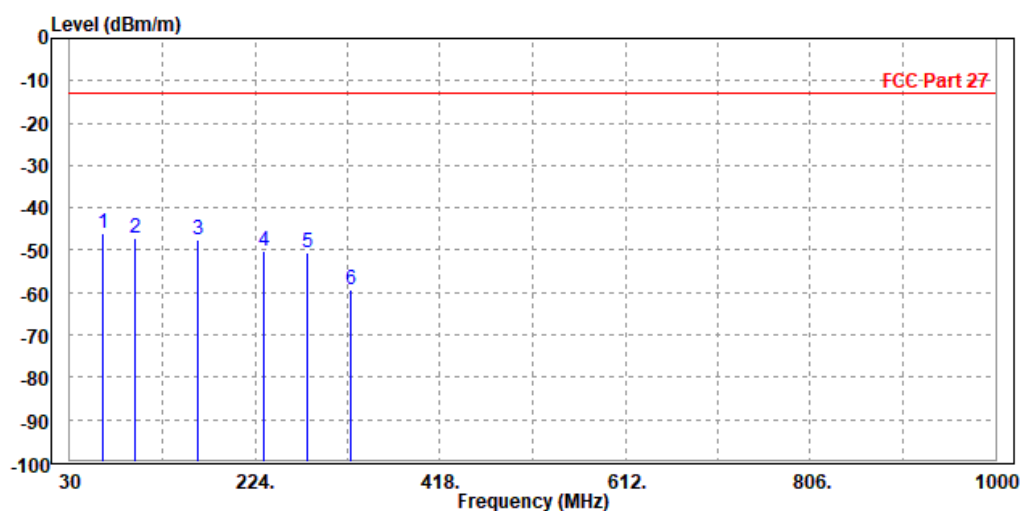

MODE	TX channel 132322	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	30.000	-26.57	-32.67	-13.00	-13.57	6.10	Peak	Vertical
2	64.920	-44.02	-31.20	-13.00	-31.02	-12.82	Peak	Vertical
3	131.850	-51.32	-40.79	-13.00	-38.32	-10.53	Peak	Vertical
4	162.890	-52.61	-39.32	-13.00	-39.61	-13.29	Peak	Vertical
5	232.730	-51.99	-42.73	-13.00	-38.99	-9.26	Peak	Vertical
6	270.560	-55.89	-46.57	-13.00	-42.89	-9.32	Peak	Vertical

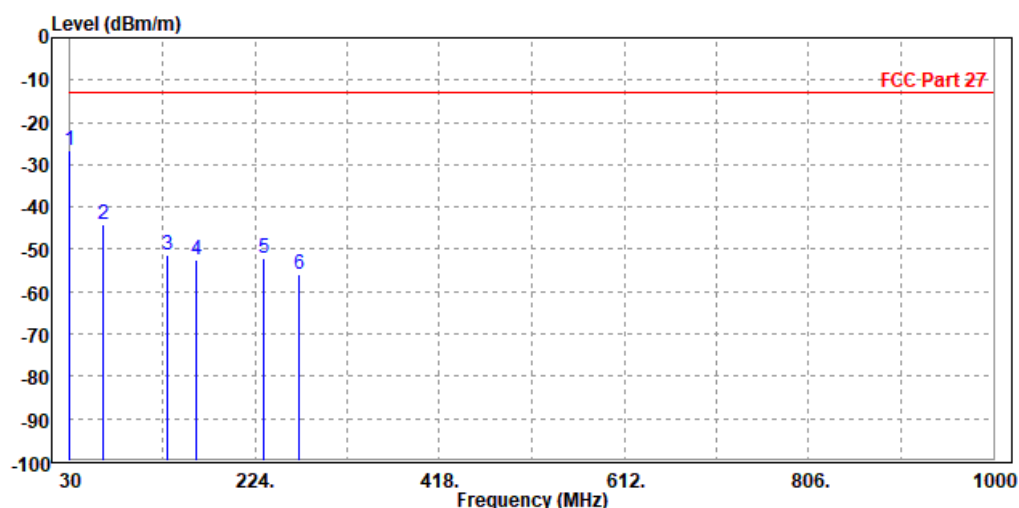



Test Report No.: RF191122W002-3

ABOVE 1GHz

Note: For higher frequency, the emission is too low to be detected.


LTE CAT-M1 BAND 4

CHANNEL BANDWIDTH: 1.4MHz / QPSK

CH 19957


MODE	TX channel 19957	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3418.000	-36.21	-44.80	-13.00	-23.21	8.59	Peak	Horizontal
2		5132.100	-41.99	-50.91	-13.00	-28.99	8.92	Peak	Horizontal

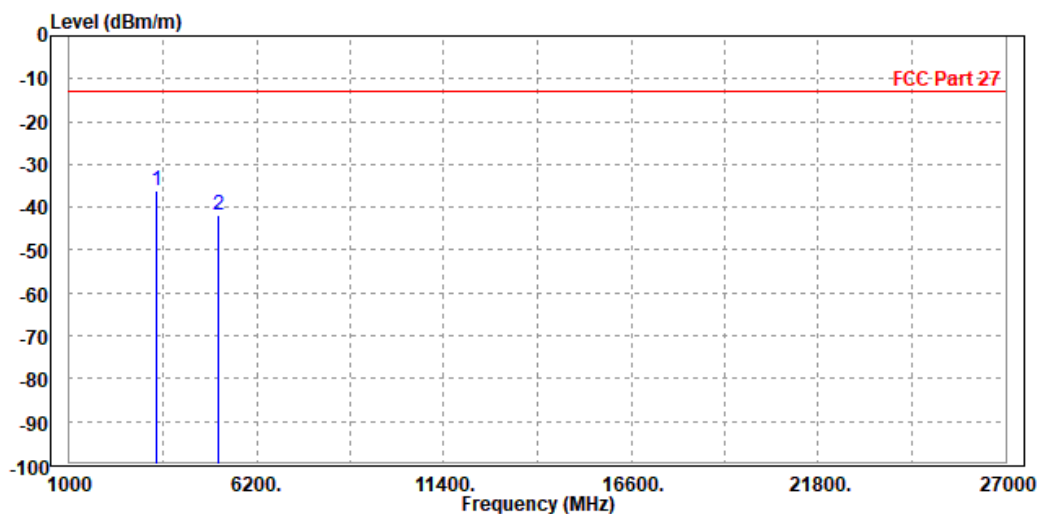

MODE	TX channel 19957	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3418.000	-34.26	-43.37	-13.00	-21.26	9.11	Peak	Vertical
2		5132.100	-35.24	-45.09	-13.00	-22.24	9.85	Peak	Vertical

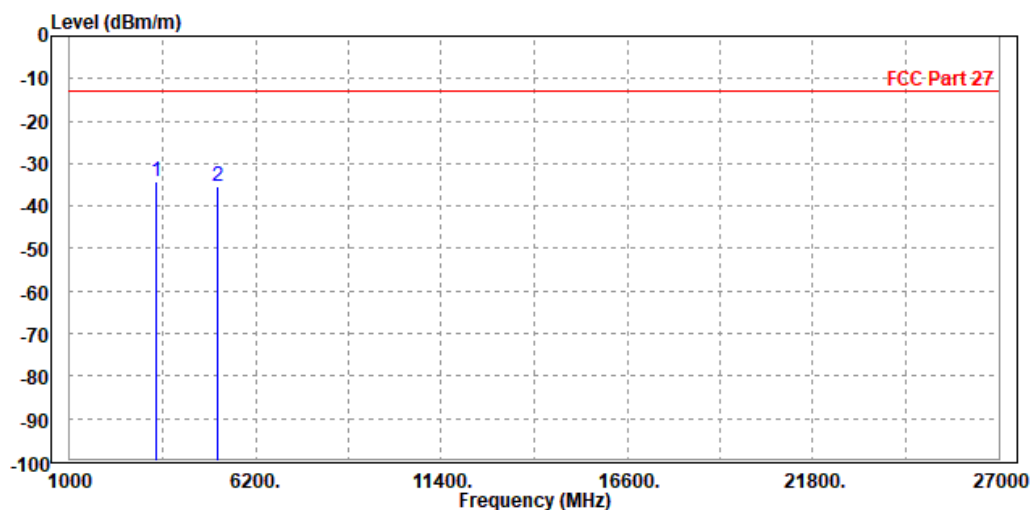

CH 20175


MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3470.000	-34.76	-43.34	-13.00	-21.76	8.58	Peak	Horizontal
2	5197.500	-43.29	-52.41	-13.00	-30.29	9.12	Peak	Horizontal

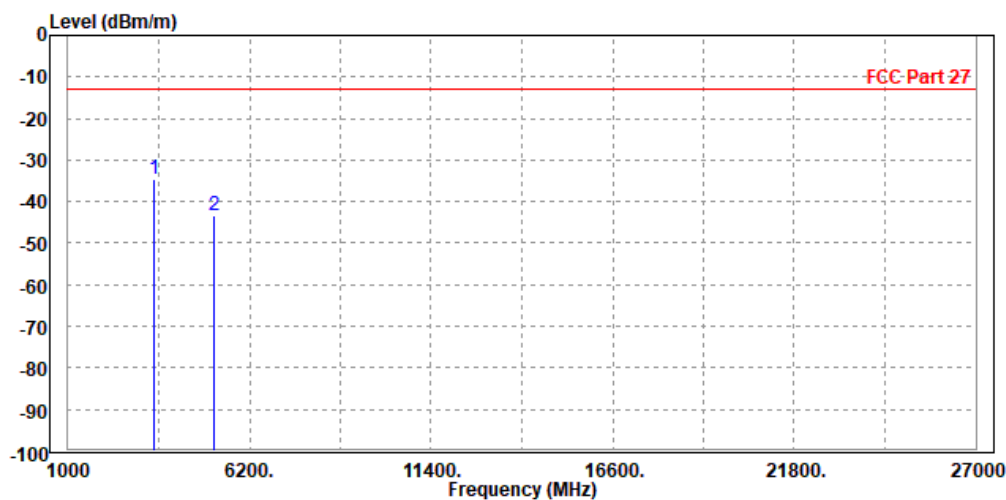

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3470.000	-30.40	-39.56	-13.00	-17.40	9.16	Peak	Vertical
2		5197.500	-37.38	-47.20	-13.00	-24.38	9.82	Peak	Vertical

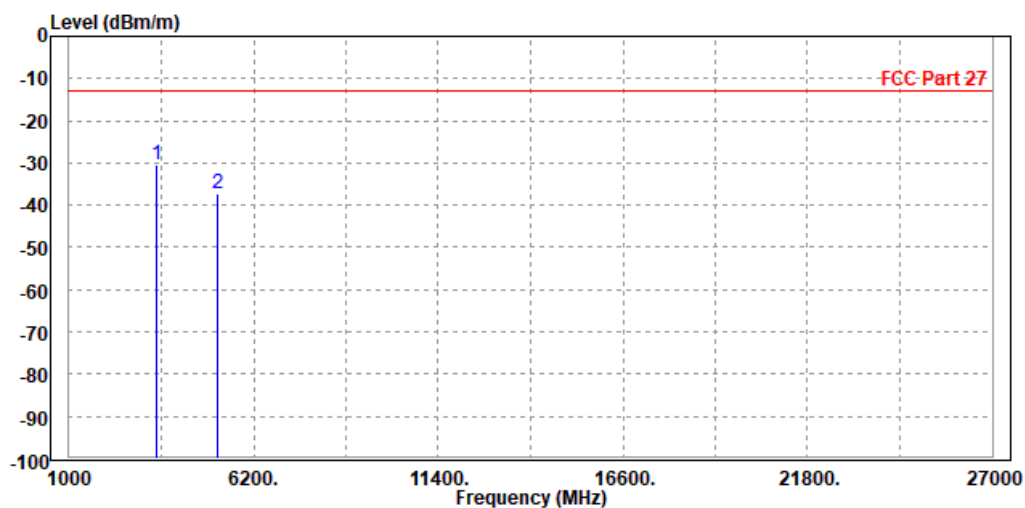




Test Report No.: RF191122W002-3

CH 20393


MODE	TX channel 20393	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3496.000	-33.73	-42.30	-13.00	-20.73	8.57	Peak	Horizontal
2		5262.900	-44.46	-53.77	-13.00	-31.46	9.31	Peak	Horizontal

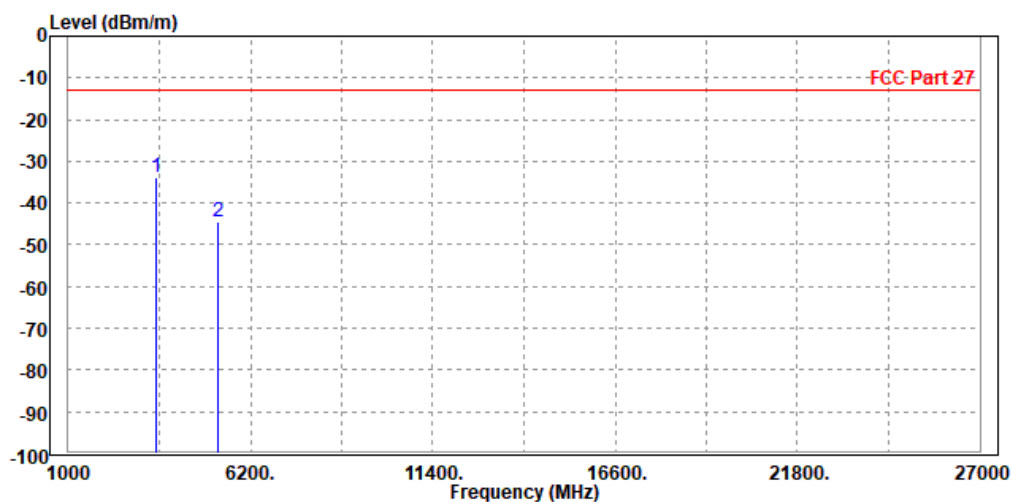

MODE	TX channel 20393	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3496.000	-32.06	-41.25	-13.00	-19.06	9.19	Peak	Vertical
2		5264.000	-40.69	-50.49	-13.00	-27.69	9.80	Peak	Vertical

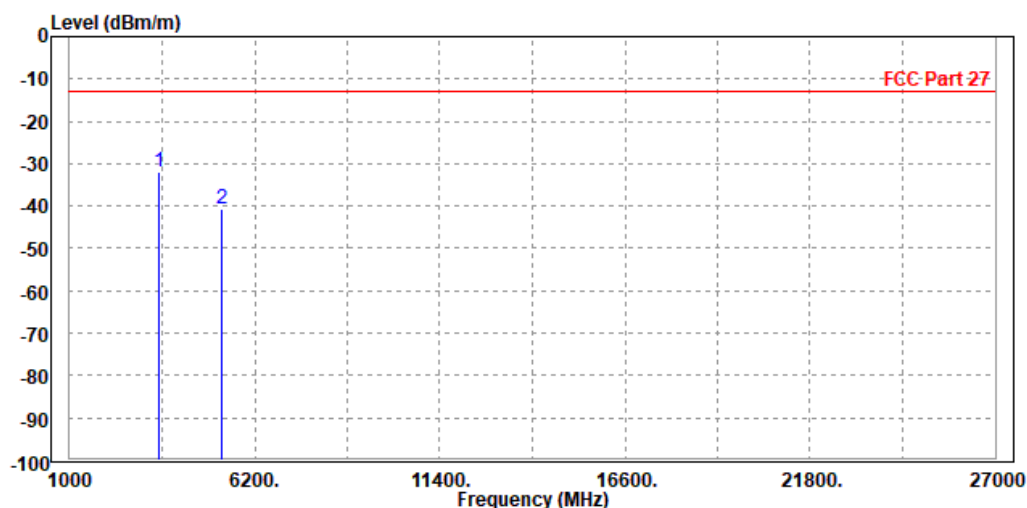




Test Report No.: RF191122W002-3

CHANNEL BANDWIDTH: 3MHz / QPSK


MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3470.000	-48.88	-57.46	-13.00	-35.88	8.58	Peak	Horizontal
2	5197.500	-50.27	-59.39	-13.00	-37.27	9.12	Peak	Horizontal

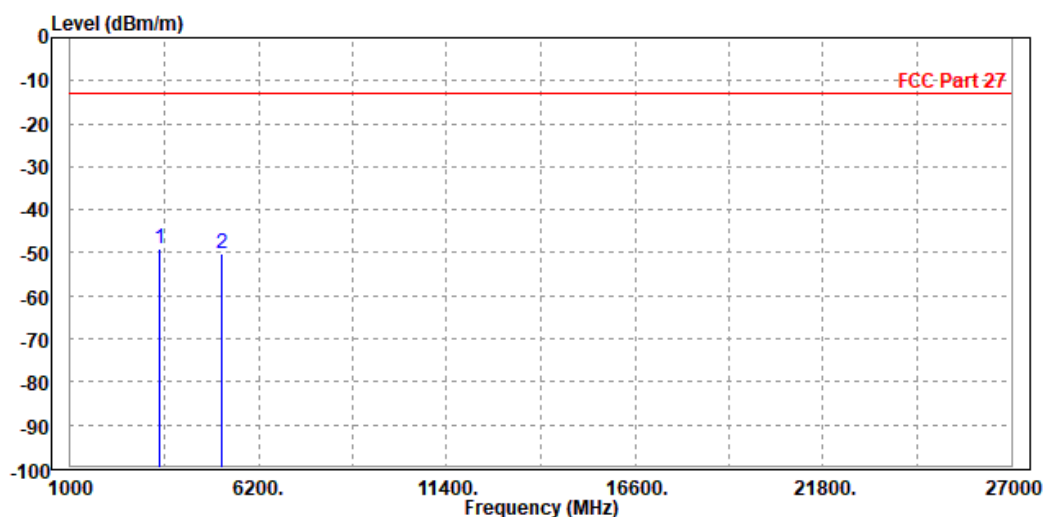

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3470.000	-48.66	-57.82	-13.00	-35.66	9.16	Peak	Vertical
2		5197.500	-49.89	-59.71	-13.00	-36.89	9.82	Peak	Vertical

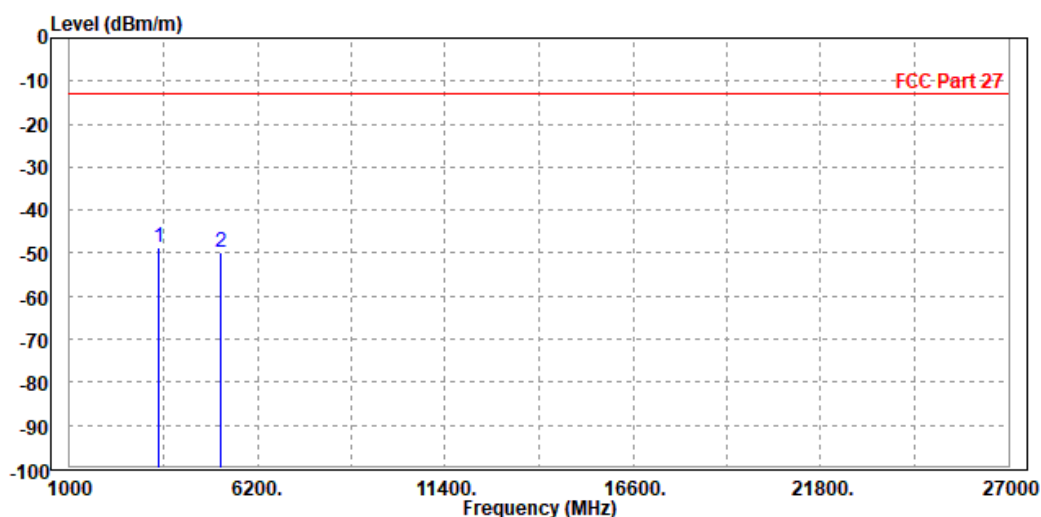

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3470.000	-30.72	-39.30	-13.00	-17.72	8.58	Peak	Horizontal
2		5197.500	-42.90	-52.02	-13.00	-29.90	9.12	Peak	Horizontal

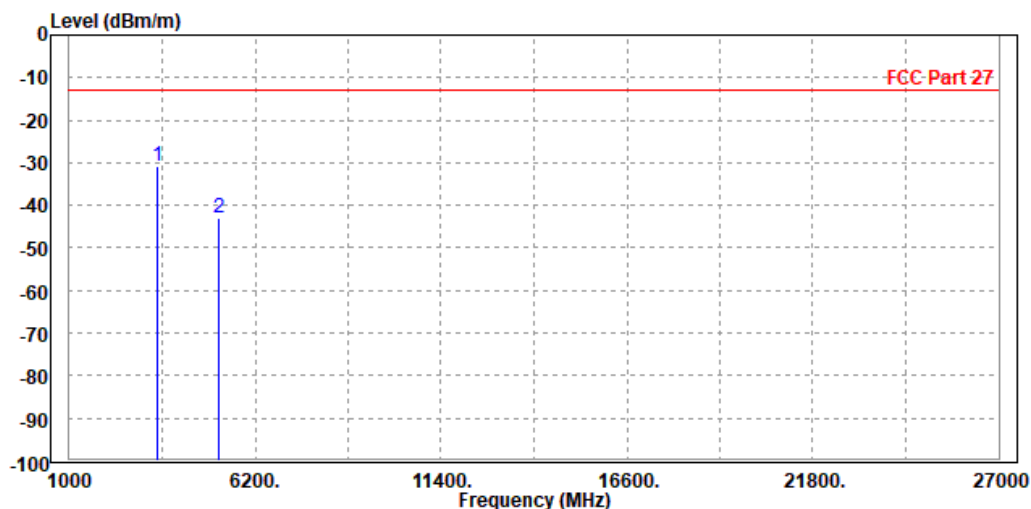

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3470.000	-31.27	-40.43	-13.00	-18.27	9.16	Peak	Vertical
2	5197.500	-40.49	-50.31	-13.00	-27.49	9.82	Peak	Vertical

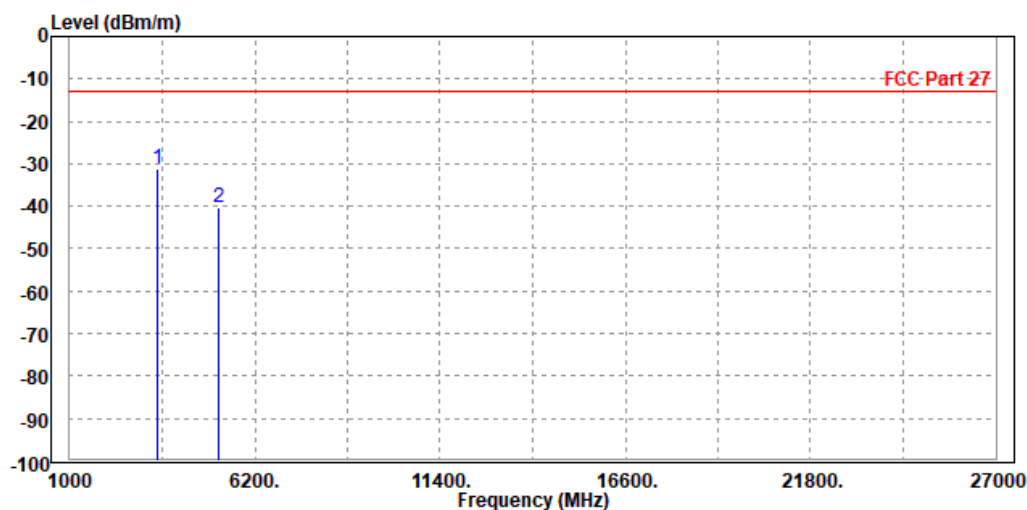

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3470.000	-31.95	-40.53	-13.00	-18.95	8.58	Peak	Horizontal
2	5197.500	-45.64	-54.76	-13.00	-32.64	9.12	Peak	Horizontal

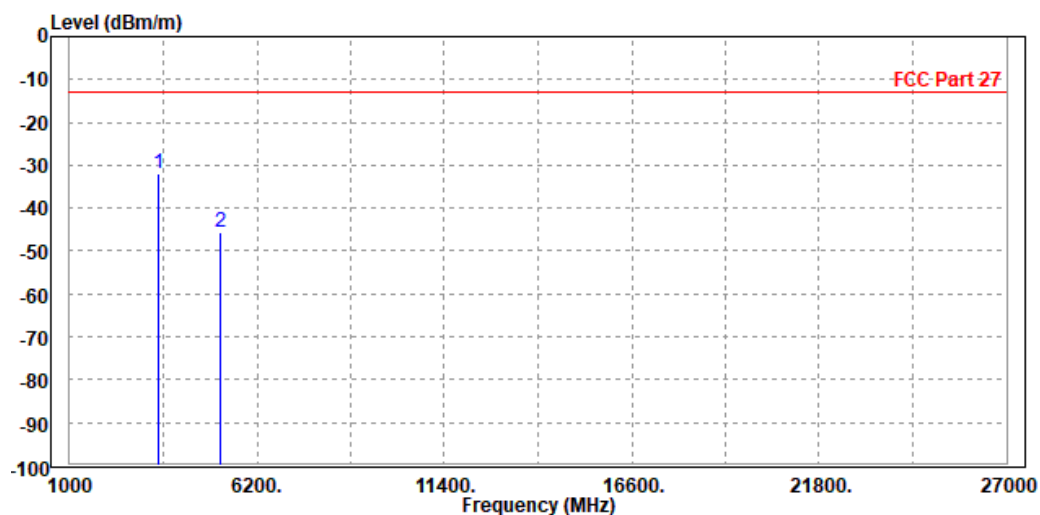

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3470.000	-32.34	-41.50	-13.00	-19.34	9.16	Peak	Vertical
2	5197.500	-38.69	-48.51	-13.00	-25.69	9.82	Peak	Vertical

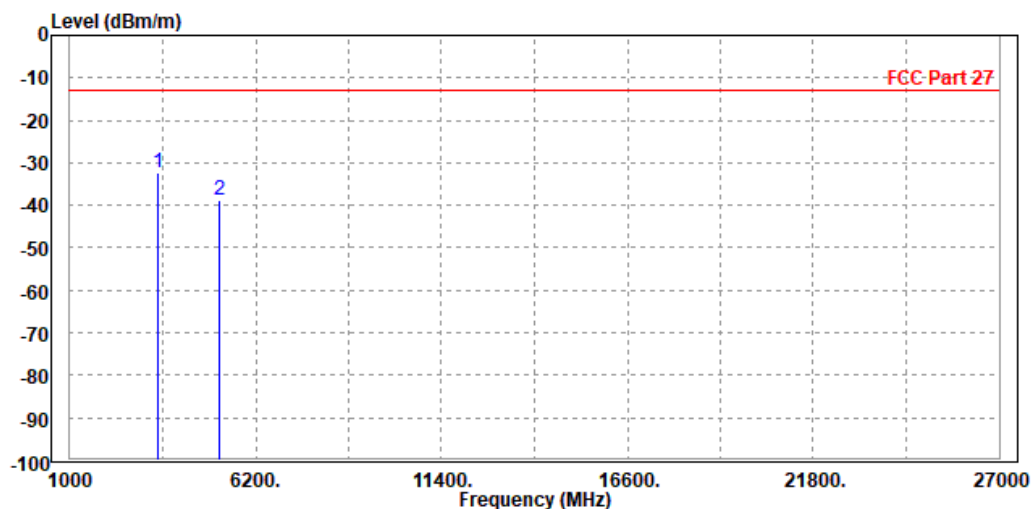

CHANNEL BANDWIDTH: 15MHz / QPSK


MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3470.000	-31.21	-39.79	-13.00	-18.21	8.58	Peak	Horizontal
2		5197.500	-43.03	-52.15	-13.00	-30.03	9.12	Peak	Horizontal

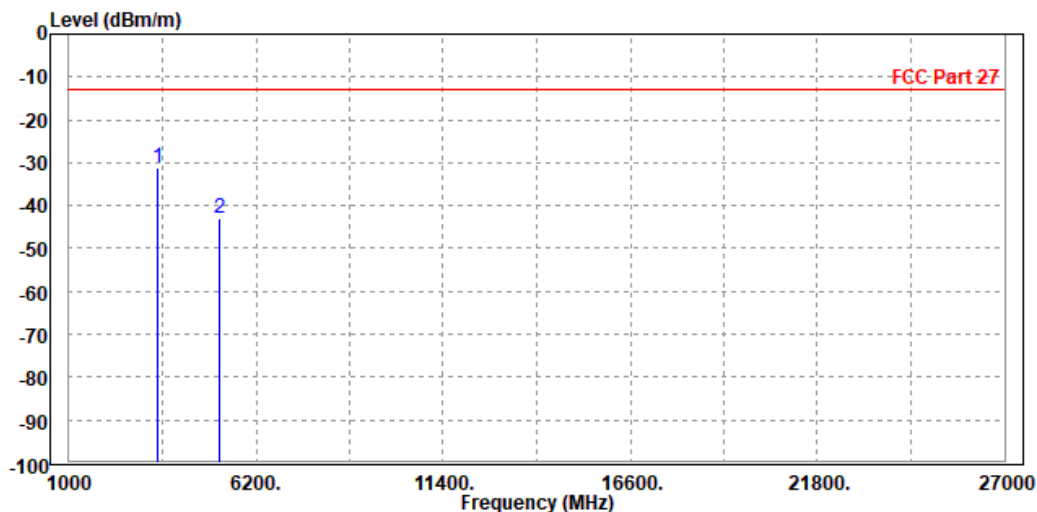

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3470.000	-31.66	-40.82	-13.00	-18.66	9.16	Peak	Vertical
2		5197.500	-38.97	-48.79	-13.00	-25.97	9.82	Peak	Vertical

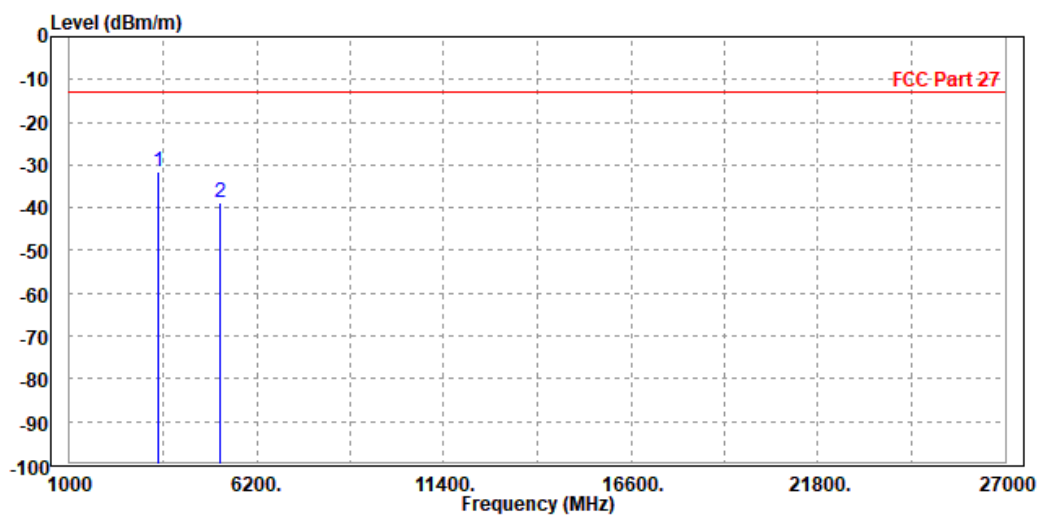

CHANNEL BANDWIDTH: 20MHz / QPSK


MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3470.000	-34.83	-43.41	-13.00	-21.83	8.58	Peak	Horizontal
2	5197.500	-49.79	-58.91	-13.00	-36.79	9.12	Peak	Horizontal

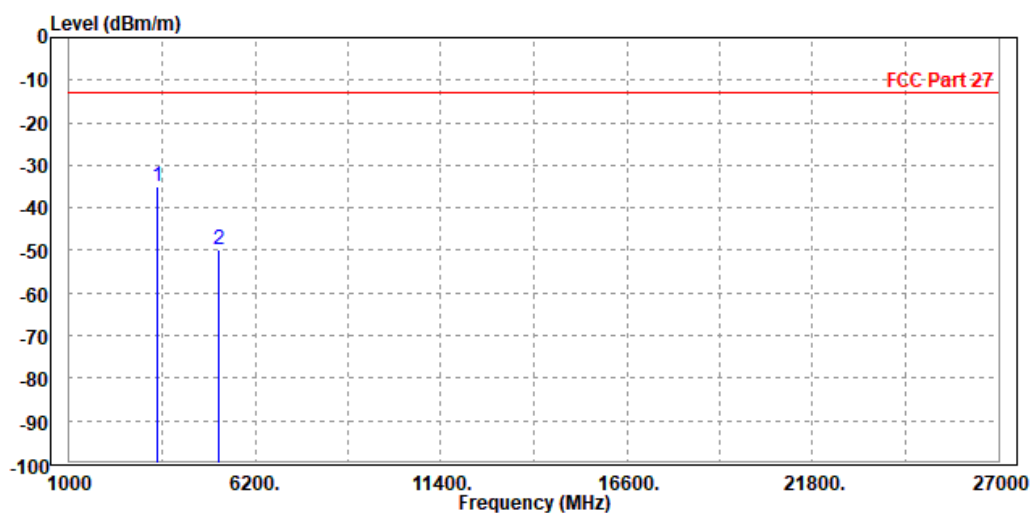

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3470.000	-31.06	-40.22	-13.00	-18.06	9.16	Peak	Vertical
2		5197.500	-49.38	-59.20	-13.00	-36.38	9.82	Peak	Vertical

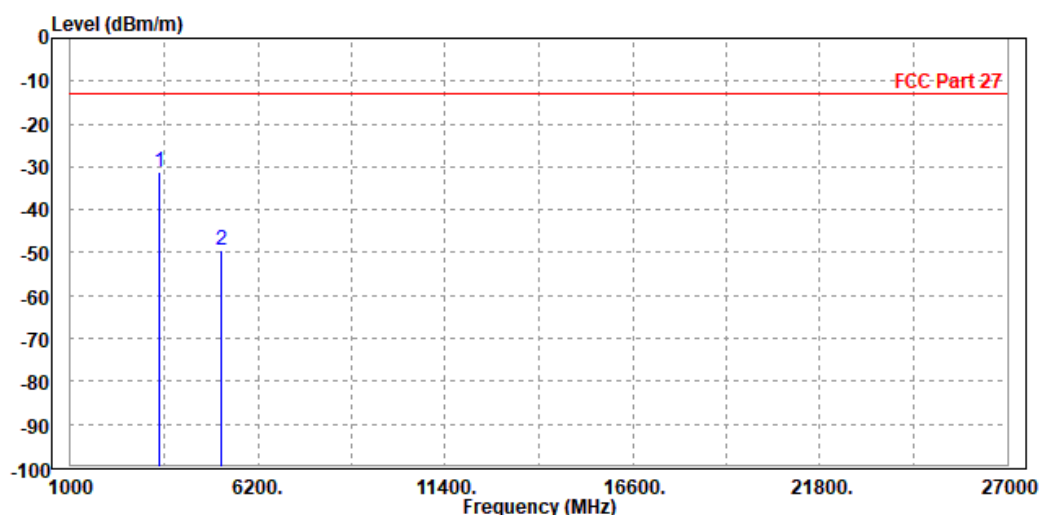




Test Report No.: RF191122W002-3

LTE CAT-M1 BAND 66

CHANNEL BANDWIDTH: 1.4MHz / QPSK


MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-47.10	-55.70	-13.00	-34.10	8.60	Peak	Horizontal
2 PP	5265.000	-40.56	-49.88	-13.00	-27.56	9.32	Peak	Horizontal

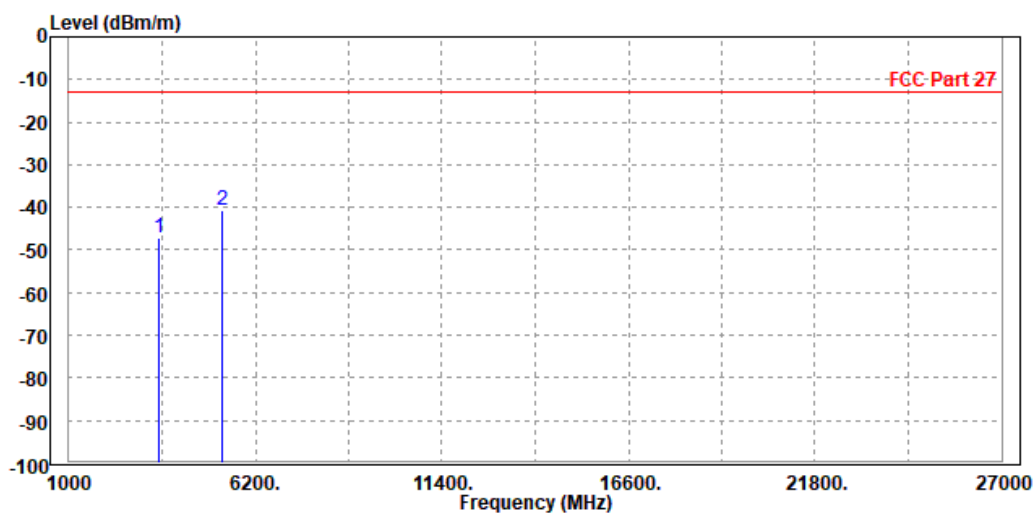

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-37.94	-47.14	-13.00	-24.94	9.20	Peak	Vertical
2 PP	5265.000	-37.78	-47.58	-13.00	-24.78	9.80	Peak	Vertical

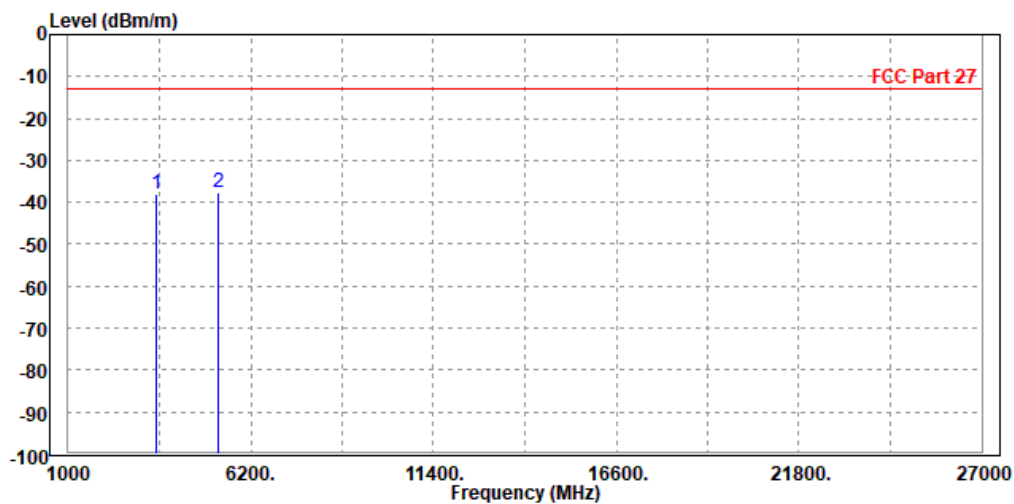

CHANNEL BANDWIDTH: 3MHz / QPSK


MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3522.000	-32.55	-41.15	-13.00	-19.55	8.60	Peak	Horizontal
2	5265.000	-46.11	-55.43	-13.00	-33.11	9.32	Peak	Horizontal

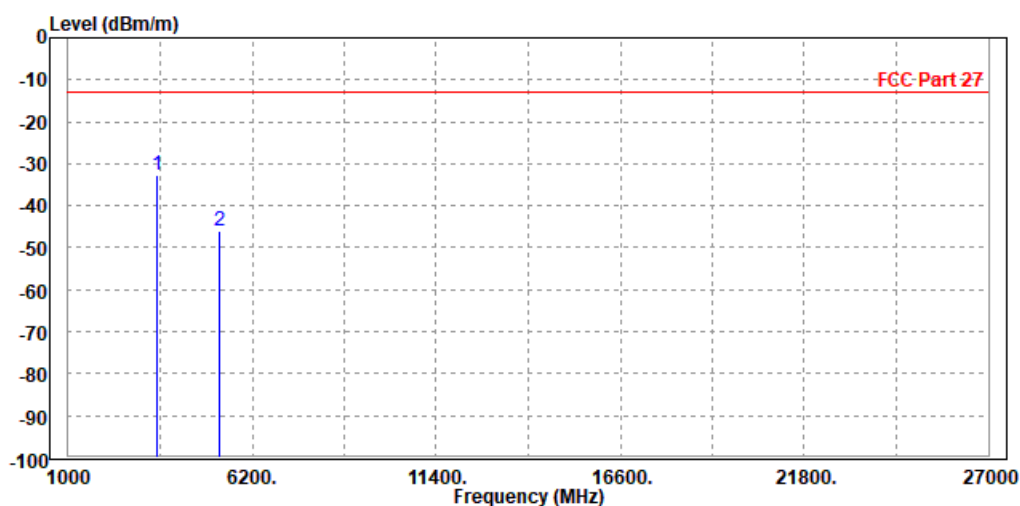

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3522.000	-30.53	-39.73	-13.00	-17.53	9.20	Peak	Vertical
2		5265.000	-37.84	-47.64	-13.00	-24.84	9.80	Peak	Vertical

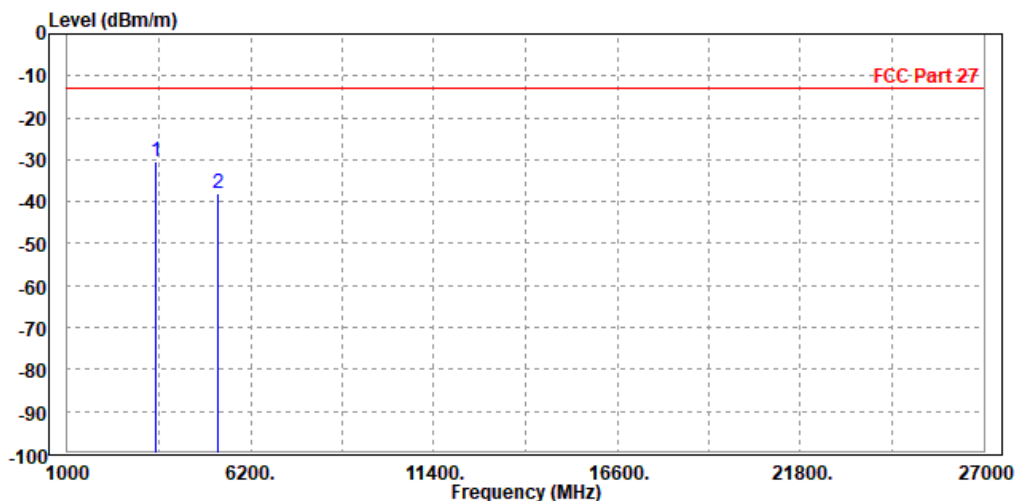

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3522.000	-33.24	-41.84	-13.00	-20.24	8.60	Peak	Horizontal
2		5265.000	-43.34	-52.66	-13.00	-30.34	9.32	Peak	Horizontal

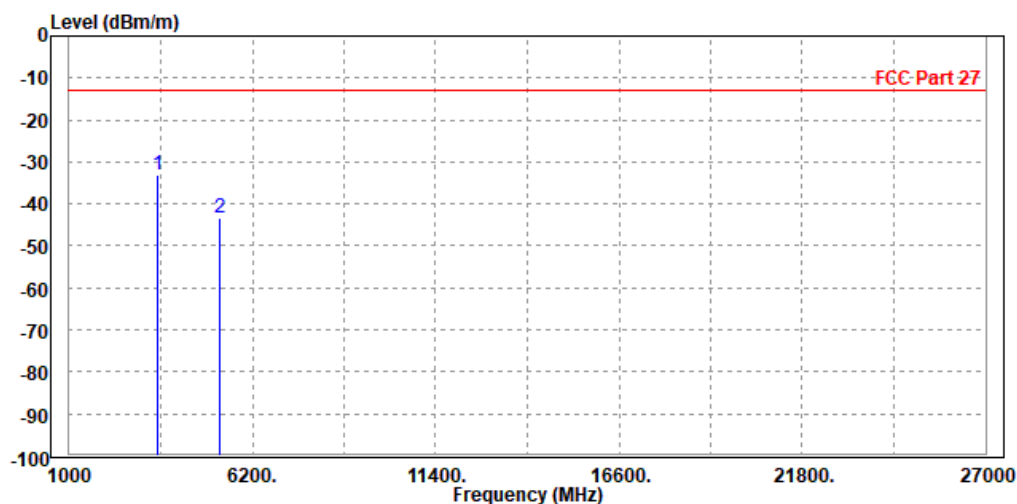

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3522.000	-29.20	-38.40	-13.00	-16.20	9.20	Peak	Vertical
2		5265.000	-37.40	-47.20	-13.00	-24.40	9.80	Peak	Vertical

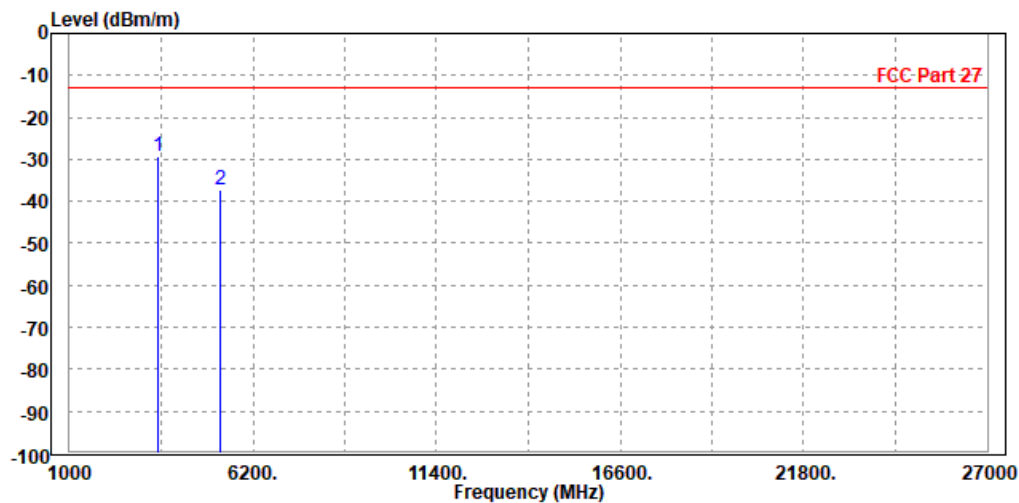

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3522.000	-30.79	-39.39	-13.00	-17.79	8.60	Peak	Horizontal
2		5265.000	-40.20	-49.52	-13.00	-27.20	9.32	Peak	Horizontal

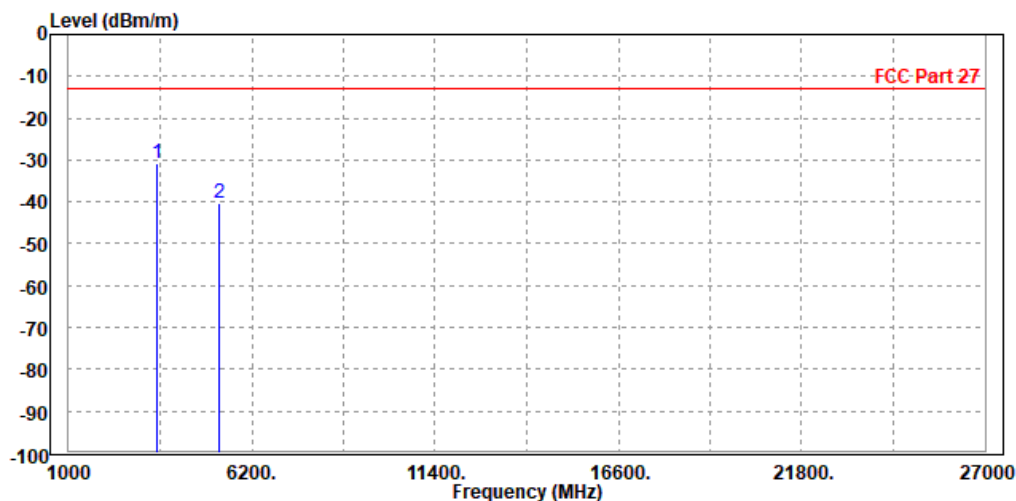

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3522.000	-30.05	-39.25	-13.00	-17.05	9.20	Peak	Vertical
2		5265.000	-36.52	-46.32	-13.00	-23.52	9.80	Peak	Vertical

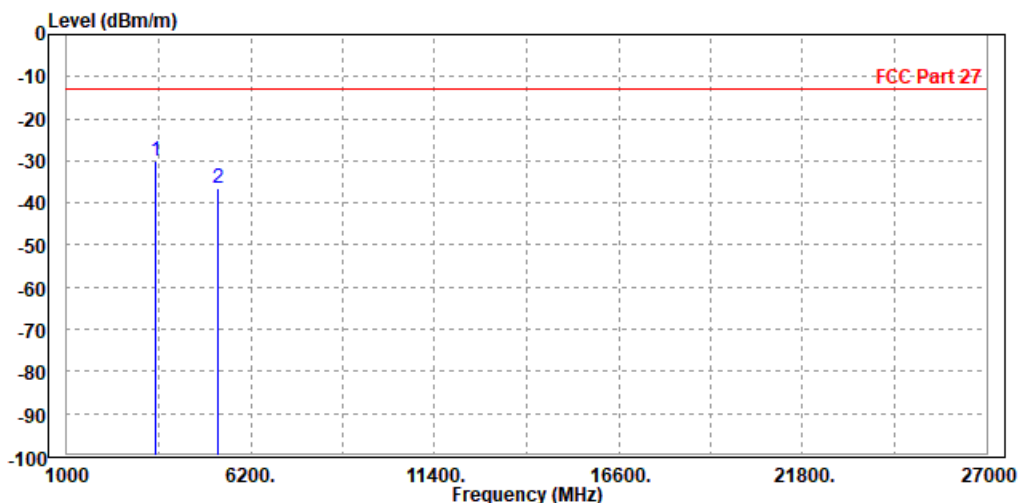




**BUREAU
VERITAS**

Test Report No.: RF191122W002-3

CHANNEL BANDWIDTH: 15MHz / QPSK


MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3522.000	-30.59	-39.19	-13.00	-17.59	8.60	Peak	Horizontal
2		5265.000	-49.03	-58.35	-13.00	-36.03	9.32	Peak	Horizontal

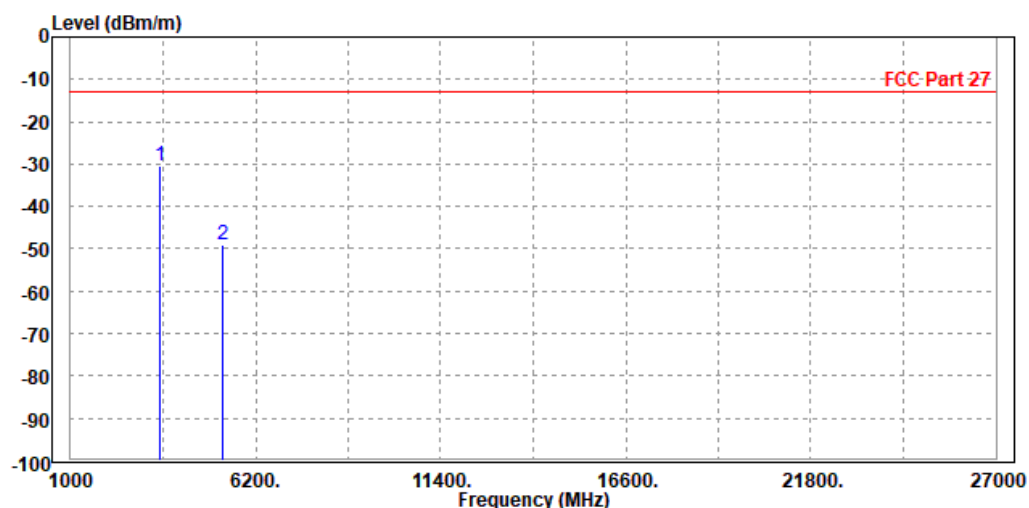

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3522.000	-28.65	-37.85	-13.00	-15.65	9.20	Peak	Vertical
2		5265.000	-47.83	-57.63	-13.00	-34.83	9.80	Peak	Vertical

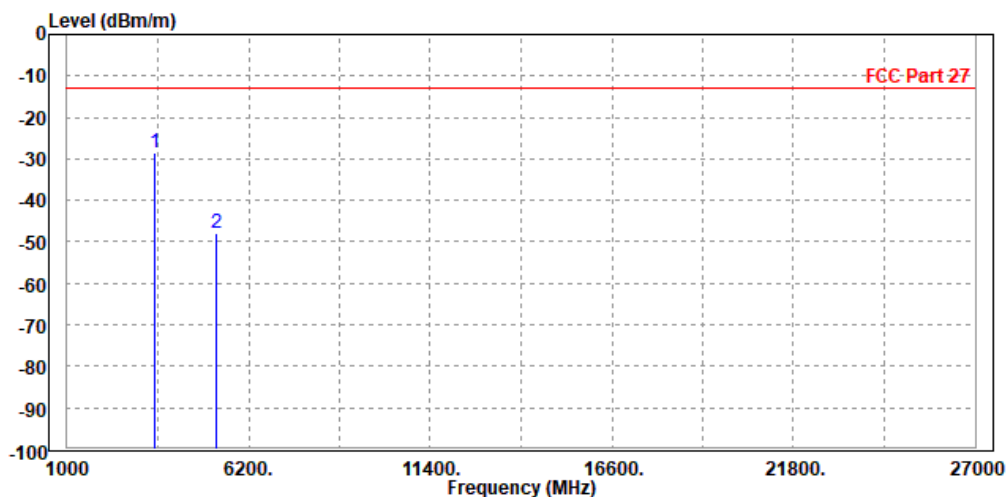




Test Report No.: RF191122W002-3

CHANNEL BANDWIDTH: 20MHz / QPSK

CH 132072

MODE	TX channel 132072	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3444.000	-33.84	-42.42	-13.00	-20.84	8.58	Peak	Horizontal
2		5160.000	-48.43	-57.43	-13.00	-35.43	9.00	Peak	Horizontal

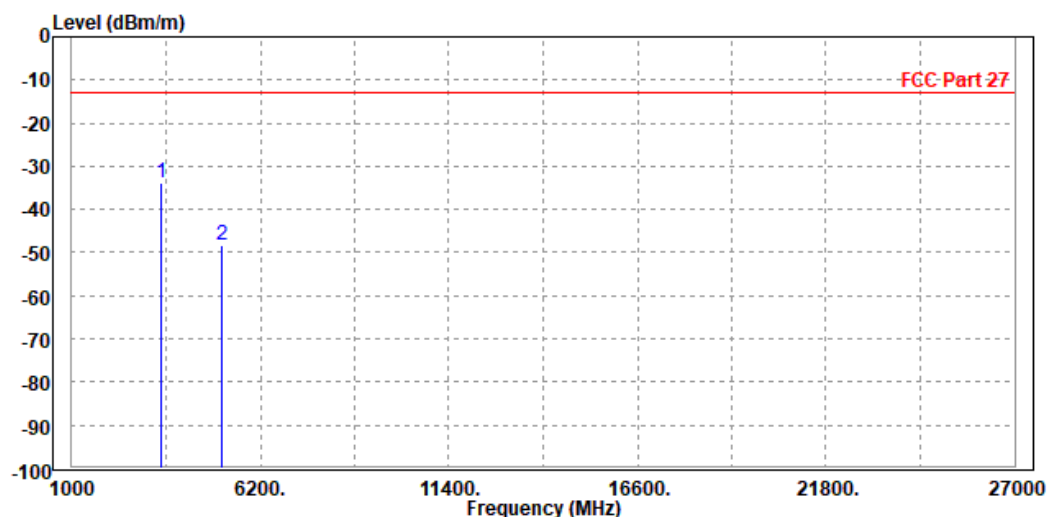




Test Report No.: RF191122W002-3

MODE	TX channel 132072	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3444.000	-28.57	-37.71	-13.00	-15.57	9.14	Peak	Vertical
2		5160.000	-47.50	-57.34	-13.00	-34.50	9.84	Peak	Vertical

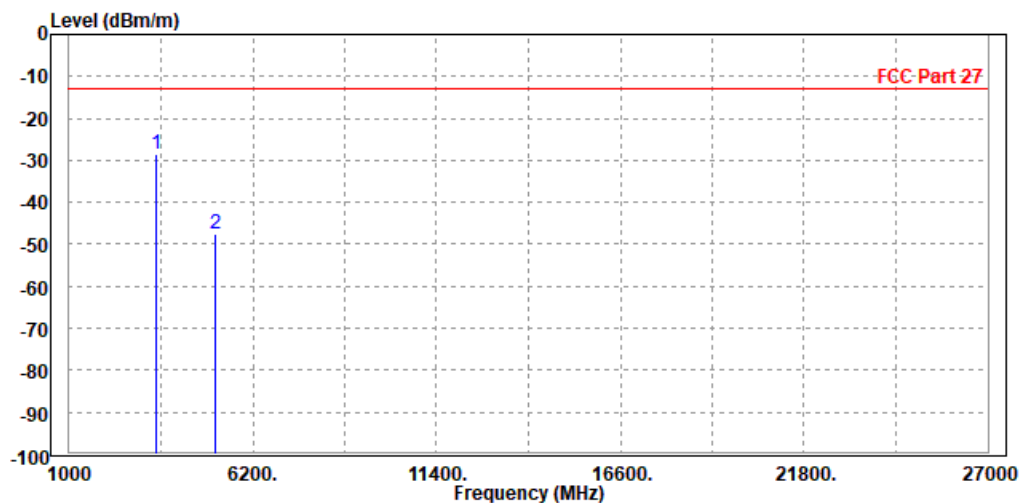

CH 132322

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3522.000	-32.77	-41.37	-13.00	-19.77	8.60	Peak	Horizontal
2		5265.000	-48.50	-57.82	-13.00	-35.50	9.32	Peak	Horizontal

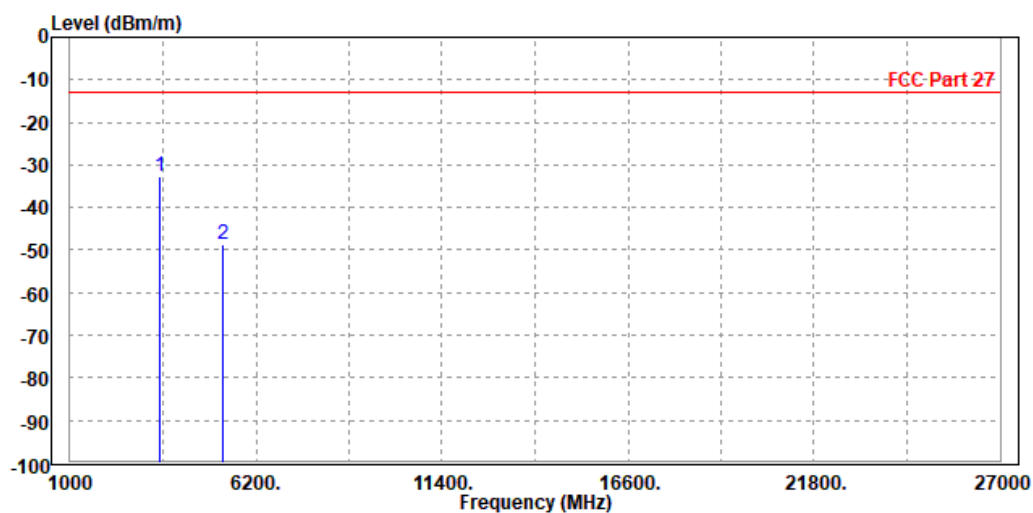




Test Report No.: RF191122W002-3

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


			Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3522.000	-26.63	-35.83	-13.00	-13.63	9.20	Peak	Vertical
2	5265.000	-47.98	-57.78	-13.00	-34.98	9.80	Peak	Vertical

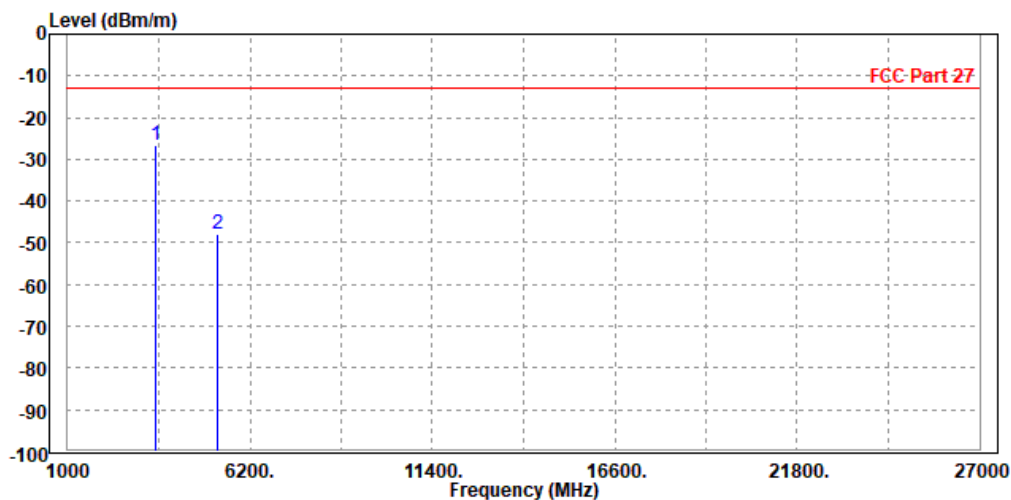

CH 132572


MODE	TX channel 132572	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3540.000	-35.05	-43.67	-13.00	-22.05	8.62	Peak	Horizontal
2		5310.000	-50.21	-59.66	-13.00	-37.21	9.45	Peak	Horizontal

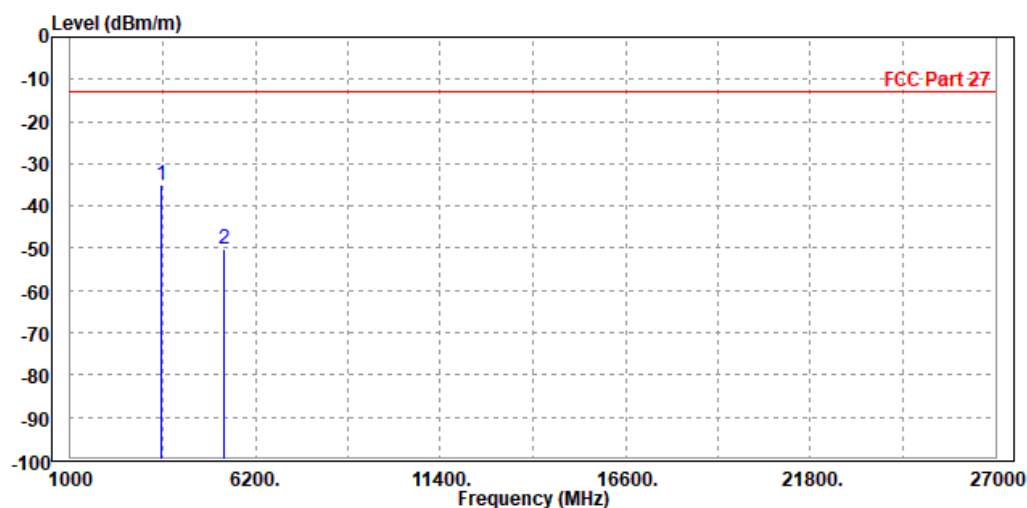

MODE	TX channel 132572	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony Xiong		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3540.000	-27.69	-36.89	-13.00	-14.69	9.20	Peak	Vertical
2		5310.000	-47.11	-56.89	-13.00	-34.11	9.78	Peak	Vertical

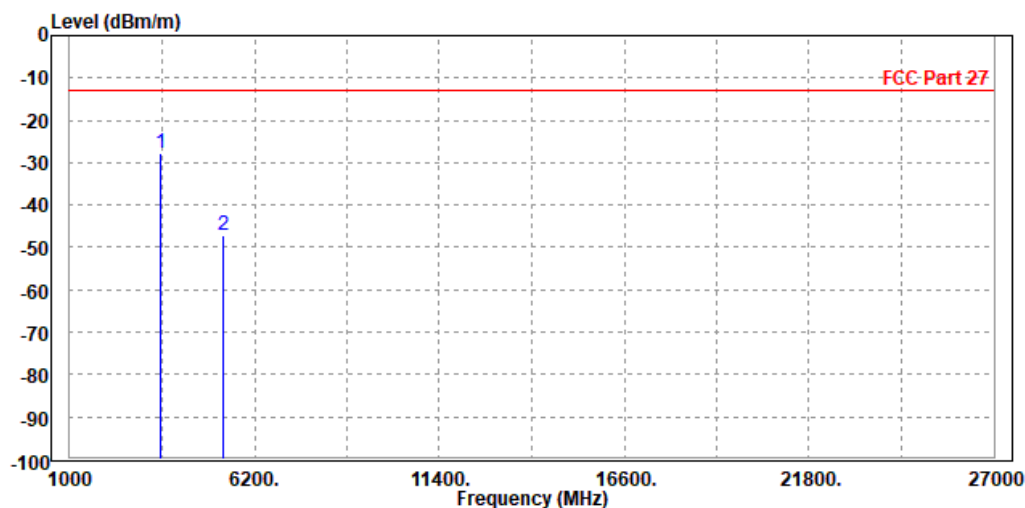



Test Report No.: RF191122W002-3

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: RF191122W002-3

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---