



FCC ID : PJIL19A0D061

---

MAY 29, 2003  
Federal Communications Commission  
Equipment Approval Services  
7435 Oakland Mills Road  
Columbia, MD 21046

**SUBJECT : ImageQuest Co., Ltd.**  
**FCC ID: PJIL19A0D061**  
**FCC Part 15 Subpart B Certification**

Gentlemen:

Transmitted herewith, on behalf of ImageQuest Co., Ltd. is an application for a FCC Part 15 Subpart B Certification of the following 19-inch LCD Monitor:

**FCC ID : PJIL19A0D061**  
**Model : L19A0D061**

Attached is the applicant's Cover Letter, External/Internal Photos, Test Set-Up Photos, FCC ID & Label Location, User Manual, Block & Circuit Diagram and Test Report.

Should you have any questions or comments concerning the above, please contact the undersigned.



KI SOO KIM  
EMC MAMAGER

cc: Mr. HEE JUNG KIM ----- R & D CENTER / MANAGER

---

---

## • Solution for EMI

**We, ImageQuest CO.,LTD. , announce that all modifications will be incorporated into each unit sold in the U.S.**

1. Attach a aluminum foil LCD panel Bottom
2. Attach a gasket on the Main Board and Main Frame to contact a LCD panel
3. Attach a gasket on the Audio PCB to contact a stand
4. Attach a aluminum foil between Main Frame and LCD panel
5. Apply a ferrite Core to the Audio Cable, Multi cable and OSD board signal cable

(Please refer to next page of the photographs for Solution for EMI)

**ImageQuest CO.,LTD.**


**2003.6.3**

**R & D CENTER / MANAGER  
HEE JUNG KIM**





---


**1. Attach a aluminum foil LCD panel Bottom**

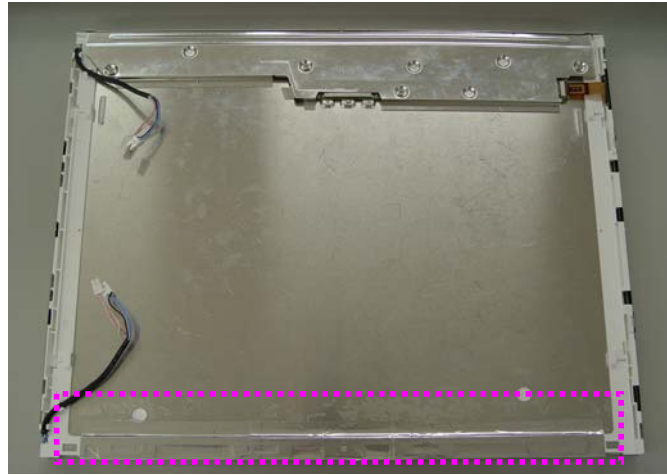

**2. Attach a gasket on the Main Board and Main Frame to contact a LCD panel**

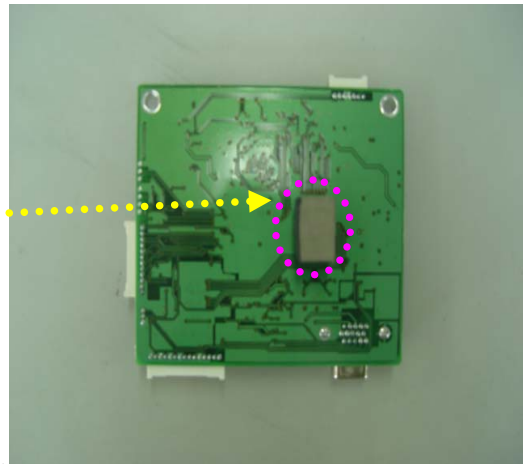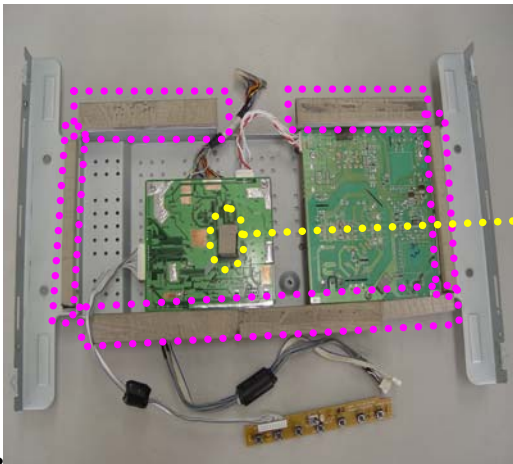


**3. Attach a gasket on the Audio PCB to contact a stand**

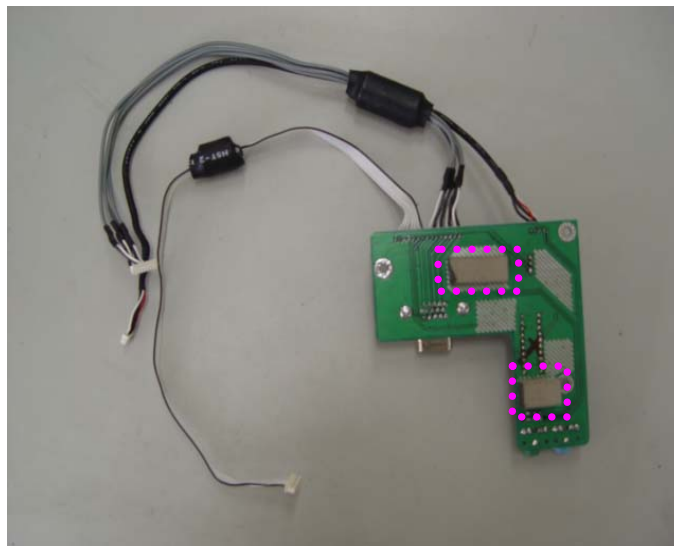


**4. Attach a aluminum foil between Main Frame and LCD panel**

---

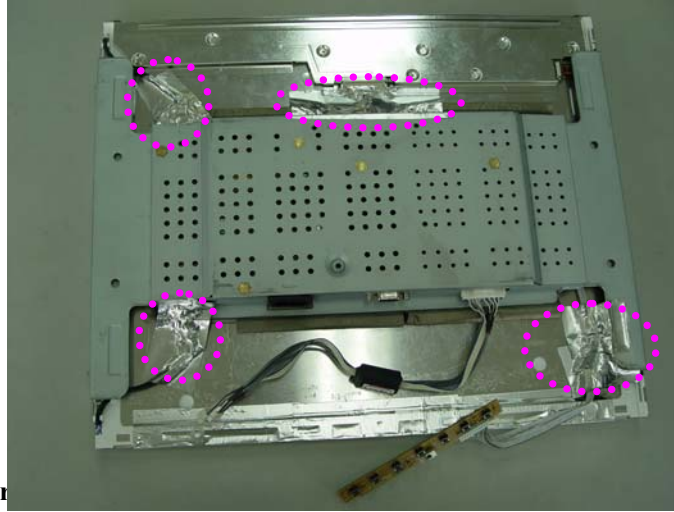

5. Apply a ferrite Core

able

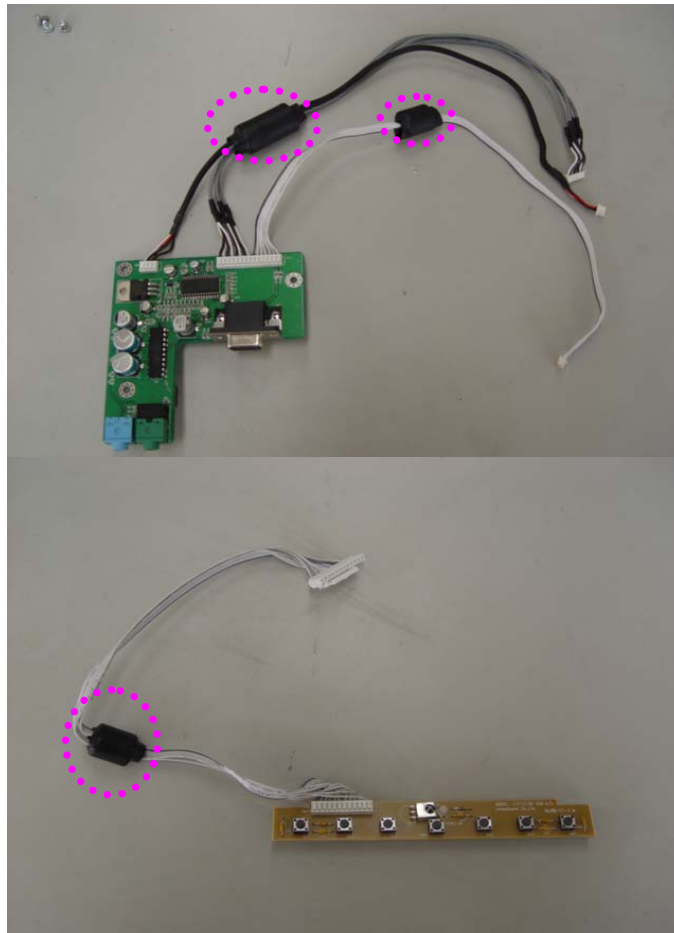

**6. The wires which connected MCU and video decoder chip, will be modified with PCB pattern artwork**

