



Electromagnetic Emission
FCC MEASUREMENT REPORT
CERTIFICATION OF COMPLIANCE
FCC Part 15 Verification Measurement

PRODUCT : LED MONITOR
MODEL/TYPE NO : L27DPJLP0 / P278QPLAA4A 00250
FCC ID : PJIL27DPJLP0
MULTIPLE MODEL : P278DQ
BRAND NAME : **HYUNDAI**
APPLICANT : HYUNDAI IBT CORP.
106, Apogongdan-gil, Apo-eup, Gimcheon-si,
Gyeongsangbuk-do, 740-862 Republic of Korea
Attn.: Yoon Suk Lee / Manager
MANUFACTURER : HYUNDAI IBT CORP.
106, Apogongdan-gil, Apo-eup, Gimcheon-si,
Gyeongsangbuk-do, 740-862 Republic of Korea
FCC CLASSIFICATION : Class B Personal computers and peripherals
RULE PART(S) : FCC Part 15 Subpart B
FCC PROCEDURE : ANSI C63.4-2009
TEST REPORT No. : ETLE141114.1633
DATES OF TEST : December 08, 2014 to December 12, 2014
REPORT ISSUE DATE : January 19, 2015
TEST LABORATORY : ETL Inc. (FCC Designation Number : KR0022)

This LED MONITOR, Model L27DPJLP0 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2009 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B:

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared by: 
Jang Hyun, Ma (Test Engineer)
January 19, 2015

Reviewed by: 
Hyung Min, Choi (Chief Engineer)
January 19, 2015

ETL Inc.

Head office: #371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
Open site: #499-1, Sagot-ri, Seosin-myeon, Hwaseong-si, Gyeonggi-do, 445-882, Korea
Tel: 82-2-858-0786 Fax: 82-2-858-0788

*The test report merely corresponds to the test sample(s).
This report shall not be reproduced, in whole or in part without the written approval of ETL Inc.*

Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions Measurement**
 - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name : HYUNDAI IBT CORP.

**Address : 106, Apogongdan-gil, Apo-eup, Gimcheon-si,
Gyeongsangbuk-do, 740-862 Republic of Korea**

Attention : Yoon Suk Lee / Manager

- **EUT Type :** LED MONITOR
- **Model Number :** L27DPJLP0
- **S/N :** P278QPLAA4A 00250
- **Rule Part(s) :** FCC Part 15 Subpart B
- **Test Procedure :** ANSI C63.4-2009
- **FCC Classification :** Class B Personal computers and peripherals
- **Dates of Tests :** December 08, 2014 to December 12, 2014
- **Environmental of Tests :**
Temperature: (19.9 ± 2.5) °C
Humidity: (32 ± 10) % R.H.
Atmospheric Pressure: (102.4 ± 0.3) kPa
- **Place of Tests :** ETL Inc. Testing Lab. (FCC Designation Number : KR0022)

Radiated Emission test 1;
#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si,
Gyeonggi-do, 445-882, Korea

Radiated Emission test 2 and Conducted Emission test;
#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
- **Test Report No. :** ETLE141124.1685

1. INTRODUCTION

The measurement test for radiated and conducted emission test was conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2009 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2009 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2009) was used in determining radiated and conducted emissions from the HYUNDAI IBT CORP., Model: L27DPJLP0.

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the LED MONITOR (model: L27DPJLP0).

The model L27DPJLP0 is basic model that was tested.

The multi model P278DQ is identical to basic model, except for model designation.

2.2 General Specification

Item		Specification
LCD	Visible Screen Area	596.74 mm (H) x 335.66 mm (V)
	Pixel Pitch	0.233 1 mm (H) x 0.233 1 mm (V)
	Recommended Resolution	2 560 x 1 440 @ 60 Hz
	Maximum Visible Angle	178°/178° (H/V)
	Displayed Color	1.07 Billion
	Brightness	350 cd/m ²
	Contrast Ratio	1 000:1
	Response Time	6 msec
Input Signal	Horizontal Frequency	31 kHz – 90 kHz
	Vertical Frequency	56 kHz – 75 kHz
	Video Signal	Analog VGA, DVI, HDMI, DP
	Connector	15 pin D-Sub, 29 pin DVI, 20 pin Display port, AUDIO In
Power	Power Consumption	70 W (Max), 58 W (Typ.)
	Stand by Power	0.5 W
	Adapter	Input: AC 110 V – 240 V; 50 Hz/60 Hz; 1.5 A Output: DC 24 V, 5.0 A
Multimedia Speakers		2 W x 2
Operating Environment	Operation	Temperature: (25 ± 15) °C
		Humidity: (50 ± 30) % R.H. (non-condensing)
	Storage	Temperature: (20 ± 30) °C
		Humidity: (50 ± 40) % R.H. (non-condensing)
High Internal Frequency		Memory Clock → 800 MHz

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2009. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 40 cm away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup in Appendix B.

3.2 Radiated Emission Measurement

Radiated emission measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2009. The measurements were performed over the frequency range of 30 MHz to 40 GHz (or 5th harmonic of the highest frequency) in using antenna as the input transducer to a spectrum analyzer or a field intensity meter. The measurements below 1 GHz were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz. The measurements above 1 GHz were made with the detector set for "Peak and Average" within a bandwidth of 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determined the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site or SVSWR chamber at 10 m and 3 m. The test equipment was placed on a styrofoam table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1 m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner and which tends to maximize its emission level in a typical application.

4.2 EUT operation

The equipment under test was operated during the measurement under following conditions:

	Conditions	Remark
■	Stand by	
■	The EUT was connected as user's guide. And during the executed test program for EMI program with "H" pattern display on monitor. (BurnIn Test program)	VGA mode
■	The EUT was connected as user's guide. And during the executed test program for EMI program with "H" pattern display on monitor. (BurnIn Test program)	DVI mode
■	The EUT was connected as user's guide. And during the executed test program for EMI program with "H" pattern display on monitor. (BurnIn Test program)	HDMI mode
■	The EUT was connected as user's guide. And during the executed test program for EMI program with "H" pattern display on monitor. (BurnIn Test program)	DP mode


4.3 Support Equipment Used

Description	Model Name	Serial No.	Manufacturer	FCC
Adapter (for EUT)	WTS-2405W	14H00247	Welltronics	-
PC	D08M	5GPJXBX	Dell Inc.	DoC
Keyboard	IGK-5300	NONE	Shenzhen Jiayewang Technology Co.,Ltd.	-
Mouse	AN3030	NONE	Newmen Technology Co., Ltd.	DoC

4.4 Type of Cables Used

Device from	Device to	Type of I/O port	Length[m]	Type of shield	Used ferrite core
EUT	PC	VGA	1.2	Shielded	O
EUT	PC	DVI	1.2	Shielded	O
EUT	PC	HDMI	1.2	Shielded	X
EUT	PC	DP	1.2	Shielded	X
EUT	PC	Audio In	1.0	Shielded	O
EUT	Adapter	DC Input	1.0	Shielded	O
PC	Keyboard	USB	1.5	Shielded	X
PC	Mouse	USB	1.5	Shielded	X
PC	Power socket	AC Input	1.2	Unshielded	X

4.5 The setup drawing(s)

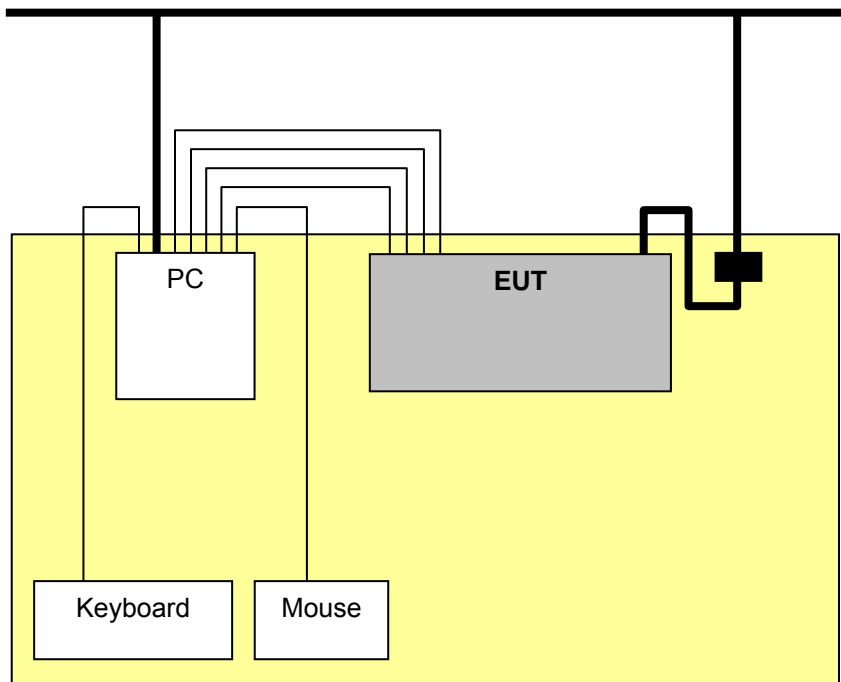

_____ : Data Line
 _____ : Power Line
 ■ : Adapter

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

FCC Rule	Measurement Required	Result
15.107(a)	Conducted Emission Measurement	Passed by 8.70 dB
15.109(a)	Radiated Emission Measurement (Below 1 GHz)	Passed by 14.60 dB
15.109(a)	Radiated Emission Measurement (Above 1 GHz)	Passed by 7.40 dB

The data collected shows that the **HYUNDAI IBT CORP. / LED MONITOR / L27DPJLP0** complied with technical requirements of above rules part 15.107(a) and 15.109(a) Class B Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5.2 Conducted Emissions Measurement

5.2.1 Conducted Emissions Data

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.107(a) Class B
Test Date	December 12, 2014
Environmental of test	(21.8 ± 0.0) °C, (40 ± 0) % R.H., (102.2 ± 0.0) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - VGA mode
Result	Passed by 9.80 dB

Conducted Emission Test Data

The following data and graph shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

NOTES:

1. Please see the measured data and graph in next page.
2. The c.f value was included the LISN factor and cable loss.
3. Result value = Reading + c.f
4. Margin value = Limit - Result
5. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15.107(a) Class B.
6. If the average limit is met when using a Quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.107(a) Class B
Test Date	December 12, 2014
Environmental of test	(21.6 ± 0.0) °C, (41 ± 0) % R.H., (102.1 ± 0.0) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - DVI mode
Result	Passed by 9.90 dB

Conducted Emission Test Data


The following data and graph shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

NOTES:

1. Please see the measured data and graph in next page.
2. The c.f value was included the LISN factor and cable loss.
3. Result value = Reading + c.f
4. Margin value = Limit - Result
5. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15.107(a) Class B.
6. If the average limit is met when using a Quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

Line: HOT

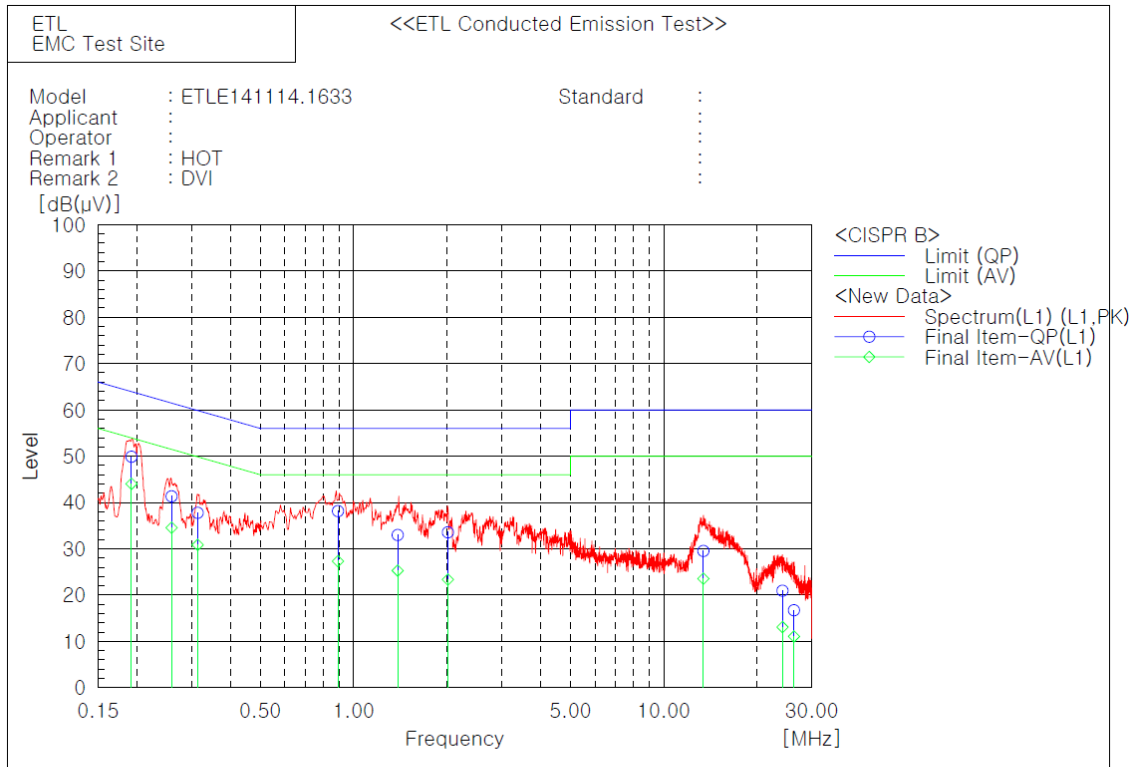

Final Result

--- L1 Phase ---										
No.	Frequency [MHz]	Reading QP [dB(µV)]	Reading AV [dB(µV)]	c.f [dB]	Result QP [dB(µV)]	Result AV [dB(µV)]	Limit QP [dB(µV)]	Limit AV [dB(µV)]	Margin QP [dB]	Margin AV [dB]
1	0.1922	39.8	33.9	10.1	49.9	44.0	63.9	53.9	14.0	9.9
2	0.25878	31.5	24.8	9.8	41.3	34.6	61.5	51.5	20.2	16.9
3	0.3143	27.8	20.8	10.0	37.8	30.8	59.9	49.9	22.1	19.1
4	0.89025	28.1	17.3	10.0	38.1	27.3	56.0	46.0	17.9	18.7
5	1.38755	23.1	15.4	9.9	33.0	25.3	56.0	46.0	23.0	20.7
6	2.01385	23.6	13.5	9.9	33.5	23.4	56.0	46.0	22.5	22.6
7	13.4244	19.8	13.8	9.7	29.5	23.5	60.0	50.0	30.5	26.5
8	24.1494	10.8	2.9	10.2	21.0	13.1	60.0	50.0	39.0	36.9
9	26.2978	6.5	0.9	10.2	16.7	11.1	60.0	50.0	43.3	38.9

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.107(a) Class B
Test Date	December 12, 2014
Environmental of test	(21.5 ± 0.0) °C, (41 ± 0) % R.H., (102.1 ± 0.0) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - HDMI mode
Result	Passed by 9.30 dB

Conducted Emission Test Data

The following data and graph shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

NOTES:

1. Please see the measured data and graph in next page.
2. The c.f value was included the LISN factor and cable loss.
3. Result value = Reading + c.f
4. Margin value = Limit - Result
5. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15.107(a) Class B.
6. If the average limit is met when using a Quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.107(a) Class B
Test Date	December 12, 2014
Environmental of test	(21.6 ± 0.0) °C, (41 ± 0) % R.H., (102.1 ± 0.0) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - DP mode
Result	Passed by 8.70 dB

Conducted Emission Test Data


The following data and graph shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

NOTES:

1. Please see the measured data and graph in next page.
2. The c.f value was included the LISN factor and cable loss.
3. Result value = Reading + c.f
4. Margin value = Limit - Result
5. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15.107(a) Class B.
6. If the average limit is met when using a Quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

Line: Neutral

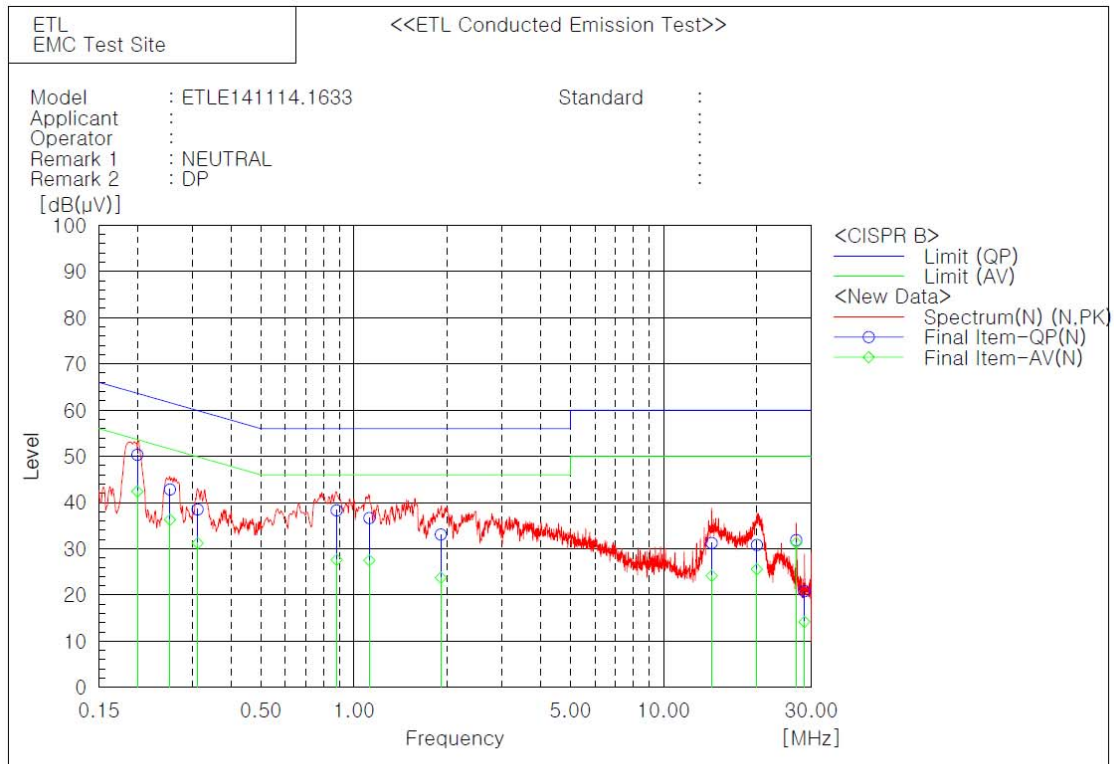

Final Result

--- N Phase ---										
No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c.f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.19966	40.0	32.1	10.3	50.3	42.4	63.6	53.6	13.3	11.2
2	0.25444	32.7	26.2	10.1	42.8	36.3	61.6	51.6	18.8	15.3
3	0.31239	28.5	21.2	10.0	38.5	31.2	59.9	49.9	21.4	18.7
4	0.87915	28.5	17.8	9.8	38.3	27.6	56.0	46.0	17.7	18.4
5	1.12115	26.8	17.7	9.8	36.6	27.5	56.0	46.0	19.4	18.5
6	1.90765	23.3	13.9	9.8	33.1	23.7	56.0	46.0	22.9	22.3
7	14.2918	21.0	14.0	10.2	31.2	24.2	60.0	50.0	28.8	25.8
8	20.0194	20.5	15.3	10.3	30.8	25.6	60.0	50.0	29.2	24.4
9	26.814	21.3	20.7	10.6	31.9	31.3	60.0	50.0	28.1	18.7
10	28.4946	10.1	3.5	10.7	20.8	14.2	60.0	50.0	39.2	35.8

5.3 Radiated Emissions Measurement

5.3.1 Radiated Emissions Data

- Below 1 GHz

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.109(a) Class B
Test Date	December 08, 2014
Environmental of test	(18.1 ± 0.1) °C, (27 ± 1) % R.H., (102.7 ± 0.1) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - VGA mode
Result	Passed by 14.90 dB


Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
38.19	8.87	V	11.03	1.00	100	20.90	40.00	19.10
46.72	8.64	V	11.78	1.08	100	21.50	40.00	18.50
142.90	7.64	V	12.60	1.56	140	21.80	43.50	21.70
214.99	10.97	V	9.85	1.78	145	22.60	43.50	20.90
286.27	15.68	H	12.62	2.10	370	30.40	46.00	15.60
360.12	14.09	H	14.61	2.40	140	31.10	46.00	14.90

NOTES:

- * H : Horizontal polarization , ** V : Vertical polarization
- Result = Reading + Antenna factor + Cable loss
- Margin = Limit - Result
- The measurement was performed for the frequency range 30 MHz ~ 1 000 MHz according to the FCC Part 15.109(a) Class B.

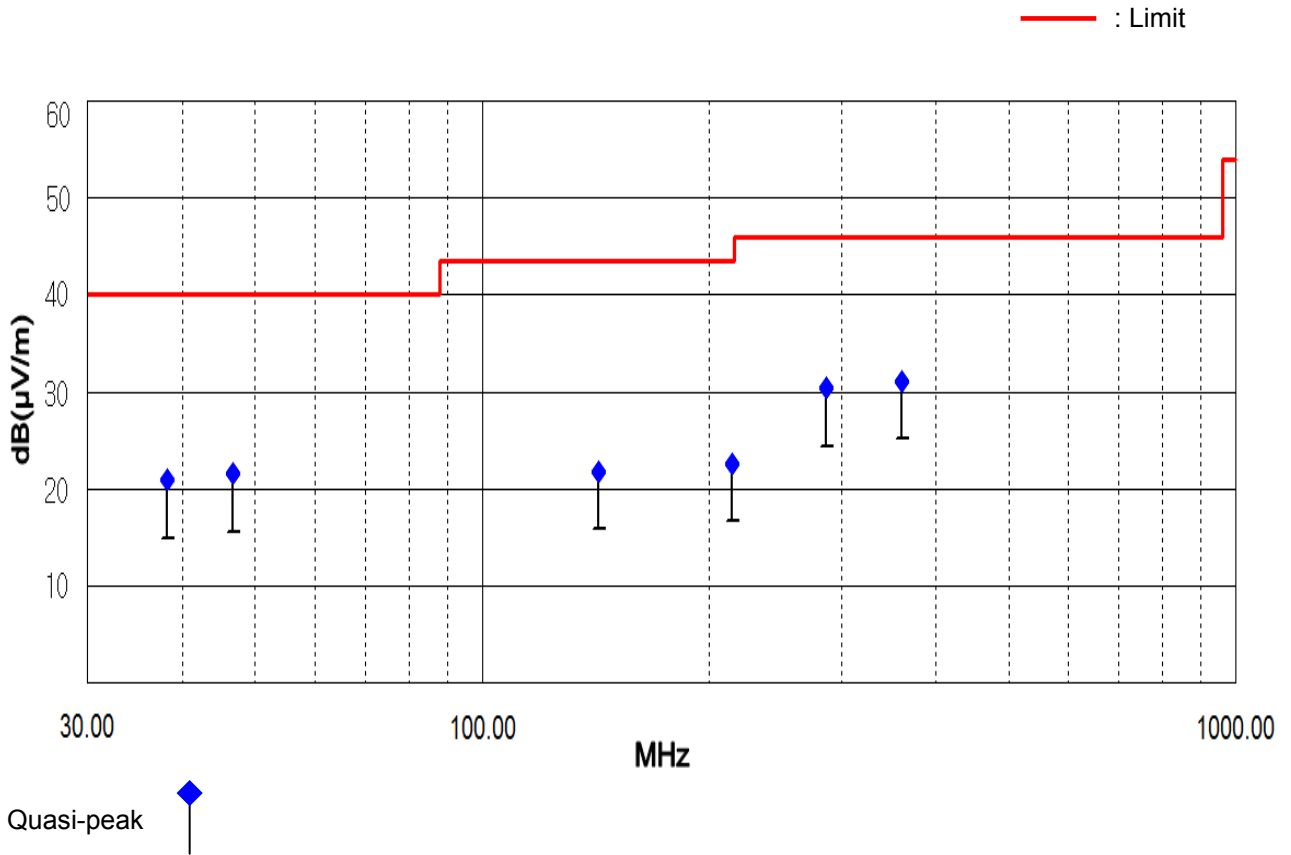

- Below 1 GHz

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.109(a) Class B
Test Date	December 08, 2014
Environmental of test	(18.2 ± 0.1) °C, (23 ± 1) % R.H., (102.6 ± 0.0) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - DVI mode
Result	Passed by 14.70 dB


Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
 Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
45.98	7.78	V	11.75	1.07	100	20.60	40.00	19.40
141.82	8.73	V	12.61	1.56	385	22.90	43.50	20.60
196.16	9.87	V	9.60	1.73	125	21.20	43.50	22.30
216.53	9.70	V	9.92	1.78	130	21.40	46.00	24.60
286.87	16.36	H	12.64	2.10	370	31.10	46.00	14.90
380.42	13.71	H	15.12	2.47	145	31.30	46.00	14.70

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin = Limit - Result
4. The measurement was performed for the frequency range 30 MHz ~ 1 000 MHz according to the FCC Part 15.109(a) Class B.

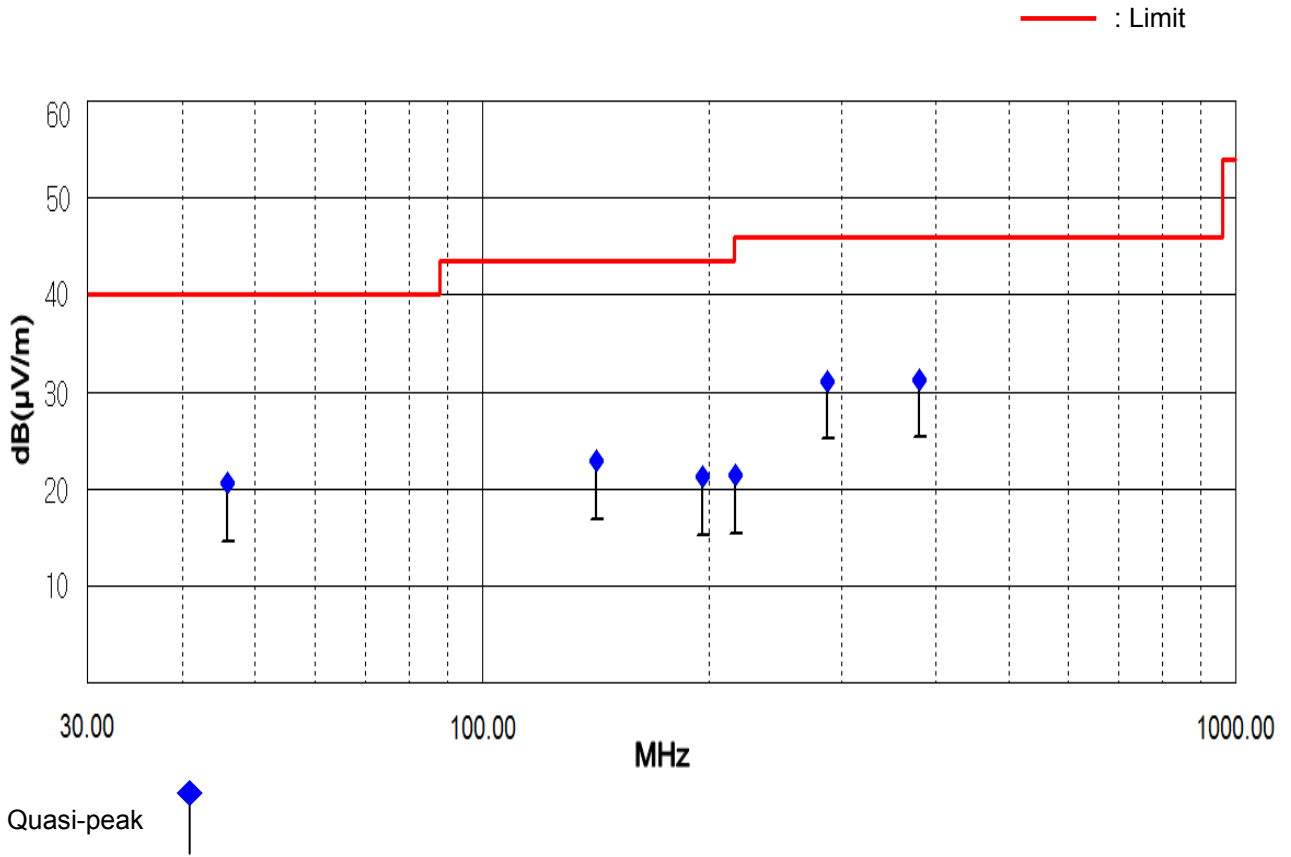

- Below 1 GHz

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.109(a) Class B
Test Date	December 08, 2014
Environmental of test	(17.5 ± 0.1) °C, (26 ± 1) % R.H., (102.6 ± 0.0) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - HDMI mode
Result	Passed by 14.70 dB


Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
36.94	8.58	V	11.03	0.99	100	20.60	40.00	19.40
45.81	8.59	V	11.74	1.07	140	21.40	40.00	18.60
142.85	7.44	V	12.60	1.56	135	21.60	43.50	21.90
195.99	10.95	V	9.62	1.73	130	22.30	43.50	21.20
286.41	15.77	H	12.63	2.10	370	30.50	46.00	15.50
378.43	13.77	H	15.07	2.46	120	31.30	46.00	14.70

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin = Limit - Result
4. The measurement was performed for the frequency range 30 MHz ~ 1 000 MHz according to the FCC Part 15.109(a) Class B.

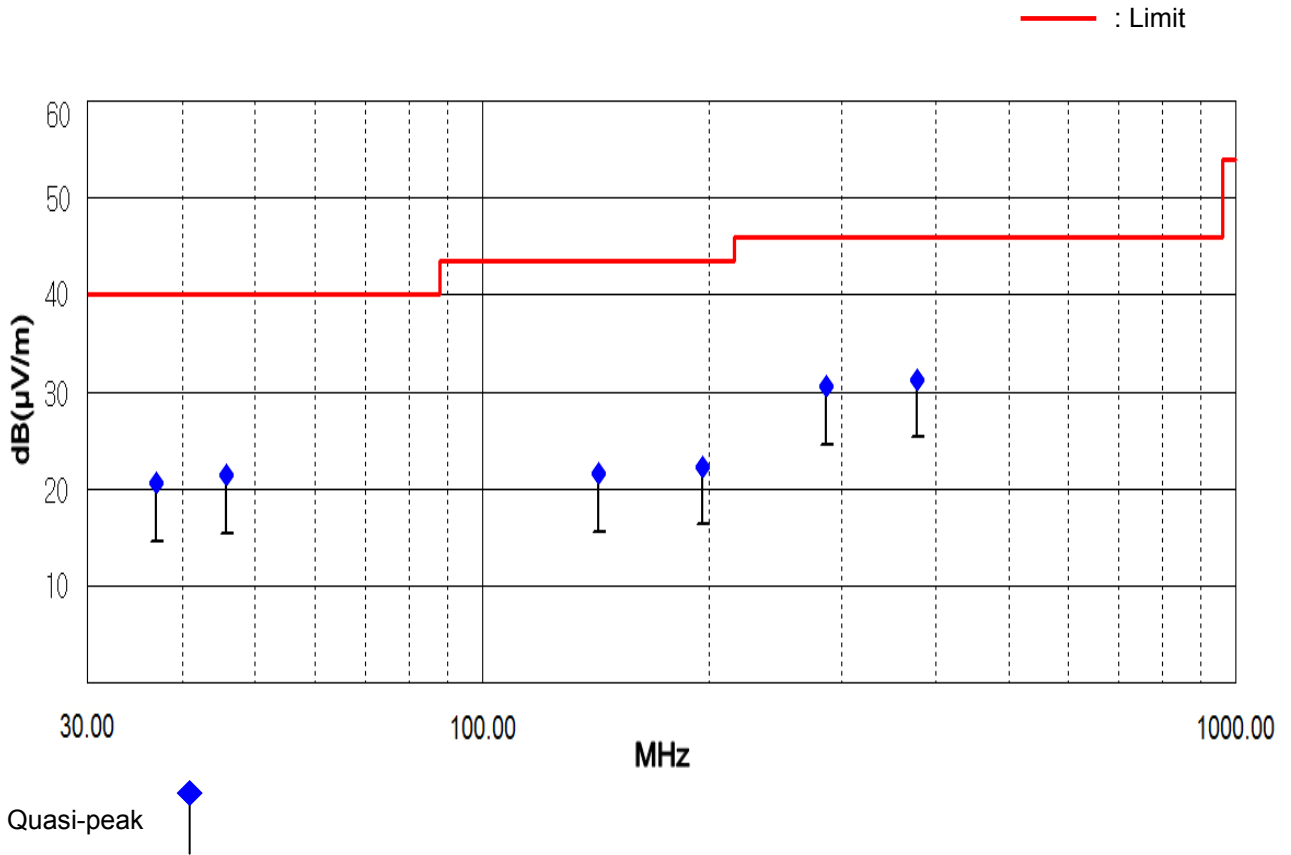

- Below 1 GHz

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.109(a) Class B
Test Date	December 08, 2014
Environmental of test	(18.1 ± 0.1) °C, (24 ± 1) % R.H., (102.6 ± 0.0) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - DP mode
Result	Passed by 14.60 dB


Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
37.90	8.57	V	11.03	1.00	100	20.60	40.00	19.40
49.17	8.34	V	11.87	1.09	150	21.30	40.00	18.70
143.65	7.94	V	12.59	1.57	135	22.10	43.50	21.40
215.32	9.25	V	9.87	1.78	135	20.90	43.50	22.60
286.51	15.77	H	12.63	2.10	385	30.50	46.00	15.50
360.25	14.38	H	14.62	2.40	140	31.40	46.00	14.60

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin = Limit - Result
4. The measurement was performed for the frequency range 30 MHz ~ 1 000 MHz according to the FCC Part 15.109(a) Class B.

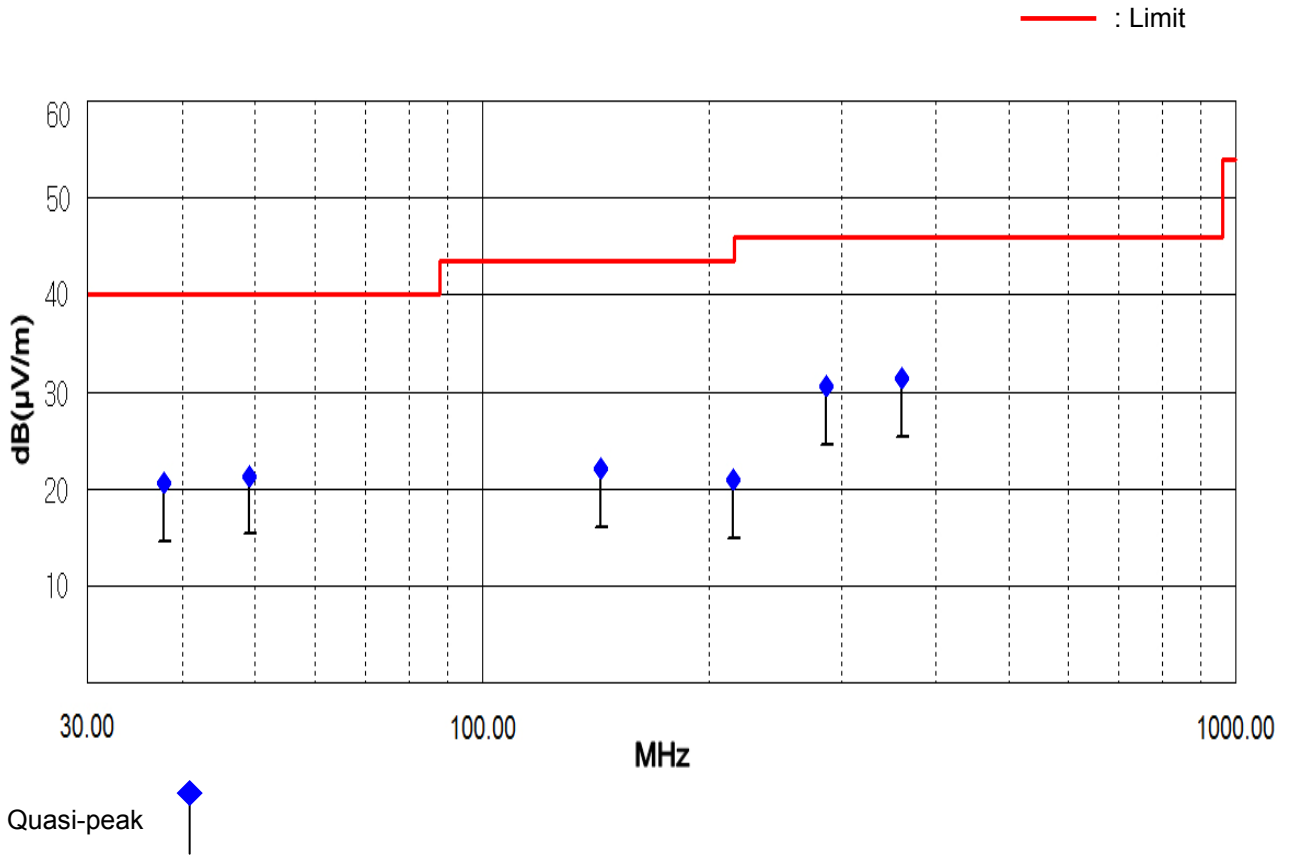

- Above 1 GHz

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.109(a) Class B
Test Date	December 11, 2014
Environmental of test	(22.1 ± 0.0) °C, (41 ± 0) % R.H., (102.4 ± 0.0) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - VGA mode
Result	Passed by 7.40 dB


Radiated Emission Test Data

The following data and graph shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Detector mode: CISPR Peak mode, Average mode

NOTES:

1. Please see the measured data and graph in next page.
2. H : Horizontal polarization , V : Vertical polarization
3. The c.f value was included the antenna factor, cable loss and Amp. Gain.
4. Result value = Reading + c.f
5. Margin value = Limit - Result
6. The measurement was performed for the frequency range 1 GHz ~ 6 GHz according to FCC Part 15.109(a) Class B.
7. Upper frequency of measurement range: 5th harmonic of the highest frequency.

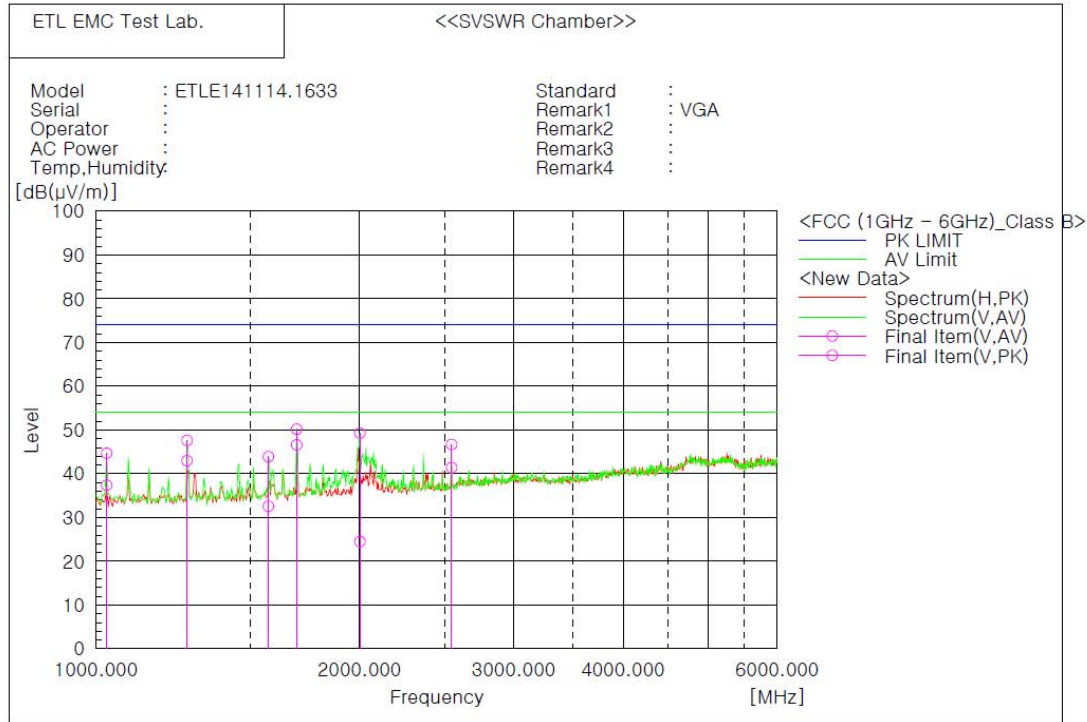

Final Result

— Vertical Polarization (AV)—

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
1	1028.280	52.6	-15.2	37.4	54.0	16.6
2	1270.680	57.4	-14.4	43.0	54.0	11.0
3	1573.680	46.0	-13.4	32.6	54.0	21.4
4	1694.880	59.6	-13.0	46.6	54.0	7.4
5	2001.920	36.5	-12.0	24.5	54.0	29.5
6	2547.320	51.1	-9.7	41.4	54.0	12.6

— Vertical Polarization (PK)—

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
1	1028.280	59.9	-15.2	44.7	74.0	29.3
2	1270.680	62.0	-14.4	47.6	74.0	26.4
3	1573.680	57.3	-13.4	43.9	74.0	30.1
4	1694.880	63.2	-13.0	50.2	74.0	23.8
5	2001.920	61.3	-12.0	49.3	74.0	24.7
6	2547.320	56.4	-9.7	46.7	74.0	27.3

- Above 1 GHz

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.109(a) Class B
Test Date	December 11, 2014
Environmental of test	(22.1 ± 0.0) °C, (39 ± 0) % R.H., (102.3 ± 0.0) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - DVI mode
Result	Passed by 9.70 dB


Radiated Emission Test Data

The following data and graph shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Detector mode: CISPR Peak mode, Average mode

NOTES:

1. Please see the measured data and graph in next page.
2. H : Horizontal polarization , V : Vertical polarization
3. The c.f value was included the antenna factor, cable loss and Amp. Gain.
4. Result value = Reading + c.f
5. Margin value = Limit - Result
6. The measurement was performed for the frequency range 1 GHz ~ 6 GHz according to FCC Part 15.109(a) Class B.
7. Upper frequency of measurement range: 5th harmonic of the highest frequency.

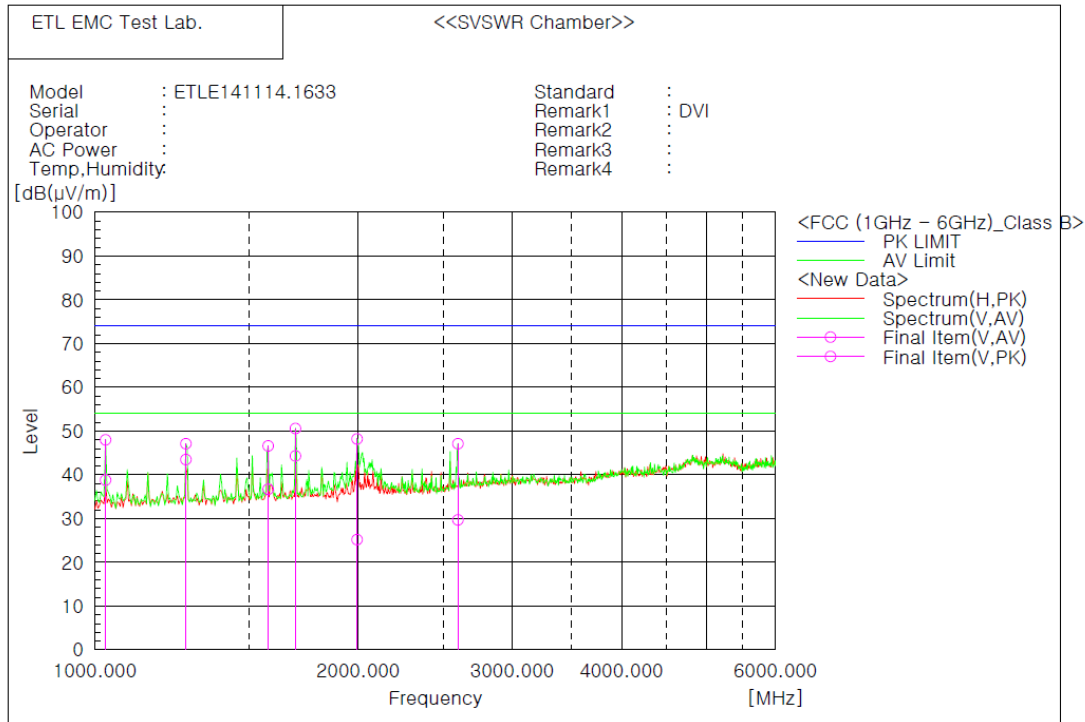

Final Result

— Vertical Polarization (AV)—

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
1	1028.280	54.0	-15.2	38.8	54.0	15.2
2	1270.680	57.9	-14.4	43.5	54.0	10.5
3	1577.720	50.1	-13.4	36.7	54.0	17.3
4	1694.880	57.3	-13.0	44.3	54.0	9.7
5	1993.840	37.3	-12.1	25.2	54.0	28.8
6	2599.840	39.1	-9.4	29.7	54.0	24.3

— Vertical Polarization (PK)—

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
1	1028.280	63.2	-15.2	48.0	74.0	26.0
2	1270.680	61.5	-14.4	47.1	74.0	26.9
3	1577.720	60.0	-13.4	46.6	74.0	27.4
4	1694.880	63.6	-13.0	50.6	74.0	23.4
5	1993.840	60.3	-12.1	48.2	74.0	25.8
6	2599.840	56.5	-9.4	47.1	74.0	26.9

- Above 1 GHz

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.109(a) Class B
Test Date	December 11, 2014
Environmental of test	(22.2 ± 0.0) °C, (40 ± 0) % R.H., (102.2 ± 0.0) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - HDMI mode
Result	Passed by 7.40 dB


Radiated Emission Test Data

The following data and graph shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Detector mode: CISPR Peak mode, Average mode

NOTES:

1. Please see the measured data and graph in next page.
2. H : Horizontal polarization , V : Vertical polarization
3. The c.f value was included the antenna factor, cable loss and Amp. Gain.
4. Result value = Reading + c.f
5. Margin value = Limit - Result
6. The measurement was performed for the frequency range 1 GHz ~ 6 GHz according to FCC Part 15.109(a) Class B.
7. Upper frequency of measurement range: 5th harmonic of the highest frequency.

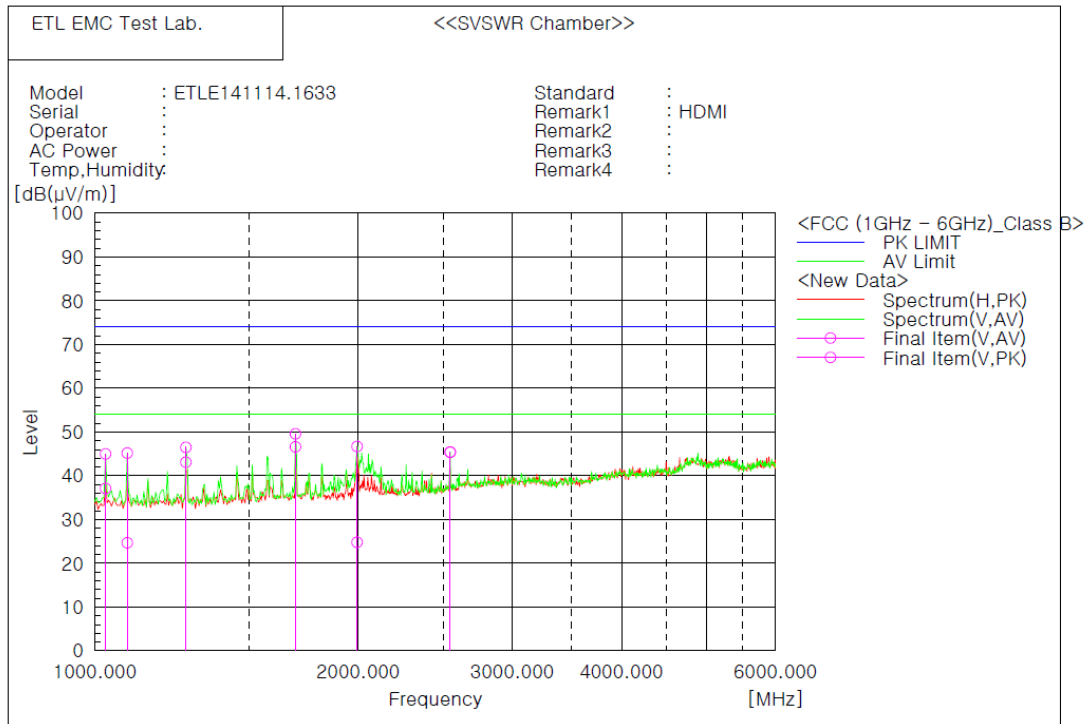

Final Result

— Vertical Polarization (AV)—

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
1	1028.280	52.3	-15.2	37.1	54.0	16.9
2	1088.880	39.7	-15.0	24.7	54.0	29.3
3	1270.680	57.5	-14.4	43.1	54.0	10.9
4	1694.880	59.6	-13.0	46.6	54.0	7.4
5	1993.840	36.9	-12.1	24.8	54.0	29.2
6	2547.320	55.1	-9.7	45.4	54.0	8.6

— Vertical Polarization (PK)—

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
1	1028.280	60.2	-15.2	45.0	74.0	29.0
2	1088.880	60.2	-15.0	45.2	74.0	28.8
3	1270.680	60.9	-14.4	46.5	74.0	27.5
4	1694.880	62.6	-13.0	49.6	74.0	24.4
5	1993.840	58.8	-12.1	46.7	74.0	27.3
6	2547.320	55.1	-9.7	45.4	74.0	28.6

- Above 1 GHz

EUT	LED MONITOR / L27DPJLP0 (S/N: P278QPLAA4A 00250)
Limit apply to	FCC Part 15.109(a) Class B
Test Date	December 11, 2014
Environmental of test	(22.3 ± 0.0) °C, (41 ± 0) % R.H., (102.2 ± 0.0) kPa
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H pattern" display on monitor. (BurnIn Test program) - DP mode
Result	Passed by 7.60 dB


Radiated Emission Test Data

The following data and graph shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Detector mode: CISPR Peak mode, Average mode

NOTES:

1. Please see the measured data and graph in next page.
2. H : Horizontal polarization , V : Vertical polarization
3. The c.f value was included the antenna factor, cable loss and Amp. Gain.
4. Result value = Reading + c.f
5. Margin value = Limit - Result
6. The measurement was performed for the frequency range 1 GHz ~ 6 GHz according to FCC Part 15.109(a) Class B.
7. Upper frequency of measurement range: 5th harmonic of the highest frequency.

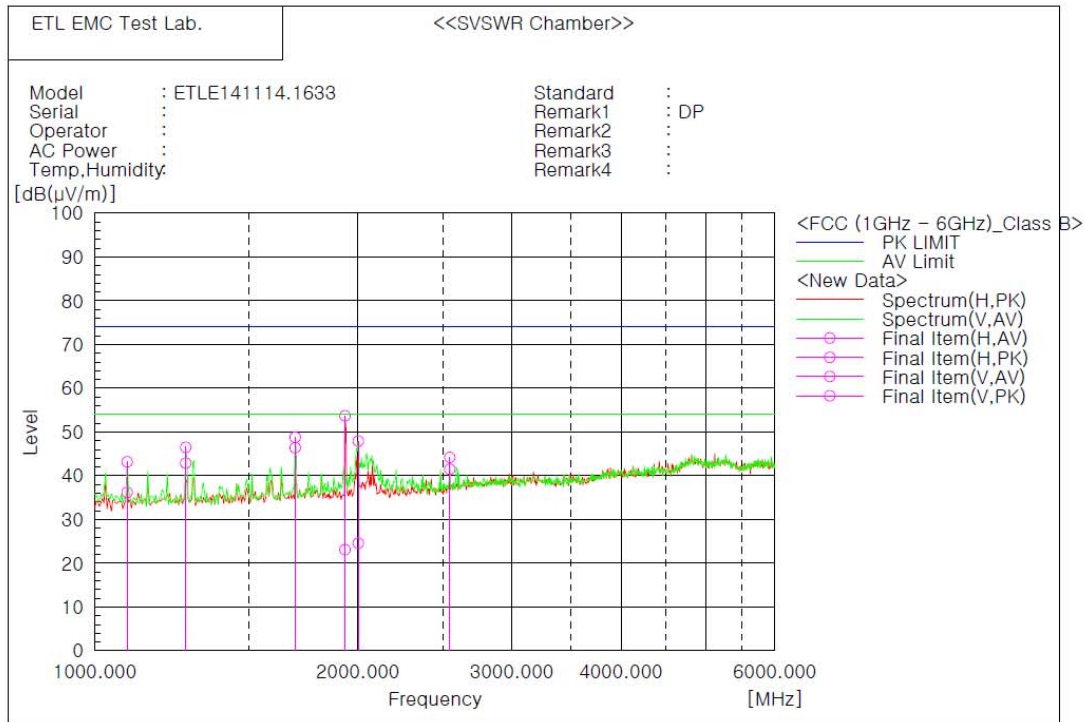

Final Result

— Horizontal Polarization (AV)—

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
1	1933.240	35.4	-12.3	23.1	54.0	30.9

— Horizontal Polarization (PK)—

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
1	1933.240	66.0	-12.3	53.7	74.0	20.3

— Vertical Polarization (AV)—

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
1	1088.880	51.2	-15.0	36.2	54.0	17.8
2	1270.680	57.3	-14.4	42.9	54.0	11.1
3	1694.880	59.4	-13.0	46.4	54.0	7.6
4	2001.920	36.6	-12.0	24.6	54.0	29.4
5	2547.320	51.2	-9.7	41.5	54.0	12.5

— Vertical Polarization (PK)—

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
1	1088.880	58.2	-15.0	43.2	74.0	30.8
2	1270.680	60.9	-14.4	46.5	74.0	27.5
3	1694.880	61.8	-13.0	48.8	74.0	25.2
4	2001.920	59.9	-12.0	47.9	74.0	26.1
5	2547.320	53.9	-9.7	44.2	74.0	29.8

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - PA$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

PA* = Preamplifier Factor

* PA is only be used for the measuring frequency above 1 GHz.

$$\text{dB}(\mu\text{V}) = 20 \log_{10} (\mu\text{V}) : \text{Equation}$$

$$\text{dB}(\mu\text{V}) = \text{dBm} + 107$$

Example : @ 360.25 MHz

Class B Limit	= 46.00 dB($\mu\text{V}/\text{m}$)
Reading	= 14.38 dB(μV)
Antenna Factor + Cable Loss	= 14.62 + 2.40 = 17.02 dB($\mu\text{V}/\text{m}$)
Total	= 31.40 dB($\mu\text{V}/\text{m}$)
Margin	= 46.00 – 31.40 = 14.60 dB
	= 14.60 dB below Limit

7. List of test equipments used for measurements

	Test Equipment	Model	Mfg.	Serial No.	Cal. Date	Cal. Due Date
<input checked="" type="checkbox"/>	EMI Test Receiver	ESVS 10	R&S	835165/001	14.03.18	15.03.18
<input checked="" type="checkbox"/>	EMI Test Receiver	ESPI3	R&S	100478	14.09.03	15.09.03
<input checked="" type="checkbox"/>	EMI Test Receiver	ESCS30	R&S	847793/005	14.03.18	15.03.18
<input checked="" type="checkbox"/>	EMI Test Receiver	ESCI7	R&S	100851	14.09.03	15.09.03
<input checked="" type="checkbox"/>	Two-Line V-Network	ENV216	R&S	958599/106	14.03.18	15.03.18
<input checked="" type="checkbox"/>	LISN	3816-2	EMCO	1002	14.09.04	15.09.04
<input checked="" type="checkbox"/>	Horn Antenna	BBHA 9120D	Schwarzbeck	826	14.04.02	16.04.02
<input checked="" type="checkbox"/>	Amplifier	TK-PA18	TESTEK.	120020	14.09.04	15.09.04
<input checked="" type="checkbox"/>	LogBicon Antenna	VULB9160	Schwarzbeck	3082	13.07.25	15.07.25
<input checked="" type="checkbox"/>	Turn-Table	DS1200-S	Innco Systems GmbH	2740311	N/A	N/A
<input checked="" type="checkbox"/>	Turn-Table	TT 1.35 SI	SES	-	N/A	N/A
<input checked="" type="checkbox"/>	Antenna Master	AM 4.5	SES	-	N/A	N/A