

**HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.**

INT'L STANDARD CERTIFICATION TEAM  
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNKI-DO, 467-701, KOREA  
TEL : +82 31 639 8518 FAX : +82 31 639 8525 www.hctec.co.kr

**CERTIFICATION (Permissive change class )**

**Manufacture;**

**IMAGEQUEST CO., LTD.**  
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI,  
KYOUNKI-DO, 467-701, KOREA  
  
IMAGEQUEST FRN : 0005-8664-39

**Date of Issue: DECEMBER 3, 2001**

**Test Report No.: HCT-F01-1202**

**Test Site: HYUNDAI CALIBRATION & CERTIFICATION  
TECHNOLOGIES CO., LTD.  
HCT FRN : 0005-8664-21**

**FCC ID :**

**PJIL550B  
L550B**

**MODEL / TYPE :**

<b>FCC Rule Part(s):</b>	<b>Part 15 &amp; 2; ET Docket 95-19</b>
<b>Classification:</b>	<b>FCC Class B Peripheral Device (JBP)</b>
<b>Standard(s):</b>	<b>FCC Class B: 1998 (CISPR 22)</b>
<b>Equipment(EUT) Type:</b>	<b>15" LCD Monitor</b>
<b>Max Resolution:</b>	<b>1024X768 (@60KHz/ 75Hz)</b>
<b>Port/ Connector(s):</b>	<b>15-pin D-sub VGA connector</b>
<b>LCD PALEL:</b>	<b>SAMSUNG ELECTRONICS CO.,LTD. (LTM150XH-L01)</b>

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.(See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HYUNDAI C-Tech. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse of 1988,21 U.S.C.853(a).



Report prepared by : **Ki-Soo Kim**  
Manager of EMC Tech. Part



# TABLE OF CONTENTS

## PAGE

<b>1.</b>	<b>GENERAL INFORMATION.....</b>	<b>3</b>
	1.1 Product Description.....	3
	1.2 Related submittal(s)/Grant(s).....	3
	1.3 Tested System Details.....	4
	1.4 Test Methodology.....	4
	1.5 Test Facility.....	4
<b>2.</b>	<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
	2.1 Justification.....	5
	2.2 EUT Exercise Software.....	5
	2.3 Cable Description.....	6
	2.4 Noise Suppression Parts on Cable.....	6
	2.5 Equipment Modifications.....	7
	2.6 Configuration of Tested System.....	8
<b>3.</b>	<b>PRELIMINARY TESTS.....</b>	<b>9</b>
	3.1 Power line Conducted Emissions Tests.....	9
	3.2 Radiated Emissions Tests.....	9
<b>4.</b>	<b>FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY.....</b>	<b>9</b>
	4.1 Conducted Emission Tests.....	10
	4.2 Radiated Emission Tests.....	11
<b>5.</b>	<b>FIELD STRENGTH CALCULATION.....</b>	<b>12</b>
<b>6.</b>	<b>LIST OF TEST EQUIPMENT .....</b>	<b>13</b>

ATTACHMENT A .....	ID Label / Location Info.
ATTACHMENT B.....	External Photos.
ATTACHMENT C .....	Block Diagram..
ATTACHMENT D .....	Test Setup Photos.
ATTACHMENT E .....	User's Manual.
ATTACHMENT F .....	Internal Photos.

# 1. GENERAL INFORMATION

## 1.1 Product Description

The ImageQuest CO., LTD. Model L550B (referred to as the EUT in this report) is a 15" LCD Monitor HOR. Freq. 60KHz w/max. Resolution of 1024X768 . Product specification information described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	PLASTIC
LIST OF EACH OSC. OR XTAL. FREQ.(FREQ. 1MHz)	12MHz, 20MHz
POWER REQUIREMENT	100-240V AC 60/50Hz 1.0A
NUMBER OF LAYERS	MAIN BOARD 4 LAYER OSD BOARD 1 LAYER POWER BOARD 1 LAYER INVERTER BOARD 4 LAYER
MAX. RESOLUTION	1024X768 (@60KHz/ 75 Hz)
H-SYNC FREQUENCY RANGE	31KHz 60KHz
V-SYNC FREQUENCY RANGE	56Hz 75Hz
LCD TYPE	15" ( LCD Type : LTM150XH-L01)

## 1.2 Related Submittal(s) / Grant(s)

ORIGINAL SUBMITTAL ONLY

### 1.3 Tested System Details

The Model names for all equipment, plus descriptions used in the tested system (including inserted cards) are:

DEVICE TYPE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
MONITOR (EUT)	IMAGEQUEST CO., LTD.	L550B	PJIL550B	HOST
PC(HOST)	H/P	DTPC-17	DoC	N/A
KEY BOARD	H/P	SK-2501-2D-K	GYUR385K	HOST
PRINTER	H/P	HP895C	DoC	HOST
MODEM	3COM CORPORATION	56K FAX MODEM	DoC	HOST
VIDEO CARD	DIAMOND	3D3000	DoC	HOST
MOUSE	H/P	INTELLIMOUSE	DZL211029	HOST

### 1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at an antenna to EUT distance of 10 meters.

### 1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1,MAEKOK-RI,HOBUP-MYUN,ICHON-SI,KYOUNGKI-DO, 467-701,KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 24,2000(Confirmation Number: EA90661)

## 2.SYSTEM TEST CONFIGURATION

### 2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following components and I/O cards inside the E.U.T were used.

DEVICE TYPE	MANUFACTURE	MODEL/PART NUMBER
MAIN BOARD	ImageQuest CO., Ltd.	3041001039
POWER BOARD	C&C TECH CO.,LTD.	3610200087
OSD BOARD	ImageQuest CO., Ltd.	3010700781
INVERTOR BOARD	ImageQuest CO., Ltd.	3610400244
LCD BOARD	SAMSUNG ELECTRONICS CO. , LTD	LTM150XH-L01

### 2.2 EUT exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disc, was inserted into drive A and is auto starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is :(1) Display test, (2) RS 232 test (3) Key board test,(4) Printer test,(5) FDD test,(6) HDD test. The complete cycle takes about 20 seconds and is repeated continuously. As the keyboard and mouse are strictly input devices, no data is transmitted to them during test. They are however, continuously scanned for data input activity. The video resolution modes setup and change program was used during the radiated and conducted emission testing.

## 2.3 Cable Description

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
<b>MONITOR(EUT)</b>	N	Y	<b>1.8(P), 1.5(D)</b>
<b>PC(HOST)</b>	N	N/A	<b>1.8(P)</b>
<b>PRINTER</b>	N	Y	<b>2.0(P),1.8(D)</b>
<b>KEY BOARD</b>	N/A	Y	<b>2.0(D)</b>
<b>MODEM</b>	N	Y	<b>2.0(P),0.8(D)</b>
<b>MOUSE</b>	N/A	Y	<b>1.8(D)</b>

## 2.4 Noise Suppression Parts on Cable. (I/O CABLE)

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
<b>MONITOR(EUT)</b>	Y	<b>BOTH END</b>	Y	<b>BOTH END</b>
<b>PRINTER</b>	N	<b>PC END</b>	Y	<b>BOTH END</b>
<b>KEY BOARD</b>	Y	<b>PC END</b>	Y	<b>PC END</b>
<b>MODEM</b>	Y	<b>PC END</b>	Y	<b>BOTH END</b>
<b>MOUSE</b>	N	<b>N/A</b>	Y	<b>PC END</b>

## 2.5 Equipment Modifications

N/A


## 2.6 Configuration of Test system

**Line Conducted Test** : EUT was connected to LISN, all other supporting equipment were connected to another LISN.

Preliminary Power line Conducted Emission tests were performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

**Radiated Emission Test** : Preliminary Radiated Emissions tests were conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating condition. Final Radiated Emission tests were conducted at 10 meter open area test site.

### [Configuration of Tested System]

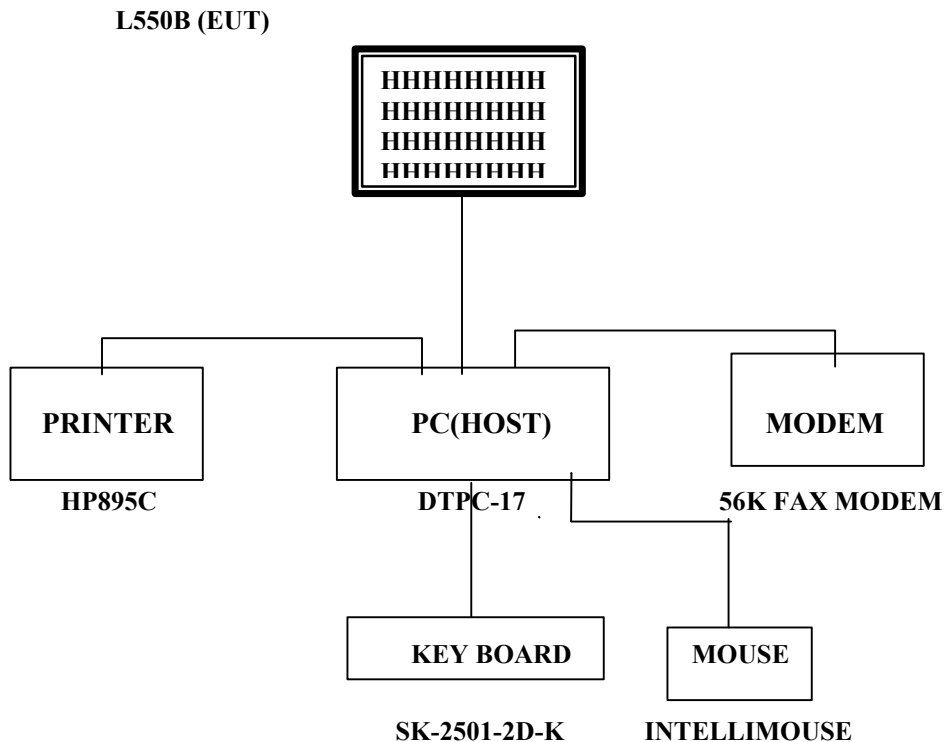



### 3. PRELIMINARY TESTS

#### 3.1 AC Power line Conducted Emission Tests

During Preliminary Tests, the following operating mode were investigated

Processor Speed (MHz)	Video Resolution (w/max)	The worst operating condition
Pentium 350 MHz	1024X768 (60KHz/75Hz)	X
	1024X768 (48.4KHz/60Hz)	
	1024X768 (56.5KHz/70Hz)	
	720X400 (31.5KHz/70Hz)	
	800 x 600 (46.7 KHz/75Hz)	
	640 x 480 (31.5KHz/60Hz)	

#### 4.2 Radiated Emission Tests

During Preliminary Tests, the following operating mode were investigated

Processor Speed (MHz)	Video Resolution (w/max)	The worst operating condition
Pentium 350 MHz	1024X768 (60KHz/75Hz)	X
	1024X768 (48.4KHz/60Hz)	
	1024X768 (56.5KHz/70Hz)	
	720X400 (31.5KHz/70Hz)	
	800 x 600 (46.7 KHz/75Hz)	
	640 x 480 (31.5KHz/60Hz)	

Tested by Kyoung-Houn SEO / Engineer

Date : NOVEMBER 19, 2001

## 4. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY

### 4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Humidity Level : 35%                      Temperature : 22  
 Limit apply to : CISPR 22  
 Type of Tests : CLASS B  
 Date : NOVEMBER 26, 2001  
 Result : PASSED BY 10.1 dB  
 EUT : 15" LCD MONITOR

Operating Condition : 1024X768 (Hf : 60KHz, Vf : 75Hz)

Detector : CISPR Quasi-Peak (6 dB Bandwidth : 9 KHz)  
           CISPR Average(6 dB Bandwidth : 9 KHz)

Line Conducted Emission Tabulated Data

Power Line Conducted Emissions			CISPR 22		
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)	Detector Mode
0.170	44.90	HOT	55.0	10.1	Average
0.170	53.90	NEUTRAL	65.0	11.0	Quasi-Peak
0.170	43.90	NEUTRAL	55.0	11.0	Average
0.170	53.90	HOT	65.0	11.1	Quasi-Peak

NOET:

1. All video modes and resolutions were investigated and the worst-case emissions are reported  
     Other video modes & resolution were tested and found to be in compliance.

Measured by : Kyoung-Houn SEO / Engineer


Date : NOVEMBER 26, 2001

**HYUNDAI C-TECH. CO., LTD.**  
**EMC TEST LAB.**

EUT: L550B  
 Manufacturer:  
 Operating Condition:  
 Test Site: Shield Room  
 Operator:  
 Test Specification:  
 Comment: N  
 Start of Test: 11/26/01 / 12:10:48PM

**SCAN TABLE: "EN 55022 V"**

Short Description:			EN 55022 Voltage			Transducer
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	
150.0 kHz	500.0 kHz	5.0 kHz	MaxPeak	100.0 ms	9 kHz	CABLE LOSS (NEW)
500.0 kHz	5.0 MHz	5.0 kHz	Average	10.0 ms	9 kHz	CABLE LOSS (NEW)

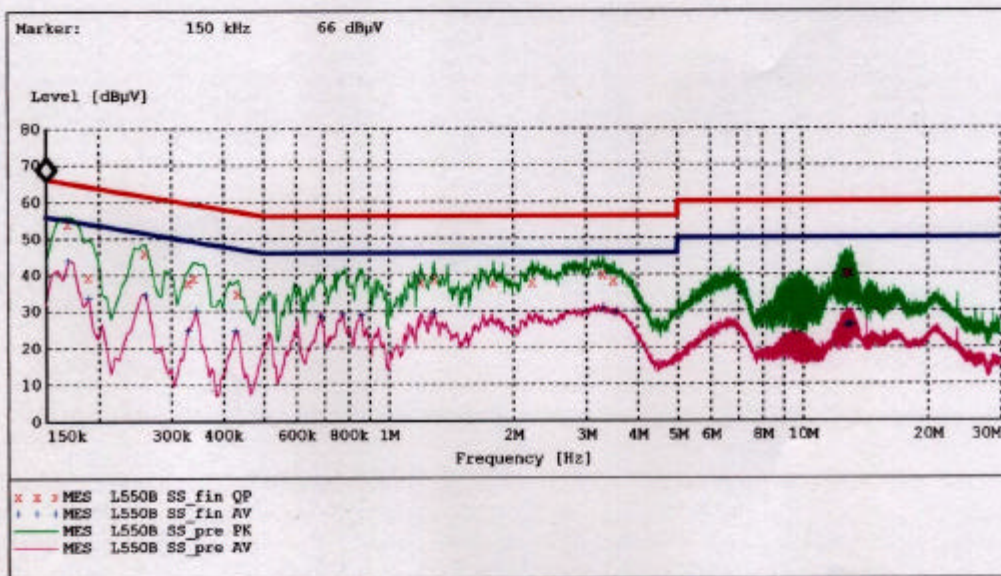

**MEASUREMENT RESULT: "L550B \_fin QP"**

11/26/01 12:16PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.170000	53.90	0.5	65	11.0	1	---
0.190000	39.30	0.5	64	24.8	1	---
0.260000	46.10	0.5	61	15.4	1	---
0.330000	37.70	0.5	60	21.7	1	---
0.340000	39.10	0.5	59	20.1	1	---
0.435000	34.90	0.5	57	22.2	1	---
1.200000	37.90	0.5	56	18.1	1	---
1.295000	38.90	0.5	56	17.1	1	---
1.805000	37.50	0.6	56	18.5	1	---
2.230000	37.80	0.6	56	18.2	1	---
3.315000	39.90	0.7	56	16.1	1	---
3.510000	38.30	0.7	56	17.7	1	---
12.730000	40.00	1.4	60	20.0	1	---
12.800000	40.40	1.4	60	19.6	1	---

**MEASUREMENT RESULT: "L550B \_fin QP"**  
(continued)

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
12.810000	40.40	1.4	60	19.6	1	---
12.925000	40.50	1.4	60	19.5	1	---
12.955000	40.50	1.4	60	19.5	1	---
13.090000	40.30	1.4	60	19.7	1	---

**MEASUREMENT RESULT: "L550B \_fin AV"**  
11/26/01 12:16PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.170000	43.90	0.5	55	11.0	1	---
0.190000	33.70	0.5	54	20.4	1	---
0.260000	34.50	0.5	51	16.9	1	---
0.330000	24.80	0.5	50	24.7	1	---
0.345000	30.30	0.5	49	18.8	1	---
0.430000	24.70	0.5	47	22.5	1	---
0.690000	28.70	0.5	46	17.3	1	---
0.780000	29.30	0.5	46	16.7	1	---
0.865000	28.90	0.5	46	17.1	1	---
1.295000	29.50	0.5	46	16.5	1	---
3.315000	30.90	0.7	46	15.1	1	---
3.550000	29.70	0.7	46	16.3	1	---
12.800000	25.80	1.4	50	24.2	1	---
12.935000	26.20	1.4	50	23.8	1	---
12.945000	26.20	1.4	50	23.8	1	---
12.955000	26.20	1.4	50	23.8	1	---
13.040000	26.30	1.4	50	23.7	1	---
13.265000	26.20	1.4	50	23.8	1	---

**HYUNDAI C-TECH. CO., LTD.**  
**EMC TEST LAB.**

EUT: L550B  
 Manufacturer:  
 Operating Condition:  
 Test Site: Shield Room  
 Operator:  
 Test Specification:  
 Comment: H  
 Start of Test: 11/26/01 / 12:19:13PM

**SCAN TABLE: "EN 55022 V"**

Short Description:			EN 55022 Voltage			Transducer
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	
150.0 kHz	500.0 kHz	5.0 kHz	MaxPeak	100.0 ms	9 kHz	CABLE LOSS (NEW)
500.0 kHz	5.0 MHz	5.0 kHz	Average	10.0 ms	9 kHz	CABLE LOSS (NEW)

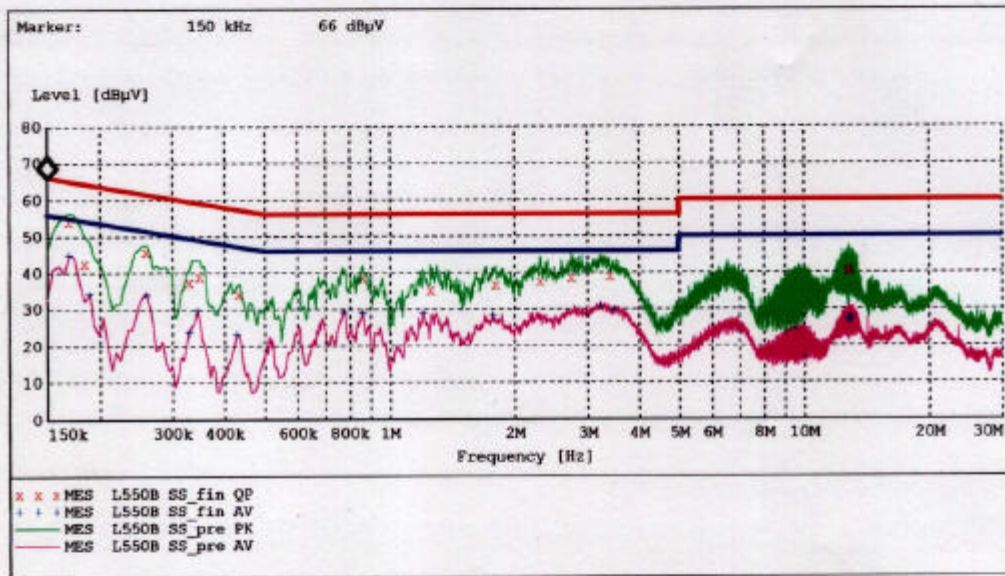

**MEASUREMENT RESULT: "L550B \_fin QP"**

11/26/01 12:24PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
0.170000	53.90	0.5	65	11.1	1	---
0.185000	42.60	0.5	64	21.6	1	---
0.260000	45.70	0.5	61	15.7	1	---
0.330000	37.30	0.5	60	22.1	1	---
0.350000	38.90	0.5	59	20.1	1	---
0.435000	34.00	0.5	57	23.1	1	---
0.865000	38.70	0.5	56	17.3	1	---
1.260000	35.30	0.5	56	20.7	1	---
1.815000	36.70	0.6	56	19.3	1	---
2.315000	37.50	0.6	56	18.5	1	---
2.755000	38.60	0.6	56	17.4	1	---
3.415000	38.90	0.7	56	17.1	1	---
12.785000	40.40	1.4	60	19.6	1	---
12.850000	40.80	1.4	60	19.2	1	---

**MEASUREMENT RESULT: "L550B \_fin QP"**  
(continued)

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
12.870000	40.60	1.4	60	19.4	1	---
12.890000	40.80	1.4	60	19.2	1	---
12.920000	40.70	1.4	60	19.3	1	---
13.075000	40.50	1.4	60	19.5	1	---

**MEASUREMENT RESULT: "L550B \_fin AV"**  
11/26/01 12:24PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
0.170000	44.90	0.5	55	10.1	1	---
0.190000	34.40	0.5	54	19.6	1	---
0.260000	34.00	0.5	51	17.4	1	---
0.330000	23.90	0.5	50	25.6	1	---
0.345000	29.80	0.5	49	19.3	1	---
0.430000	23.30	0.5	47	24.0	1	---
0.780000	29.30	0.5	46	16.7	1	---
0.865000	29.00	0.5	46	17.0	1	---
1.210000	28.90	0.5	46	17.1	1	---
1.785000	28.30	0.6	46	17.7	1	---
3.235000	30.80	0.6	46	15.2	1	---
3.495000	29.80	0.7	46	16.2	1	---
12.850000	27.20	1.4	50	22.8	1	---
12.890000	27.20	1.4	50	22.8	1	---
12.910000	27.30	1.4	50	22.7	1	---
12.965000	27.40	1.4	50	22.6	1	---
13.005000	27.10	1.4	50	22.9	1	---
13.075000	27.20	1.4	50	22.8	1	---

## 4.2 Radiated Emissions Tests

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Humidity Level : 34 %                      Temperature : 23  
 Limit apply to : CISPR 22  
 Type of Tests : CLASS B  
 Date : NOVEMBER 23, 2001  
 Result : PASSED BY 3.0 dB

EUT : 15" LCD MONITOR  
 Operating Condition : 1024X768 (Hf :60 kHz, Vf : 75 Hz)  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth : 120 KHz)

Frequency MHz	Reading dBuV/m	Ant. Factor dB	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dBuV
55.0	16.07	9.23	1.60	V	26.9	30.0	-3.1
96.2	13.55	9.55	2.00	V	25.1	30.0	-4.9
139.8	6.89	14.41	2.50	H	23.8	30.0	-6.2
175.7	9.25	15.05	2.70	H	27.0	30.0	-3.0
185.9	8.46	15.24	2.80	V	26.5	30.0	-3.5
281.1	2.84	17.86	3.80	V	24.5	37.0	-12.5
350.8	5.40	16.60	4.00	V	26.0	37.0	-11.0
401.5	11.70	16.50	4.20	V	32.4	37.0	-4.6
455.8	10.63	17.77	4.70	H	33.1	37.0	-3.9
560.8	7.85	19.75	5.30	V	32.9	37.0	-4.1
595.8	7.77	20.23	5.70	H	33.7	37.0	-3.3
769.0	0.97	22.73	6.50	H	30.2	37.0	-6.8

**NOTE:**

- 1.All video modes and resolutions were investigated and the worst-case emissions are reported.
- 2.Other video modes & resolution were tested and found to be in compliance.

Measured by Kyoung-Houn SEO / Engineer

Date : NOVEMBER 23 , 2001

## 5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 and a Cable Factor of 1.1 is added. The 30 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(30 \text{ dBuV/m})/20] = 31.6 \text{ uV/m}$$



## 6. LIST OF TEST EQUIPMENT

<b>TYPE</b>	<b>MANUFACTURE</b>	<b>MODEL</b>	<b>CAL. DATE</b>
EMI Test Receiver	Rohde & Schwarz	ESH3	2001.6.29
EMI Test Receiver	Rohde & Schwarz	ESVP	2001.2.14
EMI Test Receiver	Rohde & Schwarz	ESI40	2001.1.18
EMI Test Receiver	Rohde & Schwarz	ESVS30	2001.6.26
Spectrum Monitor	Rohde & Schwarz	EZM	N.A
Graphic Plotter	Rohde & Schwarz	DOP2	N.A
Printer	Rohde & Schwarz	PDN	N.A
Spectrum Analyzer	H.P	8591EM	2001.7.11
LISN	EMCO	3825/2	2001.7.13
LISN	Rohde & Schwarz	ESH2-Z5	2001.7.14
Amplifier	Hewlett-Packard	8447E	2001.3.2
Dipole Antennas	Rohde & Schwarz	VHAP	2001.6.28
Dipole Antennas	Rohde & Schwarz	UHAP	2001.6.28
Biconical Antenna	Rohde & Schwarz	BBA-9106	2001.6.28
Log-Periodic Antenna	Rohde & Schwarz	UHALP-9107	2001.6.26
Antenna Position Tower	EMCO	1051-12	N.A
Turn Table	EMCO	1060-06	N.A
Line Filter	KEENE	ULW 2X30-60	N.A
Power Analyzer	Voltech	PM 3300	2001.2.20
Reference Network Impedance	Voltech	IEC 555	N.A
AC Power Source	PACIFIC	Magnetic Module	N.A
AC Power Source	PACIFIC	360AMX	N.A