

Straubing, 15 December 2006

TEST - REPORT

No. 50602-060877 (Edition 1)

for

ID CPR.04

Inductive Tag Reader

Applicant: FEIG ELECTRONIC GmbH

Test Specifications: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207, 15.215 and 15.225

Industry Canada Radio Standards
Specifications
RSS-Gen Issue 1, Section 7.2.2 and
RSS-210 Issue 6, Sections 2.2, 2.6, A2.6
(Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	4
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT.....	7
6	Measurement Procedures.....	8
6.1	Bandwidth Measurements	8
6.2	Conducted AC Powerline Emission.....	9
6.3	Radiated Emission Measurement 9 kHz to 30 MHz	11
6.4	Radiated Emission in Fully or Semi Anechoic Room.....	13
6.5	Radiated Emission at Open Field Test Site.....	15
6.6	Carrier Frequency Stability	16
7	Photographs Taken During Testing	18
8	Test Results.....	25
8.1	Occupied Bandwidth.....	27
8.2	Bandwidth of the Emission	31
8.3	Designation of Emissions	33
8.4	Restricted Bands of Operation	34
8.5	Conducted Powerline Emission Measurement 150 kHz to 30 MHz.....	35
8.6	Spectrum Mask.....	47
8.7	Radiated Emission Measurement 9 kHz to 30 MHz	49
8.8	Radiated Emission Measurement 30 MHz to 1 GHz	52
8.9	Carrier Frequency Stability	54
8.10	Exposure of Humans to RF Fields.....	57
9	Referenced Regulations	59
10	Charts taken during testing	60

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	ID CPR.04
Parts ² :	
Serial number(s):	0001
Manufacturer:	FEIG ELECTRONIC GmbH
Type of equipment:	Inductive Tag Reader
Version:	As delivered
FCC ID:	
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	13.553 - 13.567 MHz
Frequency range:	13.56 MHz
Operating frequency:	13.56 MHz
Type of modulation:	ASK
Pulse train:	---
Pulse width:	---
Number of RF-channels:	1
Channel spacing:	Not applicable
Designation of emissions ³ :	1M70A1D
Type of antenna:	Integrated loop on printed board
Size/length of antenna:	
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of power supply:	DC supply over USB
Specifications for power supply:	nominal voltage: 5.00 V minimum voltage: 4.25 V maximum voltage: 5.75 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

Application details	
Applicant (full address):	FEIG ELECTRONIC GmbH Lange Straße 4 35781 Weilburg-Waldhausen Germany
Contact person:	Mr. Bernhard Schüßler
Contract identification:	Order No. EB204251 / 16483 (05 October 2006)
Receipt of EUT:	10 October 2006 29 November 2006
Date(s) of test:	October - December 2006
Note(s):	

Report details	
Report number:	50602-060877
Edition:	1
Issue date:	15 December 2006

3 Identification of the Test Laboratory

Details of the Test Laboratory	
Company name:	Senton GmbH EMI/EMC Test Center
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-171/94-02
FCC test site registration number	90926
Industry Canada test site registration:	IC 3050
Contact person:	Mr. Johann Roidt
	Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207, 15.215 and 15.225

of the Federal Communication Commission (FCC) and the

Radio Standards Specifications

RSS-Gen Issue 1, Section 7.2.2 and

RSS-210 Issue 6, Sections 2.2, 2.6, A2.6 (Category I Equipment)

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

5 Operation Mode and Configuration of EUT

Operation Mode(s)

Tests were performed with modulated carrier, with and without tag. For conducted powerline emissions the antenna was substituted with a 50 Ω resistor.

Configuration(s) of EUT

The EUT was configured as USB device of a laptop PC.

List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification⁴</i>	<i>Cable type</i>	<i>Cable length</i>
1	USB supply	dc power signal/control port	Shielded	2 m
2	AC supply of laptop PC	ac power	Unshielded	80 cm

List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
	Not applicable			

List of support devices

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	Laptop PC	DELL Dimension		DELL

⁴ Ports shall be classified as ac power, dc power or signal/control port


6 Measurement Procedures

6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 1, sections 4.4.1 and 4.4.2 IC RSS-210 Issue 6, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 1, sections 4.4.1 and 4.4.2
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.3)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

6.2 Conducted AC Powerline Emission

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 1, section 7.2.2
Guide:	ANSI C63.4 / CISPR 22
<p>Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:</p> <p>First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.</p> <p>If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.</p> <p>According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.</p> <p>Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.</p>	

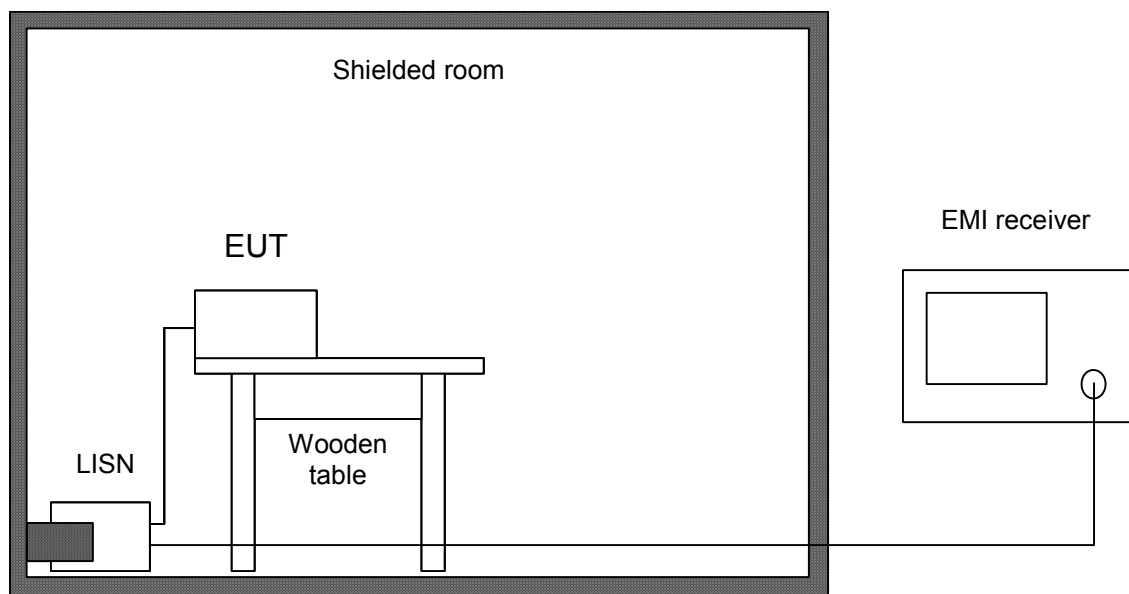


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	EMI receiver	ESHS 10	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/>	LISN	ESH3-Z5	862770/021	Rohde & Schwarz
<input type="checkbox"/>	LISN	ESH3-Z5	830952/025	Rohde & Schwarz
<input type="checkbox"/>	Artificial mains network	ESH 2-Z5	842966/004	Rohde & Schwarz
<input type="checkbox"/>	Shielded room	No. 1	1451	Albatross Projects
<input checked="" type="checkbox"/>	Shielded room	No. 4	3FD-100 544	Euroshield

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205, 15.215(b) and 15.225(a)-(d) IC RSS-210 Issue 6, sections 2.2, 2.6 and A2.6
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).</p> <p>Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p>	

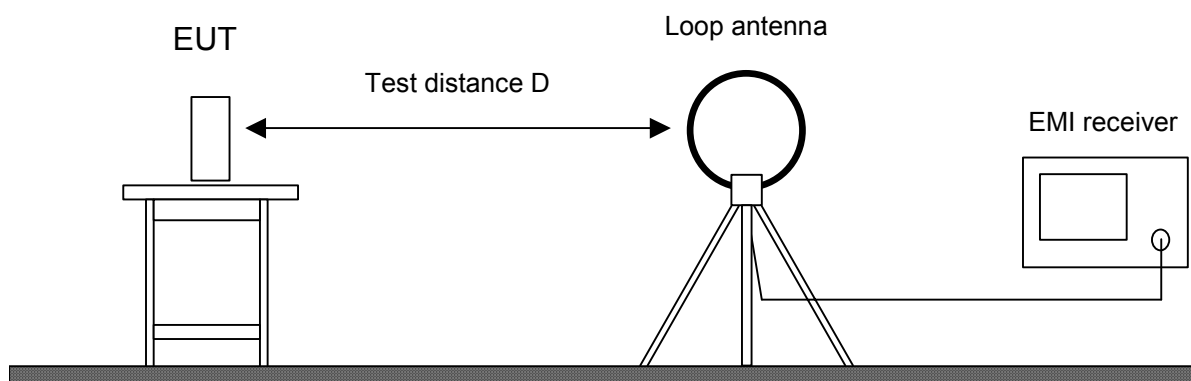


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Test receiver	ESHS 10	860043/016	Rohde & Schwarz
<input type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input checked="" type="checkbox"/>	Loop antenna	HFH2-Z2	882964/1	Rohde & Schwarz
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens
<input checked="" type="checkbox"/>	Open field test site	EG 1	1450	Senton

6.4 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 6, sections 2.2(b)(c), 2.6 and A2.6
Guide:	ANSI C63.4
<p>Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 18 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance is reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully or semi anechoic room are indicated as prescans.</p>	

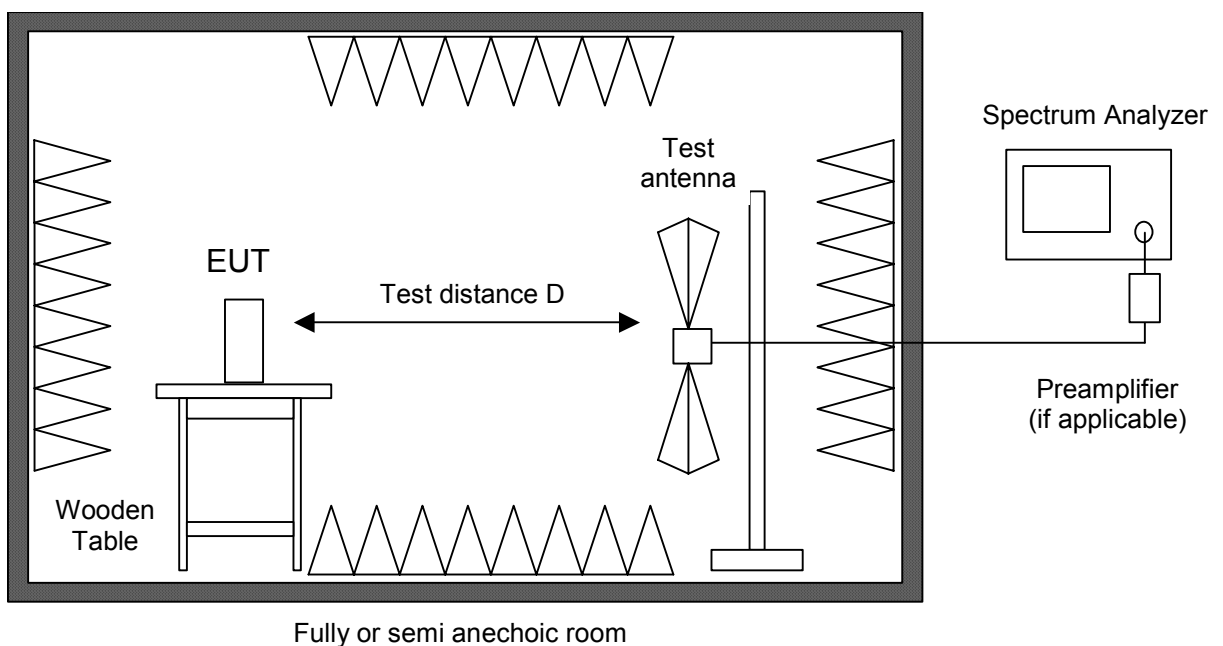


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	Spectrum analyzer	R 3271	05050023	Advantest
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input type="checkbox"/>	Preamplifier	R14601		Advantest
<input type="checkbox"/>	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
<input type="checkbox"/>	Preamplifier 0.5-8 GHz	AMF-4D-005080-25-13P	860149	Miteq
<input type="checkbox"/>	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
<input type="checkbox"/>	External Mixer	WM782A	845881/005	Tektronix
<input type="checkbox"/>	Harmonic Mixer	FS-Z30	843389/007	Rohde & Schwarz
	Accessories			
<input checked="" type="checkbox"/>	Trilog broadband antenna	VULB 9163	9163-188	Schwarzbeck
<input type="checkbox"/>	Horn antenna	3115	9508-4553	EMCO
<input type="checkbox"/>	Horn antenna	3160-03	9112-1003	EMCO
<input type="checkbox"/>	Horn antenna	3160-04	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-05	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-06	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-07	9112-1008	EMCO
<input type="checkbox"/>	Horn antenna	3160-08	9112-1002	EMCO
<input type="checkbox"/>	Horn antenna	3160-09	9403-1025	EMCO
<input type="checkbox"/>	Horn antenna	3160-10	399185	EMCO
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens

6.5 Radiated Emission at Open Field Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 6, sections 2.2(b)(c), 2.6 and A2.6
Guide:	ANSI C63.4
<p>Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.</p>	

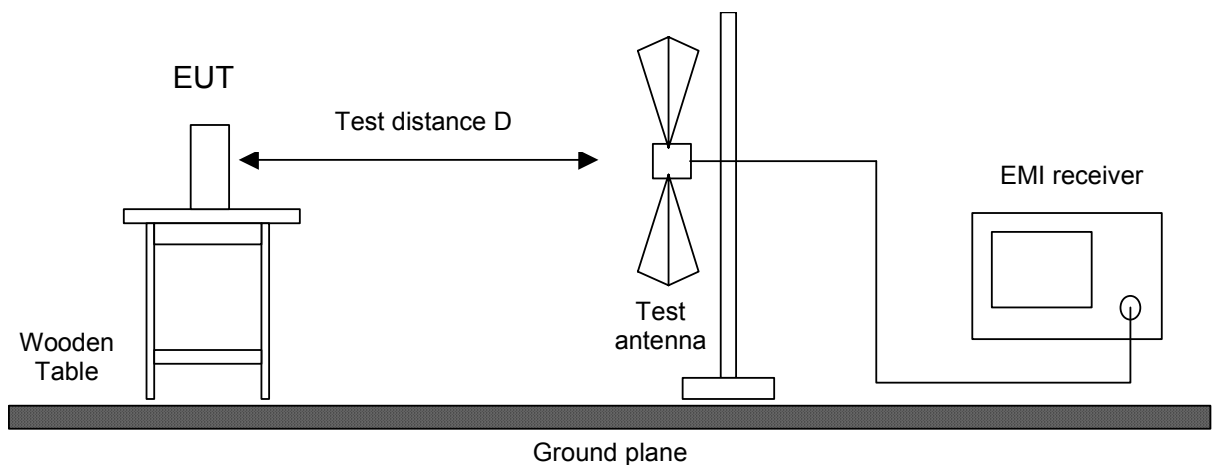


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	EMI receiver	ESVP	881120/024	Rohde & Schwarz
<input checked="" type="checkbox"/>	Biconical antenna	EG 1 HK 116	842204/001	Rohde & Schwarz
<input checked="" type="checkbox"/>	Log. per. antenna	EG 1 HL 223	841516/023	Rohde & Schwarz
<input checked="" type="checkbox"/>	Open field test site	EG 1	1450	Senton

6.6 Carrier Frequency Stability

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 1, section 4.5 and IC RSS-210 Issue 6, section A2.6
Guide:	ANSI C63.4
<p>The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °C.</p> <p>If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used.</p> <p>For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:</p> <ul style="list-style-type: none"> • the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage • the battery nominal voltage • 85% of the battery nominal voltage • the battery operating end point voltage which shall be specified by the equipment manufacturer <p>The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.</p> <p>If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.</p>	

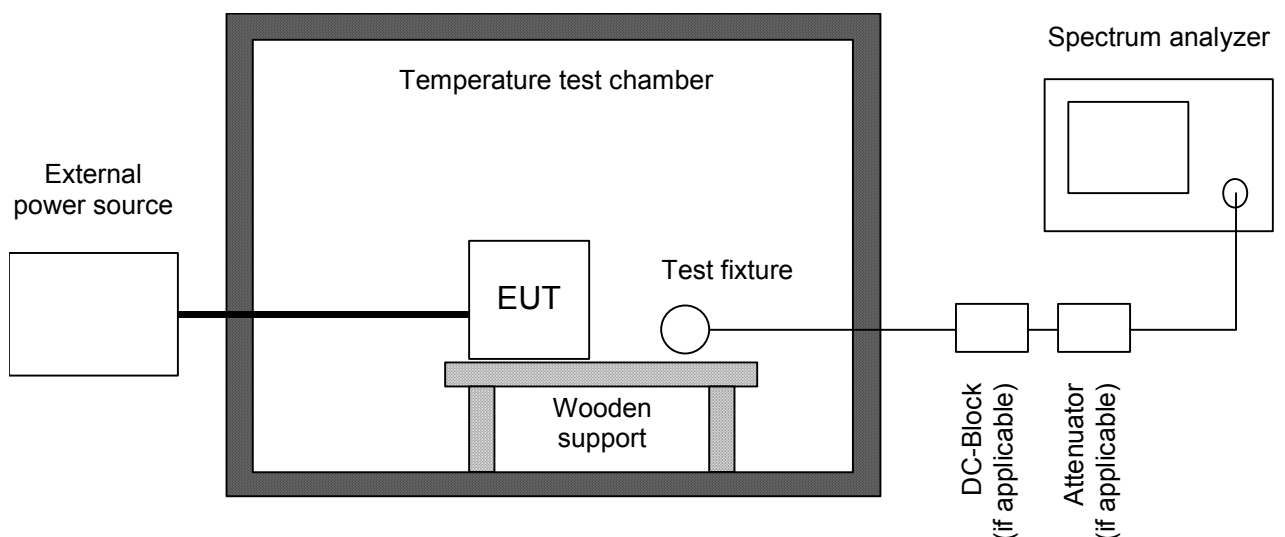

Test instruments used:


Used	Type	Model	Serial No. or ID	Manufacturer
<input type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input checked="" type="checkbox"/>	EMI test receiver	ESPI7	836914/0002	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/>	DC-block	7006	A2798	Weinschel
<input type="checkbox"/>	Attenuator	4776-10	9412	Narda
<input type="checkbox"/>	Attenuator	4776-20	9503	Narda
<input type="checkbox"/>	Test probe	TP01	001	Senton
<input checked="" type="checkbox"/>	DC power supply	NGSM 32/10	203	Rohde & Schwarz
<input type="checkbox"/>	Isolating transformer	RT 5A	10387	Grundig
<input type="checkbox"/>	Isolating transformer	RT 5A	10416	Grundig
<input checked="" type="checkbox"/>	Temperature test chamber	HT4010	07065550	Heraeus

7 Photographs Taken During Testing

Test setup for conducted AC powerline emission measurement



Test setup for radiated emission measurement 9 kHz – 30 MHz

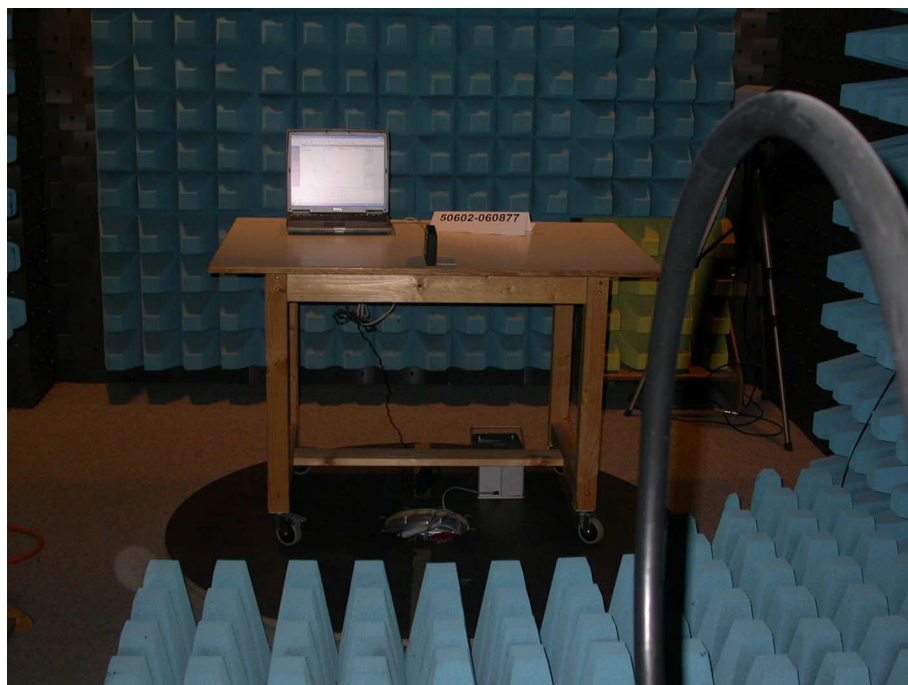

**Test setup for radiated emission measurement 9 kHz – 30 MHz
- continued -**



**Test setup for radiated emission measurement
(fully anechoic room)**



**Test setup for radiated emission measurement
(open field test site)**



**Test setup for radiated emission measurement
(open field test site) - continued -**



8 Test Results

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	27	Recorded
15.215(c)	Bandwidth of the emission	31	Test passed
2.201, 2.202	Class of emission	33	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a) 15.205(d)(7)	Restricted bands of operation	34 ⁵	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	35	Test passed
15.225(a)-(d)	Spectrum Mask	47	Test passed
15.205(b) 15.215(b) 15.225(a)(d)	Radiated emission 9 kHz to 30 MHz	49	Test passed
15.205(b) 15.225(d)	Radiated emission 30 MHz to 1 GHz	52	Test passed
15.225(e)	Carrier frequency stability	54	Test passed

⁵ See "Spectrum Mask" for the 13.36 to 13.41 MHz band, too

IC RSS-Gen Issue 1			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.6	Transmitter output power (conducted)	---	Not applicable
4.4.1	Occupied Bandwidth	27	Recorded
3.2(h), 8	Designation of emissions	33	Calculated
4.3	Pulsed operation	---	Not applicable
7.2.2	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	35	Test passed
5.5	Exposure of Humans to RF Fields	57	Exempted from SAR and RF evaluation

IC RSS-210 Issue 6			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.2(a)	Restricted bands and unwanted emission frequencies	34 ⁶	Test passed
A2.6	Spectrum Mask	47	Test passed
2.2(b)(c), 2.6 A2.6	Unwanted emissions 9 kHz to 30 MHz	49	Test passed
2.2(b)(c), 2.6 A2.6	Unwanted emissions 30 MHz to 1 GHz	52	Test passed
A2.6	Carrier frequency stability	54	Test passed


⁶ See "Spectrum Mask" for the 13.36 to 13.41 MHz band, too

8.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	<p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
The video bandwidth shall be at least three times greater than the resolution bandwidth.		
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	
Date of test:	30 November 2006
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):

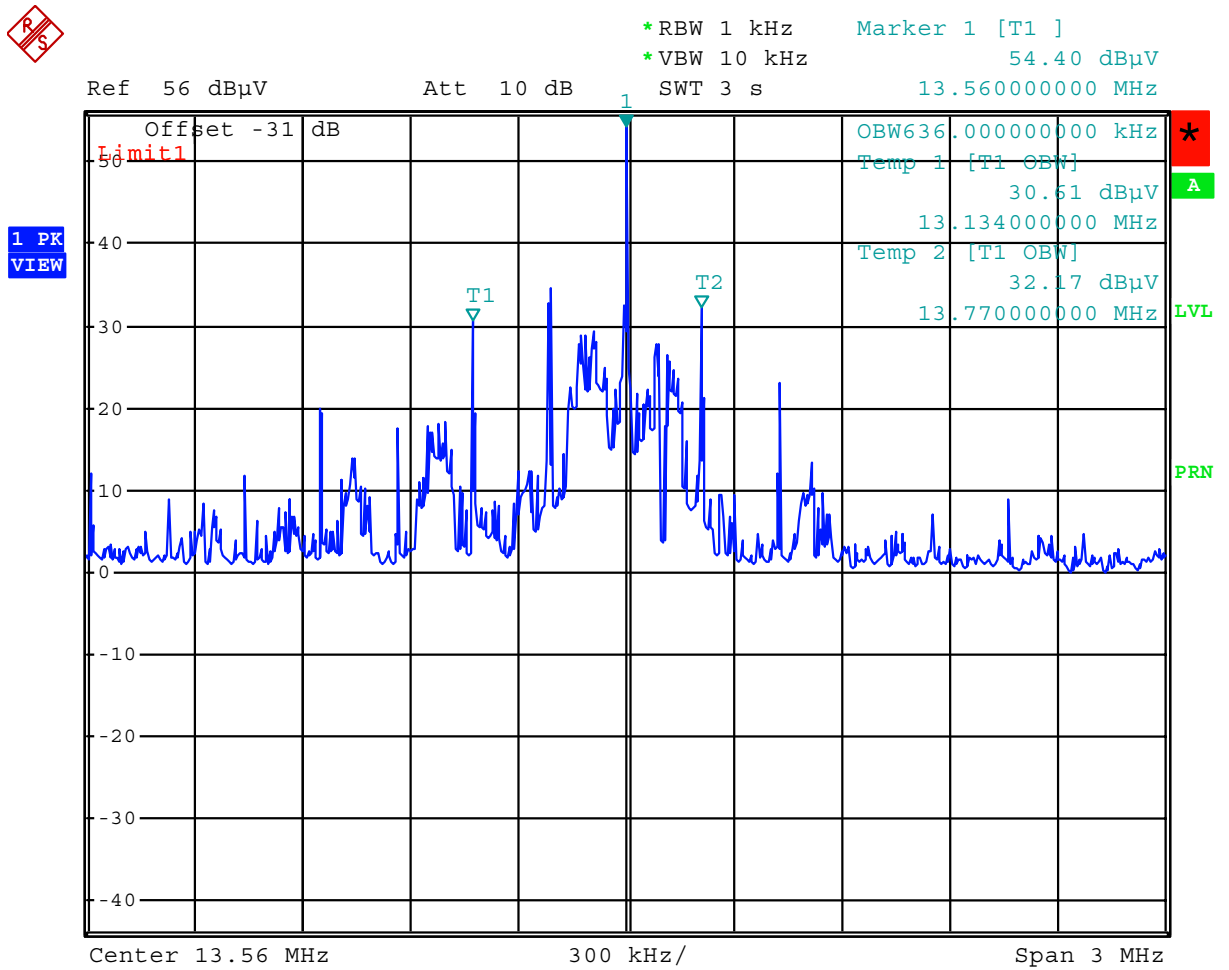

Comment: 060877: Emission Bandwidth
 Date: 30.NOV.2006 19:10:37


Occupied Bandwidth (99 %): **636 kHz**

Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 1, section 4.4.1
Guide:	IC RSS-Gen Issue 1, section 4.4.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	
Date of test:	30 November 2006
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):

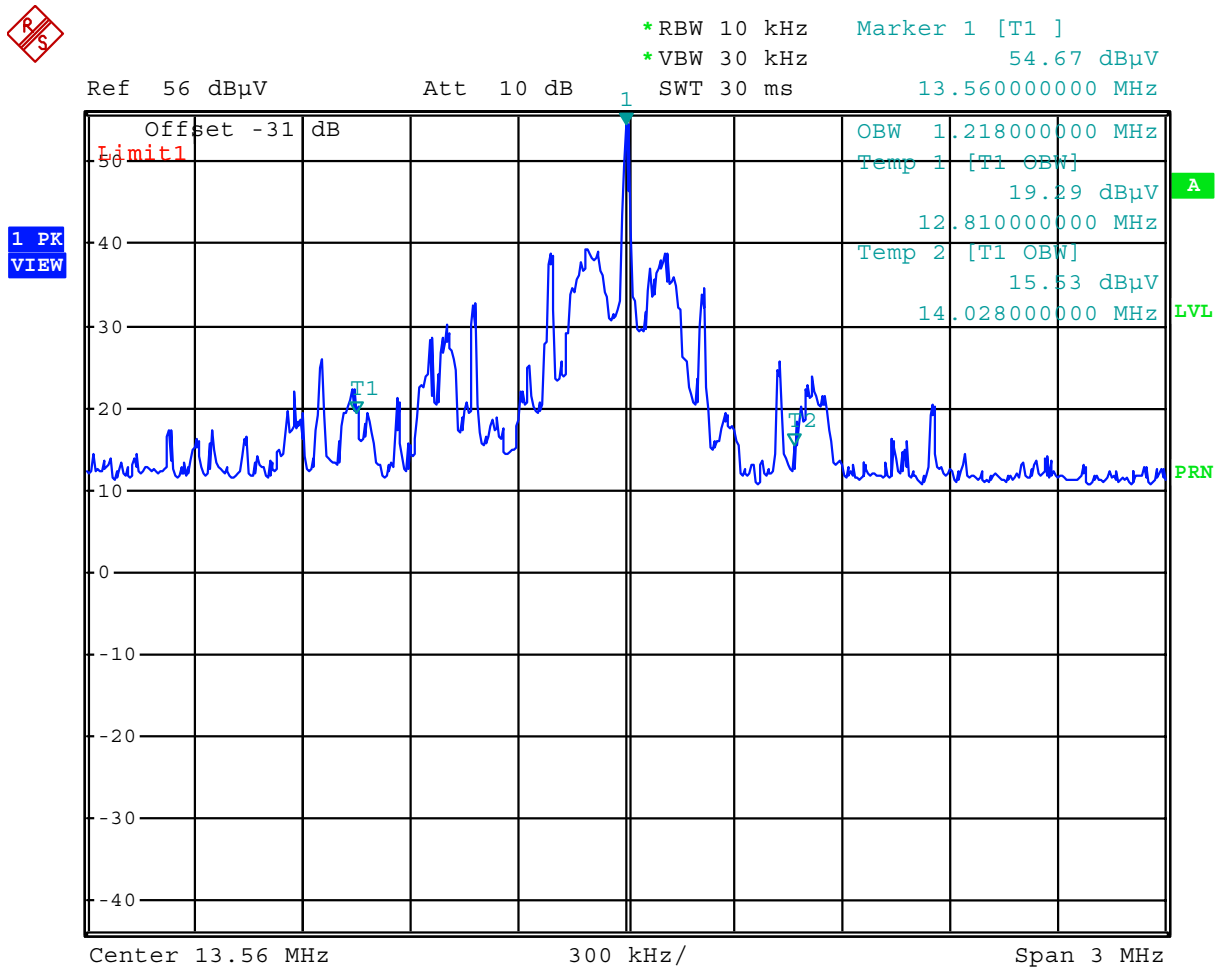

Comment: 060877: Occupied Bandwidth
 Date: 30.NOV.2006 19:25:53

Occupied Bandwidth (99 %): 1.219 MHz

8.2 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.215(c)		
Guide:	ANSI C63.4		
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>		
		Fundamental frequency	Minimum resolution bandwidth
		9 kHz to 30 MHz	1 kHz
		30 MHz to 1000 MHz	10 kHz
		1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.		
Measurement procedure:	Bandwidth Measurements (6.1)		

Comment:	
Date of test:	30 November 2006
Test site:	Fully anechoic room, cabin no. 2




*RBW 1 kHz Delta 2 [T1]
 *VBW 3 kHz -24.76 dB
 SWT 200 ms -2.000000000 kHz

Ref 57.9 dBμV

*Att 0 dB

1 PK
VIEW

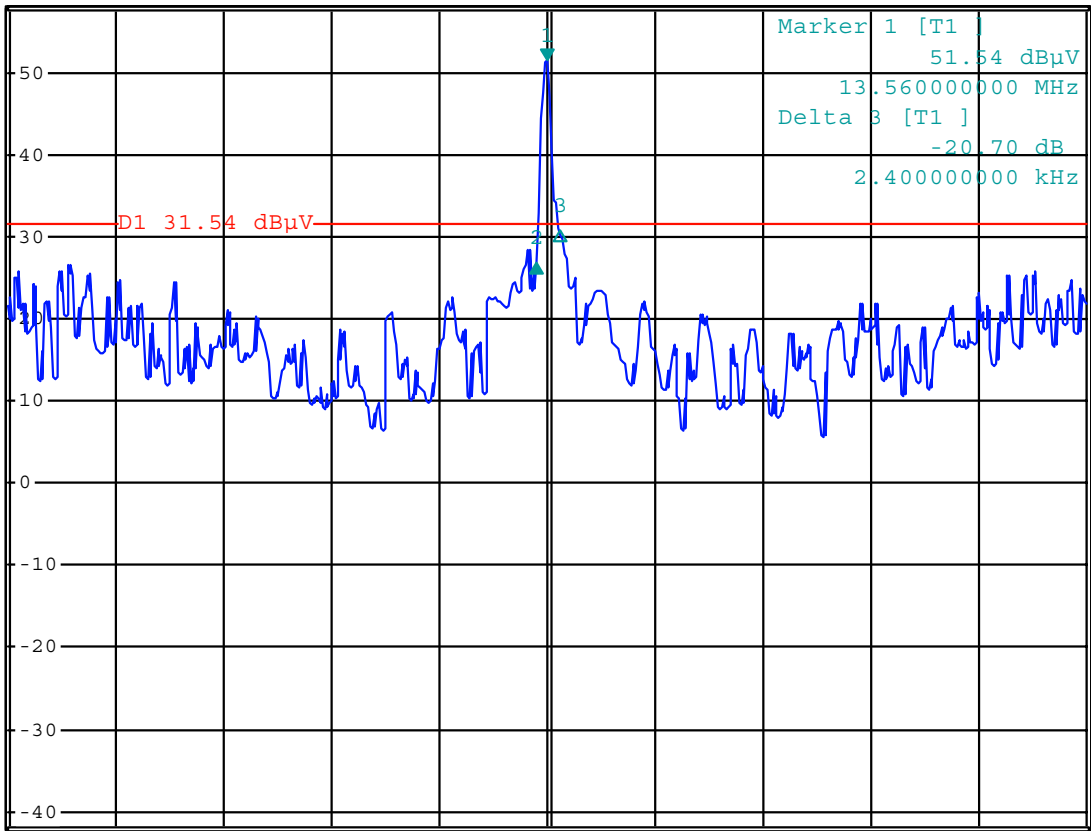

Marker 1 [T1]
 51.54 dBμV
 13.560000000 MHz
 Delta 3 [T1]
 -20.70 dB
 2.400000000 kHz

Center 13.56 MHz

20 kHz/

Span 200 kHz

Comment: feig 060877: EBW -20 dBc
 Date: 30.NOV.2006 19:22:17

Permitted frequency band:	13.553 - 13.567 MHz	
20 dB bandwidth:	4.4 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances:	+0.093 kHz -0.088 kHz	
Bandwidth of the emission:	4.58 kHz	within permitted frequency band ⁷ : <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁷ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 1, sections 3.2(h) and 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------


B_n = Necessary Bandwidth	$B_n = 2BK$
B = Modulation rate	$B = 848 \text{ kHz}$
K = Overall numerical factor	$K = 1$
Calculation:	$B_n = 2 \cdot (848 \text{ kHz}) \cdot 1 = 1696 \text{ kHz}$

Designation of Emissions:	1M70A1D
---------------------------	----------------

8.4 Restricted Bands of Operation

Rules and specifications:	CFR 47 Part 15, section 15.205(a) IC RSS-210 Issue 6, section 2.2(a)
Guide:	ANSI C63.4
Limit:	Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 6, section 2.2(a).
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)

Comment:	
Date of test:	14 December 2006
Test site:	Fully anechoic room, cabin no. 3
Test distance:	8 meters

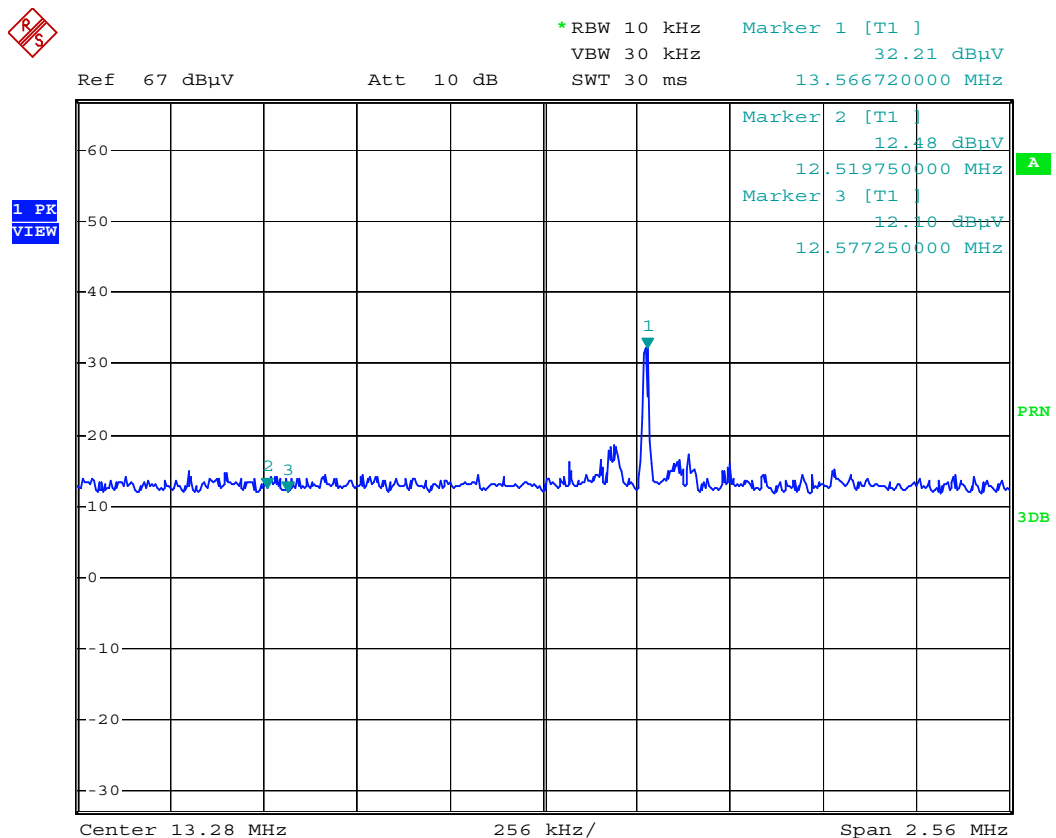

Comment: Feig 060877: Restricted Bands of Operation
 Date: 14.DEC.2006 09:45:26

Test Result:	Test passed
--------------	-------------

8.5 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 1, section 7.2.2		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		

Test Result:	Test passed
--------------	-------------

Mode:	Transmitting continuously without tag
Date of test:	16 October 2006
Test site:	Shielded room, cabin no. 4

Test Result:	Test passed - Carrier excluded
--------------	--------------------------------

Tested on: L1

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.185	Quasi-Peak	35.7	0.0	35.7	64.3	28.6
0.205	Quasi-Peak	54.0	0.0	54.0	63.4	9.4
0.205	Average	41.1	0.0	41.1	53.4	12.3
0.310	Quasi-Peak	43.3	0.0	43.3	60.0	16.7
0.310	Average	36.1	0.0	36.1	50.0	13.9
0.410	Quasi-Peak	35.8	0.0	35.8	57.6	21.8
0.410	Average	29.7	0.0	29.7	47.6	17.9
0.515	Quasi-Peak	38.3	0.0	38.3	56.0	17.7
0.520	Average	36.0	0.0	36.0	46.0	10.0
0.620	Quasi-Peak	39.2	0.0	39.2	56.0	16.8
0.620	Average	35.0	0.0	35.0	46.0	11.0
0.720	Quasi-Peak	36.7	0.0	36.7	56.0	19.3
0.720	Average	31.3	0.0	31.3	46.0	14.7
0.930	Quasi-Peak	36.9	0.0	36.9	56.0	19.1
0.930	Average	35.3	0.0	35.3	46.0	10.7
1.240	Quasi-Peak	37.3	0.0	37.3	56.0	18.7
1.240	Average	34.9	0.0	34.9	46.0	11.1
1.445	Quasi-Peak	37.0	0.0	37.0	56.0	19.0
1.445	Average	29.4	0.0	29.4	46.0	16.6
1.550	Average	33.0	0.0	33.0	46.0	13.0
1.760	Quasi-Peak	34.2	0.0	34.2	56.0	21.8
2.070	Average	31.1	0.0	31.1	46.0	14.9
2.170	Quasi-Peak	34.7	0.0	34.7	56.0	21.3
2.375	Quasi-Peak	33.9	0.0	33.9	56.0	22.1
2.690	Average	28.6	0.0	28.6	46.0	17.4
3.000	Average	26.2	0.0	26.2	46.0	19.8
4.450	Average	28.0	0.0	28.0	46.0	18.0
5.485	Average	31.0	0.0	31.0	50.0	19.0
5.585	Average	27.2	0.0	27.2	50.0	22.8
7.970	Average	32.2	0.0	32.2	50.0	17.8
10.245	Average	30.4	0.0	30.4	50.0	19.6
10.455	Average	32.4	0.0	32.4	50.0	17.6
13.560	Quasi-Peak	72.9	0.0	72.9	60.0	-12.9
13.560	Average	71.3	0.0	71.3	50.0	-21.3
19.460	Average	26.2	0.0	26.2	50.0	23.8
20.080	Average	25.2	0.0	25.2	50.0	24.8
27.120	Quasi-Peak	51.4	0.0	51.4	60.0	8.6
27.120	Average	50.0	0.0	50.0	50.0	0.0

Tested on:	N
------------	---

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.160	Quasi-Peak	39.7	0.0	39.7	65.5	25.8
0.205	Average	45.2	0.0	45.2	53.4	8.2
0.210	Quasi-Peak	49.4	0.0	49.4	63.2	13.8
0.265	Quasi-Peak	29.0	0.0	29.0	61.3	32.3
0.310	Quasi-Peak	42.0	0.0	42.0	60.0	18.0
0.310	Average	40.4	0.0	40.4	50.0	9.6
0.415	Quasi-Peak	43.5	0.0	43.5	57.5	14.0
0.415	Average	42.2	0.0	42.2	47.5	5.3
0.515	Quasi-Peak	41.2	0.0	41.2	56.0	14.8
0.520	Average	40.0	0.0	40.0	46.0	6.0
0.620	Quasi-Peak	43.7	0.0	43.7	56.0	12.3
0.620	Average	42.2	0.0	42.2	46.0	3.8
0.725	Quasi-Peak	42.7	0.0	42.7	56.0	13.3
0.725	Average	40.5	0.0	40.5	46.0	5.5
0.830	Quasi-Peak	43.1	0.0	43.1	56.0	12.9
0.830	Average	41.7	0.0	41.7	46.0	4.3
1.035	Quasi-Peak	42.3	0.0	42.3	56.0	13.7
1.035	Average	41.5	0.0	41.5	46.0	4.5
1.345	Quasi-Peak	42.3	0.0	42.3	56.0	13.7
1.450	Average	40.3	0.0	40.3	46.0	5.7
1.655	Average	40.0	0.0	40.0	46.0	6.0
1.760	Quasi-Peak	41.1	0.0	41.1	56.0	14.9
1.970	Average	39.8	0.0	39.8	46.0	6.2
2.070	Quasi-Peak	40.5	0.0	40.5	56.0	15.5
2.380	Quasi-Peak	39.7	0.0	39.7	56.0	16.3
2.795	Average	33.7	0.0	33.7	46.0	12.3
3.005	Quasi-Peak	34.9	0.0	34.9	56.0	21.1
3.110	Average	30.3	0.0	30.3	46.0	15.7
4.350	Quasi-Peak	39.1	0.0	39.1	56.0	16.9
4.350	Average	34.8	0.0	34.8	46.0	11.2
4.970	Quasi-Peak	40.1	0.0	40.1	56.0	15.9
5.385	Average	36.0	0.0	36.0	50.0	14.0
5.590	Quasi-Peak	38.8	0.0	38.8	60.0	21.2
5.695	Average	34.5	0.0	34.5	50.0	15.5
7.560	Quasi-Peak	41.0	0.0	41.0	60.0	19.0
7.665	Average	36.7	0.0	36.7	50.0	13.3
8.495	Average	36.8	0.0	36.8	50.0	13.2
9.210	Quasi-Peak	34.9	0.0	34.9	60.0	25.1
10.670	Average	34.0	0.0	34.0	50.0	16.0
11.385	Quasi-Peak	33.1	0.0	33.1	60.0	26.9
13.560	Quasi-Peak	73.0	0.0	73.0	60.0	-13.0
13.560	Average	72.0	0.0	72.0	50.0	-22.0
18.025	Average	29.2	0.0	29.2	50.0	20.8
21.135	Average	28.5	0.0	28.5	50.0	21.5
27.120	Quasi-Peak	51.8	0.0	51.8	60.0	8.2
27.120	Average	49.9	0.0	49.9	50.0	0.1

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

Mode:	Transmitting continuously with tag
Date of test:	16 October 2006
Test site:	Shielded room, cabin no. 4

Test Result:	Test passed - Carrier excluded
--------------	--------------------------------

Tested on: L1

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.155	Quasi-Peak	40.4	0.0	40.4	65.7	25.3
0.185	Average	35.0	0.0	35.0	54.3	19.3
0.205	Quasi-Peak	49.0	0.0	49.0	63.4	14.4
0.205	Average	40.4	0.0	40.4	53.4	13.0
0.230	Average	36.7	0.0	36.7	52.4	15.7
0.330	Average	31.4	0.0	31.4	49.5	18.1
0.415	Average	31.6	0.0	31.6	47.5	15.9
0.435	Average	33.2	0.0	33.2	47.2	14.0
0.520	Quasi-Peak	38.3	0.0	38.3	56.0	17.7
0.640	Average	35.3	0.0	35.3	46.0	10.7
0.665	Average	26.0	0.0	26.0	46.0	20.0
0.725	Quasi-Peak	39.7	0.0	39.7	56.0	16.3
0.930	Quasi-Peak	35.7	0.0	35.7	56.0	20.3
0.970	Average	28.9	0.0	28.9	46.0	17.1
1.180	Average	30.0	0.0	30.0	46.0	16.0
1.280	Average	28.2	0.0	28.2	46.0	17.8
1.715	Average	25.4	0.0	25.4	46.0	20.6
2.090	Average	24.2	0.0	24.2	46.0	21.8
9.470	Average	22.5	0.0	22.5	50.0	27.5
10.360	Quasi-Peak	39.9	0.0	39.9	60.0	20.1
10.940	Average	28.1	0.0	28.1	50.0	21.9
11.810	Quasi-Peak	40.8	0.0	40.8	60.0	19.2
13.560	Quasi-Peak	71.9	0.0	71.9	60.0	-11.9
13.560	Average	70.3	0.0	70.3	50.0	-20.3
16.295	Average	28.6	0.0	28.6	50.0	21.4
19.475	Quasi-Peak	37.7	0.0	37.7	60.0	22.3
19.685	Quasi-Peak	39.2	0.0	39.2	60.0	20.8
20.440	Average	24.3	0.0	24.3	50.0	25.7
27.120	Quasi-Peak	50.8	0.0	50.8	60.0	9.2
27.120	Average	47.9	0.0	47.9	50.0	2.1

Tested on:	N
------------	---

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.155	Average	40.8	0.0	40.8	65.7	24.9
0.205	Quasi-Peak	49.8	0.0	49.8	63.4	13.6
0.205	Average	45.1	0.0	45.1	53.4	8.3
0.310	Average	40.5	0.0	40.5	50.0	9.5
0.310	Average	42.1	0.0	42.1	60.0	17.9
0.415	Quasi-Peak	43.7	0.0	43.7	57.5	13.8
0.415	Average	42.7	0.0	42.7	47.5	4.8
0.520	Average	39.8	0.0	39.8	46.0	6.2
0.520	Average	41.6	0.0	41.6	56.0	14.4
0.620	Quasi-Peak	43.9	0.0	43.9	56.0	12.1
0.620	Average	42.7	0.0	42.7	46.0	3.3
0.725	Average	40.2	0.0	40.2	46.0	5.8
0.730	Average	38.7	0.0	38.7	56.0	17.3
0.830	Quasi-Peak	43.4	0.0	43.4	56.0	12.6
0.930	Average	39.1	0.0	39.1	46.0	6.9
1.035	Average	41.8	0.0	41.8	46.0	4.2
1.035	Average	42.4	0.0	42.4	56.0	13.6
1.345	Quasi-Peak	42.3	0.0	42.3	56.0	13.7
1.345	Average	41.3	0.0	41.3	46.0	4.7
1.655	Average	42.0	0.0	42.0	56.0	14.0
1.865	Average	39.6	0.0	39.6	46.0	6.4
1.965	Quasi-Peak	40.6	0.0	40.6	56.0	15.4
1.970	Average	40.2	0.0	40.2	46.0	5.8
2.385	Average	38.7	0.0	38.7	56.0	17.3
2.485	Average	37.2	0.0	37.2	46.0	8.8
3.005	Average	34.9	0.0	34.9	56.0	21.1
3.110	Average	30.7	0.0	30.7	46.0	15.3
4.145	Average	35.0	0.0	35.0	46.0	11.0
4.250	Quasi-Peak	38.3	0.0	38.3	56.0	17.7
4.765	Average	40.8	0.0	40.8	56.0	15.2
5.075	Average	37.1	0.0	37.1	50.0	12.9
5.695	Quasi-Peak	39.6	0.0	39.6	60.0	20.4
5.700	Average	35.1	0.0	35.1	50.0	14.9
7.975	Quasi-Peak	41.4	0.0	41.4	60.0	18.6
8.185	Average	37.5	0.0	37.5	50.0	12.5
8.805	Average	41.1	0.0	41.1	60.0	18.9
8.910	Average	36.5	0.0	36.5	50.0	13.5
10.460	Average	38.8	0.0	38.8	60.0	21.2
11.190	Average	33.5	0.0	33.5	50.0	16.5
13.560	Average	71.5	0.0	71.5	50.0	-21.5
13.560	Average	72.4	0.0	72.4	60.0	-12.4
17.925	Average	29.9	0.0	29.9	50.0	20.1
19.895	Average	28.5	0.0	28.5	50.0	21.5
27.120	Quasi-Peak	50.9	0.0	50.9	60.0	9.1
27.120	Average	49.9	0.0	49.9	50.0	0.1

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

Mode:	Transmitting continuously with termination
Date of test:	16 October 2006
Test site:	Shielded room, cabin no. 4

Test Result:	Test passed
--------------	-------------

Tested on: L1

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.165	Quasi-Peak	36.4	0.0	36.4	65.2	28.8
0.205	Quasi-Peak	52.9	0.0	52.9	63.4	10.5
0.205	Average	41.0	0.0	41.0	53.4	12.4
0.310	Quasi-Peak	42.6	0.0	42.6	60.0	17.4
0.310	Average	36.3	0.0	36.3	50.0	13.7
0.415	Average	32.4	0.0	32.4	47.5	15.1
0.515	Quasi-Peak	38.2	0.0	38.2	56.0	17.8
0.520	Average	34.3	0.0	34.3	46.0	11.7
0.620	Quasi-Peak	39.2	0.0	39.2	56.0	16.8
0.620	Average	35.7	0.0	35.7	46.0	10.3
0.725	Quasi-Peak	37.9	0.0	37.9	56.0	18.1
0.725	Average	33.0	0.0	33.0	46.0	13.0
0.930	Quasi-Peak	36.7	0.0	36.7	56.0	19.3
0.930	Average	34.1	0.0	34.1	46.0	11.9
1.240	Quasi-Peak	36.8	0.0	36.8	56.0	19.2
1.240	Average	33.3	0.0	33.3	46.0	12.7
1.345	Quasi-Peak	34.7	0.0	34.7	56.0	21.3
1.450	Average	31.3	0.0	31.3	46.0	14.7
1.550	Quasi-Peak	35.6	0.0	35.6	56.0	20.4
1.550	Average	31.7	0.0	31.7	46.0	14.3
2.175	Average	28.9	0.0	28.9	46.0	17.1
2.275	Quasi-Peak	33.1	0.0	33.1	56.0	22.9
2.485	Average	26.9	0.0	26.9	46.0	19.1
4.345	Average	26.5	0.0	26.5	46.0	19.5
4.965	Average	27.9	0.0	27.9	46.0	18.1
5.585	Average	25.2	0.0	25.2	50.0	24.8
8.175	Average	31.2	0.0	31.2	50.0	18.8
9.935	Average	31.4	0.0	31.4	50.0	18.6
10.240	Quasi-Peak	38.6	0.0	38.6	60.0	21.4
10.755	Quasi-Peak	37.0	0.0	37.0	60.0	23.0
10.765	Average	33.2	0.0	33.2	50.0	16.8
13.020	Quasi-Peak	34.8	0.0	34.8	60.0	25.2
13.240	Average	21.7	0.0	21.7	50.0	28.3
18.735	Average	29.6	0.0	29.6	50.0	20.4
20.065	Quasi-Peak	34.4	0.0	34.4	60.0	25.6
21.005	Average	22.9	0.0	22.9	50.0	27.1
27.120	Quasi-Peak	52.8	0.0	52.8	60.0	7.2
27.120	Average	49.3	0.0	49.3	50.0	0.7

Tested on:	N
------------	---

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.205	Quasi-Peak	50.7	0.0	50.7	63.4	12.7
0.205	Average	45.3	0.0	45.3	53.4	8.1
0.310	Quasi-Peak	42.3	0.0	42.3	60.0	17.7
0.310	Average	40.3	0.0	40.3	50.0	9.7
0.415	Quasi-Peak	43.1	0.0	43.1	57.5	14.4
0.415	Average	41.7	0.0	41.7	47.5	5.8
0.520	Quasi-Peak	42.0	0.0	42.0	56.0	14.0
0.520	Average	40.0	0.0	40.0	46.0	6.0
0.620	Quasi-Peak	43.4	0.0	43.4	56.0	12.6
0.620	Average	41.4	0.0	41.4	46.0	4.6
0.725	Average	40.6	0.0	40.6	46.0	5.4
0.730	Quasi-Peak	38.7	0.0	38.7	56.0	17.3
0.825	Average	38.5	0.0	38.5	46.0	7.5
0.830	Quasi-Peak	42.6	0.0	42.6	56.0	13.4
1.035	Quasi-Peak	41.9	0.0	41.9	56.0	14.1
1.035	Average	41.3	0.0	41.3	46.0	4.7
1.345	Quasi-Peak	41.9	0.0	41.9	56.0	14.1
1.345	Average	40.9	0.0	40.9	46.0	5.1
1.655	Average	40.1	0.0	40.1	46.0	5.9
1.660	Quasi-Peak	40.2	0.0	40.2	56.0	15.8
1.965	Average	38.3	0.0	38.3	46.0	7.7
2.275	Quasi-Peak	39.7	0.0	39.7	56.0	16.3
2.380	Average	35.8	0.0	35.8	46.0	10.2
2.795	Quasi-Peak	37.5	0.0	37.5	56.0	18.5
3.000	Quasi-Peak	34.7	0.0	34.7	56.0	21.3
3.005	Average	29.0	0.0	29.0	46.0	17.0
4.450	Quasi-Peak	38.8	0.0	38.8	56.0	17.2
4.450	Average	33.1	0.0	33.1	46.0	12.9
4.760	Quasi-Peak	39.0	0.0	39.0	56.0	17.0
5.280	Average	35.3	0.0	35.3	50.0	14.7
6.005	Quasi-Peak	39.4	0.0	39.4	60.0	20.6
6.005	Average	33.6	0.0	33.6	50.0	16.4
8.075	Quasi-Peak	40.9	0.0	40.9	60.0	19.1
8.180	Average	35.8	0.0	35.8	50.0	14.2
8.490	Quasi-Peak	41.0	0.0	41.0	60.0	19.0
8.490	Average	34.6	0.0	34.6	50.0	15.4
11.080	Average	31.5	0.0	31.5	50.0	18.5
13.560	Quasi-Peak	40.6	0.0	40.6	60.0	19.4
13.560	Average	37.4	0.0	37.4	50.0	12.6
16.570	Average	28.1	0.0	28.1	50.0	21.9
20.610	Average	27.4	0.0	27.4	50.0	22.6
27.120	Quasi-Peak	51.6	0.0	51.6	60.0	8.4
27.120	Average	49.9	0.0	49.9	50.0	0.1

Sample calculation of final values:



$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

8.6 Spectrum Mask

Rules and specifications:	CFR 47 Part 15, section 15.225(a)-(d) IC RSS-210 Issue 6, section A2.6			
Guide:	ANSI C63.4			
Description:	Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	
Date of test:	30 November 2006
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters
Extrapolation Factor:	40 dB/decade

Test Result:	Test passed
--------------	-------------

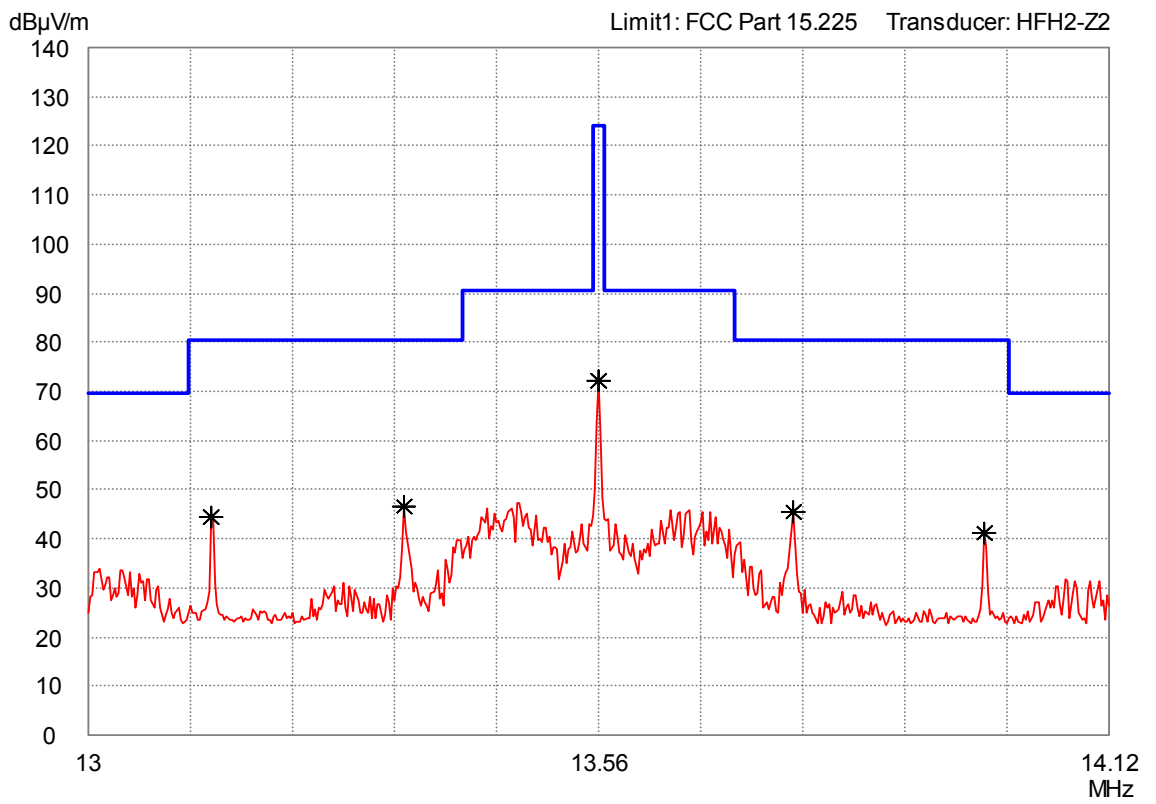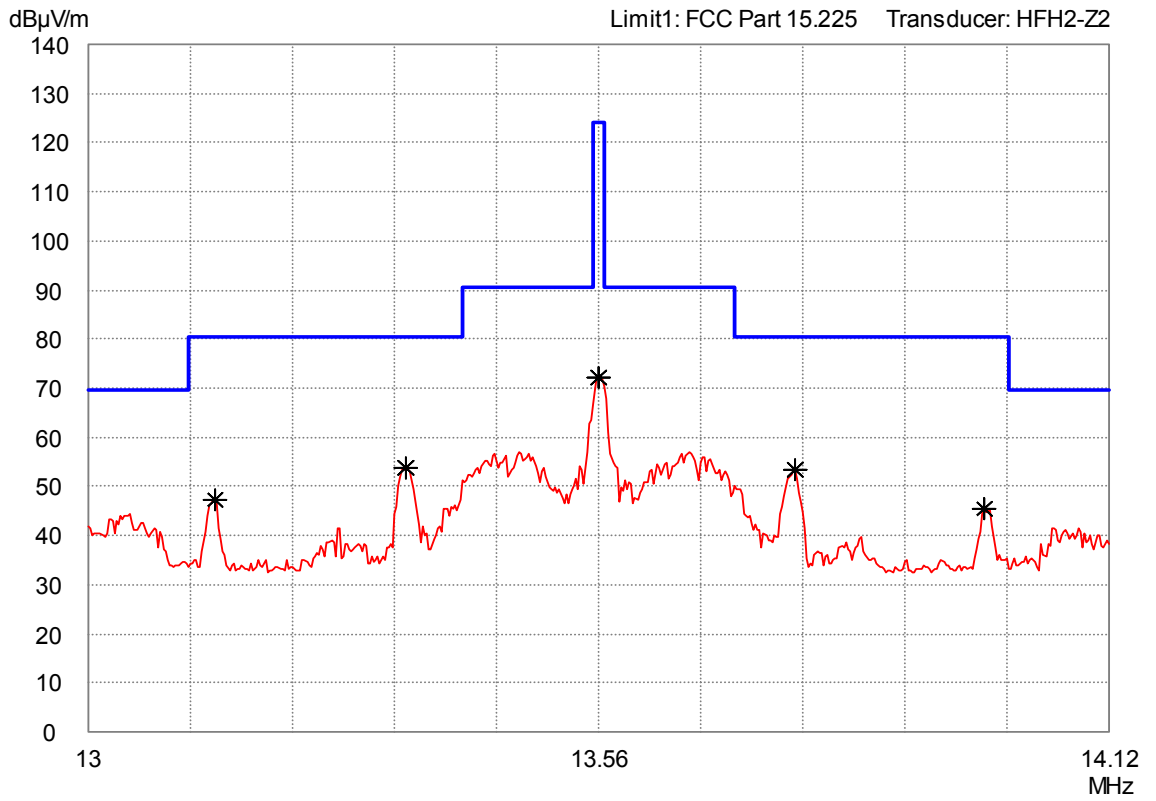

8.7 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.225(a)-(d) IC RSS-210 Issue 6, sections 2.2(b)(c), 2.6 and A2.6			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance d (meters)
	0.009 - 0.490	$2400/F(\text{kHz})$	$67.6 - 20 \cdot \log(F(\text{kHz}))$	300
	0.490 - 1.705	$24000/F(\text{kHz})$	$87.6 - 20 \cdot \log(F(\text{kHz}))$	30
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Test Result:	Test passed
--------------	-------------

Comment:	
Mode:	Transmitting continuously without tag
Date of test:	6 December 2006
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d1 (m)	d (m)							
13.56000	Quasi-Peak	10	30	48.4	20.0	-19.1		49.3	84.0	34.7

Sample calculation of final values:

$$\text{Extrapolation Factor (dB)} = (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\text{Final Value (dBµV/m)} = \text{Reading Value } d_1 \text{ (dBµV)} + \text{Correction Factor (dB/m)} + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}$$

Note: Extrapolation factor (dB) and final value (dBµV/m) are relating to distance d.

Comment:	
Mode:	Reading tag continuously
Date of test:	6 December 2006
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d1 (m)	d (m)							
13.56000	Quasi-Peak	10	30	47.4	20.0	-19.1		48.3	84.0	35.7

Sample calculation of final values:

$$\begin{aligned} \text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dBµV/m)} &= \text{Reading Value } d_1 \text{ (dBµV)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)} \end{aligned}$$

Note: Extrapolation factor (dB) and final value (dBµV/m) are relating to distance d.

8.8 Radiated Emission Measurement 30 MHz to 1 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 6, sections 2.2(b)(c), 2.6 and A2.6		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Open Field Test Site (6.5)		

Comment:	Test was performed as worst case of the prescans.
Mode:	Reading tag continuously
Date of test:	6 December 2006
Test site:	Frequencies \leq 1 GHz: Open field test site Frequencies $>$ 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
40.670	vertical	Quasi-Peak	17.5	11.8		29.3	40.0	10.7
40.680	horizontal	Quasi-Peak	21.4	11.8		33.2	40.0	6.8
67.800	horizontal	Quasi-Peak	19.7	9.6		29.3	40.0	10.7
81.360	horizontal	Quasi-Peak	27.5	9.5		37.0	40.0	3.0
94.900	vertical	Quasi-Peak	28.2	10.3		38.5	43.5	5.0
94.920	horizontal	Quasi-Peak	31.6	10.3		41.9	43.5	1.6
122.030	horizontal	Quasi-Peak	29.2	12.8		42.0	43.5	1.5
162.700	vertical	Quasi-Peak	6.0	14.6		20.6	43.5	22.9
165.480	horizontal	Quasi-Peak	6.3	14.7		21.0	43.5	22.5
239.660	horizontal	Quasi-Peak	20.7	17.3		38.0	46.0	8.0
241.750	horizontal	Quasi-Peak	21.5	17.4		38.9	46.0	7.1
241.770	vertical	Quasi-Peak	13.4	17.4		30.8	46.0	15.2
243.140	horizontal	Quasi-Peak	21.1	17.5		38.6	46.0	7.4
284.760	horizontal	Quasi-Peak	16.5	21.0		37.5	46.0	8.5
338.990	vertical	Quasi-Peak	14.5	17.1		31.6	46.0	14.4
397.880	horizontal	Quasi-Peak	22.0	18.4		40.4	46.0	5.6
399.420	horizontal	Quasi-Peak	23.3	18.5		41.8	46.0	4.2
399.670	horizontal	Quasi-Peak	24.0	18.5		42.5	46.0	3.5
399.890	horizontal	Quasi-Peak	19.9	18.5		38.4	46.0	7.6

Sample calculation of final values:


$$\text{Final Value (dBµV/m)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

8.9 Carrier Frequency Stability

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 1, section 4.5 and IC RSS-210 Issue 6, section A2.6
Guide:	ANSI C63.4
Limit:	The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (± 100 ppm) of the carrier frequency under nominal conditions.
Temperature range:	-20°C to +50°C (at normal supply voltage)
Voltage range:	85% to 115% of the rated supply voltage (at a temperature of +20°C)
Measurement procedure:	Carrier Frequency Stability (6.6)

Comment:	
Date of test:	7 December 2006

8.9.1 Carrier Frequency Stability vs. Temperature

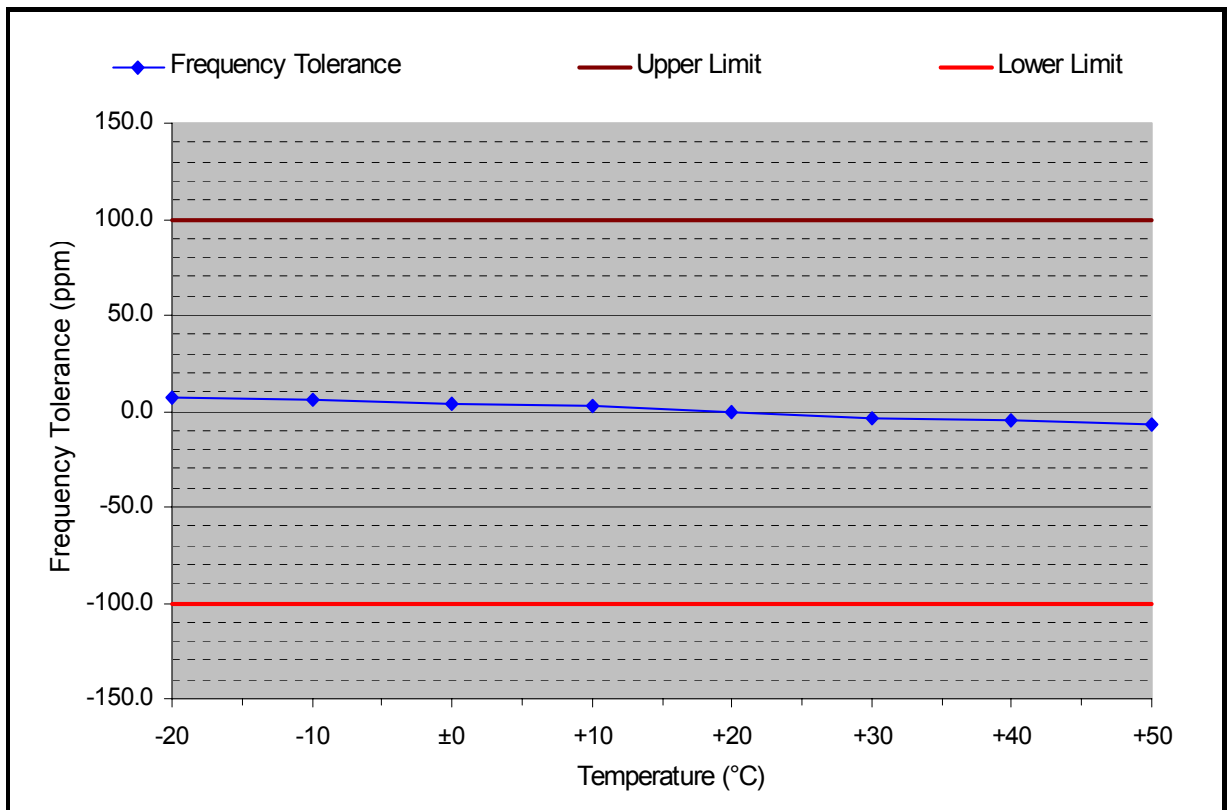


Supply voltage: 5 V Nominal frequency: 13.559958 MHz

Temperature (°C)	Frequency (MHz)	Frequency (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
-20	13.560051	93	6.9	+100.0	-100.0	93.1
-10	13.560037	79	5.8	+100.0	-100.0	94.2
±0	13.560009	51	3.8	+100.0	-100.0	96.2
+10	13.559993	35	2.6	+100.0	-100.0	97.4
+20	13.559958	0	0.0	+100.0	-100.0	100.0
+30	13.559903	-55	-4.1	+100.0	-100.0	95.9
+40	13.559891	-67	-4.9	+100.0	-100.0	95.1
+50	13.559870	-88	-6.5	+100.0	-100.0	93.5

Test Result: Test passed

8.9.2 Carrier Frequency Stability vs. Supply Voltage

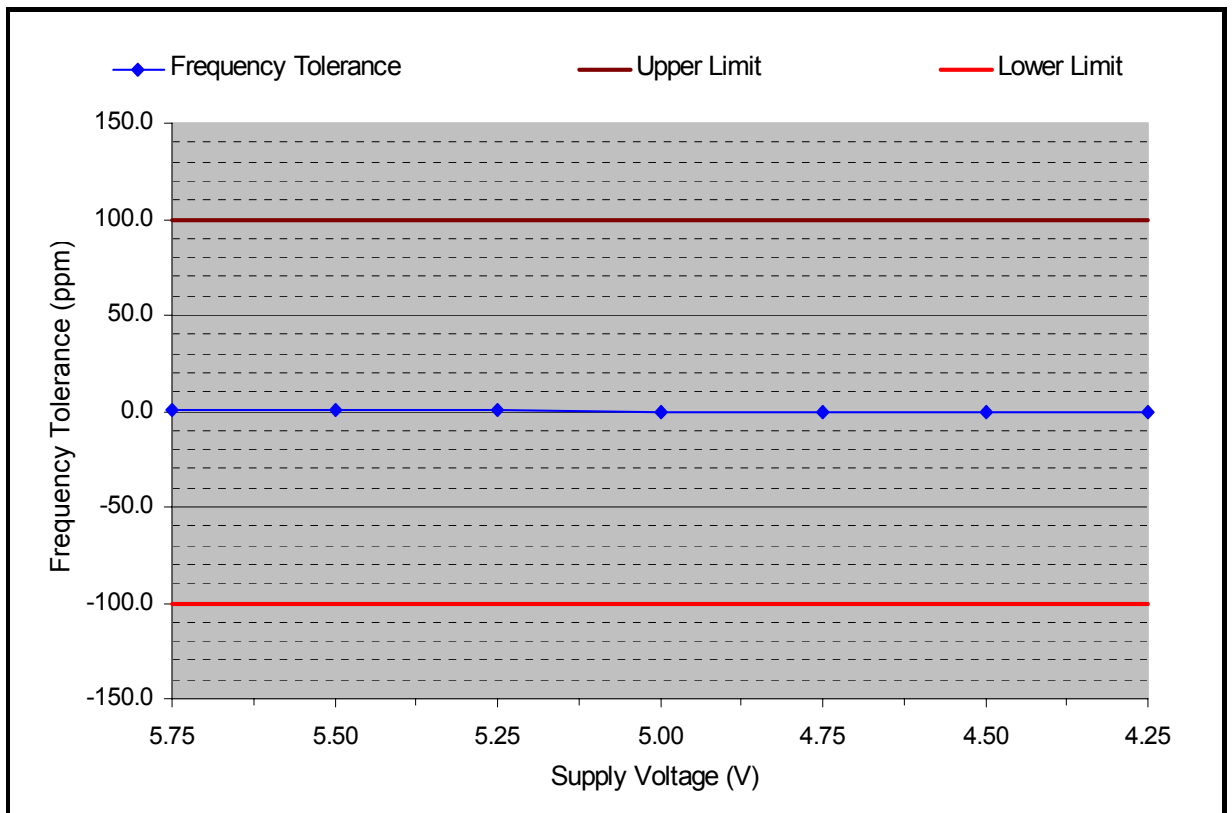

Temperature: +20 °C Battery End Point: Not applicable
 Nominal frequency: 13.559958 MHz

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
5.75	13.559964	6	0.4	+100.0	-100.0	99.6
5.50	13.559961	3	0.2	+100.0	-100.0	99.8
5.25	13.559959	1	0.1	+100.0	-100.0	99.9
5.00	13.559958	0	0.0	+100.0	-100.0	100.0
4.75	13.559956	-2	-0.1	+100.0	-100.0	99.9
4.50	13.559955	-3	-0.2	+100.0	-100.0	99.8
4.25	13.559955	-3	-0.2	+100.0	-100.0	99.8

Test Result: Test passed

8.10 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 1, section 5.5
Guide:	IC RSS-102 Issue 2, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
<input type="checkbox"/> detachable				
The conducted output power (CP in watts) is measured at the antenna connector: $CP = \dots\dots\dots \text{ W}$ The effective isotropic radiated power (EIRP in watts) is calculated using <input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$ $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \text{ W}$ <input type="checkbox"/> the field strength ⁸ in V/m: $FS = \dots\dots\dots \text{ V/m}$ $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \text{ W}$ with: Distance between the antennas in m: $D = \dots\dots\dots \text{ m}$		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/> not detachable				
A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by ⁸ : $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \mathbf{18.31 \mu W}$ with: Field strength in V/m: $FS = \mathbf{67.3 \text{ dB}\mu\text{V/m}}$ $= \mathbf{2.344 \text{ mV/m}}$ Distance between the two antennas in m: $D = \mathbf{10 \text{ m}}$			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Selection of output power				
The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.): $TP = \mathbf{18.31 \mu W}$				

⁸ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
Separation distance between the user and the transmitting device is				
<input type="checkbox"/> less than or equal to 20 cm <input checked="" type="checkbox"/> greater than 20 cm		<input checked="" type="checkbox"/>		
Transmitting device is				
<input type="checkbox"/> in the vicinity of the human head <input type="checkbox"/> body-worn		<input checked="" type="checkbox"/>		
SAR evaluation				
SAR evaluation is required if the separation distance between the user and the device is less than or equal to 20 cm.				
<input type="checkbox"/> The device operates from 3 kHz up to 1 GHz inclusively and its source-based time-averaged output power is less than, or equal to 200 mW for General Public Use and 1000 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> The device operates above 1 GHz up to 2.2 GHz inclusively and its source-based time-averaged output power is less than, or equal to 100 mW for General Public Use and 500 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> The device operates above 2.2 GHz up to 3 GHz inclusively and its source-based time-averaged output power is less than, or equal to 20 mW for General Public Use and 100 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> The device operates above 3 GHz up to 6 GHz inclusively and its source-based time-averaged output power) is less than, or equal to 10 mW for General Public Use and 50 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> SAR evaluation is documented in test report no.				
RF exposure evaluation				
RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm.				
<input checked="" type="checkbox"/> The device operates below 1.5 GHz and its e.i.r.p. is equal to or less than 2.5 W.				<input checked="" type="checkbox"/>
<input type="checkbox"/> The device operates at or above 1.5 GHz and the e.i.r.p. of the device is equal to or less than 5 W.				<input type="checkbox"/>
<input type="checkbox"/> RF exposure evaluation is documented in test report no.				

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 10, 2004
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	September 19, 2005
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 1 containing General Requirements and Information for the Certification of Radiocommunication Equipmment, published by Industry Canada	September 2005
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 6 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	September 2005
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 1 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	September 2005
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 2: Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)	November 2005
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
<input type="checkbox"/>	CAN/CSA-CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
<input checked="" type="checkbox"/>	TRC-43	Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October 9, 1982

10 Charts taken during testing

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
ID CPR.04

Serial no.:

Applicant:
FEIG ELECTRONIC GmbH

Test site:
Shielded room, cabin no. 4

Tested on:
Linecord AC 115 V power supply
Phase L1


Date of test: 10/16/2006
Operator: M. Steindl

Test performed: semi automatically
File name:

Mode:
- with DELL laptop
- transmitting continuously without tag

Detector:
Peak / Final Results: QP

Final results:
Selected by hand

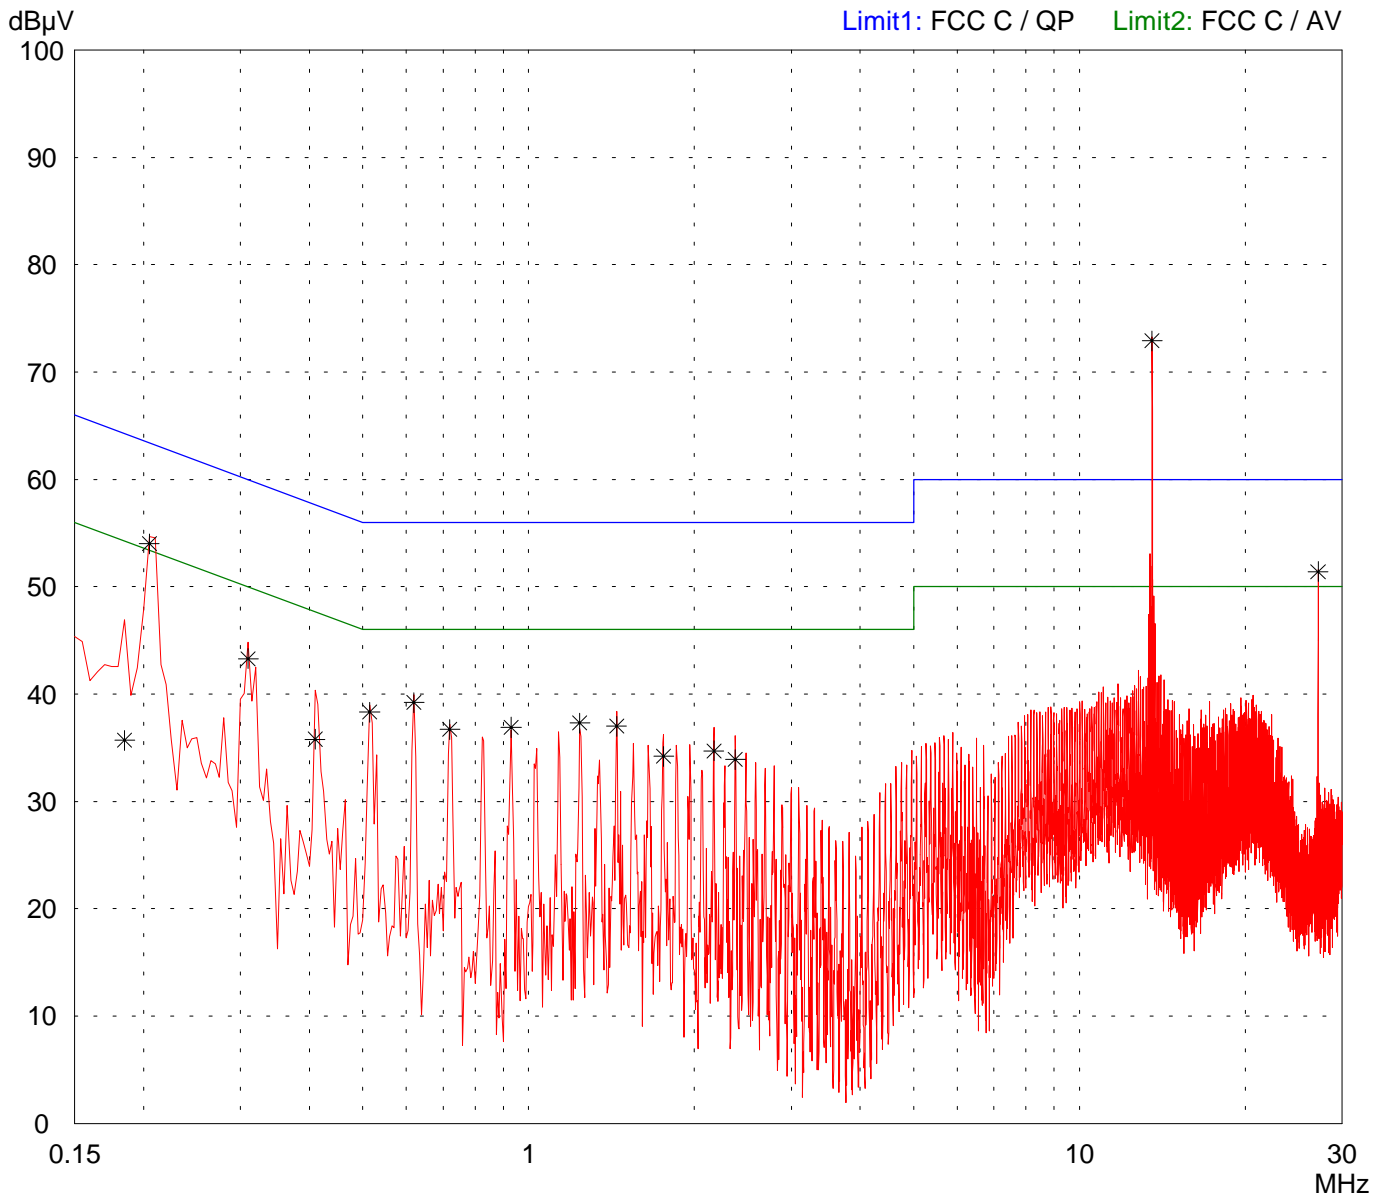

Result:
Limit kept - Carrier excluded

Project file:
50602-060877

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C


Model: ID CPR.04	
Serial no.: ---	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord AC 115 V power supply Phase L1	
Date of test: 10/16/2006	Operator: M. Steindl
Test performed: automatically	File name:

Mode:
- with DELL laptop

- transmitting continuously without tag

Detector:
Average / Final Results: AV

Final results:
20 dB Margin **25 Subranges**

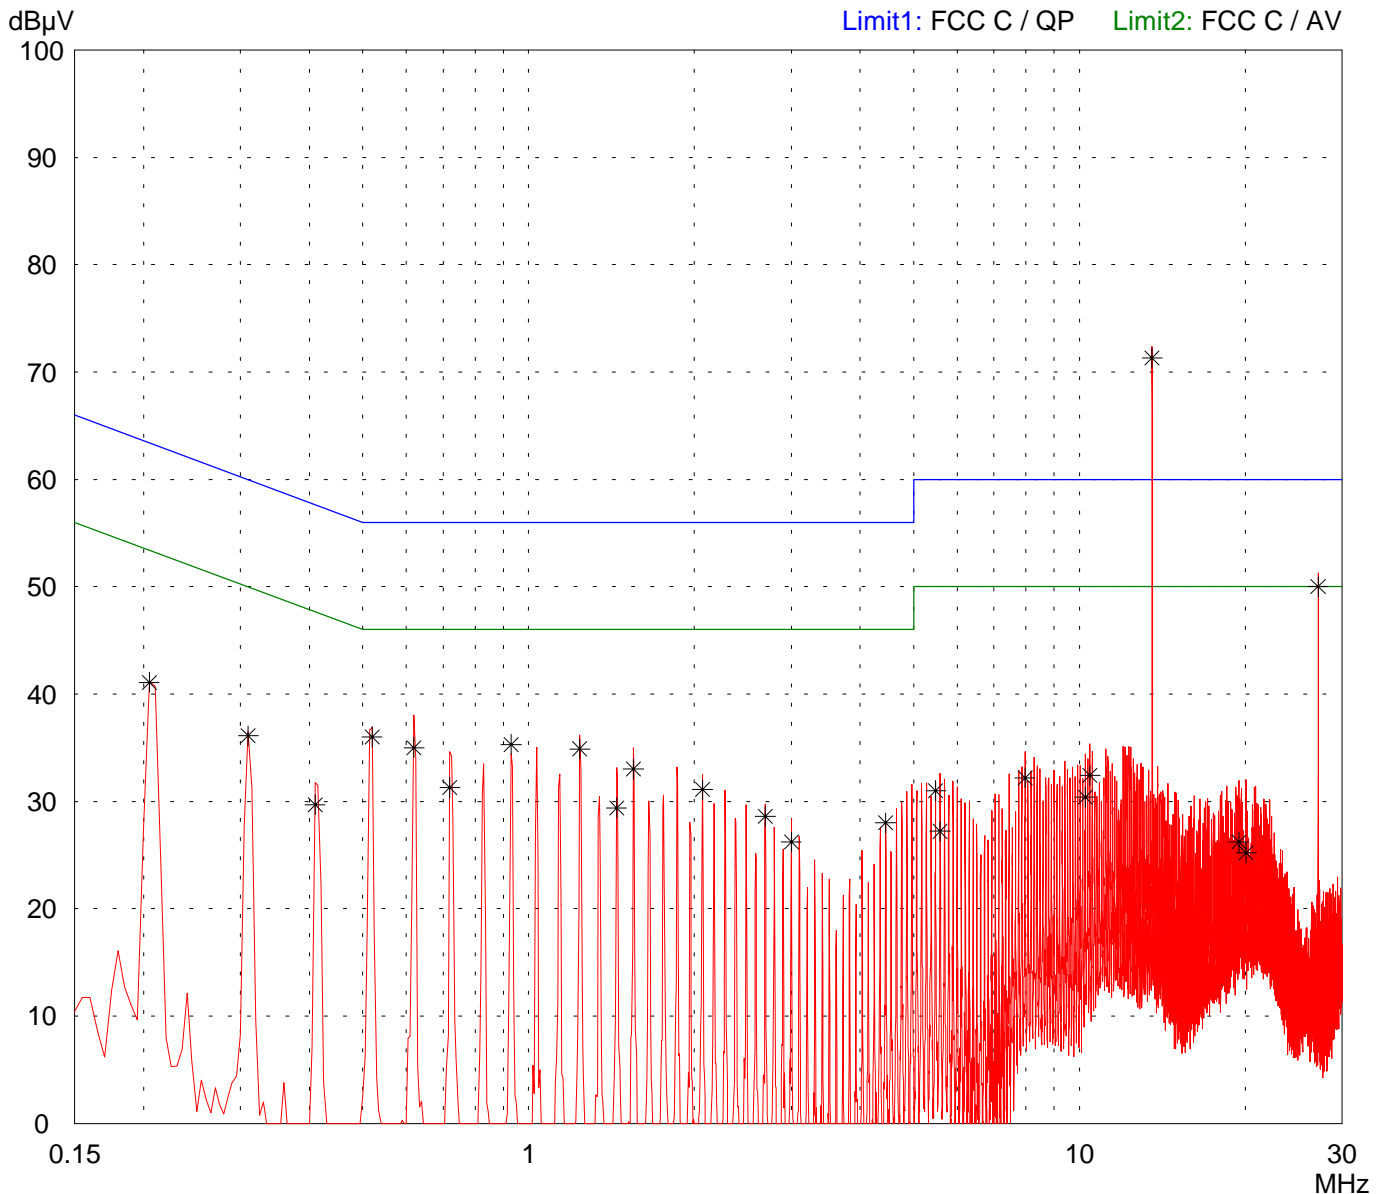

Result:
Limit kept - Carrier excluded

Project file:
50602-060877

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
ID CPR.04

Serial no.:

Applicant:
FEIG ELECTRONIC GmbH

Test site:
Shielded room, cabin no. 4

Tested on:
**Linecord AC 115 V power supply
Phase N**


Date of test: **10/16/2006** Operator: **M. Steindl**

Test performed: **semi automatically** File name:

Mode:
- with DELL laptop
- transmitting continuously without tag

Detector:
Peak / Final Results: QP

Final results:
20 dB Margin **25 Subranges**

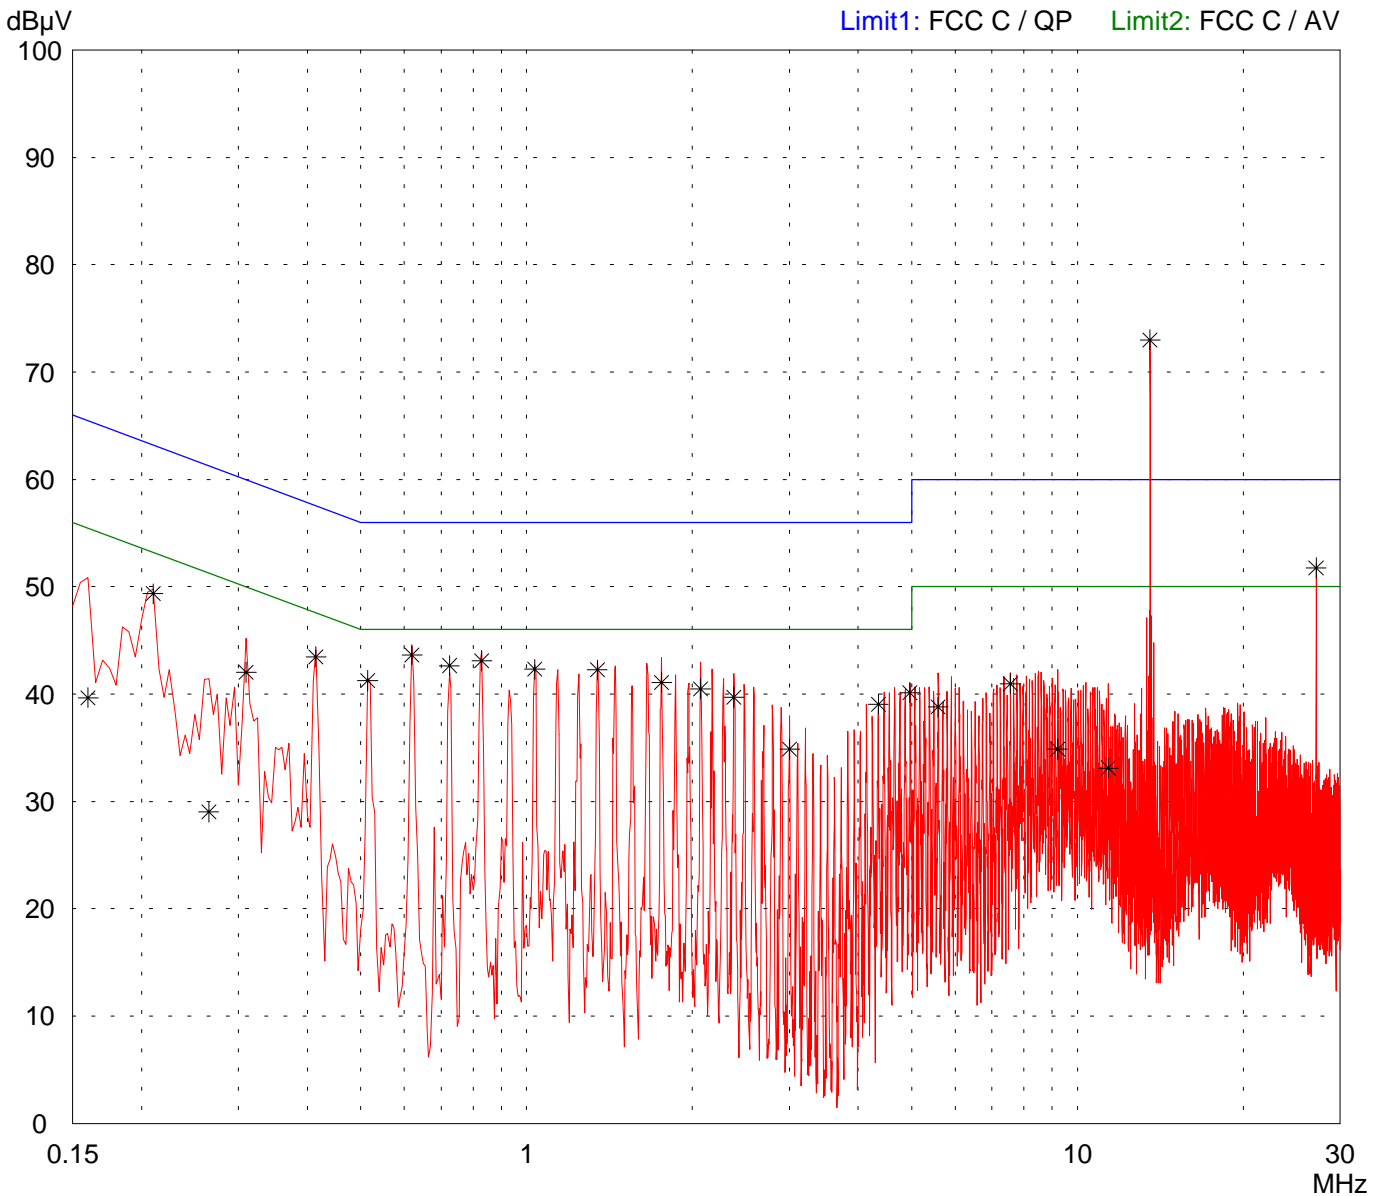

Result:
Limit kept - Carrier excluded

Project file:
50602-060877


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: ID CPR.04	
Serial no.: ---	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord AC 115 V power supply Phase N	
Date of test: 10/16/2006	Operator: M. Steindl
Test performed: automatically	File name:

Mode: - with DELL laptop - transmitting continuously without tag	
--	--

Detector: Average / Final Results: AV	
--	--

Final results: 20 dB Margin	25 Subranges
--------------------------------	--------------

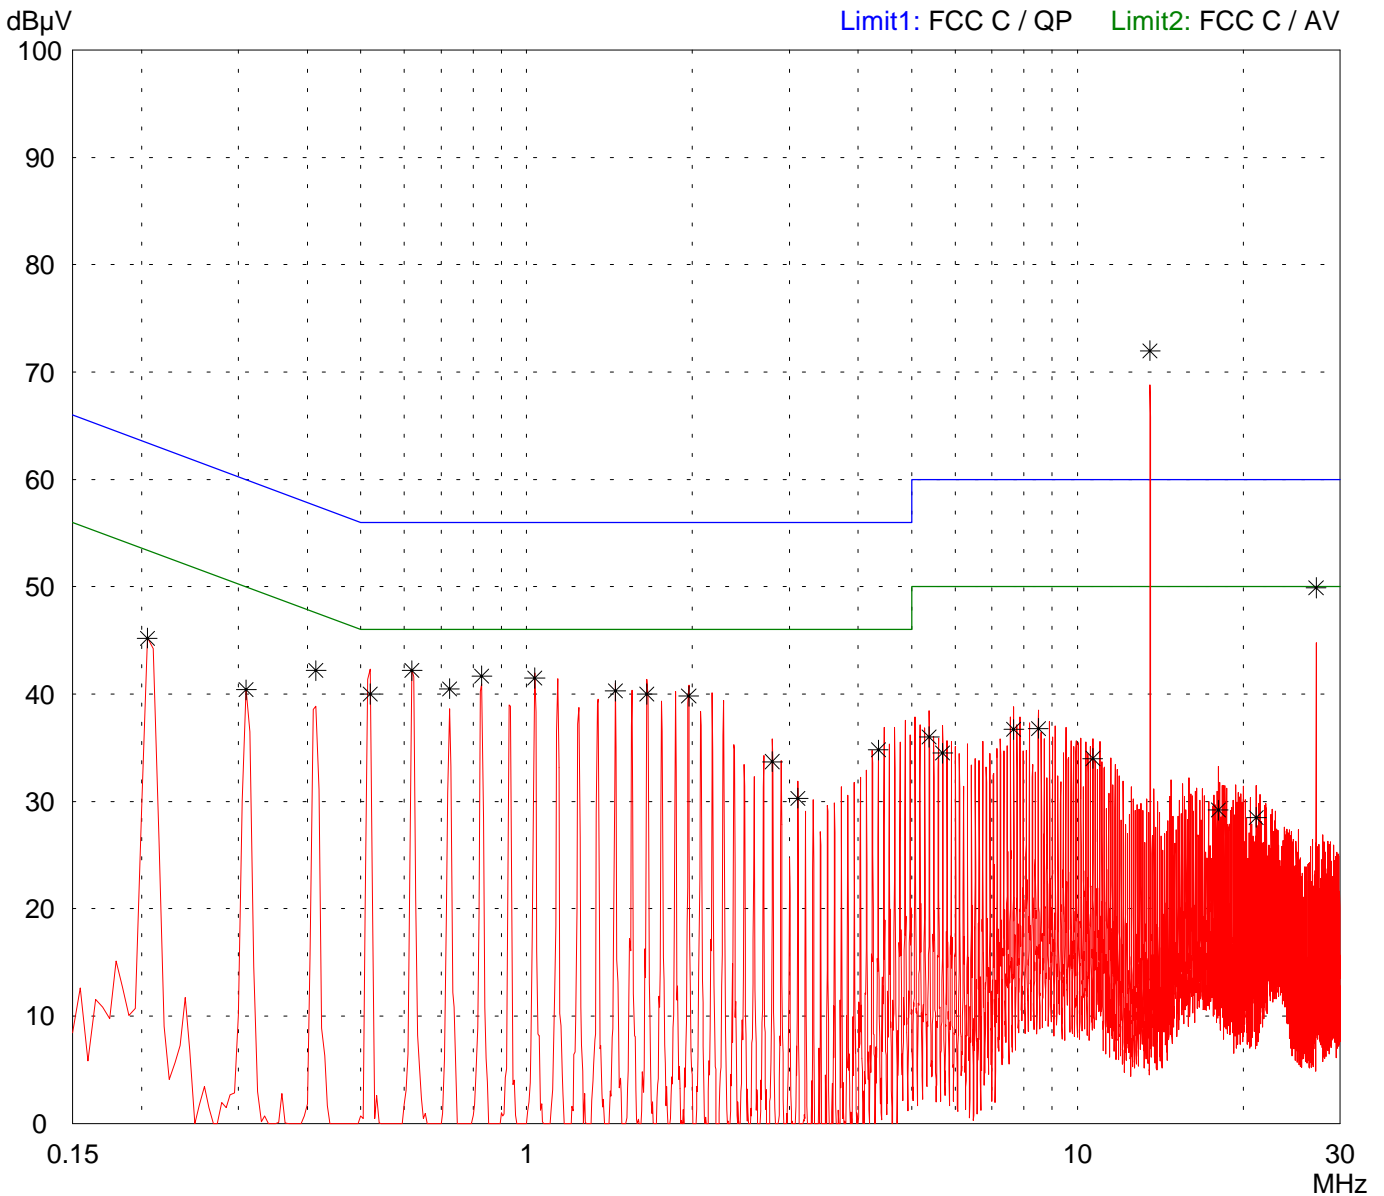

Result: Limit kept - Carrier excluded
--

Project file: 50602-060877


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: ID CPR.04	
Serial no.: ---	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord AC 115 V power supply Phase L1	
Date of test: 10/16/2006	Operator: M. Steindl
Test performed: semi automatically	File name:

Mode: - with DELL laptop - reading tag continuously	
---	--

Detector: Peak / Final Results: QP

Final results: 20 dB Margin	25 Subranges
--------------------------------	--------------

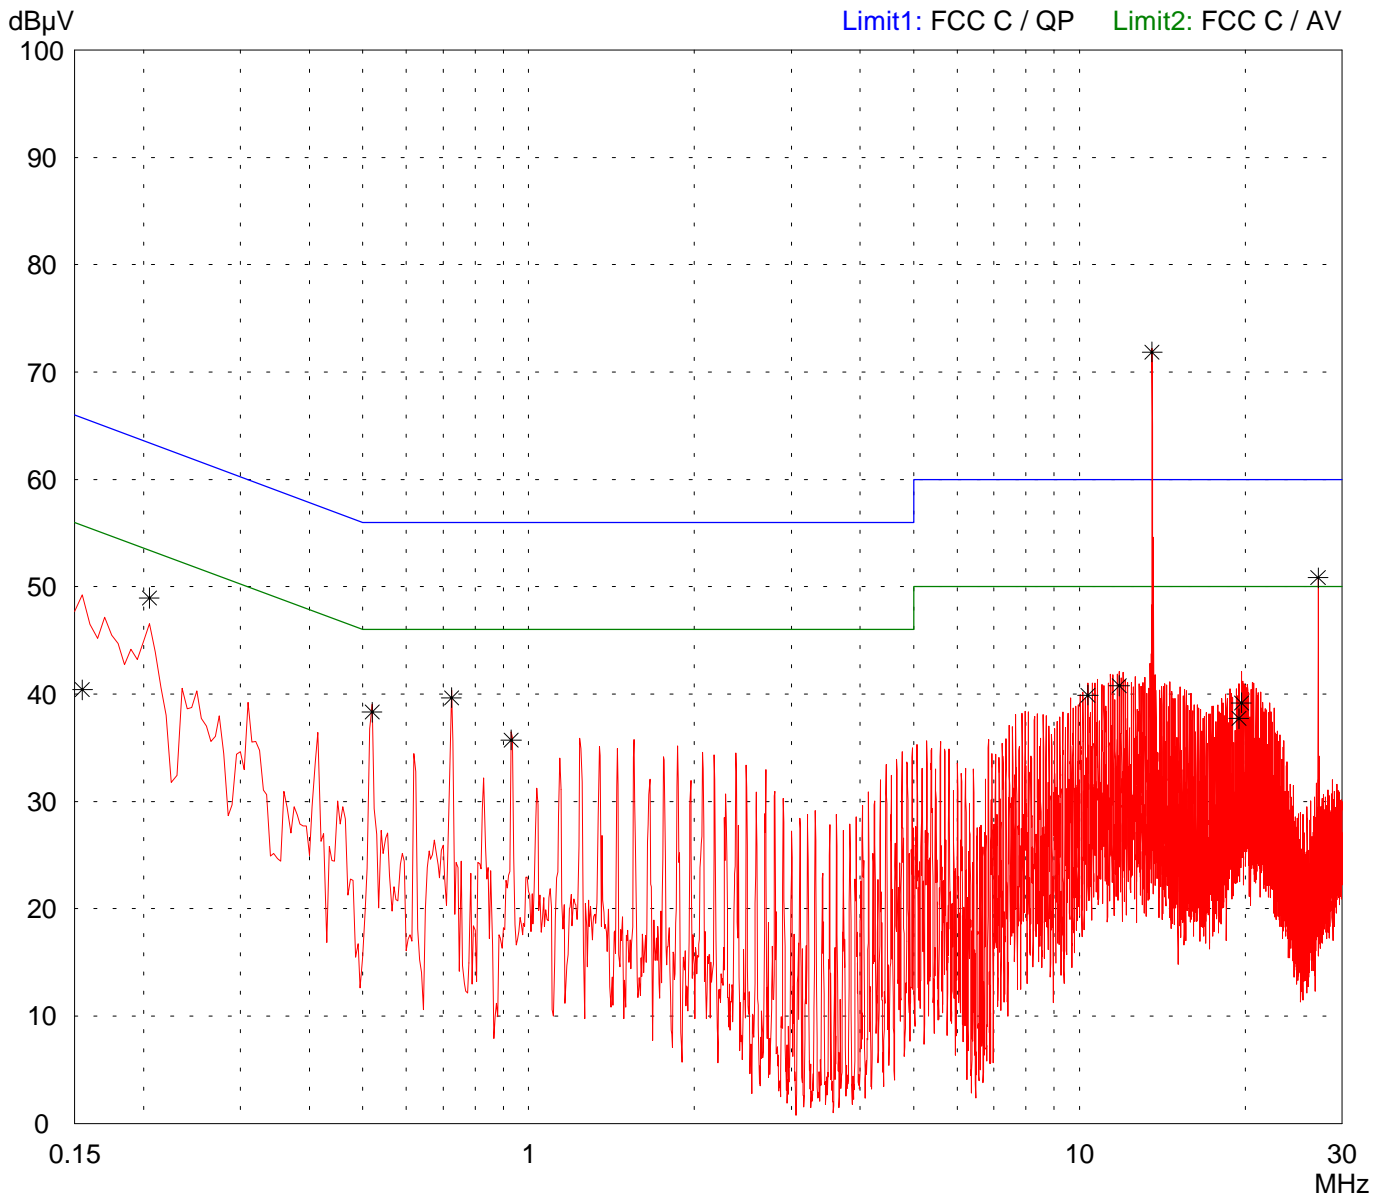

Result: Limit kept - Carrier excluded
--

Project file: 50602-060877


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: ID CPR.04	
Serial no.: ---	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord Phase L1	
Date of test: 10/16/2006	Operator: M. Steindl
Test performed: semi automatically	File name:

Mode: - with DELL laptop - reating tag continuously	
---	--

Detector: Average / Final Results: AV	
---	--

Final results: 20 dB Margin	25 Subranges
---------------------------------------	---------------------

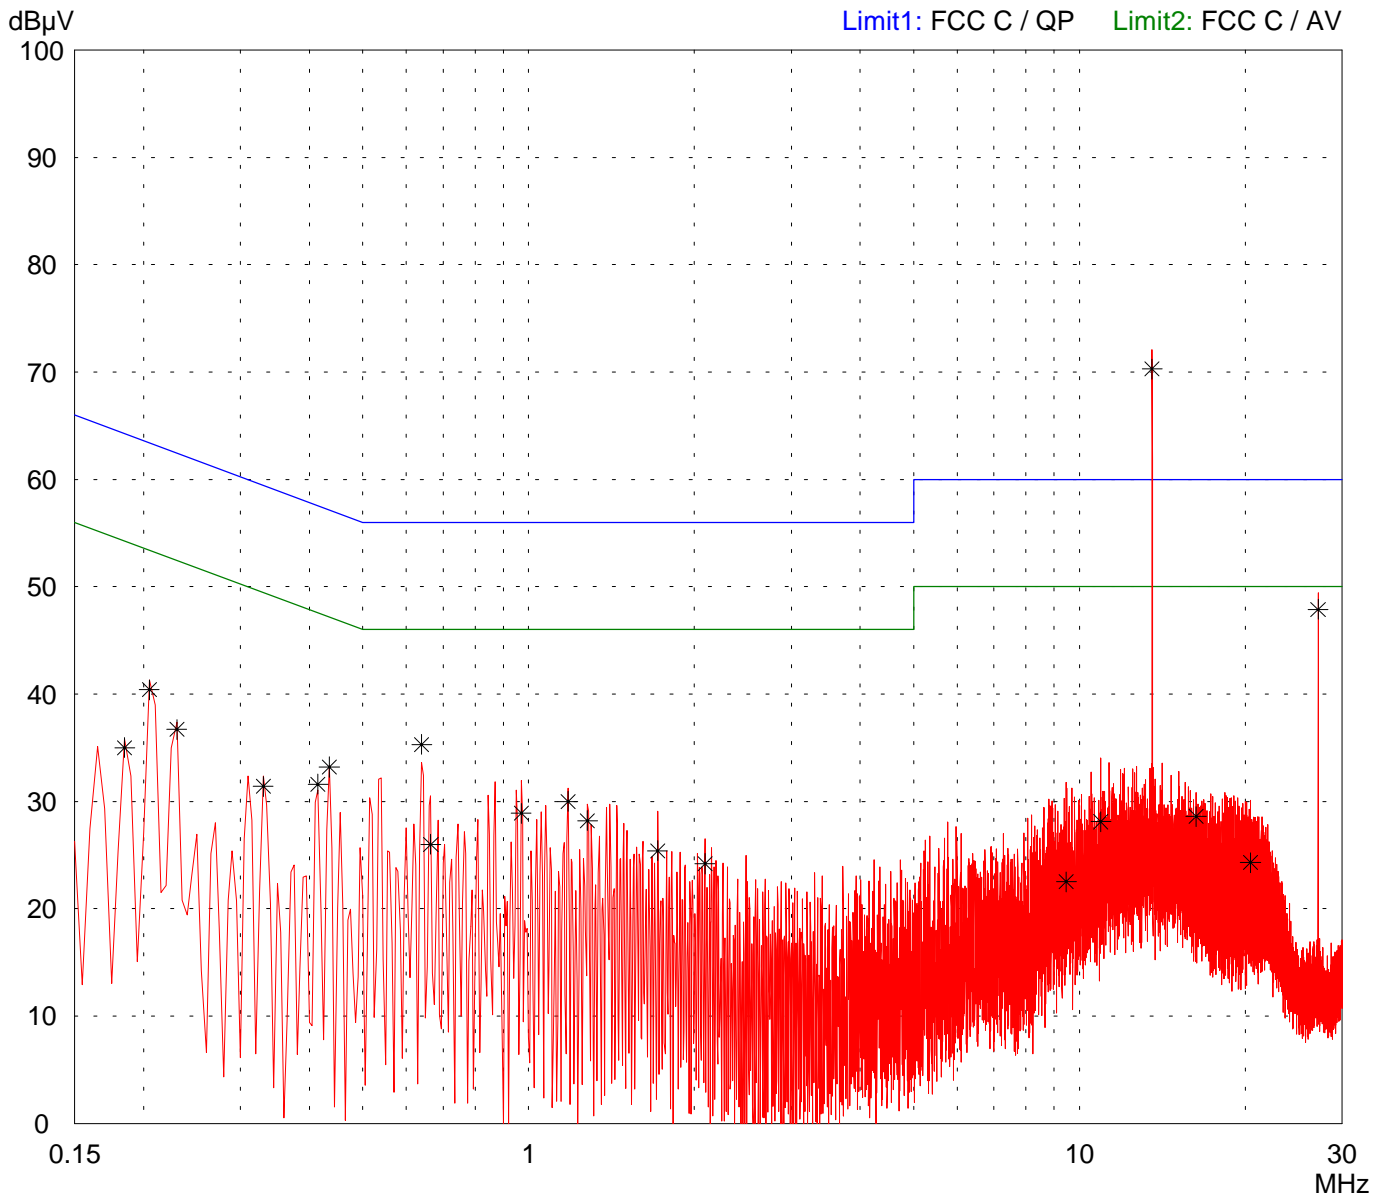

Result: Limit kept - Carrier excluded

Project file: 50602-060877

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
ID CPR.04

Serial no.:

Applicant:
FEIG ELECTRONIC GmbH

Test site:
Shielded room, cabin no. 4

Tested on:
Linecord AC 115 V power supply
Phase N

Date of test:
10/16/2006

Operator:
M. Steindl

Test performed:
semi automatically

File name:


Mode:
- with DELL laptop
- reading tag continuously

Detector:
Peak / Final Results: QP

Final results:
20 dB Margin 25 Subranges

dB μ V

Limit1: FCC C / QP Limit2: FCC C / AV

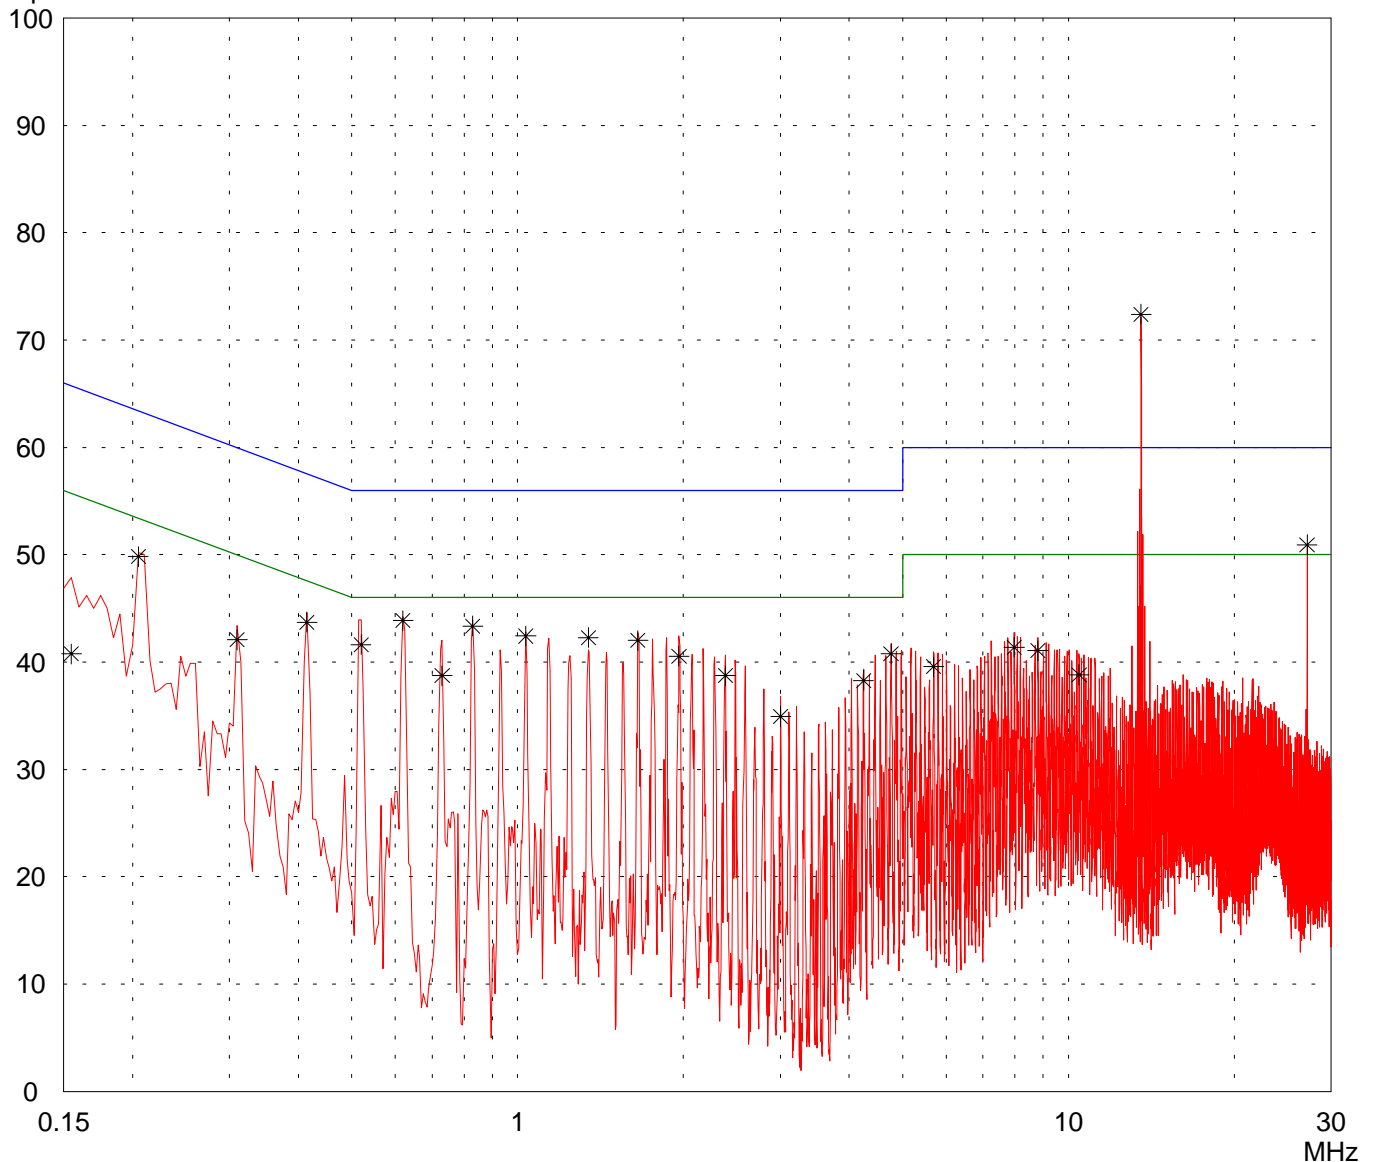

Result:
Limit kept - Carrier excluded

Project file:
50602-060877

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C


Model: ID CPR.04	
Serial no.: ---	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord AC 115 V power supply Phase N	
Date of test: 10/16/2006	Operator: M. Steindl
Test performed: automatically	File name:

Mode:
- with DELL laptop

- reading tag contiuously

Detector:
Average / Final Results: AV

Final results:
20 dB Margin **25 Subranges**

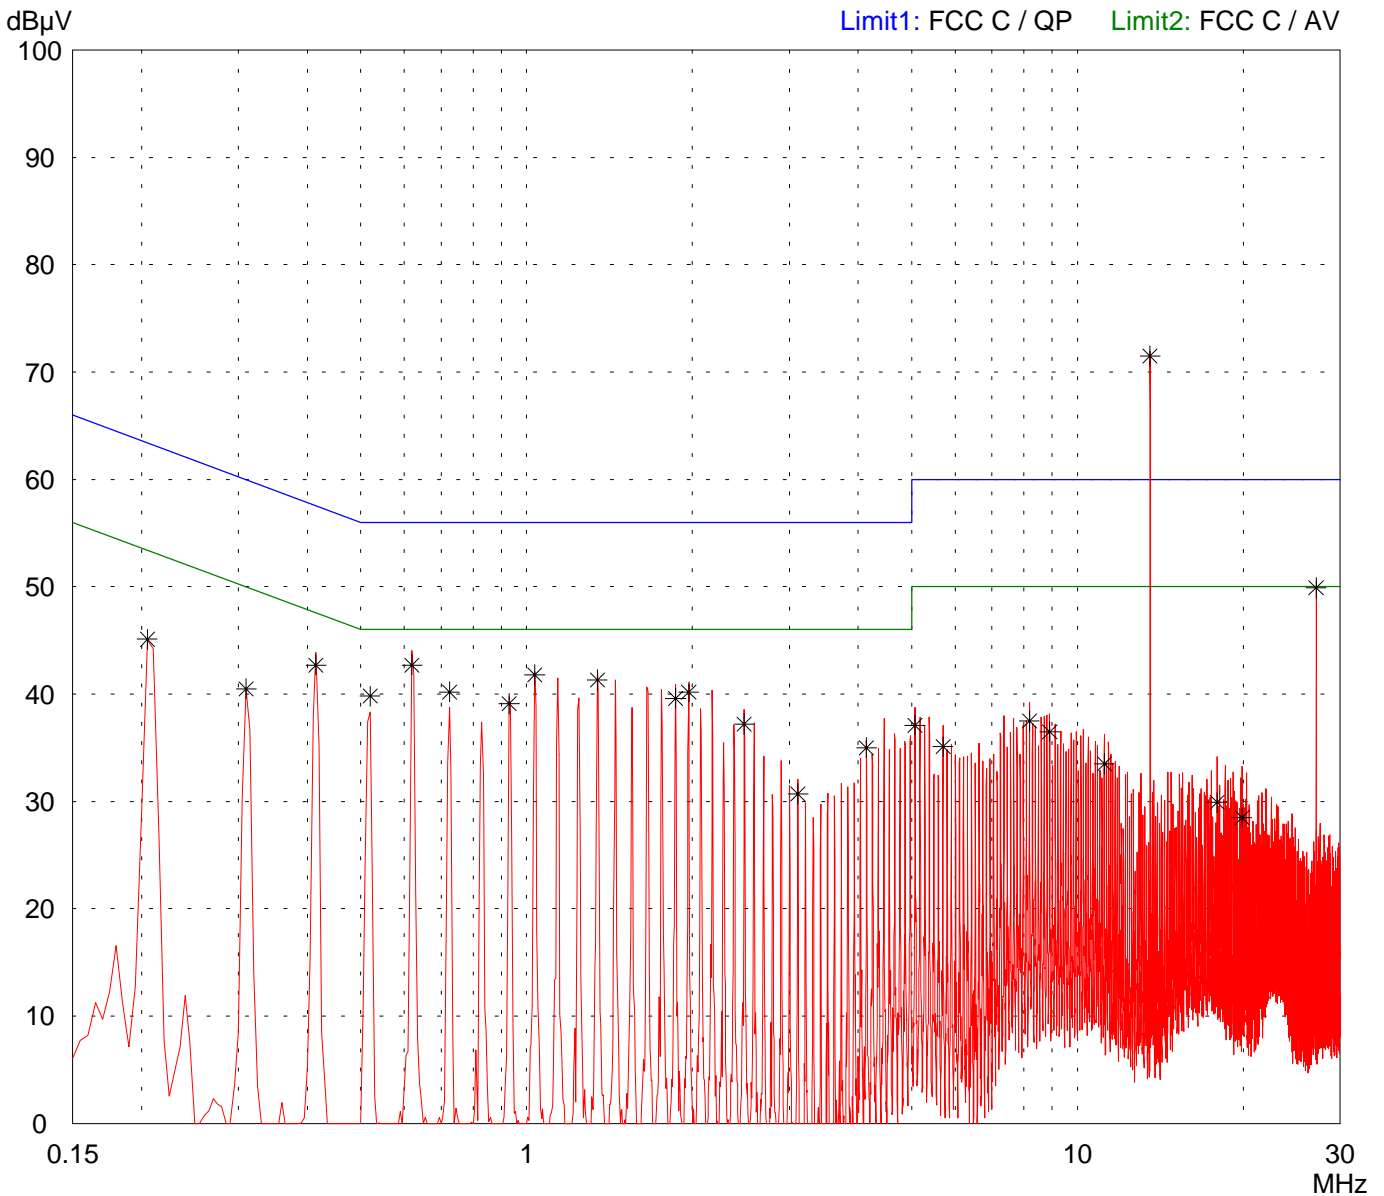

Result:
Limit kept - Carrier excluded

Project file:
50602-060877

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
ID CPR.04

Serial no.:
0001

Applicant:
FEIG ELECTRONIC GmbH

Test site:
Shielded room, cabin no. 4

Tested on:
Linecord AC 115 V power supply
Phase L1

Date of test:
10/18/2006

Operator:
M. Steindl

Test performed:
semi automatically

File name:

Mode:
- with DELL laptop

- Baudrate: 848 kHz

- transmitting continuously
Antenna terminated


Detector:
Peak / Final Results: QP

Final results:
20 dB Margin

25 Subranges

dB μ V

Limit1: FCC C / QP Limit2: FCC C / AV

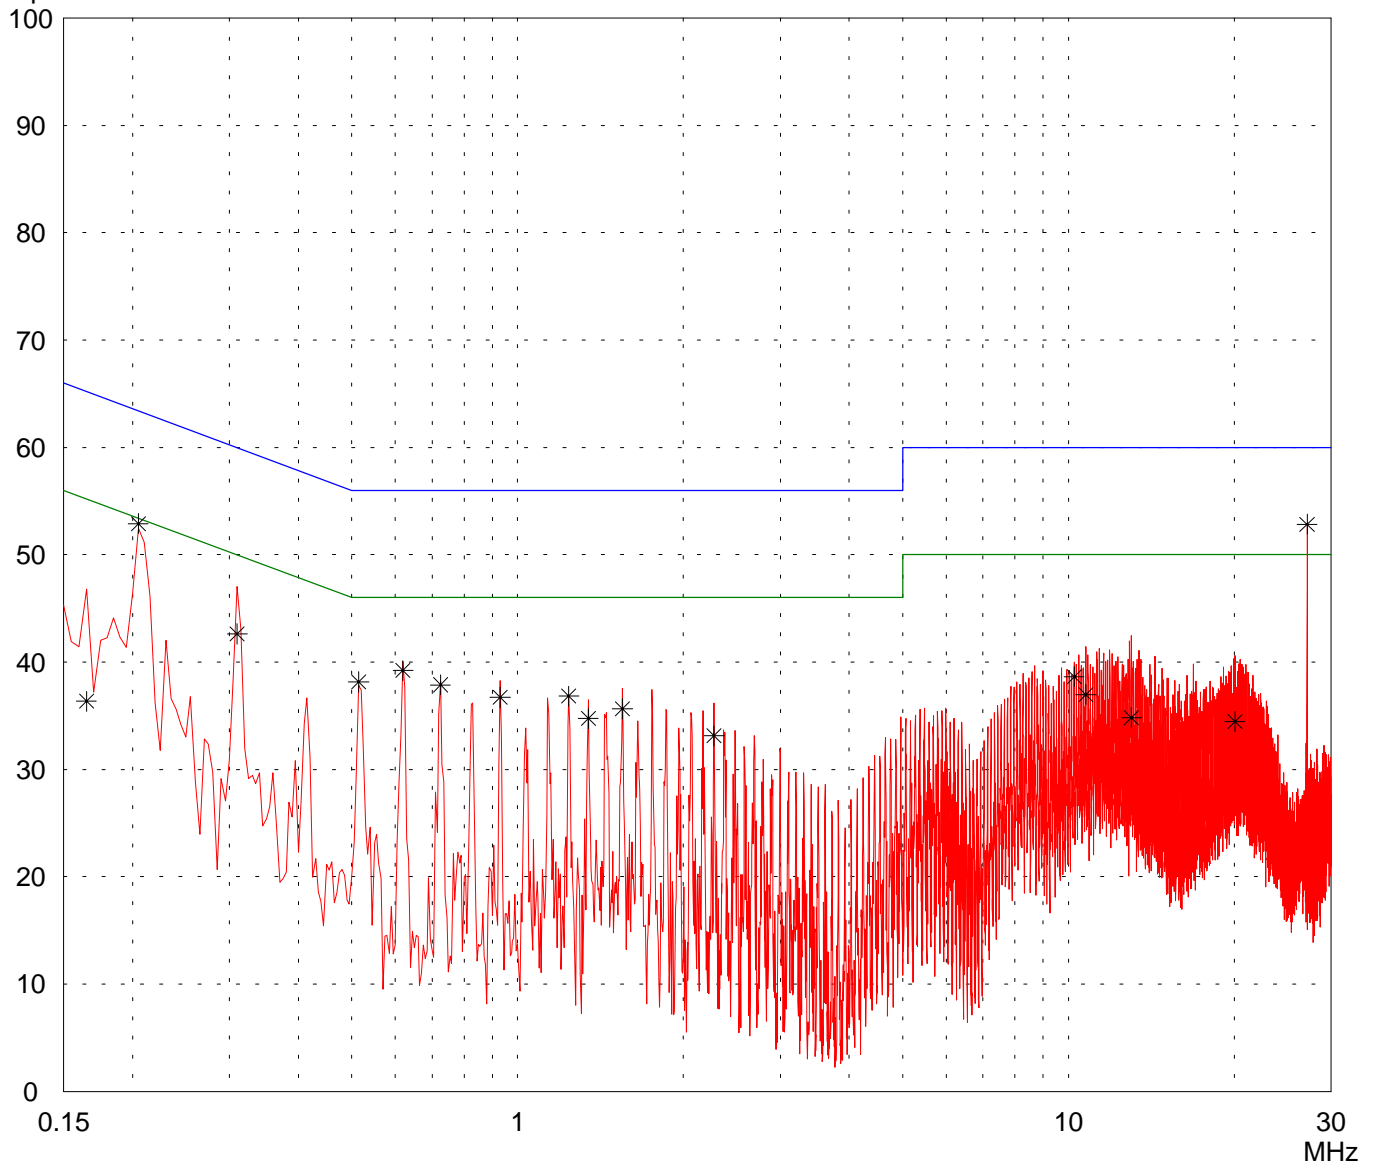

Result:
Limit kept

Project file:
50602-060877


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: ID CPR.04	
Serial no.: 0001	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord AC 115 V power supply Phase L1	
Date of test: 10/18/2006	Operator: M. Steindl
Test performed: automatically	File name:

Mode: - with DELL laptop - Baudrate: 848 kHz - transmitting continuously Antenna terminated	
---	--

Detector: Average / Final Results: AV	
--	--

Final results: 20 dB Margin	25 Subranges
--------------------------------	--------------

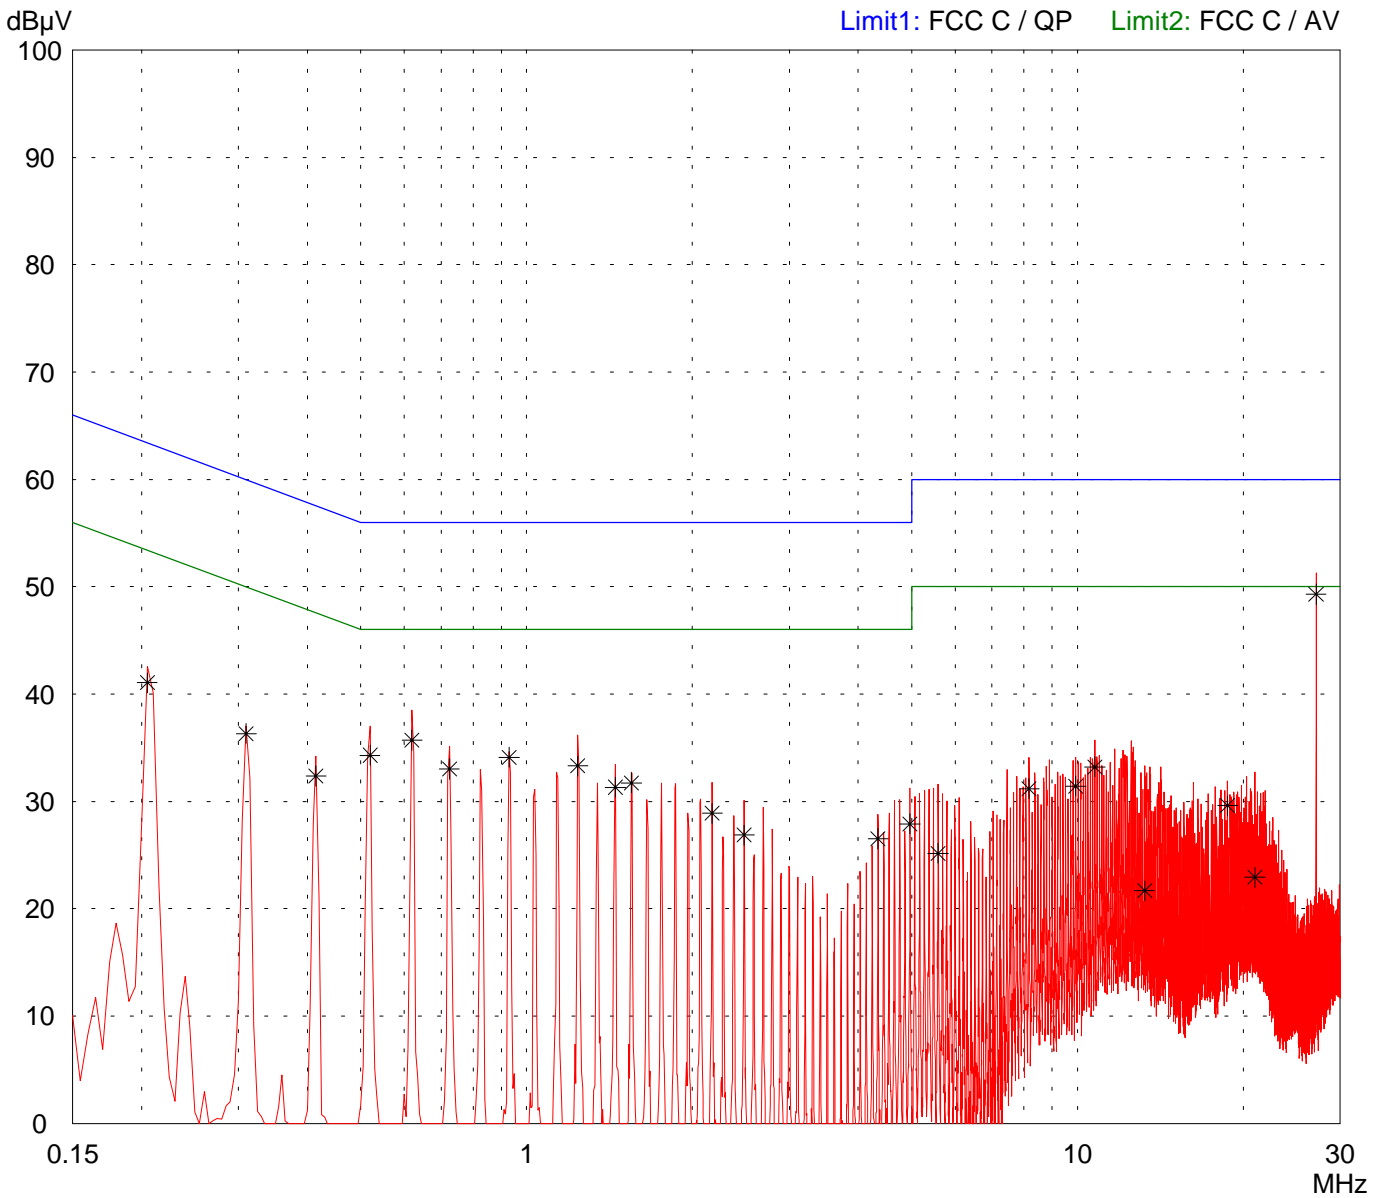

Result: Limit kept

Project file: 50602-060877


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: ID CPR.04	
Serial no.: 0001	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord AC 115 V power supply Phase N	
Date of test: 10/18/2006	Operator: M. Steindl
Test performed: automatically	File name:

Mode: - with DELL laptop - Baudrate: 848 kHz - transmitting continuously Antenna terminated	
---	--

Detector: Peak / Final Results: QP

Final results: 20 dB Margin	25 Subranges
--------------------------------	--------------

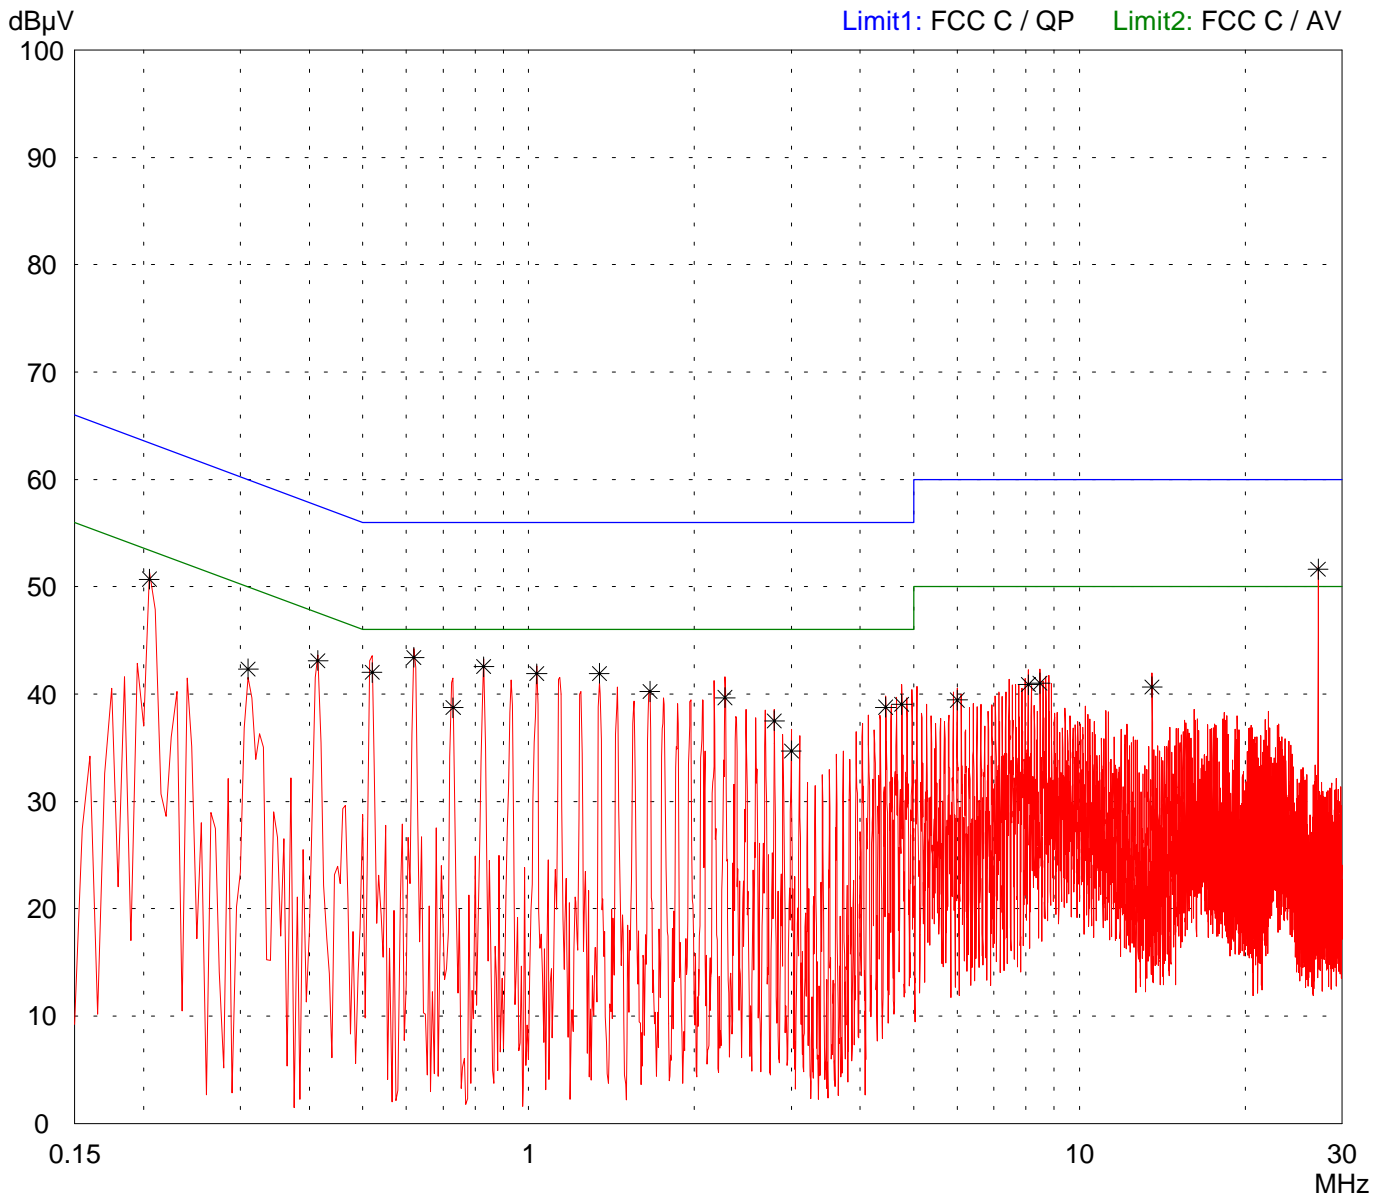

Result: Limit kept

Project file: 50602-060877

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
ID CPR.04

Serial no.:
0001

Applicant:
FEIG ELECTRONIC GmbH

Test site:
Shielded room, cabin no. 4

Tested on:
Linecord AC 115 V power supply
Phase N

Date of test:
10/18/2006

Operator:
M. Steindl

Test performed:
automatically

File name:

Mode:

- with DELL laptop

- Baudrate: 848 kHz

- transmitting continuously
Antenna terminated


Detector:
Average / Final Results: AV

Final results:
20 dB Margin

25 Subranges

dB μ V

Limit1: FCC C / QP Limit2: FCC C / AV

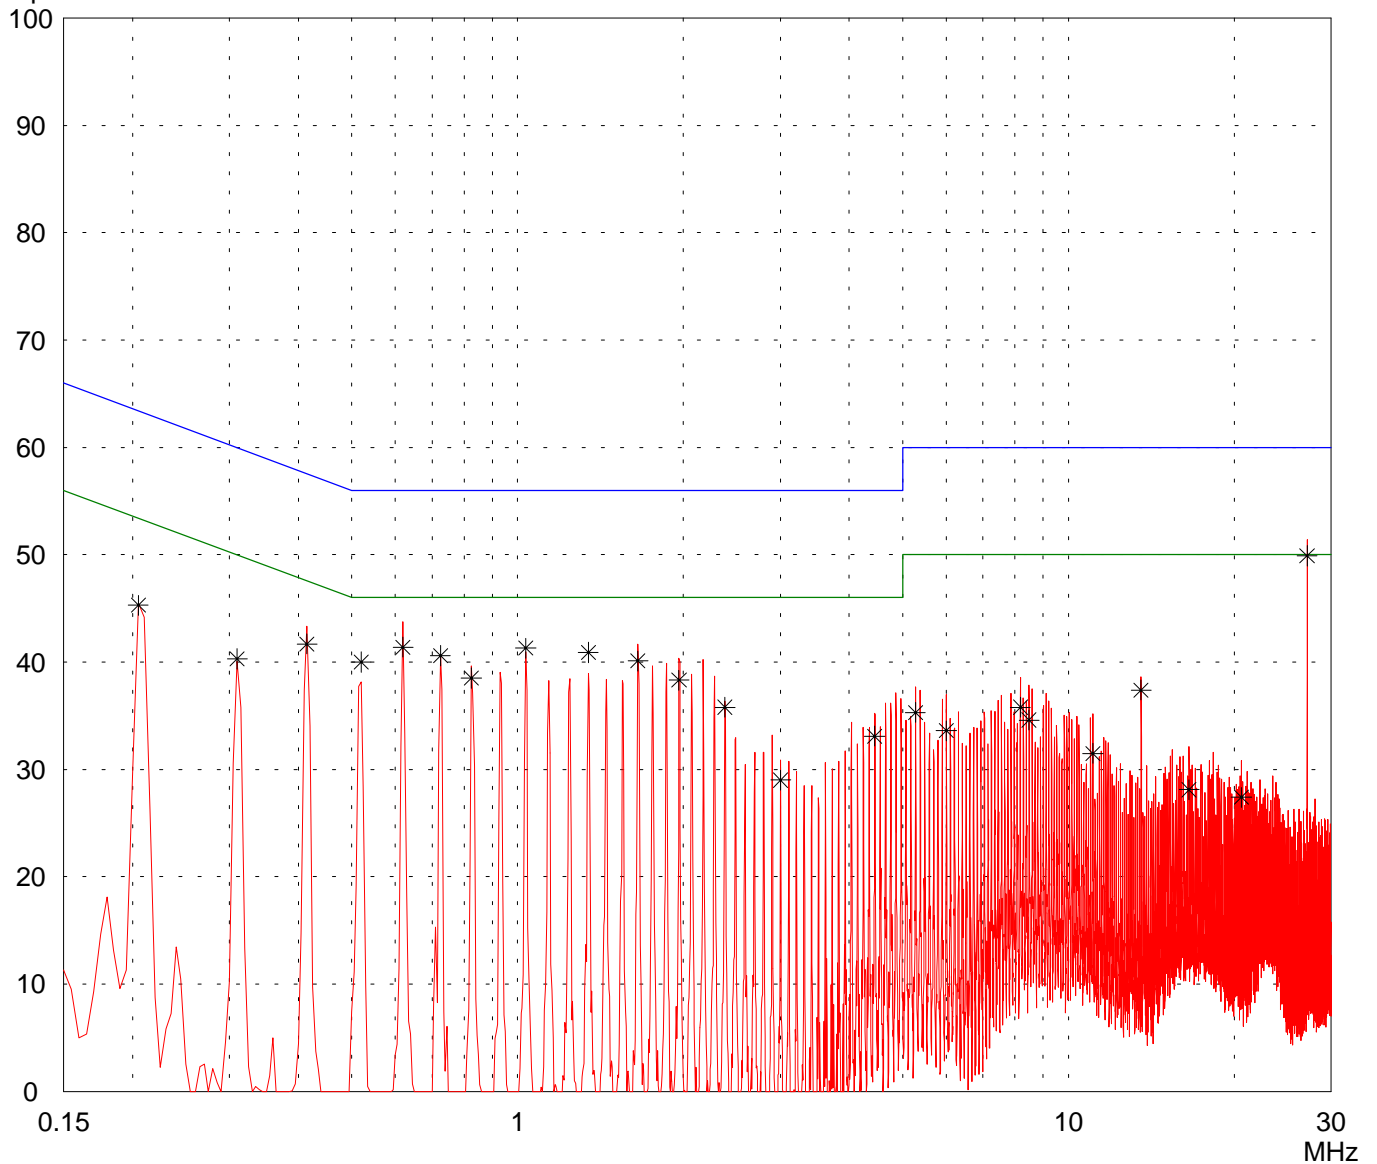

Result:
Limit kept

Project file:
50602-060877

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
ID CPR.04

Serial no.:
0002

Applicant:
FEIG ELECTRONIC GmbH

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres

Date of test:
11/30/2006

Operator:
M. Steindl

Test performed:
by hand

File name:
default.emi

Comment:

- with DELL laptop
- Baudrate: 848 kBaud
- transmitting continuously without tag

Detector:
Peak


List of values:

10 dB Margin

50 Subranges

dB μ V/m

Limit1: FCC Part 15 Transducer: HFH2-Z2

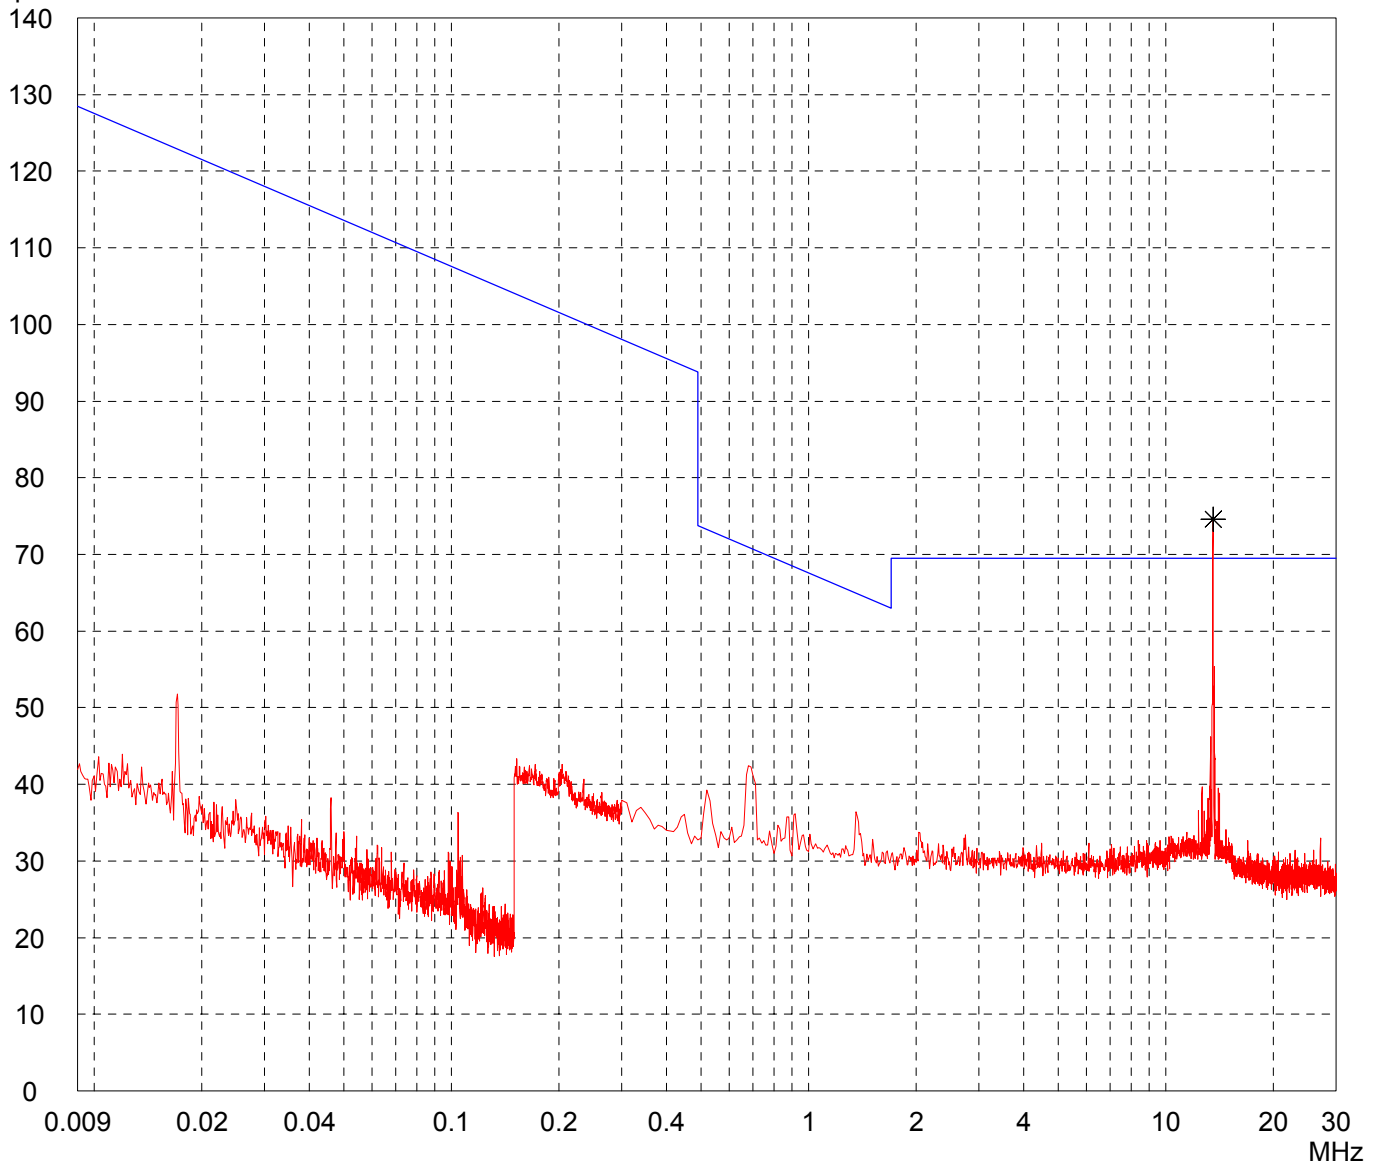

Result:
Prescan

Project file:
50602-60877


Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: ID CPR.04	
Serial no.: 0002	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 11/30/2006	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Comment: - with DELL laptop - Baudrate: 848 kBaud - reading tag continuously	
---	--

Detector: Peak

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

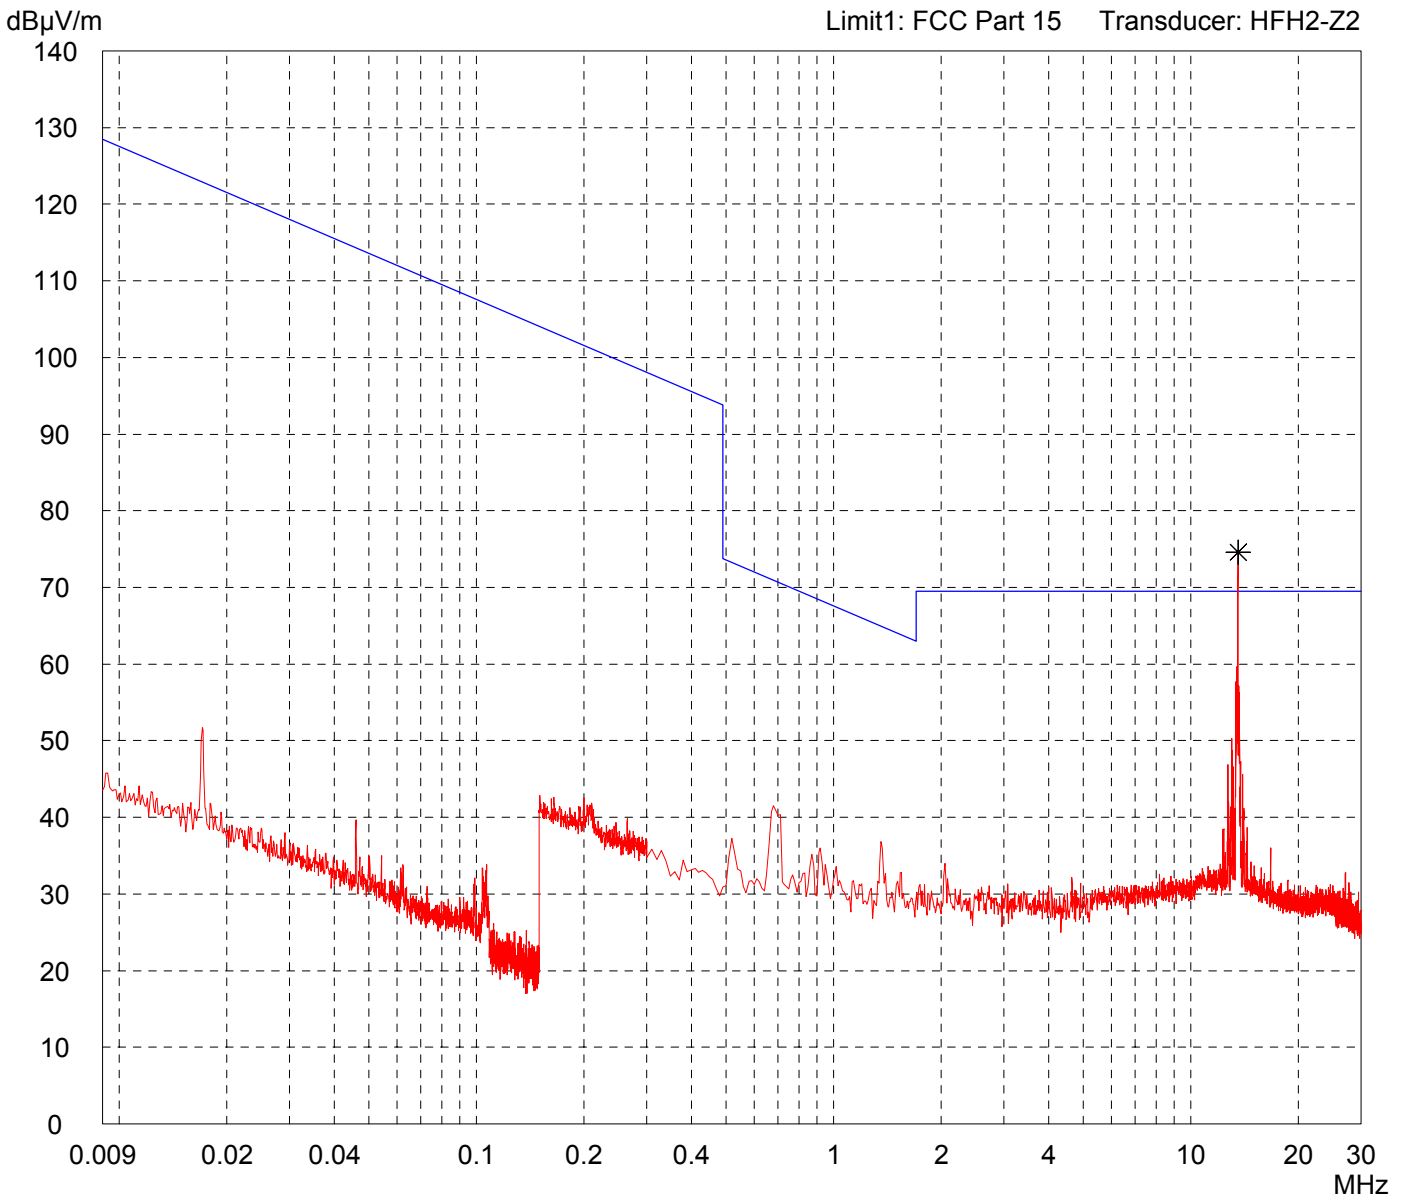

Result: Prescan

Project file: 50602-60877


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: ID CPR.04	
Serial no.: 0002	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 11/30/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- with DELL laptop
- Baudrate: 848 kBaud
- transmitting continuously without tag

Detector: Peak

List of values:
Selected by hand

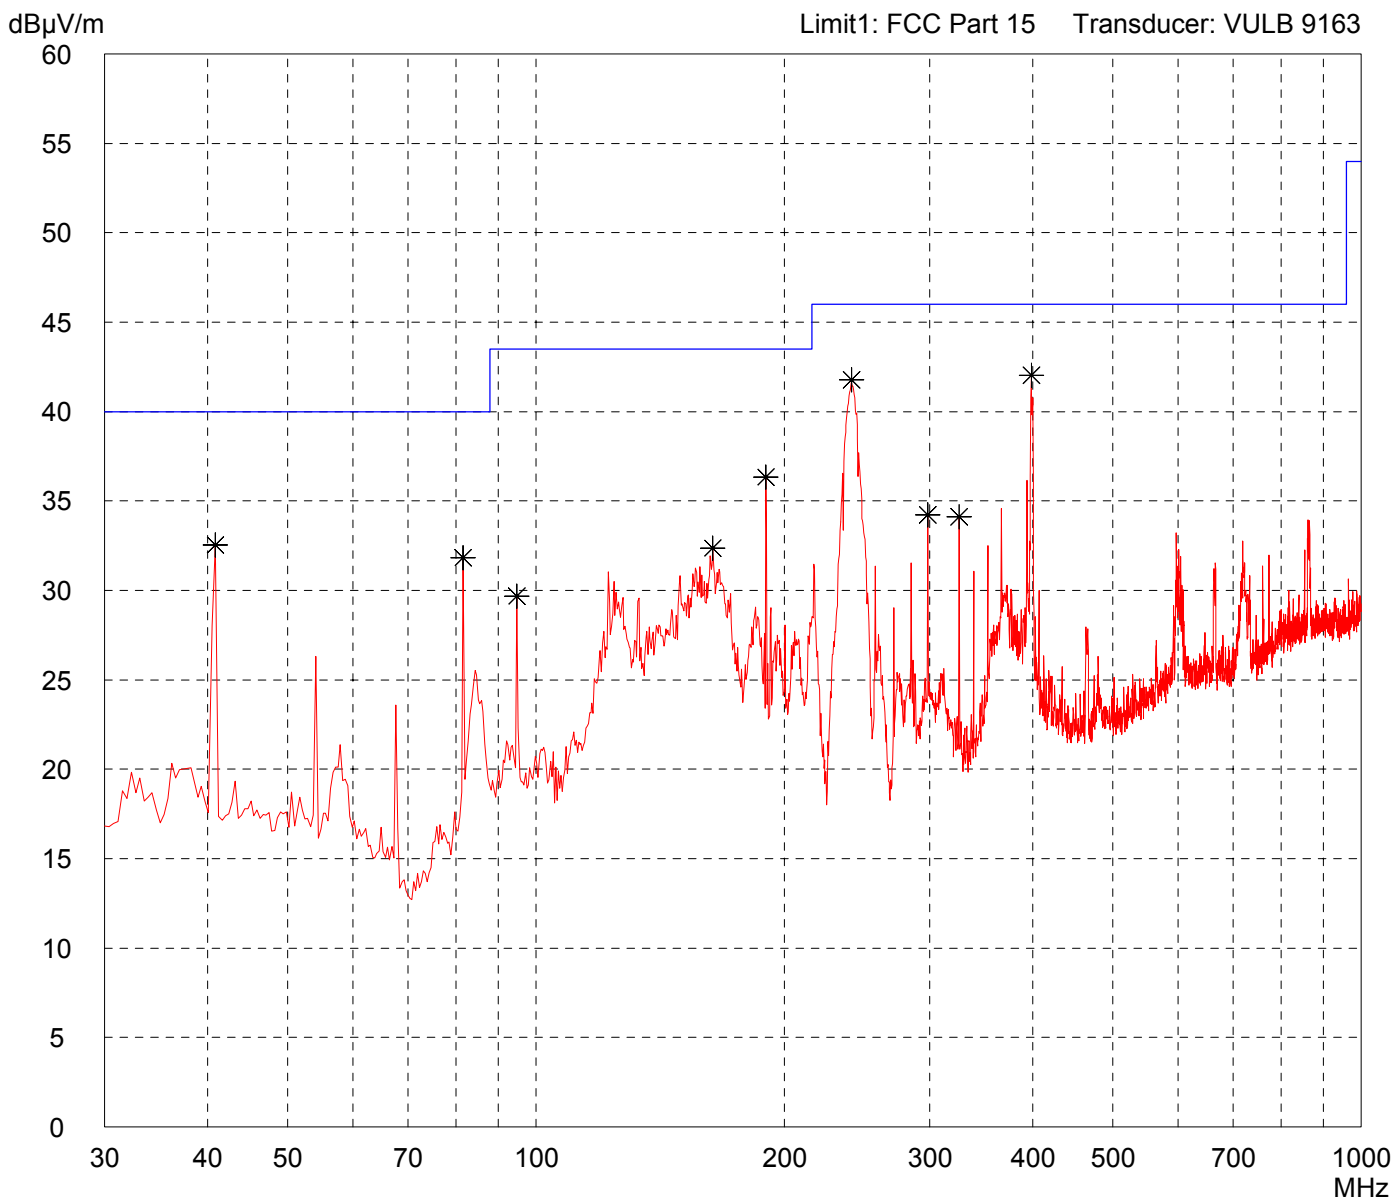

Result: Prescan

Project file:
50602-60877


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: ID CPR.04	
Serial no.: 0002	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 11/30/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- with DELL laptop
- Baudrate: 848 kBaud
- transmitting continuously without tag

Detector: Peak

List of values:
Selected by hand

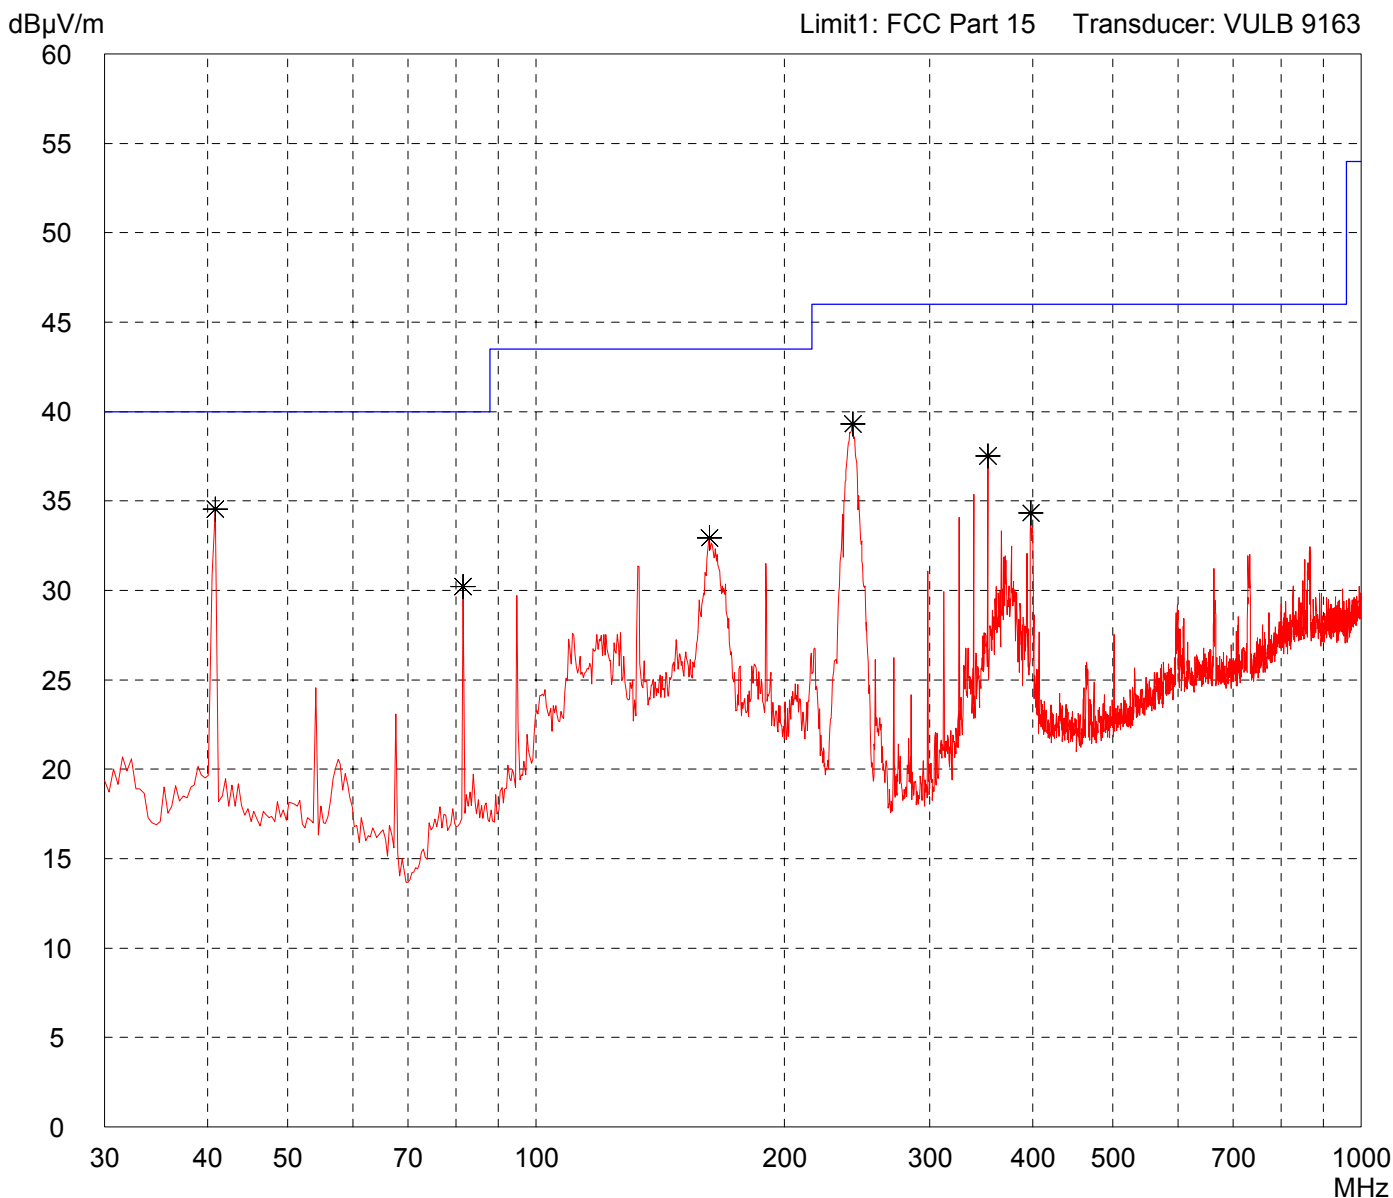

Result: Prescan

Project file: 50602-60877


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: ID CPR.04	
Serial no.: 0002	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 11/30/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- with DELL laptop
- Baudrate: 848 kBaud
- reading tag continuously

Detector: Peak

List of values:
Selected by hand

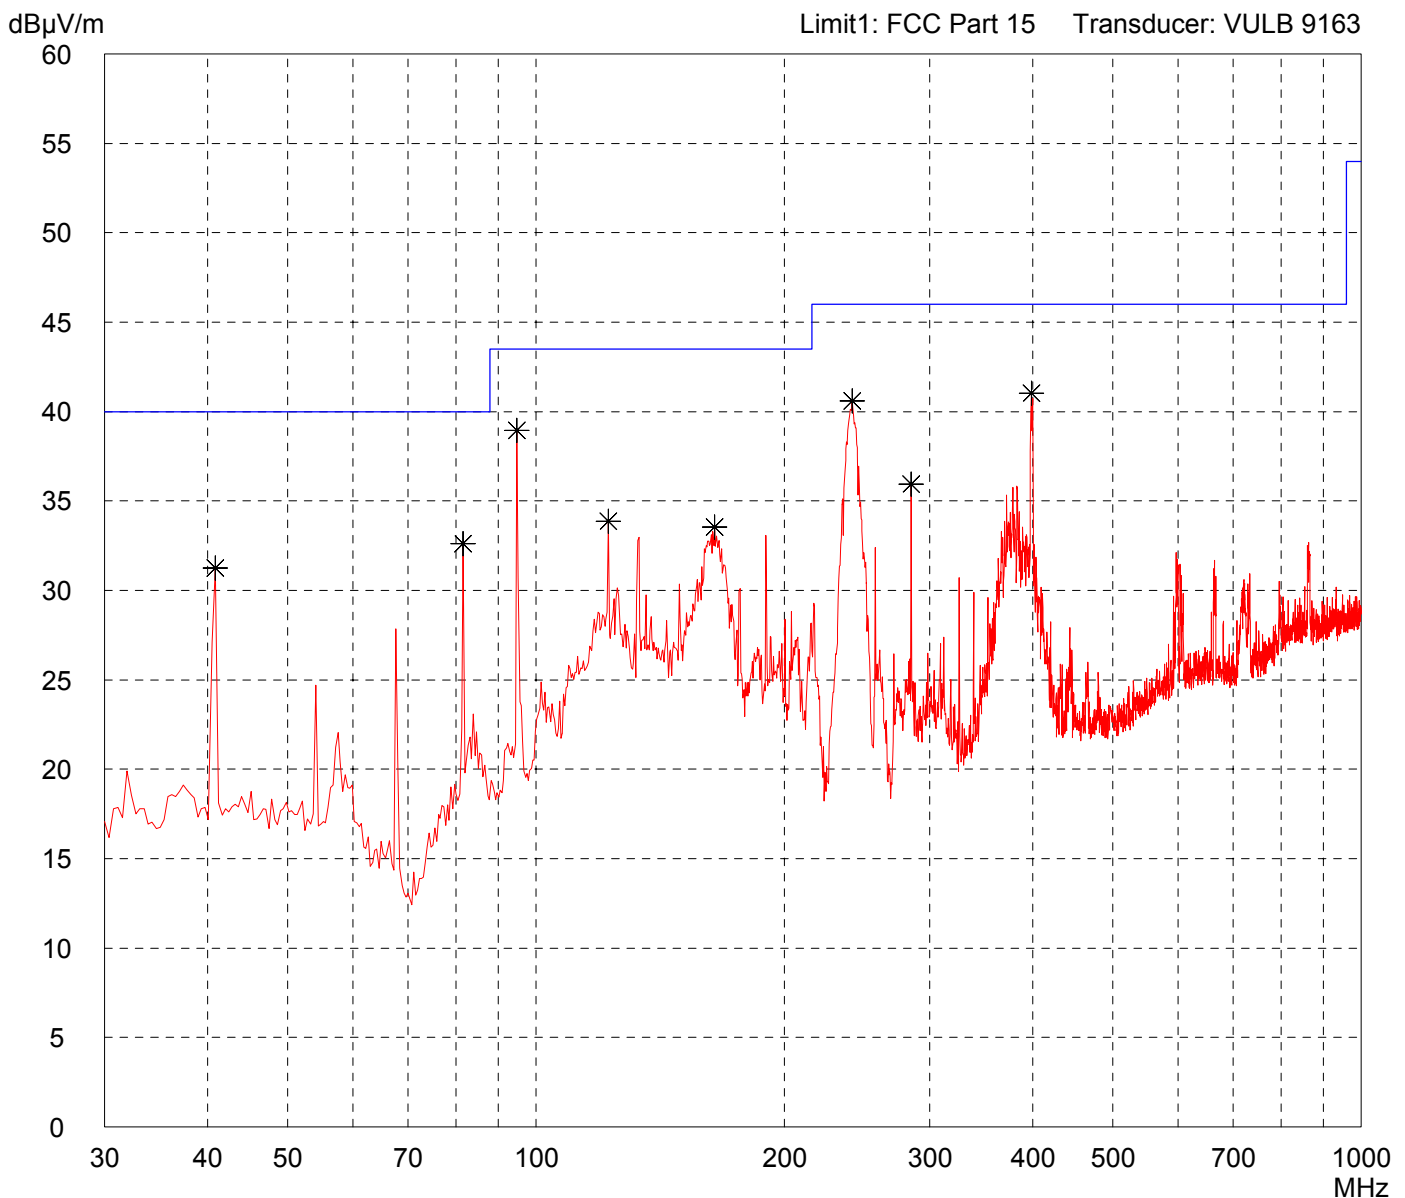

Result: Prescan

Project file: 50602-60877


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: ID CPR.04	
Serial no.: 0002	
Applicant: FEIG ELECTRONIC GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 11/30/2006	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- with DELL laptop
- Baudrate: 848 kBaud
- reading tag continuously

Detector: Peak

List of values:
10 dB Margin 50 Subranges

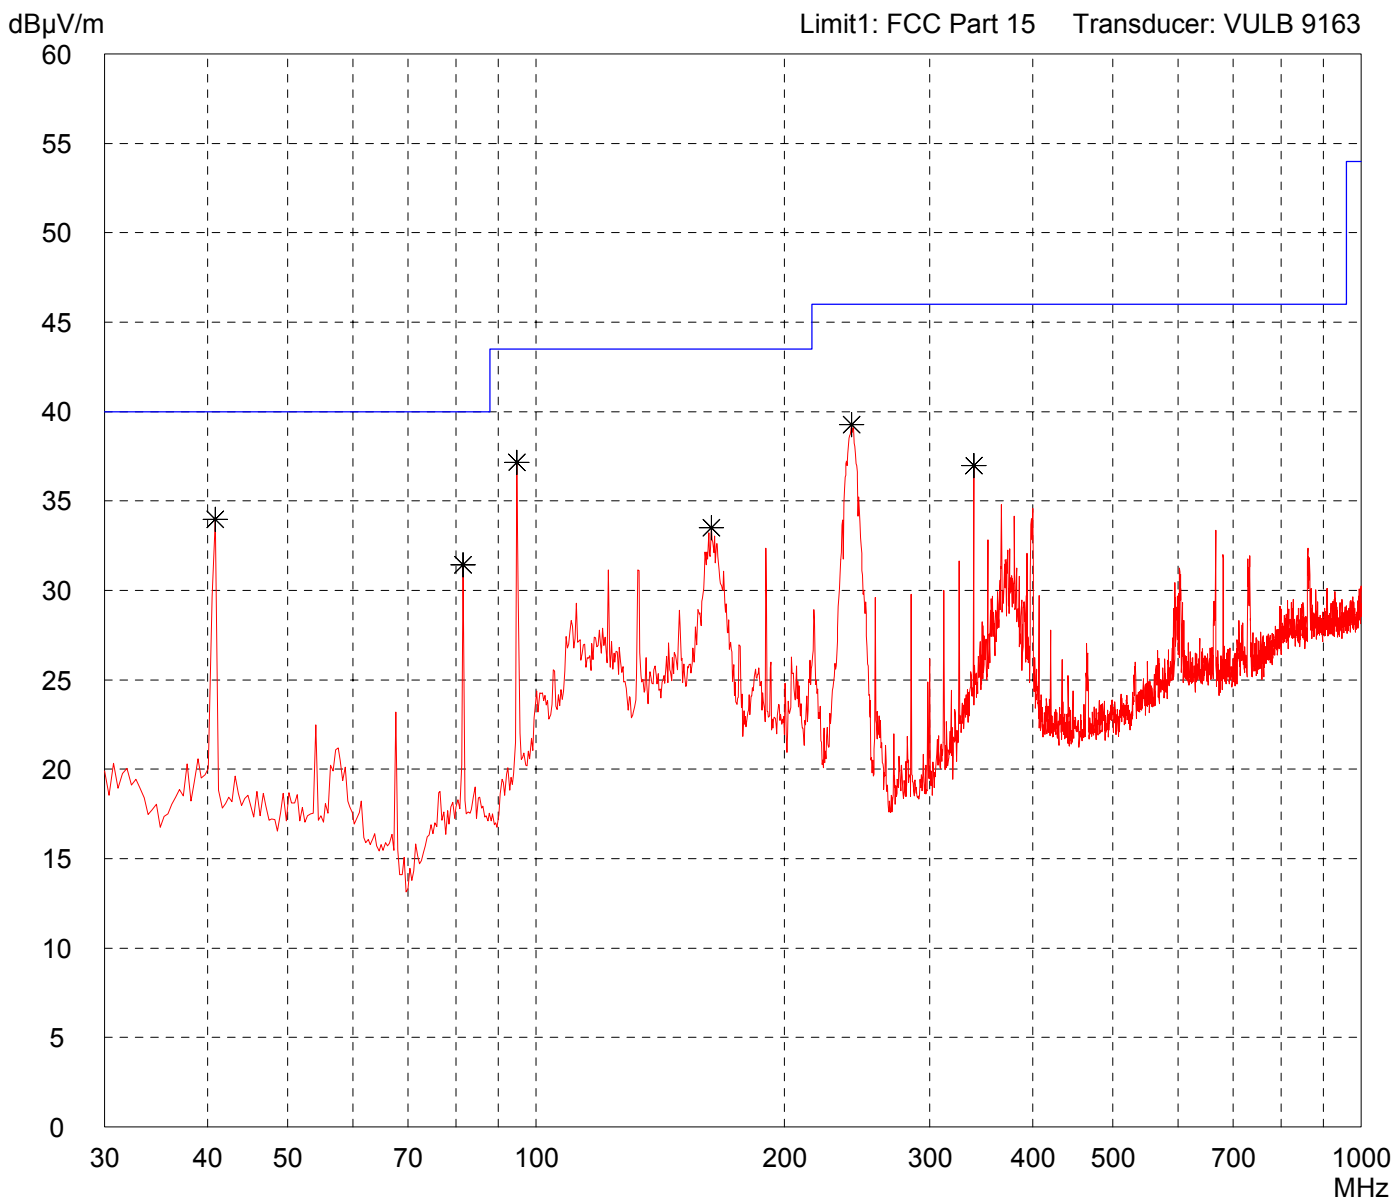

Result: Prescan

Project file:
50602-60877