

Straubing, September 18, 2001

T E S T - R E P O R T

No. 50602-10395-2

for

ID ISC.PRH100

Inductive Tag Reader

Applicant: FEIG ELECTRONIC GmbH

Purpose of testing: To show compliance with

FCC Code of Federal Regulations,
CFR 47, Part 15, Subpart C,
Section 15.225

Note:

The test data of this report relate only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

| | | |
|------|--|----|
| 1. | Administrative Data | 3 |
| 2. | Identification of Test Laboratory | 4 |
| 3. | Summary of Test Results..... | 5 |
| 4. | Operation Mode of EUT | 6 |
| 5. | Configuration of EUT and Peripheral Devices | 7 |
| 6. | Measuring Methods..... | 8 |
| 6.1. | Field strength of in-band emissions (§15.225 (a)) and unwantewd emissions < 30 MHz (§15.225 (b))..... | 8 |
| 6.2. | Frequency tolerance (§15.225 (c)) | 9 |
| 6.3. | Unwanted Emission 30 MHz - 1 GHz (§15.225 (b))..... | 11 |
| 7. | Photographs of Test Setups..... | 13 |
| 7.1. | Radiated Emissions 9 kHz – 30 MHz | 13 |
| 7.2. | Radiated Emissions 30 – 1000 MHz | 14 |
| 8. | Equipment List | 15 |
| 9. | Referenced Regulations..... | 17 |
| 10. | List of Measurements | 18 |
| 11. | Test Results | 19 |
| 12. | Chartsd taken during testing | 25 |

1. Administrative Data

Equipment Under Test (EUT): **ID ISC.PRH100**

Serial number(s): **Sample no. 1**

Type of equipment: **Inductive Tag Reader**

Type of emission: **10K0A1D**

Parts/accessories: **---**

FCC-ID: **PJMPRH100**

Applicant: **FEIG ELECTRONIC GmbH**

(full address) **Lange Strasse 4
D-35781 Weilburg-Waldhausen**

Contract identification: **---**

Contact person: **Mr. Carsten Fiedler**

Manufacturer: **FEIG ELECTRONIC GmbH**

Receipt of EUT: **June 20, 2001**

Dates of test: **June 22, 2001**

Note: **---**

Responsible for testing: **Johann Roidt**

Responsible for test report: **Johann Roidt**

2. Identification of Test Laboratory

Test Laboratory:
(full address):

Senton GmbH EMI/EMC Test Center
Aeussere Fruehlingstrasse 45
D-94315 Straubing
Germany

Contact person: **Mr. Johann Roidt**

Communication: **Telephone** **(+49) 0 94 21 / 55 22-0**
Fax **(+49) 0 94 21 / 55 22-99**
eMail: **Office@senton.de**

FCC registration number: **90926**

Industry Canada file number: **IC 3050**

3. Summary of Test Results

The tested sample complies with the requirements for set forth in the

The Code of Federal Regulations 47, Part 15, Subpart C, Section 15.225

of the Federal Communication Commission (FCC).



Johann Roidt
Technical Manager

4. Operation Mode of EUT

Continously reading a TAG

5. Configuration of EUT and Peripheral Devices

Configuration of cables of EUT

Not applicable

Configuration of peripheral devices connected to EUT

All tests were performed with the EUT connected to a personal computer via either the RS 232 interface or USB bus. The RS232 version of the EUT was powered by an external AC adapter. THE USB version received power via the USB bus.

6. Measuring Methods

6.1. Field strength of in-band emissions (§15.225 (a)) and unwanted emissions < 30 MHz (§15.225 (b))

Radiated emissions in the frequency range 9 kHz – 30 MHz will be measured initially at a distance of 3 meters. A prescan at 3 meter distance will be performed in a shielded room with the detector of the spectrum analyzer or EMI Receiver set to peak. Final measurement is then performed at 30 meter distance. In case the regulation requires testing at other distances, the result will be extrapolated. The extrapolation factor will be determined by making a second measurement at 10 meter distance. The provisions of 15.31 (d) apply.

According to section 15.209 (d) final measurement is performed with the detector set to Quasi Peak except for the frequency bands 9 – 90 kHz and 110 – 490 kHz where average detector is employed.

6.2. Frequency tolerance (§15.225 (c))

6.2.1. Frequency stability vs. temperature

The frequency stability vs. temperature was measured with a spectrum analyzer connected to the output of the transmitter power amplifier (conducted measurement) via dummy load while EUT was operating in transmit mode using the assigned frequency.

The trace mode of the spectrum analyzer was set to write with frequency count mode activated:

RBW = 100 Hz, VBW = 100 Hz, span = 20 kHz, sweep = 1.5 s (auto mode)

See figure 1 for the measurement setup.

Test equipment used (see equipment list for details):
 02, 18, 51, 54, 69, 70, 71

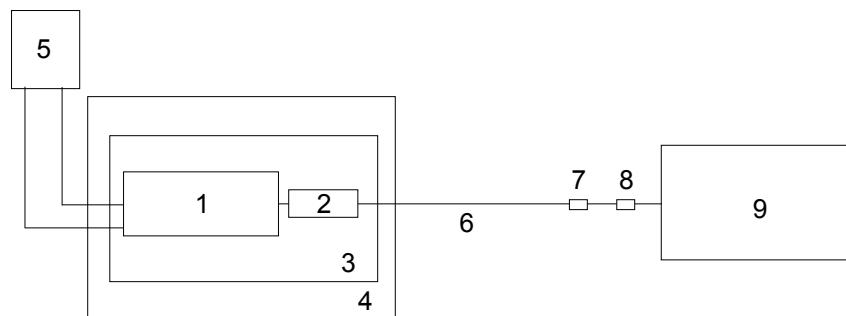


Figure 1: Measurement setup for testing within temperature test chamber

- | | |
|-----------------------------------|----------------------------|
| 1 Transmitter (EUT) | 6 Test cable |
| 2 Dummy load | 7 DC-block |
| 3 Wooden support | 8 Attenuator |
| 4 Temperature test chamber | 9 Spectrum analyzer |
| 5 DC power supply | |

6.2.2. Frequency stability vs. supply voltage

The frequency stability vs. supply voltage was measured with a spectrum analyzer connected to the output of the transmitter power amplifier (conducted measurement) via dummy load while EUT was operating in transmit mode using the assigned frequency.

The trace mode of the spectrum analyzer was set to write with frequency count mode activated:

RBW = 100 Hz, VBW = 100 Hz, span = 20 kHz, sweep = 1.5 s (auto mode)

See figure 1 for the measurement setup.

Test equipment used (see equipment list for details):
02, 18, 51, 69, 70, 71

6.3. Unwanted Emission 30 MHz - 1 GHz (§15.225 (b))

Radiated emissions were measured over the frequency range from 30 MHz to 1 GHz. For final testing the detector-function of the spectrum analyzer was set to quasi peak

Measurements were made in both the horizontal and vertical planes of polarization. Preliminary scans were taken in a semi-anechoic room using a spectrum analyzer with the detector function set to peak and resolution bandwidth set to 100 kHz. All tests were performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. For final testing an open-area test-site was used. During the tests the EUT was rotated all around and the receiving-antenna was raised and lowered from 1 meter to 4 meters to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions.

See figure 2 for the measurement setup.

Test equipment used (see equipment list for details):
01, 06, 12, 15, 38, 39, 40, 41, 55, 58, 61, 64, 66

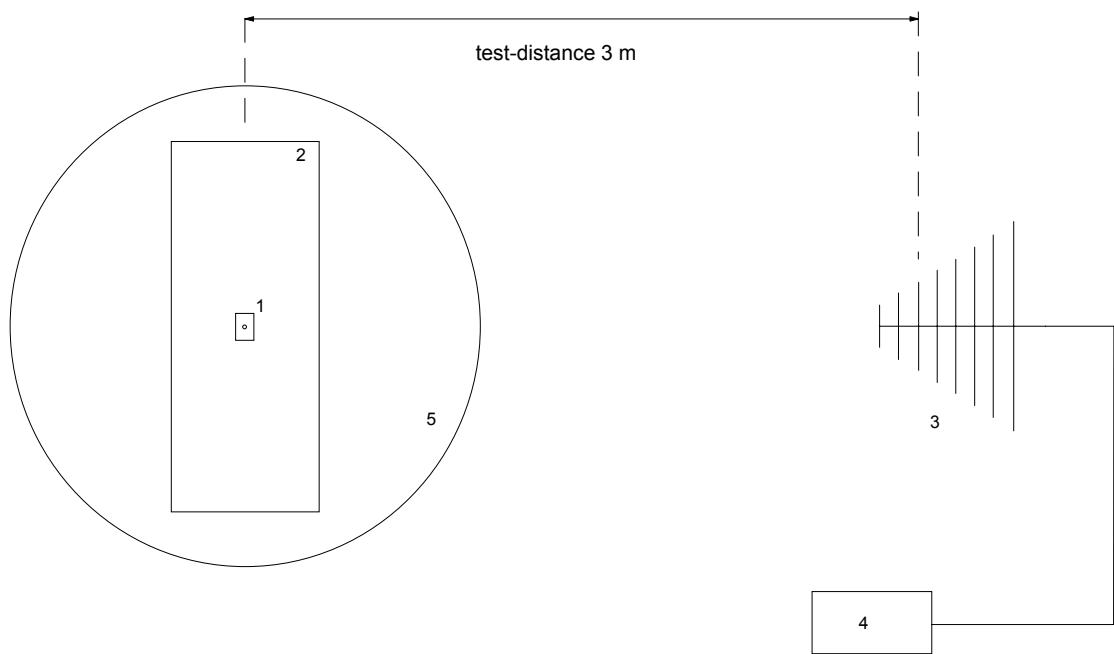


Figure 2: Measurement setup for radiated emission test

1 Transmitter (EUT)

2 Wooden table

3 Measurement antenna

4 Test receiver

5 Turn table

7. Photographs of Test Setups

7.1. Radiated Emissions 9 kHz – 30 MHz

7.2. Radiated Emissions 30 – 1000 MHz

8. Equipment List

To facilitate reference to test equipment used for related tests, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory.

| No. | Type | Model | Serial Number | Manufacturer |
|-----|----------------------|--------------|--------------------------|-----------------|
| 01 | Spectrum Analyzer | R 3271 | 05050023 | Advantest |
| 02 | EMI Test Receiver | ESMI | 839379/013 839587/006 | Rohde & Schwarz |
| 03 | Test Receiver | ESH 3 | 880112/032 | Rohde & Schwarz |
| 04 | Test Receiver | ESHS 10 | 860043/016 | Rohde & Schwarz |
| 05 | Test Receiver | ESV | 881414/009 | Rohde & Schwarz |
| 06 | Test Receiver | ESVP | 881120/024 | Rohde & Schwarz |
| 07 | Audio Analyzer | UPA | 862954 | Rohde & Schwarz |
| 08 | Power Meter | NRVS | 836856/015 | Rohde & Schwarz |
| 09 | Power Sensor | NRV-Z52 | 837901/030 | Rohde & Schwarz |
| 10 | Power Sensor | NRV-Z4 | 863828/015 | Rohde & Schwarz |
| 11 | Preamplifier | ESV-Z3 | 860907/004 | Rohde & Schwarz |
| 12 | Preamplifier | R14601 | | Advantest |
| 13 | Preamplifier | ACX/080-3030 | 32640 | CTT |
| 14 | Preamplifier | ACO/180-3530 | 32641 | CTT |
| 15 | Signal generator | SMY 01 | 830694/001 | Rohde & Schwarz |
| 16 | Signal Generator | HP 8673 D | 2930A00966 | Hewlett Packard |
| 17 | Waveform Generator | HP 33120 A | US34005375 | Hewlett Packard |
| 18 | Attenuator 20 dB | 4776-20 | 9503 | Narda |
| 19 | Attenuator 10 dB | 4776-10 | 9412 | Narda |
| 20 | Pulse Limiter | ESH 3-Z2 | 1144 | Rohde & Schwarz |
| 21 | Pulse Limiter | 11947 A | 3107A00566 | Hewlett Packard |
| 22 | V-Network | ESH 3-Z5 | 862770/018 | Rohde & Schwarz |
| 23 | V-Network | ESH 3-Z5 | 894785/005 | Rohde & Schwarz |
| 24 | V-Network | ESH 3-Z5 | 830952/025 | Rohde & Schwarz |
| 25 | V-Network | ESH 3-Z6 | 830722/010 | Rohde & Schwarz |
| 26 | V-Network | NSLK 8127 | 8127152 | Schwarzbeck |
| 27 | V-Network | NNLA 8119 | 8119148 | Schwarzbeck |
| 28 | V-Network | SE 01 | 01 | Senton |
| 29 | T-Network | ESH 3-Z4 | 890602/011 | Rohde & Schwarz |
| 30 | T-Network | ESH 3-Z4 | 890602/012 | Rohde & Schwarz |
| 31 | High Impedance Probe | TK 9416 | 01 | Schwarzbeck |
| 32 | High Impedance Probe | TK 9416 | 02 | Schwarzbeck |
| 33 | Current Probe | ESH 2-Z1 | 863366/18 | Rohde & Schwarz |
| 34 | Current Probe | ESV-Z1 | 862553/3 | Rohde & Schwarz |

| No. | Type | Model | Serial Number | Manufacturer |
|-----|-----------------------------|------------|---------------|---------------------|
| 35 | Absorbing Clamp | MDS 21 | 80911 | Lüthi |
| 36 | Absorbing Clamp | MDS 21 | 79690 | Lüthi |
| 37 | Loop Antenna | HFH2-Z2 | 882964/1 | Rohde & Schwarz |
| 38 | Biconical Antenna | HK 116 | 842204/001 | Rohde & Schwarz |
| 39 | Biconical Antenna | HK 116 | 836239/02 | Rohde & Schwarz |
| 40 | Log. Periodic Antenna | HL 223 | 841516/023 | Rohde & Schwarz |
| 41 | Log. Periodic Antenna | HL 223 | 834408/12 | Rohde & Schwarz |
| 42 | Horn Antenna | 3115 | 9508-4553 | Emco |
| 43 | Horn Antenna | 3160-03 | 9112-1003 | Emco |
| 44 | Horn Antenna | 3160-04 | 9112-1001 | Emco |
| 45 | Horn Antenna | 3160-05 | 9112-1001 | Emco |
| 46 | Horn Antenna | 3160-06 | 9112-1001 | Emco |
| 47 | Horn Antenna | 3160-07 | 9112-1008 | Emco |
| 48 | Horn Antenna | 3160-08 | 9112-1002 | Emco |
| 49 | Horn Antenna | 3160-09 | 9403-1025 | Emco |
| 50 | Digital multimeter | 199 | 463386 | Keithley |
| 51 | DC Power Supply | NGSM 32/10 | 203 | Rohde & Schwarz |
| 52 | DC Power Supply | NGB | 2455 | Rohde & Schwarz |
| 53 | DC Power Supply | NGA | 386 | Rohde & Schwarz |
| 54 | Temperature Test Chamber | HT4010 | 07065550 | Heraeus |
| 55 | Cable | RG214 | 1309 | Senton |
| 56 | Cable | 200CM_001 | 1357 | Rosenberger |
| 57 | Cable | 150CM_001 | 1479 | Rosenberger |
| 58 | Cable Set EG1 | RG214 | 1189 - 1191 | Senton |
| 59 | Cable Set Cabine 1 | RG214 | | Senton |
| 60 | Cable Set Cabine 2 | RG214 | | Senton |
| 61 | Cable Set Cabine 3 | RG214 | | Senton |
| 62 | Shielded Room | No. 1 | 1451 | Senton |
| 63 | Shielded Room | No. 2 | 1452 | Senton |
| 64 | Semi-anechoic Chamber | No. 3 | 1453 | Siemens |
| 65 | Shielded Room | No. 4 | 1454 | Euroshield |
| 66 | Open Area Test Site | EG 1 | | Senton |
| 67 | Cable for Antenna Connector | | | Lucent Technologies |
| 68 | DC Block 0.01-18GHz | | 8037 | Inmet Corp. |
| 69 | High pass filter | | | Lucent Technologies |
| 69 | DC Block | 7006 | A2798 | Weinschel Corp. |
| 70 | Cable for Antenna Connector | | | Senton |
| 71 | Dummy load | | | Futaba Corporation |

9. Referenced Regulations

All tests were performed with reference to the following regulations and standards:

| | | | |
|-------------------------------------|----------------------------|--|-------------------|
| <input checked="" type="checkbox"/> | CFR 47 Part 2 | Code of Federal Regulations Part 2 (Frequency Allocations And Radio Treaty Matters, General Rules And Regulations) of the Federal Communication Commission (FCC) | October 1, 1999 |
| <input type="checkbox"/> | CFR 47 Part 15 Subpart A | Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC) | October 1, 1999 |
| <input type="checkbox"/> | CFR 47 Part 15 Subpart B | Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart B (Unintentional Radiators) of the Federal Communication Commission (FCC) | October 1, 1999 |
| <input checked="" type="checkbox"/> | CFR 47 Part 15 Subpart C | Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart C (Intentional Radiators) of the Federal Communication Commission (FCC) | October 1, 1999 |
| <input type="checkbox"/> | CFR 47 Part 95 Subpart C/E | Code of Federal Regulations Part 95 (Personal Radio Services), Subpart C/E (Radio Control(R/C) Radio Service) of the Federal Communication Commission (FCC) | October 1, 1998 |
| <input checked="" type="checkbox"/> | ANSI C63.4 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz - 40 GHz | October, 1992 |
| <input checked="" type="checkbox"/> | RSS-210 | Radio Standards Specification RSS-210 Issue 2 for Low Power Licence-Exempt Radiocommunication Devices of Industry Canada | February 24, 1996 |
| <input type="checkbox"/> | TIA/EIA-603 | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards | February, 1993 |
| <input type="checkbox"/> | TIA/EIA-603-1 | Addendum to TIA/EIA-603 | March 4, 1998 |

10. List of Measurements

| CFR 47 Part 15 Subpart C | | | |
|---------------------------------|---------------------------------------|-------------|---------------|
| Section(s): | Test | Page | Result |
| §15.225 (a) | Maximum in-band field strength | 20 | Passed |
| §15.225 (b) | Out-of-band emissions | 21-22 | Passed |
| §15.225 (c) | Frequency tolerance of carrier signal | 23-24 | Passed |
| | | | |

11. Test Results

**Field Strength of Emissions according to FCC Rules,
Part 15, Subpart C, Section 15.225 (a), (b)
Frequency Band < 30 MHz**

Model: **ID ISC.PRH 100 (RS232)**
 Type: **Inductive Reader**
 Serial No. **0001**
 Applicant: **Feig Electronic GmbH**
 Test Site: **Open Field Test Site (without Ground Plane)**
 Distance: **30 Meter**
 Date of Test: **June 22, 2001**

| Frequency (MHz) | Detector | Antenna Polarization | Analyzer Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit dB μ V/m | Margin dB |
|-----------------|----------|----------------------|-------------------------------|------------------------|-------------------------------|--------------------|-------------|
| 13.553 | Q.P. | N/A | 1.2 | 20 | 21.2 | 29.5 | 8.3 |
| 13.560 | Q.P. | N/A | 31.2 | 20 | 51.2 | 80.0 | 28.8 |
| 13.567 | Q.P. | N/A | 1.3 | 20 | 21.3 | 29.5 | 8.2 |
| 27.125 | Q.P. | N/A | 1.5 | 20 | 21.5 | 29.5 | 8.0 |
| | | | | | | | |
| | | | | | | | |

***** = No emissions above noise floor detected**

Sample calculation of field strength values:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{Analyzer Reading (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

Test equipment used (see equipment list for details):
 02, 13, 14, 16, 38, 40 ,42, 57, 64, 67

**Field Strength of Emissions according to FCC Rules,
Part 15, Subpart C, Section 15.225 (b)
Frequency Band > 30 MHz**

| | |
|---------------|-------------------------------|
| Model: | ID ISC.PRH 100 (RS232) |
| Type: | Inductive Reader |
| Serial No. | 0001 |
| Applicant: | Feig Electronic GmbH |
| Test Site: | Open Field Test Site |
| Distance: | 3 Meter |
| Date of Test: | June 22, 2001 |

| Frequency (MHz) | Detector | Antenna Polarization | Analyzer Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit dB μ V/m | Margin dB |
|-----------------|----------|----------------------|-------------------------------|------------------------|-------------------------------|--------------------|-------------|
| 67.801 | Q.P. | Hor | 18.5 | 10.8 | 29.3 | 40.0 | 10.7 |
| 81.360 | Q.P. | Hor | 17.5 | 11.0 | 28.5 | 40.0 | 11.5 |
| 122.040 | Q.P. | Hor | 21.2 | 14.7 | 35.9 | 43.5 | 7.6 |
| 325.437 | Q.P. | Hor | 23.4 | 20.0 | 43.5 | 46.0 | 2.5 |
| 338.998 | Q.P. | Hor | 25.4 | 20.4 | 45.8 | 46.0 | 0.2 |
| 352.557 | Q.P. | Hor | 22.7 | 20.9 | 43.6 | 46.0 | 2.4 |

*** = No emissions above noise floor detected

Sample calculation of field strength values:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{Analyzer Reading (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

Test equipment used (see equipment list for details):
02, 13, 14, 16, 38, 40 ,42, 57, 64, 67

**Field Strength of Emissions according to FCC Rules,
Part 15, Subpart C, Section 15.225 (b)
Frequency Band > 30 MHz**

Model: **ID ISC.PRH 100 (USB)**
 Type: **Inductive Reader**
 Serial No. **0001**
 Applicant: **Feig Electronic GmbH**
 Test Site: **Open Field Test Site**
 Distance: **3 Meter**
 Date of Test: **June 22, 2001**

| Frequency (MHz) | Detector | Antenna Polarization | Analyzer Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit dB μ V/m | Margin dB |
|-----------------|----------|----------------------|-------------------------------|------------------------|-------------------------------|--------------------|-------------|
| 81.360 | Q.P. | Hor | 28.3 | 11.0 | 39.3 | 40.0 | 0.7 |
| 133.252 | Q.P. | Hor | 15.9 | 15.4 | 31.3 | 43.5 | 12.2 |
| 311.879 | Q.P. | Hor | 22.0 | 19.5 | 41.5 | 43.5 | 2.0 |
| 325.438 | Q.P. | Hor | 24.0 | 20.0 | 44.0 | 46.0 | 2.0 |
| 366.118 | Q.P. | Hor | 23.5 | 21.4 | 44.9 | 46.0 | 1.1 |
| | | | | | | | |

***** = No emissions above noise floor detected**

Sample calculation of field strength values:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{Analyzer Reading (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

Test equipment used (see equipment list for details):
 02, 13, 14, 16, 38, 40 ,42, 57, 64, 67

FREQUENCY STABILITY VS. TEMPERATURE
Section 15.225 (c)

EUT: ID ISC.PRH100
 Serial number: Sample no. 1
 Applicant: FEIG ELECTRONIC GmbH
 Mode: Reading transponder
 Date of test: June 22, 2001
 Operator: Johann Roidt

Test conditions:

Temperature: see table below
 Supply voltage: 5.0 V DC

Specifications:

Frequency tolerance: ±0.01 % of nominal carrier frequency
 Temperature range: -20 to +50°C

| Temperature (°C) | Nominal carrier frequency (MHz) | Frequency measured (MHz) | Frequency deviation (Hz) | Frequency deviation (%) | Limit (%) |
|---------------------|---------------------------------------|--------------------------------|--------------------------------|-------------------------------|--------------|
| -20 | 13,560000 | 13,559887 | -113 | -0,00083 | 0,01 |
| ±0 | 13,560000 | 13,559936 | -64 | -0,00047 | 0,01 |
| +20 | 13,560000 | 13,559875 | -125 | -0,00092 | 0,01 |
| +40 | 13,560000 | 13,559851 | -149 | -0,00110 | 0,01 |
| +50 | 13,560000 | 13,559848 | -152 | -0,00112 | 0,01 |

Result: Test passed

FREQUENCY STABILITY VS. SUPPLY VOLTAGE

Section 15.225 (c)

EUT: ID ISC.PRH100
Serial number: Sample no. 1
Applicant: FEIG ELECTRONIC GmbH
Mode:
Date of test: June 22, 2001
Operator: Johann Roidt

Test conditions:

Temperature: +20°C
Nominal supply voltage: 5.0 V DC

Specifications:

Frequency tolerance: ±0.01 % of nominal carrier frequency
Voltage range: ±15 % of nominal supply voltage

| Supply voltage (V) | Nominal carrier frequency (MHz) | Frequency measured (MHz) | Frequency deviation (Hz) | Frequency deviation (%) | Limit (%) |
|--------------------|---------------------------------|--------------------------|--------------------------|-------------------------|-----------|
| 4.25 | 13.560000 | 13.559871 | -129 | -0.00095 | 0.01 |
| 5.00 | 13.560000 | 13.559875 | -125 | -0.00092 | 0.01 |
| 5.75 | 13.560000 | 13.559888 | -112 | -0.00083 | 0.01 |

Result: Test passed

12. Charts taken during testing


Radiated Emission Test 9 kHz - 30 MHz according to FCC Part 15 Subpart C

| | |
|--|------------------------|
| Model: ID. ISC. PRH 100 | |
| Serial no.:- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Shielded room, cabin no. 2 | |
| Tested on: Test distance 3 metres | |
| Date of test: 06/20/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via RS 232 |
| - reading area in vertical position |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - monitor switched off |

Detector:
Peak / Final Results: QP

Final results:
Selected by hand

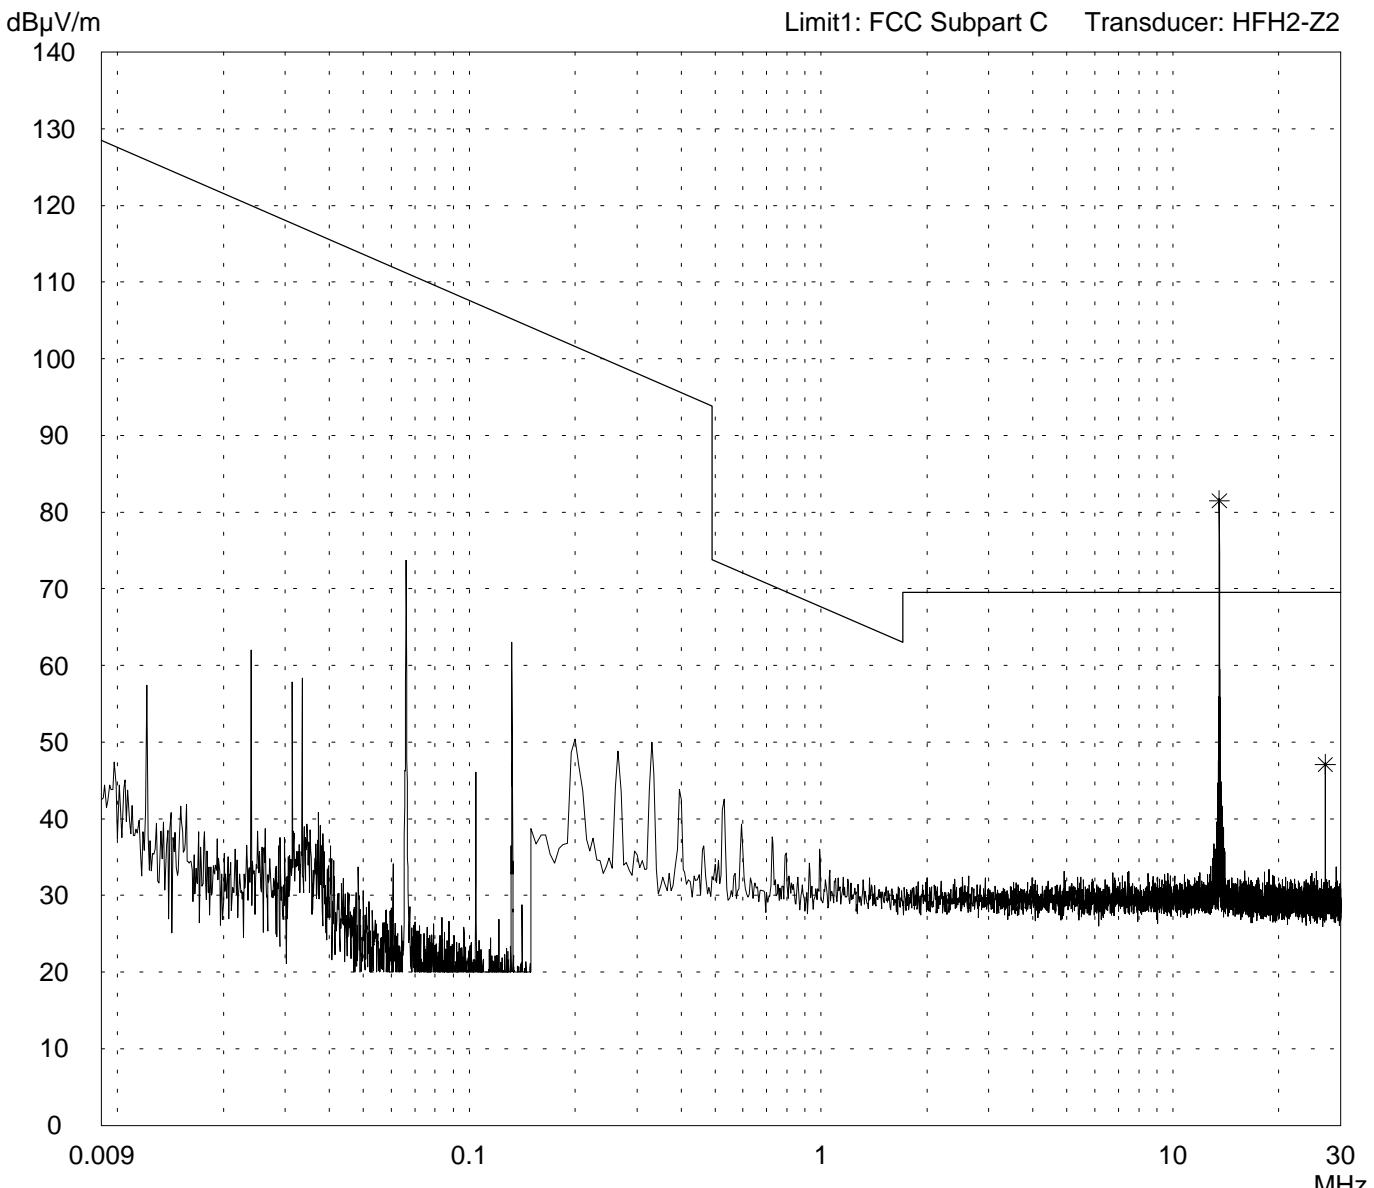

Result:
Prescan

Project file:
50602-10395-2

Page 26 of 49 Pages


Radiated Emission Test 9 kHz - 30 MHz according to FCC Part 15 Subpart C

| | |
|--|------------------------|
| Model: ID. ISC. PRH 100 | |
| Serial no.: | - |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Shielded room, cabin no. 2 | |
| Tested on: Test distance 3 metres | |
| Date of test: 06/20/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via RS 232 |
| - with AC/DC adapter FW7283/05 |
| - monitor switched off |
| - waiting for tag (continuous transmission) |
| - reading area in horizontal position (on table) |

| | | |
|---------------------------------------|--------------------------------|--------------|
| Detector: Peak / Final Results: QP | Final results: 20 dB Margin | 25 Subranges |
|---------------------------------------|--------------------------------|--------------|

| | |
|--------------------------------|--------------|
| Final results: 20 dB Margin | 25 Subranges |
|--------------------------------|--------------|

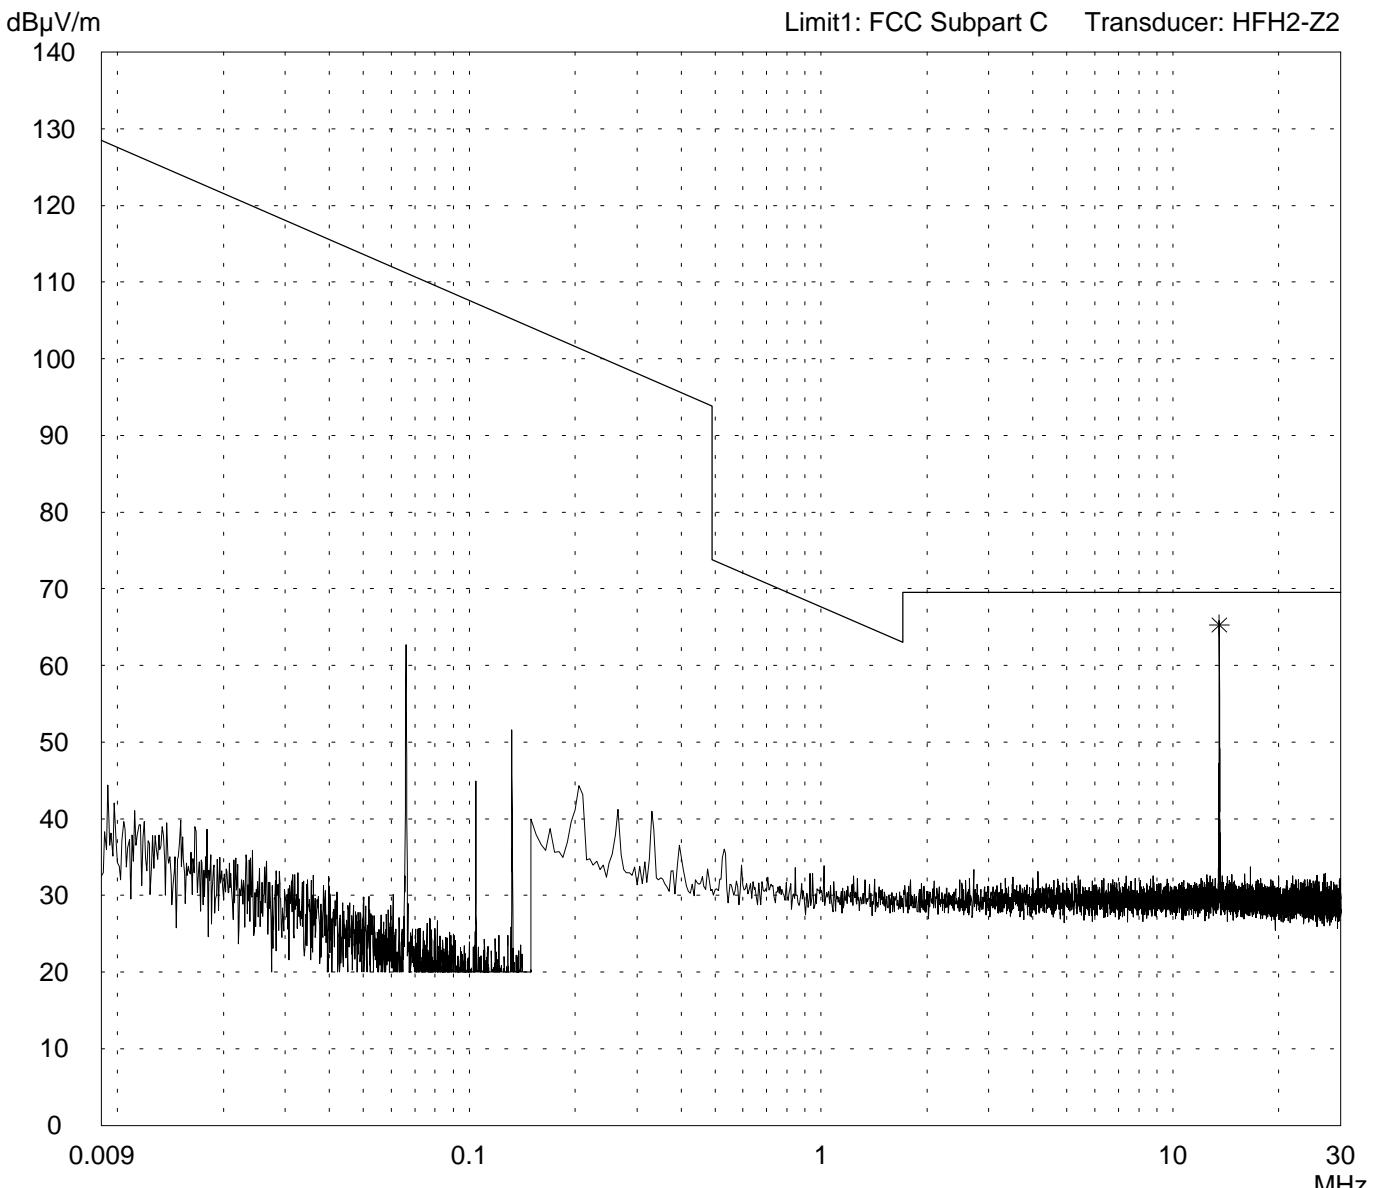


| |
|--------------------|
| Result: Prescan |
|--------------------|

| | |
|--------------------------------|---------------------|
| Project file: 50602-10395-2 | Page 27 of 49 Pages |
|--------------------------------|---------------------|

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

| |
|---|
| Model: ID ISC.PRH100 |
| Serial no.: --- |
| Applicant: FEIG-Electronic-GmbH |
| Test site: Semi anechoic room, cabin no. 3 |
| Tested on: Test distance 3 meters Horizontal Polarization |
| Date of test: 06/25/2001 Operator: R. Heller |
| Test performed: automatically File name: |
| Detector: Peak |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via RS 232 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in vertical position |

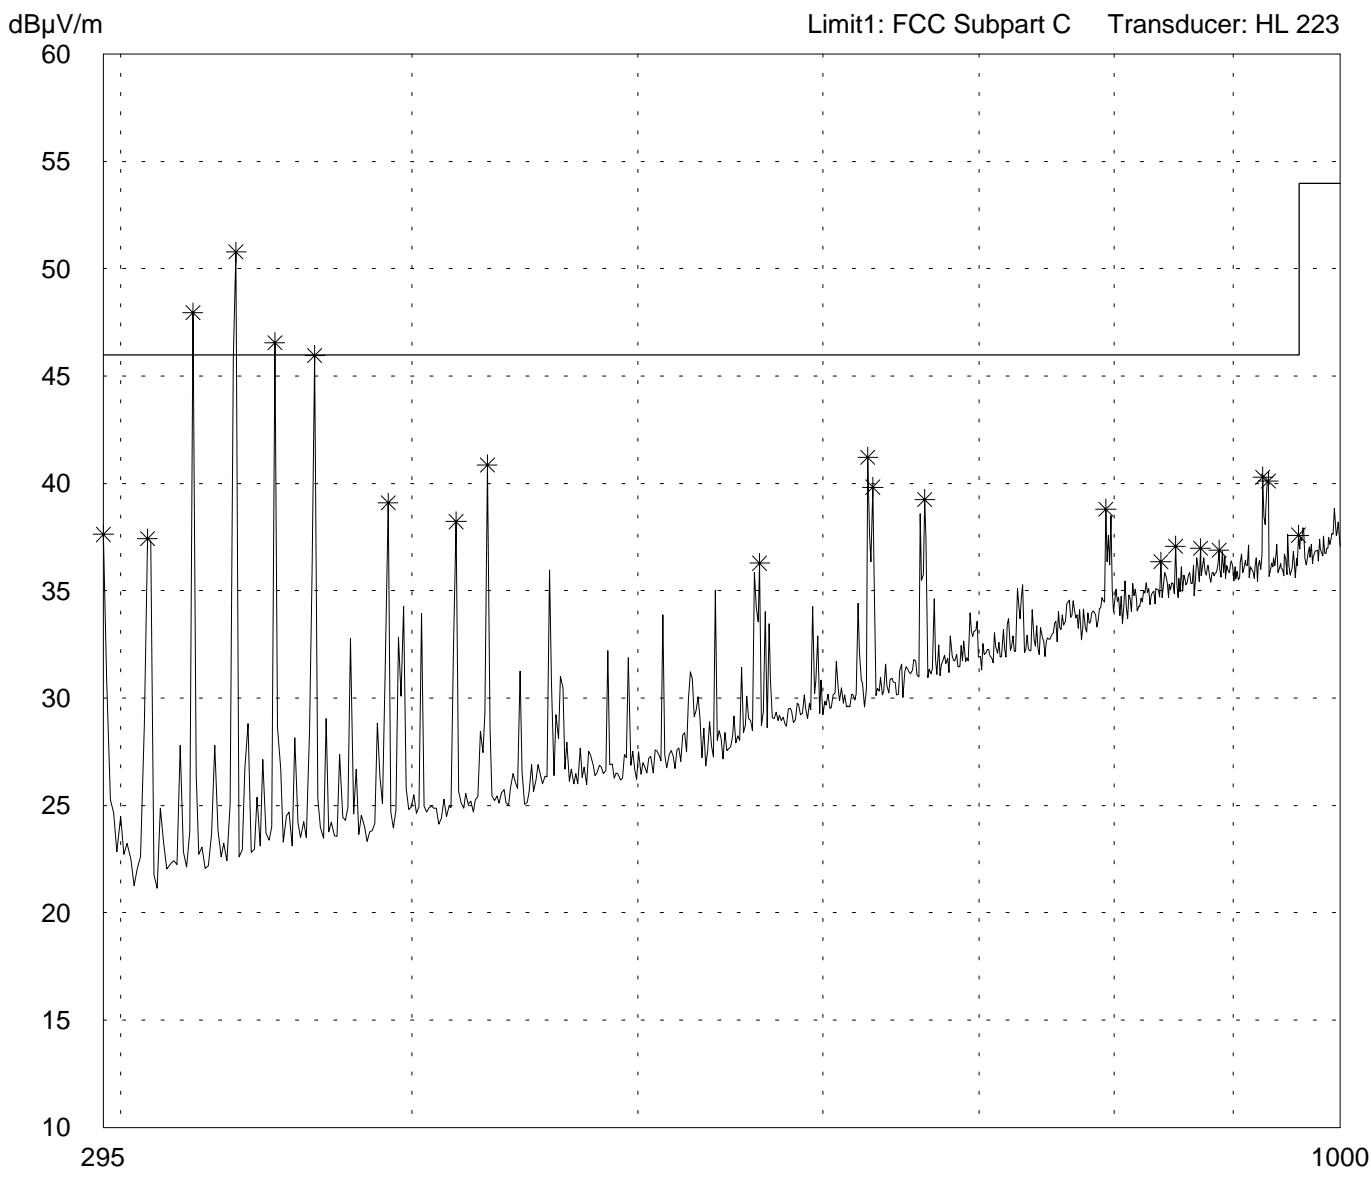

| |
|--------------------|
| Result: Prescan |
|--------------------|


| |
|--------------------------------|
| Project file: 50602-10395-2 |
| Page 28 of 49 Pages |

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

| | |
|---|---------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Test distance 3 meters Horizontal Polarization | |
| Date of test: 06/25/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via RS 232 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in horizontal position (on table) |

Detector: Peak List of values: 10 dB Margin 50 Subranges

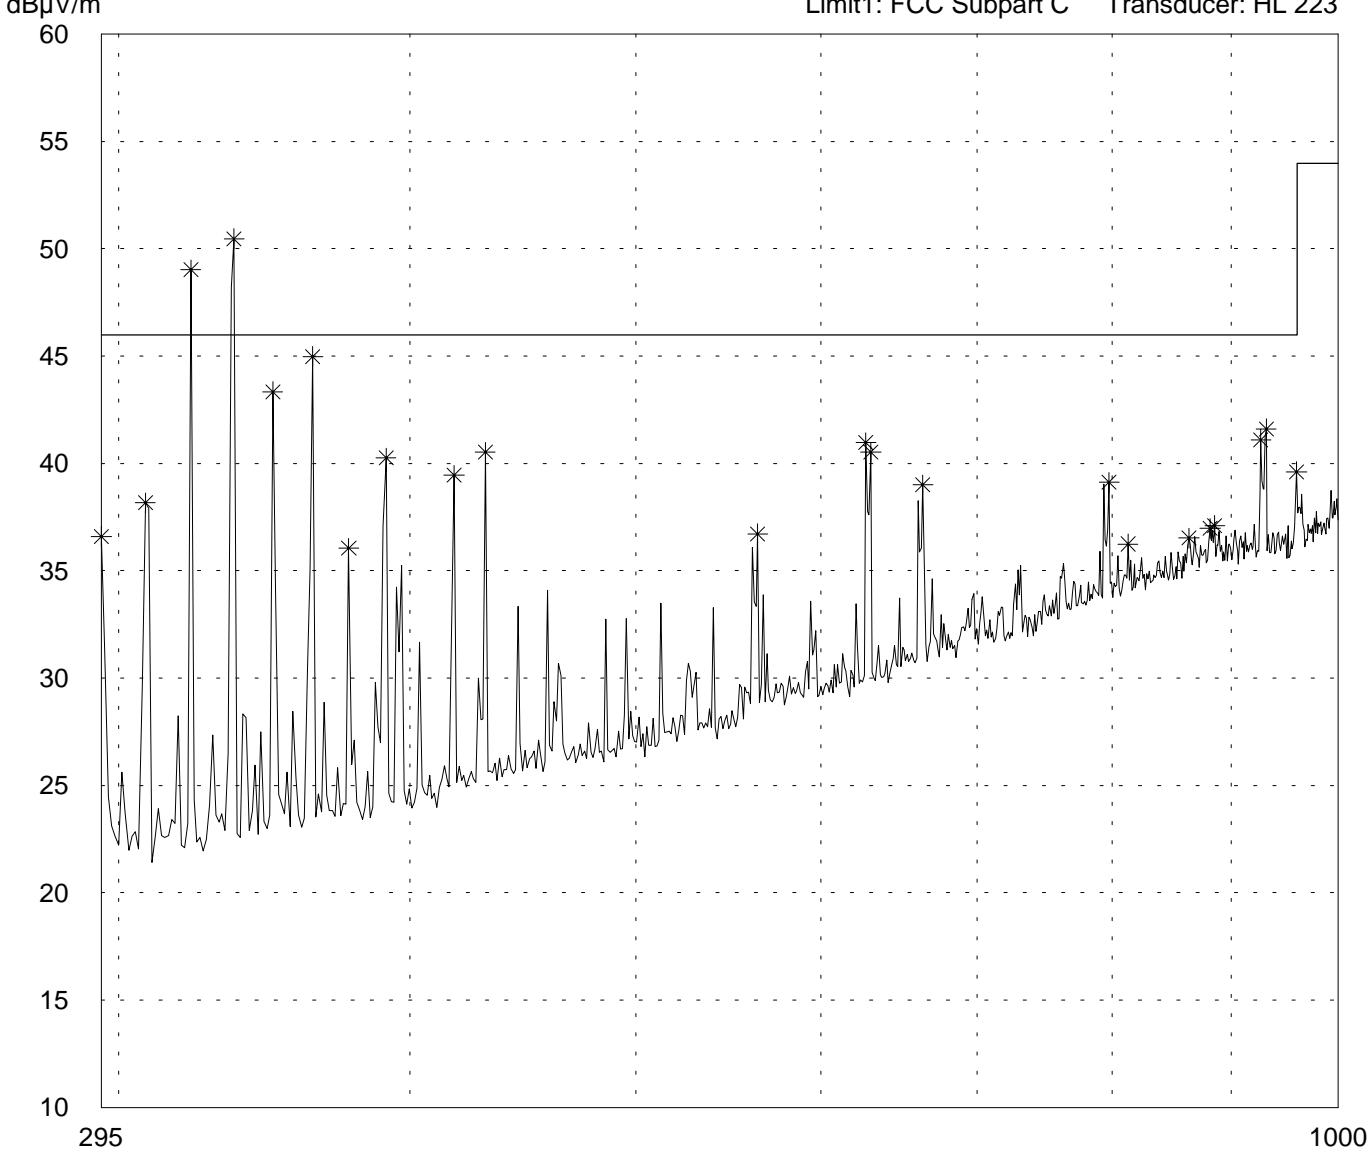

| |
|--------------------|
| Result: Prescan |
|--------------------|


| |
|--------------------------------|
| Project file: 50602-10395-2 |
| Page 29 of 49 Pages |

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Test distance 3 meters Vertical Polarization | |
| Date of test: 06/25/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via RS 232 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in horizontal position (on table) |

| | | |
|-------------------|---------------------------------|--------------|
| Detector: Peak | List of values: 10 dB Margin | 50 Subranges |
|-------------------|---------------------------------|--------------|

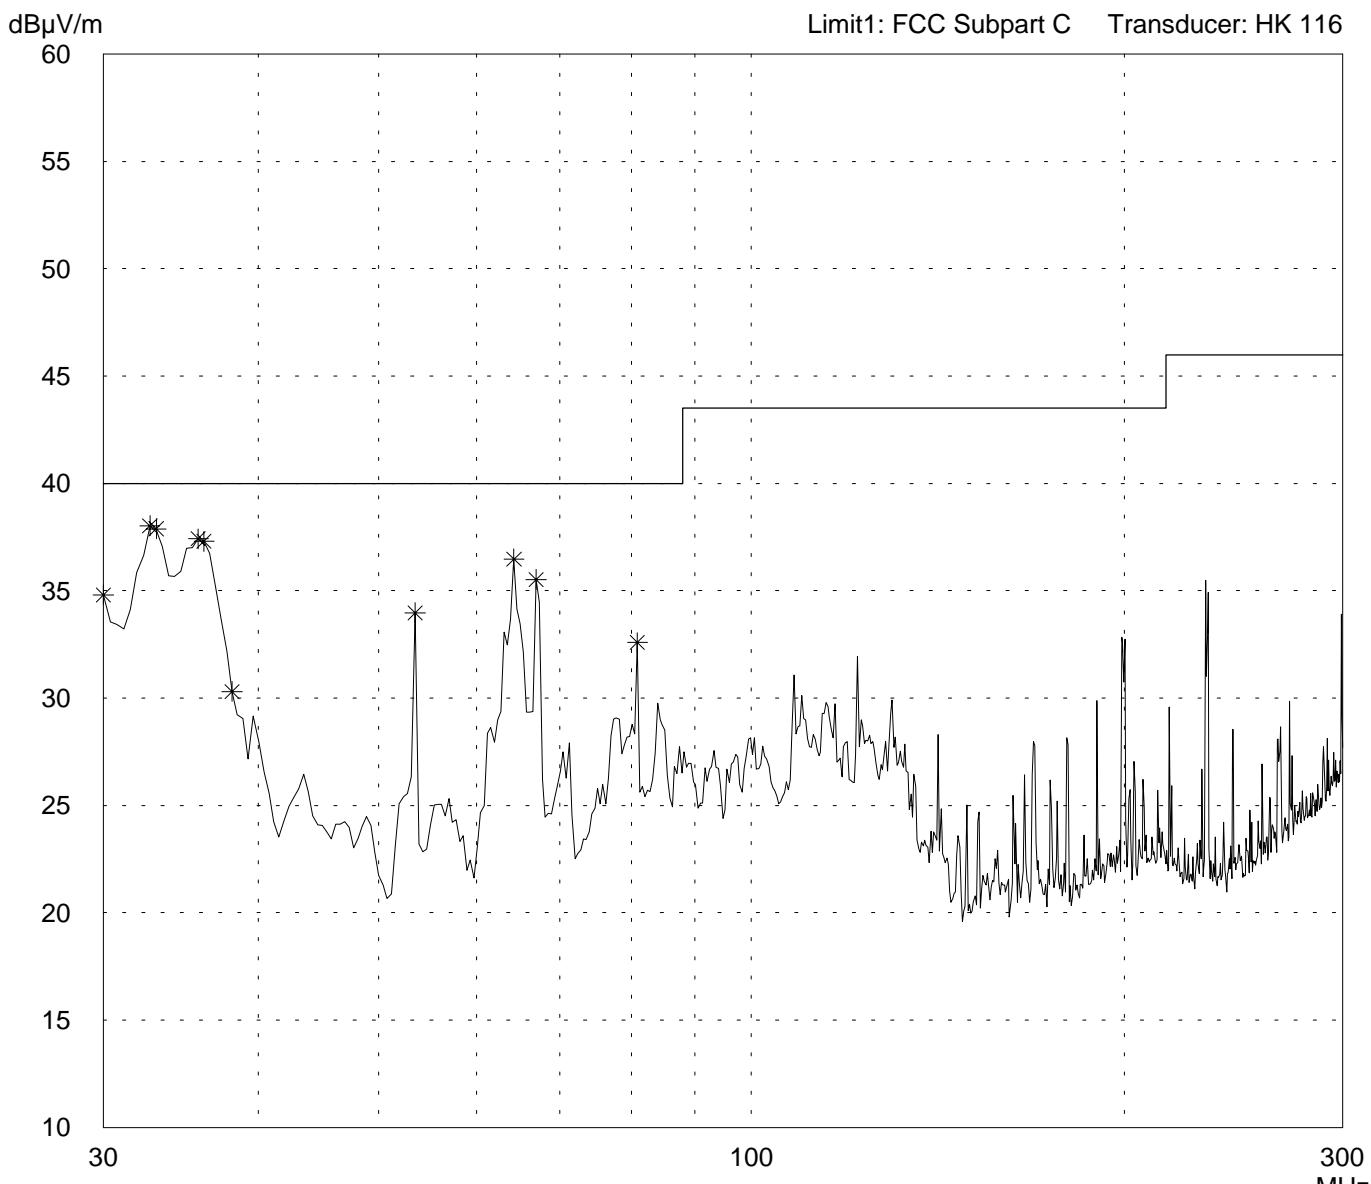

| |
|--------------------|
| Result: Prescan |
|--------------------|


| | |
|--------------------------------|---------------------|
| Project file: 50602-10395-2 | Page 30 of 49 Pages |
|--------------------------------|---------------------|

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Test distance 3 meters Vertical Polarization | |
| Date of test: 06/25/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: <ul style="list-style-type: none"> - FCC test setup - with supply voltage 115 V AC - EUT connected to personal computer Dell Dimension 4100 via RS 232 - with AC/DC adapter FW7283/05 - waiting for tag (continuous transmission) - reading area in horizontal position (on table) |
|---|

Detector: Peak List of values: 10 dB Margin 50 Subranges

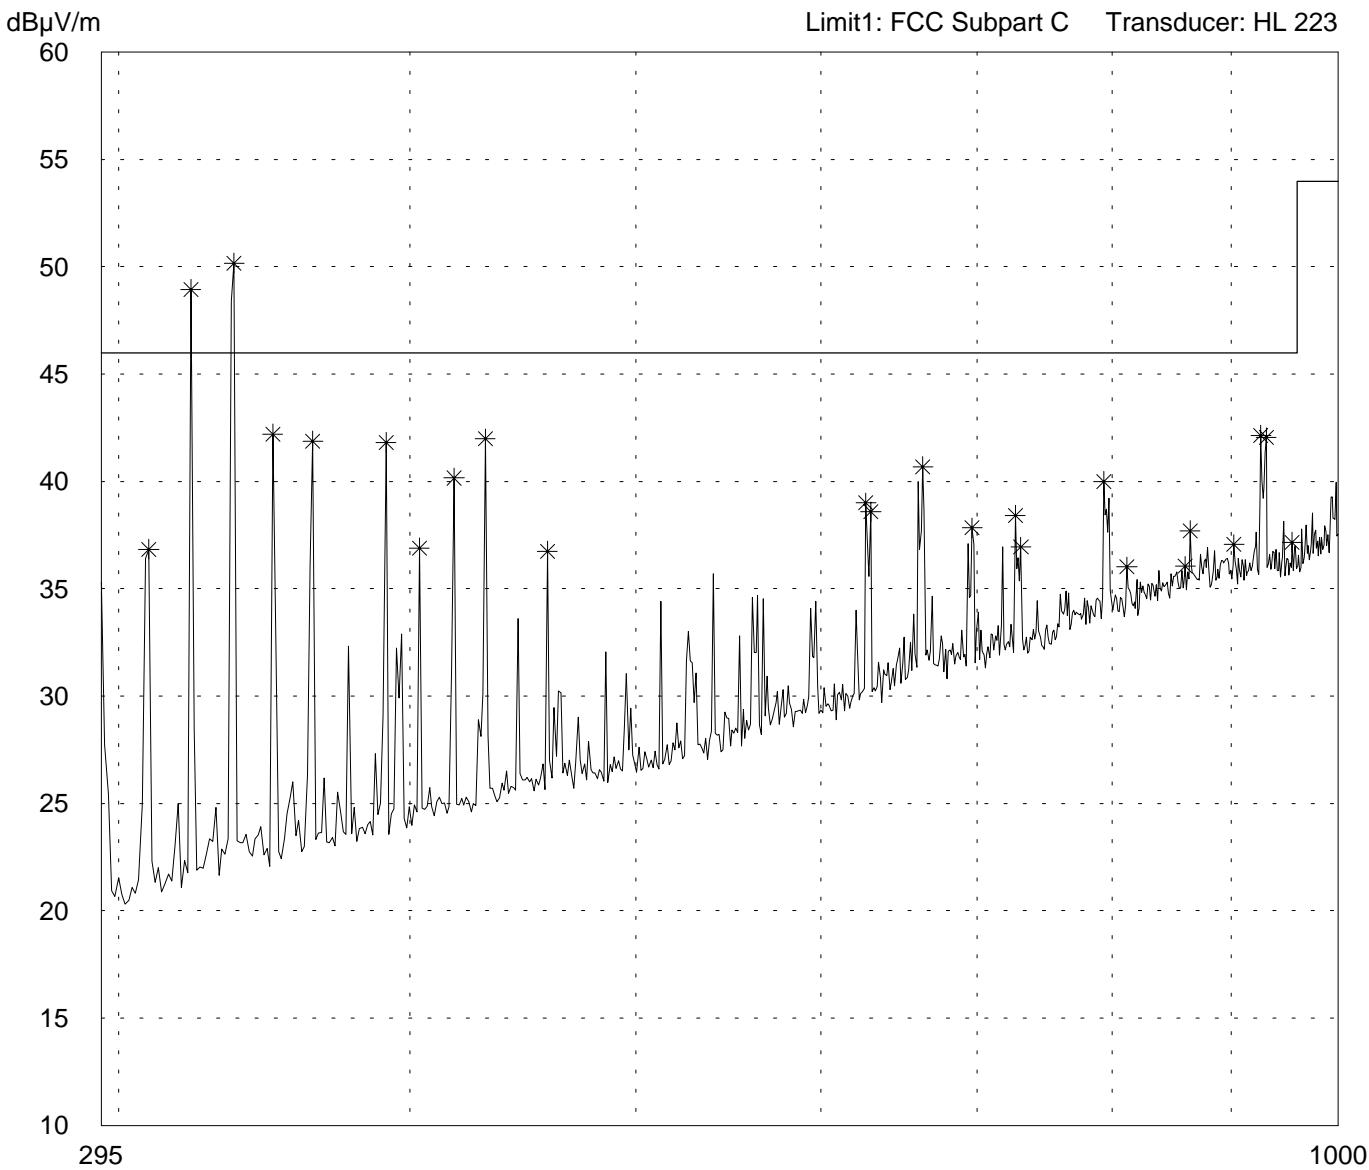

| |
|--------------------|
| Result: Prescan |
|--------------------|

| | |
|--------------------------------|---------------------|
| Project file: 50602-10395-2 | Page 31 of 49 Pages |
|--------------------------------|---------------------|


Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Test distance 3 meters Horizontal Polarization | |
| Date of test: 06/25/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via RS 232 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in vertical position |

Detector: Peak

List of values:
10 dB Margin 50 Subranges

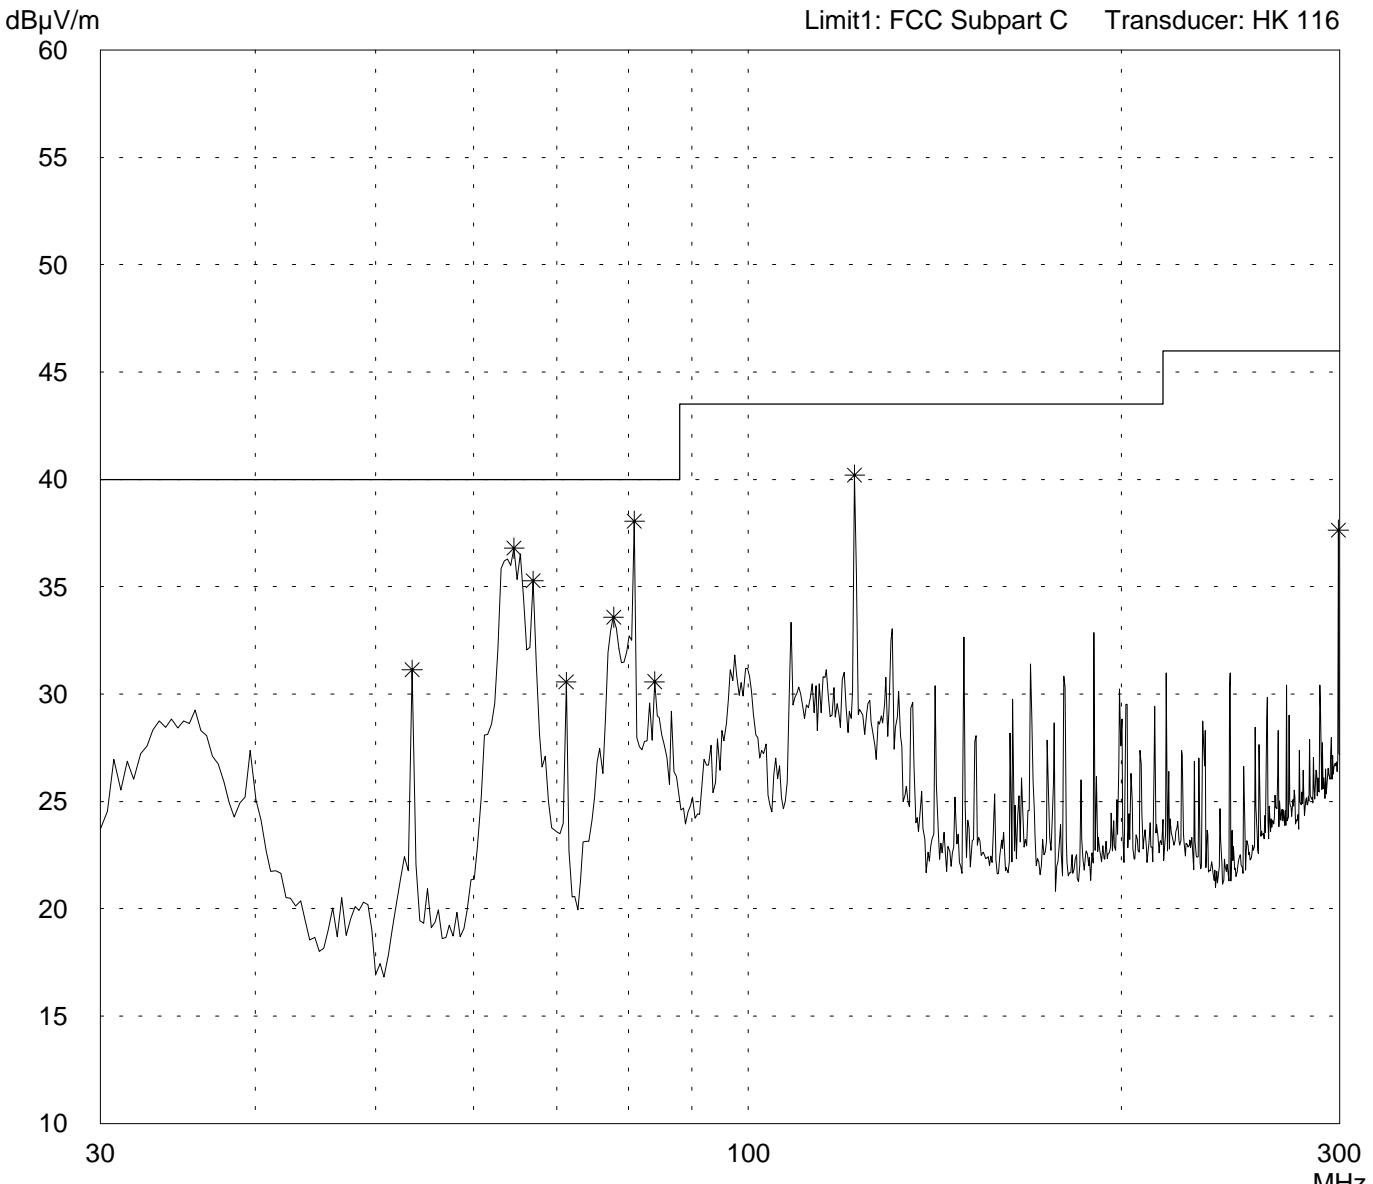

Result:
Prescan

Project file:
50602-10395-2 Page 32 of 49 Pages


Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Horizontal Polarization | |
| Test distance 3 meters | |
| Date of test: 06/25/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via RS 232 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in horizontal position (on table) |

Detector: Peak

List of values:
10 dB Margin 50 Subranges

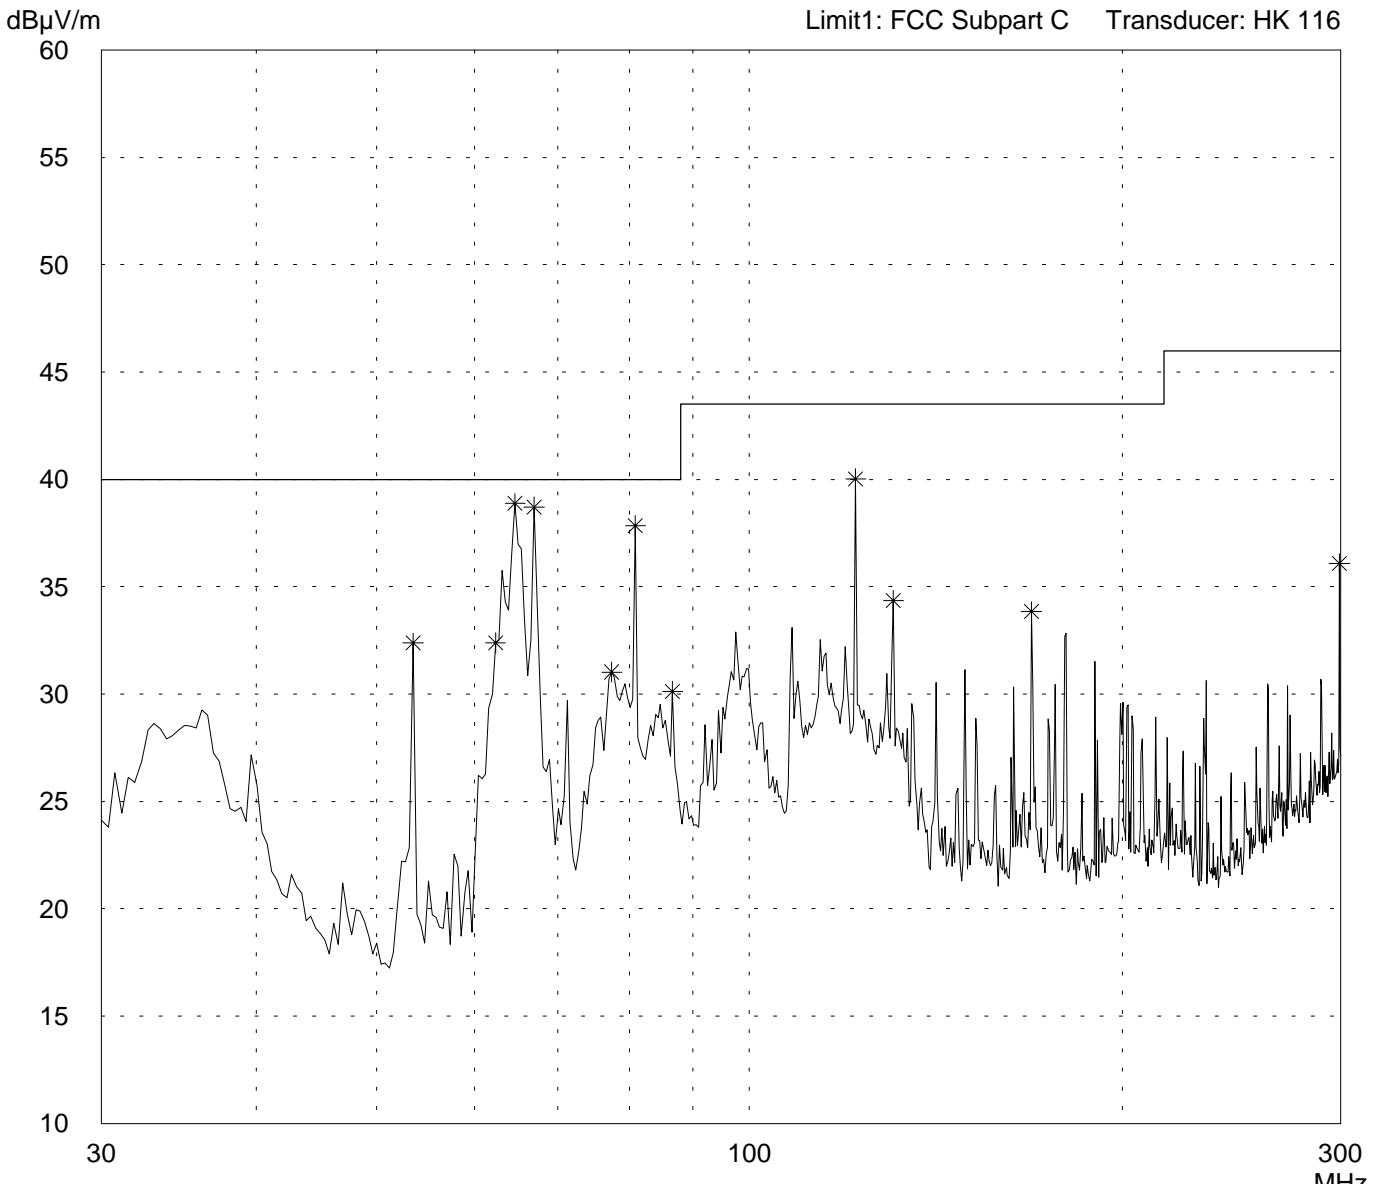

Result:
Prescan

Project file:
50602-10395-2


Page 33 of 49 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Test distance 3 meters Vertical Polarization | |
| Date of test: 06/25/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via RS 232 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in vertical position |

| | | |
|-------------------|---------------------------------|--------------|
| Detector: Peak | List of values: 10 dB Margin | 50 Subranges |
|-------------------|---------------------------------|--------------|

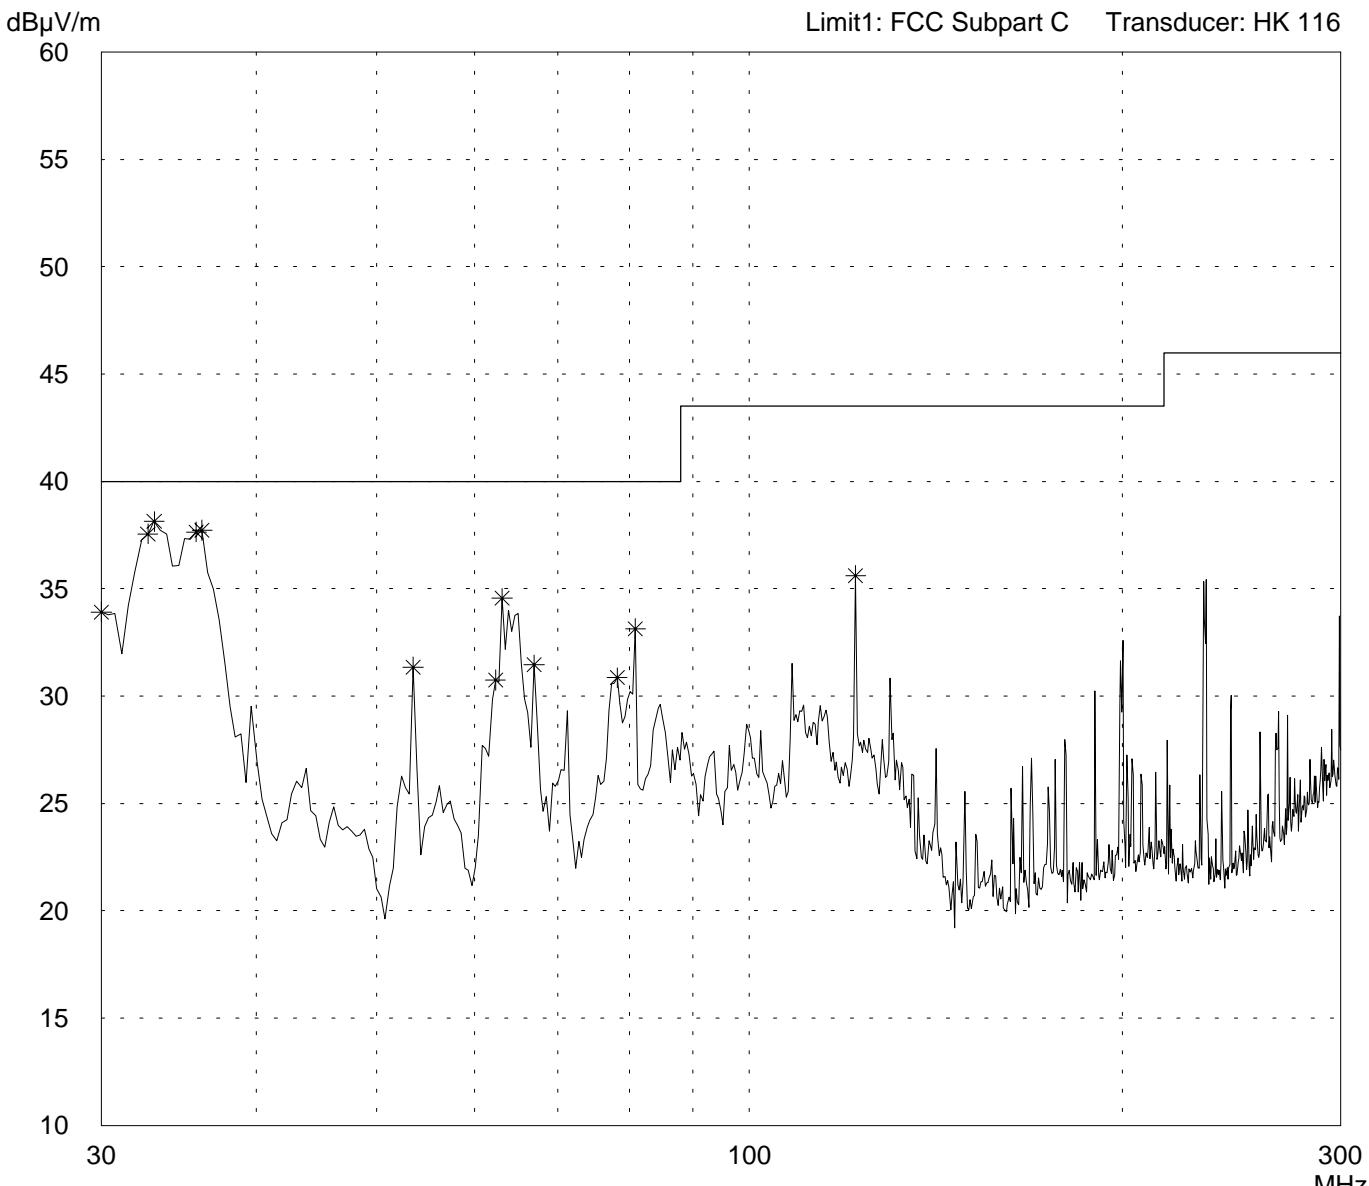


| |
|--------------------|
| Result: Prescan |
|--------------------|

| | |
|--------------------------------|---------------------|
| Project file: 50602-10395-2 | Page 34 of 49 Pages |
|--------------------------------|---------------------|

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

| |
|---|
| Model: ID ISC.PRH100 |
| Serial no.: --- |
| Applicant: FEIG-Electronic-GmbH |
| Test site: Semi anechoic room, cabin no. 3 |
| Tested on: Test distance 3 meters Vertical Polarization |
| Date of test: 06/25/2001 Operator: R. Heller |
| Test performed: automatically File name: |
| Detector: Peak |

| |
|--|
| Mode: <ul style="list-style-type: none"> - FCC test setup - with supply voltage 115 V AC - EUT connected to personal computer Dell Dimension 4100 via RS 232 - with AC/DC adapter FW7283/05 - waiting for tag (continuous transmission) - reading area in vertical position |
| List of values: 10 dB Margin 50 Subranges |

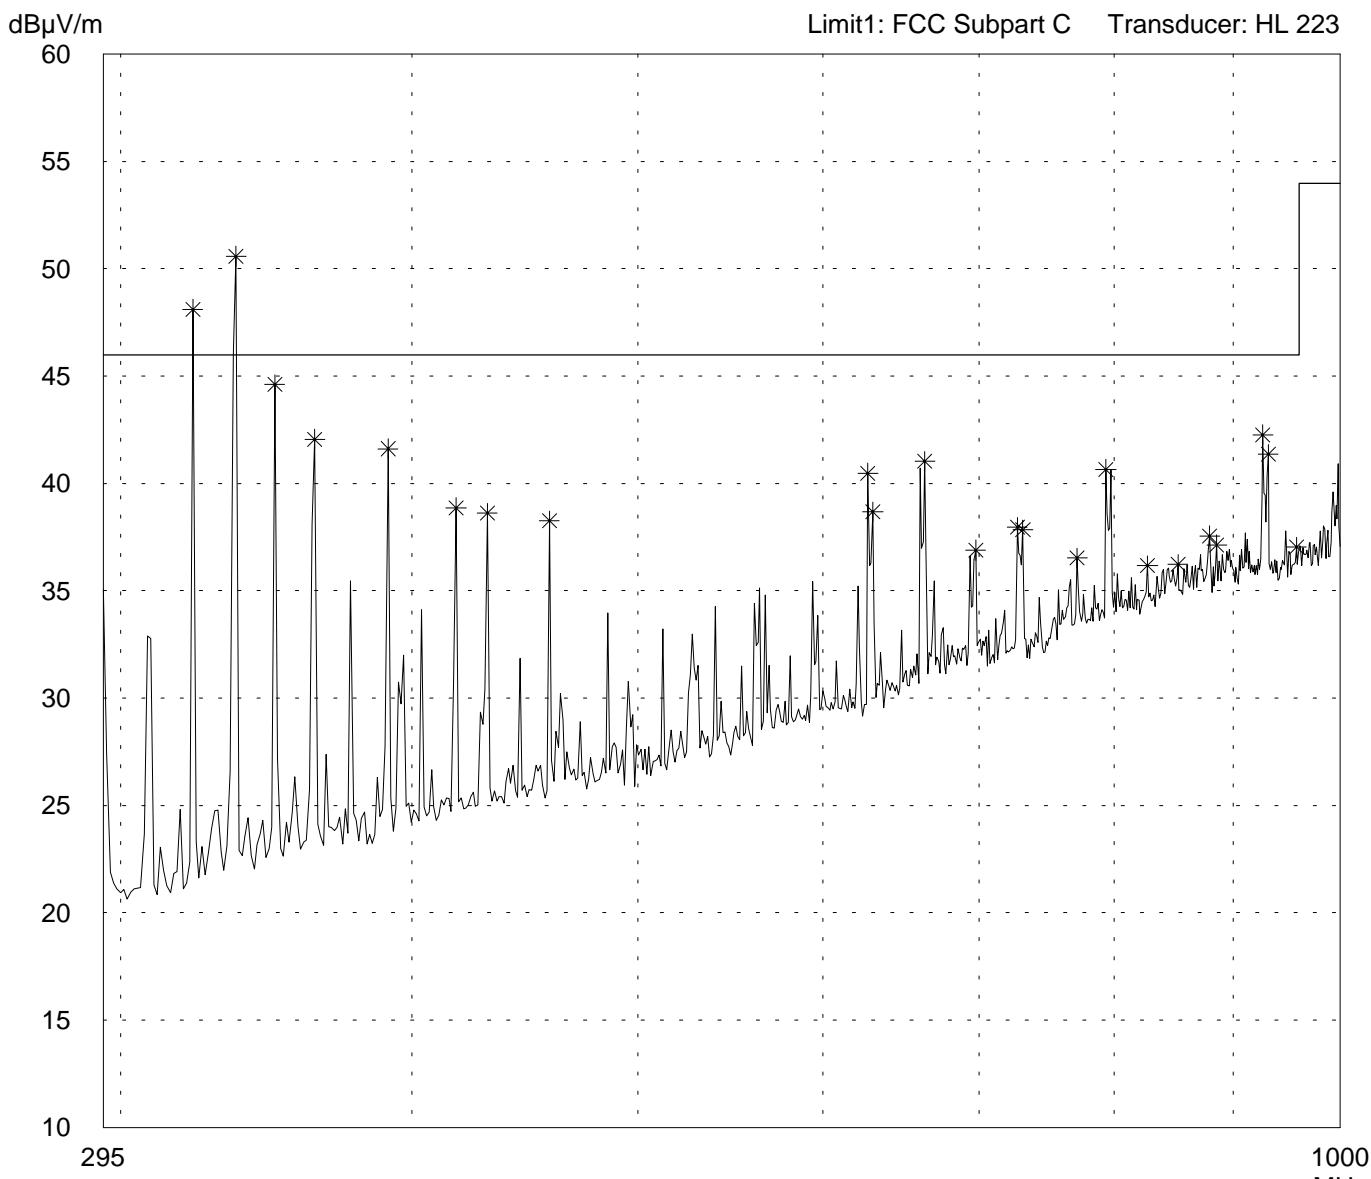

| |
|--------------------|
| Result: Prescan |
|--------------------|


| |
|--------------------------------|
| Project file: 50602-10395-2 |
| Page 35 of 49 Pages |

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Horizontal Polarization | |
| Date of test: 06/25/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via RS 232 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in vertical position with side on table |

| | | |
|-------------------|---------------------------------|--------------|
| Detector: Peak | List of values: 10 dB Margin | 50 Subranges |
|-------------------|---------------------------------|--------------|

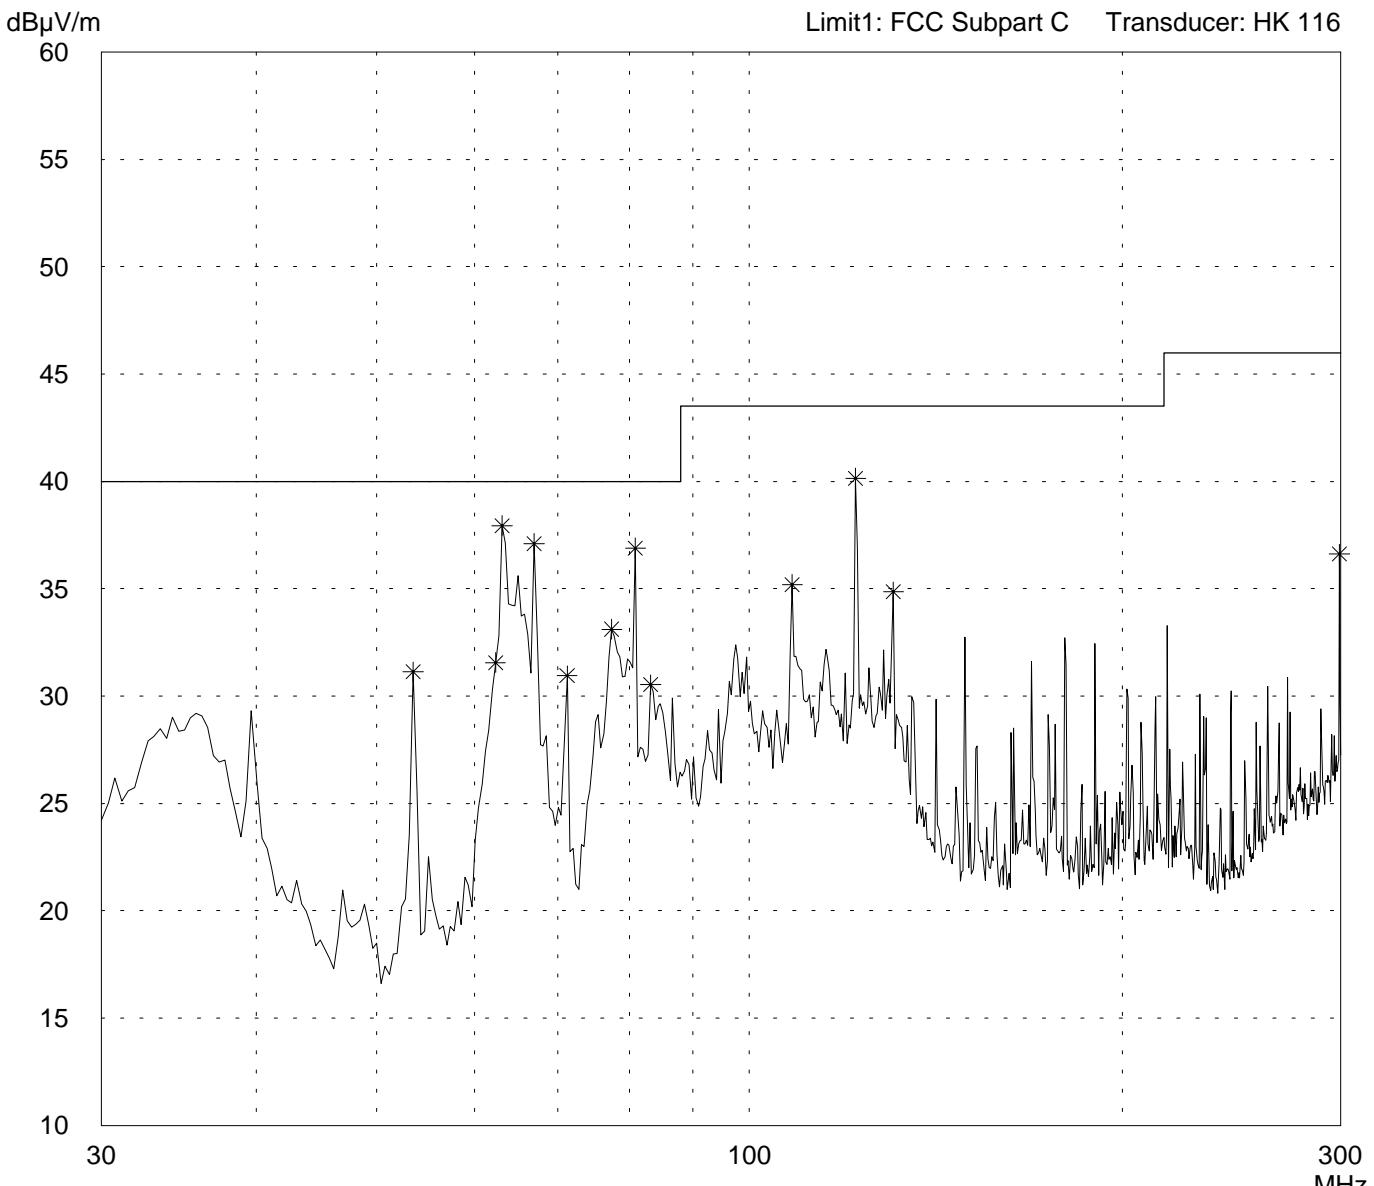

| |
|--------------------|
| Result: Prescan |
|--------------------|

| | |
|--------------------------------|---------------------|
| Project file: 50602-10395-2 | Page 36 of 49 Pages |
|--------------------------------|---------------------|


Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: 06/25/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |
| Detector: Peak | |

Mode:
 - FCC test setup
 - with supply voltage 115 V AC
 - EUT connected to personal computer Dell Dimension 4100 via RS 232
 - with AC/DC adapter FW7283/05

 - waiting for tag (continuous transmission)

 - reading area in vertical position with side on table

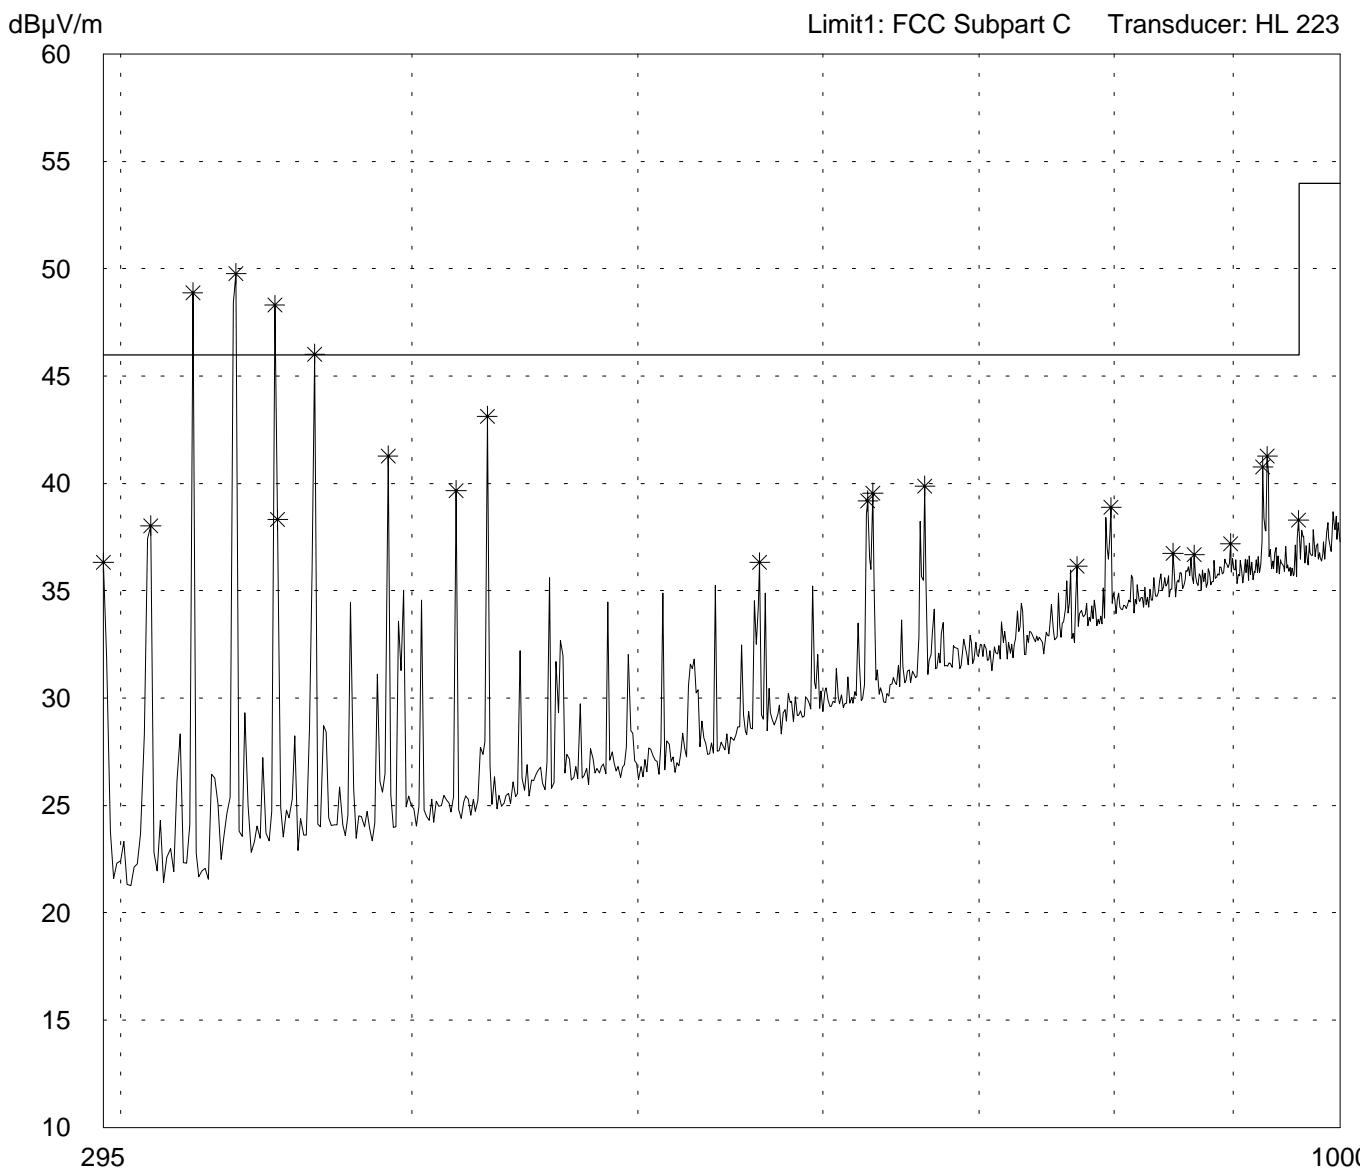

Result:
Prescan


Project file:
50602-10395-2

Page 37 of 49 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Test distance 3 meters Vertical Polarization | |
| Date of test: 06/25/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |
| Detector: Peak | |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via RS 232 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in vertical position with side on table |

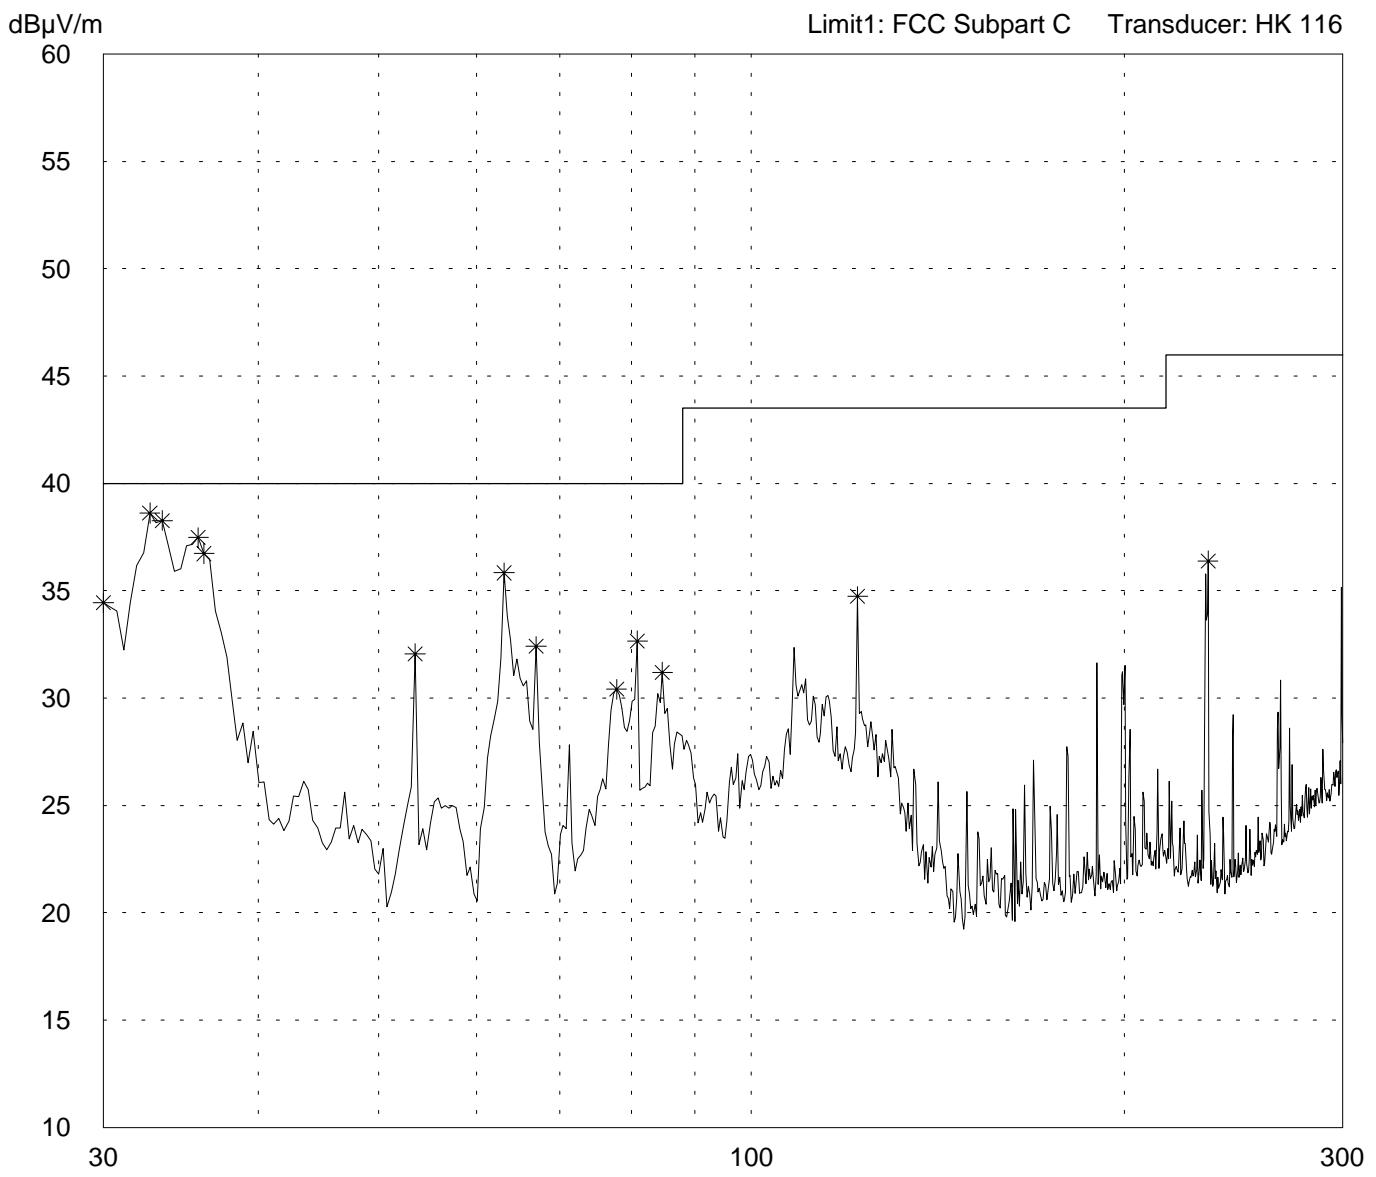

| |
|--------------------|
| Result: Prescan |
|--------------------|


| | |
|--------------------------------|---------------------|
| Project file: 50602-10395-2 | Page 38 of 49 Pages |
|--------------------------------|---------------------|

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Test distance 3 meters Vertical Polarization | |
| Date of test: 06/25/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: <ul style="list-style-type: none"> - FCC test setup - with supply voltage 115 V AC - EUT connected to personal computer Dell Dimension 4100 via RS 232 - with AC/DC adapter FW7283/05 - waiting for tag (continuous transmission) - reading area in vertical position with side on table |
|---|

| | | |
|-------------------|---------------------------------|--------------|
| Detector: Peak | List of values: 10 dB Margin | 50 Subranges |
|-------------------|---------------------------------|--------------|

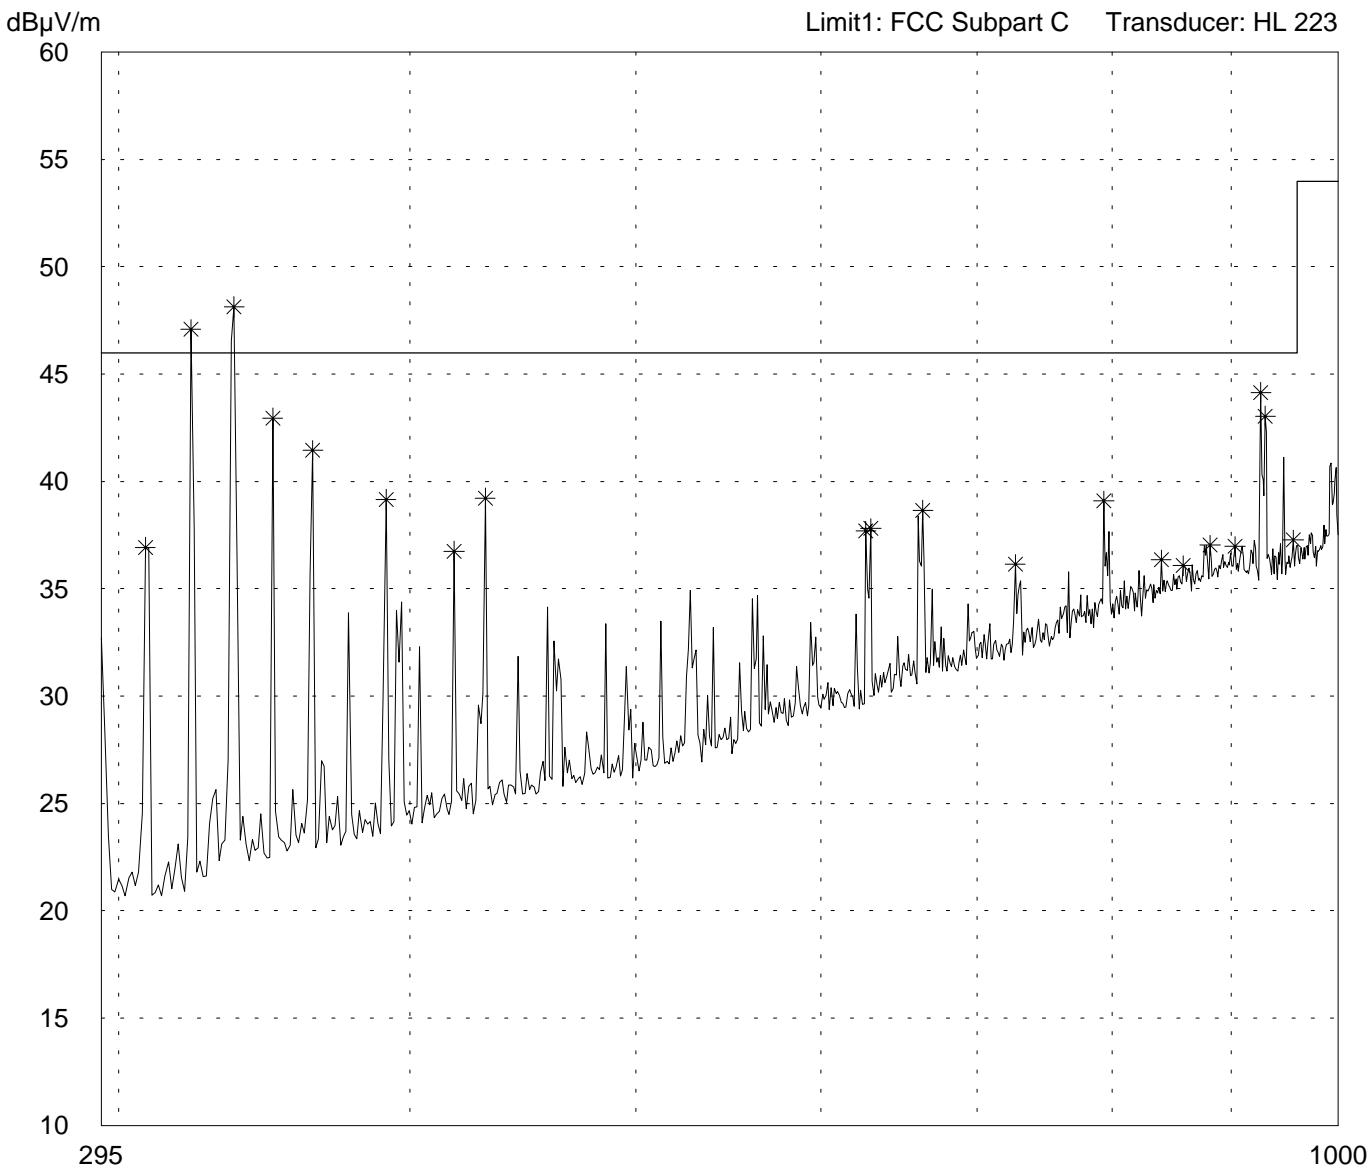

| |
|--------------------|
| Result: Prescan |
|--------------------|


| | |
|--------------------------------|---------------------|
| Project file: 50602-10395-2 | Page 39 of 49 Pages |
|--------------------------------|---------------------|

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Horizontal Polarization | |
| Date of test: 07/10/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via USB port 2 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in vertical position |

| | | |
|-------------------|---------------------------------|--------------|
| Detector: Peak | List of values: 10 dB Margin | 50 Subranges |
|-------------------|---------------------------------|--------------|

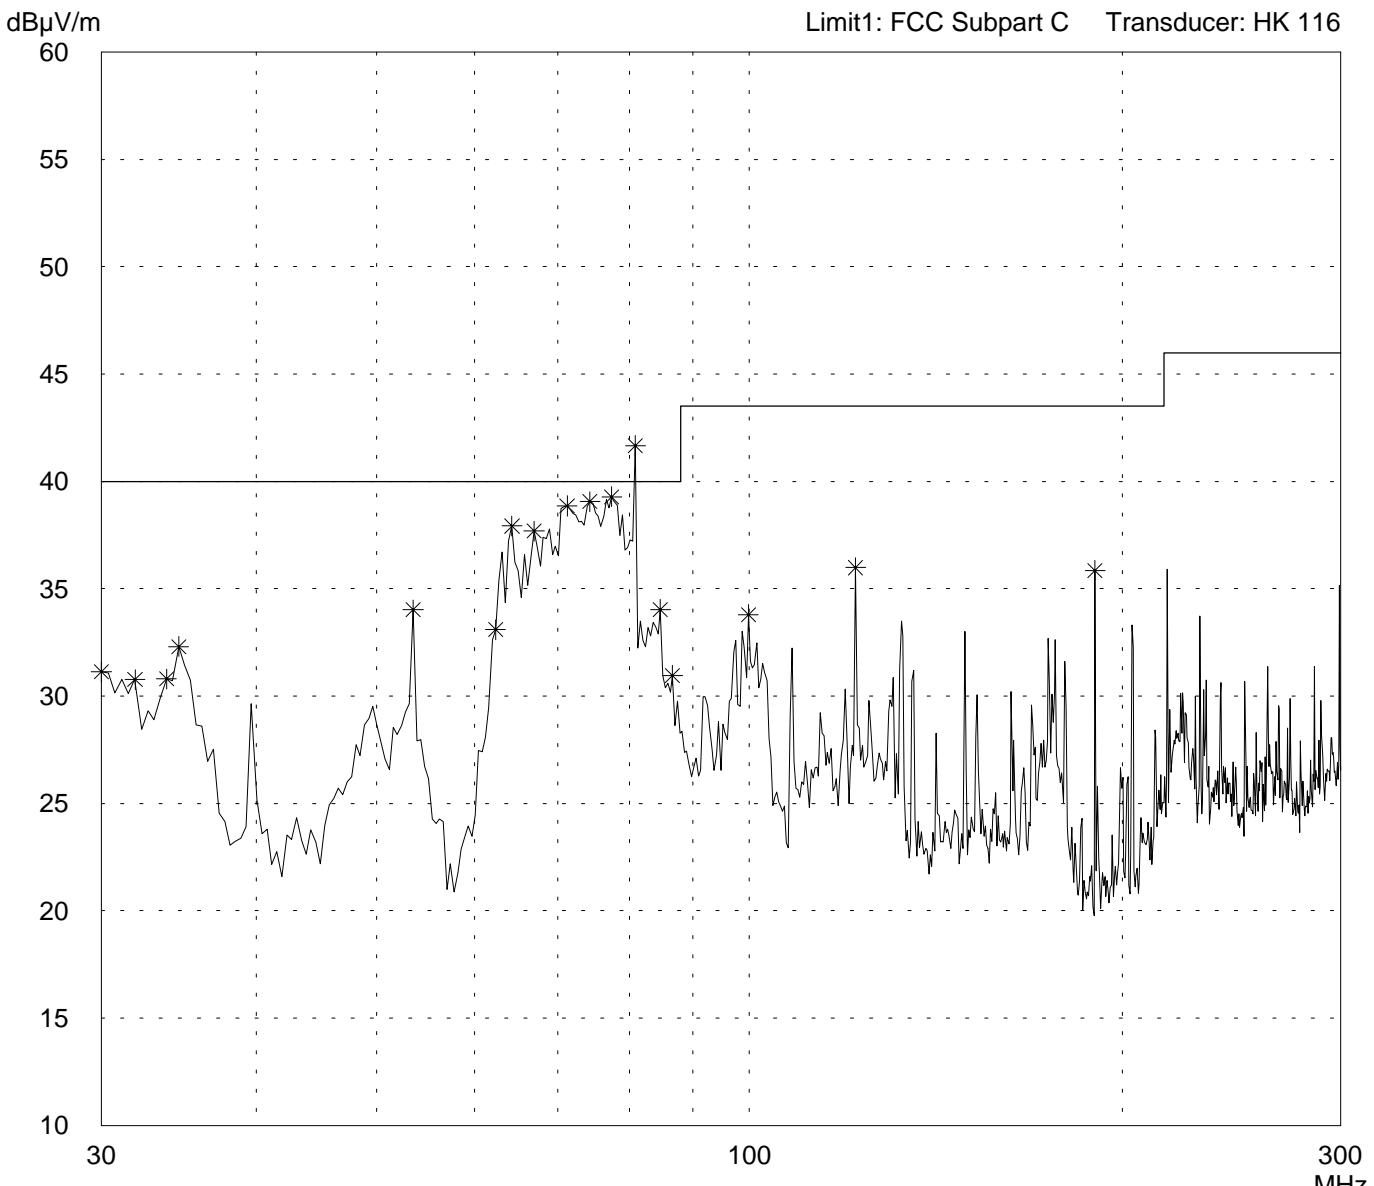


| |
|--------------------|
| Result: Prescan |
|--------------------|

| | |
|--------------------------------|---------------------|
| Project file: 50602-10395-2 | Page 40 of 49 Pages |
|--------------------------------|---------------------|

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

| |
|---|
| Model: ID ISC.PRH100 |
| Serial no.: --- |
| Applicant: FEIG-Electronic-GmbH |
| Test site: Semi anechoic room, cabin no. 3 |
| Tested on: Test distance 3 meters Horizontal Polarization |
| Date of test: 07/10/2001 Operator: R. Heller |
| Test performed: automatically File name: |
| Detector: Peak |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via USB port 2 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in horizontal position (on table) |

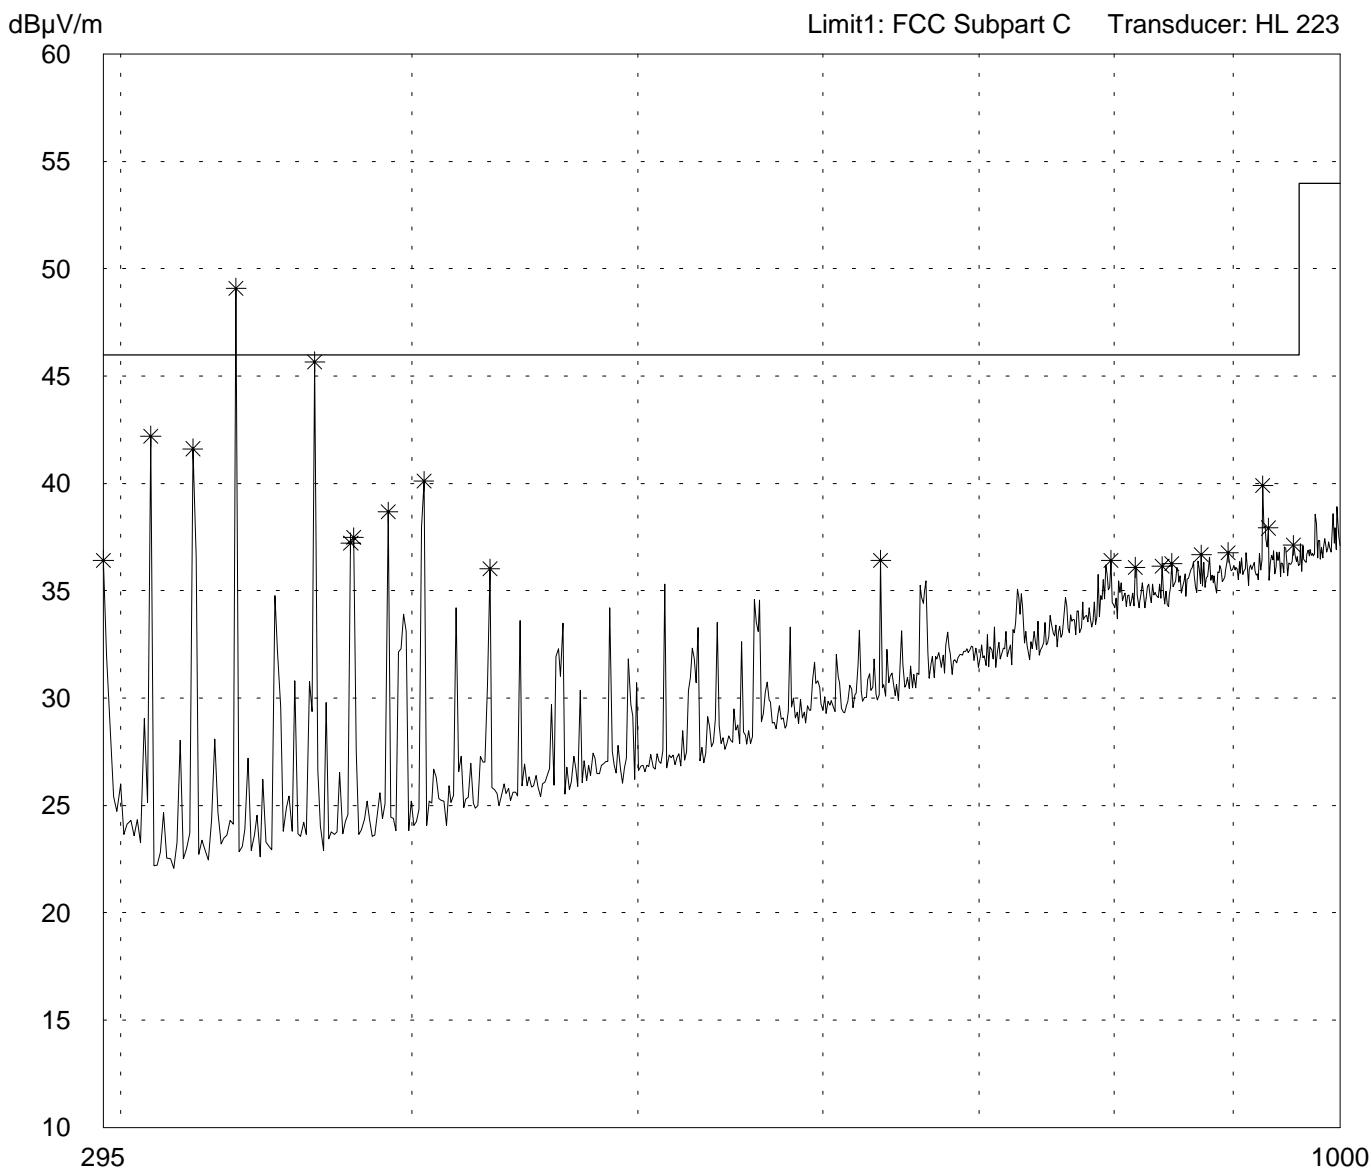

| |
|--------------------|
| Result: Prescan |
|--------------------|

| |
|--------------------------------|
| Project file: 50602-10395-2 |
| Page 41 of 49 Pages |


Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: 07/10/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via USB port 2 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in horizontal position (on table) |

Detector: Peak

List of values:
10 dB Margin 50 Subranges

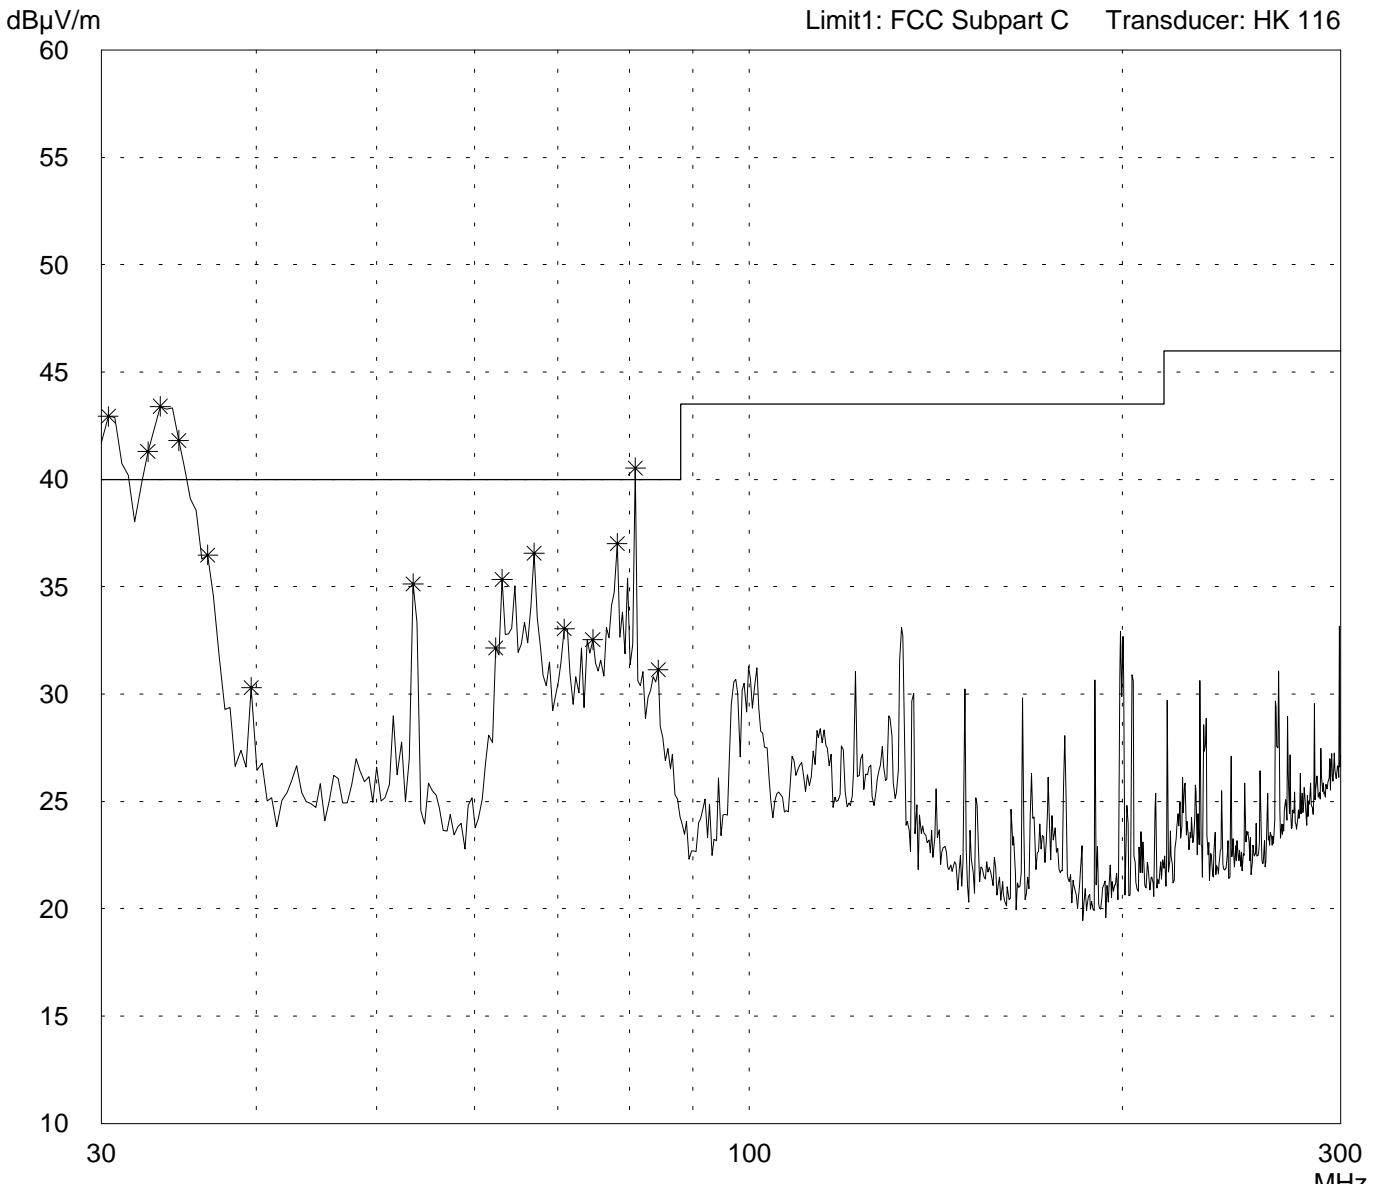

Result:
Prescan

Project file:
50602-10395-2


Page 42 of 49 Pages

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

| |
|---|
| Model: ID ISC.PRH100 |
| Serial no.: --- |
| Applicant: FEIG-Electronic-GmbH |
| Test site: Semi anechoic room, cabin no. 3 |
| Tested on: Test distance 3 meters Vertical Polarization |
| Date of test: 07/10/2001 Operator: R. Heller |
| Test performed: automatically File name: |

| |
|---|
| Mode: <ul style="list-style-type: none"> - FCC test setup - with supply voltage 115 V AC - EUT connected to personal computer Dell Dimension 4100 via USB port 2 - with AC/DC adapter FW7283/05 - waiting for tag (continuous transmission) - reading area in horizontal position (on table) |
|---|

Detector: Peak List of values:
Peak 10 dB Margin 50 Subranges

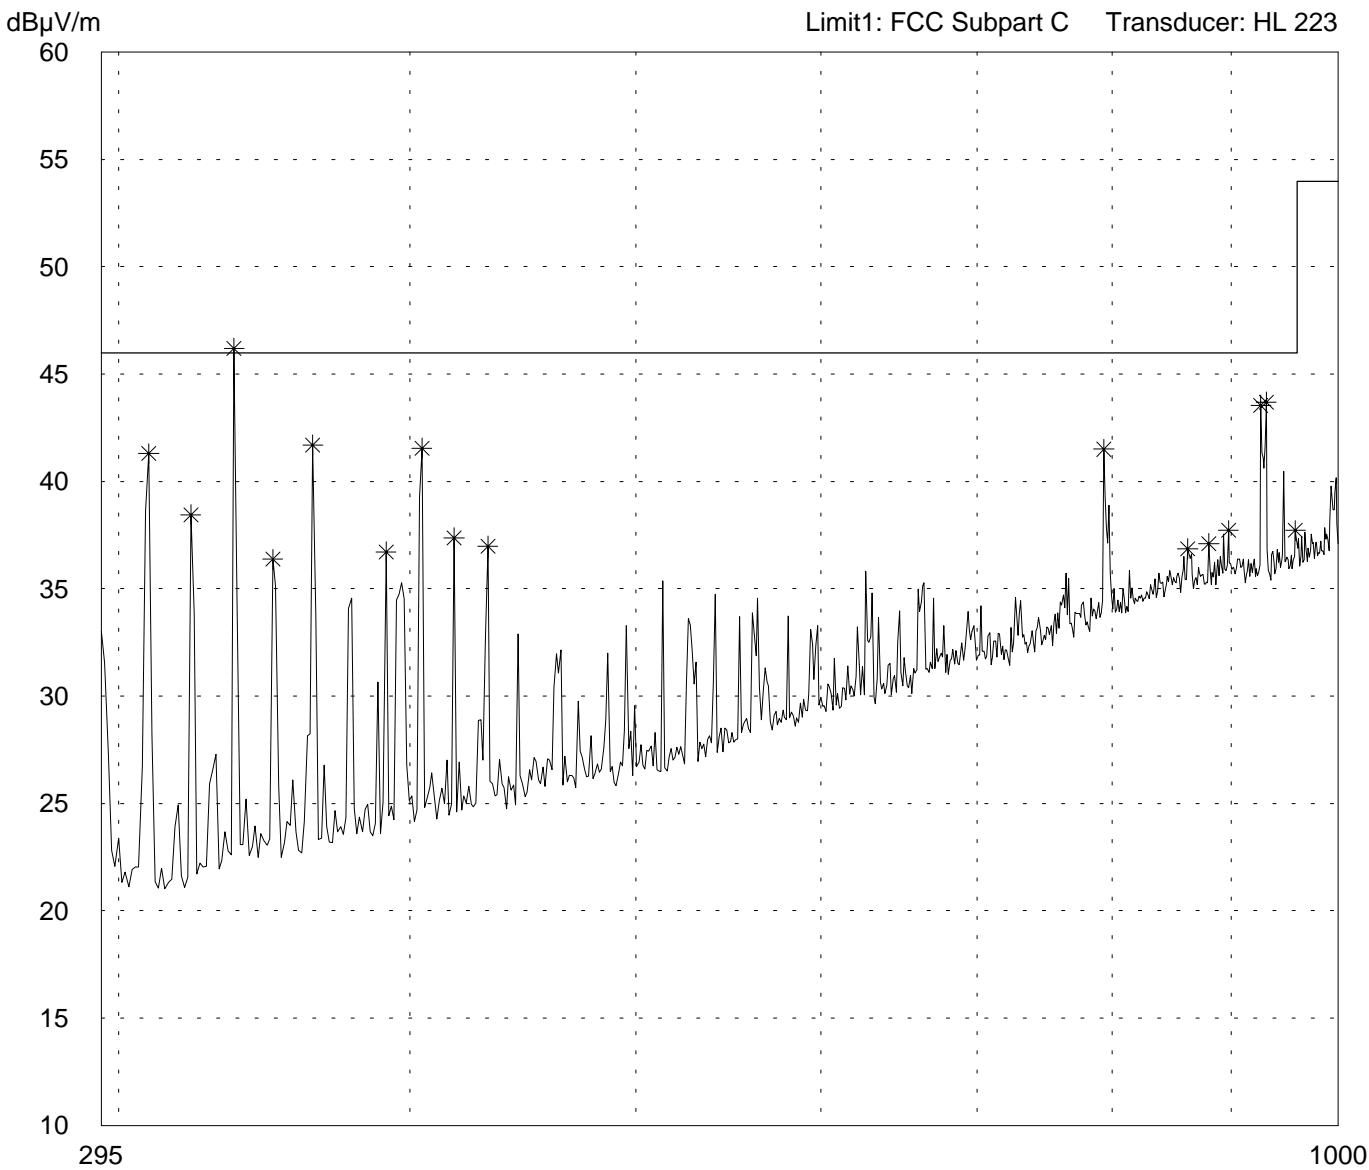

Result:
Prescan

Project file:
50602-10395-2 Page 43 of 49 Pages


Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Horizontal Polarization | |
| Test distance 3 meters | |
| Date of test: 07/10/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via USB port 2 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in horizontal position (on table) |

Detector: Peak

List of values:
10 dB Margin 50 Subranges

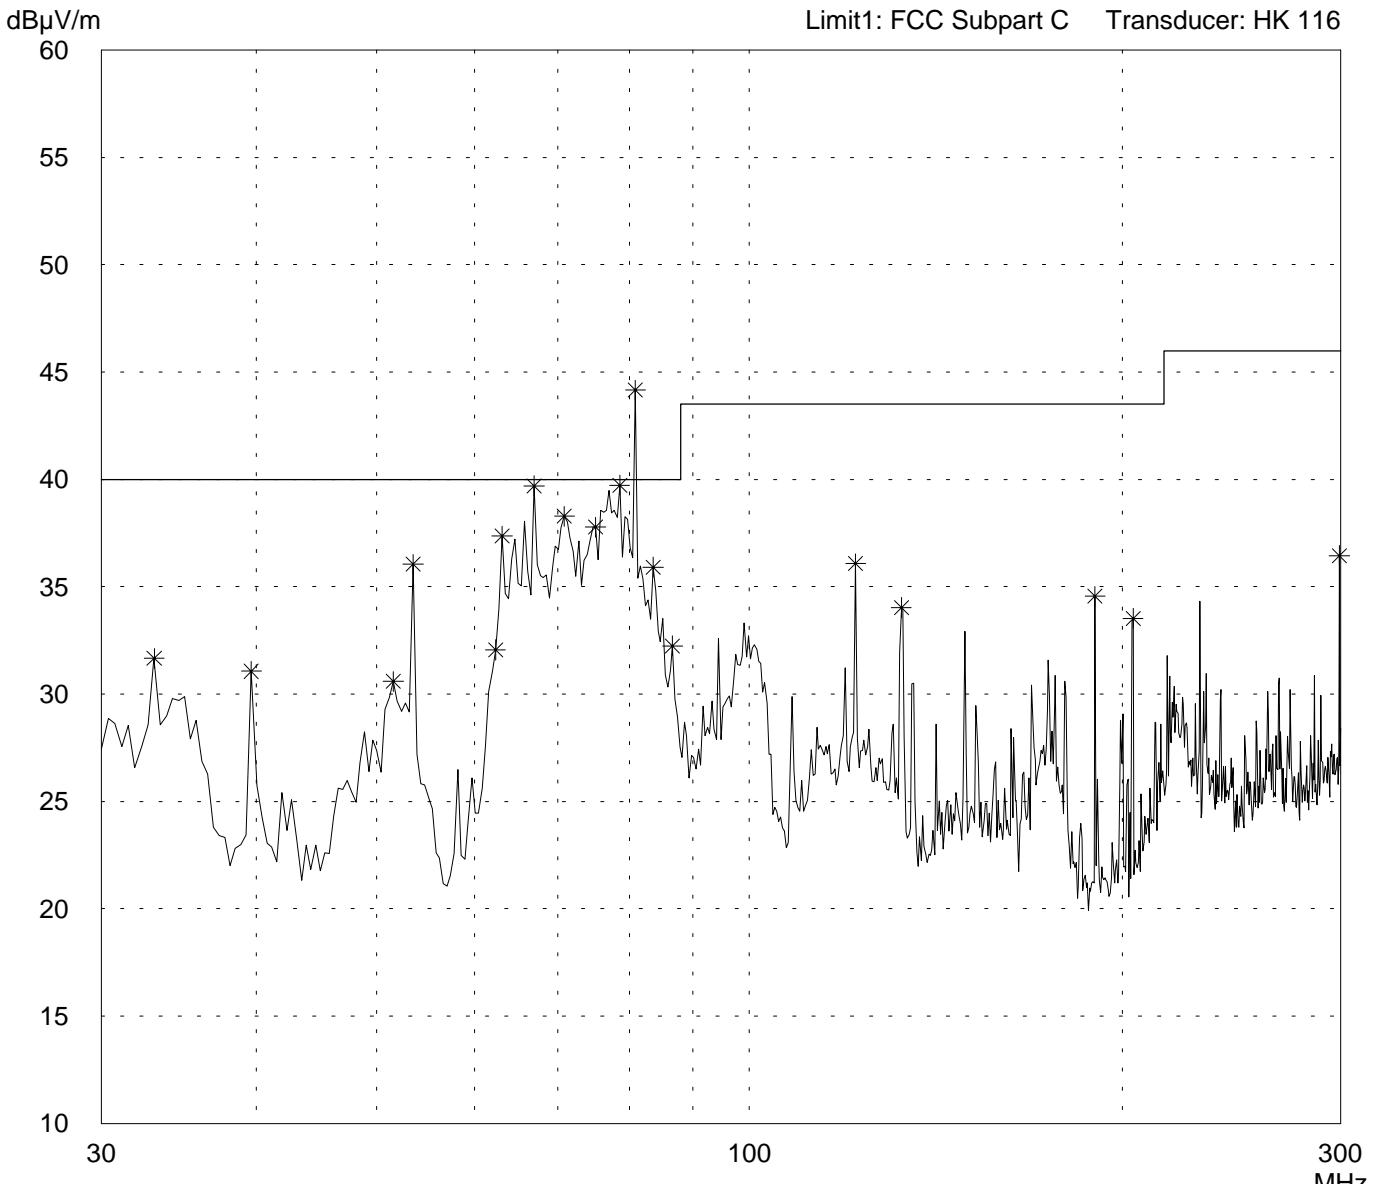

Result:
Prescan


Project file:
50602-10395-2 Page 44 of 49 Pages

Radiated Emission Test 295 MHz - 1 GHz

according to FCC Part 15 Subpart C

| |
|---|
| Model: ID ISC.PRH100 |
| Serial no.: --- |
| Applicant: FEIG-Electronic-GmbH |
| Test site: Semi anechoic room, cabin no. 3 |
| Tested on: Test distance 3 meters Vertical Polarization |
| Date of test: 07/10/2001 Operator: R. Heller |
| Test performed: automatically File name: |
| Detector: Peak |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via USB port 2 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in vertical position |

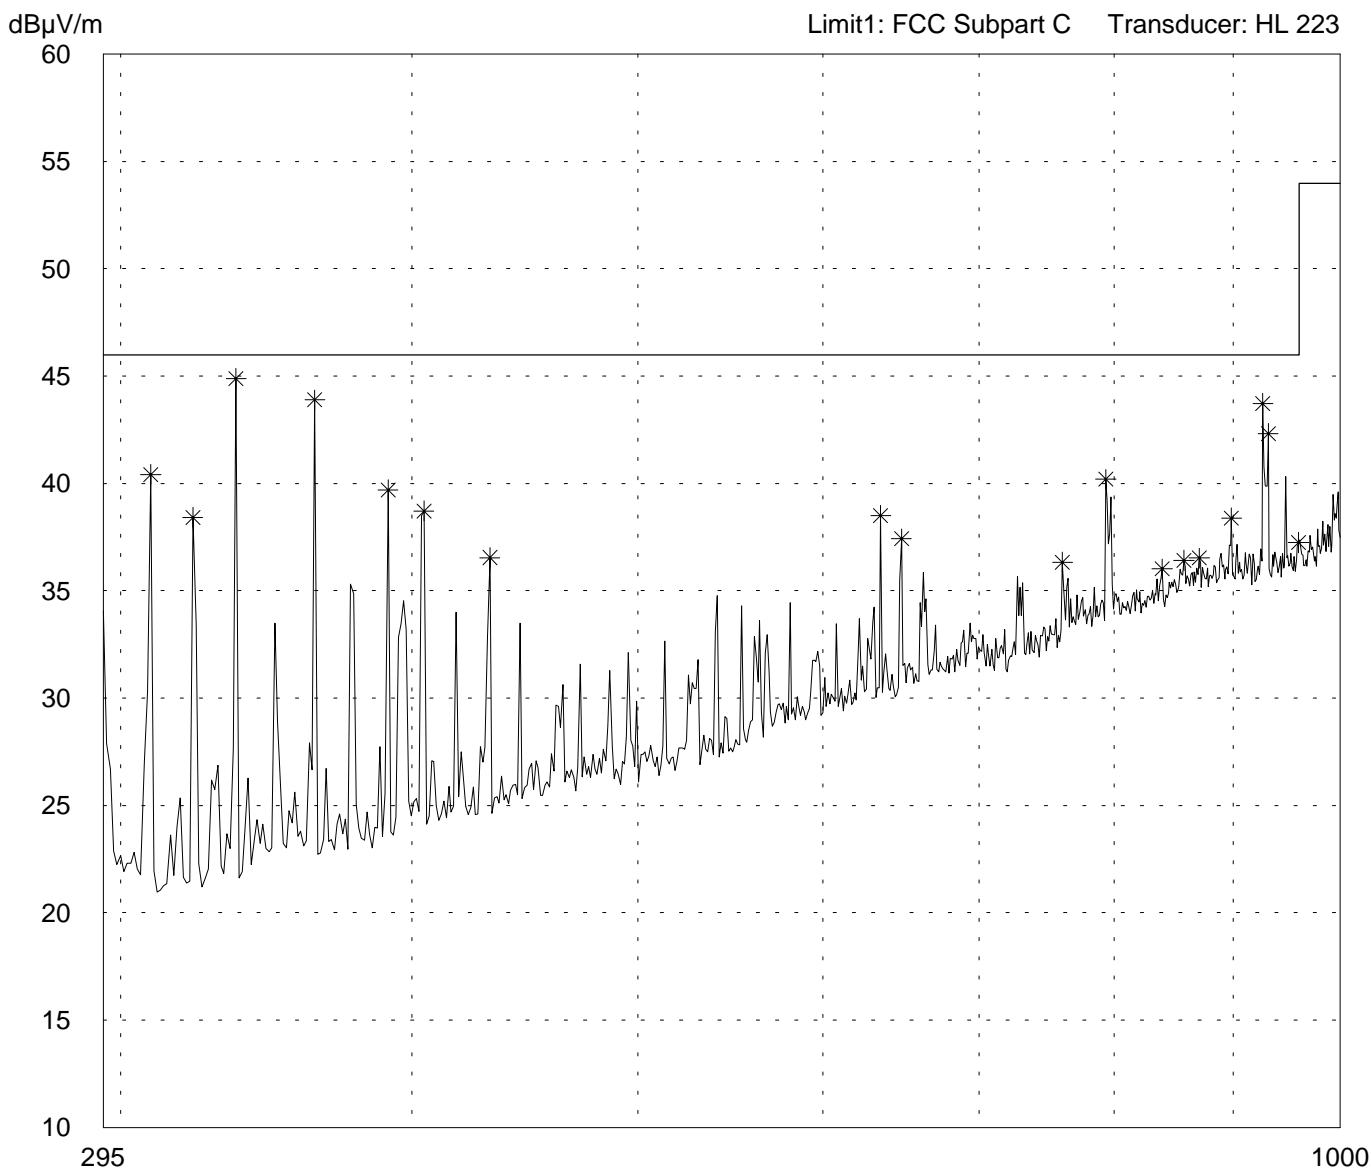

| |
|--------------------|
| Result: Prescan |
|--------------------|


| |
|--------------------------------|
| Project file: 50602-10395-2 |
| Page 45 of 49 Pages |

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Horizontal Polarization | |
| Date of test: 07/10/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via USB port 2 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in vertical position with side on table |

| | | |
|-------------------|---------------------------------|--------------|
| Detector: Peak | List of values: 10 dB Margin | 50 Subranges |
|-------------------|---------------------------------|--------------|

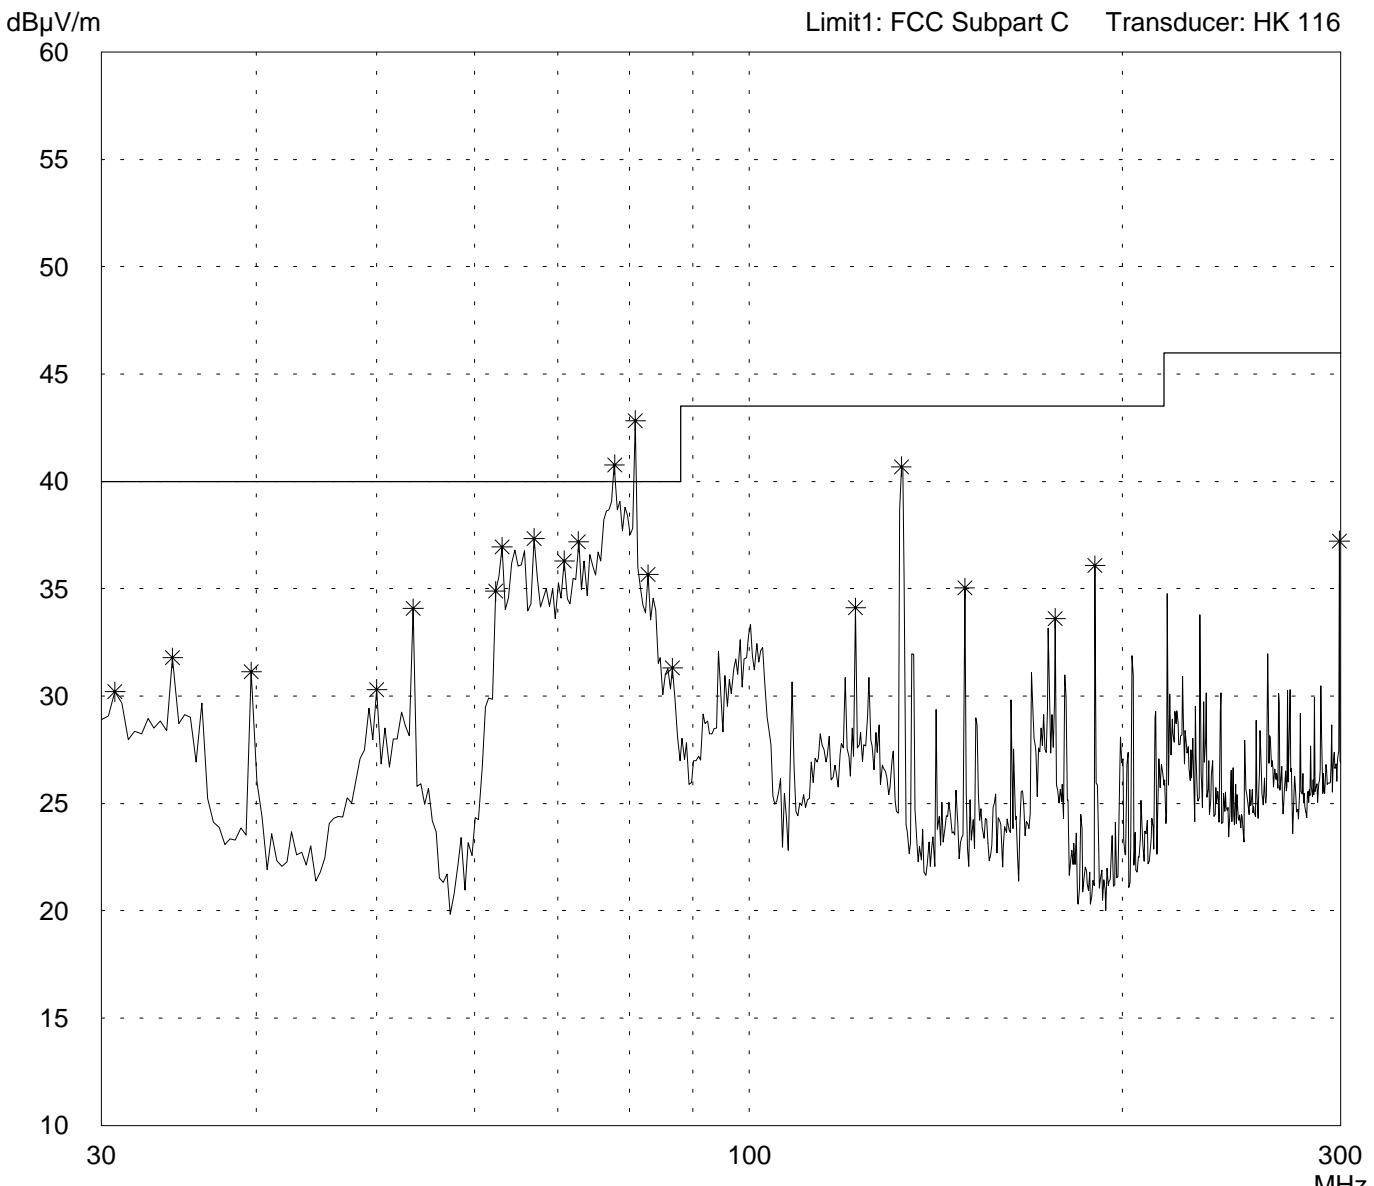


| |
|--------------------|
| Result: Prescan |
|--------------------|

| | |
|--------------------------------|---------------------|
| Project file: 50602-10395-2 | Page 46 of 49 Pages |
|--------------------------------|---------------------|

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Test distance 3 meters Horizontal Polarization | |
| Date of test: 07/10/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |
| Detector: Peak | |

| |
|---|
| Mode: <ul style="list-style-type: none"> - FCC test setup - with supply voltage 115 V AC - EUT connected to personal computer Dell Dimension 4100 via USB port 2 - with AC/DC adapter FW7283/05 - waiting for tag (continuous transmission) - reading area in vertical position with side on table |
| List of values: 10 dB Margin 50 Subranges |

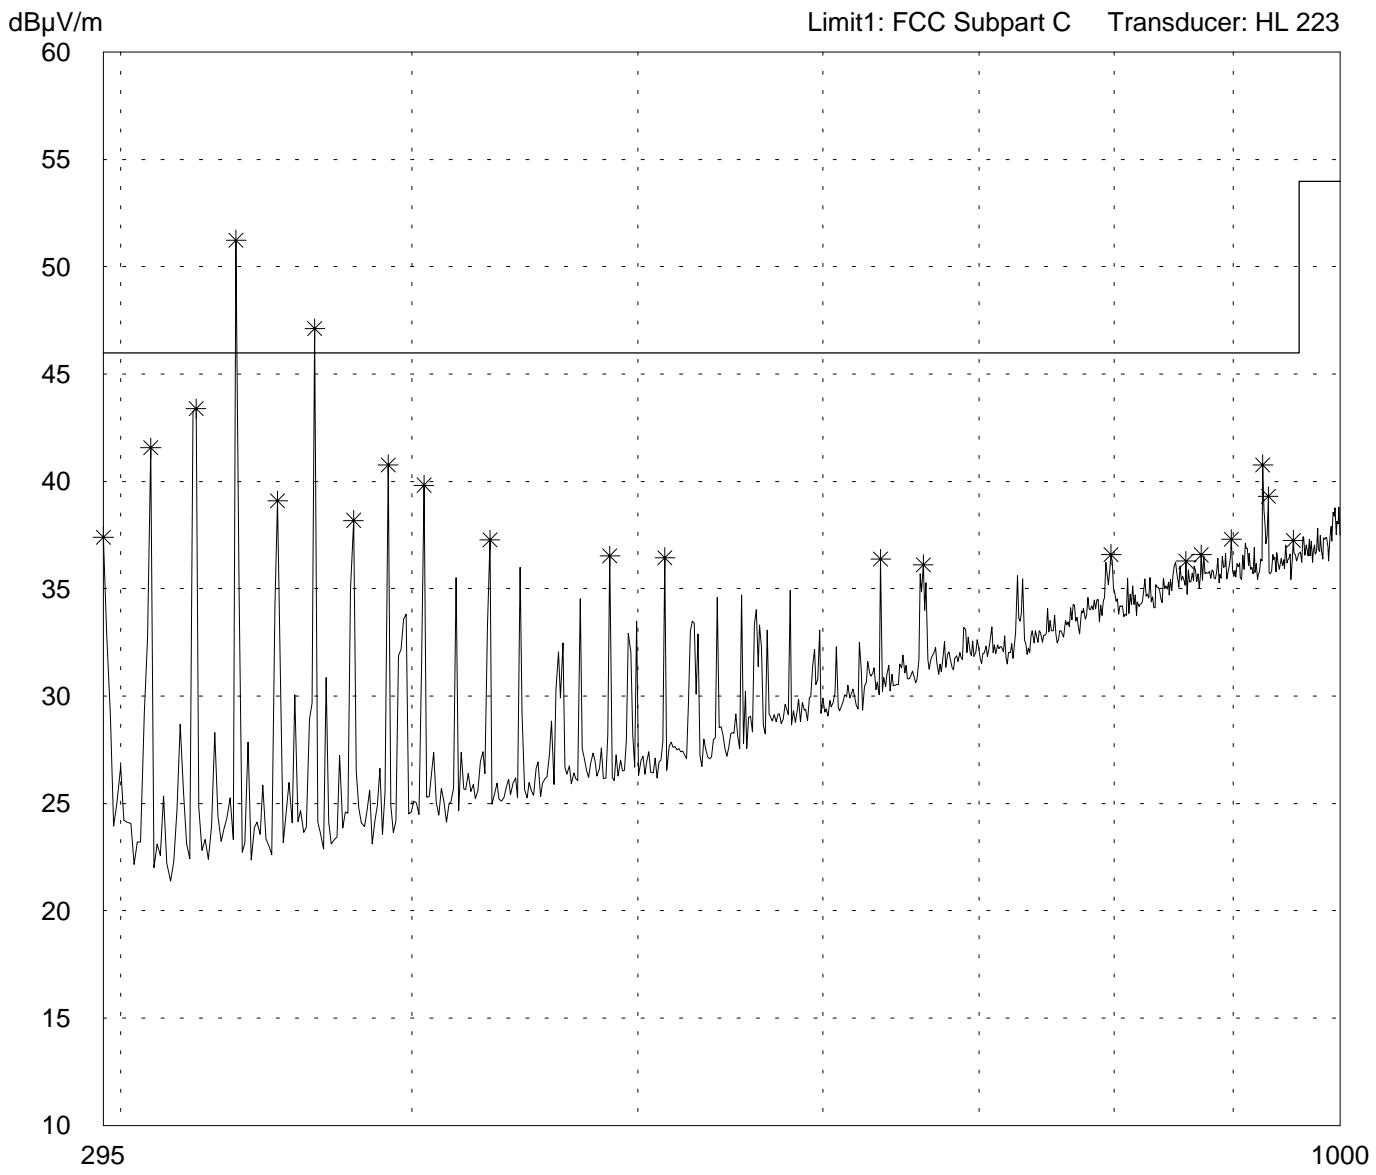

| |
|--------------------|
| Result: Prescan |
|--------------------|

| | |
|--------------------------------|---------------------|
| Project file: 50602-10395-2 | Page 47 of 49 Pages |
|--------------------------------|---------------------|


Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Vertical Polarization | |
| Date of test: 07/10/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: |
| - FCC test setup |
| - with supply voltage 115 V AC |
| - EUT connected to personal computer Dell Dimension 4100 via USB port 2 |
| - with AC/DC adapter FW7283/05 |
| - waiting for tag (continuous transmission) |
| - reading area in vertical position with side on table |

Detector: Peak

List of values:
10 dB Margin 50 Subranges

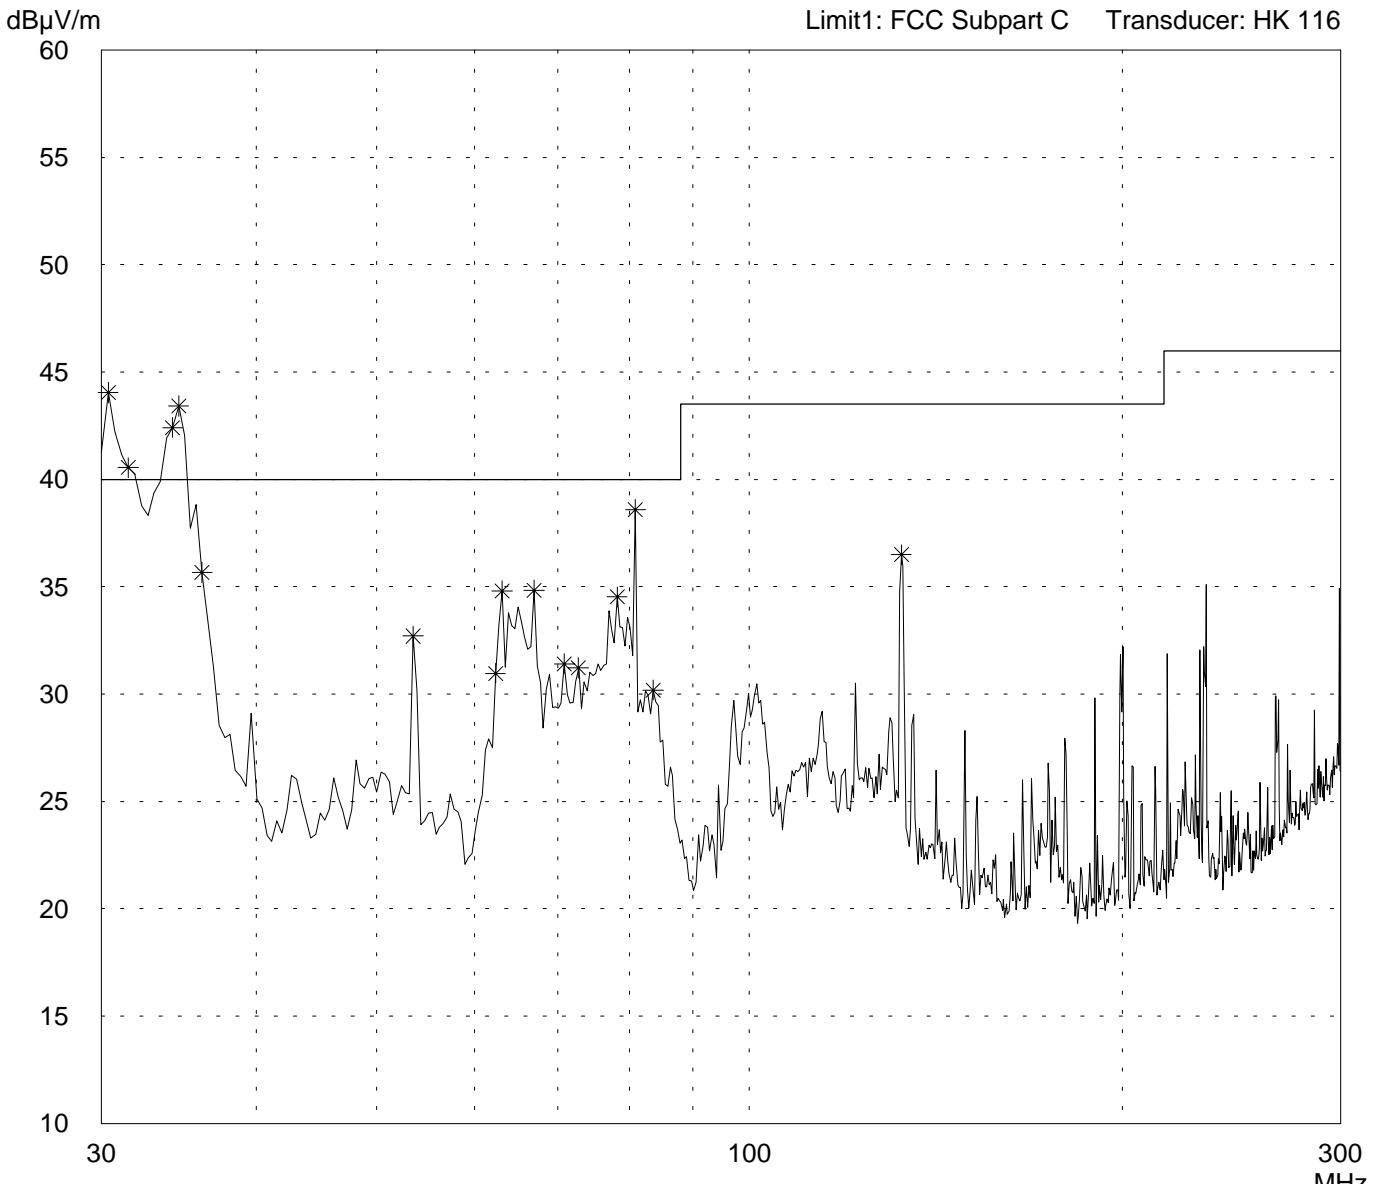

Result:
Prescan

Project file:
50602-10395-2


Page 48 of 49 Pages

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

| | |
|---|------------------------|
| Model: ID ISC.PRH100 | |
| Serial no.: --- | |
| Applicant: FEIG-Electronic-GmbH | |
| Test site: Semi anechoic room, cabin no. 3 | |
| Tested on: Test distance 3 meters Vertical Polarization | |
| Date of test: 07/10/2001 | Operator: R. Heller |
| Test performed: automatically | File name: |

| |
|---|
| Mode: <ul style="list-style-type: none"> - FCC test setup - with supply voltage 115 V AC - EUT connected to personal computer Dell Dimension 4100 via USB port 2 - with AC/DC adapter FW7283/05 - waiting for tag (continuous transmission) - reading area in vertical position with side on table |
|---|

| | | |
|-------------------|---------------------------------|--------------|
| Detector: Peak | List of values: 10 dB Margin | 50 Subranges |
|-------------------|---------------------------------|--------------|

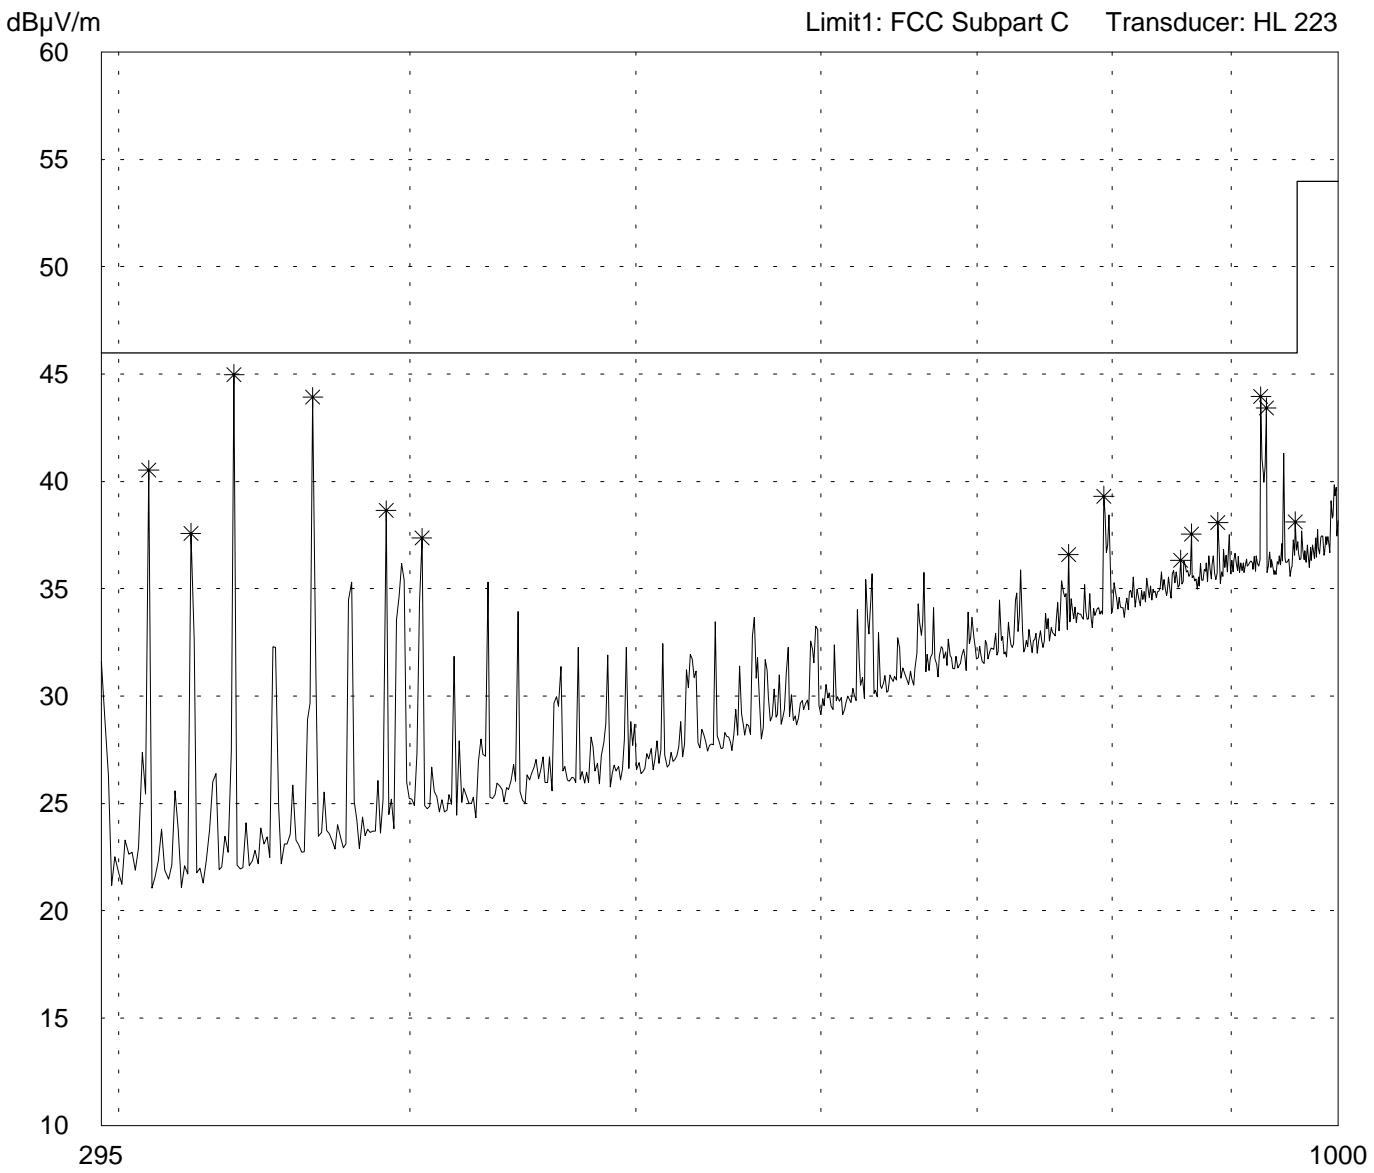

| |
|--------------------|
| Result: Prescan |
|--------------------|

| | |
|--------------------------------|---------------------|
| Project file: 50602-10395-2 | Page 49 of 49 Pages |
|--------------------------------|---------------------|