

Straubing, 8 December 2003

**TEST - REPORT**

**No. 50602-30261**

**for**

**ID RW02**

**Inductive Reader**

**Applicant: FEIG ELECTRONIC GmbH**

**Test Specification: FCC Code of Federal Regulations,  
CFR 47, Part 15,  
Section 15.209**

---

**Note:**

The test data of this report relate only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

---

**Table of Contents**

1. Administrative Data .....	3
2. Identification of Test Laboratory.....	4
3. Operation Mode of EUT .....	5
4. Configuration.....	6
5. Measuring Methods .....	7
5.1. Radiated Emission Measurement 9 kHz – 30 MHz .....	7
5.2. Field Strength of Emissions, Prescans in a fully-anechoic Room .....	8
5.3. Radiated Emission Measurement at Open Area Test Site .....	9
6. Photographs Taken During Testing .....	10
7. List of Measurements.....	13
8. Referenced Regulations .....	16
Charts taken during testing.....	17

**1. Administrative Data**


<b>Test item (EUT)</b>	
Type designation	ID RW02
Serial number(s):	001
Type of equipment:	Inductive Reader
Parts/accessories:	
FCC-ID:	PJMRW02
<b>Technical data</b>	
Frequency range	0.125 MHz
Operational frequencies	N/A
Type of modulation	10K0A1D
Pulse frequency	N/A
Pulse width	N/A
Antenna	Integrated
Power supply	12 - 24 V AC / DC
<b>Applicant:</b> (full address)	FEIG ELECTRONIC GmbH Lange Strasse 4 D-35781 Weilburg-Waldhausen
Contract identification:	---
Contact person:	Bernhard Schuessler
Manufacturer:	FEIG ELECTRONIC GmbH
<b>Application details</b>	
Receipt of EUT:	22 April 2003
Date of test:	December 2003
Note:	
Responsible for testing:	Martin Steindl
Responsible for test report:	Martin Steindl

## 2. Identification of Test Laboratory

### DETAILS OF THE TEST LABORATORY

COMPANY NAME:	Senton GmbH EMI/EMC Test Center
ADDRESS:	Aeussere Fruhlingsstrasse 45 D-94315 Straubing Germany
LABORATORY ACCREDITATION:	DAR-Registration No. TTI-P-G 062/94-01
FCC TEST SITE LISTING	
INDUSTRY CANADA TEST SITE REGISTRATION	IC 3050
NAME FOR CONTACT PURPOSES:	Mr. Johann Roidt
TELEPHONE: (+49) (0)9421 5522-0	FAX: (+49) (0)9421 5522-99

### PERSONNEL INVOLVED IN THIS TEST REPORT

TECHNICAL DIRECTOR:	 Mr. Johann Roidt
RESPONSIBLE FOR TESTING:	Mr. Johann Roidt
RESPONSIBLE FOR TEST REPORT:	Mr. Johann Roidt

### SUMMARY OF TEST RESULTS

The tested sample complies with the requirements set forth in the **Code of Regulations CFR 47, Part 15, Section 15.209**

### 3. Operation Mode of EUT

Continuously reading a transponder card.

**4. Configuration****Configuration of the EUT**

Not applicable

**Cables connected to the EUT**

Not applicable

**Peripheral devices connected to the EUT**


Not applicable

## 5. Measuring Methods

### 5.1. Radiated Emission Measurement 9 kHz – 30 MHz

Rules and Specifications:	Sections 15.109 & 15.209
Guide:	ANSI C63.4 1997

Measurement Procedure:
<p>Radiated emissions in the frequency range 9 kHz – 30 MHz were measured initially at a distance of 3 meters. A prescan at 3 meter distance were performed in a shielded room with the detector of the spectrum analyzer or EMI Receiver set to peak. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>Final measurement is then performed at 30 meter distance. In case the regulation requires testing at other distances, the result will be extrapolated. The extrapolation factor is determined by making a second measurement at 10 meter distance. In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of 15.31 (d) apply.</p> <p>According to section 15.209 (d) final measurement is performed with the detector set to Quasi Peak except for the frequency bands 9 – 90 kHz and 110 – 490 kHz where average detector is employed.</p>

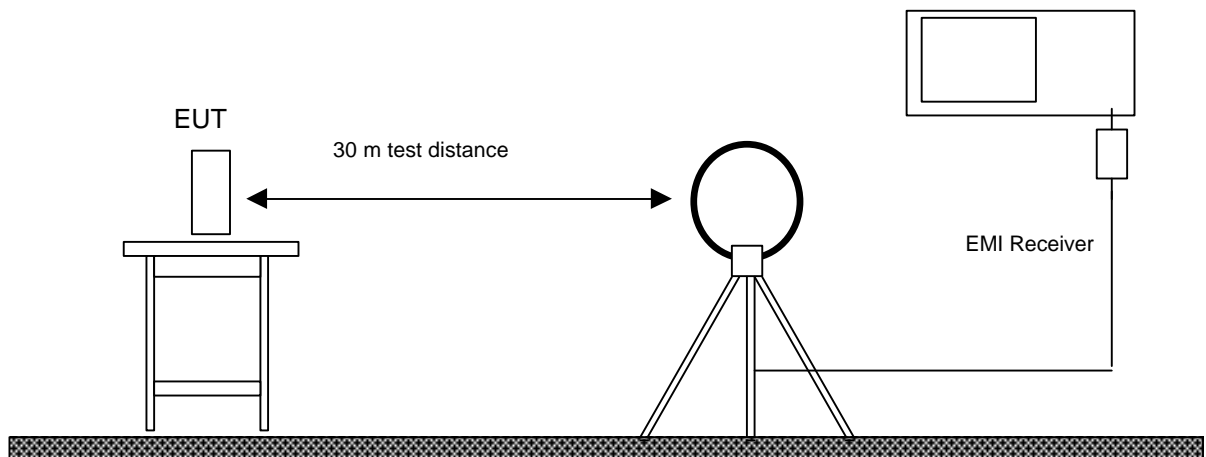

Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	Test receiver	ESH 3	880112/032	Rohde & Schwarz
02	Loop antenna	HFH2-Z2	882964/1	Rohde & Schwarz
03	Open Field Test Site	No. 1	N/A	Senton


## 5.2. Field Strength of Emissions, Prescans in a fully-anechoic Room

Rules and Specifications:	Sections 15.109 & 15.209
Guide:	ANSI C63.4 1997

### Measurement Procedure:

Radiated emissions are measured over the frequency range from 30 MHz to the 5<sup>th</sup> harmonic of the maximum frequency of the EUT.

Measurements were made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution bandwidth set to 100 kHz. All tests were performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. For final testing an open-area test-site was used. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions.

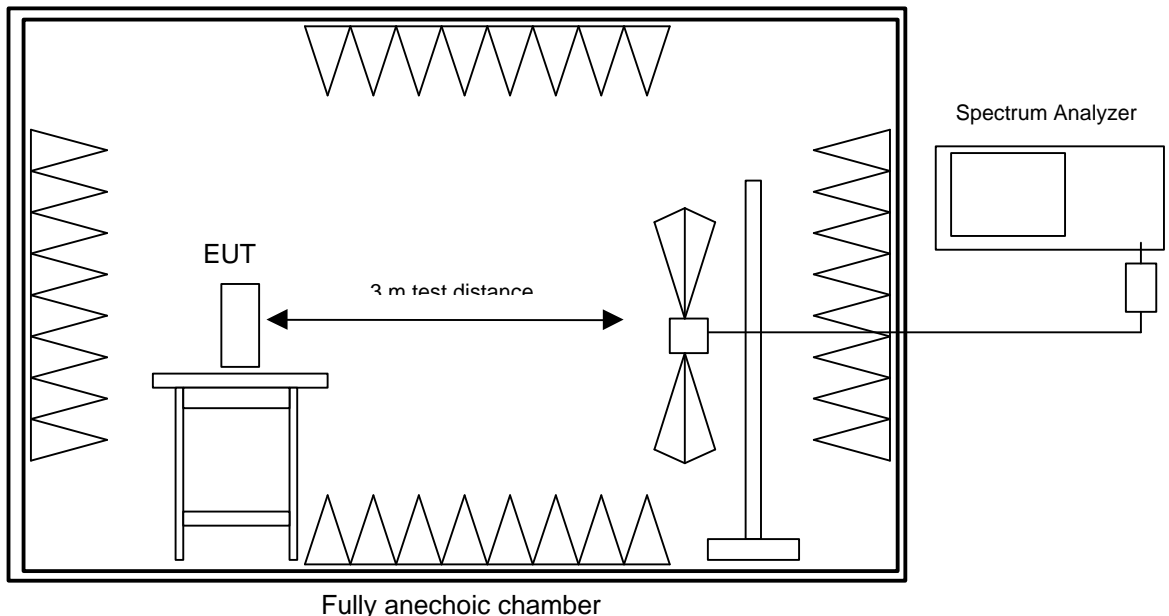

### Test instruments used:


No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
113	Preamplifier	CPA9231A	3393	Schaffner
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
145	Horn antenna	3115	9508-4553	EMCO
146	Horn antenna set	3160-03/-09	9112-1003	EMCO
114	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
115	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
003	Fully anechoic room	No. 2	1452	Albatross Projects



### 5.3. Radiated Emission Measurement at Open Area Test Site

Rules and Specifications:	Sections 15.109 & 15.209
Guide:	ANSI C63.4 1997

Measurement Procedure:
<p>Radiated emissions are measured in the frequency range 1 GHz to 8 GHz. Resolution and video bandwidth of the spectrum analyzer are set to 1 MHz. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. Additional measurements are performed at critical frequencies with reduced span.</p> <p>EUT is rotated all around and receiving antenna is raised and lowered to find the maximum levels of emission. The cables and equipment are placed and moved within the range of position likely to find their maximum emissions.</p> <p>All tests are performed in a fully-anechoic chamber with a test-distance of 3 meters.</p> <p>If required preamplifiers are used for the whole frequency range. Special care is taken to avoid overload in transmit mode (using appropriate attenuators and filters if necessary).</p>

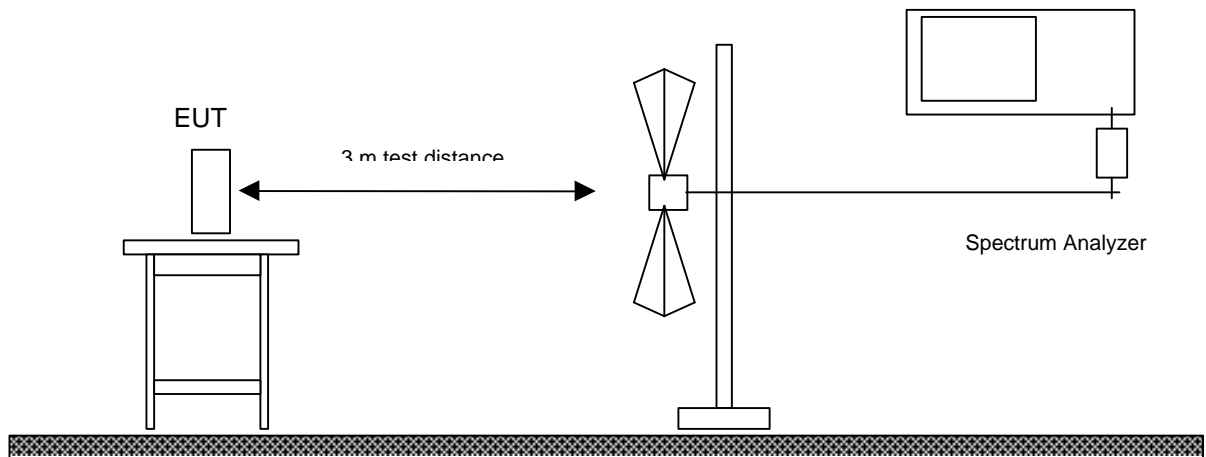


Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	EMI Receiver	ESVP	881414/009	Rohde & Schwarz
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
145	Horn antenna	3115	9508-4553	EMCO
146	Horn antenna set	3160-03/-09	9112-1003	EMCO
114	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
115	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
003	Open Field Test Site	No. 1	N/A	Senton

## 6. Photographs Taken During Testing

## Test setup for radiated emission measurement 9 kHz – 30 MHz

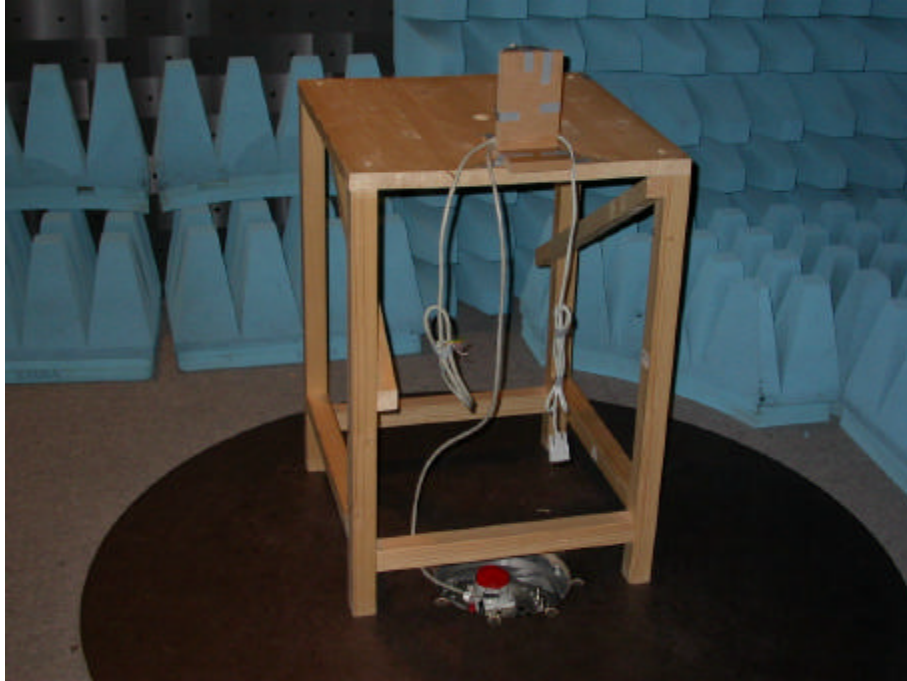

## Test setup for radiated emission measurement (fully anechoic room)



**7. List of Measurements**

<b>FCC Part 15</b>			
<b>Section(s):</b>	<b>Test</b>	<b>Page(s)</b>	<b>Result</b>
<b>15.205</b>	Restricted Bands		Pass
<b>15.207</b>	AC Powerline Emissions	---	Not Applicable
<b>15.209</b>	Radiated Spurious emissions		Pass

## Spurious Radiation Measurement 9 kHz – 30 MHz

Rules and Specifications:	15.109, 125.209 Radiated Emission Limits		
Guide:	ANSI C63.4		
Limit:	Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:		
	Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705 – 30	30	30

Tested Frequency:	
Test Site:	Open Area Test Site
Distance:	30 Meter

Frequency (MHz)	Detector	Analyzer Reading (dBµV)	Correction Factor (dB/m)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
0.125	AV	22	20	42	59.20	<b>-17.2</b>
0.375	AV	9.3	20	29.3	49.30	<b>-20.0</b>

\*\*\* = All emissions showed more than 20 dB margin to the limit

**Sample calculation of erp values:**

$$\text{Field Strength (dBµV/m)} = \text{Analyzer Reading (dBµV)} + \text{Correction Factor (dB/m)}$$

<b>Test Results:</b>	Pass
----------------------	------

## Spurious Radiation Measurement

Rules and Specifications:	15.109, 125.209 Radiated Emission Limits	
Guide:	ANSI C63.4	
Limit:	Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:	
	Frequency of Emission (MHz)	Field Strength (microvolts/meter)
	30 - 88	100
	88 - 216	150
	216 - 960	200
	Above 960	500

Tested Frequency:	794,300 MHz
Test Site:	Open Area Test Site (< 1 GHz), Fully anechoic chamber (> 1 GHz)
Distance:	3 Meter

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dB $\mu$ V)	Correction Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
30-1000	QP	Hor/Ver	***				

\*\*\* = All emissions showed more than 20 dB margin to the limit

Sample calculation of erp values:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{Analyzer Reading (dB}\mu\text{V)} + \text{Correction Factor (dB/m)}$$

Test Results:	Pass
---------------	------

## 8. Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	FCC Part 2	Code of Federal Regulations Part 2 Frequency allocation and radio treaty matters; General rules and regulations	October 01, 1999
<input type="checkbox"/>	FCC Part 15 Subpart A	Code of Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC)	May, 2002
<input type="checkbox"/>	FCC Part 15 Subpart B	Code of Regulations Part 15 (Radio Frequency Devices), Subpart B (Unintentional Radiators) of the Federal Communication Commission (FCC)	May, 2002
<input checked="" type="checkbox"/>	FCC Part 15 Subpart C	Code of Regulations Part 15 (Radio Frequency Devices), Subpart C (Intentional Radiators) of the Federal Communication Commission (FCC)	May, 2002
<input type="checkbox"/>	FCC Part 74 Subpart H	Code of Regulations Part 15 (Radio Frequency Devices), Subpart H (Low Power Auxiliary Stations) of the Federal Communication Commission (FCC)	October 20, 1997
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz - 40 GHz	October, 1992
<input type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 2 for Low Power Licence-Exempt Radiocommunication Devices of Industry Canada	February 24, 1996




## Charts taken during testing

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

<b>Model:</b> ID ISO RW02	<b>Comment:</b> - DC 24 V power supply - transmitting continuously
<b>Serial no.:</b> 01	
<b>Applicant:</b> Feig Electronic GmbH	
<b>Test site:</b> Fully anechoic room, cabin no. 2	
<b>Tested on:</b> Test distance 3 metres Horizontal Polarization	
<b>Date of test:</b> 12/08/2003	<b>Operator:</b> M. Steindl
<b>Test performed:</b> automatically	<b>File name:</b> default.emi

<b>Detector:</b> Peak	<b>List of values:</b> 10 dB Margin                      50 Subranges
--------------------------	--

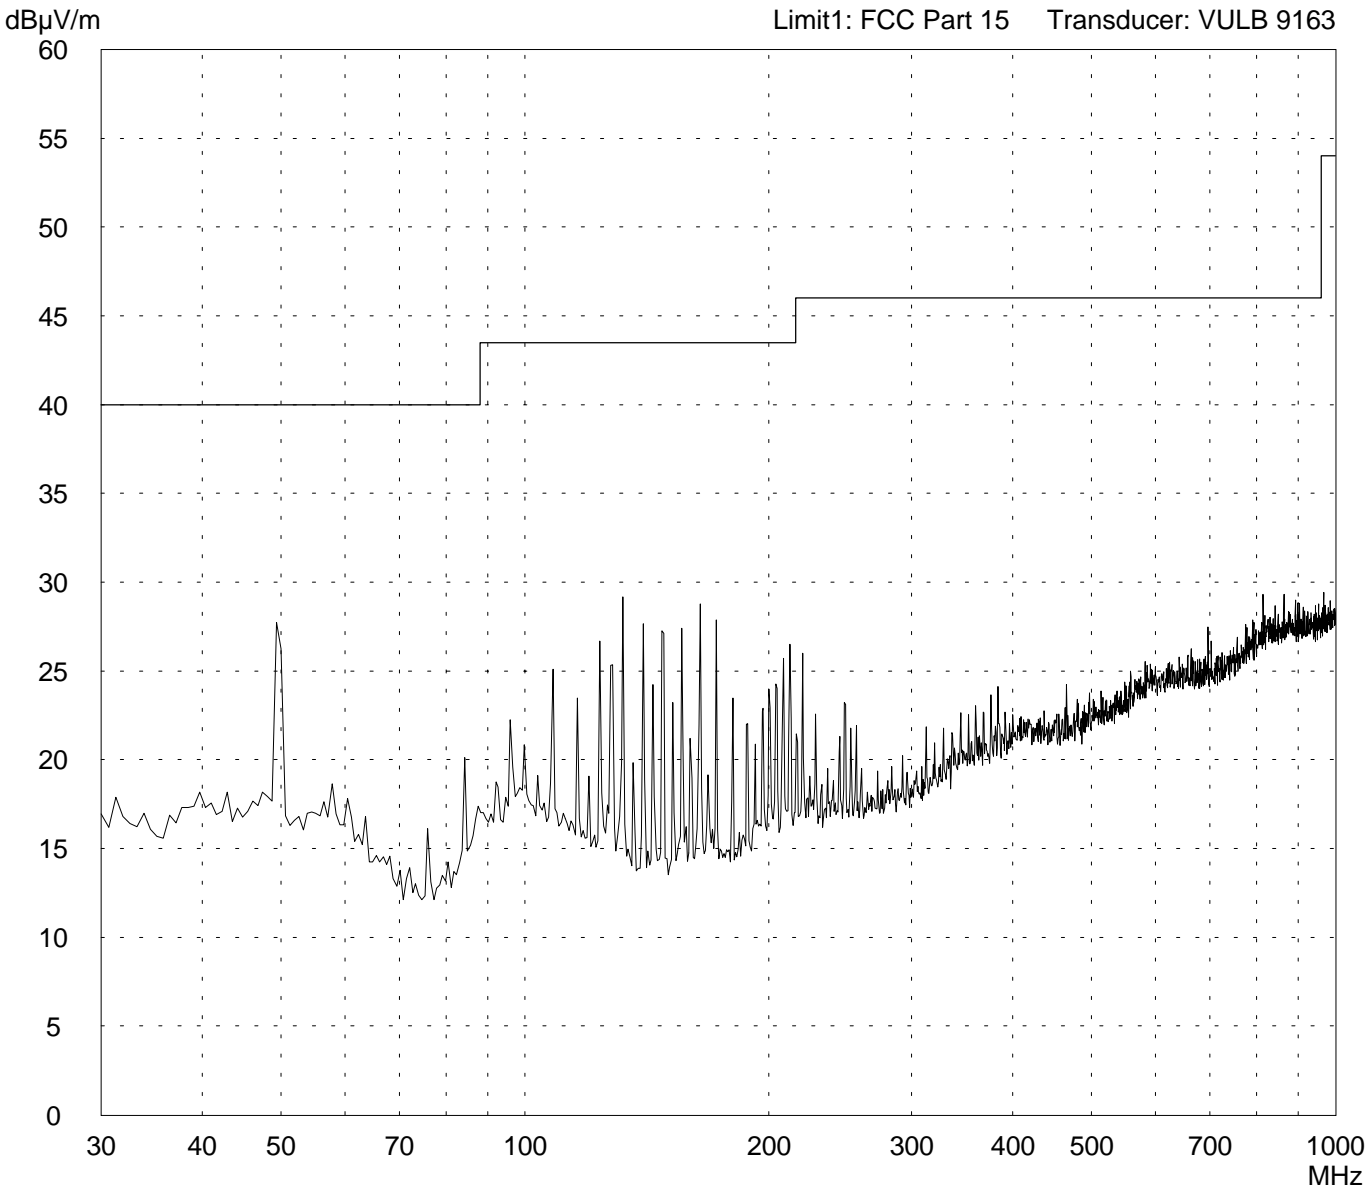


<b>Result:</b> Prescan	<b>Project file:</b> 50602-30261
	Page    of    Pages

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

<p>Model: <b>ID ISO RW02</b></p> <p>Serial no.: <b>01</b></p> <p>Applicant: <b>Feig Electronic GmbH</b></p> <p>Test site: <b>Fully anechoic room, cabin no. 2</b></p> <p>Tested on: <b>Test distance 3 metres Vertical Polarization</b></p> <p>Date of test: <b>12/08/2003</b>      Operator: <b>M. Steindl</b></p> <p>Test performed: <b>automatically</b>      File name: <b>default.emi</b></p>	<p>Comment:</p> <ul style="list-style-type: none"> <li>- DC 24 V power supply</li> <li>- transmitting continuously</li> </ul>
--	---

<p>Detector: <b>Peak</b></p>	<p>List of values: <b>Selected by hand</b></p>
----------------------------------	--

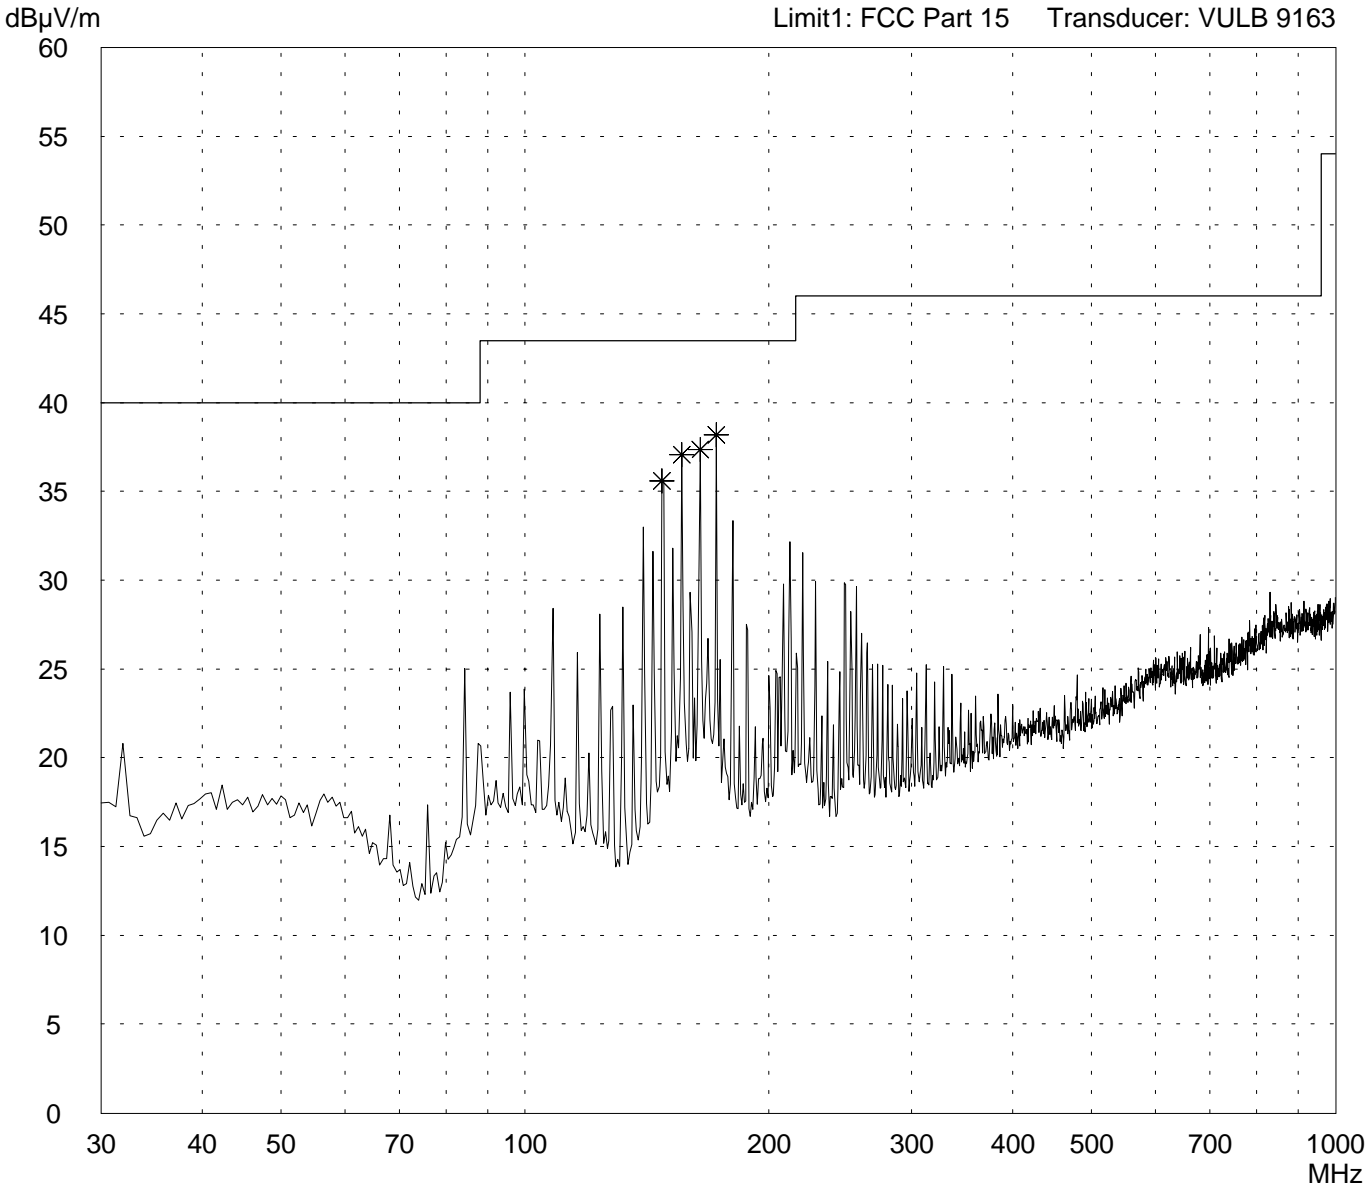

<p>Result: <b>Prescan</b></p>	<p>Project file: <b>50602-30261</b></p> <p style="text-align: right;">Page    of    Pages</p>
-----------------------------------	---