

Test Laboratory: Compliance Certification Services Inc.

GSM 1900 -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted Low CH512/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.659 mW/g


Right Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.635 mW/g; SAR(10 g) = 0.349 mW/g

Maximum value of SAR (measured) = 0.778 mW/g

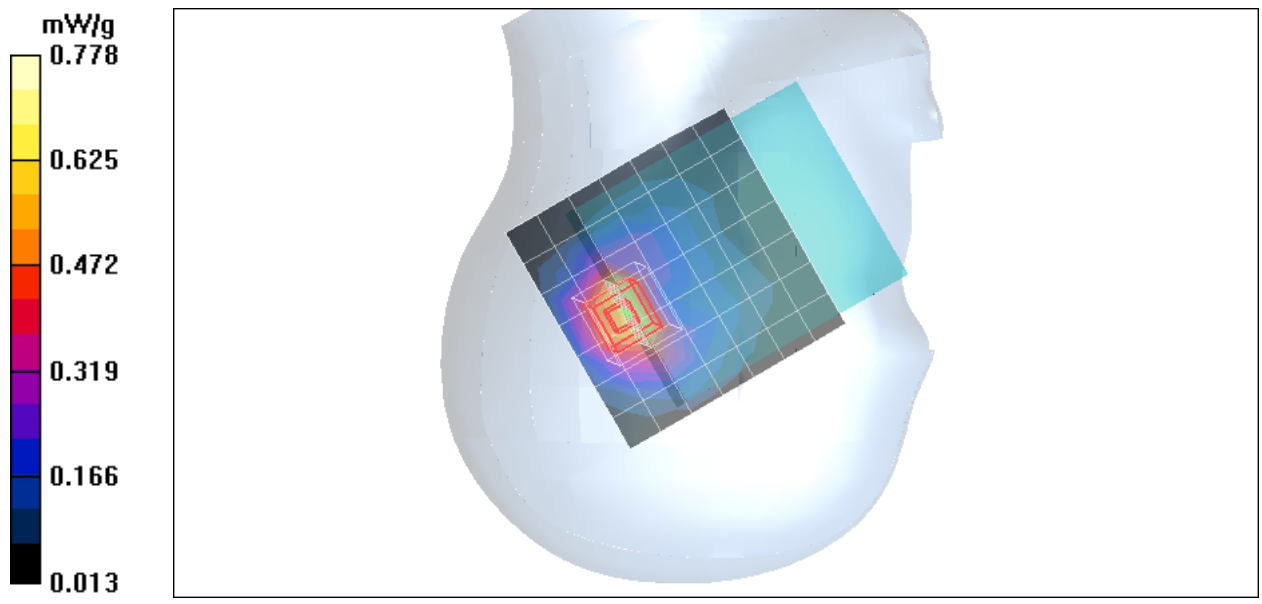

Test Laboratory: Compliance Certification Services Inc.

GSM 1900 -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted Middle CH661/Area Scan (8x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.631 mW/g

Right Tilted Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 10.2 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.621 mW/g; SAR(10 g) = 0.335 mW/g

Maximum value of SAR (measured) = 0.767 mW/g

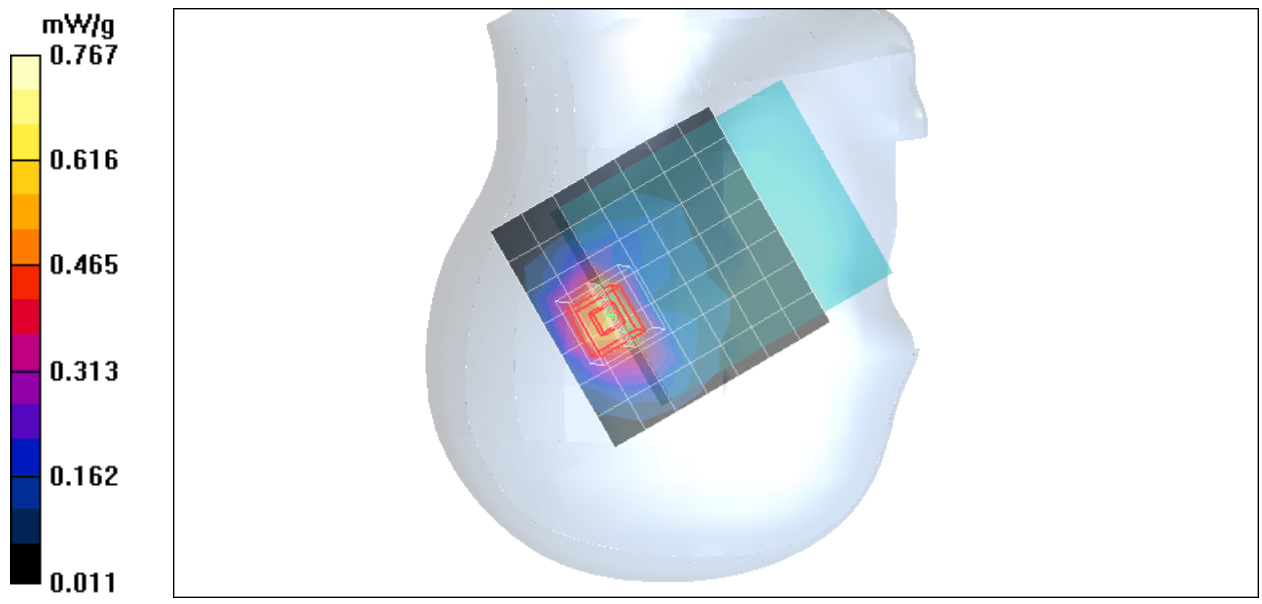

Test Laboratory: Compliance Certification Services Inc.

GSM 1900 -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted High CH810/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.794 mW/g


Right Tilted High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.39 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.795 mW/g; SAR(10 g) = 0.426 mW/g

Maximum value of SAR (measured) = 0.985 mW/g

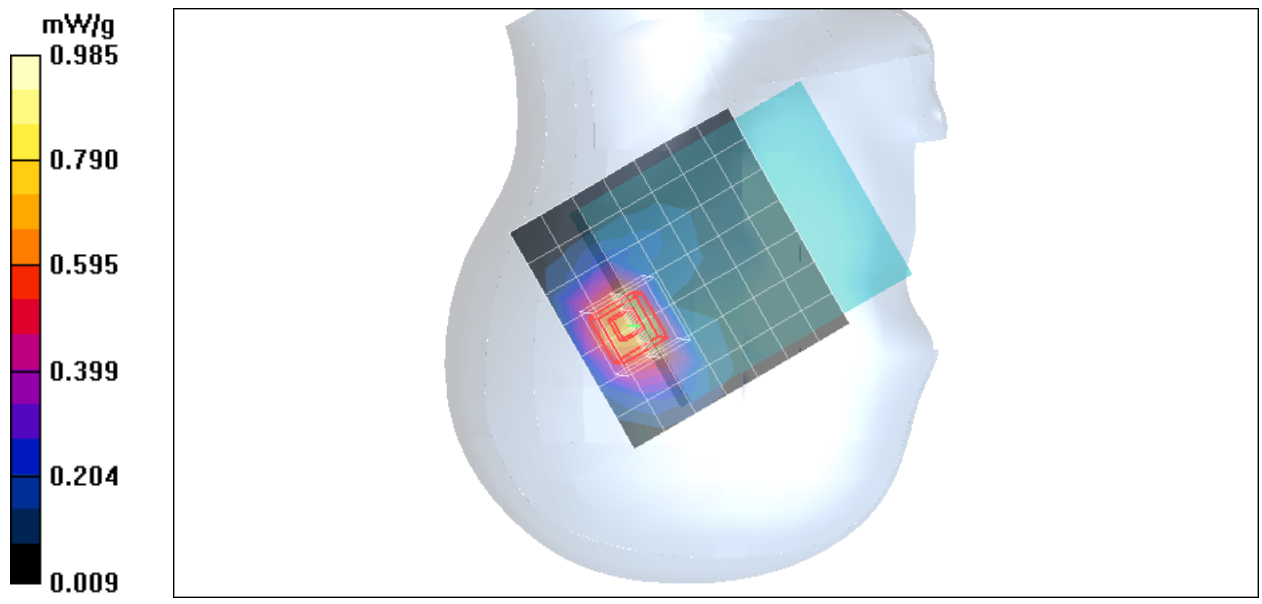

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek Low CH4132/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.375 mW/g


Left Cheek Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.0 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.354 mW/g; SAR(10 g) = 0.259 mW/g

Maximum value of SAR (measured) = 0.390 mW/g

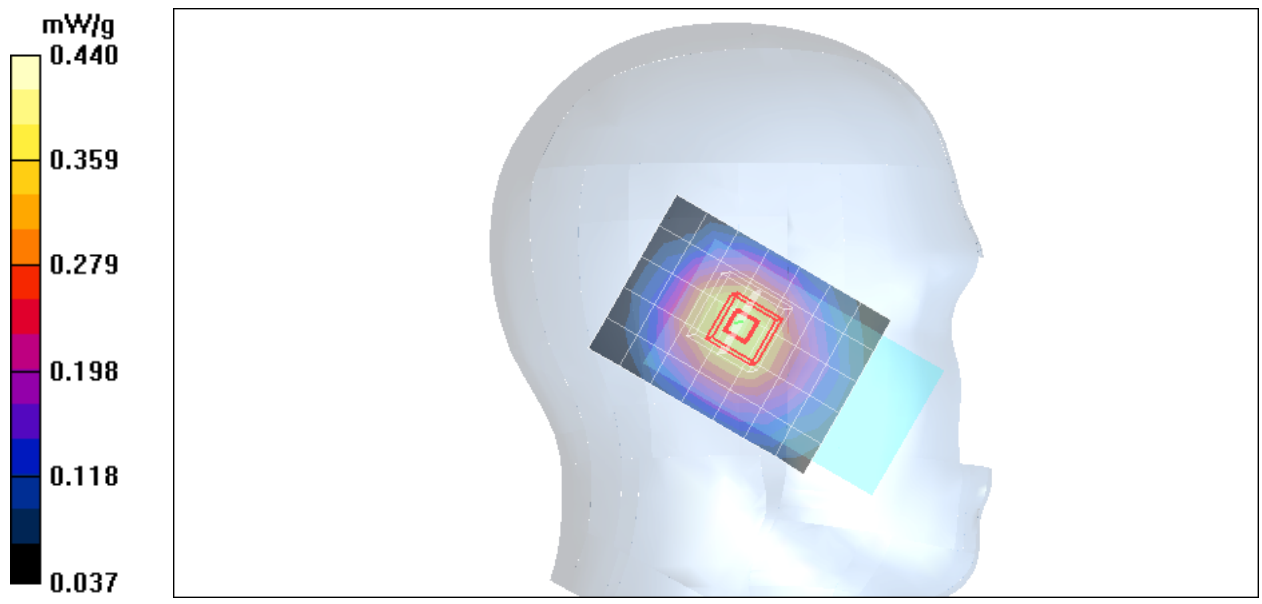

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek Middle CH4182/Area Scan (7x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.396 mW/g

Left Cheek Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 20.5 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.274 mW/g

Maximum value of SAR (measured) = 0.406 mW/g

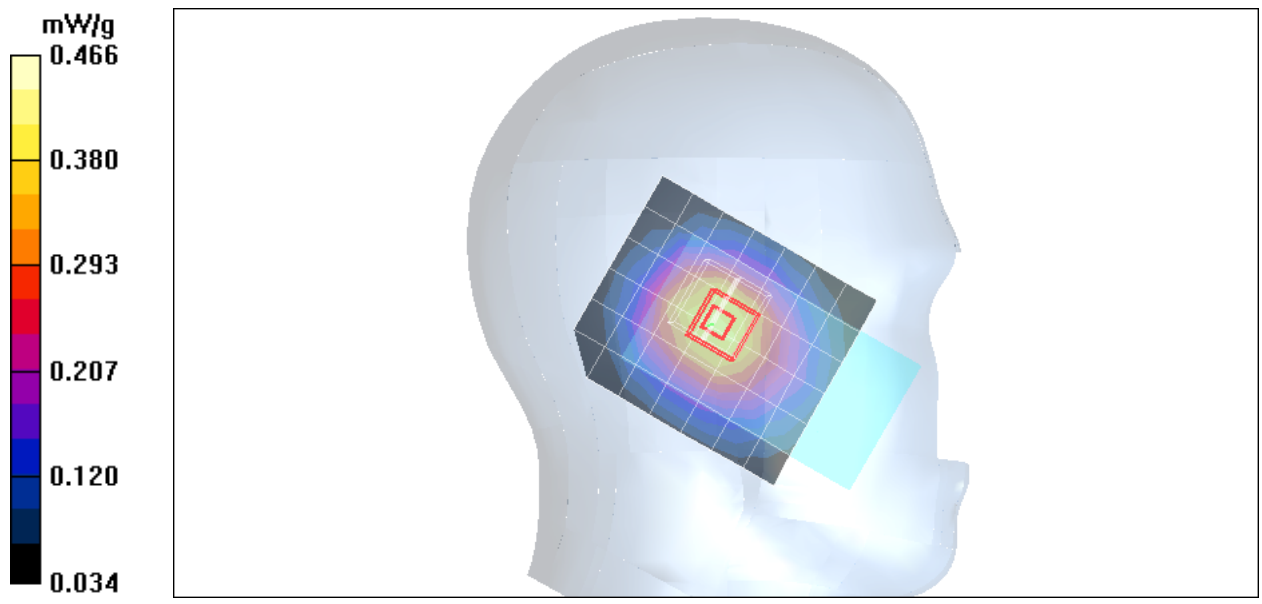

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek High CH4233/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.522 mW/g

Left Cheek High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 23.8 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.492 mW/g; SAR(10 g) = 0.360 mW/g

Maximum value of SAR (measured) = 0.542 mW/g

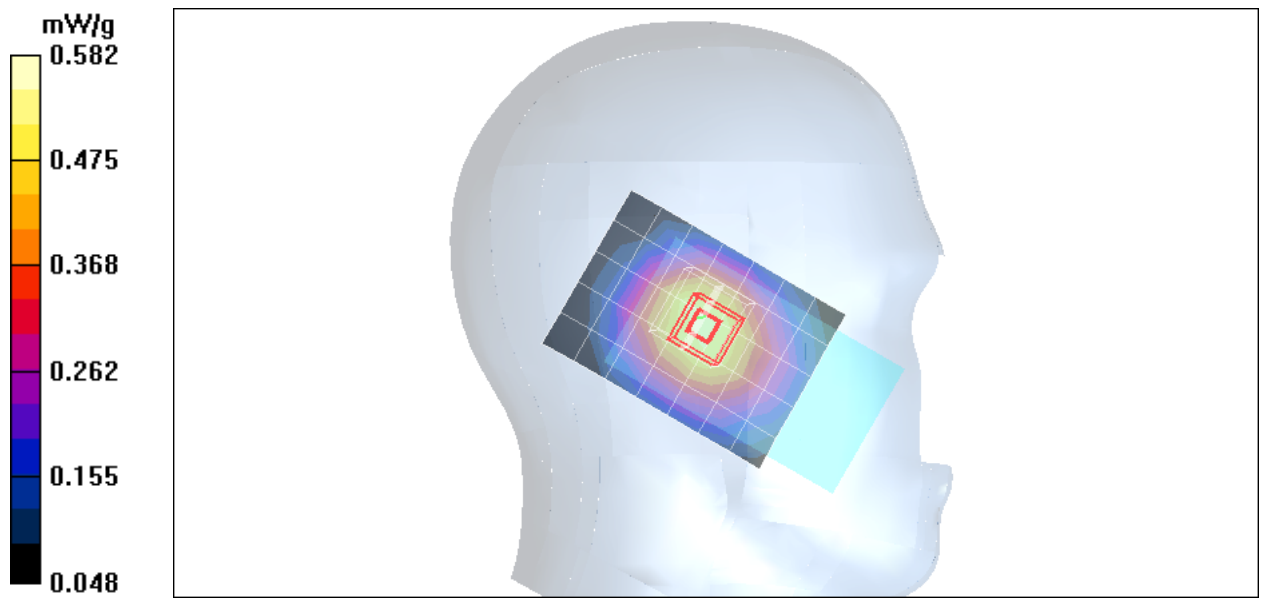

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted Low CH4132/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.283 mW/g


Left Tilted Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.267 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.303 mW/g

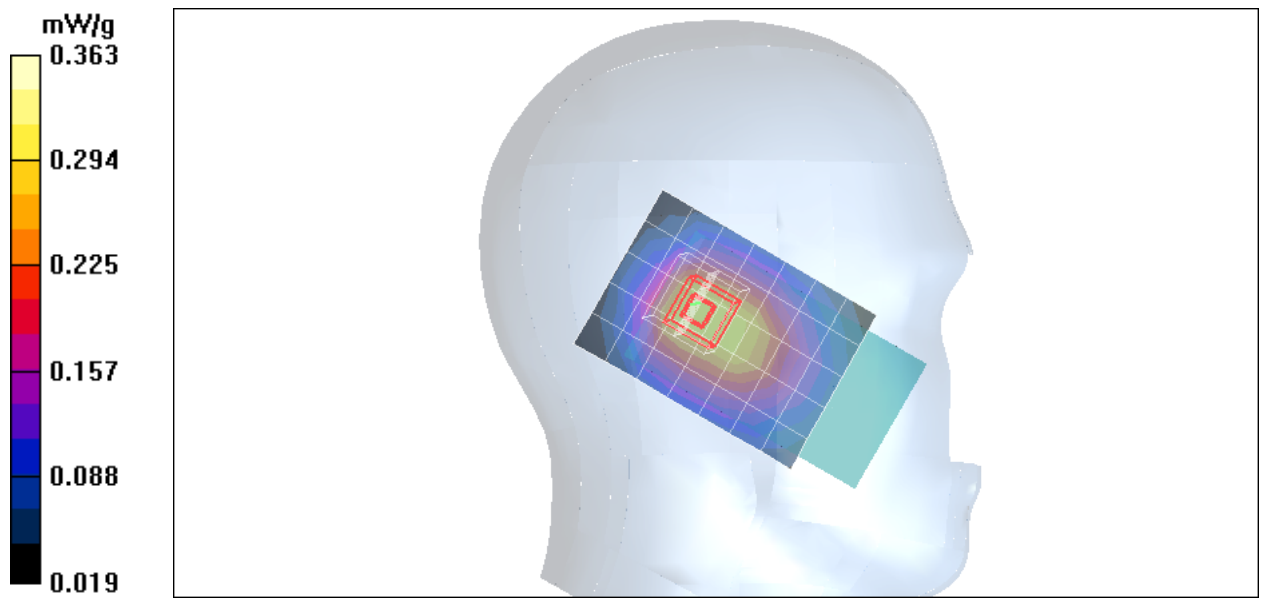

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted Middle CH4182/Area Scan (7x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.289 mW/g

Left Tilted Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 18.7 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.190 mW/g

Maximum value of SAR (measured) = 0.299 mW/g

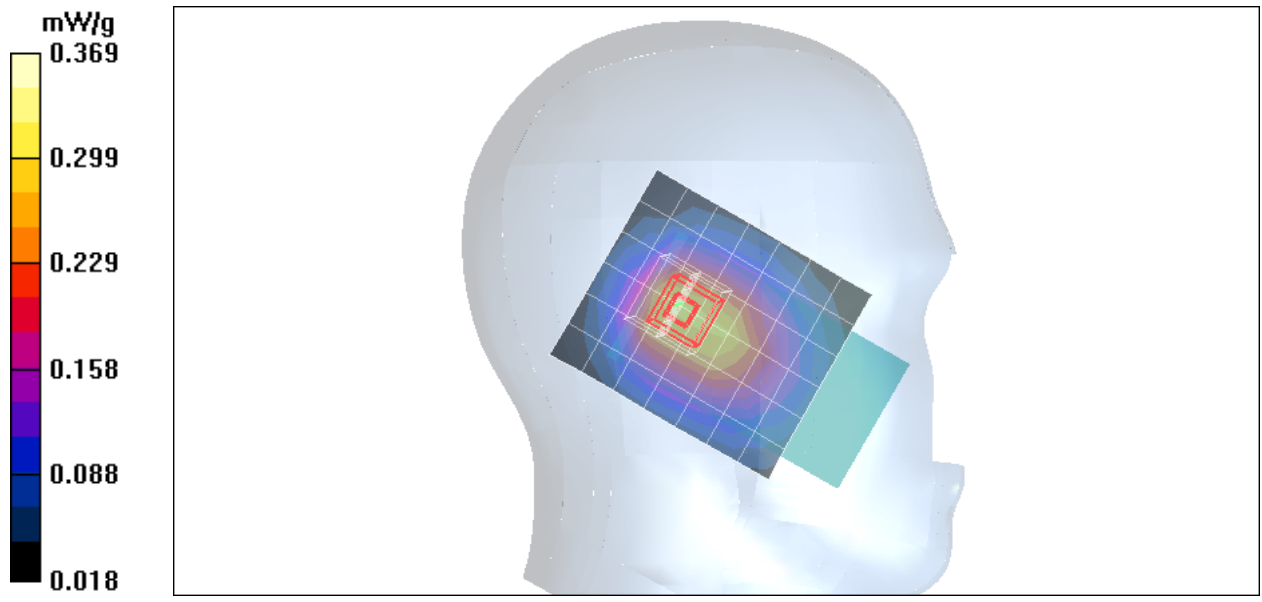

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted High CH4233/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.356 mW/g


Left Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 21.3 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.382 mW/g

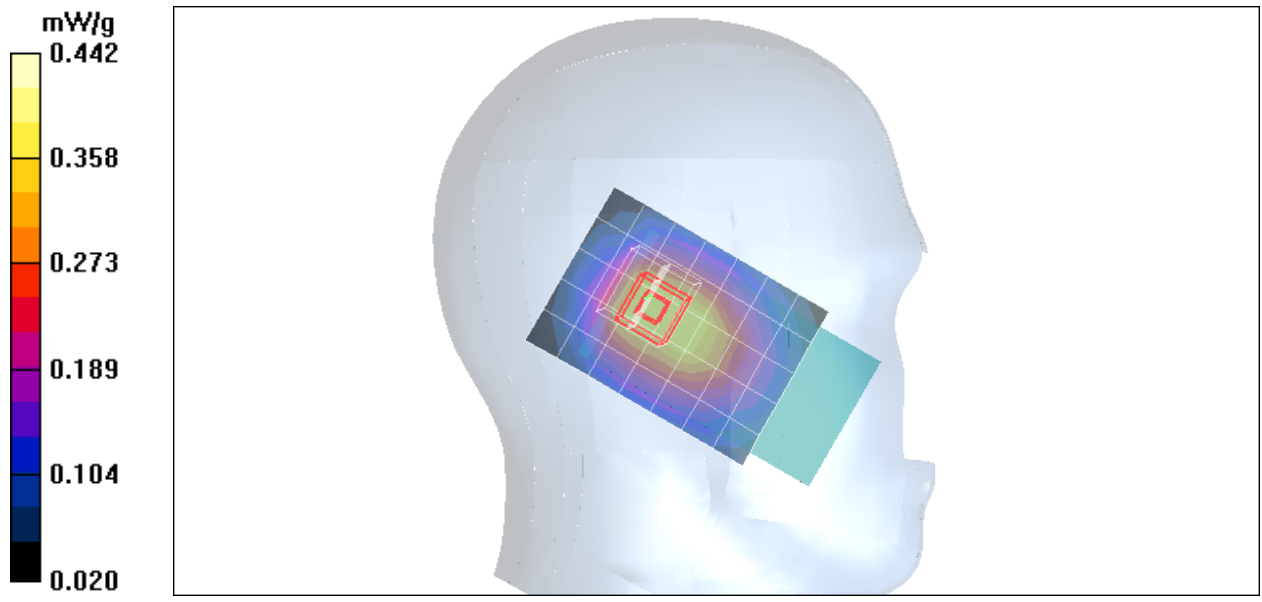

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek Low CH4132/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.429 mW/g


Right Cheek Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.431 mW/g

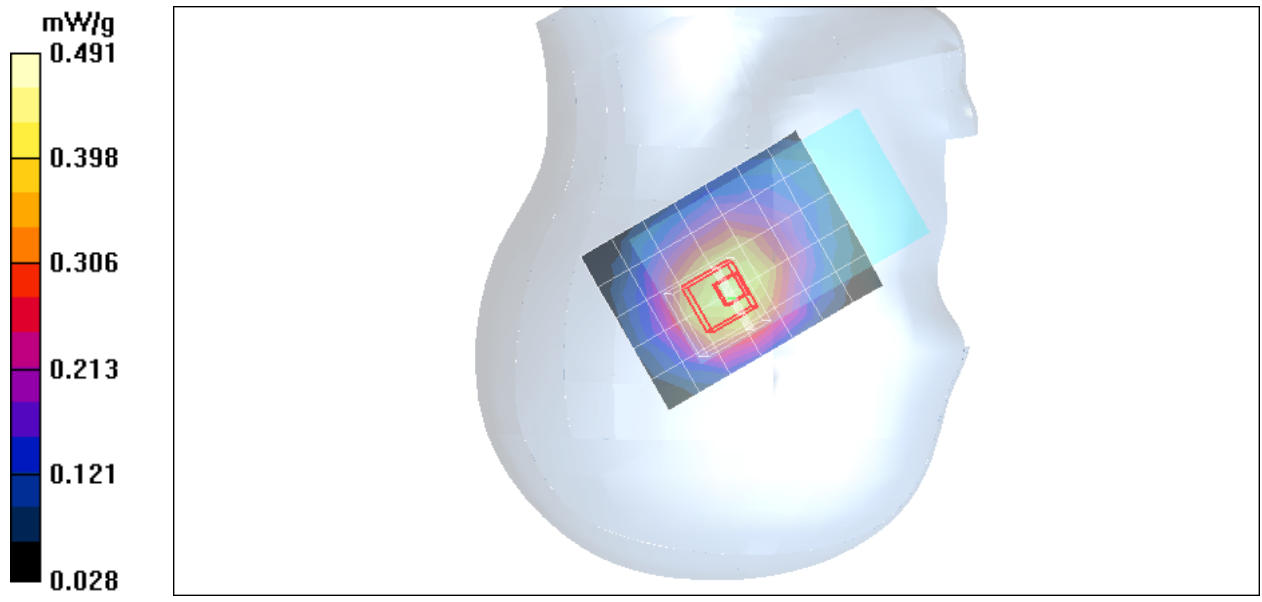

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek Middle CH4182/Area Scan (7x9x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.435 mW/g

Right Cheek Middle CH4182/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 20.7 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.287 mW/g

Maximum value of SAR (measured) = 0.440 mW/g

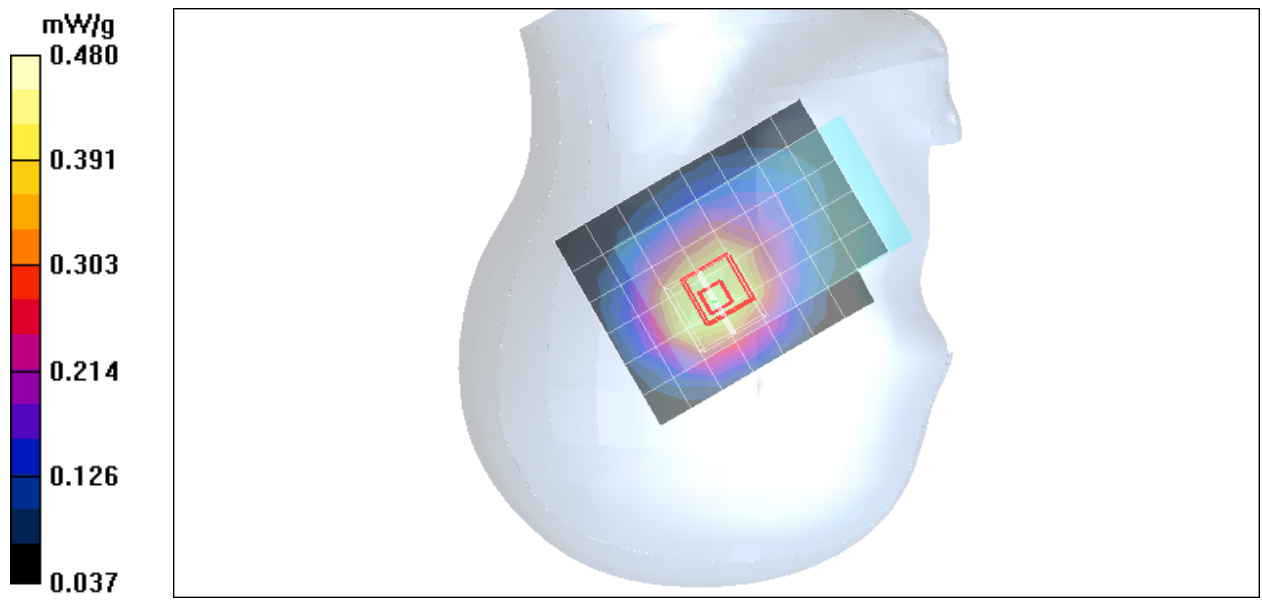

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek High CH4233/Area Scan (6x9x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.575 mW/g

Right Cheek High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 22.5 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.507 mW/g; SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.562 mW/g

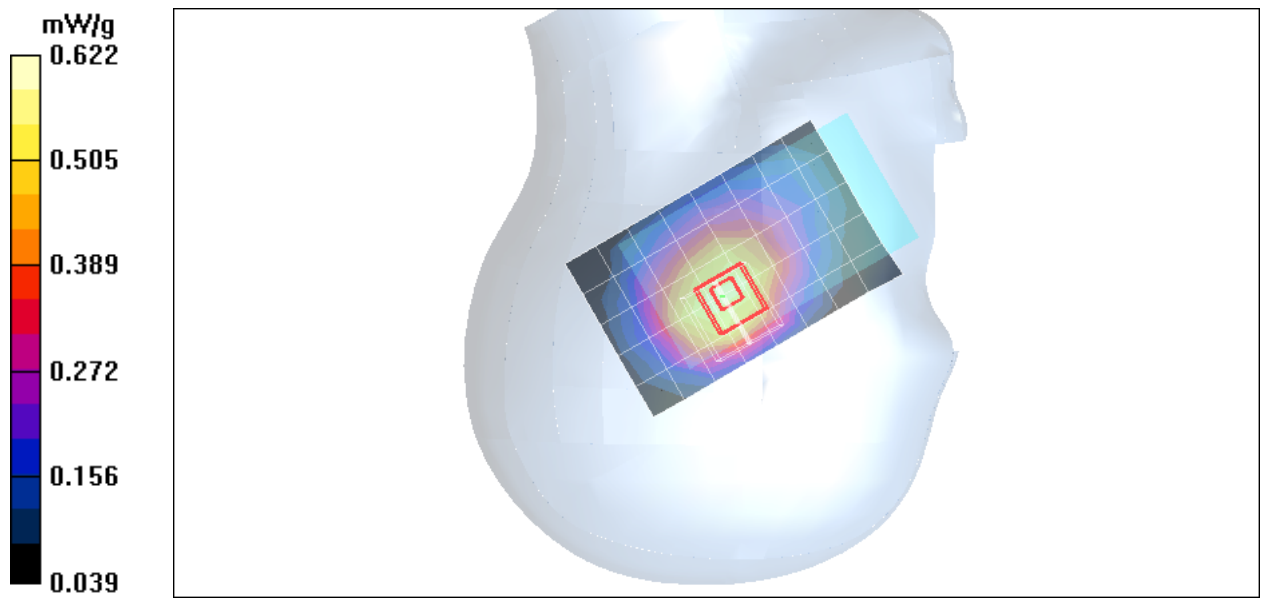

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted Low CH4132/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.337 mW/g


Right Tilted Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.5 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.294 mW/g; SAR(10 g) = 0.207 mW/g

Maximum value of SAR (measured) = 0.339 mW/g

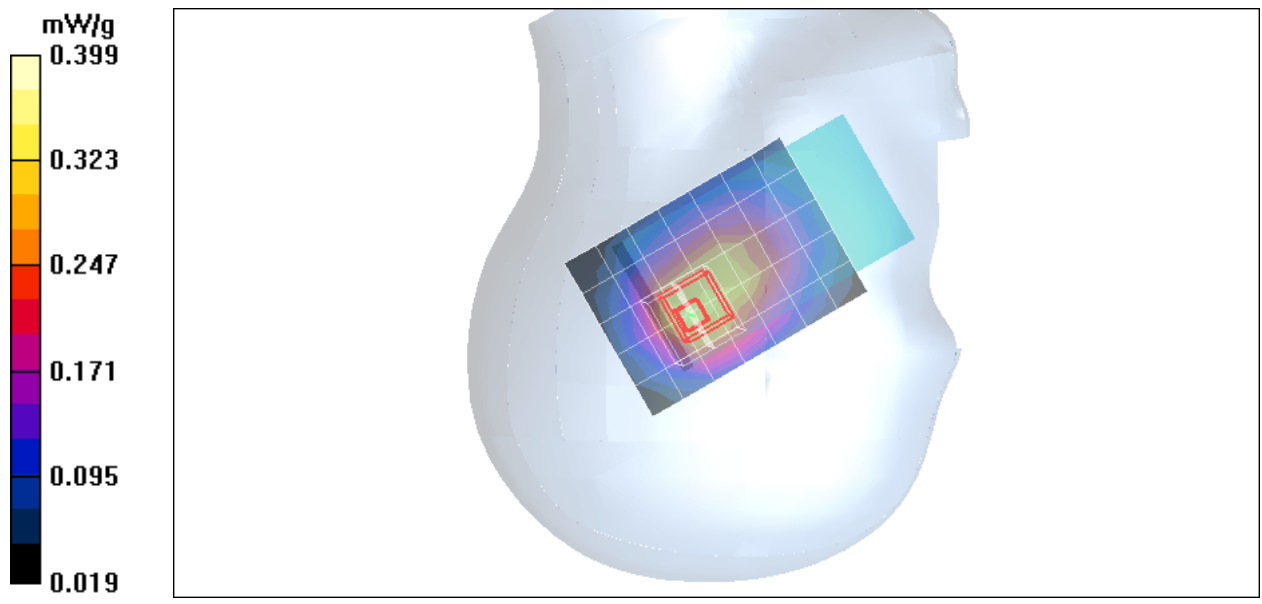

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted Middle CH4182/Area Scan (7x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.356 mW/g

Right Tilted Middle CH4182/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 18.9 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.459 W/kg

SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.351 mW/g

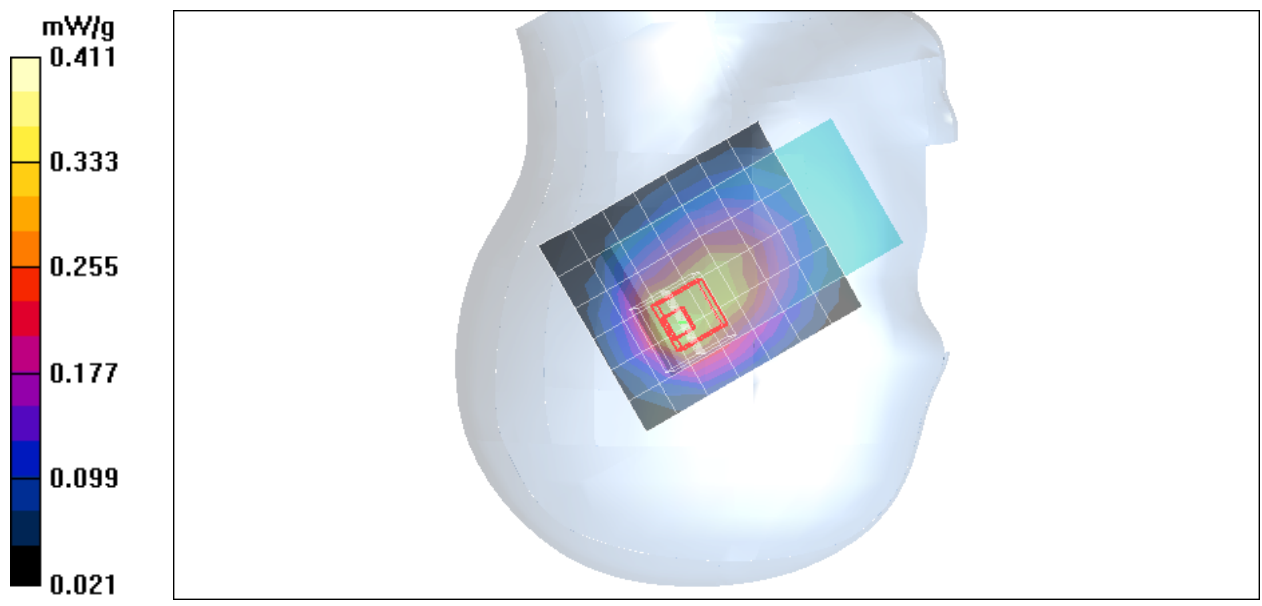

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted High CH4233/Area Scan (6x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.436 mW/g

Right Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 20.8 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.370 mW/g; SAR(10 g) = 0.259 mW/g

Maximum value of SAR (measured) = 0.428 mW/g

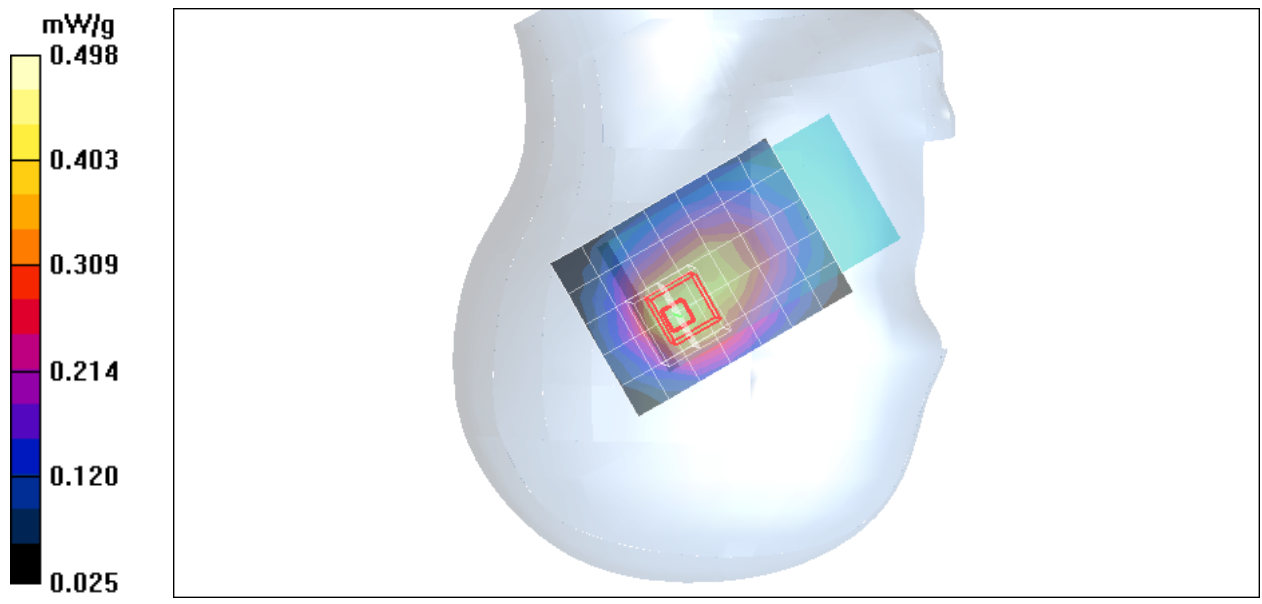

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

co-Location 802.11b+BT+Right Cheek High CH4233/Area Scan

(6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.637 mW/g

co-Location 802.11b+BT+Right Cheek High CH4233/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.3 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.775 W/kg

SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.406 mW/g

Maximum value of SAR (measured) = 0.635 mW/g

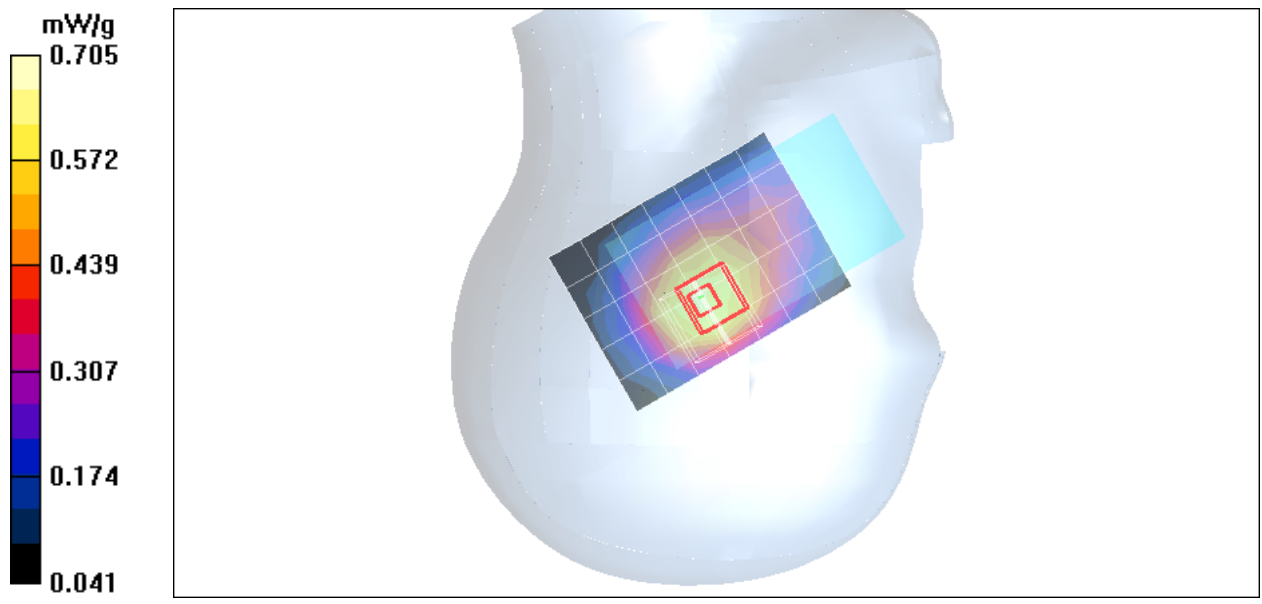

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

co-Location 802.11g+BT+Right Cheek High CH4233/Area Scan

(6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.582 mW/g

co-Location 802.11g+BT+Right Cheek High CH4233/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.0 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.385 mW/g

Maximum value of SAR (measured) = 0.591 mW/g

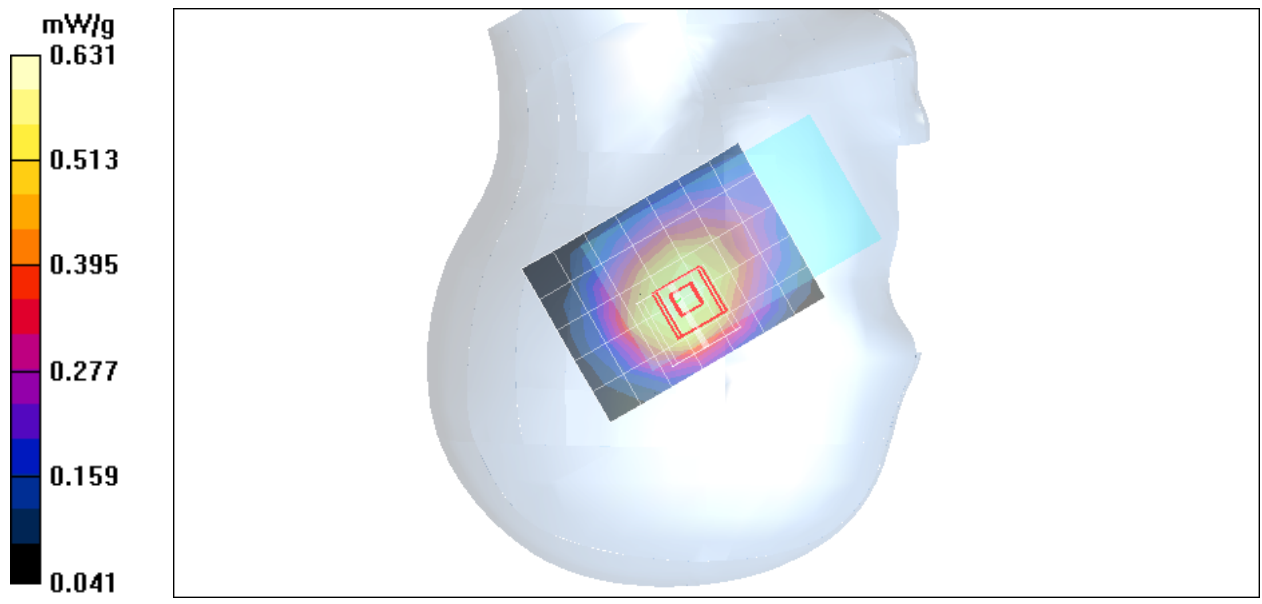

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek Low CH9262/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.596 mW/g

Left Cheek Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.5 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.853 W/kg

SAR(1 g) = 0.528 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 0.634 mW/g


Left Cheek Low CH9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.5 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.735 W/kg

SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.520 mW/g

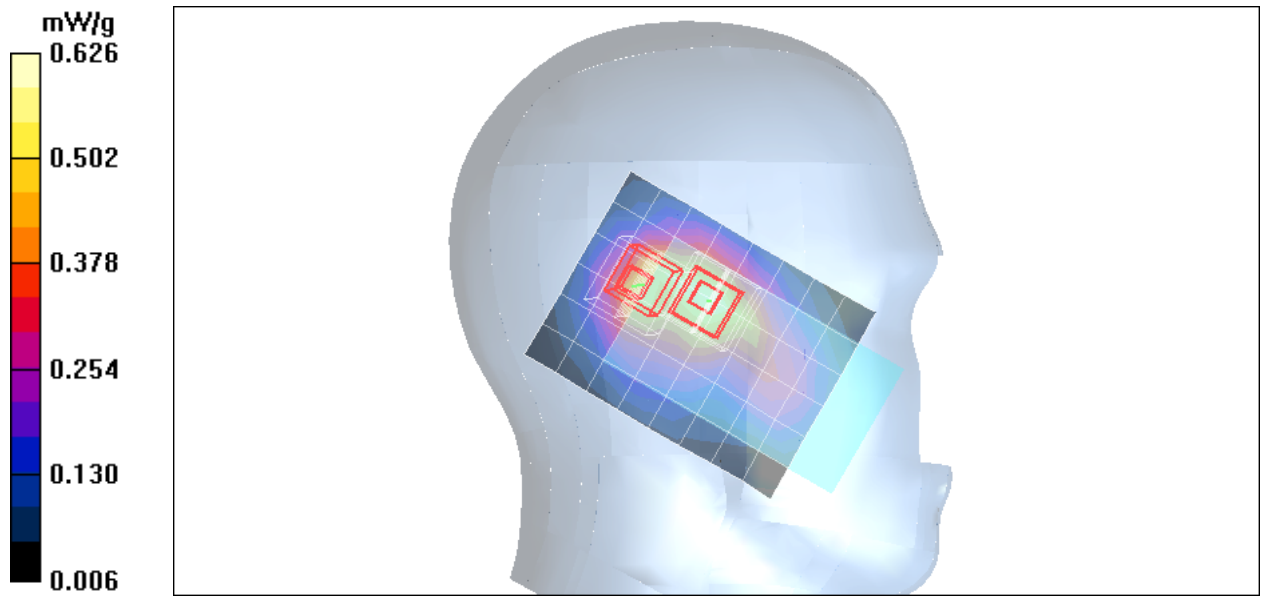

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek Middle CH9400/Area Scan (7x9x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.622 mW/g

Left Cheek Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.4 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.297 mW/g

Maximum value of SAR (measured) = 0.618 mW/g

Left Cheek Middle CH9400/Zoom Scan (5x5x7)/Cube 1: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.4 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.735 W/kg

SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.520 mW/g

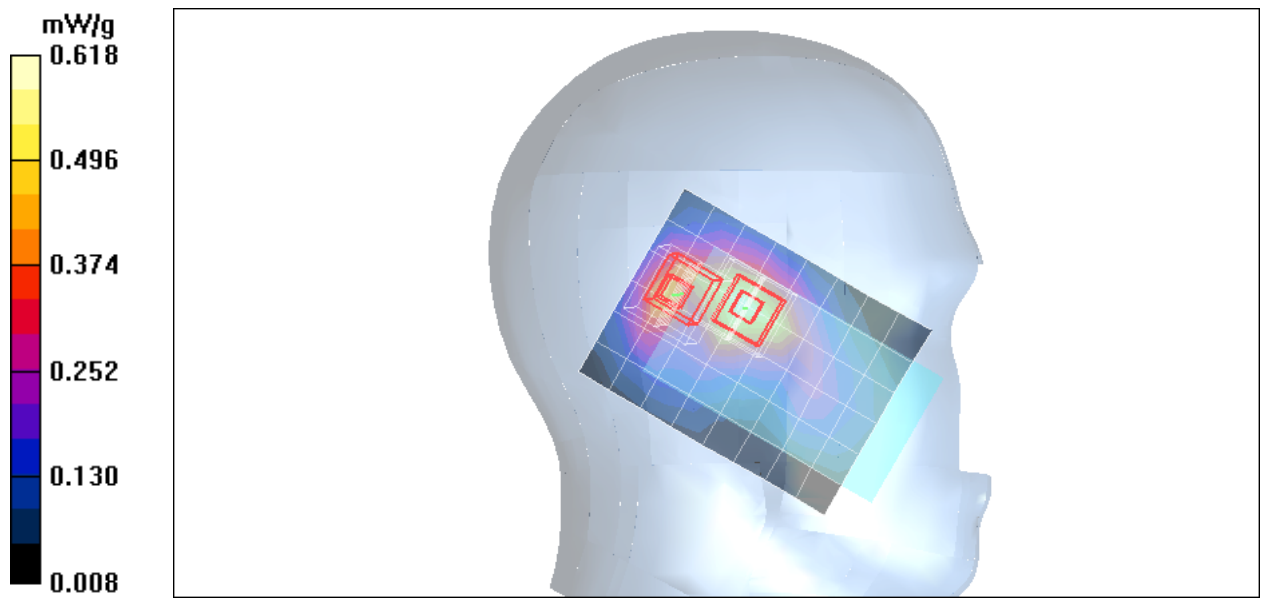

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek High CH9538/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.505 mW/g

Left Cheek High CH9538/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.707 W/kg

SAR(1 g) = 0.431 mW/g; SAR(10 g) = 0.245 mW/g

Maximum value of SAR (measured) = 0.517 mW/g

Left Cheek High CH9538/Zoom Scan (5x5x7)/Cube 1: Measurement


grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.675 W/kg

SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.479 mW/g

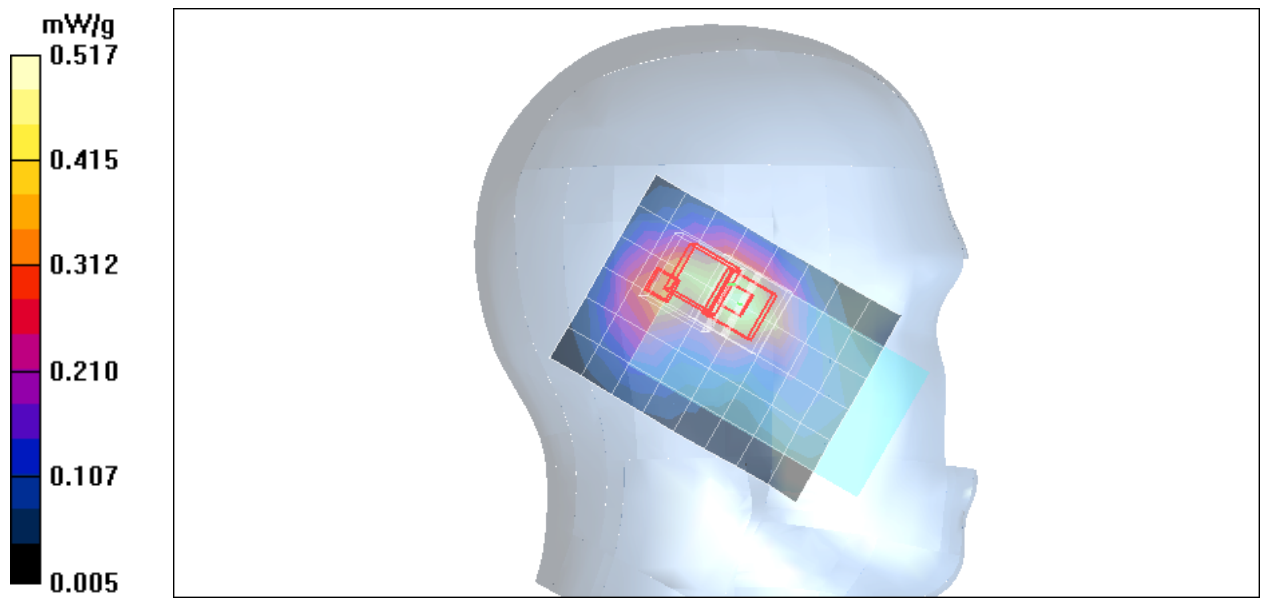

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted Low CH9262/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.773 mW/g


Left Tilted Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.4 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 0.749 mW/g

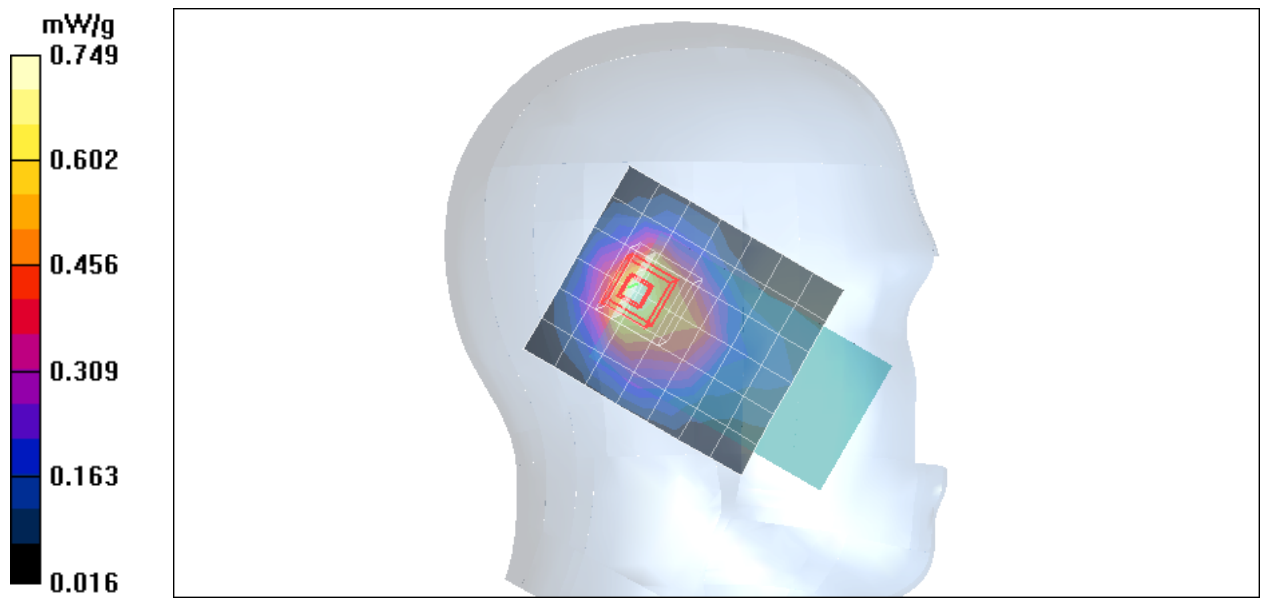

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted Middle CH9400/Area Scan (7x9x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.586 mW/g

Left Tilted Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 15.5 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.995 W/kg

SAR(1 g) = 0.562 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.684 mW/g

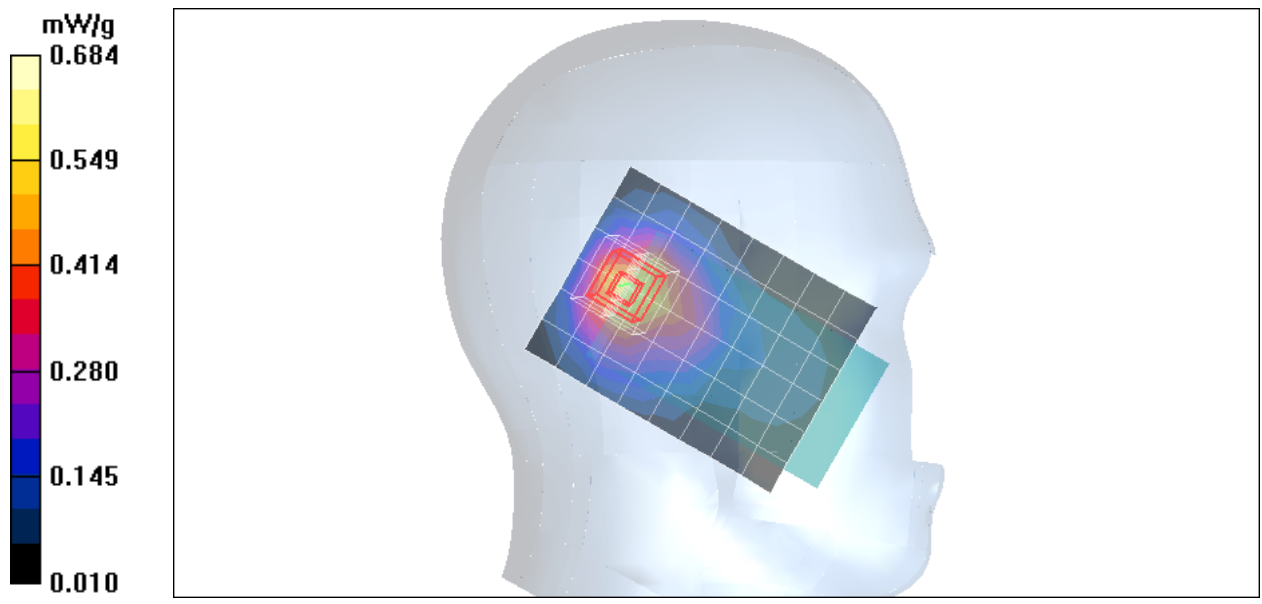

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted High CH9538/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.533 mW/g

Left Tilted High CH9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.441 mW/g; SAR(10 g) = 0.231 mW/g

Maximum value of SAR (measured) = 0.561 mW/g


Left Tilted High CH9538/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.329 mW/g

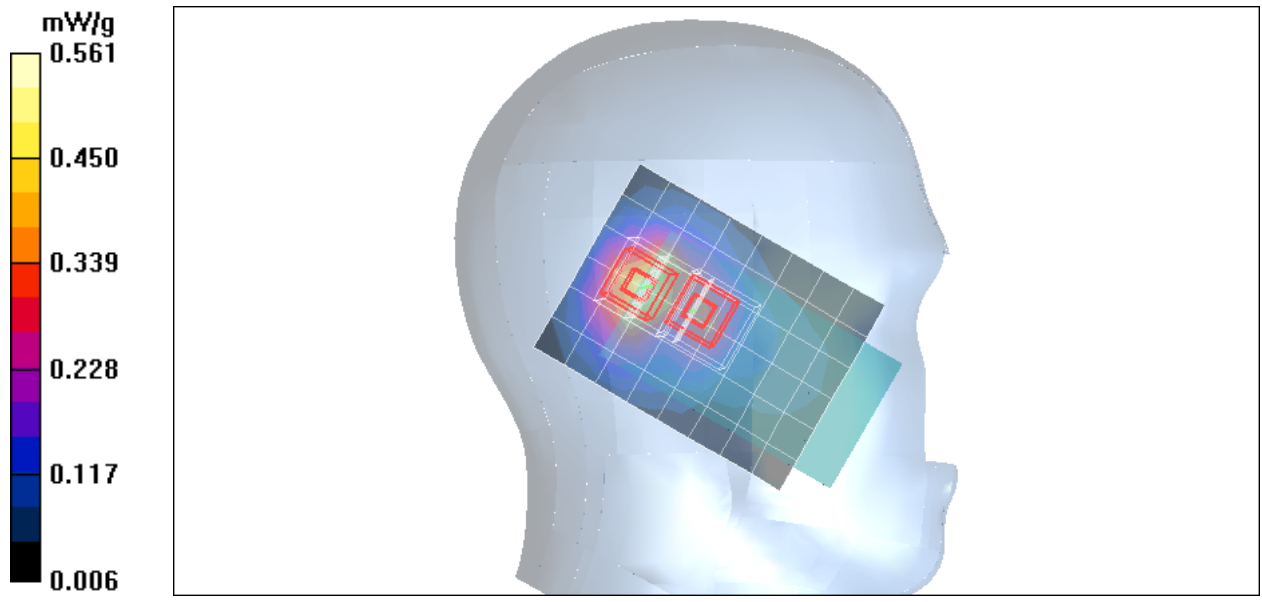

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek Low CH9262/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.455 mW/g

Right Cheek Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.627 W/kg

SAR(1 g) = 0.392 mW/g; SAR(10 g) = 0.230 mW/g

Maximum value of SAR (measured) = 0.421 mW/g



Right Cheek Low CH9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.421 mW/g

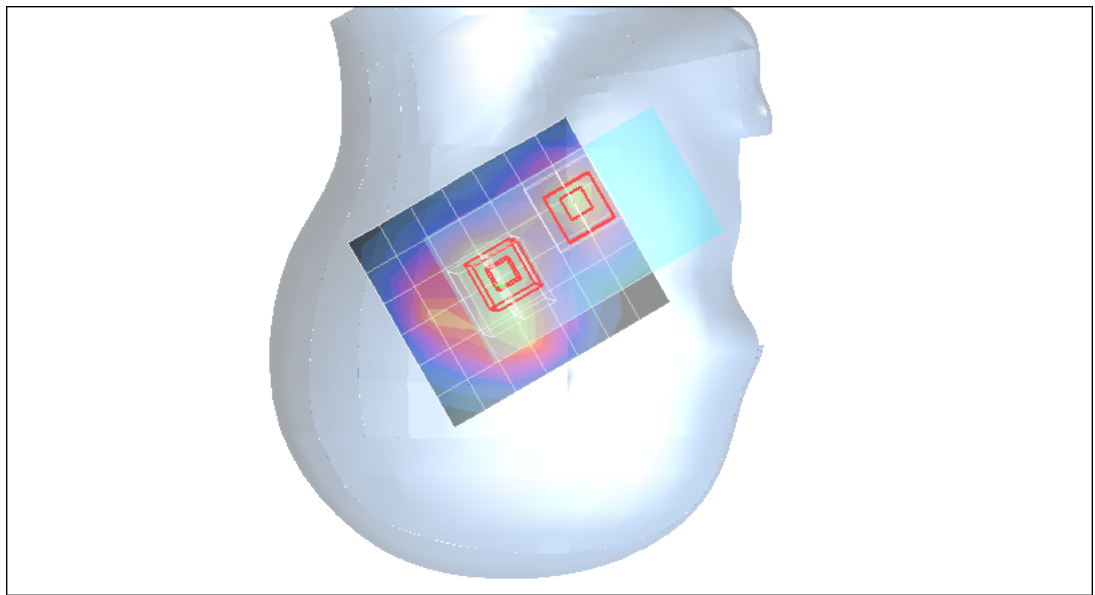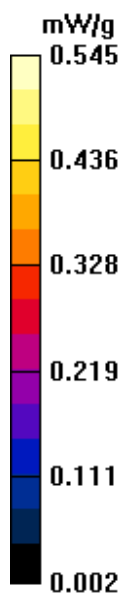

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek Middle CH9400/Area Scan (7x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.398 mW/g

Right Cheek Middle CH9400/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 14.7 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.575 W/kg

SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.431 mW/g

Right Cheek Middle CH9400/Zoom Scan (5x5x7)/Cube 1:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 14.7 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.385 mW/g

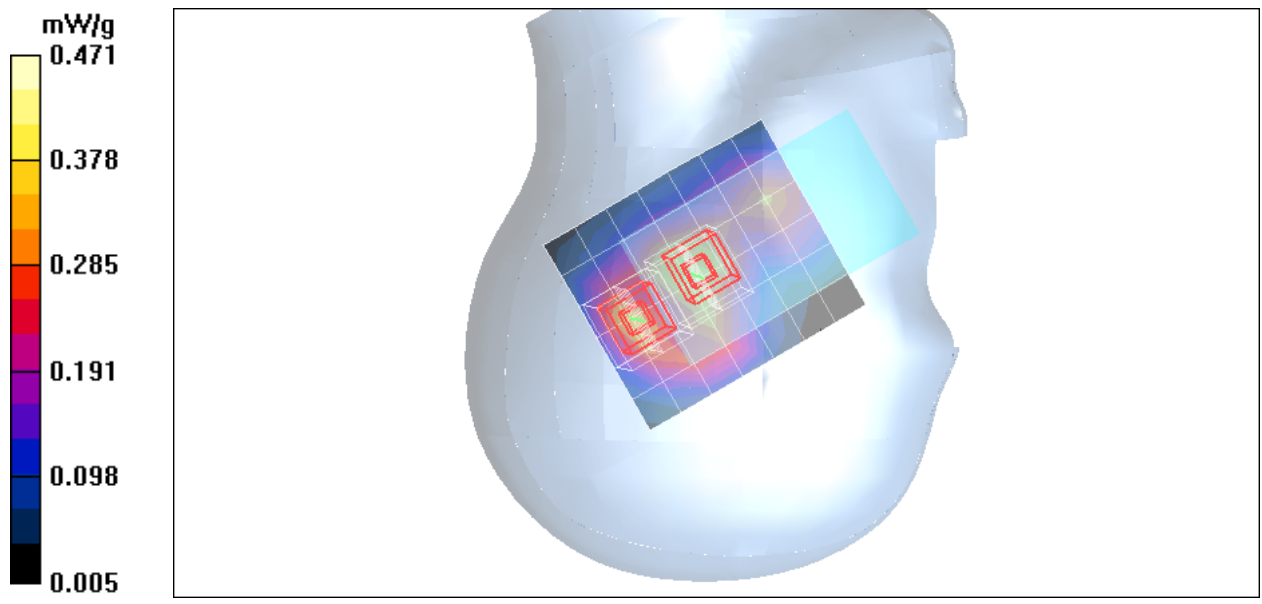

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek High CH9538/Area Scan (7x9x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.294 mW/g

Right Cheek High CH9538/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 12.2 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.305 mW/g

Right Cheek High CH9538/Zoom Scan (5x5x7)/Cube 1: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 12.2 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.452 W/kg

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.133 mW/g

Maximum value of SAR (measured) = 0.301 mW/g

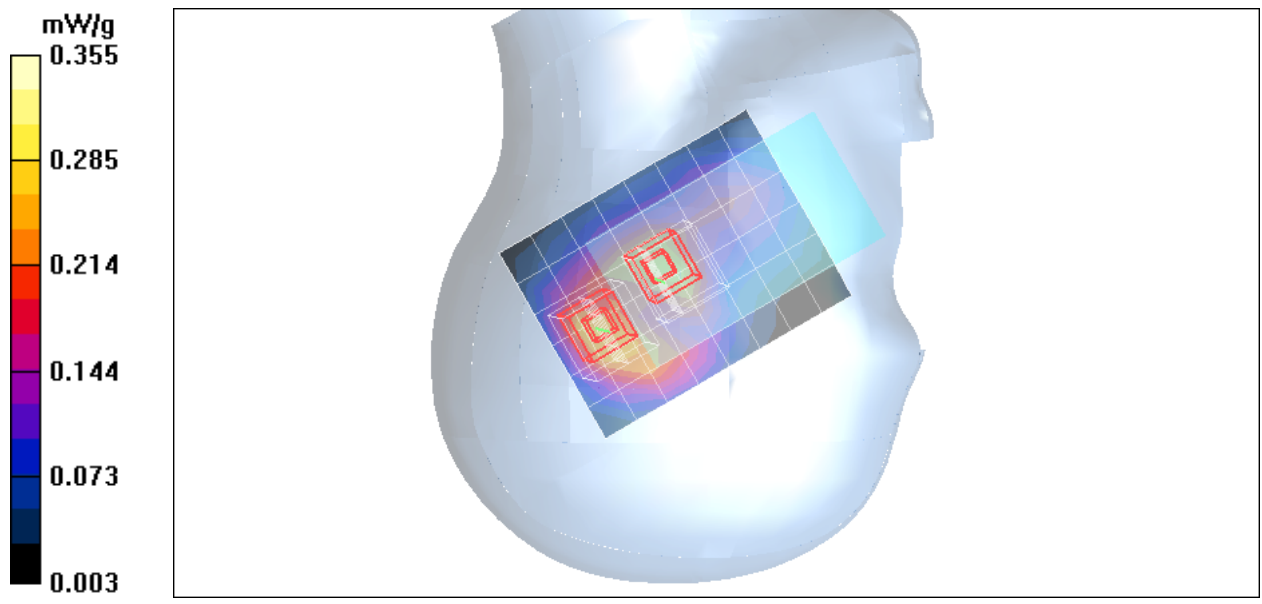

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted Low CH9262/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.565 mW/g

Right Tilted Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.278 mW/g

Maximum value of SAR (measured) = 0.628 mW/g

Right Tilted Low CH9262/Zoom Scan (5x5x7)/Cube 1: Measurement



grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.285 mW/g

Maximum value of SAR (measured) = 0.613 mW/g

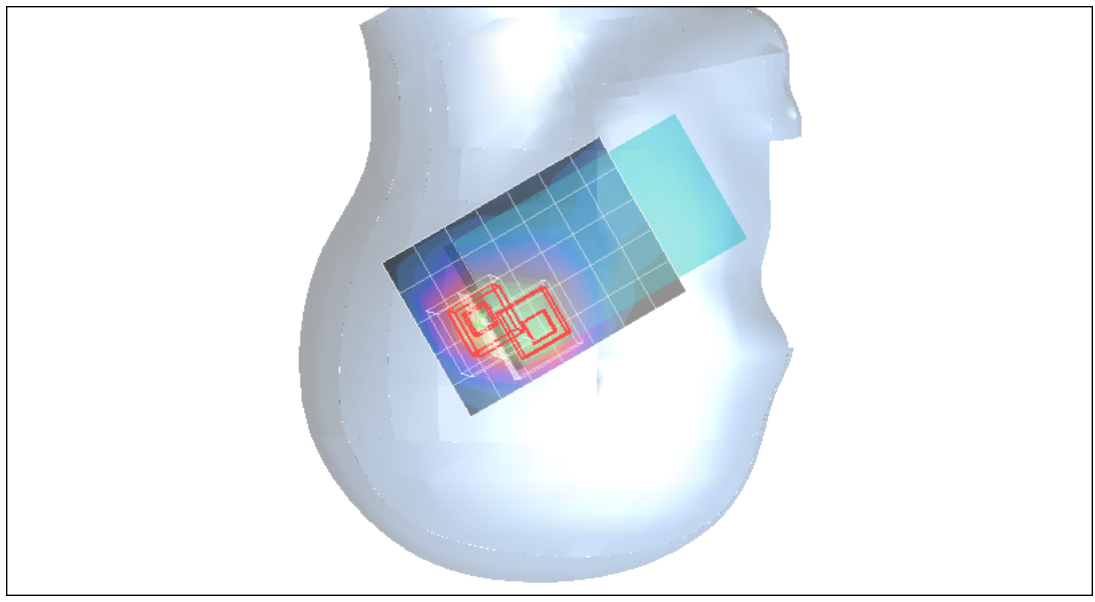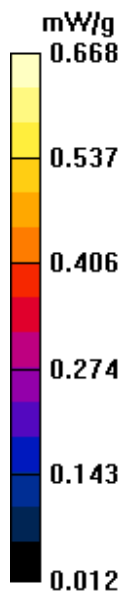

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted Middle CH9400/Area Scan (7x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.438 mW/g

Right Tilted Middle CH9400/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 14.5 V/m; Power Drift = -0.000 dB

Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.251 mW/g

Maximum value of SAR (measured) = 0.578 mW/g

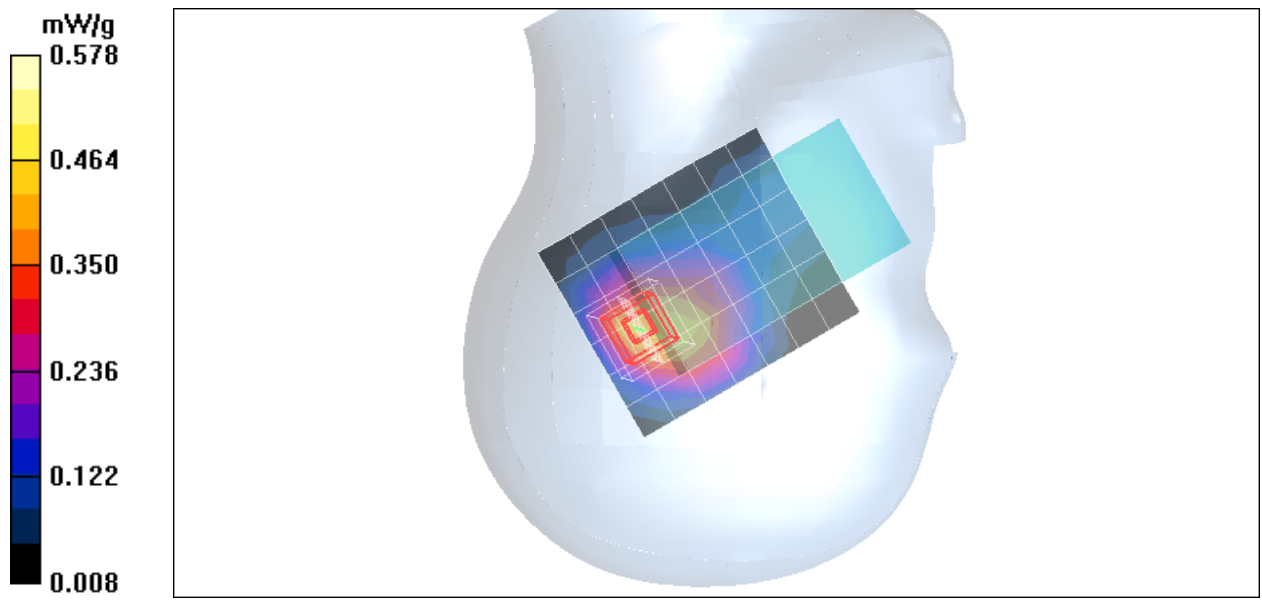

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II close

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted High CH9538/Area Scan (6x9x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.354 mW/g

Right Tilted High CH9538/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 12.5 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.187 mW/g

Maximum value of SAR (measured) = 0.420 mW/g

Right Tilted High CH9538/Zoom Scan (5x5x7)/Cube 1: Measurement

grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 12.5 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.312 mW/g

