

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek Low CH4132/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.402 mW/g


Left Cheek Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.7 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.488 W/kg

SAR(1 g) = 0.360 mW/g; SAR(10 g) = 0.258 mW/g

Maximum value of SAR (measured) = 0.406 mW/g

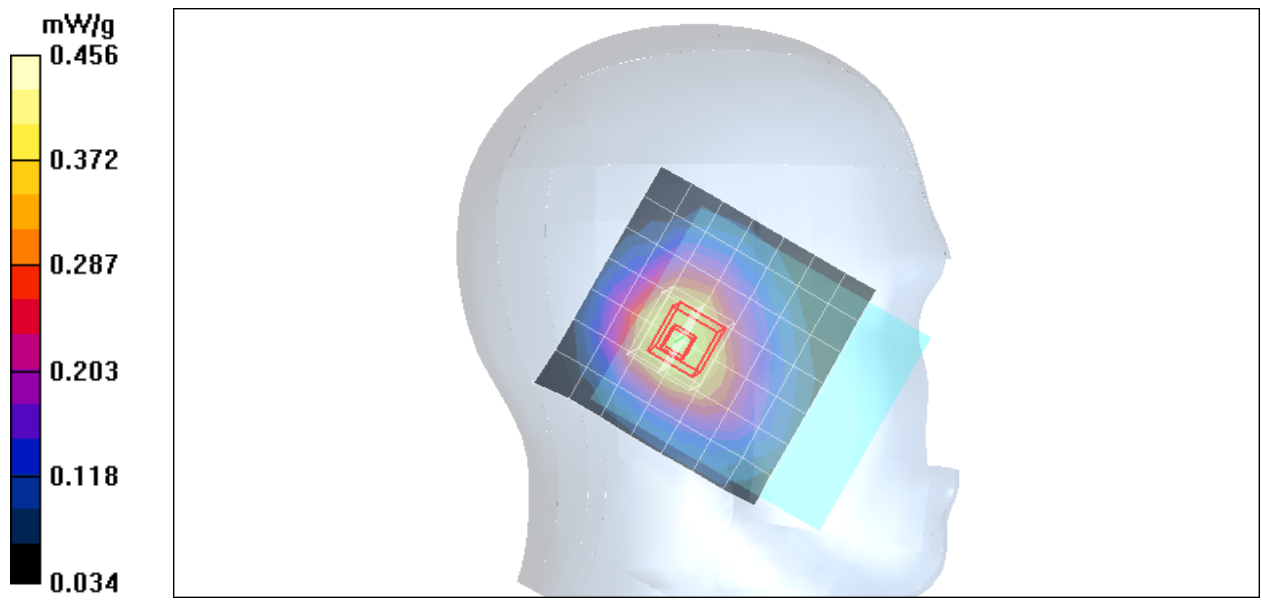

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek Middle CH4182/Area Scan (8x9x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.385 mW/g

Left Cheek Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 20.5 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.344 mW/g; SAR(10 g) = 0.245 mW/g

Maximum value of SAR (measured) = 0.393 mW/g

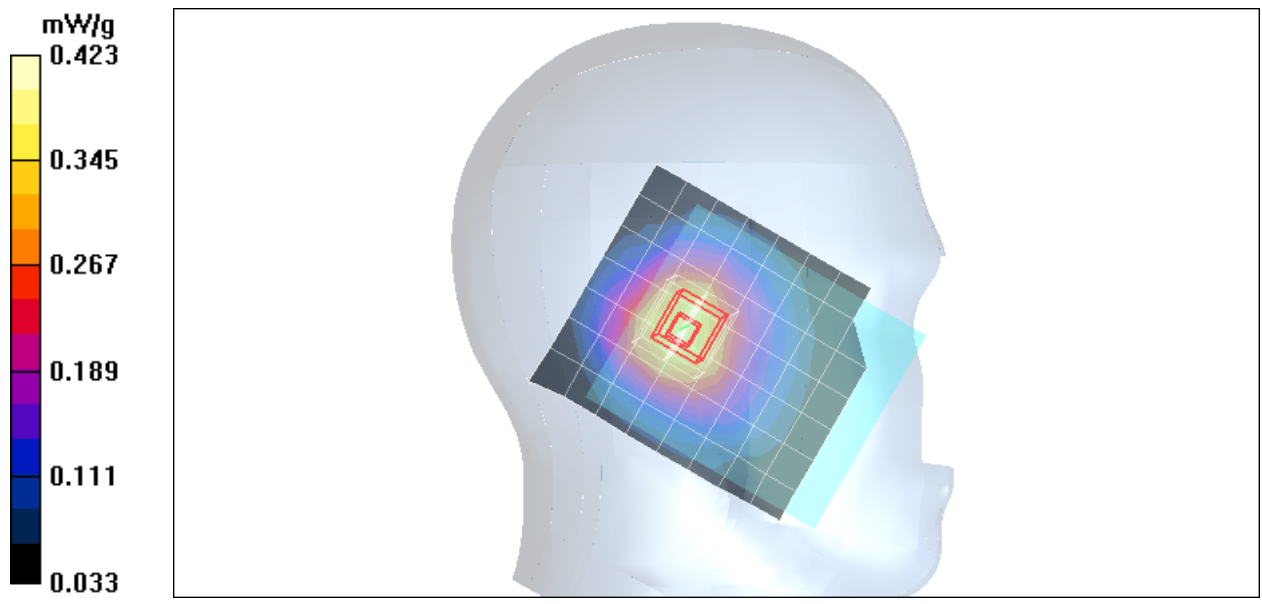

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek High CH4233/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.522 mW/g

Left Cheek High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 23.3 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.334 mW/g

Maximum value of SAR (measured) = 0.537 mW/g

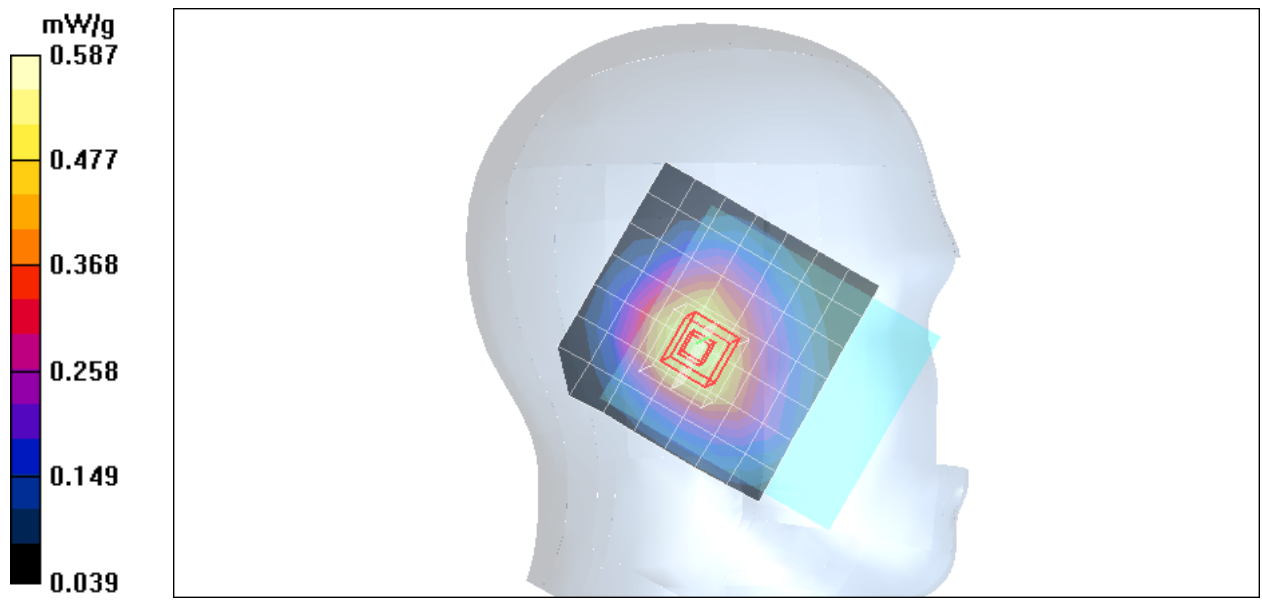

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted Low CH4132/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.397 mW/g


Left Tilted Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 21.9 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.501 W/kg

SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.411 mW/g

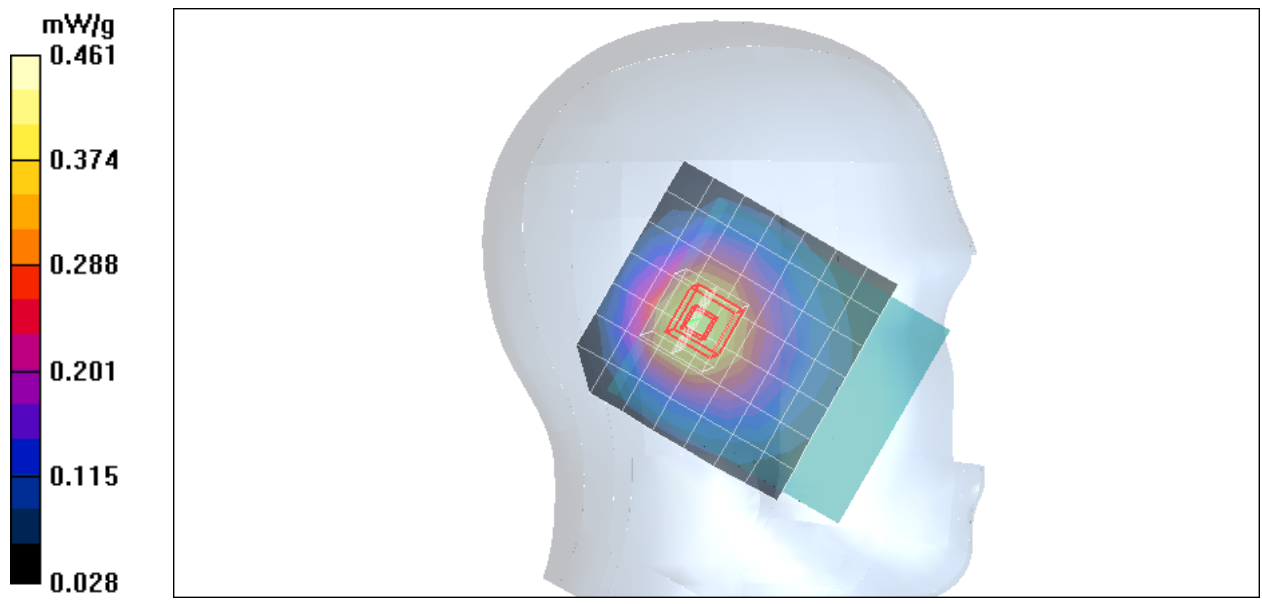

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted Middle CH4182/Area Scan (8x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.340 mW/g

Left Tilted Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 20.3 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.218 mW/g

Maximum value of SAR (measured) = 0.348 mW/g

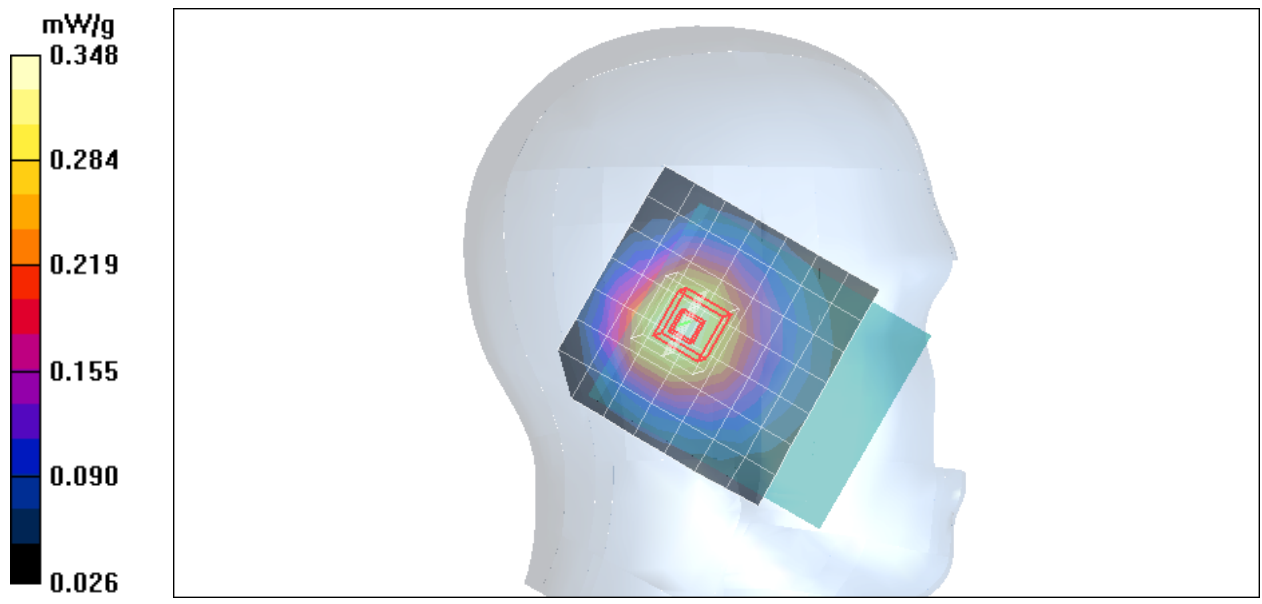

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted High CH4233/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.490 mW/g


Left Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 23.6 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.308 mW/g

Maximum value of SAR (measured) = 0.496 mW/g

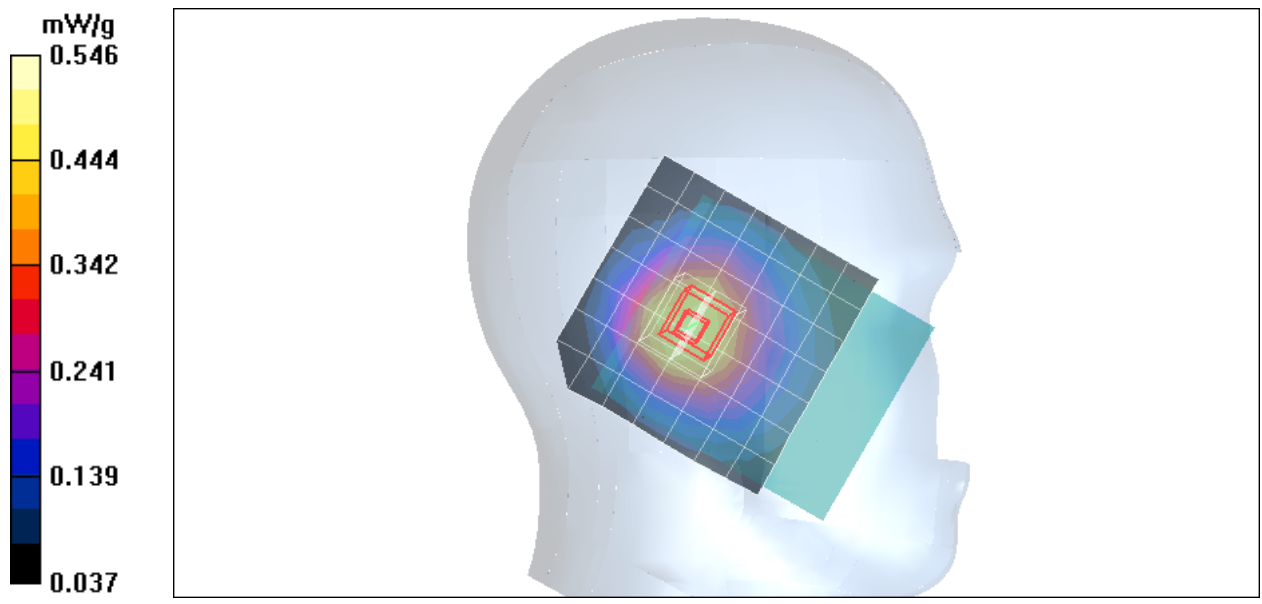

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek Low CH4132/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.493 mW/g


Right Cheek Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.9 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.321 mW/g

Maximum value of SAR (measured) = 0.516 mW/g

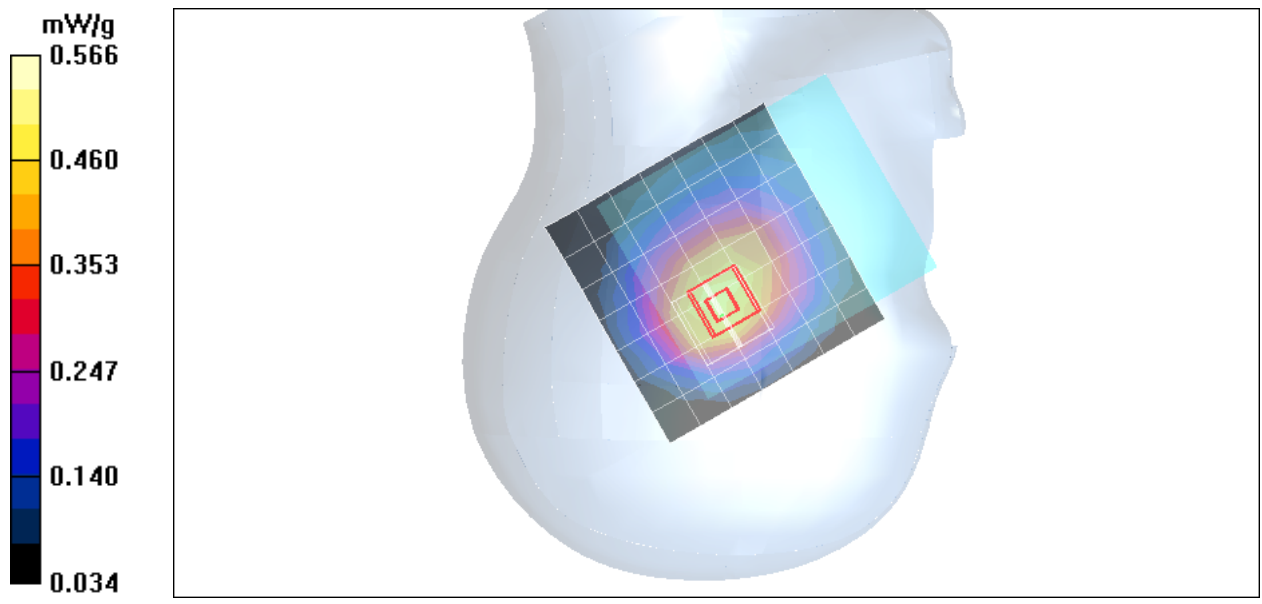

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek Middle CH4182/Area Scan (8x9x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.427 mW/g

Right Cheek Middle CH4182/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 19.7 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.534 W/kg

SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.274 mW/g

Maximum value of SAR (measured) = 0.433 mW/g

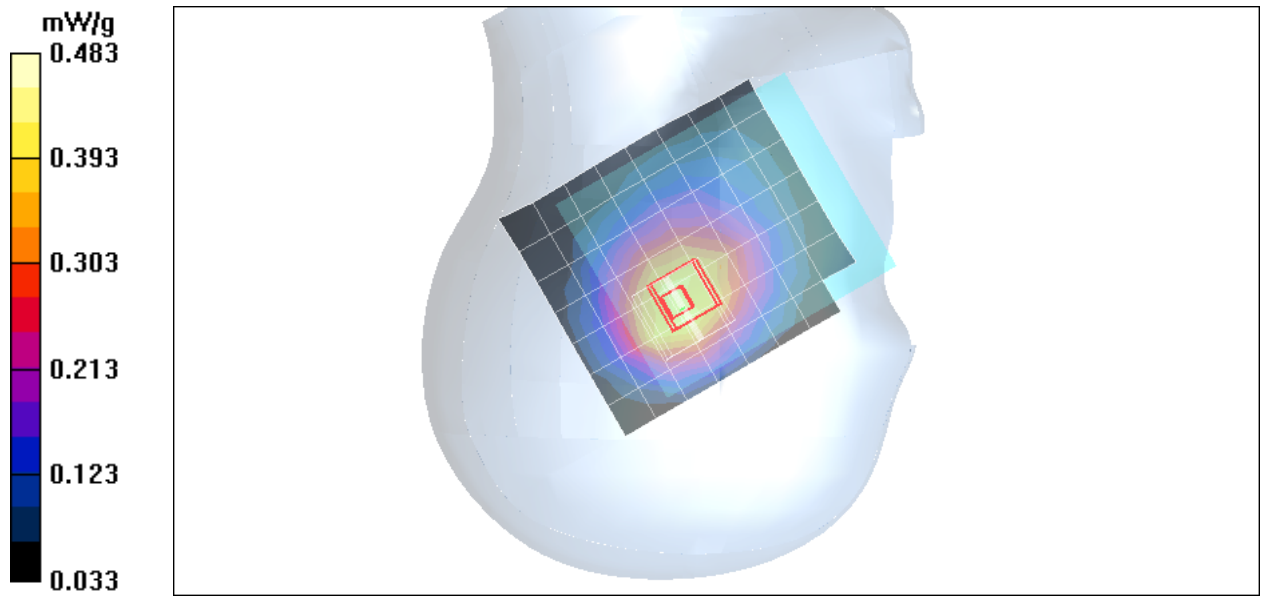

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek High CH4233/Area Scan (8x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.548 mW/g

Right Cheek High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 22.7 V/m; Power Drift = -0.000 dB

Peak SAR (extrapolated) = 0.667 W/kg

SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.341 mW/g

Maximum value of SAR (measured) = 0.543 mW/g

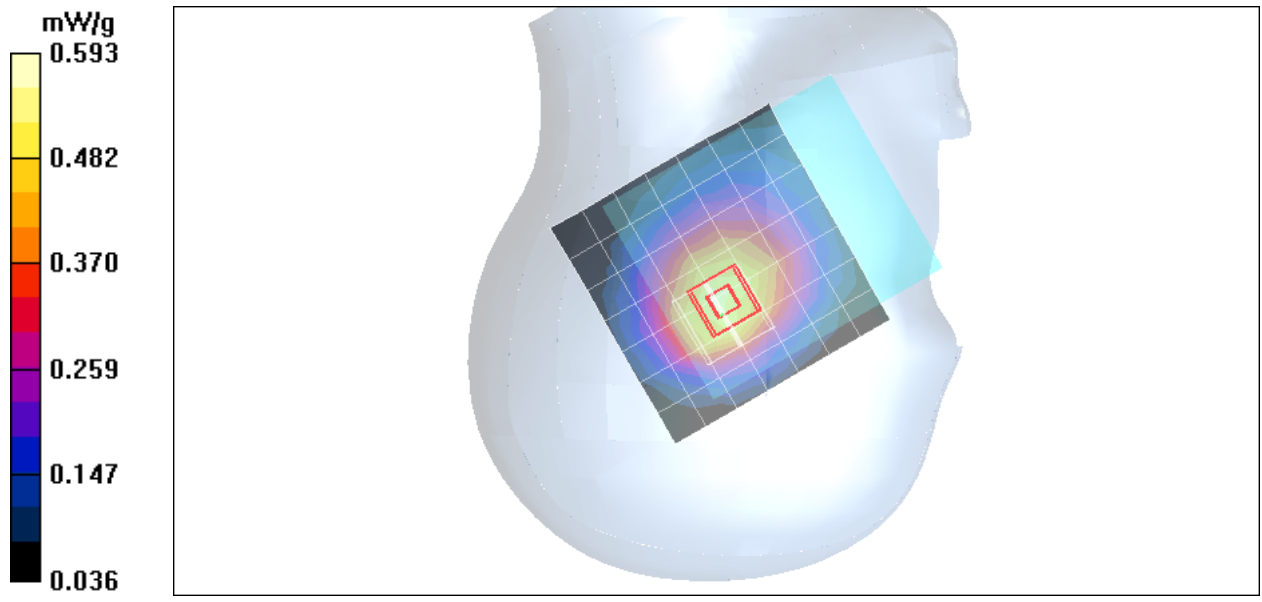

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted Low CH4132/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.442 mW/g


Right Tilted Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 21.3 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.396 mW/g; SAR(10 g) = 0.273 mW/g

Maximum value of SAR (measured) = 0.448 mW/g

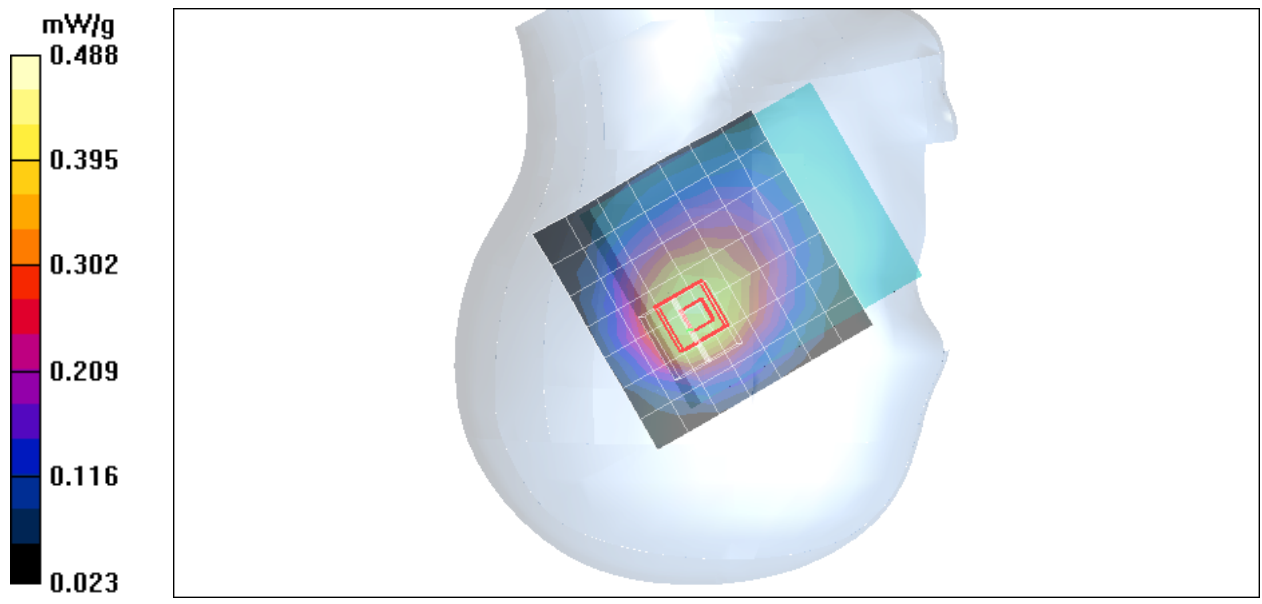

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted Middle CH4182/Area Scan (8x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.358 mW/g

Right Tilted Middle CH4182/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 19.0 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.482 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.225 mW/g

Maximum value of SAR (measured) = 0.374 mW/g

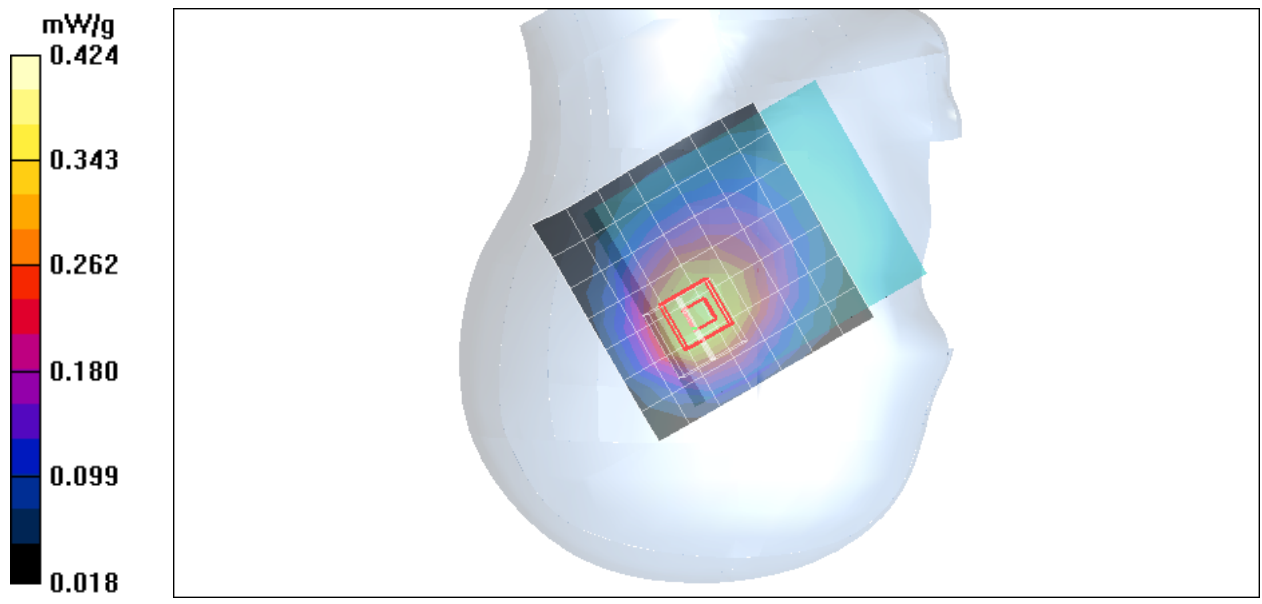

Test Laboratory: Compliance Certification Services Inc.

WCDMA band v -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(6.06, 6.06, 6.06);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted High CH4233/Area Scan (8x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.466 mW/g

Right Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 21.7 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

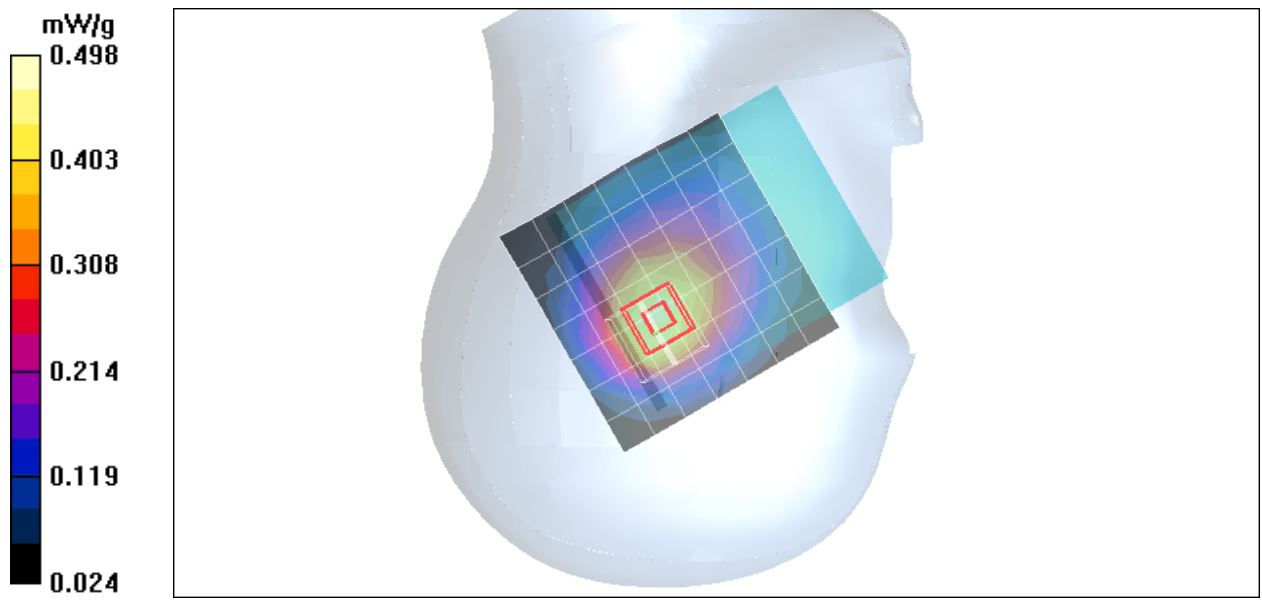

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek Low CH9262/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.972 mW/g


Left Cheek Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 22.4 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.834 mW/g; SAR(10 g) = 0.470 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

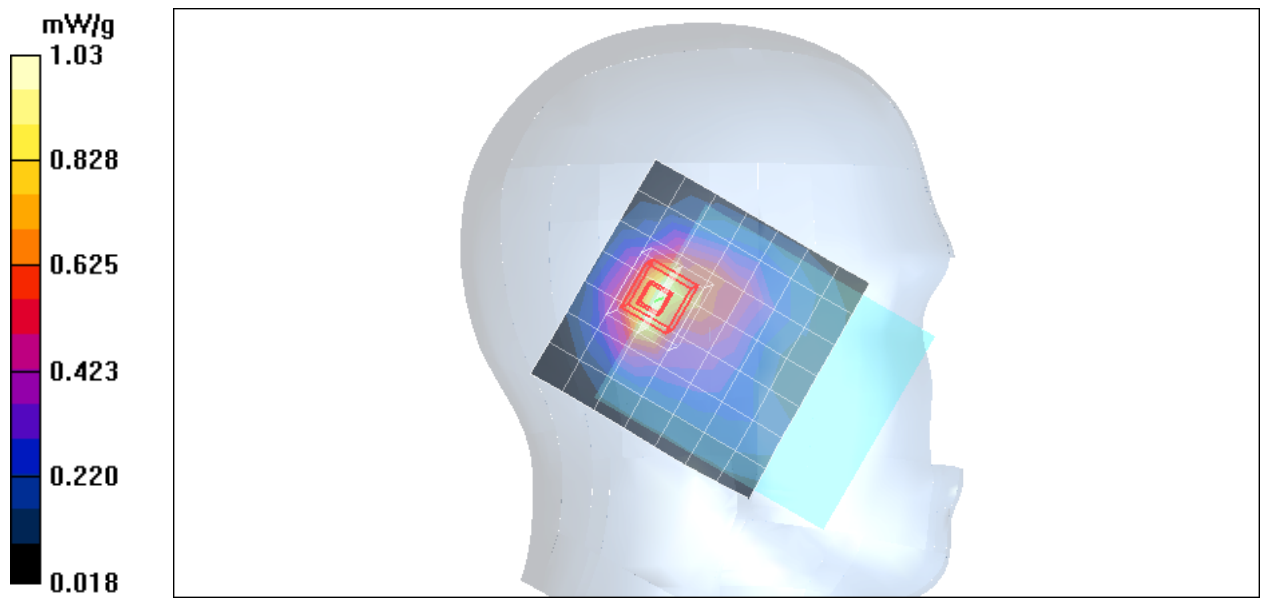

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek Middle CH9400/Area Scan (8x9x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.933 mW/g

Left Cheek Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 19.1 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 0.981 mW/g

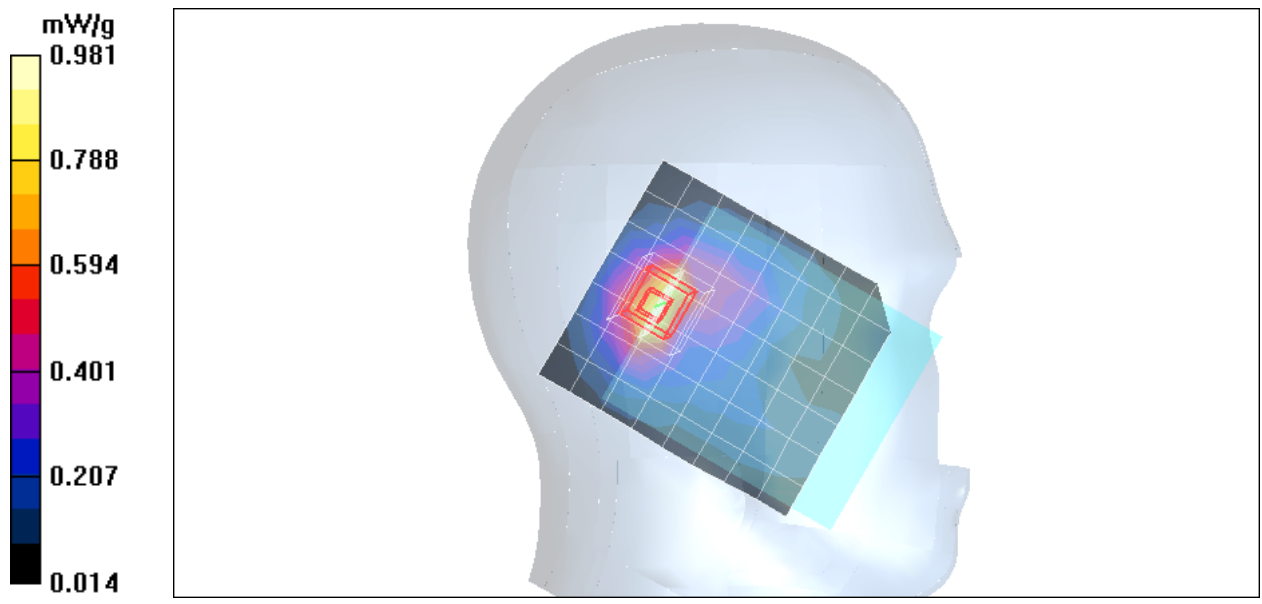

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Cheek High CH9538/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.765 mW/g

Left Cheek High CH9538/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.335 mW/g

Maximum value of SAR (measured) = 0.777 mW/g

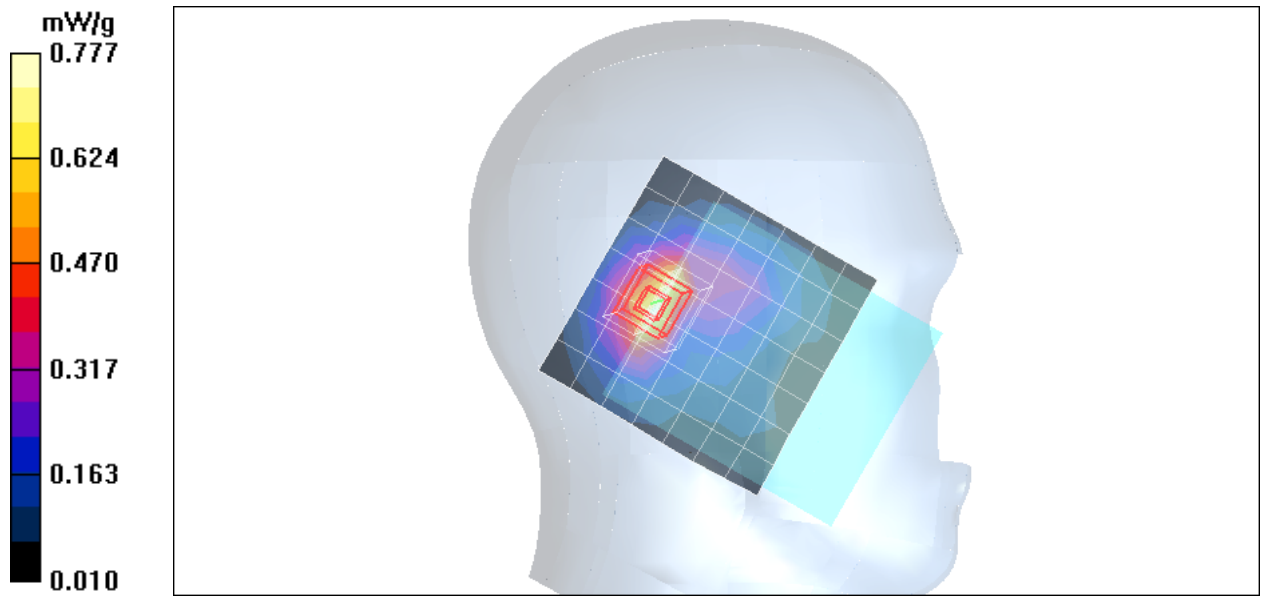

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted Low CH9262/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.33 mW/g


Left Tilted Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.6 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.180 mW/g; SAR(10 g) = 0.653 mW/g

Maximum value of SAR (measured) = 1.45 mW/g

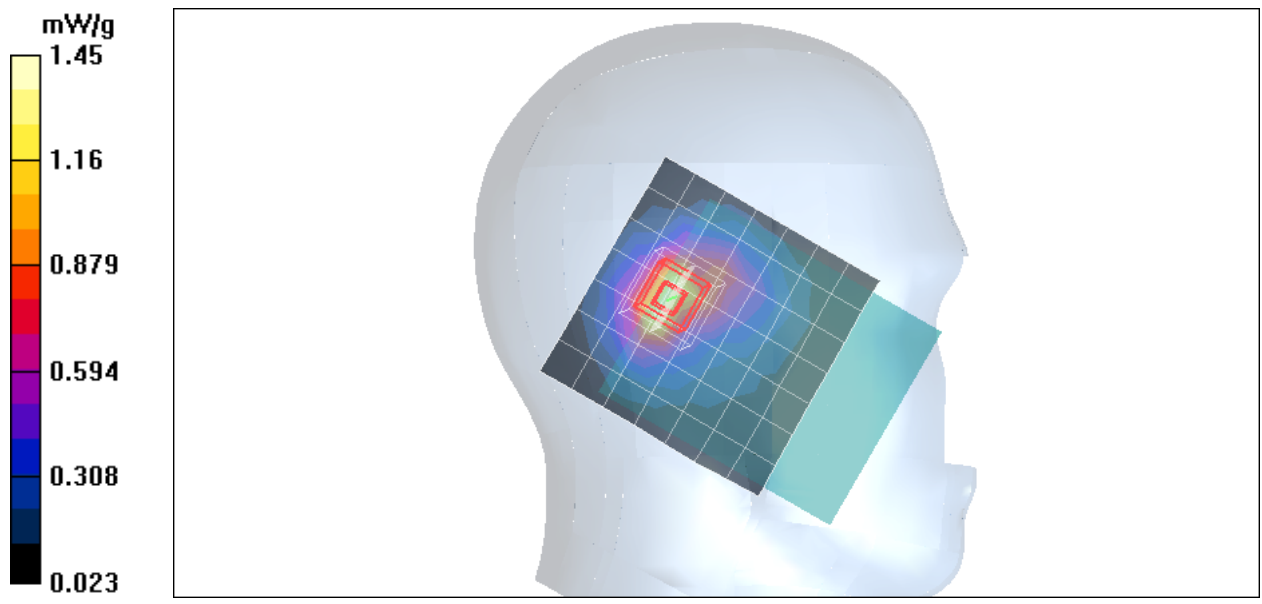

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted Middle CH9400/Area Scan (8x9x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.33 mW/g

Left Tilted Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 21.5 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 1.090 mW/g; SAR(10 g) = 0.592 mW/g

Maximum value of SAR (measured) = 1.35 mW/g

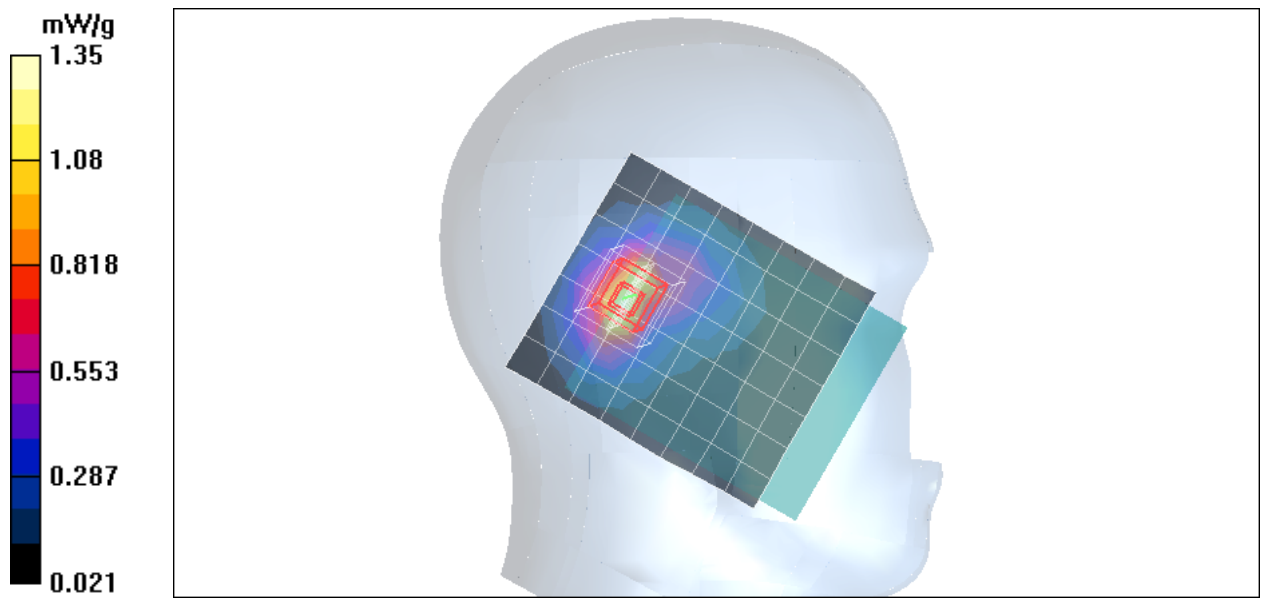

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Tilted High CH9538/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 mW/g

Left Tilted High CH9538/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.8 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.870 mW/g; SAR(10 g) = 0.468 mW/g

Maximum value of SAR (measured) = 1.08 mW/g

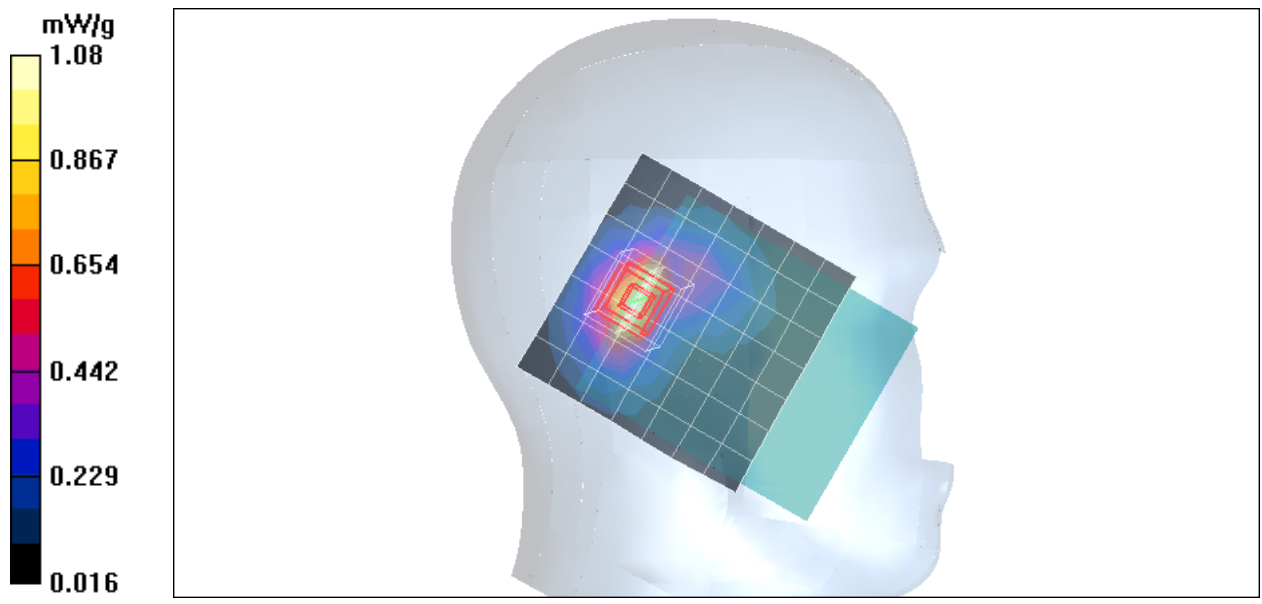

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

co-Location 802.11b+BT+Left Tilted Low CH9262/Area Scan

(8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.29 mW/g

co-Location 802.11b+BT+Left Tilted Low CH9262/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 26.3 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 1.200 mW/g; SAR(10 g) = 0.672 mW/g

Maximum value of SAR (measured) = 1.48 mW/g

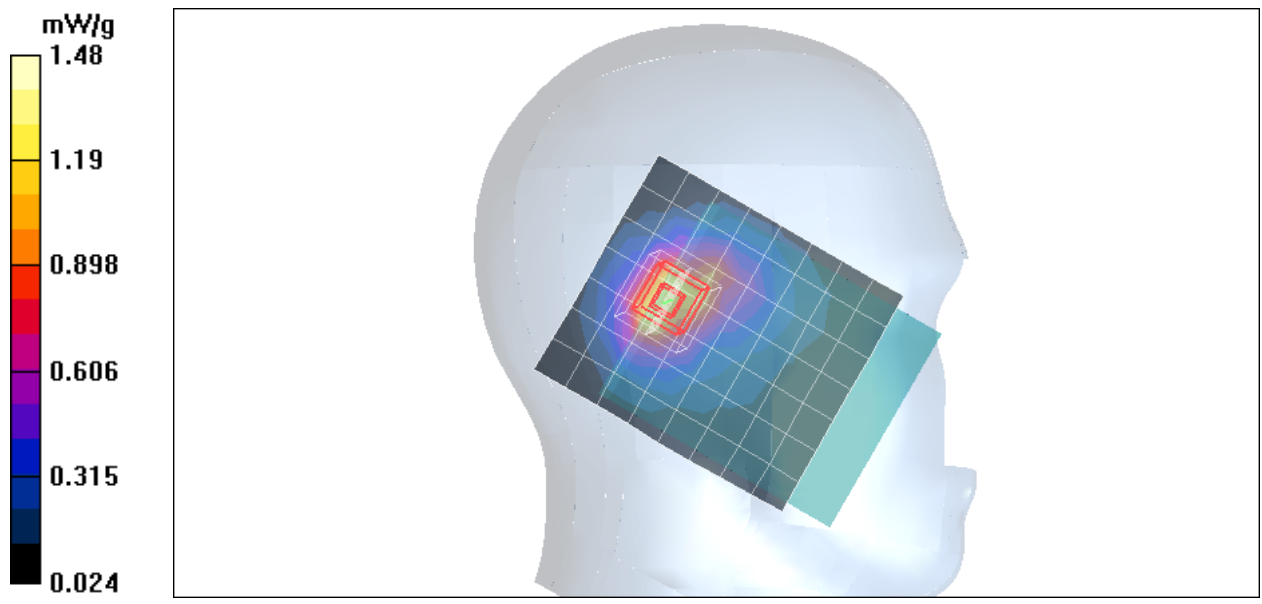

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Left Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

co-Location 802.11g+BT+Left Tilted Low CH9262/Area Scan

(8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.28 mW/g

co-Location 802.11g+BT+Left Tilted Low CH9262/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.7 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.080 mW/g; SAR(10 g) = 0.663 mW/g

Maximum value of SAR (measured) = 1.45 mW/g

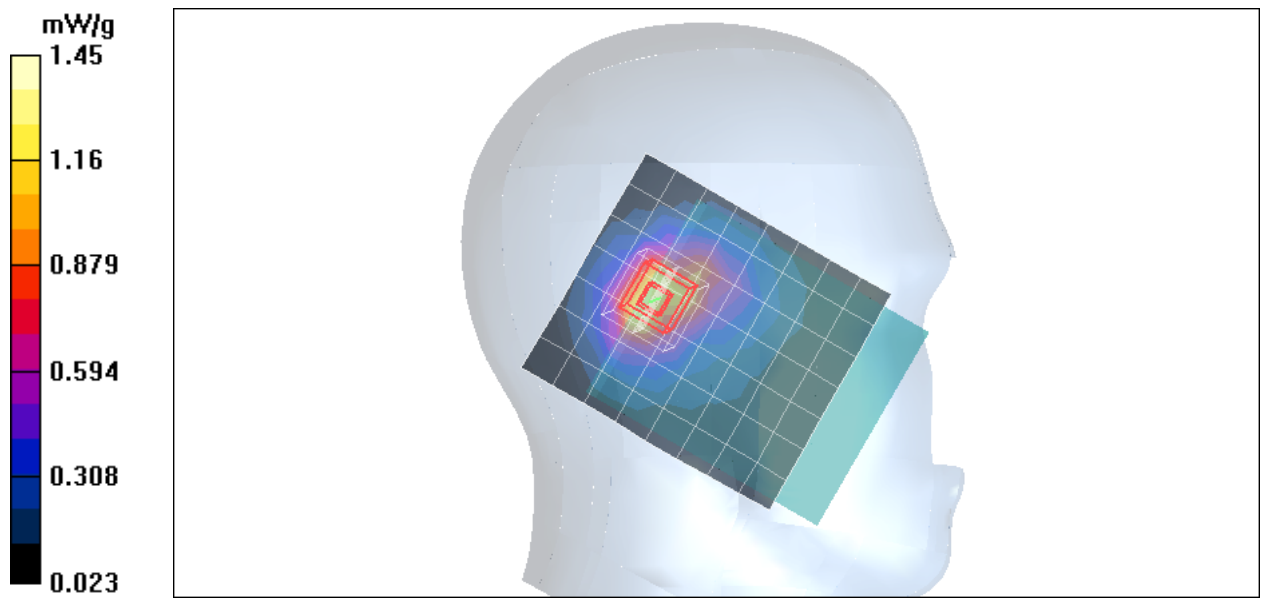

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek Low CH9262/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.828 mW/g

Right Cheek Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.4 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.423 mW/g

Maximum value of SAR (measured) = 0.933 mW/g


Right Cheek Low CH9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.4 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.771 W/kg

SAR(1 g) = 0.461 mW/g; SAR(10 g) = 0.277 mW/g

Maximum value of SAR (measured) = 0.556 mW/g

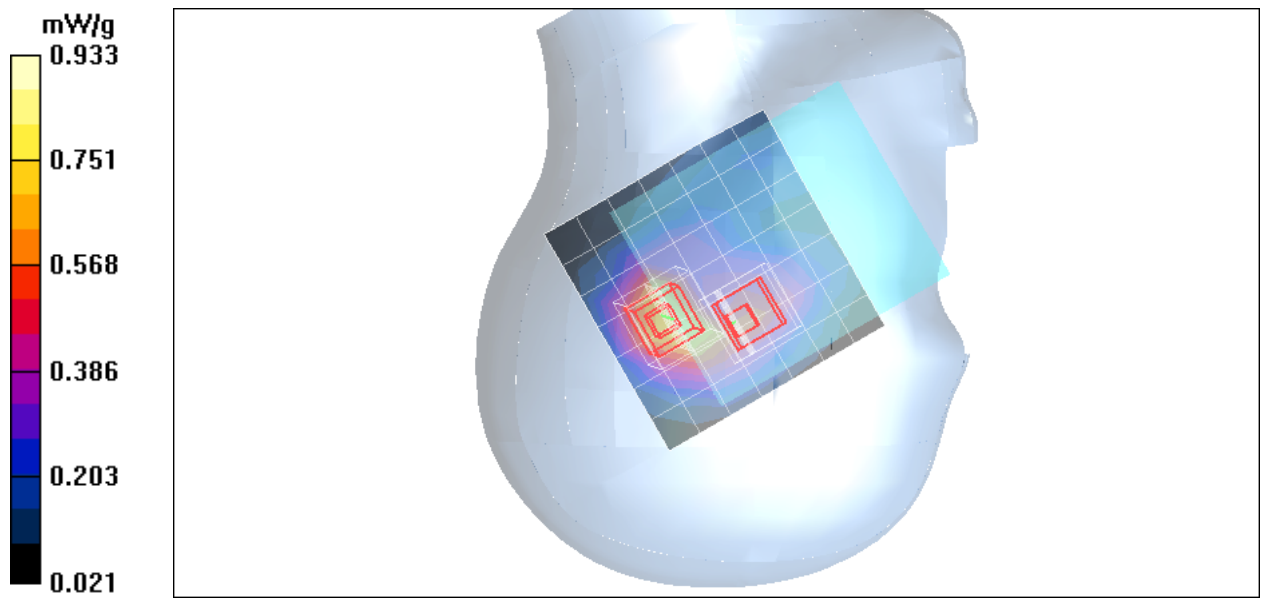

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek Middle CH9400/Area Scan (7x9x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.785 mW/g

Right Cheek Middle CH9400/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 14.0 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.760 mW/g; SAR(10 g) = 0.416 mW/g

Maximum value of SAR (measured) = 0.945 mW/g

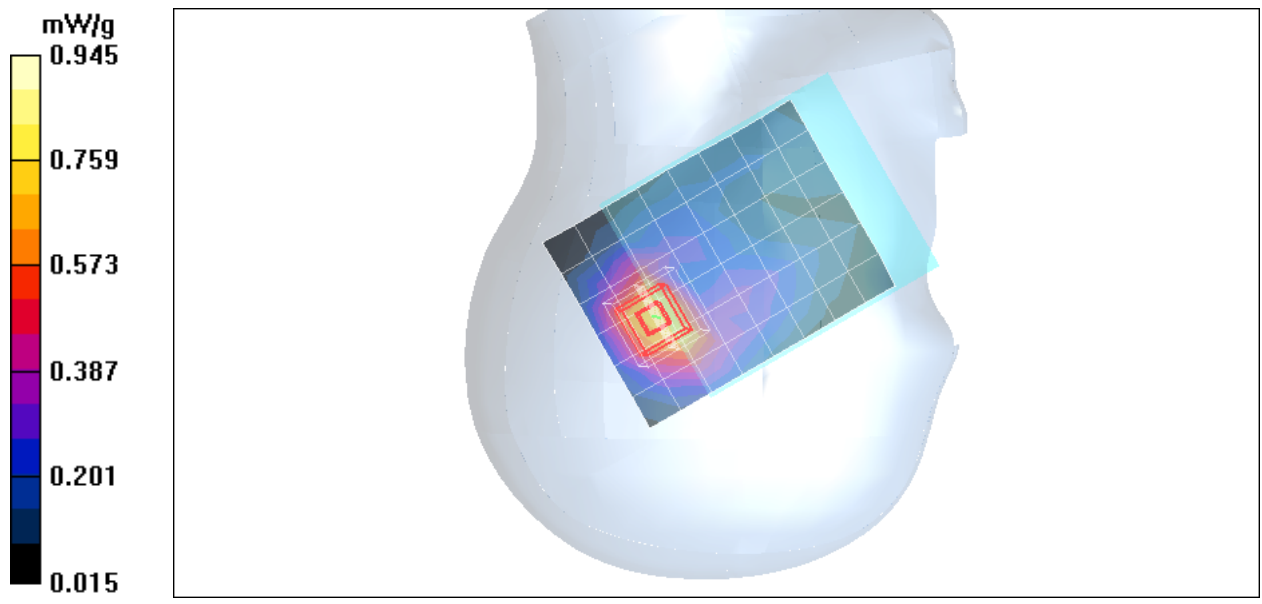

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Cheek High CH9538/Area Scan (8x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.708 mW/g

Right Cheek High CH9538/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 10.8 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.649 mW/g; SAR(10 g) = 0.352 mW/g

Maximum value of SAR (measured) = 0.802 mW/g

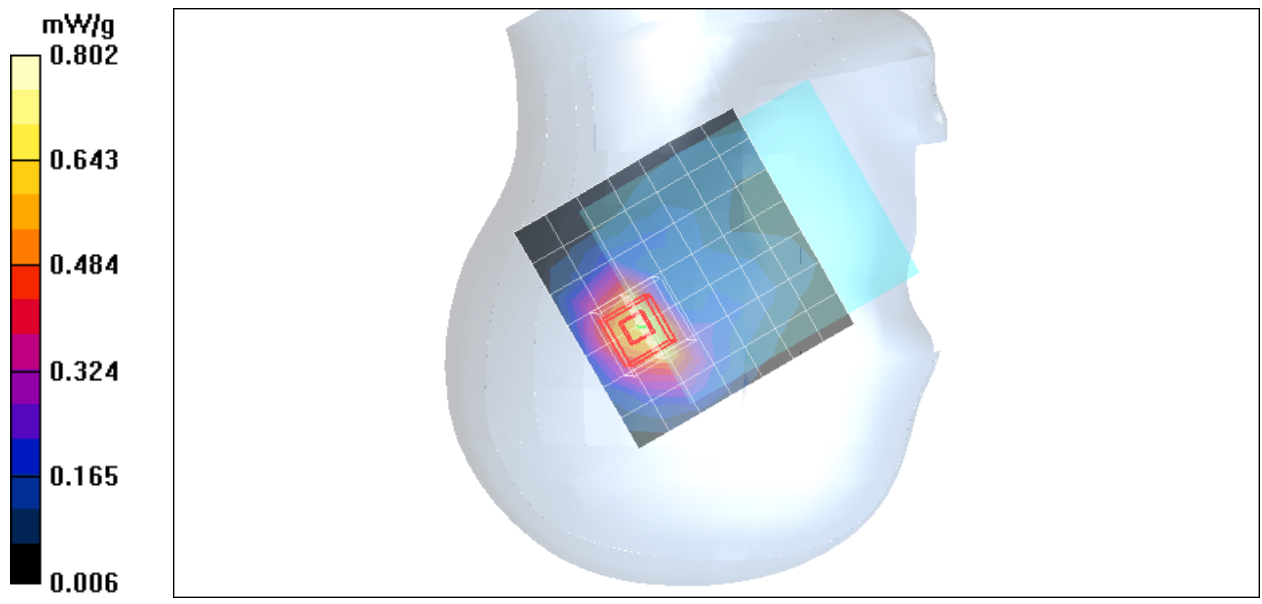

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted Low CH9262/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.18 mW/g


Right Tilted Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.090 mW/g; SAR(10 g) = 0.592 mW/g

Maximum value of SAR (measured) = 1.35 mW/g

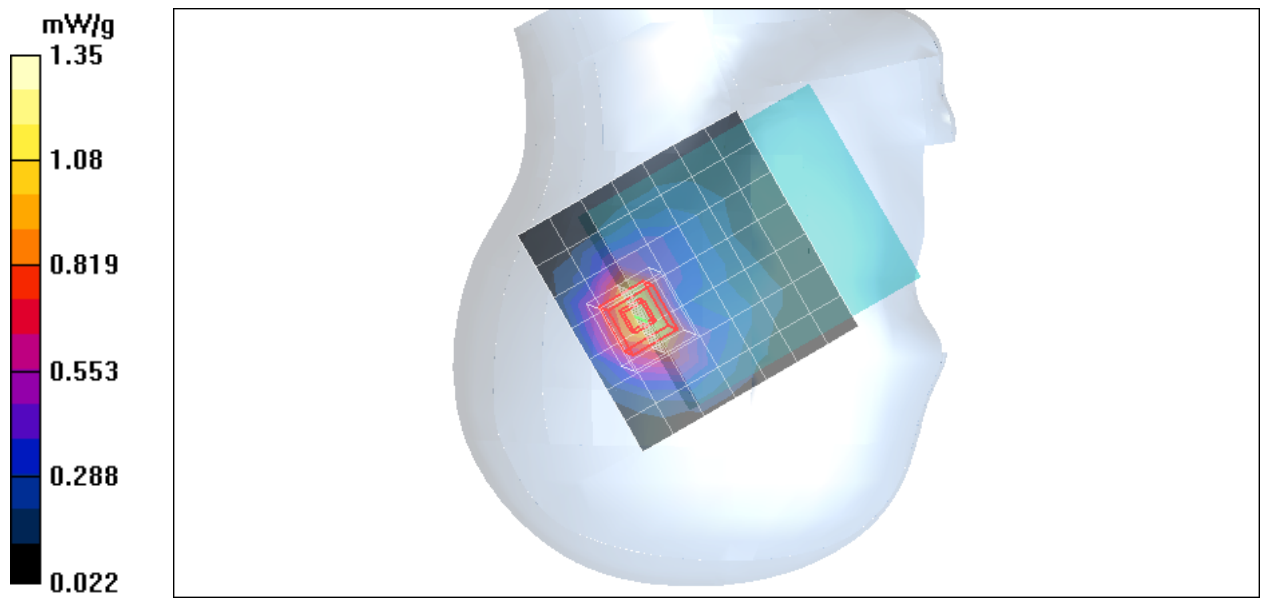

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted Middle CH9400/Area Scan (8x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.29 mW/g

Right Tilted Middle CH9400/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 16.5 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1.040 mW/g; SAR(10 g) = 0.592 mW/g

Maximum value of SAR (measured) = 1.45 mW/g

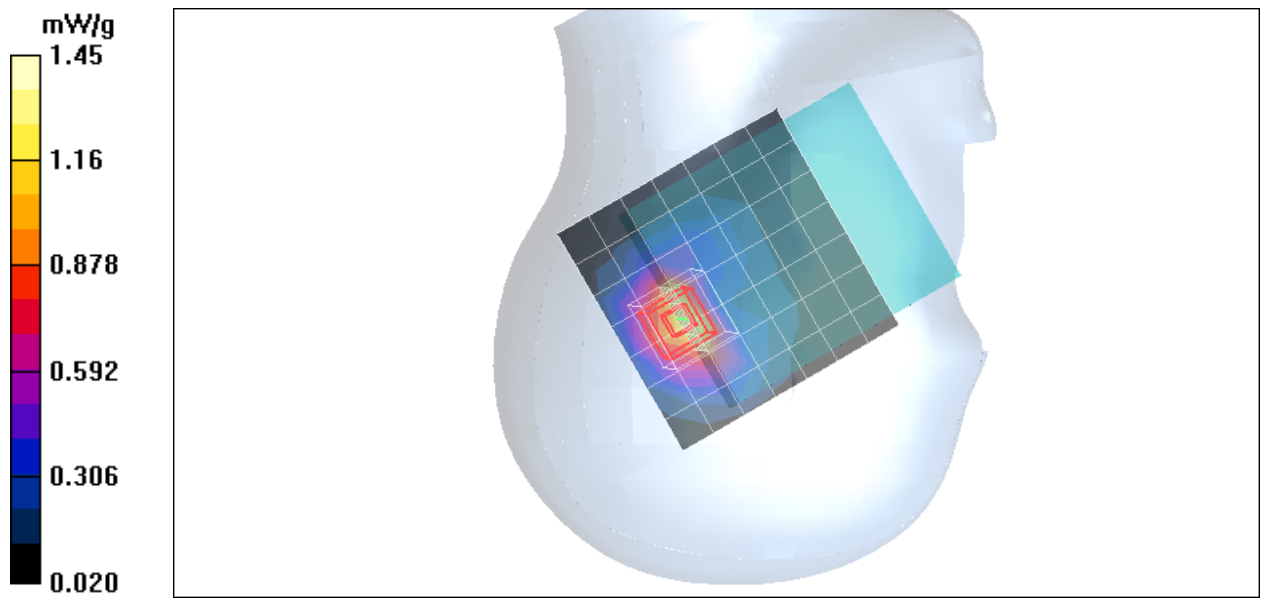

Test Laboratory: Compliance Certification Services Inc.

WCDMA band II -Right Head ZINC II slide

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.78, 4.78, 4.78);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Tilted High CH9538/Area Scan (8x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.07 mW/g

Right Tilted High CH9538/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 12.7 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.920 mW/g; SAR(10 g) = 0.495 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

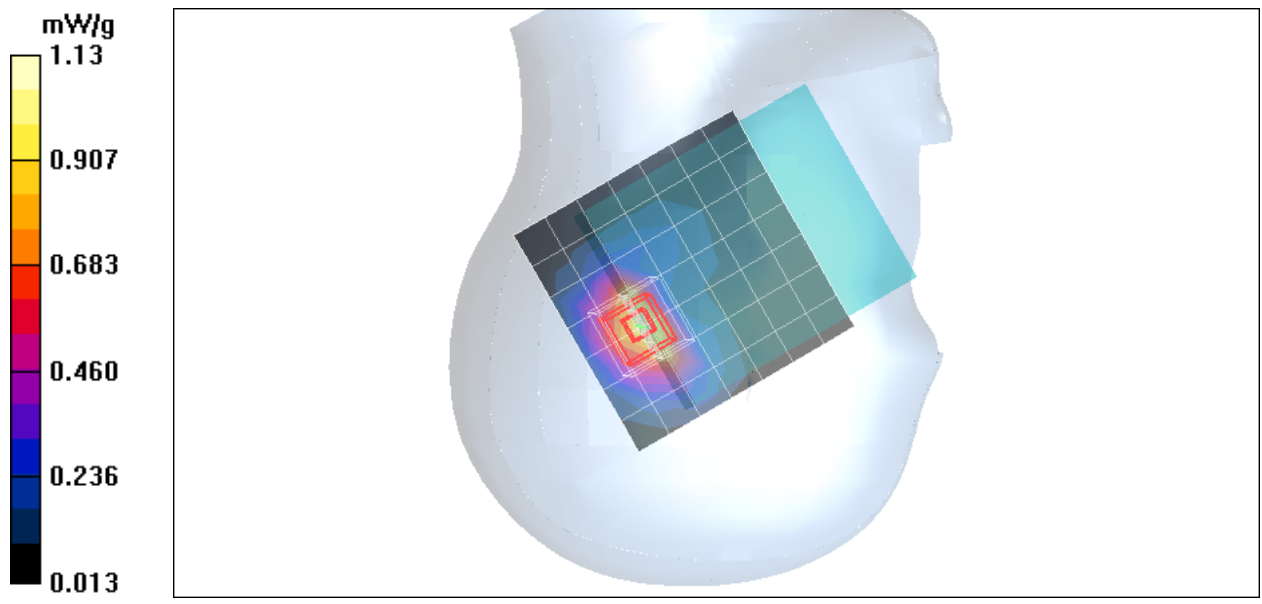

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Body ZINC II

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.953$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.73, 5.73, 5.73);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

GSM Body Face Up Middle CH190/Area Scan (7x10x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.520 mW/g

GSM Body Face Up Middle CH190/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.8 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.349 mW/g

Maximum value of SAR (measured) = 0.521 mW/g

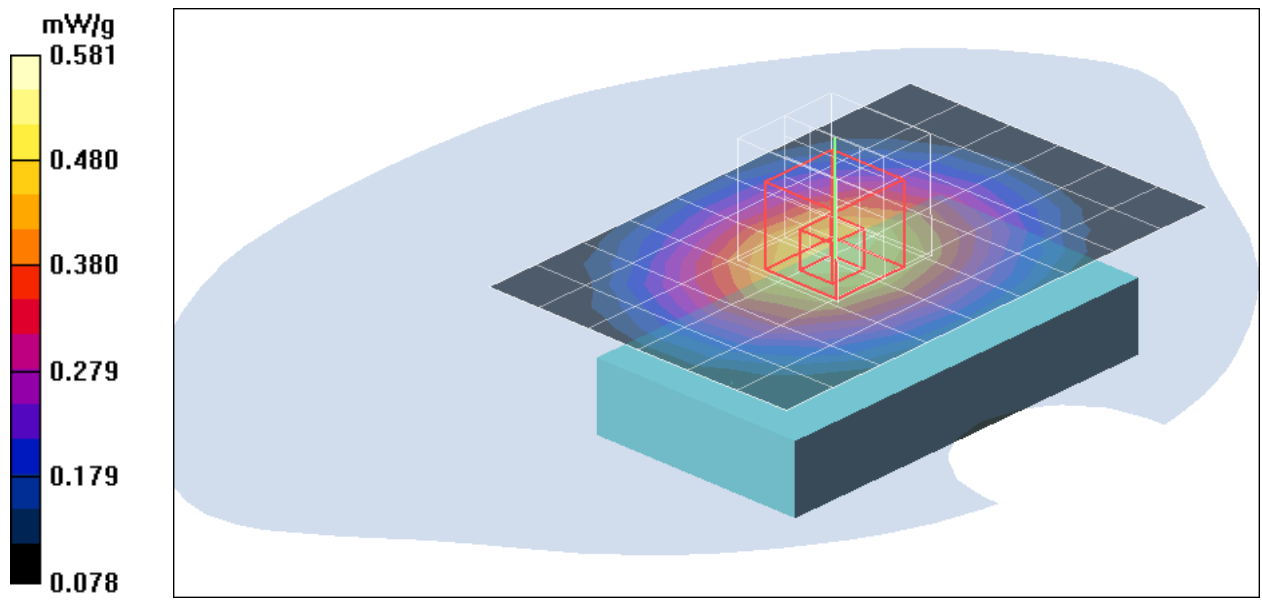

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Body ZINC II

DUT: ZINC II; Type: 3.5G Pocket PC Phone; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.73, 5.73, 5.73);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

GSM Body Face Down Low CH128/Area Scan (7x10x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.998 mW/g

GSM Body Face Down Low CH128/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 26.4 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.911 mW/g; SAR(10 g) = 0.666 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

