



FCC RF Test Report

APPLICANT : DZS Inc.
EQUIPMENT : GPON ONT
BRAND NAME : 
MODEL NAME : 2428GN, 2428TE
FCC ID : PJZ2428GN
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Apr. 12, 2023 ~ Apr. 17, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	16
3.6 AC Conducted Emission Measurement.....	20
3.7 Antenna Requirements.....	22
4 LIST OF MEASURING EQUIPMENT	24
5 UNCERTAINTY OF EVALUATION	25
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR332121A	Rev. 01	Initial issue of report	May 17, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 30\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.31 dB at 2389.24 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.93 dB at 0.230 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

DZS Inc.
5700 Tennyson Parkway, Plano, TX 75024 USA

1.2 Manufacturer

DZS Inc.
5700 Tennyson Parkway, Plano, TX 75024 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	GPON ONT
Brand Name	DZS
Model Name	2428GN, 2428TE
FCC ID	PJZ2428GN
SN	Conducted: 500646803 Conduction: 500646803 Radiation: 500646803
HW Version	V02
SW Version	S7.0.021
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (AV) Output Power to antenna	<MIMO Ant.0+1+2> 802.11b : 29.41 dBm (0.8730 W) 802.11g : 29.73 dBm (0.9397 W) 802.11ax HE20 : 27.30 dBm (0.5370 W) 802.11ax HE40 : 22.78 dBm (0.1897 W)
99% Occupied Bandwidth	802.11b : 11.19MHz 802.11g : 20.22MHz 802.11ax HE20 : 19.54MHz 802.11ax HE40 : 37.72MHz
Antenna Type	PCB Antenna
Antenna Gain	<Ant. 0>: 3.52 dBi <Ant. 1>: 3.60 dBi <Ant. 2>: 3.61 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM /



Antenna Function Description	256QAM / 1024QAM)			
		Ant. 0	Ant. 1	Ant. 2
	802.11 b/g/n/ax SISO	V	V	V
	802.11 b/g/n/ax CDD 1S3T	V	V	V
	802.11 ax Tx Beamforming 1S3T	V	V	V

Note:

1. For SISO&MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.
2. For 802.11n/ax 20/40MHz mode, the power setting of 802.11n 20/40MHz mode is the same or lower than 802.11ax 20/40MHz mode. Therefore, the whole testing has assessed only 802.11ax HE20/HE40 mode.
3. The device supports 1S3T for MIMO(CDD&TXBF) mode. 1S3T means NSS=1, MIMO 3Tx.
4. 802.11ax support Tx Beamforming mode, and the Tx Beamforming power/EIRP is not greater than CDD mode, so we only evaluate CDD mode by referring to their maximum conducted power.
5. The device does not support partial RU tone for 802.11ax mode
6. There are two types of EUT. For the differences, please refer to the 2428GN, 2428TE_Operational Description of Product Equality Declaration exhibit separately. According to the difference, we choose the sample 1 to full test.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH07-KS TH01-KS	CN1257	314309



1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :WIFI link (2.4G) + POST Port Link + LAN Link + Gpon Loading with OLT + Power from Adapter + with bracket

2.3 Connection Diagram of Test System

For Conducted Emission:

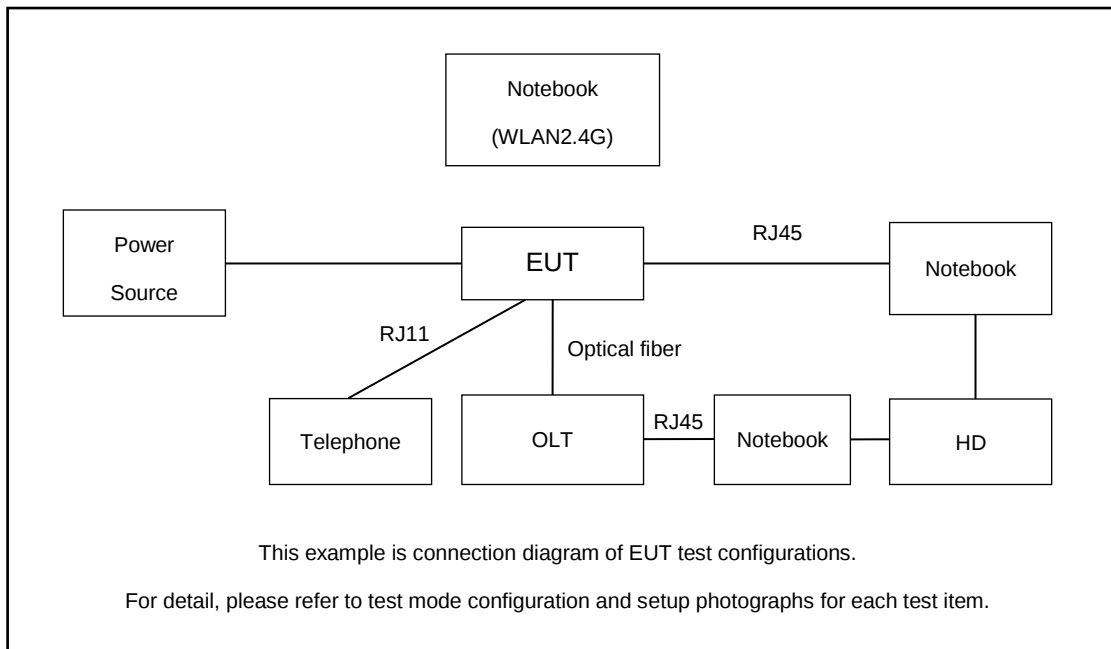

For Radiated Emission:

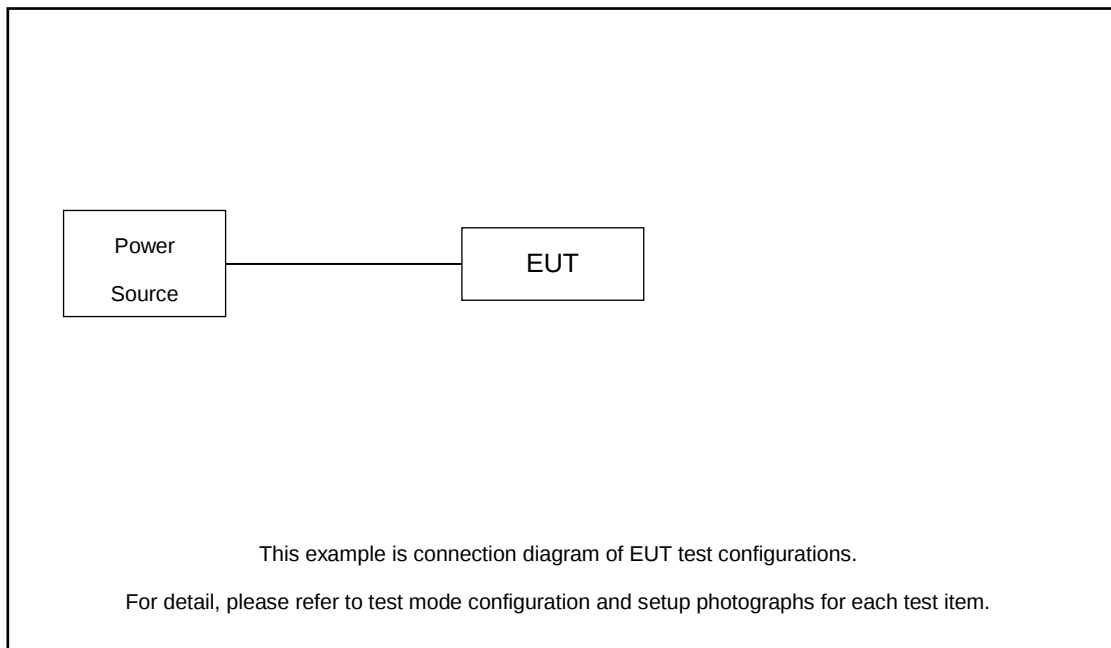

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook*3	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
2.	Hard Disk*2	WD	C6B	N/A	N/A	N/A
3.	Telephone*2	bubugao	HCD007(6082)TSD	N/A	N/A	N/A
4.	OLT	DZS	N/A	N/A	N/A	N/A
5.	RJ45	N/A	N/A	N/A	N/A	N/A
6.	RJ11	N/A	N/A	N/A	N/A	N/A
7.	Optical fiber	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.25 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 2.25 + 10 = 12.25 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

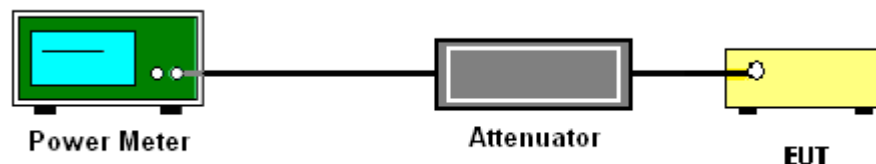

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

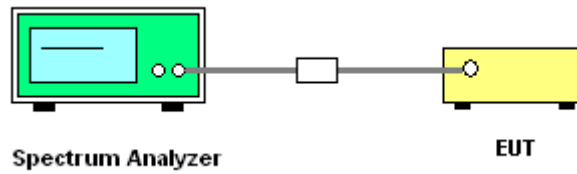

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

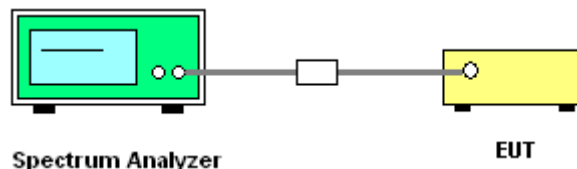

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

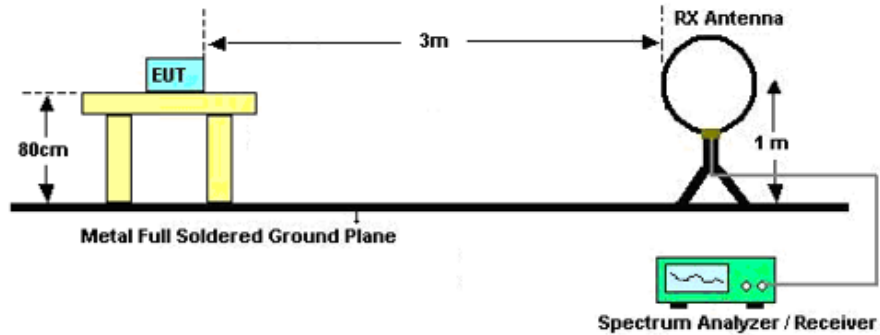

For radiated emissions from 30MHz to 1GHz

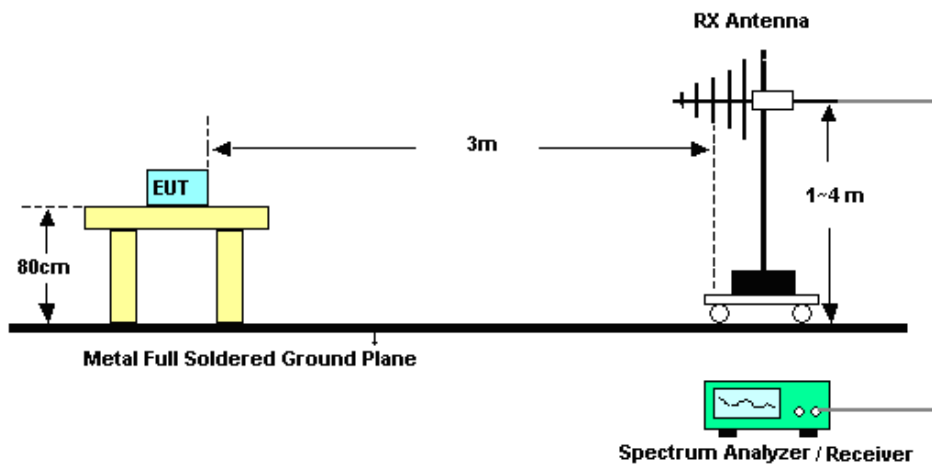

For radiated emissions above 1GHz

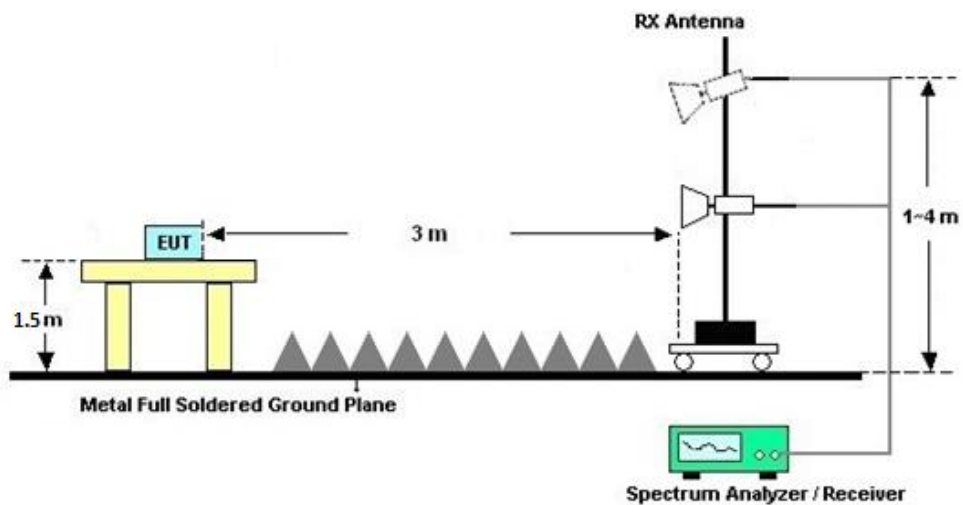

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

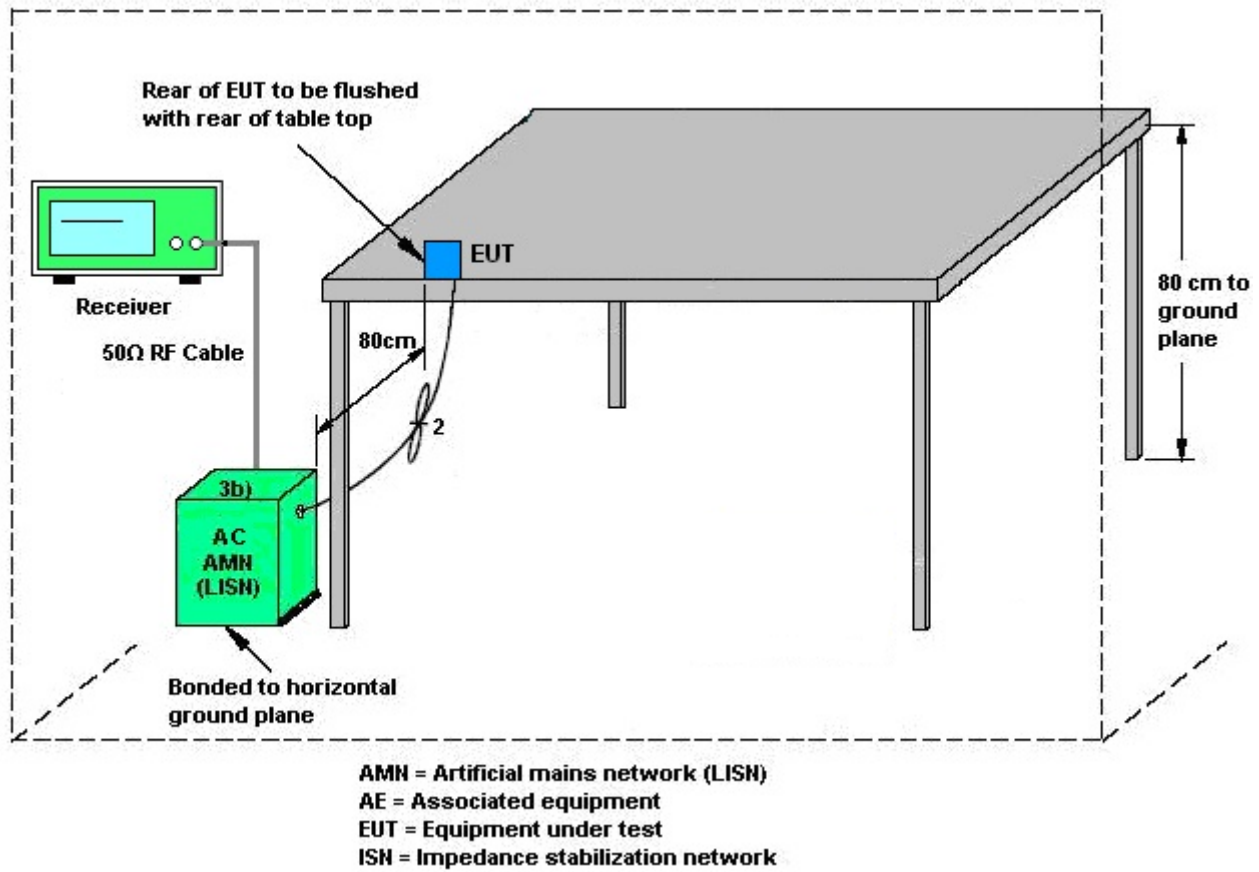

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For 802.11b/g/n/ax mode, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = G_{ANT MAX}(Ant.1 Gain, Ant.2 Gain,...) + Array Gain, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for N_{ANT} ≤ 4;

For PSD, the directional gain calculation is following,

Directional gain = 10 log[(10^{G₁/20} + 10^{G₂/20} + ... + 10^{G_N/20})² / N_{ANT}] dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

N_{SS} = number of spatial streams. (The worst case directional gain will occur when N_{SS} = 1)

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi.

The directional gain "DG" is calculated as following table.

	Ant. 0 (dBi)	Ant. 1 (dBi)	Ant. 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
2.4 GHz	3.52	3.60	3.61	3.61	8.35	0.00	2.35

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)

<TXBF modes>

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For 802.11ax mode, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi.

The directional gain “DG” is calculated as following table.

	Ant. 0 (dBi)	Ant. 1 (dBi)	Ant. 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
2.4 GHz	3.52	3.60	3.61	8.35	8.35	2.35	2.35

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Apr. 12, 2023~ Apr. 17, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Apr. 12, 2023~ Apr. 17, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Apr. 12, 2023~ Apr. 17, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Oct. 12, 2022	Apr. 17, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz, MAX 30dB	Oct. 12, 2022	Apr. 17, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Apr. 17, 2023	Oct. 15, 2023	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 26, 2022	Apr. 17, 2023	Aug. 25, 2023	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 05, 2023	Apr. 17, 2023	Apr. 04, 2024	Radiation (03CH07-KS)
high gain Amplifier	EM	EM01G18GA	060840	1GHz~18GHz	Oct. 12, 2022	Apr. 17, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 17, 2022	Apr. 17, 2023	Oct. 16, 2023	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413740	9kHz~1GHz	Jan. 05, 2023	Apr. 17, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
Amplifier	EM	EM01G18GA	060834	1GHz~18GHz	Oct. 12, 2022	Apr. 17, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
Amplifier	EM	EM18G40GGA	060851	18~40GHz	Jan. 05, 2023	Apr. 17, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Apr. 17, 2023	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Apr. 17, 2023	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Apr. 17, 2023	NCR	Radiation (03CH07-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Apr. 17, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Apr. 17, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Apr. 17, 2023	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Apr. 17, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 0.46 dB
Conducted Emissions	± 0.48 dB
Occupied Channel Bandwidth	± 0.1 %
Conducted Power Spectral Density	± 0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.78dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Report Number : FR332121A

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2023.4.12~2023.4.17	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Output Power

2.4GHz Band																					
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)			Average Conducted Power (dBm)				DG (dBi)			Conducted Power Limit (dBm)			Pass /Fail	Power Setting		
					Ant 0	Ant 1	Ant 2	Ant 0	Ant 1	Ant 2	SUM	Ant 0	Ant 1	Ant 2	Ant 0	Ant 1	Ant 2		Ant 0	Ant 1	Ant 2
11b	1Mbps	3	1	2412	0.21	0.22	0.22	23.96	24.78	25.10	29.41	3.61			30.00			Pass	96		
11b	1Mbps	3	6	2437	0.21	0.22	0.22	22.25	23.47	23.56	27.91	3.61			30.00			Pass	90		
11b	1Mbps	3	11	2462	0.21	0.22	0.22	23.08	24.04	24.91	28.85	3.61			30.00			Pass	96		
11g	6Mbps	3	1	2412	0.24	0.21	0.24	24.47	25.26	25.12	29.73	3.61			30.00			Pass	94		
11g	6Mbps	3	6	2437	0.24	0.21	0.24	22.69	23.98	23.33	28.13	3.61			30.00			Pass	94		
11g	6Mbps	3	7	2442	0.24	0.21	0.24	22.57	23.82	23.27	28.02	3.61			30.00			Pass	94		
11g	6Mbps	3	8	2447	0.24	0.21	0.24	22.22	23.09	22.71	27.46	3.61			30.00			Pass	92		
11g	6Mbps	3	9	2452	0.24	0.21	0.24	20.01	20.46	20.46	25.08	3.61			30.00			Pass	83		
11g	6Mbps	3	10	2457	0.24	0.21	0.24	18.98	19.47	19.55	24.11	3.61			30.00			Pass	79		
11g	6Mbps	3	11	2462	0.24	0.21	0.24	18.30	18.83	18.91	23.46	3.61			30.00			Pass	76		
HE20	MCS0	3	1	2412	0.08	0.10	0.10	17.41	17.62	17.61	22.32	3.61			30.00			Pass	66		
HE20	MCS0	3	2	2417	0.08	0.10	0.10	19.40	19.93	19.68	24.45	3.61			30.00			Pass	78		
HE20	MCS0	3	3	2422	0.08	0.10	0.10	19.03	19.49	19.25	24.04	3.61			30.00			Pass	76		
HE20	MCS0	3	4	2427	0.08	0.10	0.10	20.69	21.23	20.82	25.70	3.61			30.00			Pass	84		
HE20	MCS0	3	5	2432	0.08	0.10	0.10	21.09	22.16	21.58	26.41	3.61			30.00			Pass	87		
HE20	MCS0	3	6	2437	0.08	0.10	0.10	21.91	23.04	22.56	27.30	3.61			30.00			Pass	90		
HE20	MCS0	3	7	2442	0.08	0.10	0.10	21.82	22.87	22.51	27.20	3.61			30.00			Pass	90		
HE20	MCS0	3	8	2447	0.08	0.10	0.10	20.65	21.52	21.44	26.00	3.61			30.00			Pass	85		
HE20	MCS0	3	9	2452	0.08	0.10	0.10	18.71	19.27	19.14	23.82	3.61			30.00			Pass	76		
HE20	MCS0	3	10	2457	0.08	0.10	0.10	17.12	17.51	17.68	22.22	3.61			30.00			Pass	68		
HE20	MCS0	3	11	2462	0.08	0.10	0.10	16.46	16.84	16.95	21.53	3.61			30.00			Pass	64		
HE40	MCS0	3	3	2422	0.17	0.17	0.17	15.94	16.42	16.50	21.07	3.61			30.00			Pass	60		
HE40	MCS0	3	6	2437	0.17	0.17	0.17	17.52	18.10	18.35	22.78	3.61			30.00			Pass	70		
HE40	MCS0	3	9	2452	0.17	0.17	0.17	16.59	17.06	17.33	21.78	3.61			30.00			Pass	66		

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band																					
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)			Average Conducted Power (dBm)				DG (dBi)			Conducted Power Limit (dBm)			Pass /Fail	Power Setting		
					Ant 0	Ant 1	Ant 2	Ant 0	Ant 1	Ant 2	SUM	Ant 0	Ant 1	Ant 2	Ant 0	Ant 1	Ant 2		Ant 0	Ant 1	Ant 2
HE20	MCS0	3	1	2412	0.08	0.10	0.10	12.80	13.35	11.12	17.30	8.35			27.65			Pass	40		
HE20	MCS0	3	2	2417	0.08	0.10	0.10	14.75	14.93	14.89	19.63	8.35			27.65			Pass	50		
HE20	MCS0	3	3	2422	0.08	0.10	0.10	14.25	14.37	14.32	19.09	8.35			27.65			Pass	48		
HE20	MCS0	3	4	2427	0.08	0.10	0.10	16.03	16.23	16.07	20.89	8.35			27.65			Pass	58		
HE20	MCS0	3	5	2432	0.08	0.10	0.10	16.14	16.64	16.48	21.20	8.35			27.65			Pass	60		
HE20	MCS0	3	6	2437	0.08	0.10	0.10	17.29	17.82	17.56	22.34	8.35			27.65			Pass	66		
HE20	MCS0	3	7	2442	0.08	0.10	0.10	17.20	17.61	17.57	22.24	8.35			27.65			Pass	66		
HE20	MCS0	3	8	2447	0.08	0.10	0.10	15.97	16.48	16.34	21.04	8.35			27.65			Pass	60		
HE20	MCS0	3	9	2452	0.08	0.10	0.10	13.67	14.03	14.03	18.69	8.35			27.65			Pass	48		
HE20	MCS0	3	10	2457	0.08	0.10	0.10	12.44	12.38	12.78	17.31	8.35			27.65			Pass	40		
HE20	MCS0	3	11	2462	0.08	0.10	0.10	11.74	12.54	10.57	16.47	8.35			27.65			Pass	40		
HE40	MCS0	3	3	2422	0.17	0.17	0.17	10.84	11.05	11.51	15.92	8.35			27.65			Pass	36		
HE40	MCS0	3	6	2437	0.17	0.17	0.17	12.49	13.04	13.33	17.74	8.35			27.65			Pass	46		
HE40	MCS0	3	9	2452	0.17	0.17	0.17	11.65	11.92	12.39	16.77	8.35			27.65			Pass	42		

Note: Measured power (dBm) has offset with cable loss.



6dB Bandwidth

Test Result


TestMode	Antenna	Freq(MHz)	6dB BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant0	2412	7.04	2408.48	2415.52	0.5	PASS
	Ant1	2412	7.00	2408.48	2415.48	0.5	PASS
	Ant2	2412	6.56	2408.48	2415.04	0.5	PASS
	Ant0	2437	7.04	2433.48	2440.52	0.5	PASS
	Ant1	2437	7.04	2433.48	2440.52	0.5	PASS
	Ant2	2437	7.52	2433.00	2440.52	0.5	PASS
	Ant0	2462	7.04	2458.48	2465.52	0.5	PASS
	Ant1	2462	6.60	2458.44	2465.04	0.5	PASS
	Ant2	2462	7.08	2458.44	2465.52	0.5	PASS
11G-CDD	Ant0	2412	16.36	2403.80	2420.16	0.5	PASS
	Ant1	2412	16.32	2403.84	2420.16	0.5	PASS
	Ant2	2412	16.32	2403.84	2420.16	0.5	PASS
	Ant0	2437	16.36	2428.80	2445.16	0.5	PASS
	Ant1	2437	16.32	2428.84	2445.16	0.5	PASS
	Ant2	2437	16.32	2428.84	2445.16	0.5	PASS
	Ant0	2442	16.32	2433.84	2450.16	0.5	PASS
	Ant1	2442	16.32	2433.84	2450.16	0.5	PASS
	Ant2	2442	16.36	2433.80	2450.16	0.5	PASS
	Ant0	2447	16.36	2438.80	2455.16	0.5	PASS
	Ant1	2447	16.36	2438.80	2455.16	0.5	PASS
	Ant2	2447	16.32	2438.84	2455.16	0.5	PASS
	Ant0	2452	16.40	2443.80	2460.20	0.5	PASS
	Ant1	2452	16.36	2443.80	2460.16	0.5	PASS
	Ant2	2452	16.32	2443.84	2460.16	0.5	PASS
	Ant0	2457	16.32	2448.84	2465.16	0.5	PASS
	Ant1	2457	16.32	2448.84	2465.16	0.5	PASS
	Ant2	2457	16.32	2448.84	2465.16	0.5	PASS
	Ant0	2462	16.32	2453.84	2470.16	0.5	PASS
	Ant1	2462	16.40	2453.80	2470.20	0.5	PASS
	Ant2	2462	16.36	2453.84	2470.20	0.5	PASS
11AX20MIMO	Ant0	2412	18.96	2402.52	2421.48	0.5	PASS
	Ant1	2412	18.84	2402.68	2421.52	0.5	PASS
	Ant2	2412	18.80	2402.68	2421.48	0.5	PASS
	Ant0	2417	18.92	2407.56	2426.48	0.5	PASS





	Ant1	2417	18.96	2407.52	2426.48	0.5	PASS
	Ant2	2417	18.80	2407.68	2426.48	0.5	PASS
	Ant0	2422	18.96	2412.52	2431.48	0.5	PASS
	Ant1	2422	19.00	2412.48	2431.48	0.5	PASS
	Ant2	2422	18.96	2412.52	2431.48	0.5	PASS
	Ant0	2427	18.88	2417.56	2436.44	0.5	PASS
	Ant1	2427	18.92	2417.52	2436.44	0.5	PASS
	Ant2	2427	18.96	2417.52	2436.48	0.5	PASS
	Ant0	2432	18.92	2422.52	2441.44	0.5	PASS
	Ant1	2432	18.92	2422.52	2441.44	0.5	PASS
	Ant2	2432	18.84	2422.60	2441.44	0.5	PASS
	Ant0	2437	18.92	2427.56	2446.48	0.5	PASS
	Ant1	2437	18.96	2427.56	2446.52	0.5	PASS
	Ant2	2437	18.92	2427.56	2446.48	0.5	PASS
	Ant0	2442	19.00	2432.48	2451.48	0.5	PASS
	Ant1	2442	18.96	2432.52	2451.48	0.5	PASS
	Ant2	2442	18.96	2432.52	2451.48	0.5	PASS
	Ant0	2447	18.92	2437.52	2456.44	0.5	PASS
	Ant1	2447	18.32	2438.16	2456.48	0.5	PASS
	Ant2	2447	19.00	2437.52	2456.52	0.5	PASS
	Ant0	2452	19.00	2442.48	2461.48	0.5	PASS
	Ant1	2452	18.92	2442.56	2461.48	0.5	PASS
	Ant2	2452	18.84	2442.64	2461.48	0.5	PASS
	Ant0	2457	18.96	2447.52	2466.48	0.5	PASS
	Ant1	2457	18.92	2447.56	2466.48	0.5	PASS
	Ant2	2457	18.24	2448.24	2466.48	0.5	PASS
	Ant0	2462	18.96	2452.52	2471.48	0.5	PASS
	Ant1	2462	18.92	2452.52	2471.44	0.5	PASS
	Ant2	2462	18.80	2452.72	2471.52	0.5	PASS
11AX40MIMO	Ant0	2422	37.68	2403.20	2440.88	0.5	PASS
	Ant1	2422	37.36	2403.44	2440.80	0.5	PASS
	Ant2	2422	37.36	2403.20	2440.56	0.5	PASS
	Ant0	2437	37.68	2418.20	2455.88	0.5	PASS
	Ant1	2437	37.28	2418.52	2455.80	0.5	PASS
	Ant2	2437	37.36	2418.20	2455.56	0.5	PASS
	Ant0	2452	37.68	2433.20	2470.88	0.5	PASS
	Ant1	2452	37.28	2433.52	2470.80	0.5	PASS
	Ant2	2452	37.68	2433.20	2470.88	0.5	PASS




Test Graphs

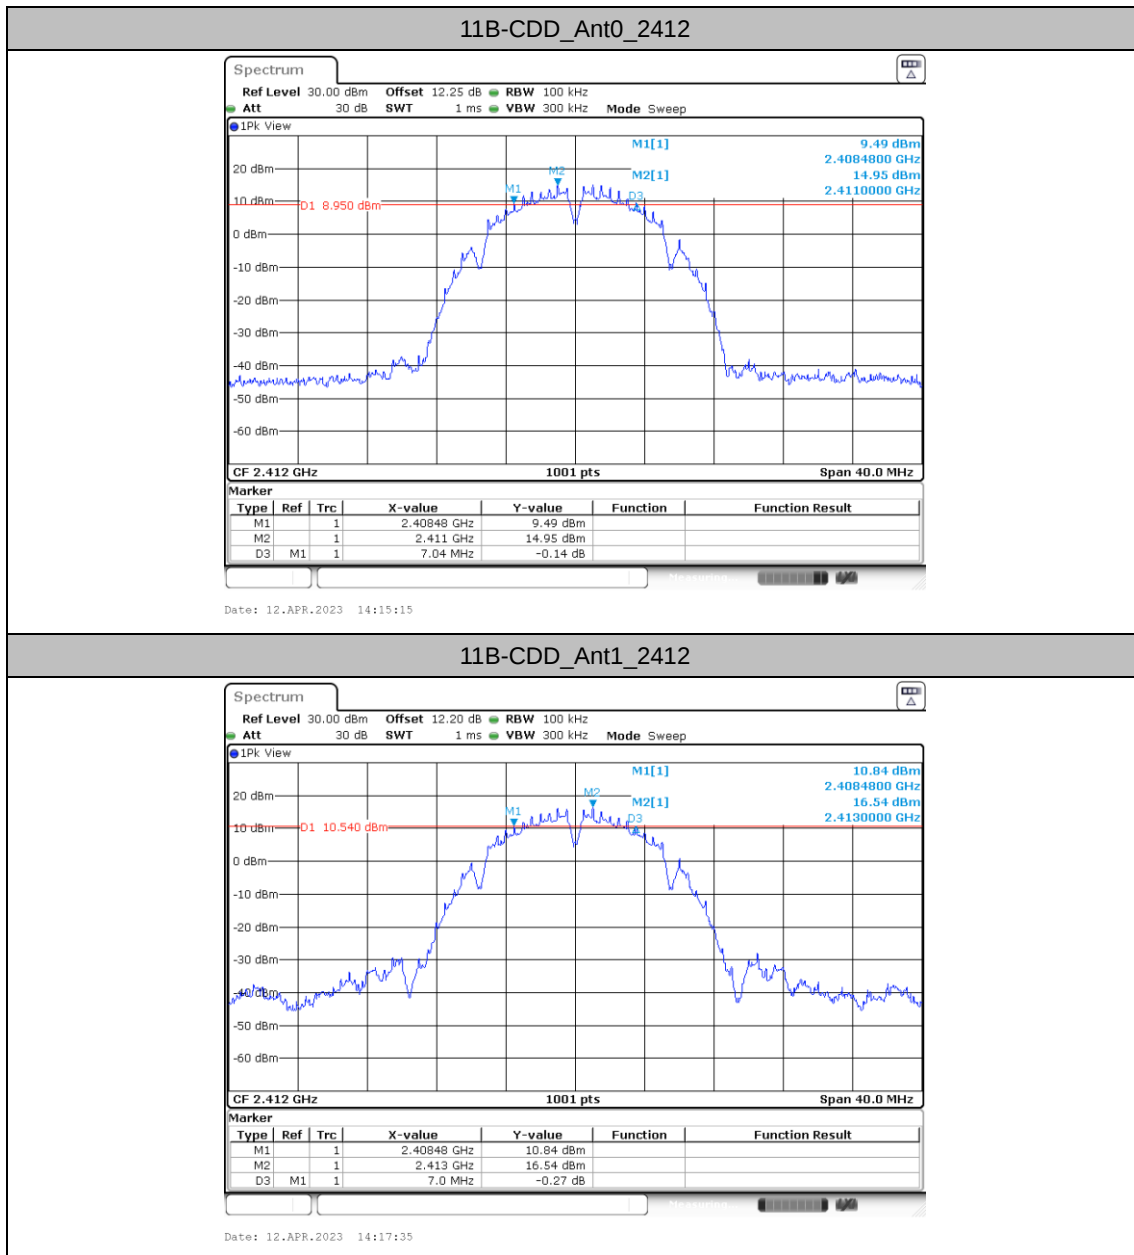

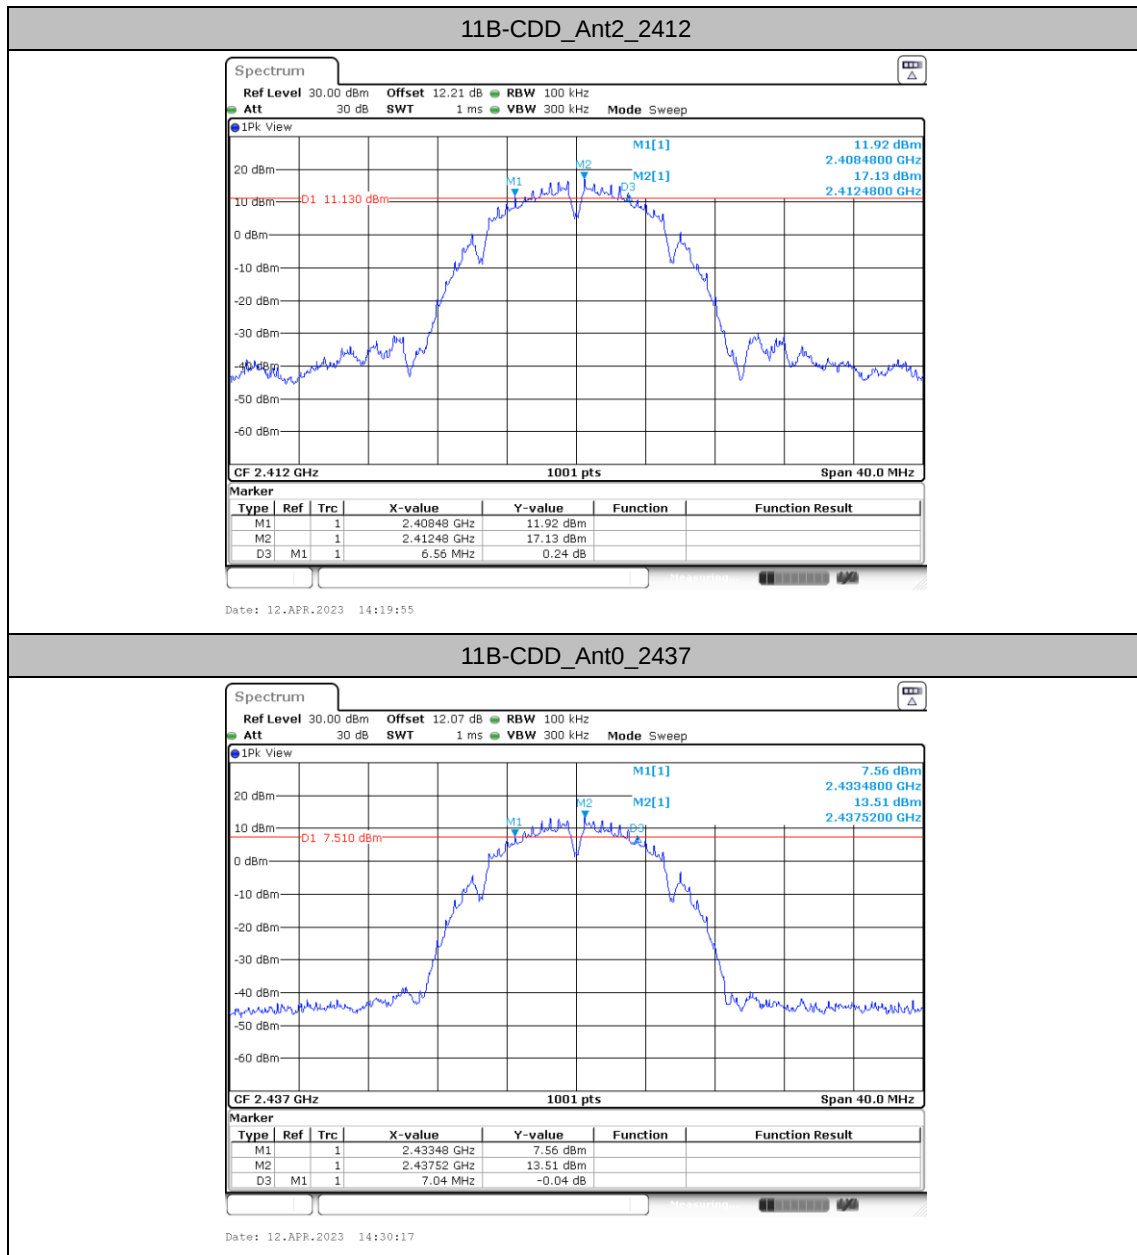


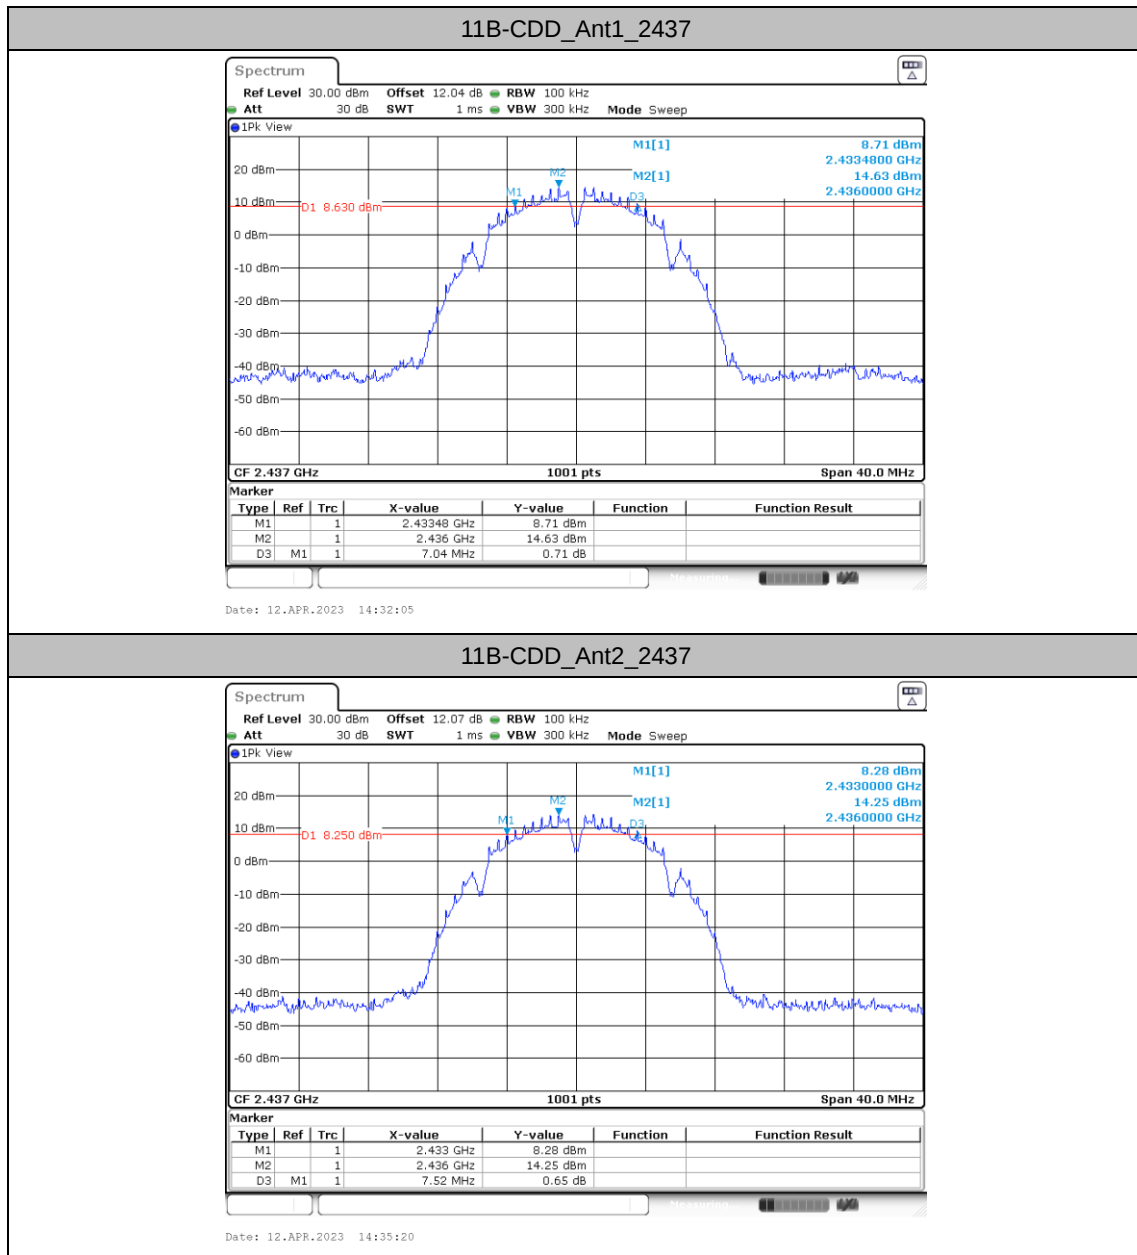

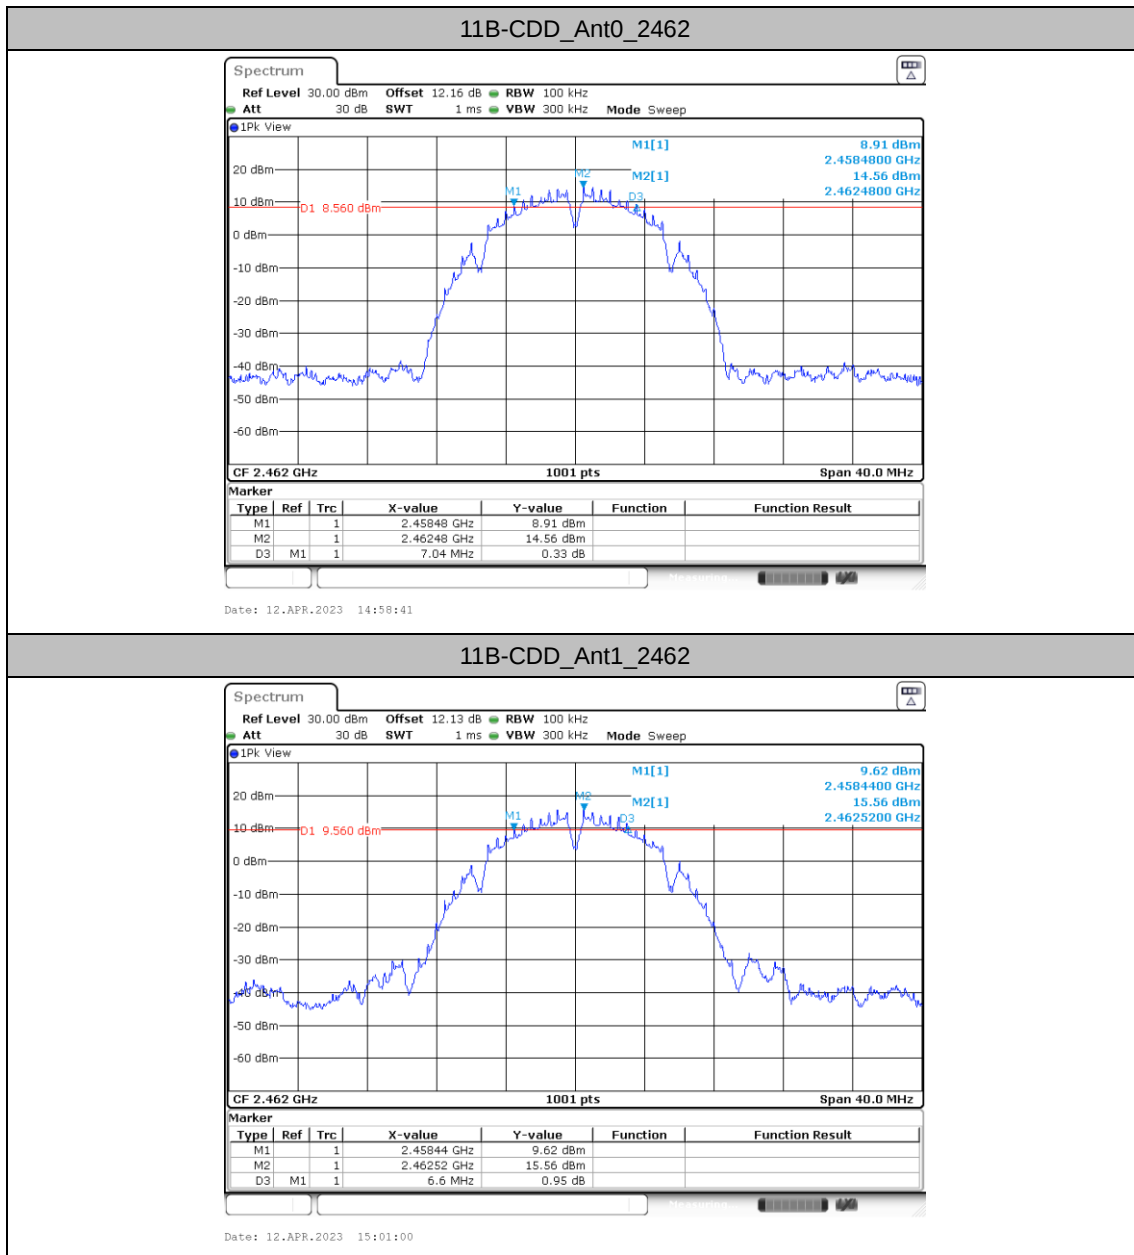




11B-CDD_Ant2_2462

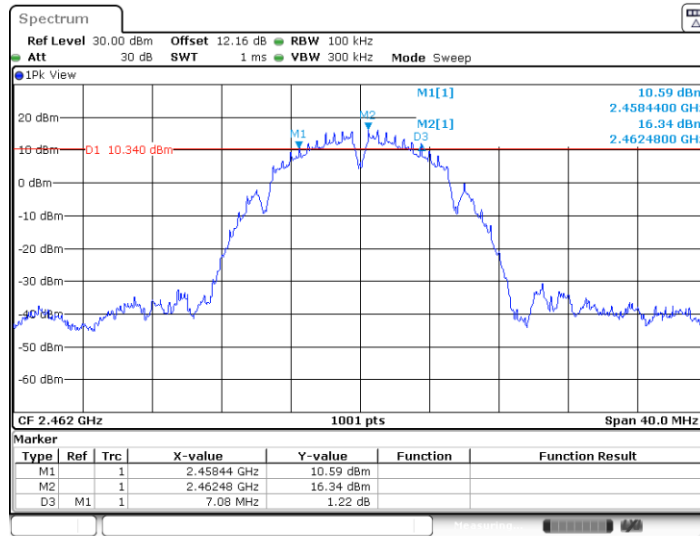

Date: 12.APR.2023 15:03:18


11G-CDD_Ant0_2412

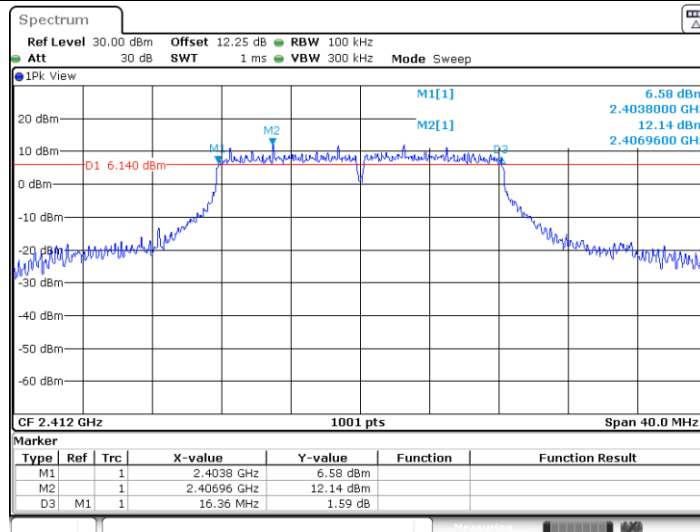

Date: 12.APR.2023 15:12:14




11G-CDD_Ant1_2412

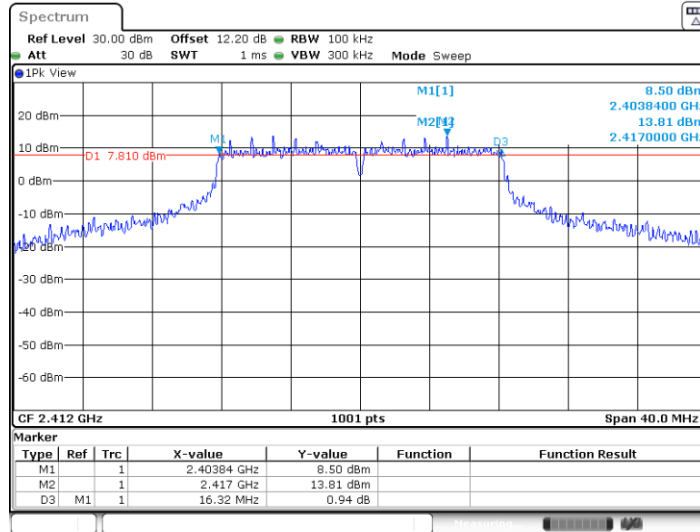

Date: 12.APR.2023 15:14:22


11G-CDD_Ant2_2412

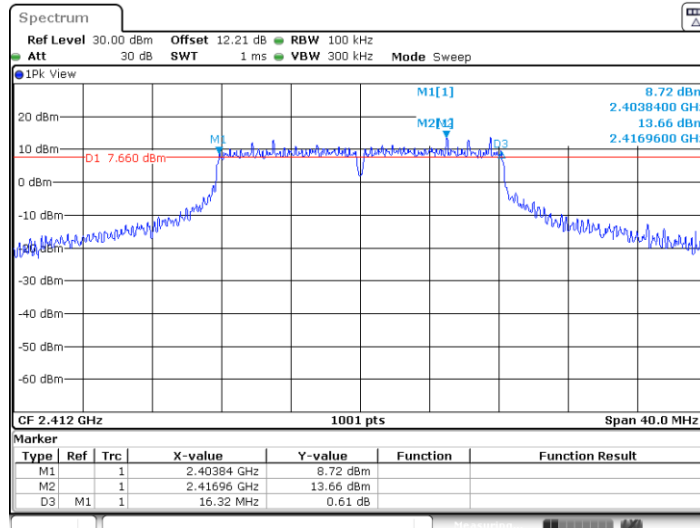

Date: 12.APR.2023 15:16:37




11G-CDD_Ant0_2437

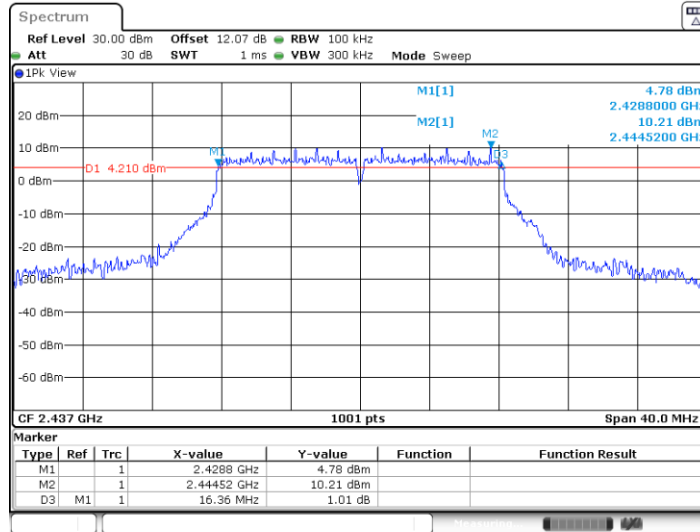

Date: 12.APR.2023 15:20:03


11G-CDD_Ant1_2437

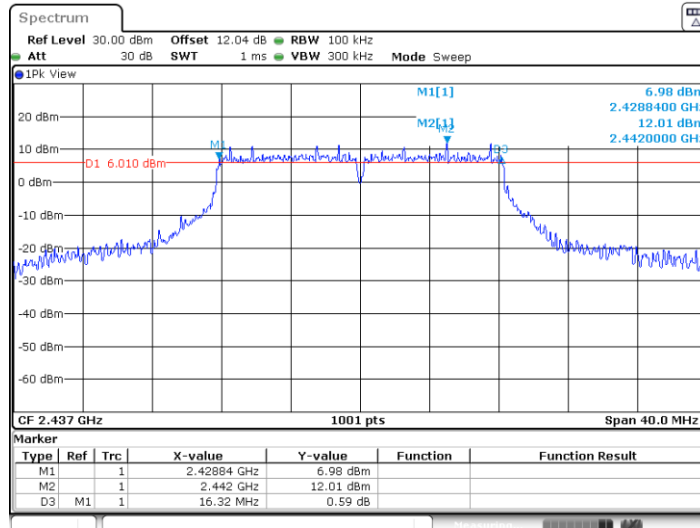

Date: 12.APR.2023 15:22:00




11G-CDD_Ant2_2437

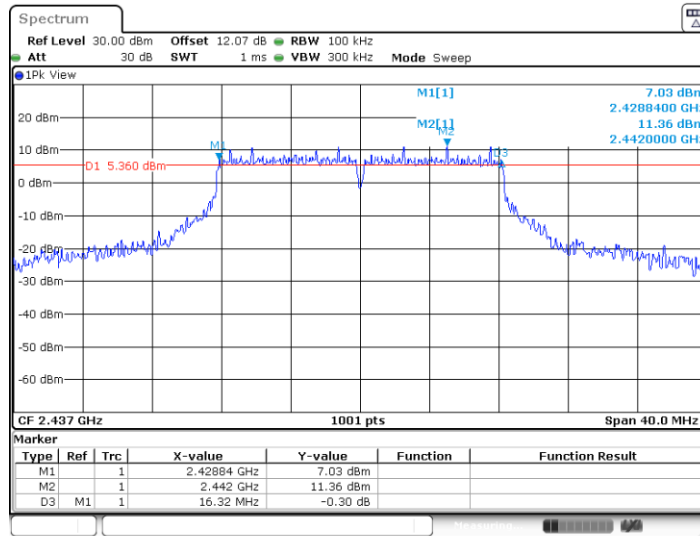



Date: 12.APR.2023 15:23:53


11G-CDD_Ant0_2442

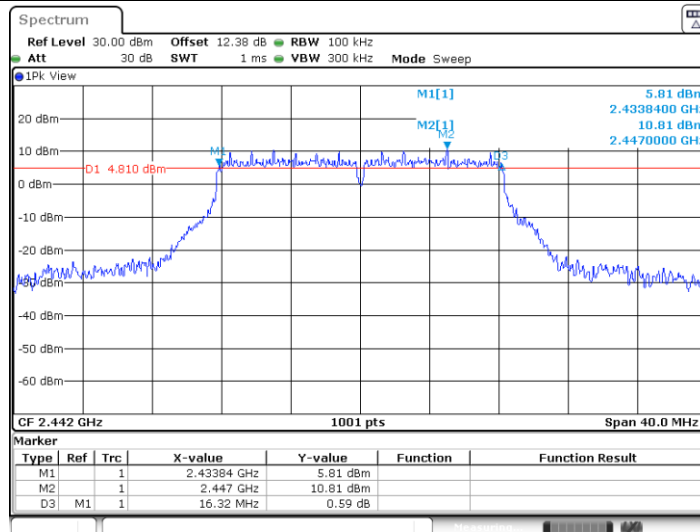

Date: 17.APR.2023 03:03:32

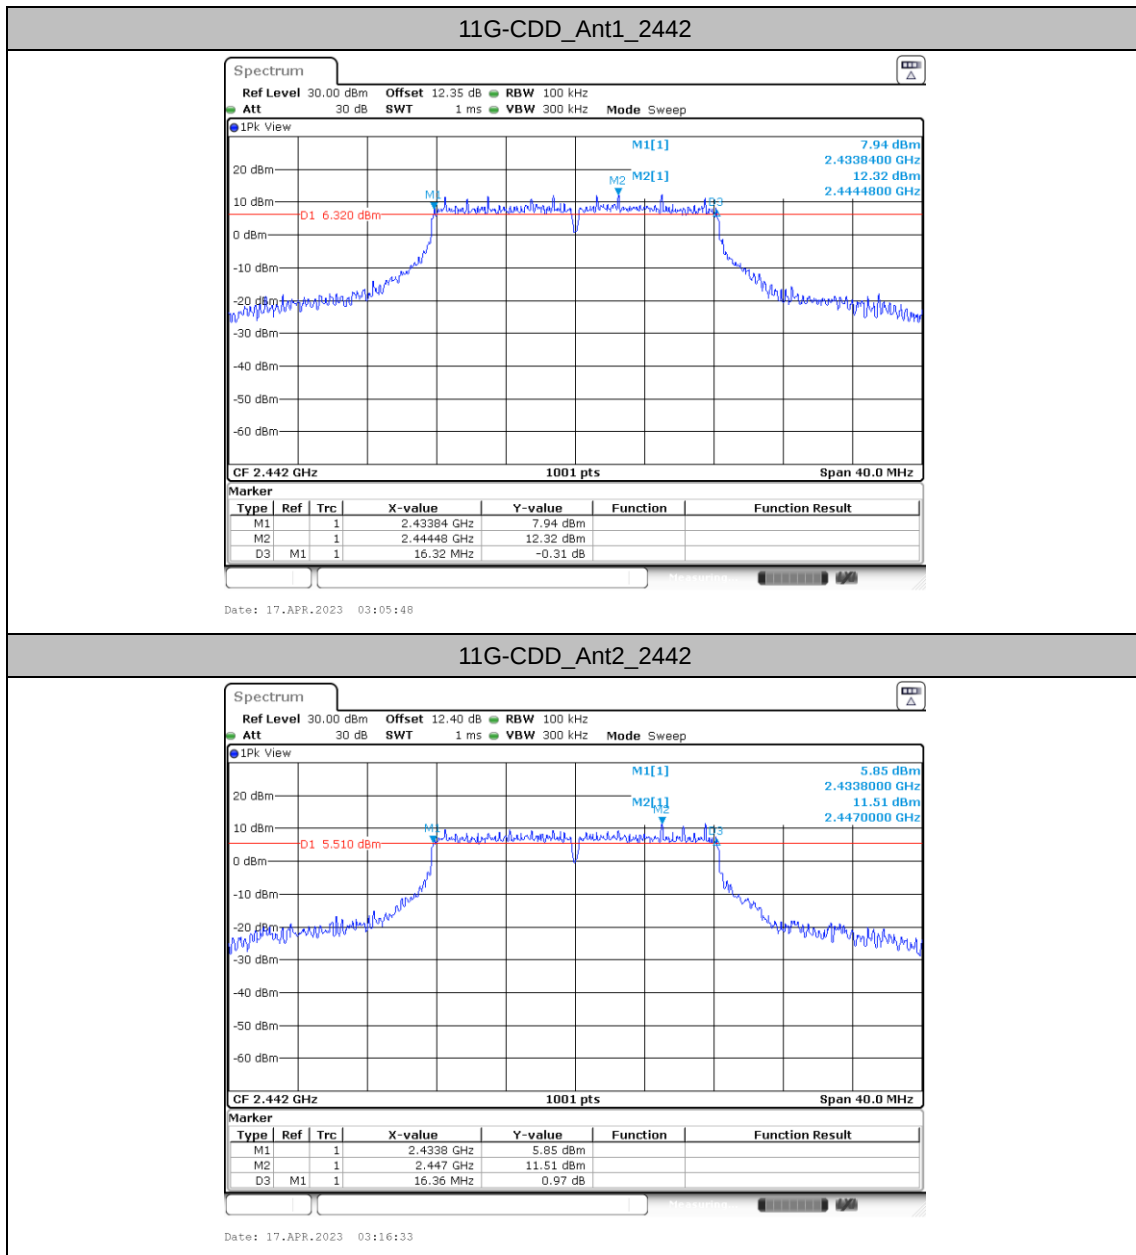


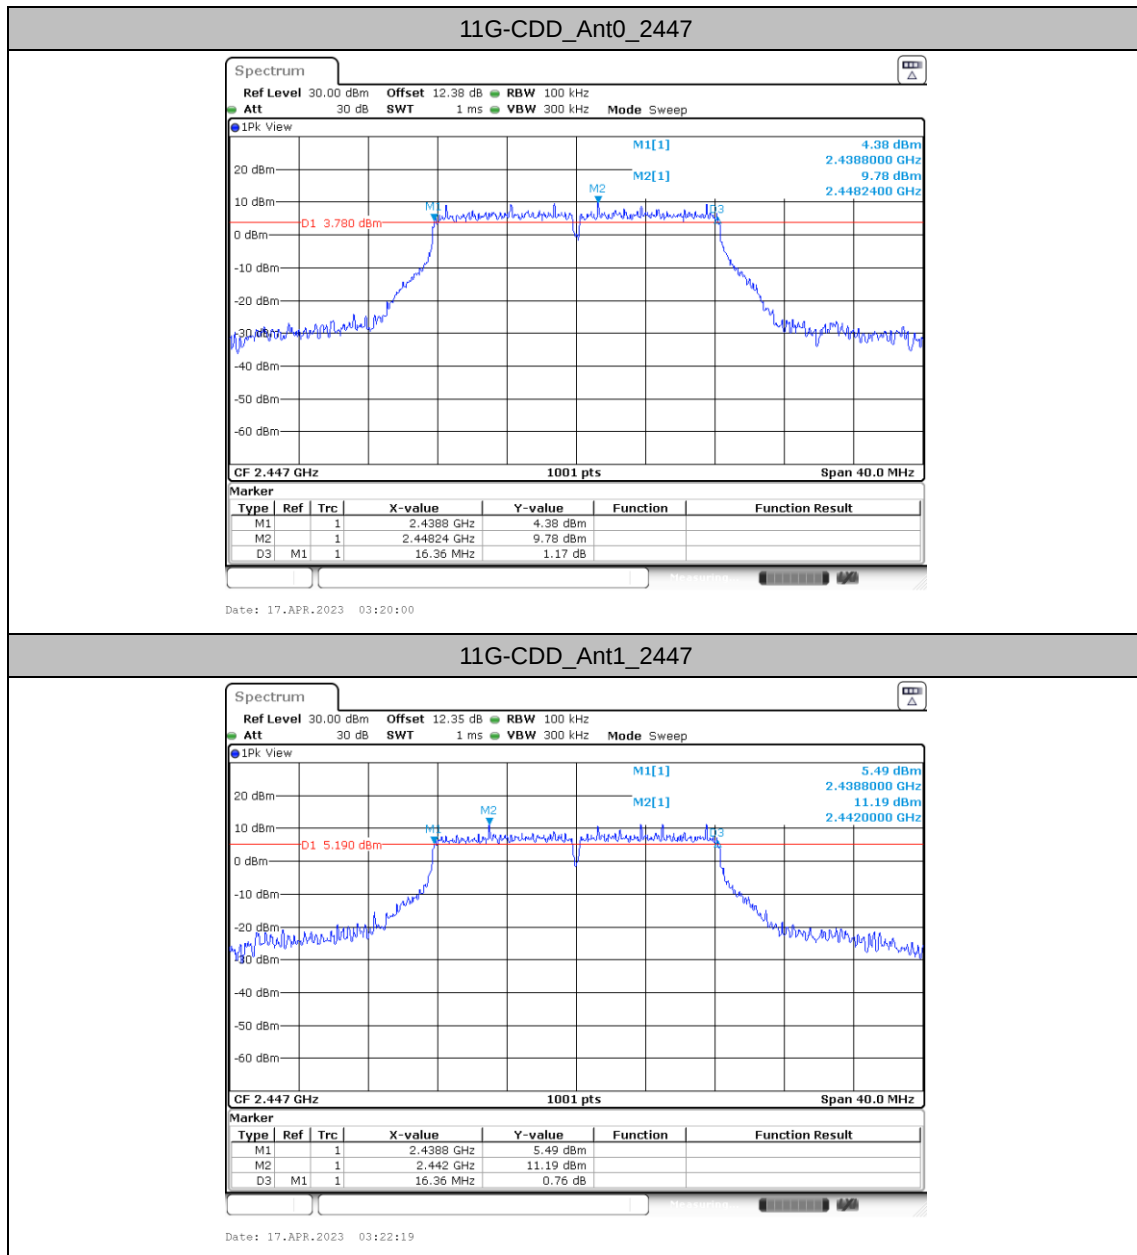

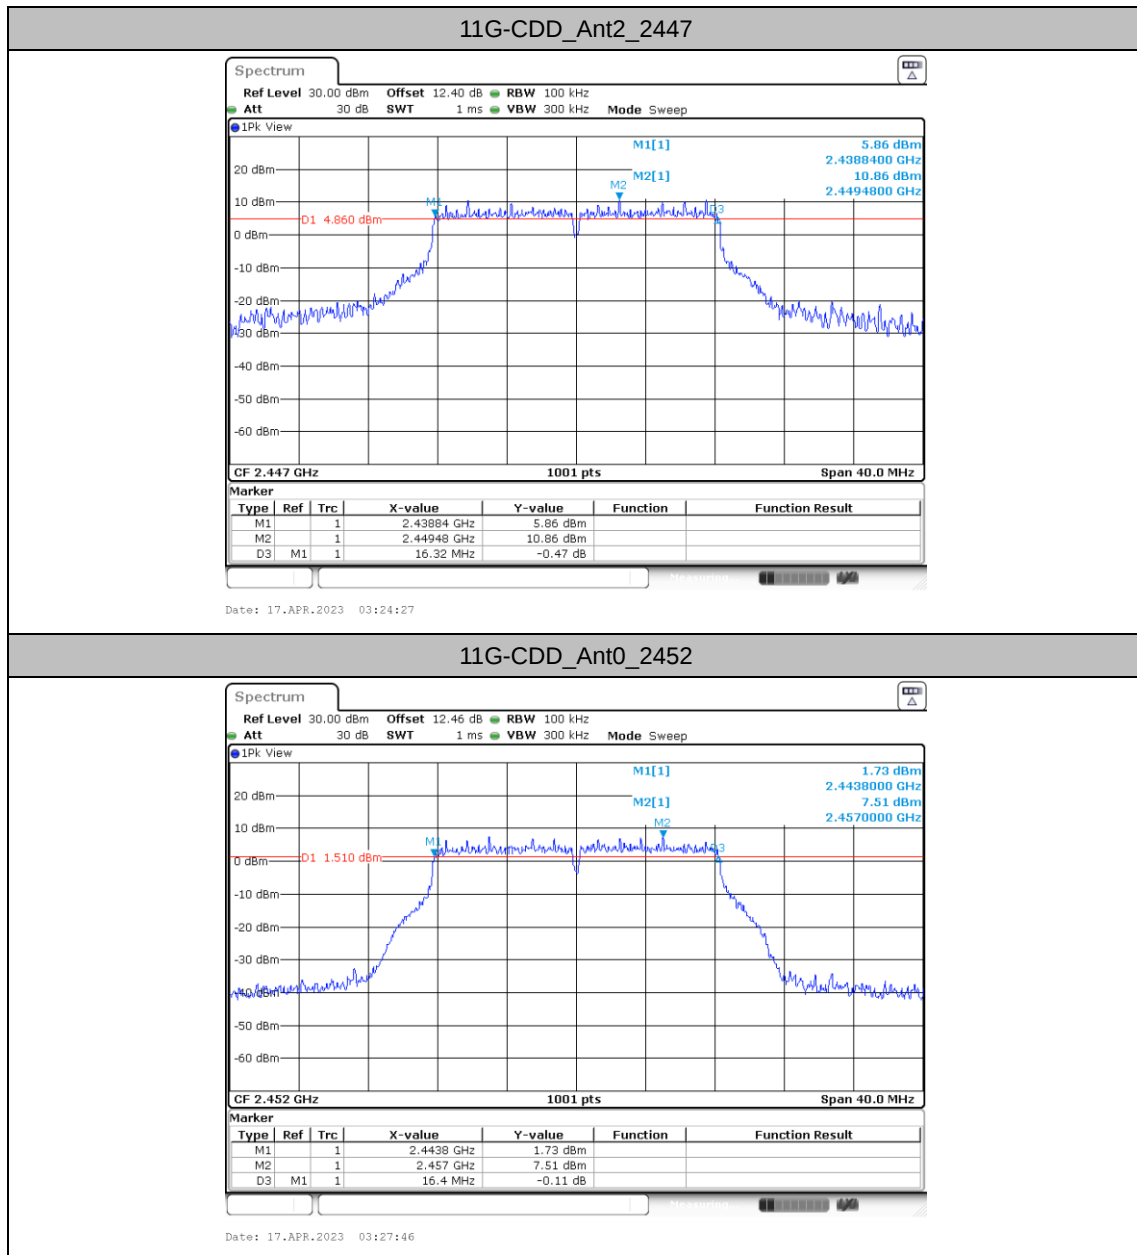




11G-CDD_Ant1_2452

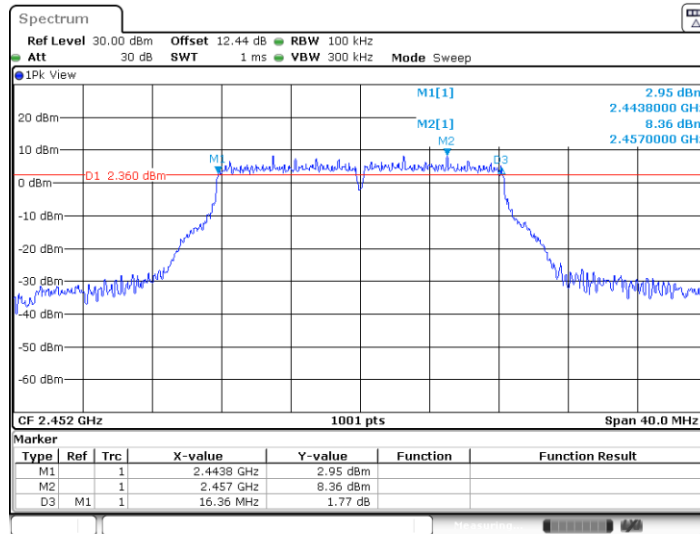

Date: 17.APR.2023 03:30:01


11G-CDD_Ant2_2452

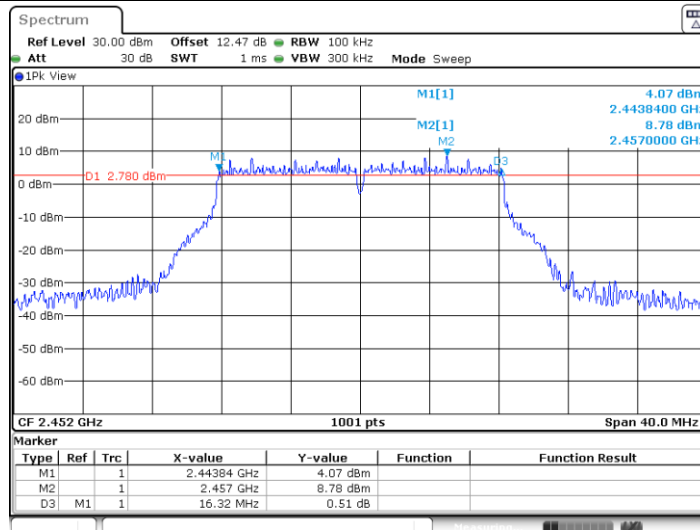

Date: 17.APR.2023 03:32:18




11G-CDD_Ant0_2457

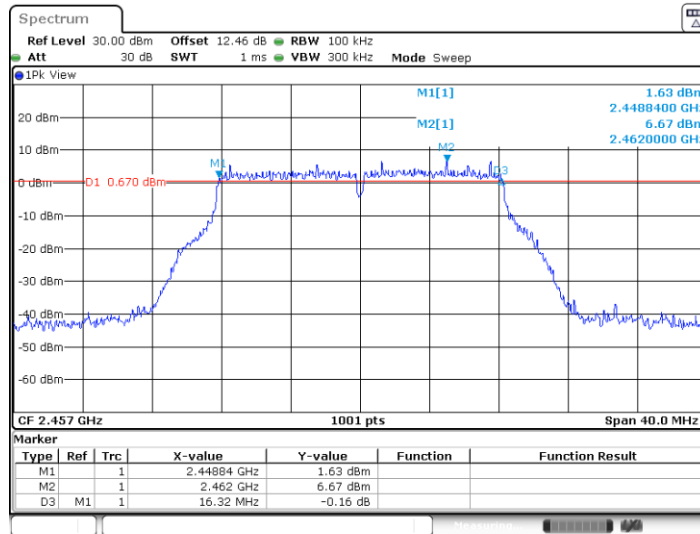


Date: 17.APR.2023 03:35:35

11G-CDD_Ant1_2457

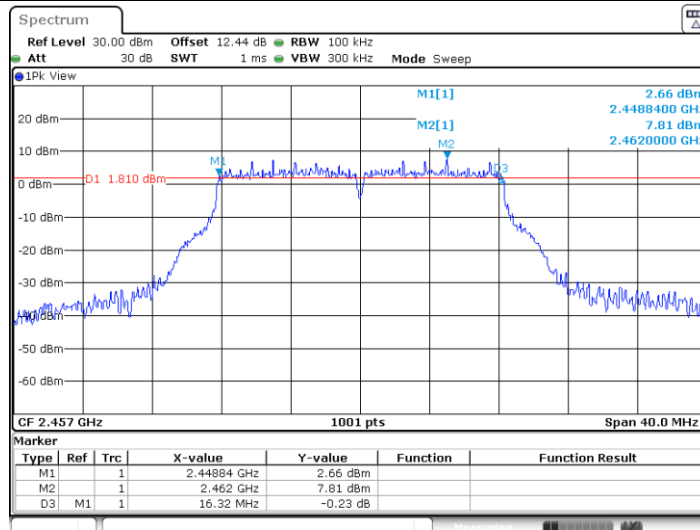


Date: 17.APR.2023 03:37:54

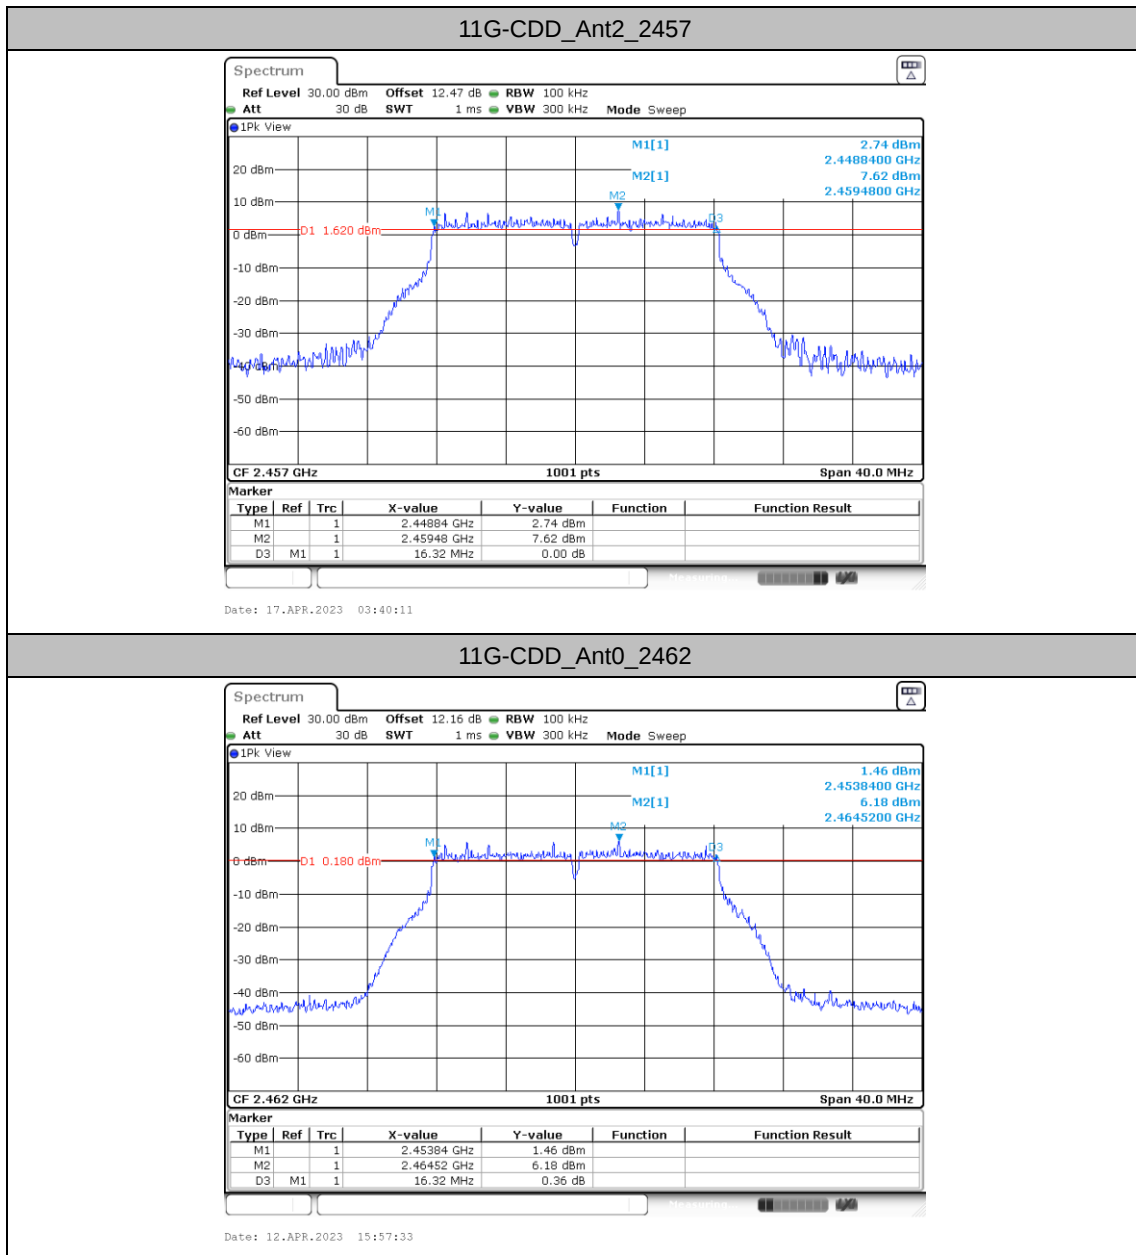




11G-CDD_Ant1_2462

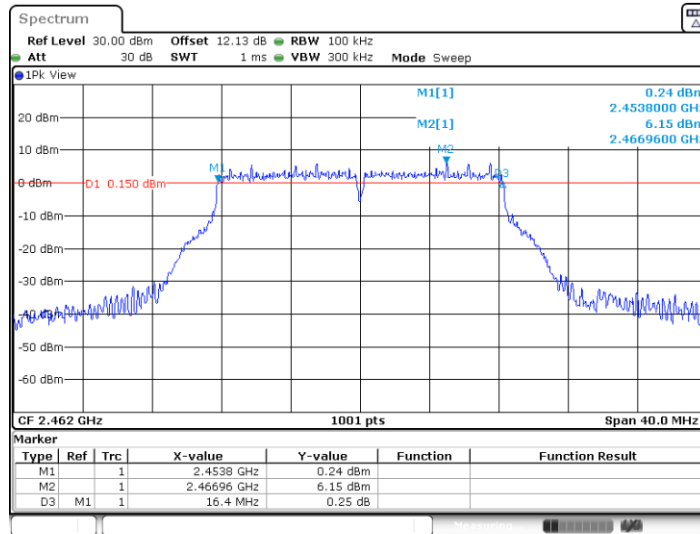


Date: 12.APR.2023 15:59:45

11G-CDD_Ant2_2462

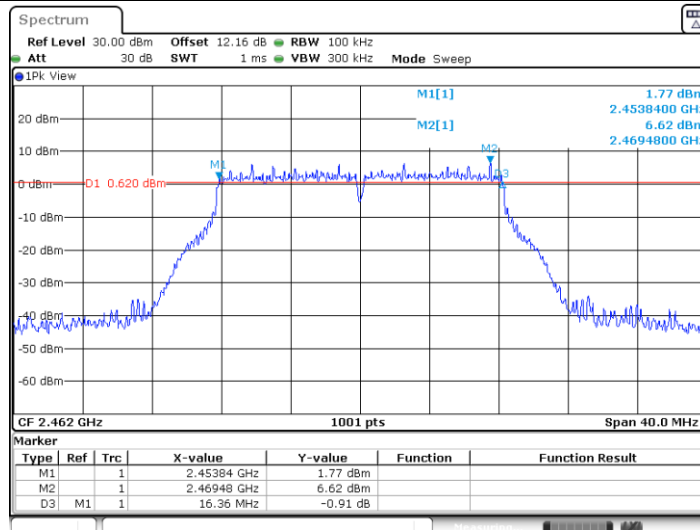


Date: 12.APR.2023 16:02:01

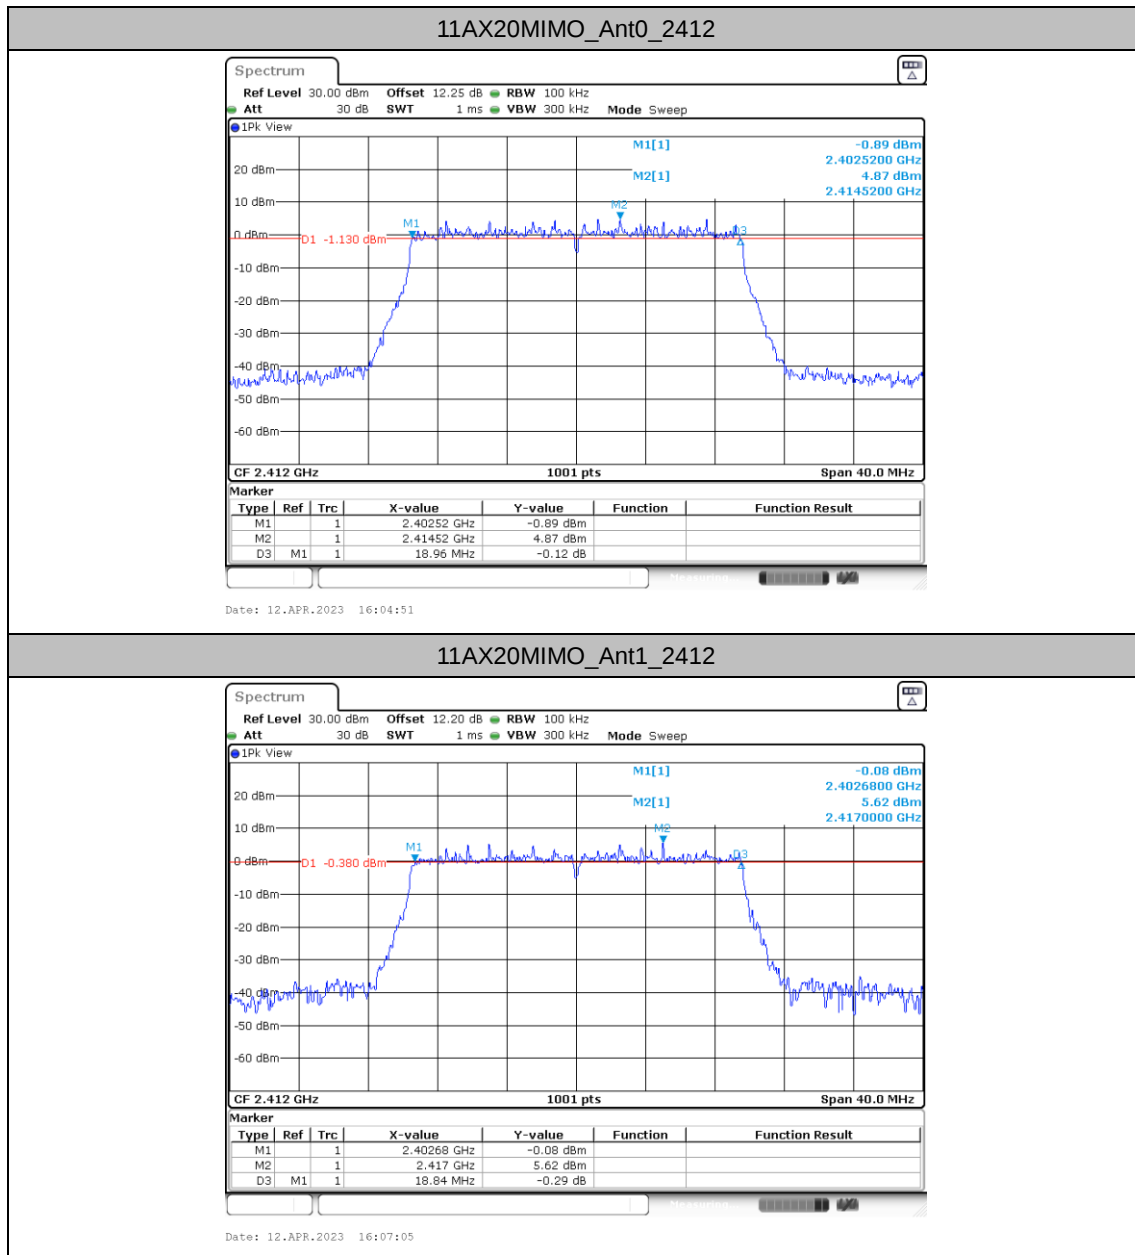




11AX20MIMO_Ant2_2412

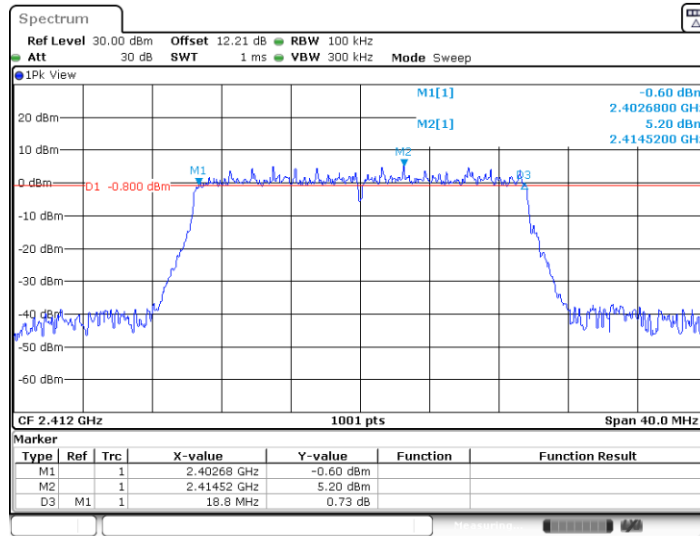

Date: 12.APR.2023 16:09:39


11AX20MIMO_Ant0_2417

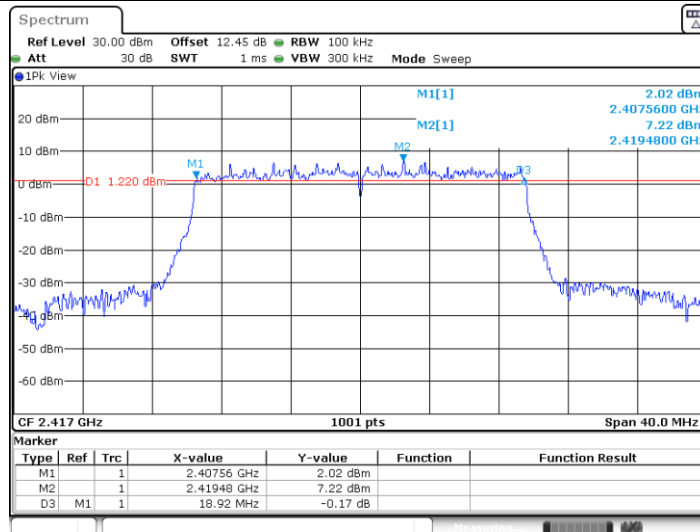

Date: 17.APR.2023 05:07:58




11AX20MIMO_Ant1_2417

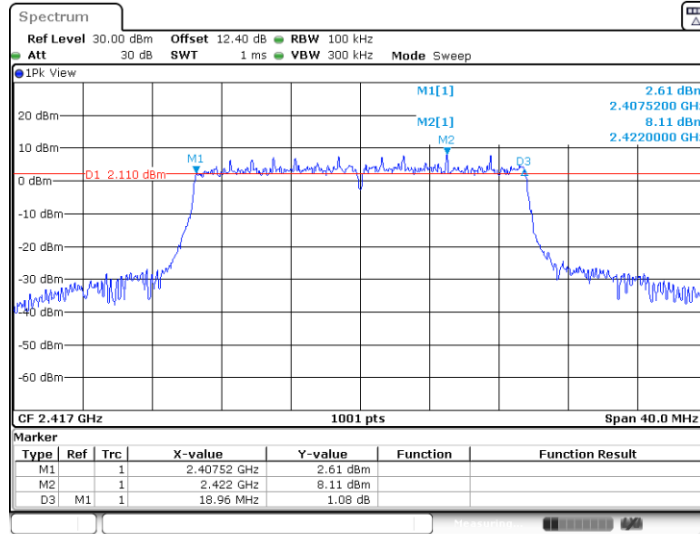



Date: 17.APR.2023 05:10:13

11AX20MIMO_Ant2_2417

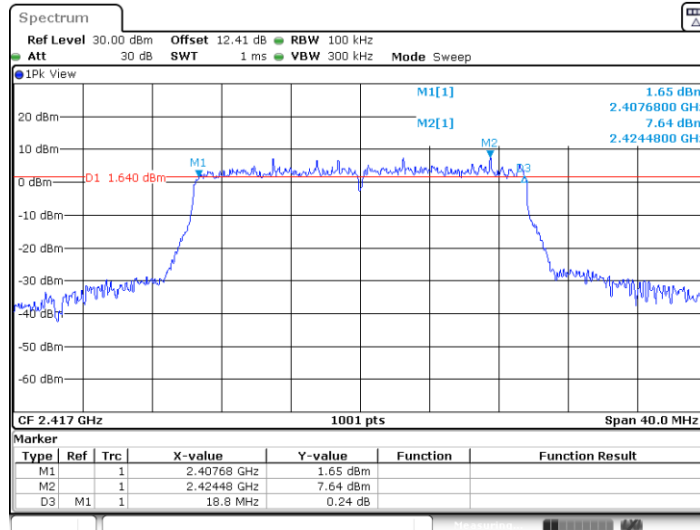


Date: 17.APR.2023 05:12:29

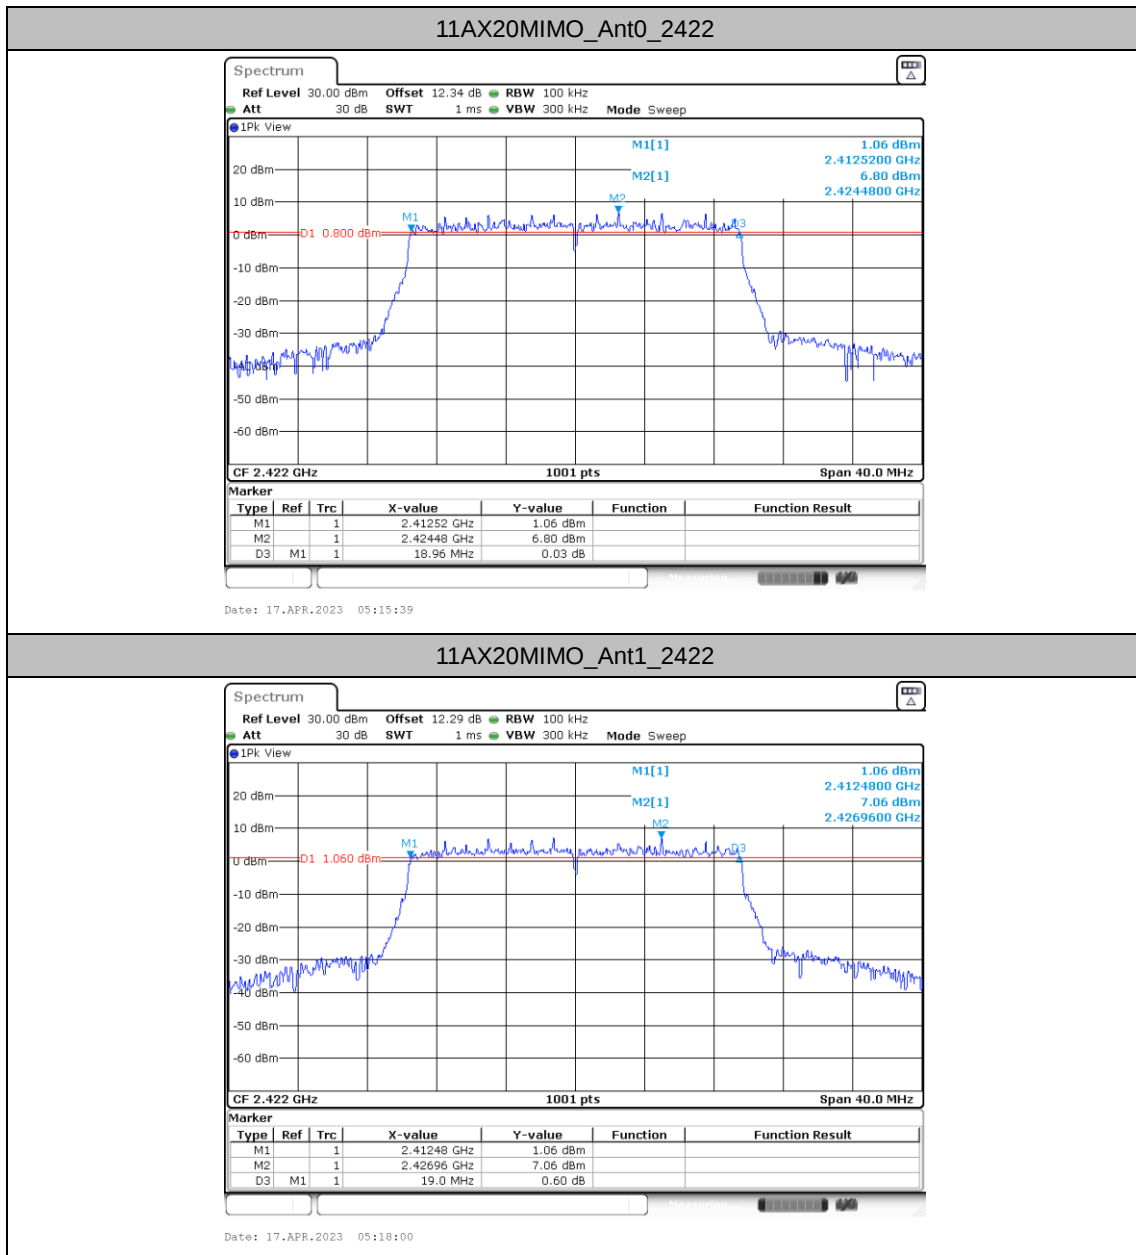

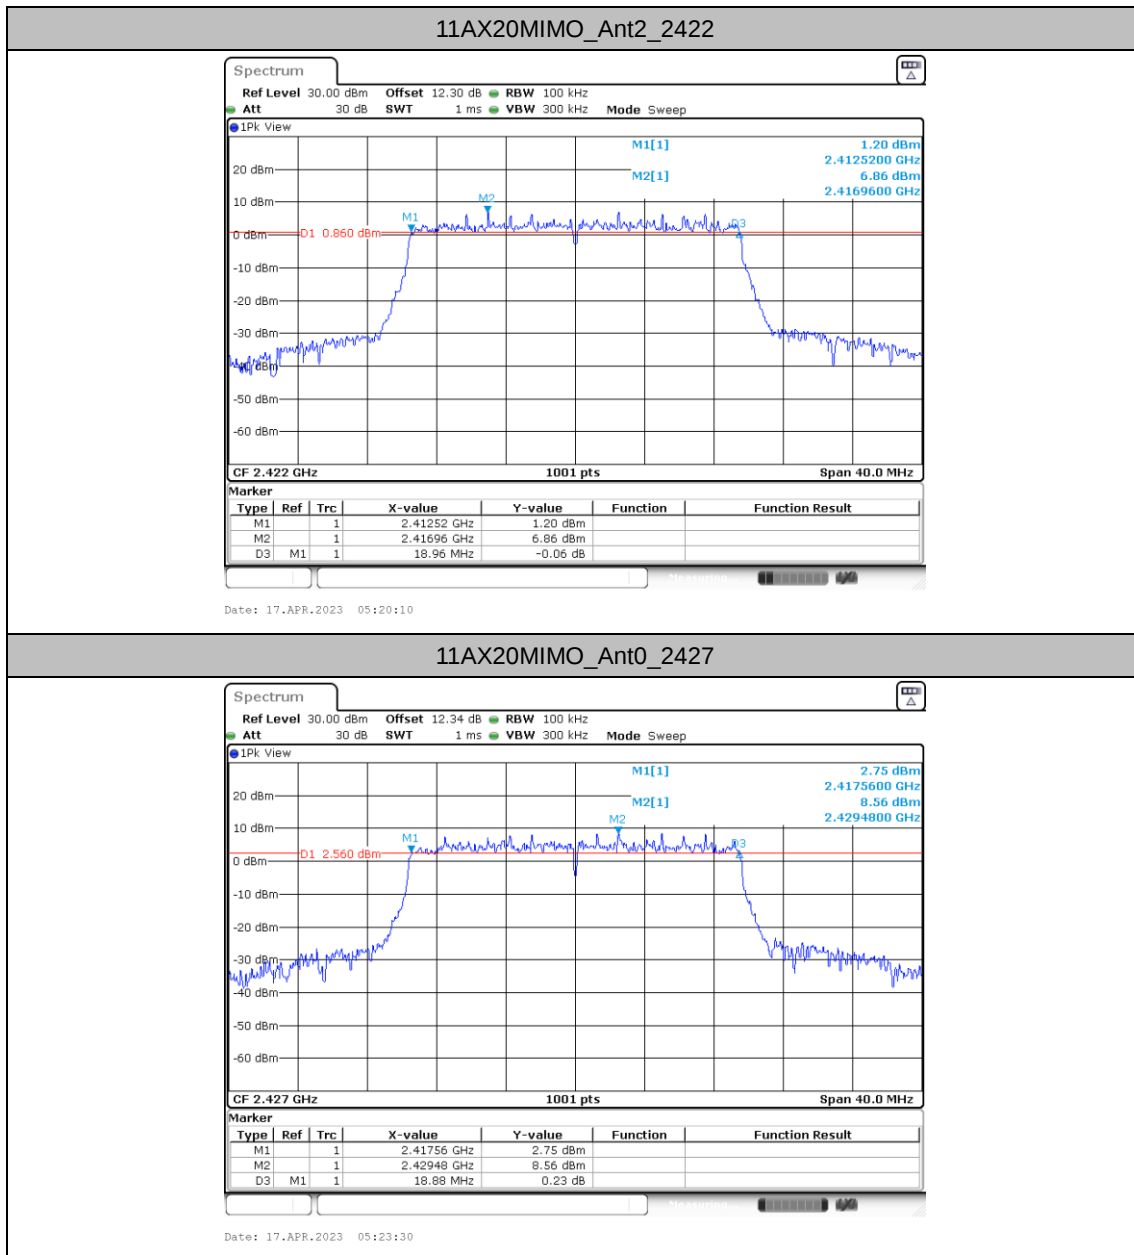




11AX20MIMO_Ant1_2427

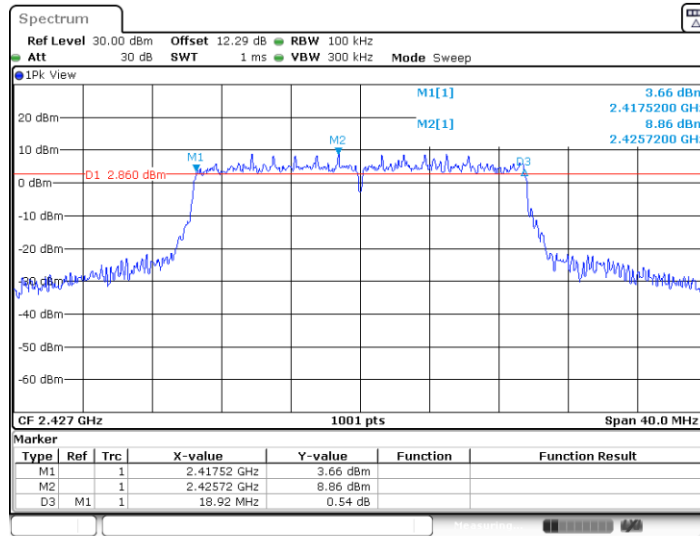

Date: 17.APR.2023 05:25:45


11AX20MIMO_Ant2_2427

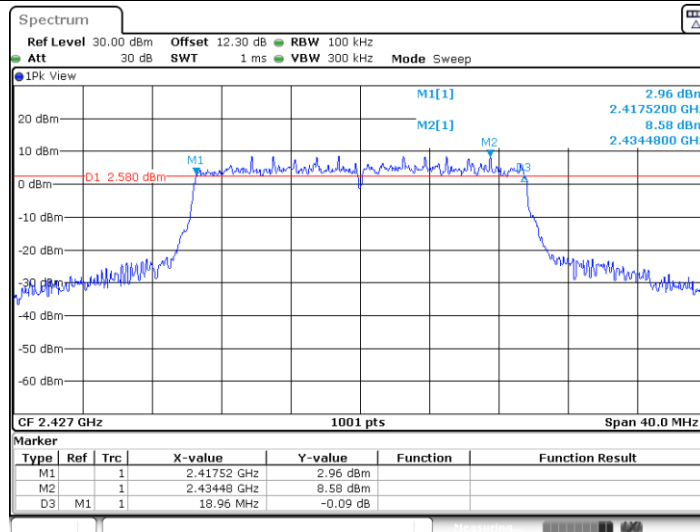

Date: 17.APR.2023 05:27:59




11AX20MIMO_Ant0_2432

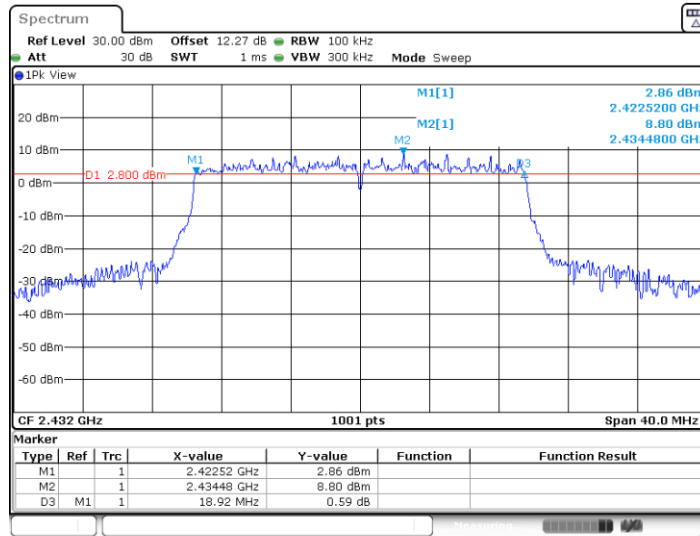


Date: 17.APR.2023 05:33:08

11AX20MIMO_Ant1_2432

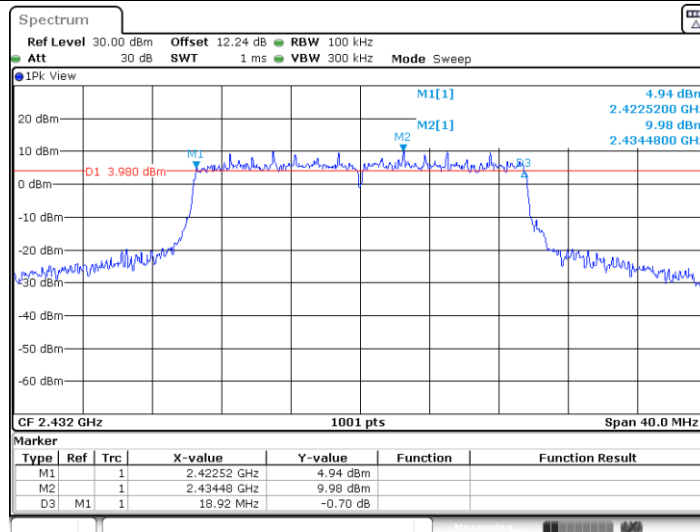


Date: 17.APR.2023 05:35:21

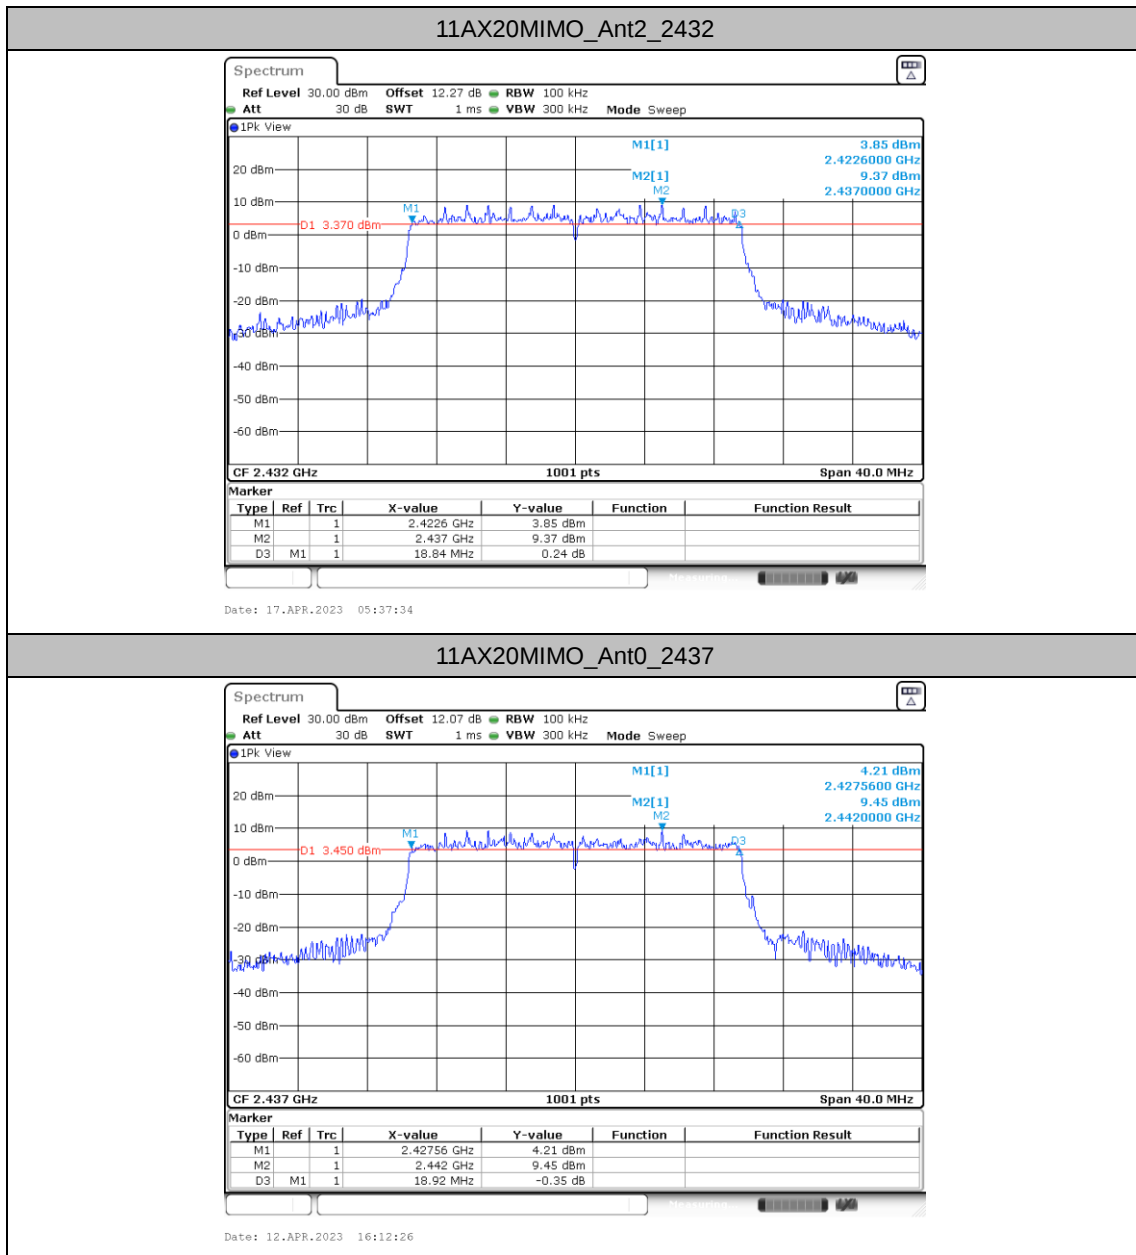




11AX20MIMO_Ant1_2437

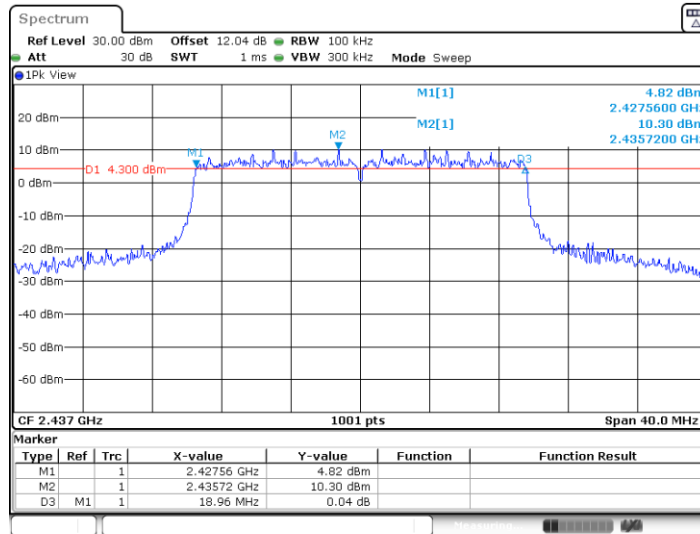

Date: 12.APR.2023 16:14:27


11AX20MIMO_Ant2_2437

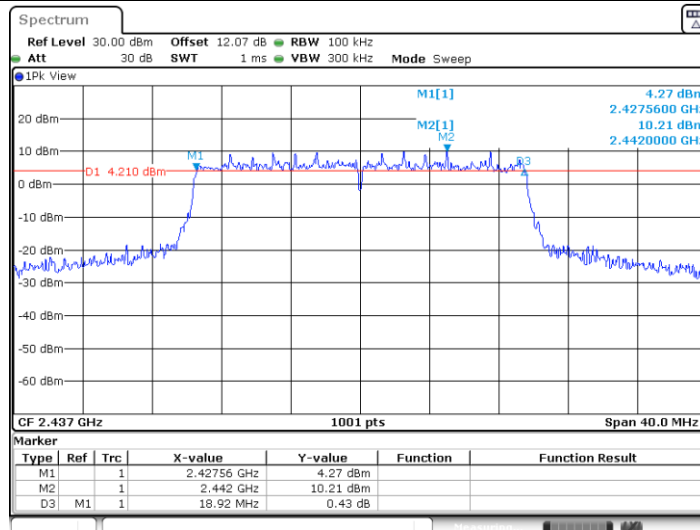


Date: 12.APR.2023 16:16:38



11AX20MIMO_Ant0_2442

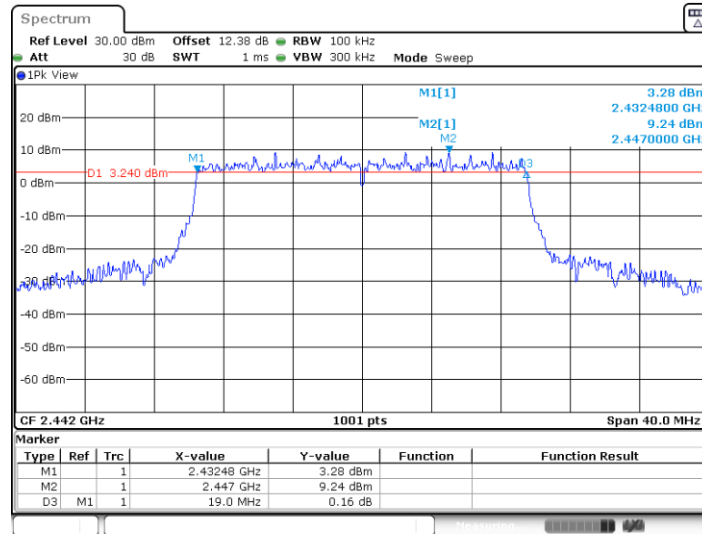


11AX20MIMO_Ant1_2442

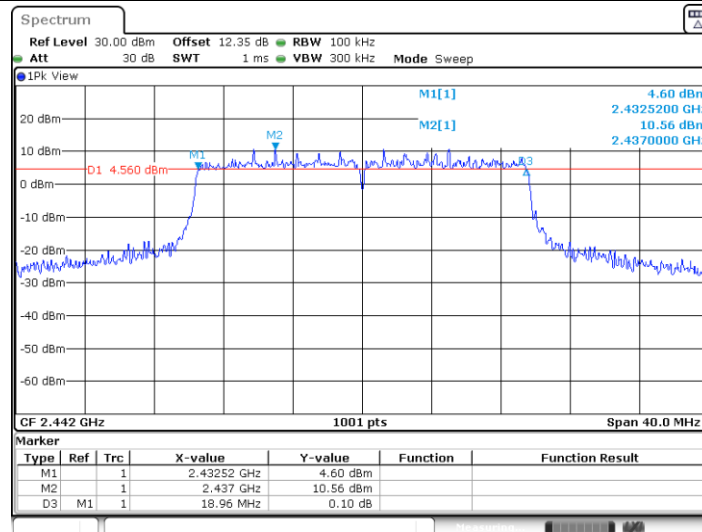





11AX20MIMO_Ant2_2442

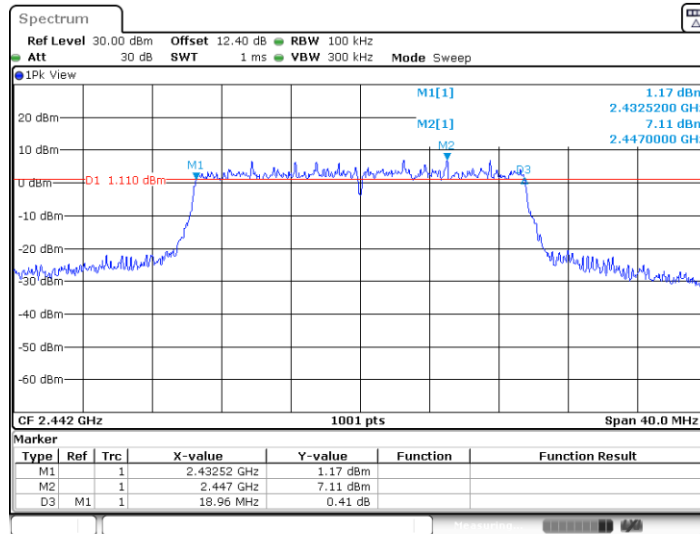


11AX20MIMO_Ant0_2447

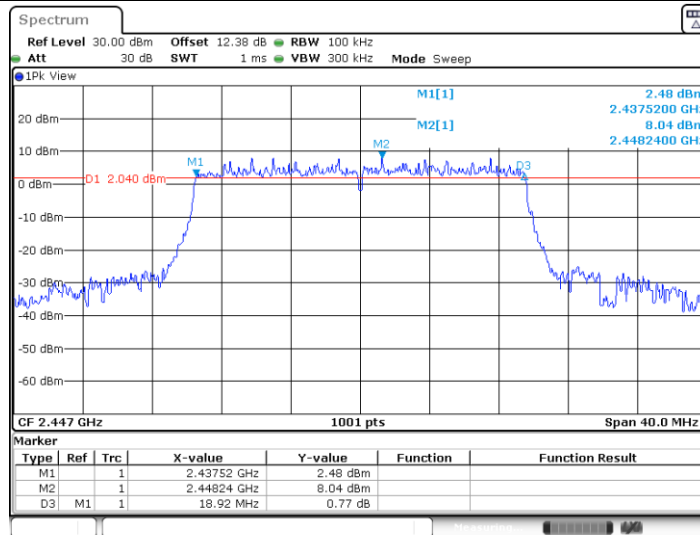

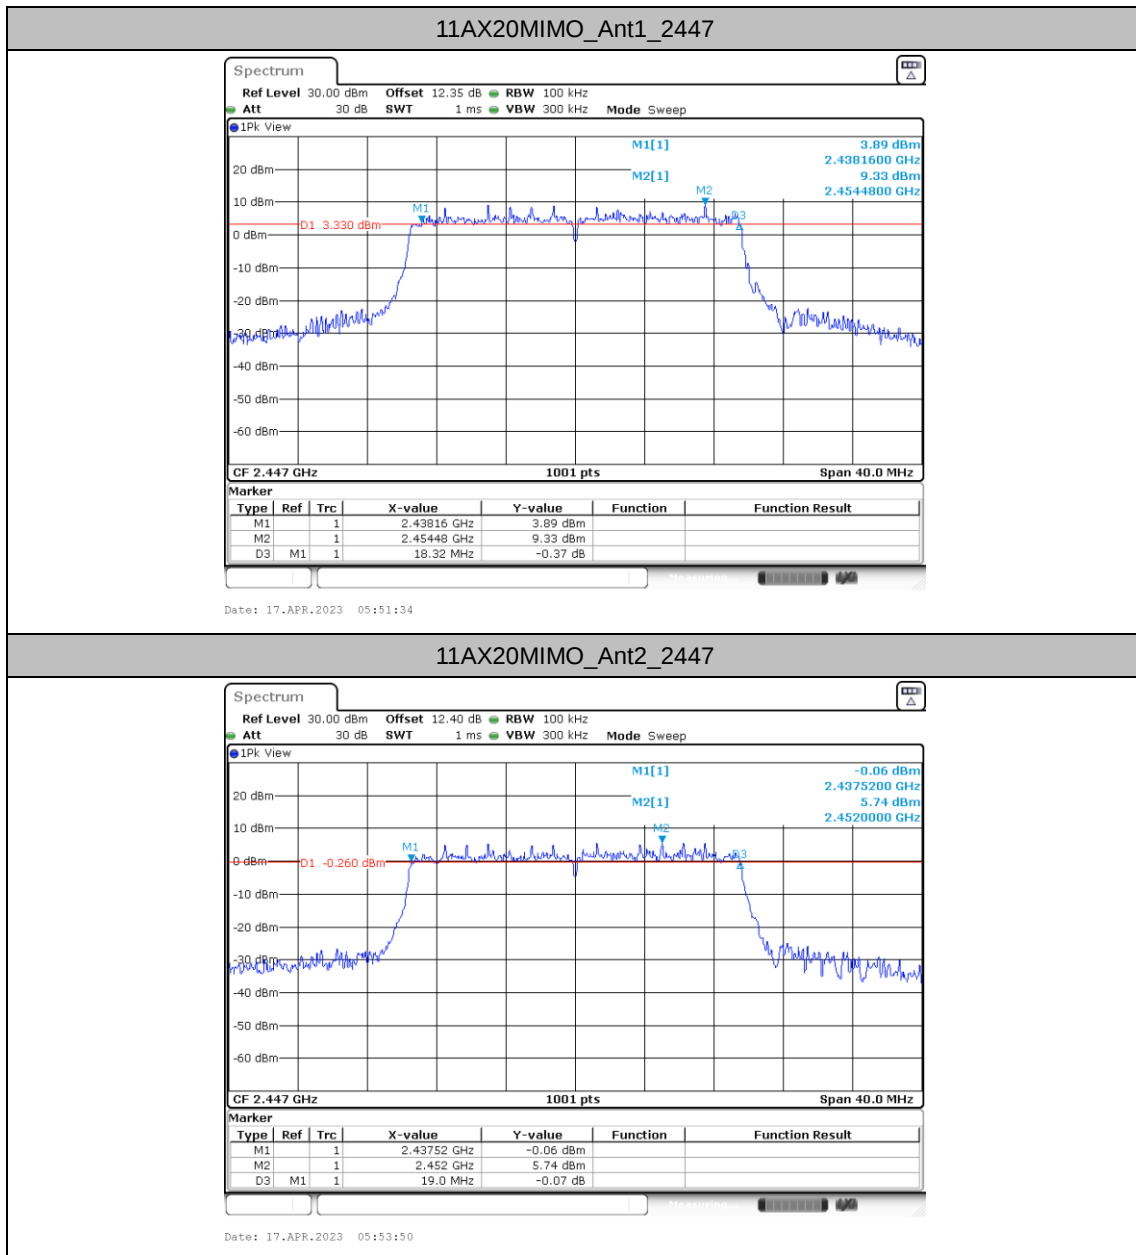




11AX20MIMO_Ant0_2452

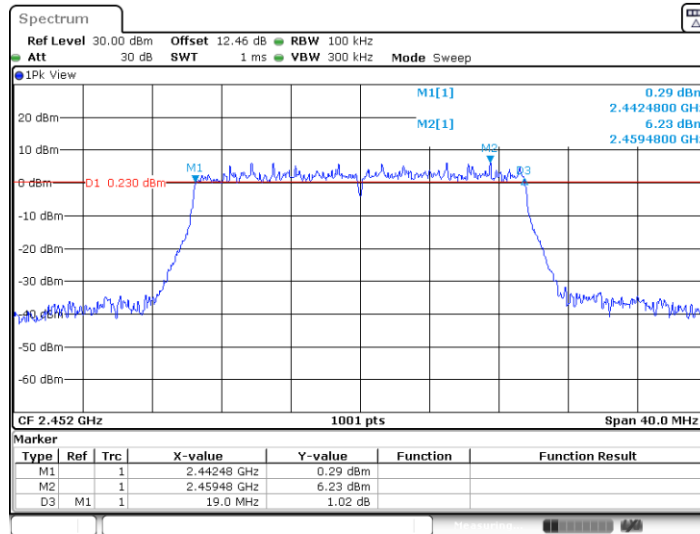



Date: 17.APR.2023 06:09:32


11AX20MIMO_Ant1_2452

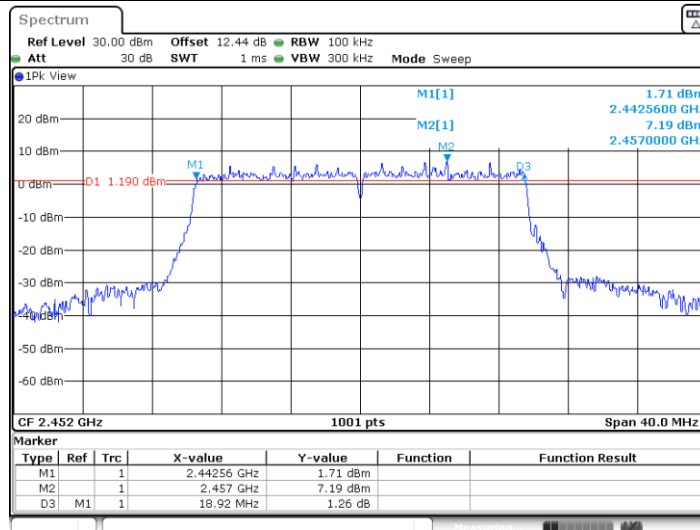



Date: 17.APR.2023 06:11:57

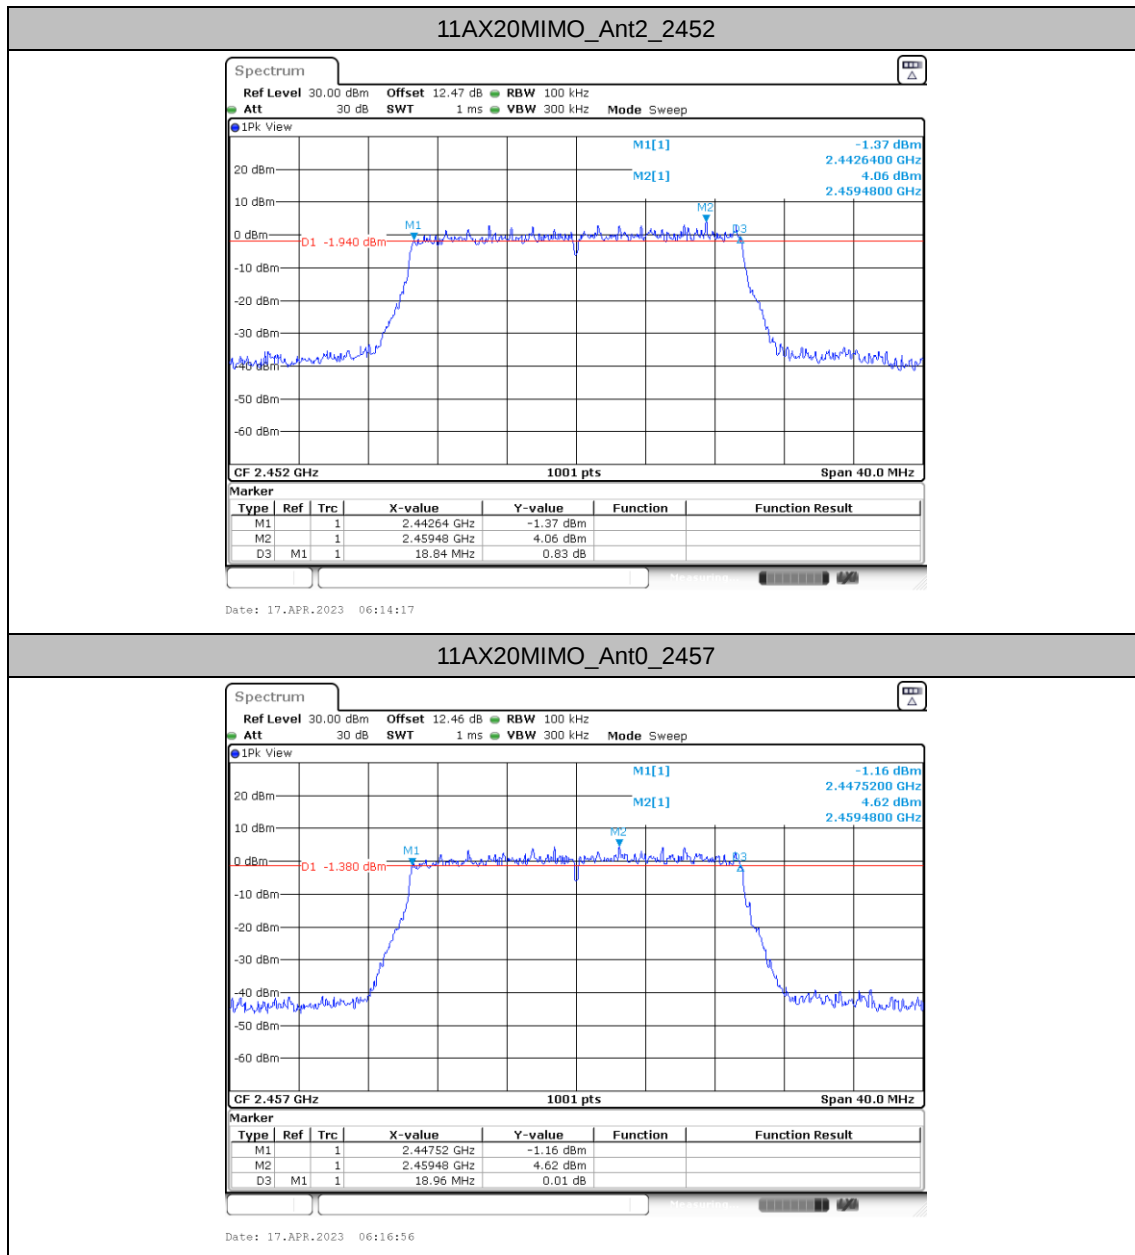


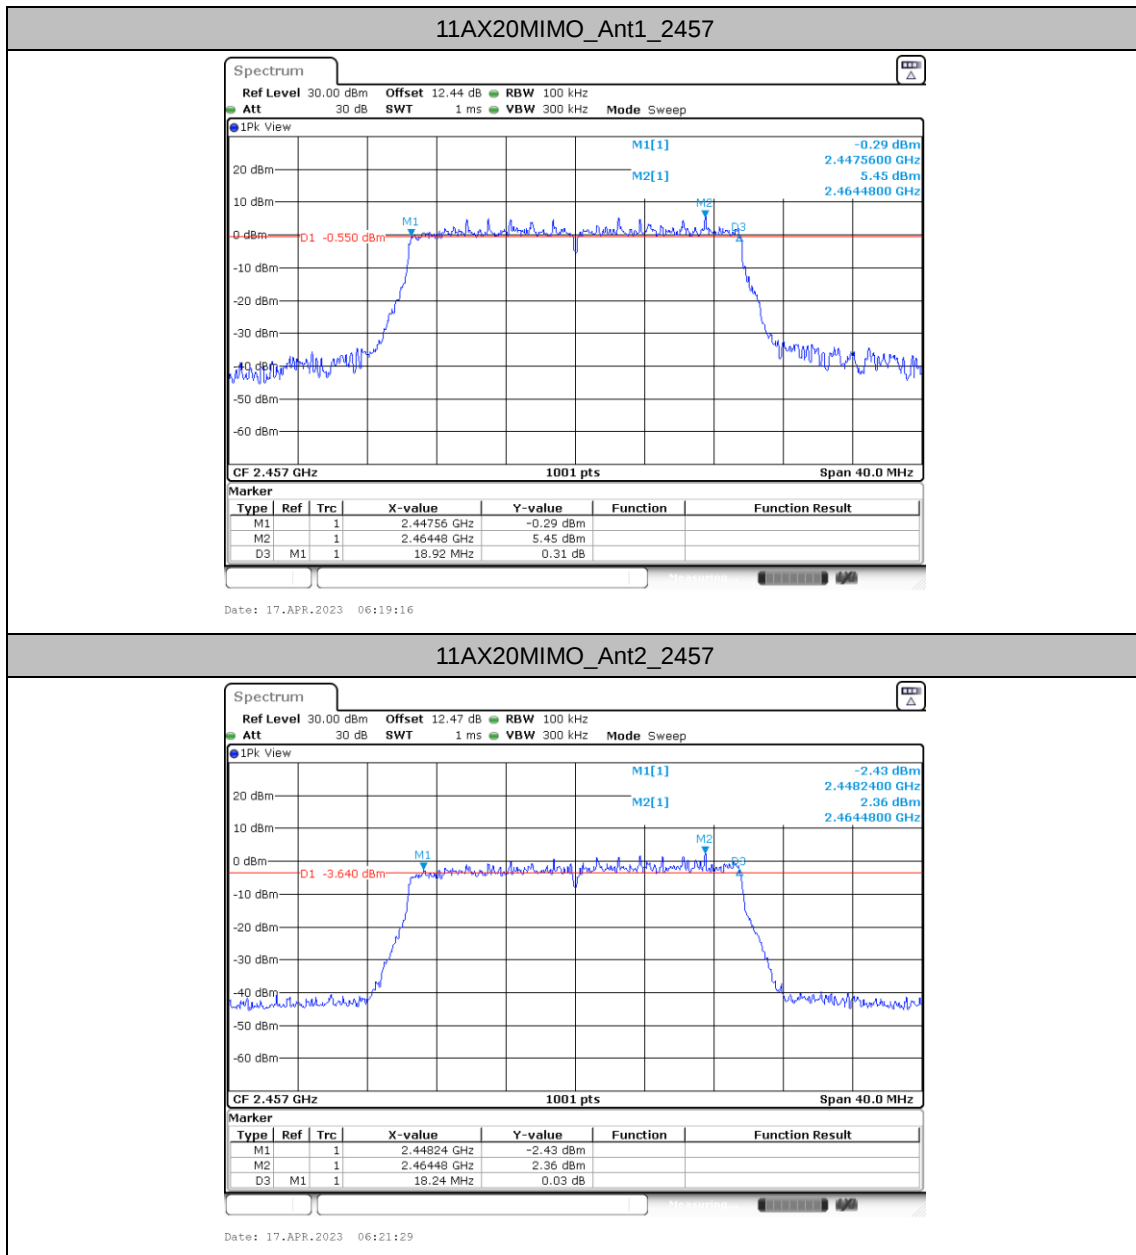


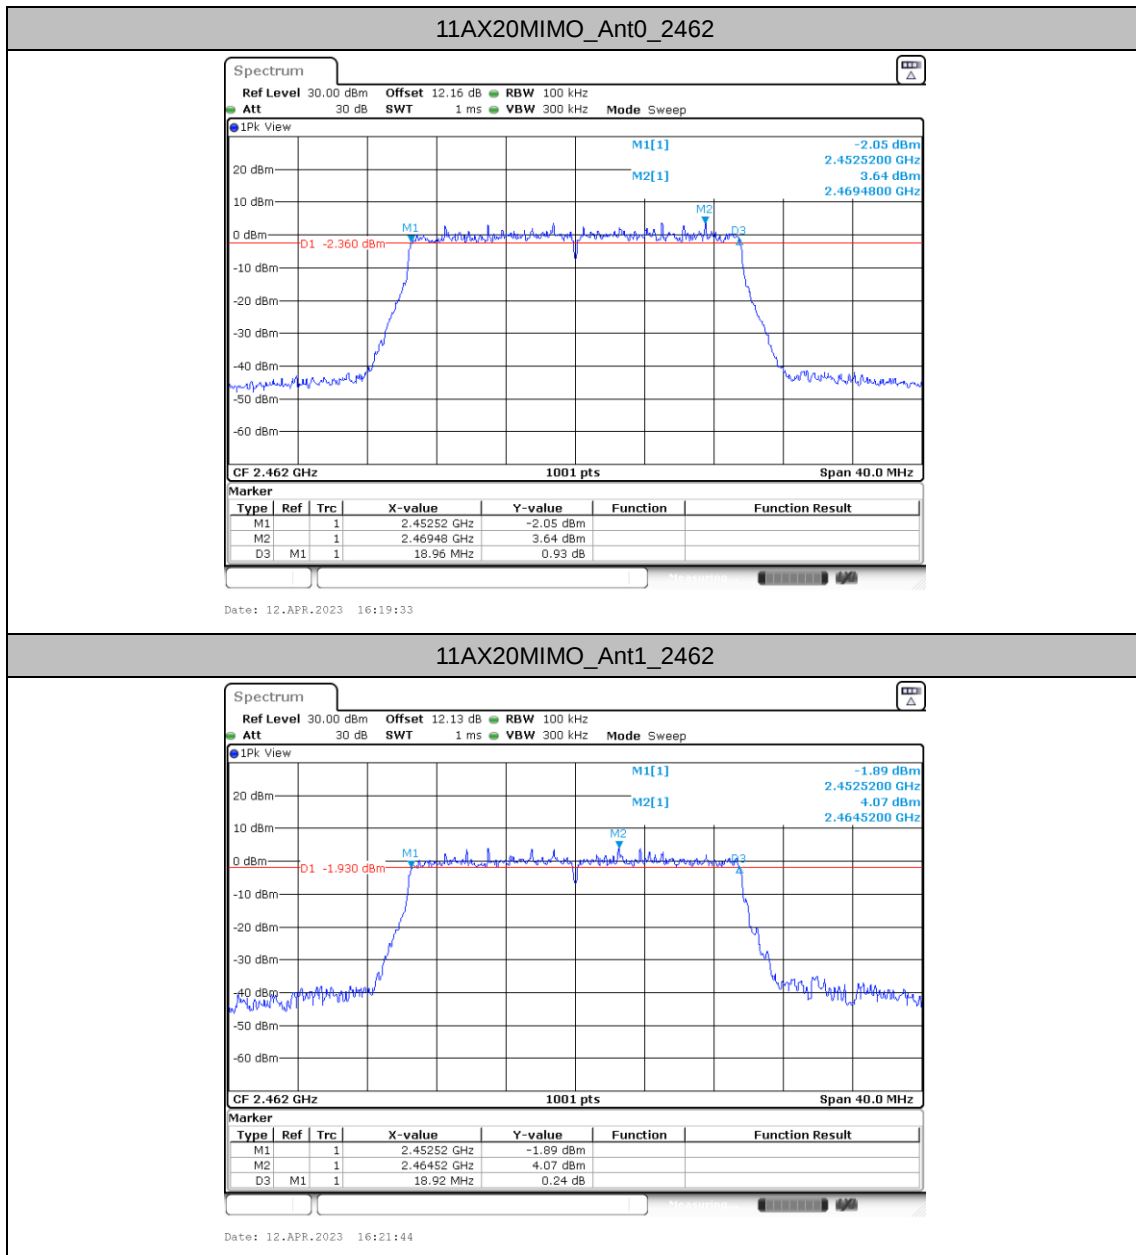


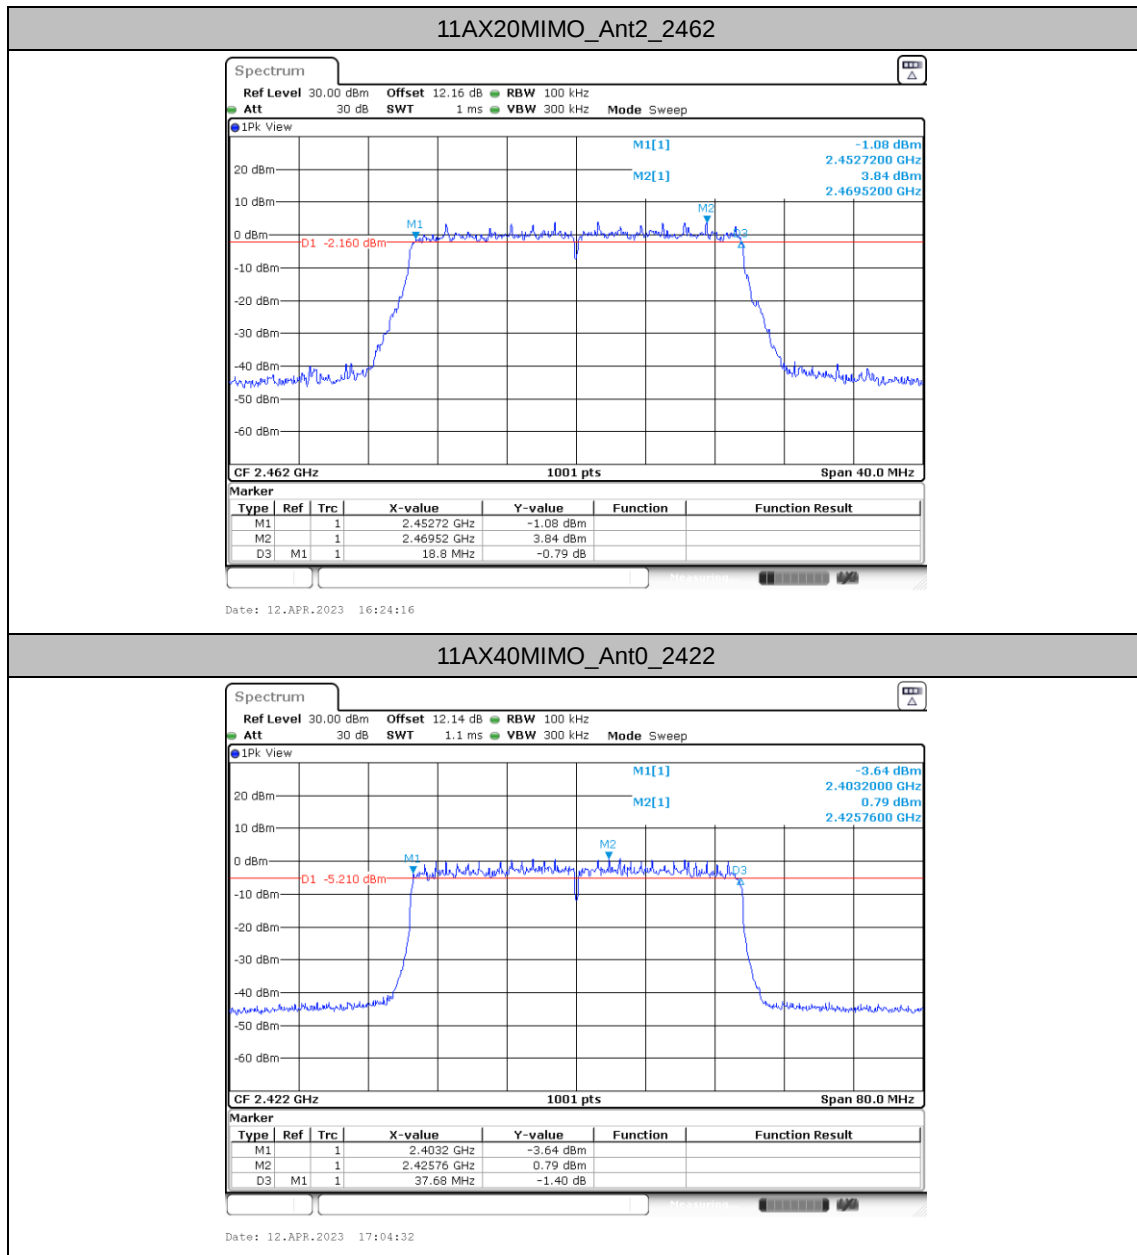

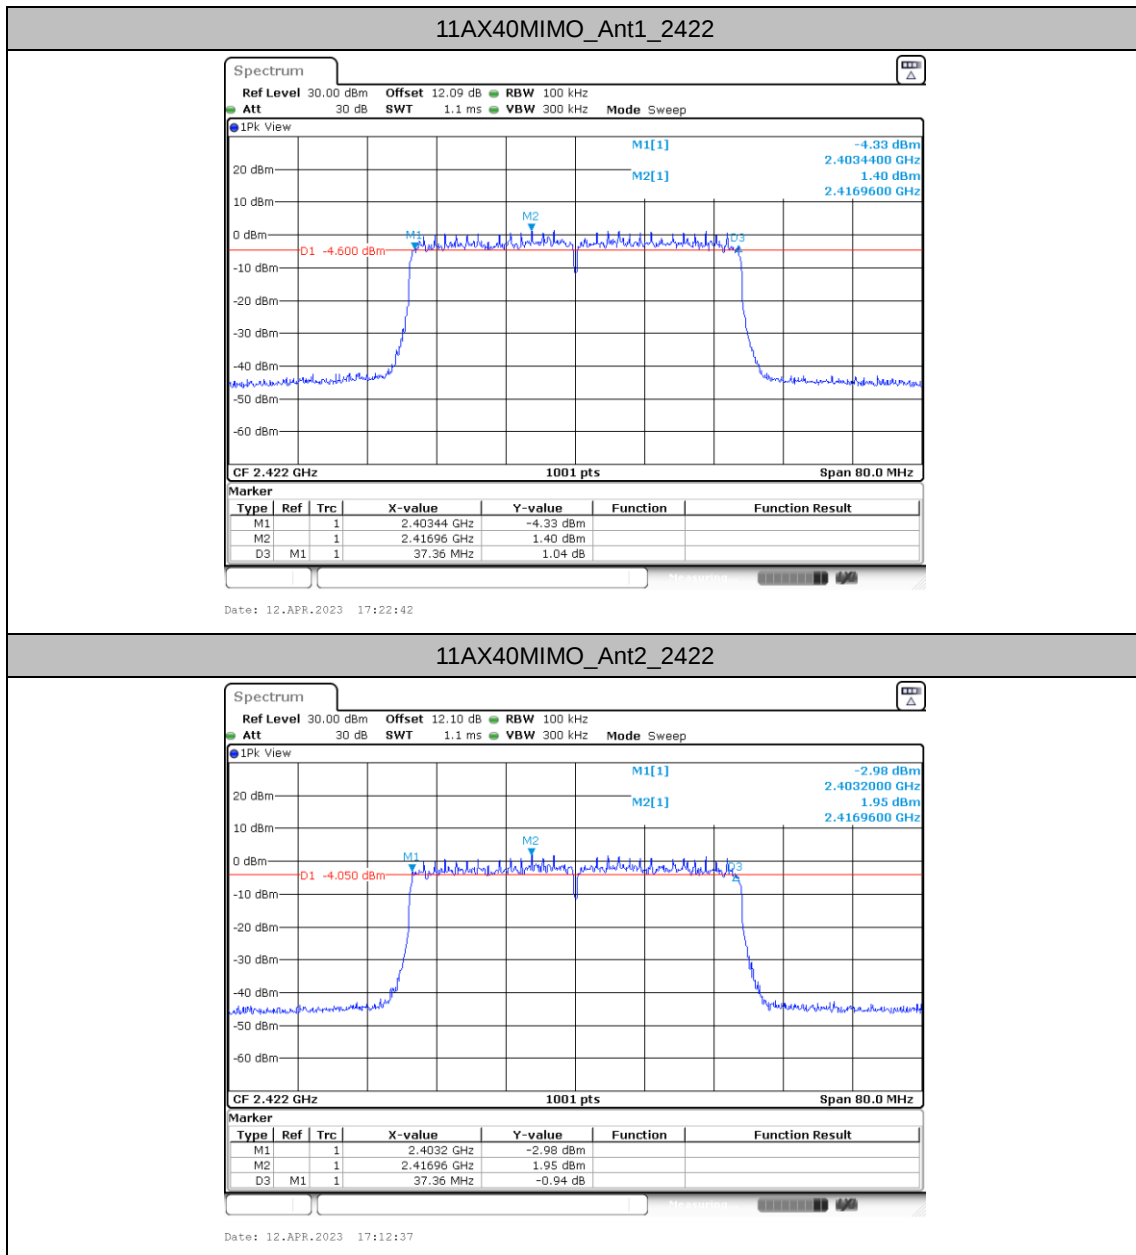

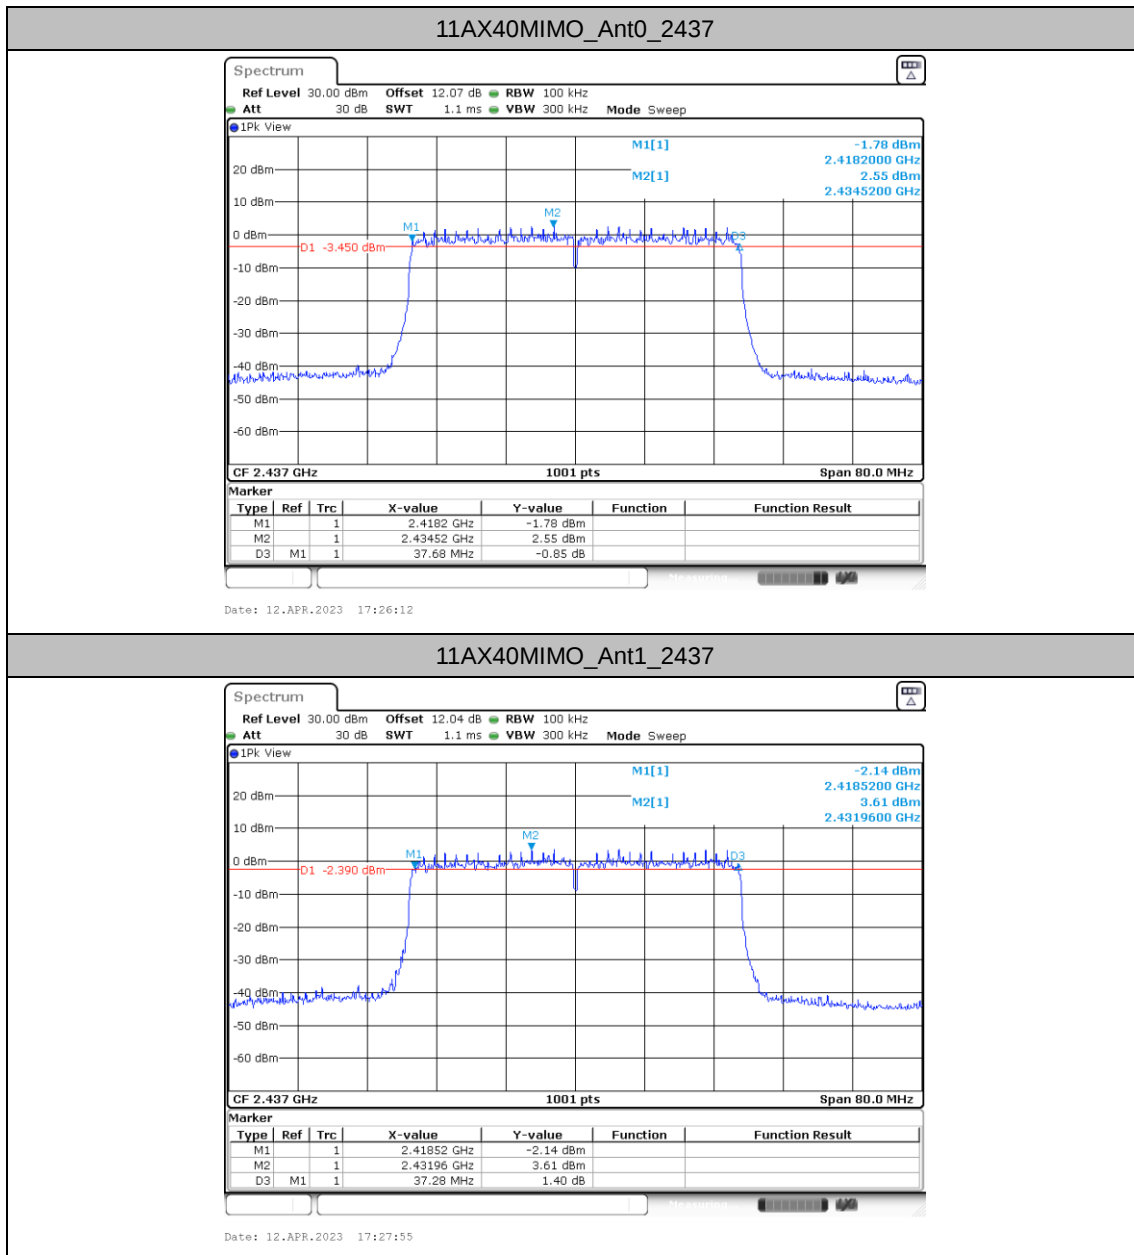

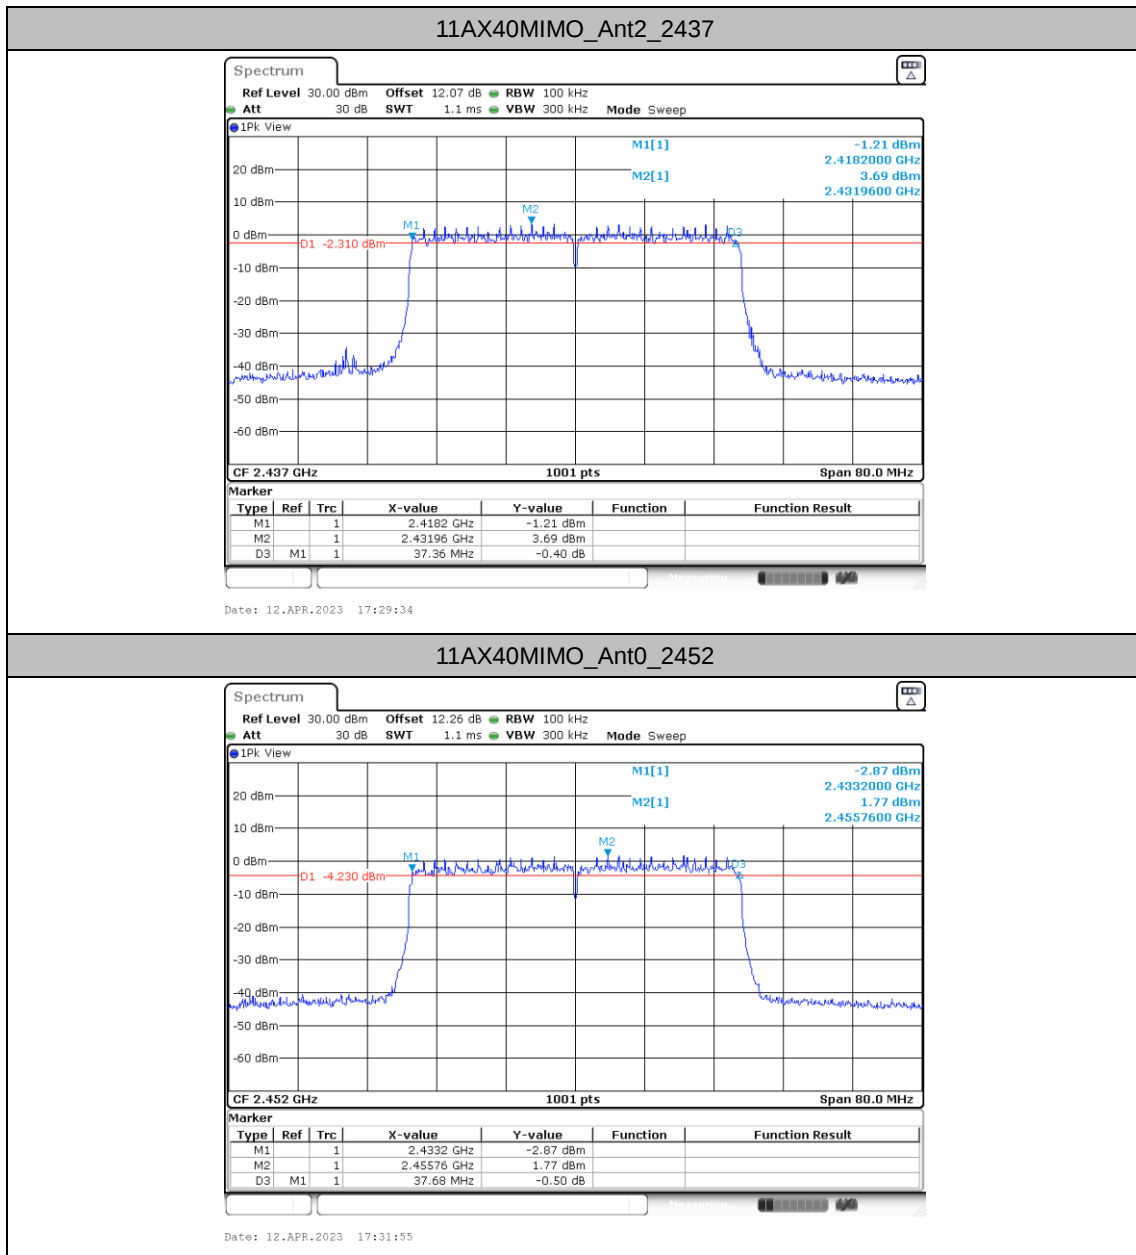

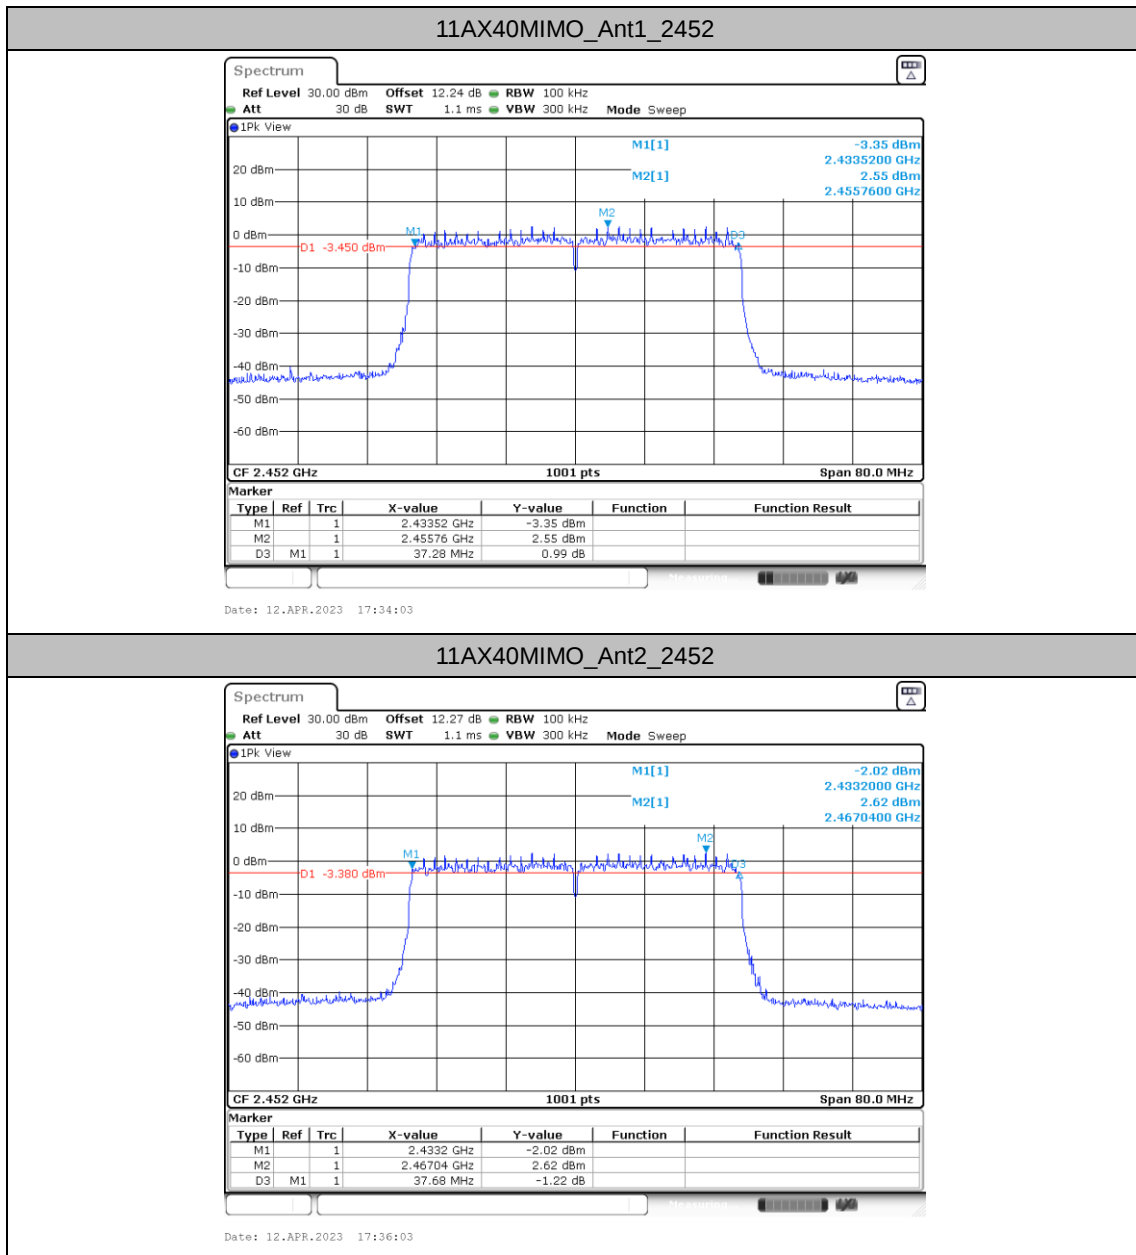



Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant0	2412	10.669	2406.6853	2417.3546	---	---
	Ant1	2412	11.109	2406.4456	2417.5544	---	---
	Ant2	2412	10.989	2406.5654	2417.5544	---	---
	Ant0	2437	10.669	2431.6454	2442.3147	---	---
	Ant1	2437	10.789	2431.6054	2442.3946	---	---
	Ant2	2437	10.829	2431.5654	2442.3946	---	---
	Ant0	2462	10.629	2456.7253	2467.3546	---	---
	Ant1	2462	11.189	2456.4456	2467.6344	---	---
	Ant2	2462	10.869	2456.6454	2467.5145	---	---
11G-CDD	Ant0	2412	18.102	2403.0889	2421.1908	---	---
	Ant1	2412	20.22	2401.9700	2422.1898	---	---
	Ant2	2412	18.741	2402.8492	2421.5904	---	---
	Ant0	2437	17.742	2428.1688	2445.9111	---	---
	Ant1	2437	18.062	2428.0490	2446.1109	---	---
	Ant2	2437	17.782	2428.1289	2445.9111	---	---
	Ant0	2442	17.742	2433.2088	2450.9510	---	---
	Ant1	2442	18.222	2432.8891	2451.1109	---	---
	Ant2	2442	17.782	2433.1289	2450.9111	---	---
	Ant0	2447	17.702	2438.2488	2455.9510	---	---
	Ant1	2447	17.942	2438.0889	2456.0310	---	---
	Ant2	2447	17.502	2438.2488	2455.7512	---	---
	Ant0	2452	17.622	2443.2887	2460.9111	---	---
	Ant1	2452	17.622	2443.2088	2460.8312	---	---
	Ant2	2452	17.303	2443.3686	2460.6713	---	---
	Ant0	2457	17.582	2448.3287	2465.9111	---	---
	Ant1	2457	17.622	2448.2088	2465.8312	---	---
	Ant2	2457	17.263	2448.4086	2465.6713	---	---
	Ant0	2462	17.582	2453.3287	2470.9111	---	---
	Ant1	2462	17.622	2453.2088	2470.8312	---	---
	Ant2	2462	17.263	2453.4086	2470.6713	---	---
11AX20MIMO	Ant0	2412	19.221	2402.3696	2421.5904	---	---
	Ant1	2412	19.301	2402.4096	2421.7103	---	---
	Ant2	2412	19.261	2402.4096	2421.6703	---	---
	Ant0	2417	19.181	2407.4096	2426.5904	---	---
	Ant1	2417	19.341	2407.3696	2426.7103	---	---



	Ant2	2417	19.301	2407.3696	2426.6703	---	---
	Ant0	2422	19.261	2412.3696	2431.6304	---	---
	Ant1	2422	19.301	2412.3696	2431.6703	---	---
	Ant2	2422	19.301	2412.3696	2431.6703	---	---
	Ant0	2427	19.221	2417.3696	2436.5904	---	---
	Ant1	2427	19.341	2417.3696	2436.7103	---	---
	Ant2	2427	19.421	2417.3297	2436.7502	---	---
	Ant0	2432	19.301	2422.3297	2441.6304	---	---
	Ant1	2432	19.461	2422.3297	2441.7902	---	---
	Ant2	2432	19.381	2422.3297	2441.7103	---	---
	Ant0	2437	19.261	2427.3696	2446.6304	---	---
	Ant1	2437	19.341	2427.3696	2446.7103	---	---
	Ant2	2437	19.5	2427.2897	2446.7902	---	---
	Ant0	2442	19.341	2432.3297	2451.6703	---	---
	Ant1	2442	19.381	2432.3696	2451.7502	---	---
	Ant2	2442	19.54	2432.2498	2451.7902	---	---
	Ant0	2447	19.261	2437.3696	2456.6304	---	---
	Ant1	2447	19.301	2437.3696	2456.6703	---	---
	Ant2	2447	19.381	2437.3696	2456.7502	---	---
	Ant0	2452	19.261	2442.3696	2461.6304	---	---
	Ant1	2452	19.341	2442.3696	2461.7103	---	---
	Ant2	2452	19.381	2442.3696	2461.7502	---	---
	Ant0	2457	19.221	2447.4096	2466.6304	---	---
	Ant1	2457	19.301	2447.4096	2466.7103	---	---
	Ant2	2457	19.341	2447.4096	2466.7502	---	---
	Ant0	2462	19.181	2452.4096	2471.5904	---	---
	Ant1	2462	19.261	2452.4096	2471.6703	---	---
	Ant2	2462	19.261	2452.4096	2471.6703	---	---
11AX40MIMO	Ant0	2422	37.642	2403.1389	2440.7812	---	---
	Ant1	2422	37.642	2403.1389	2440.7812	---	---
	Ant2	2422	37.562	2403.2188	2440.7812	---	---
	Ant0	2437	37.722	2418.1389	2455.8611	---	---
	Ant1	2437	37.562	2418.2188	2455.7812	---	---
	Ant2	2437	37.642	2418.1389	2455.7812	---	---
	Ant0	2452	37.642	2433.2188	2470.8611	---	---
	Ant1	2452	37.642	2433.1389	2470.7812	---	---
	Ant2	2452	37.722	2433.1389	2470.8611	---	---



Test Graphs

