

FCC Radio Test Report

FCC ID: PJZ24XXY1

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1612C280
Equipment : GPON 4 Port WiFi Gateway,
GE 4 Port WiFi Gateway
Model Name : (1) ZNID-GPON-2408A1, ZNID-GPON-2408A1-XX,
ZNID-GPON-2408A1-NYY,
ZNID-GPON-2408A1-XX-NYY,
ZNID-GPON-2428A1, ZNID-GPON-2428A1-XX,
ZNID-GPON-2428A1-NYY,
ZNID-GPON-2428A1-XX-NYY
(2) ZNID-GE-2408A1, ZNID-GE-2408A1-XX,
ZNID-GE-2408A1-NYY, ZNID-GE-2408A1-XX-NYY,
ZNID-GE-2428A1, ZNID-GE-2428A1-XX,
ZNID-GE-2428A1-NYY, ZNID-GE-2428A1-XX-NYY
Applicant : DASAN Zhone Solutions, Inc.
Address : 7195 Oakport Street Oakland, CA 94621 USA

Date of Receipt : Dec. 28, 2016
Date of Test : Dec. 28, 2016 ~ Apr. 19, 2017
Issued Date : Apr. 20, 2017
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)
Technical Manager : David Mao
(David Mao)
Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents

Page

1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	14
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
3.5 DESCRIPTION OF SUPPORT UNITS	16
4 . EMC EMISSION TEST	17
4.1 CONDUCTED EMISSION MEASUREMENT	17
4.1.1 POWER LINE CONDUCTED EMISSION	17
4.1.2 TEST PROCEDURE	17
4.1.3 DEVIATION FROM TEST STANDARD	17
4.1.4 TEST SETUP	18
4.1.5 EUT OPERATING CONDITIONS	18
4.1.6 EUT TEST CONDITIONS	18
4.1.7 TEST RESULTS	18
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 RADIATED EMISSION LIMITS	19
4.2.2 TEST PROCEDURE	20
4.2.3 DEVIATION FROM TEST STANDARD	20
4.2.4 TEST SETUP	20
4.2.5 EUT OPERATING CONDITIONS	21
4.2.6 EUT TEST CONDITIONS	21
4.2.7 TEST RESULTS (9K TO 30MHz)	22
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	22
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	22
5 . 26dB SPECTRUM BANDWIDTH	23
5.1 APPLIED PROCEDURES / LIMIT	23
5.1.1 TEST PROCEDURE	23
5.1.2 DEVIATION FROM STANDARD	23
5.1.3 TEST SETUP	23
5.1.4 EUT OPERATION CONDITIONS	23
5.1.5 EUT TEST CONDITIONS	24
5.1.6 TEST RESULTS	24
6 . MAXIMUM CONDUCTED OUTPUT POWER	25


Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	25
6.1.1 TEST PROCEDURE	25
6.1.2 DEVIATION FROM STANDARD	26
6.1.3 TEST SETUP	26
6.1.4 EUT OPERATION CONDITIONS	26
6.1.5 EUT TEST CONDITIONS	26
6.1.6 TEST RESULTS	26
7 . POWER SPECTRAL DENSITY TEST	27
7.1 APPLIED PROCEDURES / LIMIT	27
8.1.1 TEST PROCEDURE	27
7.1.1 DEVIATION FROM STANDARD	28
7.1.2 TEST SETUP	28
7.1.3 EUT OPERATION CONDITIONS	28
7.1.4 EUT TEST CONDITIONS	28
7.1.5 TEST RESULTS	28
8 . FREQUENCY STABILITY MEASUREMENT	29
8.1 APPLIED PROCEDURES / LIMIT	29
8.1.1 TEST PROCEDURE	29
8.1.2 DEVIATION FROM STANDARD	29
8.1.3 TEST SETUP	30
8.1.4 EUT OPERATION CONDITIONS	30
8.1.5 EUT TEST CONDITIONS	30
8.1.6 TEST RESULTS	30
9 . MEASUREMENT INSTRUMENTS LIST	31
10 . EUT TEST PHOTOS	33
ATTACHMENT A - CONDUCTED EMISSION	37
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	42
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	51
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	76
ATTACHMENT E - BANDWIDTH	195
ATTACHMENT F - MAXIMUM OUTPUT POWER	236
ATTACHMENT H - POWER SPECTRAL DENSITY	259
ATTACHMENT H - FREQUENCY STABILITY	392

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1612C280	Original Issue.	Apr. 20, 2017

1. CERTIFICATION

Equipment : GPON 4 Port WiFi Gateway, GE 4 Port WiFi Gateway

Brand Name : 
DASAN Zhone Solutions

Model Name : (1) ZNID-GPON-2408A1, ZNID-GPON-2408A1-XX,
ZNID-GPON-2408A1-NYY, ZNID-GPON-2408A1-XX-NYY,
ZNID-GPON-2428A1, ZNID-GPON-2428A1-XX, ZNID-GPON-2428A1-NYY,
ZNID-GPON-2428A1-XX-NYY

(2) ZNID-GE-2408A1, ZNID-GE-2408A1-XX, ZNID-GE-2408A1-NYY,
ZNID-GE-2408A1-XX-NYY, ZNID-GE-2428A1, ZNID-GE-2428A1-XX,
ZNID-GE-2428A1-NYY, ZNID-GE-2428A1-XX-NYY

Applicant : DASAN Zhone Solutions, Inc.

Manufacturer: DASAN Zhone Solutions, Inc.

Address : 7195 Oakport Street Oakland, CA 94621 USA

Date of Test : Dec. 28, 2016 ~ Apr. 19, 2017

Test Sample : Engineering Sample

Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1612C280) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
 BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	1.94

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz~30MHz	V	3.79
		9kHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.60
		200MHz ~ 1,000MHz	V	3.86
		200MHz ~ 1,000MHz	H	3.94
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	GPON 4 Port WiFi Gateway, GE 4 Port WiFi Gateway	
Brand Name		
Model Name	(1) ZNID-GPON-2408A1, ZNID-GPON-2408A1-XX, ZNID-GPON-2408A1-NYY, ZNID-GPON-2408A1-XX-NYY, ZNID-GPON-2428A1, ZNID-GPON-2428A1-XX, ZNID-GPON-2428A1-NYY, ZNID-GPON-2428A1-XX-NYY (2) ZNID-GE-2408A1, ZNID-GE-2408A1-XX, ZNID-GE-2408A1-NYY, ZNID-GE-2408A1-XX-NYY, ZNID-GE-2428A1, ZNID-GE-2428A1-XX, ZNID-GE-2428A1-NYY, ZNID-GE-2428A1-XX-NYY	
Mode Different	"XX"= NA, EU, UK, SG, blank, which indicates the power adapter plug type, For the optional "NYY" used only in Customer-specific configurations, "N" identifies the Revision number of the configuration from 0 to 9 or blank, and "YY" specifies the customer using a unique two letter identifier from A to Z or blank, please refer to note 3 for other different.	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	1300Mbps
	Output Power (Max.)for UNII-1	802.11a: 26.59dBm 802.11n (20M): 26.90dBm 802.11n (40M): 26.47dBm 802.11ac (20M): 26.62dBm 802.11ac (40M): 26.69dBm 802.11ac (80M): 23.15dBm
	Output Power (Max.)for UNII-3	802.11a: 24.81dBm 802.11n (20M): 26.89dBm 802.11n (40M): 26.56dBm 802.11ac (20M): 26.75dBm 802.11ac (40M): 26.71dBm 802.11ac (80M): 26.14dBm
	Output Power (Max.)for UNII-1 with Beamforming	802.11n (20M): 27.03dBm 802.11n (40M): 26.99dBm 802.11ac (20M): 25.24dBm 802.11ac (40M): 26.70dBm 802.11ac (80M): 26.74dBm
Output Power (Max.)for UNII-3 with Beamforming	802.11n (20M): 27.03dBm 802.11n (40M): 27.00dBm 802.11ac (20M): 26.93dBm 802.11ac (40M): 26.69dBm 802.11ac (80M): 26.78dBm	
Power Source	Supplied from adapter. Model: SOY-1200200US Model: S24B72-120A200-C4	
Power Rating	DC 12V 2A	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- Channel List:

UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	IPEX	4
2	N/A	N/A	PCB	IPEX	4
3	N/A	N/A	PCB	IPEX	4

Note:

(1) **Without Beamforming:**

This EUT supports MIMO 3X3, any transmit signals are correlated with each other, so Directional gain = $G_{ANT} + 10\log(N)$ dBi, that is Directional gain = $4 + 10\log(3)$ dBi = 8.77; So, the UNII-1, UNII-3 output power limit is $30 - 8.77 + 6 = 27.23$. The UNII-1 power density limit is $17 - 8.77 + 6 = 14.23$, the UNII-3 power density limit is $30 - 8.77 + 6 = 27.23$.

(2) **With Beamforming:**

This EUT supports MIMO 3X3, any transmit signals are correlated with each other, so Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{SS})$ dBi, The $N_{SS} = 1$, that is Directional gain = $4 + 10\log(3/1)$ dBi = 8.77; So, the UNII-1, UNII-3 output power limit is $30 - 8.77 + 6 = 27.23$. The UNII-1 power density limit is $17 - 8.77 + 6 = 14.23$, the UNII-3 power density limit is $30 - 8.77 + 6 = 27.23$.

When Directional antenna gain is larger than 6dBi, for every 1 dBi increase in gain, the power limit and power density limit is reduced by 1 dBm.

(3) ANT 1 for 1TX was found to be the worst case and recorded.

4.

Operating Mode TX Mode	1TX	3TX
802.11a	V (ANT 1)	-
802.11n (20MHz)	-	V (ANT+1 ANT 2+ANT 3)
802.11n (40MHz)	-	V (ANT+1 ANT 2+ANT 3)
802.11ac (20MHz)	-	V (ANT+1 ANT 2+ANT 3)
802.11ac (40MHz)	-	V (ANT+1 ANT 2+ANT 3)
802.11ac (80MHz)	-	V (ANT+1 ANT 2+ANT 3)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 8	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 10	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 12	TX AC80 Mode / CH155 (UNII-3)
Mode 13	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 13	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 8	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 10	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 12	TX AC80 Mode / CH155 (UNII-3)

Note:

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

UNII-1			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5180	5200	5240
A Mode	96	96	96
N20 Mode	79	82	82
Frequency (MHz)	5190	5230	
N40 Mode	70	83	

UNII-3			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5745	5785	5825
A Mode	96	96	96
N20 Mode	90	86	87
Frequency (MHz)	5755	5795	
N40 Mode	84	84	

UNII-1			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5180	5200	5240
AC20 Mode	78	84	84
Frequency (MHz)	5190	5230	
AC40 Mode	86	86	
Frequency (MHz)	5210		
AC80 Mode	65		

UNII-3			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5745	5785	5825
AC20 Mode	89	89	87
Frequency (MHz)	5755	5795	
AC40 Mode	92	92	
Frequency (MHz)	5775		
AC80 Mode	80		


UNII-1 – With Beamforming			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5180	5200	5240
N20 Mode	80	80	79
Frequency (MHz)	5190	5230	
N40 Mode	83	83	

UNII-3 – With Beamforming			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5745	5785	5825
N20 Mode	84	84	84
Frequency (MHz)	5755	5795	
N40 Mode	89	89	

UNII-1 – With Beamforming			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5180	5200	5240
AC20 Mode	76	75	73
Frequency (MHz)	5190	5230	
AC40 Mode	84	84	
Frequency (MHz)	5210		
AC80 Mode	84		

UNII-3 – With Beamforming			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5745	5785	5825
AC20 Mode	84	84	84
Frequency (MHz)	5755	5795	
AC40 Mode	90	90	
Frequency (MHz)	5775		
AC80 Mode	90		

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

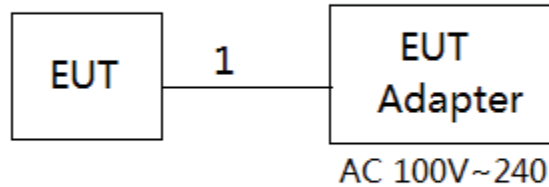

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	AC Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

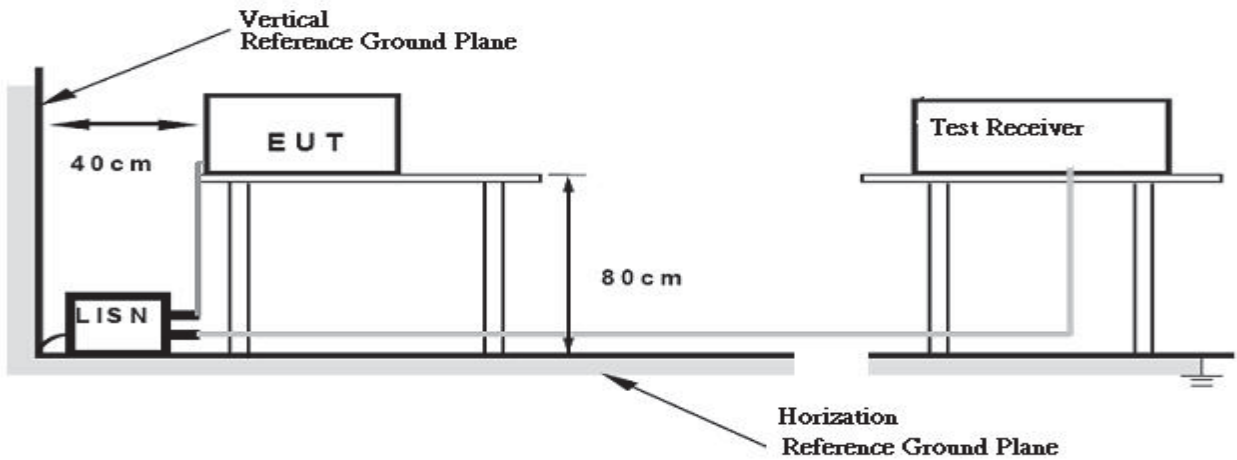

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to

field strength: $E = \frac{1000000\sqrt{30P}}{3}$ μV/m, where P is the eirp (Watts)

2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A)Radiated Emission Test Set-Up Frequency Below 1GHz

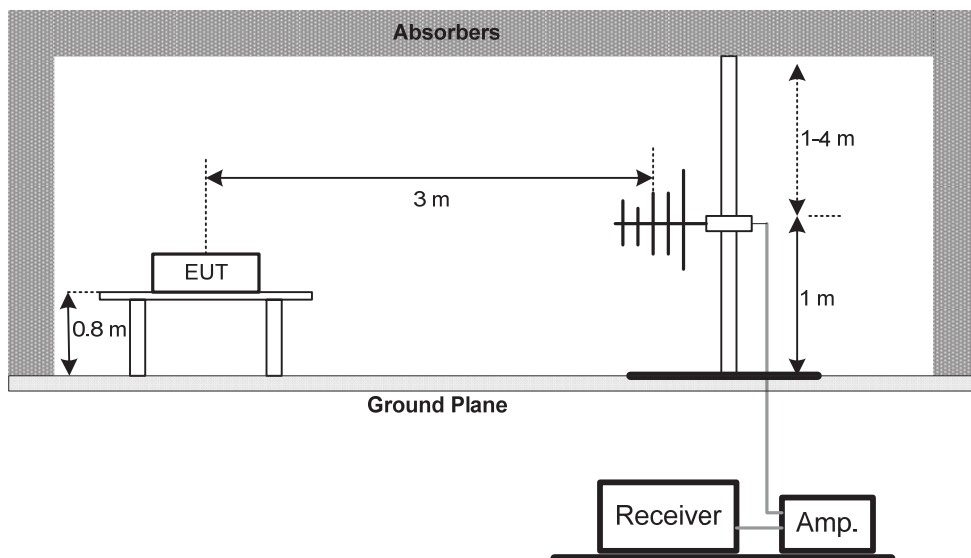

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

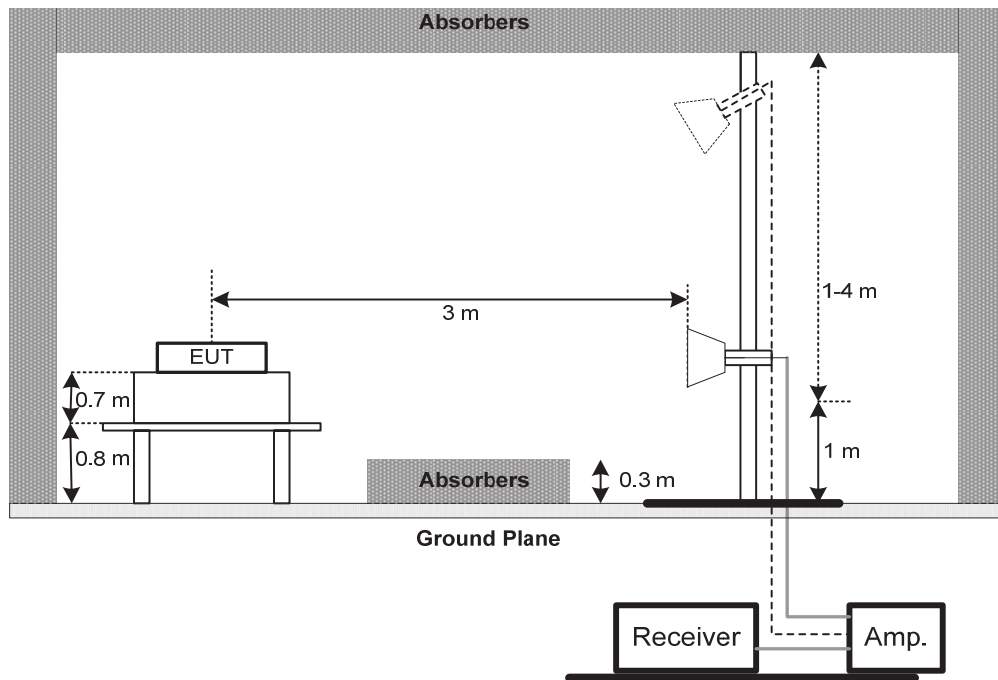

(C) Radiated emissions below 30MHz

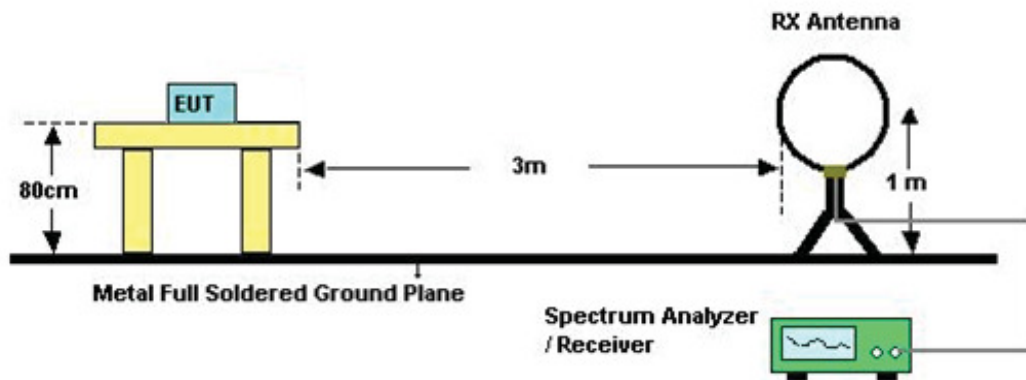

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log$ (specific distance / test distance) (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	26 dB Bandwidth	5150-5250	PASS
	Minimum 500kHz 6dB Bandwidth	5725-5850	PASS

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.


Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	300 kHz(Bandwidth 20MHz) 1MHz(Bandwidth 40MHz and 80MHz)
VBW	1MHz(Bandwidth 20MHz) 3MHz(Bandwidth 40MHz and 80MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

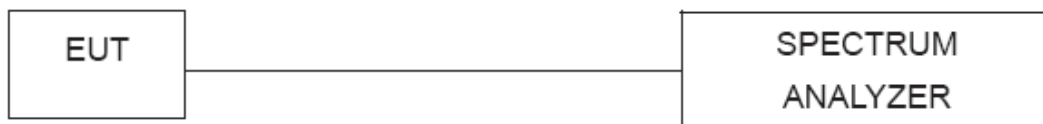

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Conducted Output Power	Fixed:1 Watt (30dBm) Mobile and portable: 250mW (24dBm)	5150-5250	PASS
	1 Watt (30dBm)	5725-5850	PASS
Note: The maximum e.i.r.p at anyelevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)			

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	≥ 3MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto

c. Test was performed in accordance with method of KDB 789033 D02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. POWER SPECTRAL DENSITY TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250	PASS
	30dBm/500kHz	5725-5850	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	≥ 3MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01r02, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
- The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is -3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

7.1.1 DEVIATION FROM STANDARD

No deviation.

7.1.2 TEST SETUP



7.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.4 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

7.1.5 TEST RESULTS

Please refer to the Attachment H.

8. FREQUENCY STABILITY MEASUREMENT

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E		
Test Item	Frequency Range (MHz)	Result
Frequency Stability	5150-5250	PASS
	5725-5850	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto


c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

d. User manual temperature is 0°C~40°C.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

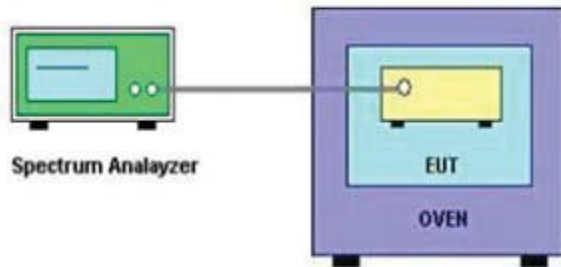

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment I.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 26, 2018
2	LISN	R&S	ENV216	101447	Mar. 26, 2018
3	Test Cable	emci	RG223(9KHz-30 MHz)	C_17	Mar. 09, 2018
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 26, 2018
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Feb. 22, 2018
3	Receiver	AGILENT	N9038A	MY52130039	Jun. 23, 2017
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 26, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 26, 2018
8	Amplifier	Agilent	8449B	3008A02274	Feb. 22, 2018
9	Receiver	AGILENT	N9038A	MY52130039	Jun. 23, 2017
10	Test Cable	emci	EMC104-SM-S M-10000(1GHz-26.5GHz)	C-68	Jun. 26, 2017
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
13	Microwave Pre-amplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 06, 2017
15	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Spectrum Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Maximum Conducted Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Sep. 04, 2017
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Sep. 04, 2017

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017
2	Precision Oven Tester	HOLINK	H-T-1F-D	BA03101701	May 22, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

10. EUT TEST PHOTOS

Conducted Measurement Photos



Radiated Measurement Photos

9kHz to 30MHz



Radiated Measurement Photos

30MHz to 1000MHz



Radiated Measurement Photos


Above 1000MHz



ATTACHMENT A - CONDUCTED EMISSION

Test Mode : TX Mode (Adapter: SOY-1200200US)


Line

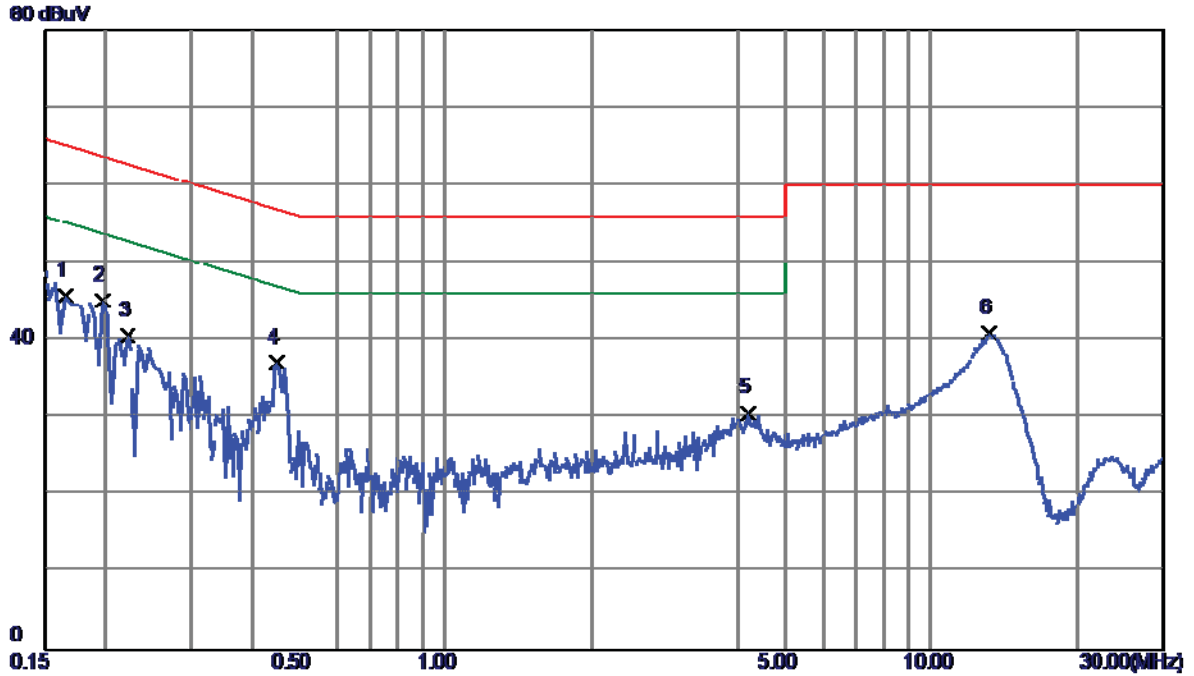

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1660	36.18	9.57	45.75	65.16	-19.41	Peak	
2 *	0.1980	35.52	9.57	45.09	63.69	-18.60	Peak	
3	0.2220	31.13	9.57	40.70	62.74	-22.04	Peak	
4	0.4500	27.45	9.64	37.09	56.88	-19.79	Peak	
5	4.2020	20.28	10.36	30.64	56.00	-25.36	Peak	
6	13.1300	30.30	10.62	40.92	60.00	-19.08	Peak	

Test Mode : TX Mode (Adapter: SOY-1200200US)


Neutral

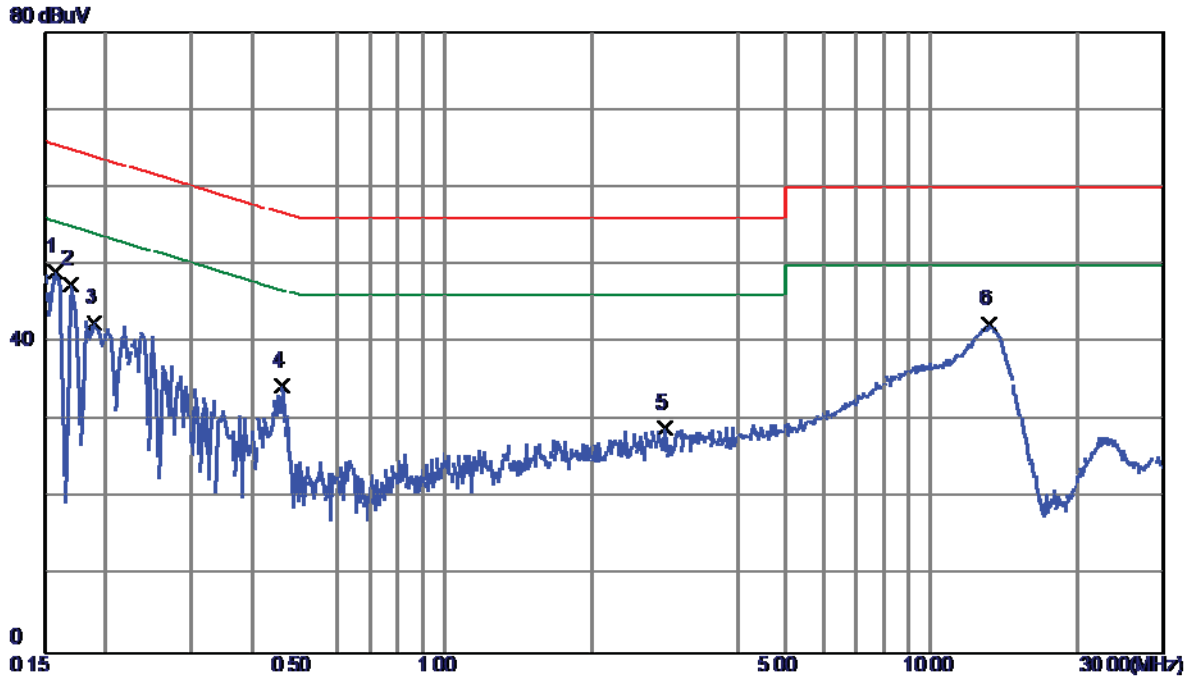

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1580	39.65	9.53	49.18	65.57	-16.39	Peak	
2	0.1700	38.12	9.47	47.59	64.96	-17.37	Peak	
3	0.1900	33.09	9.54	42.63	64.04	-21.41	Peak	
4	0.4620	24.95	9.49	34.44	56.66	-22.22	Peak	
5	2.8300	19.01	9.95	28.96	56.00	-27.04	Peak	
6	13.1900	31.67	10.66	42.33	60.00	-17.67	Peak	

Test Mode : TX Mode (Adapter: S24B72-120A200-C4)


Line

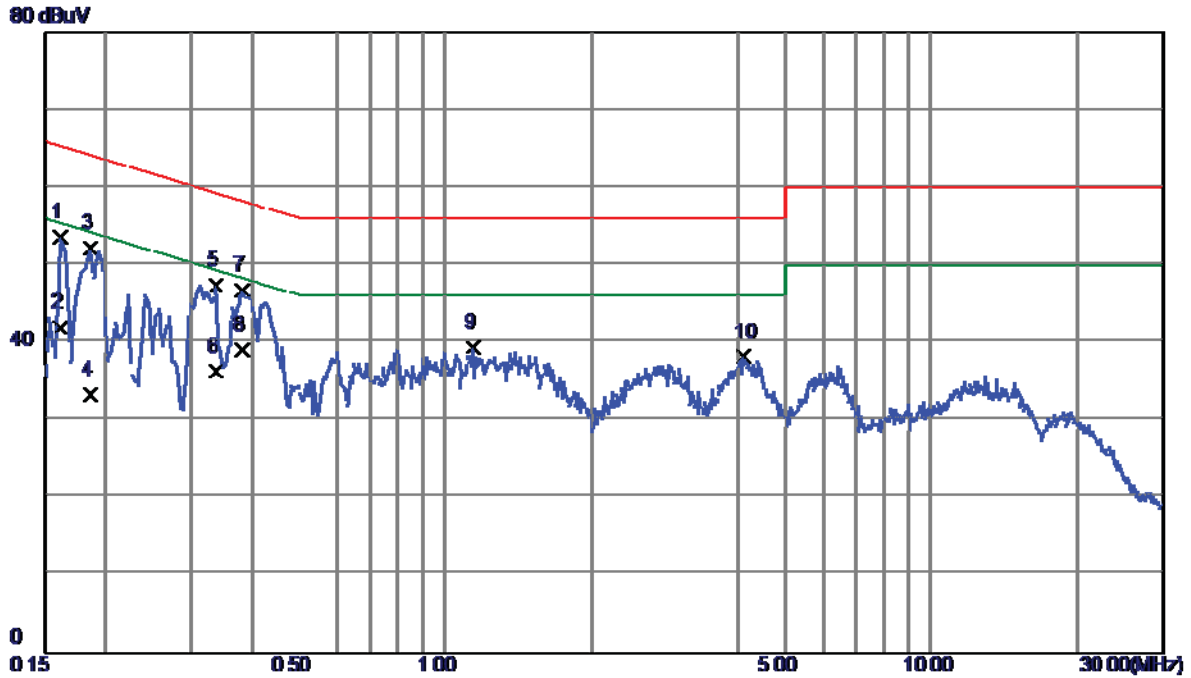

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1620	43.98	9.57	53.55	65.36	-11.81	Peak	
2	0.1620	32.32	9.57	41.89	55.36	-13.47	AVG	
3	0.1860	42.66	9.57	52.23	64.21	-11.98	Peak	
4	0.1860	23.65	9.57	33.22	54.21	-20.99	AVG	
5	0.3379	37.85	9.58	47.43	59.25	-11.82	Peak	
6	0.3379	26.66	9.58	36.24	49.25	-13.01	AVG	
7	0.3820	37.18	9.58	46.76	58.24	-11.48	Peak	
8 *	0.3820	29.45	9.58	39.03	48.24	-9.21	AVG	
9	1.1460	29.57	9.85	39.42	56.00	-16.58	Peak	
10	4.1100	27.79	10.37	38.16	56.00	-17.84	Peak	

Test Mode : TX Mode (Adapter: S24B72-120A200-C4)

Neutral

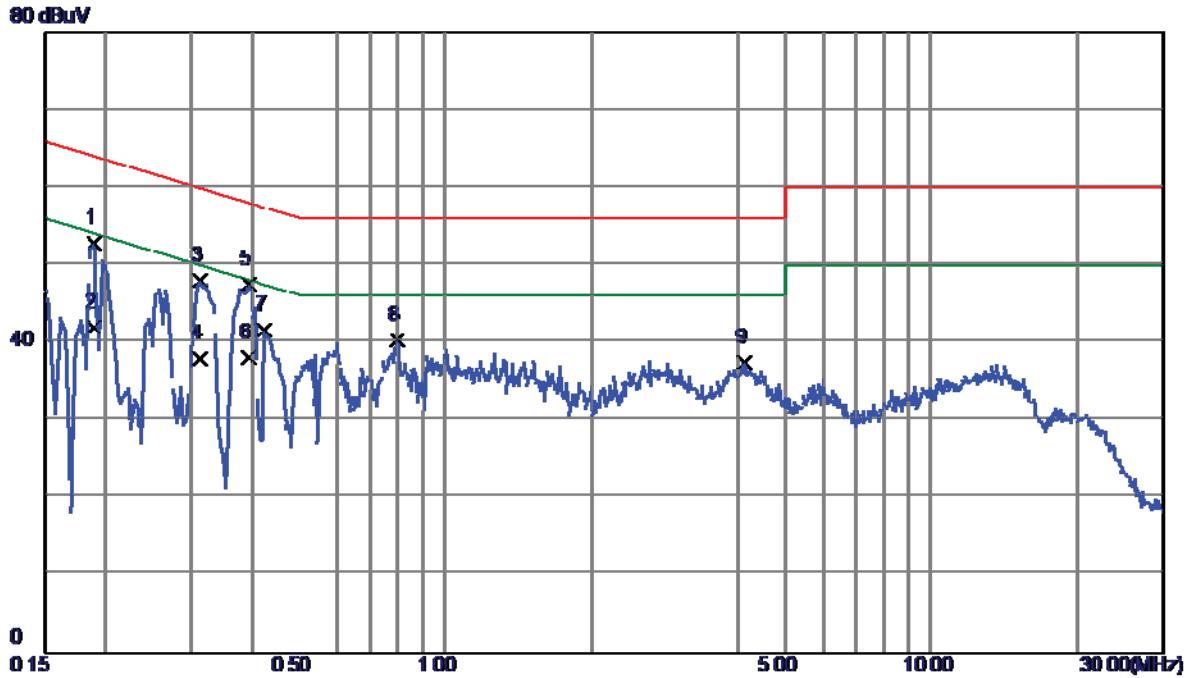


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1900	43.32	9.54	52.86	64.04	-11.18	Peak	
2	0.1900	32.33	9.54	41.87	54.04	-12.17	AVG	
3	0.3140	38.36	9.58	47.94	59.86	-11.92	Peak	
4	0.3140	28.30	9.58	37.88	49.86	-11.98	AVG	
5	0.3940	38.05	9.49	47.54	57.98	-10.44	Peak	
6 *	0.3940	28.60	9.49	38.09	47.98	-9.89	AVG	
7	0.4260	32.08	9.48	41.56	57.33	-15.77	Peak	
8	0.7980	30.76	9.62	40.38	56.00	-15.62	Peak	
9	4.1260	27.31	10.11	37.42	56.00	-18.58	Peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX B MODE CHANNEL 01 (Adapter: SOY-1200200US)


Ant 0°

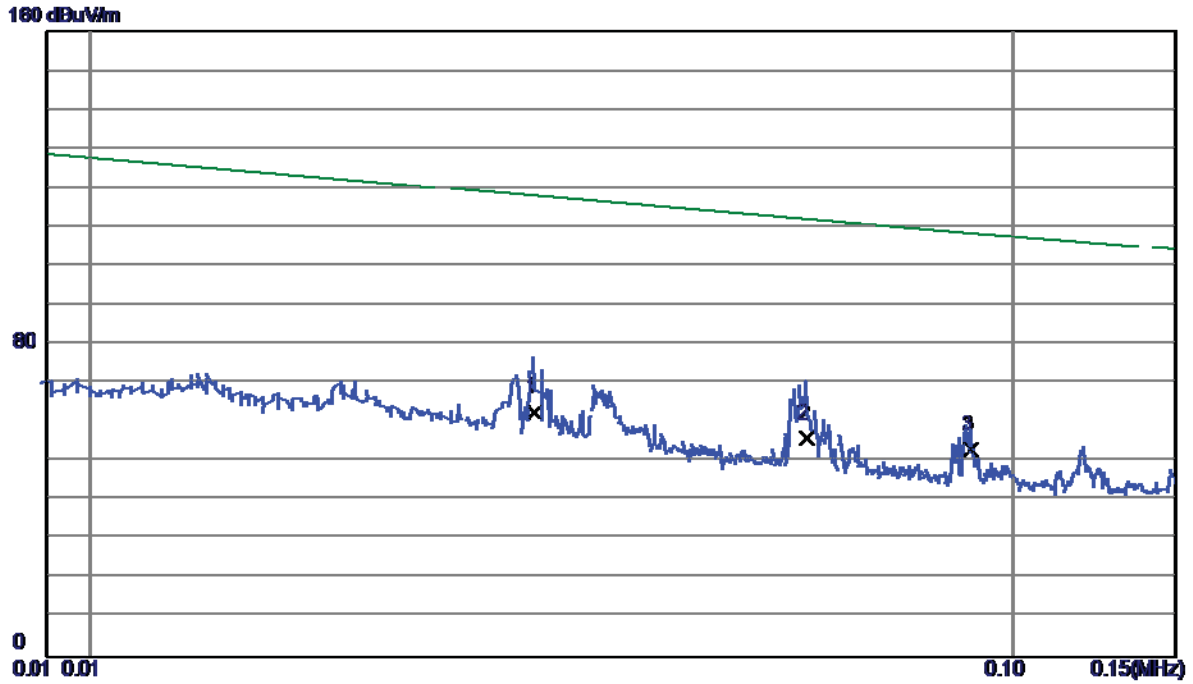

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0304	40.62	22.24	62.86	123.21	-60.35	AVG	
2	0.0598	36.16	19.71	55.87	115.95	-60.08	AVG	
3 *	0.0901	34.12	18.86	52.98	108.50	-55.52	AVG	

Test Mode: TX B MODE CHANNEL 01 (Adapter: SOY-1200200US)


Ant 0°

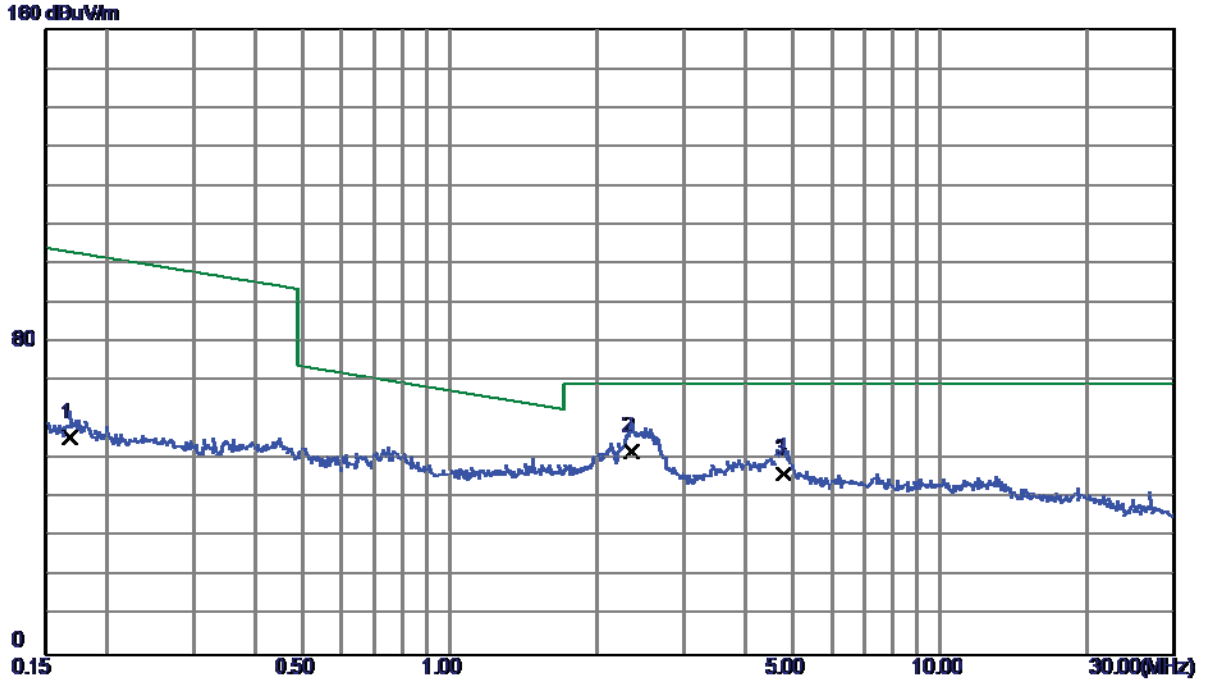

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.1675	36.81	18.72	55.53	104.82	-49.29	AVG	
2 *	2.3460	34.79	17.46	52.25	69.54	-17.29	QP	
3	4.7970	29.18	17.10	46.28	69.54	-23.26	QP	

Test Mode: TX B MODE CHANNEL 01 (Adapter: SOY-1200200US)


Ant 90°

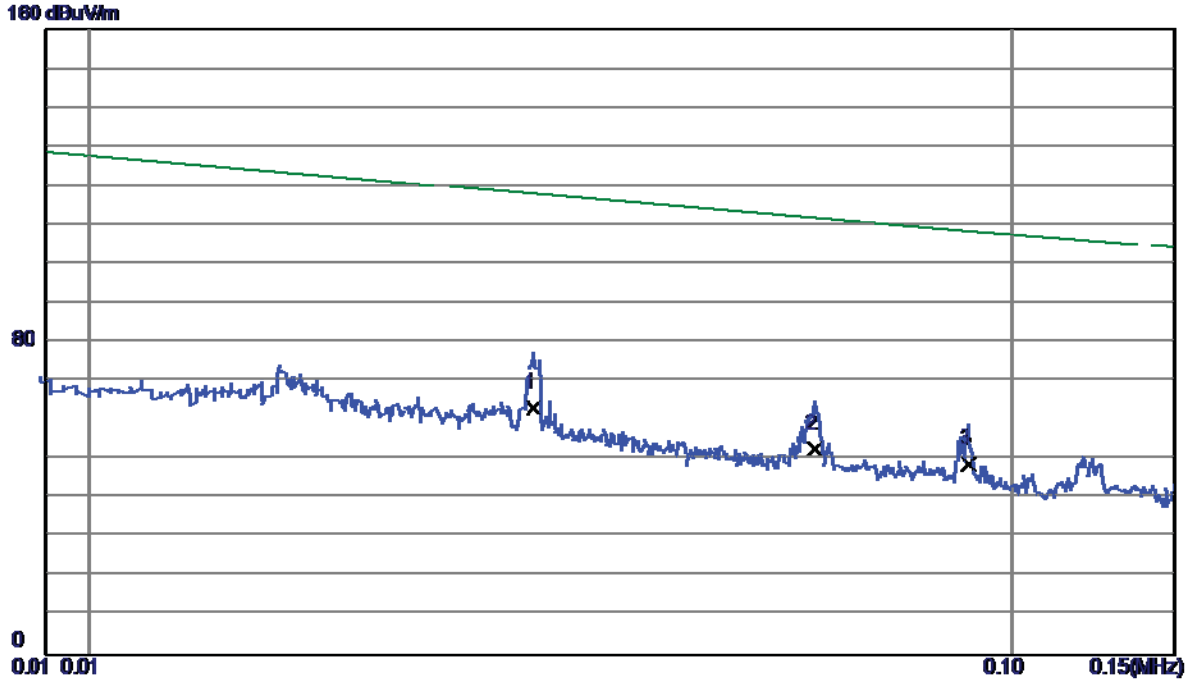

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0304	41.25	22.24	63.49	123.21	-59.72	AVG	
2	0.0611	33.25	19.69	52.94	115.63	-62.69	AVG	
3 *	0.0898	30.03	18.88	48.91	108.54	-59.63	AVG	

Test Mode: TX B MODE CHANNEL 01 (Adapter: SOY-1200200US)


Ant 90°

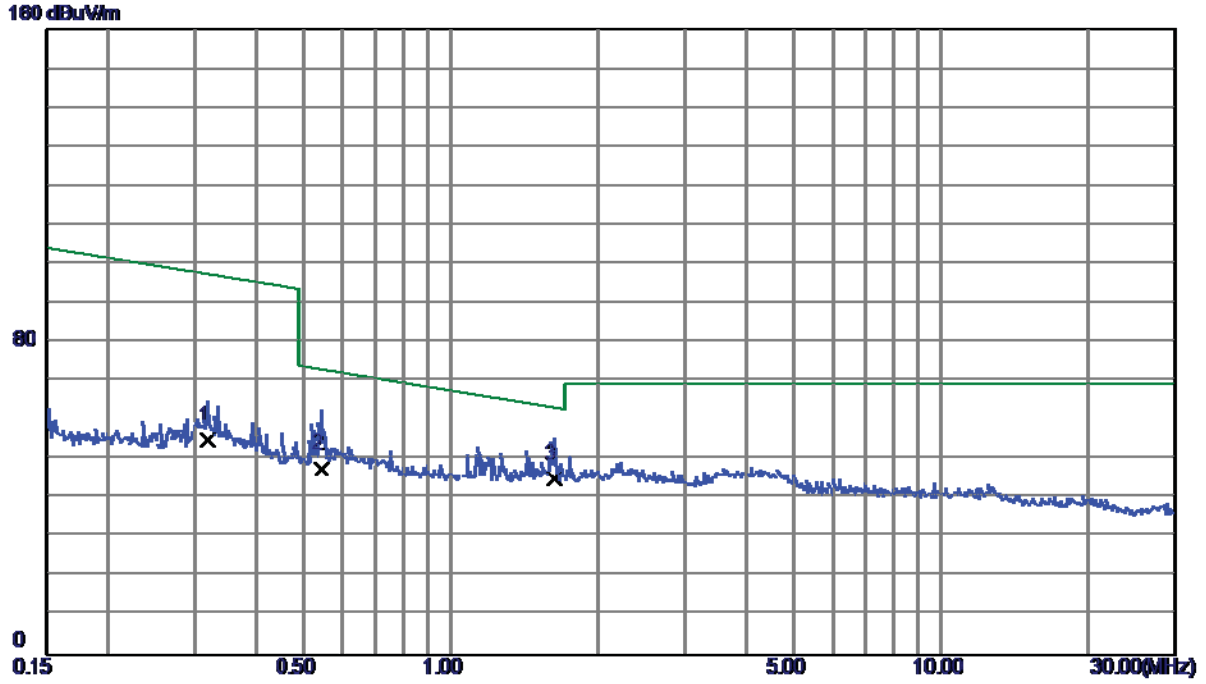

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.3183	36.32	18.57	54.89	99.66	-44.77	AVG	
2	0.5434	29.22	18.39	47.61	73.32	-25.71	QP	
3 *	1.6275	27.41	17.82	45.23	63.66	-18.43	QP	

Test Mode: TX B MODE CHANNEL 01 (Adapter: S24B72-120A200-C4)


Ant 0°

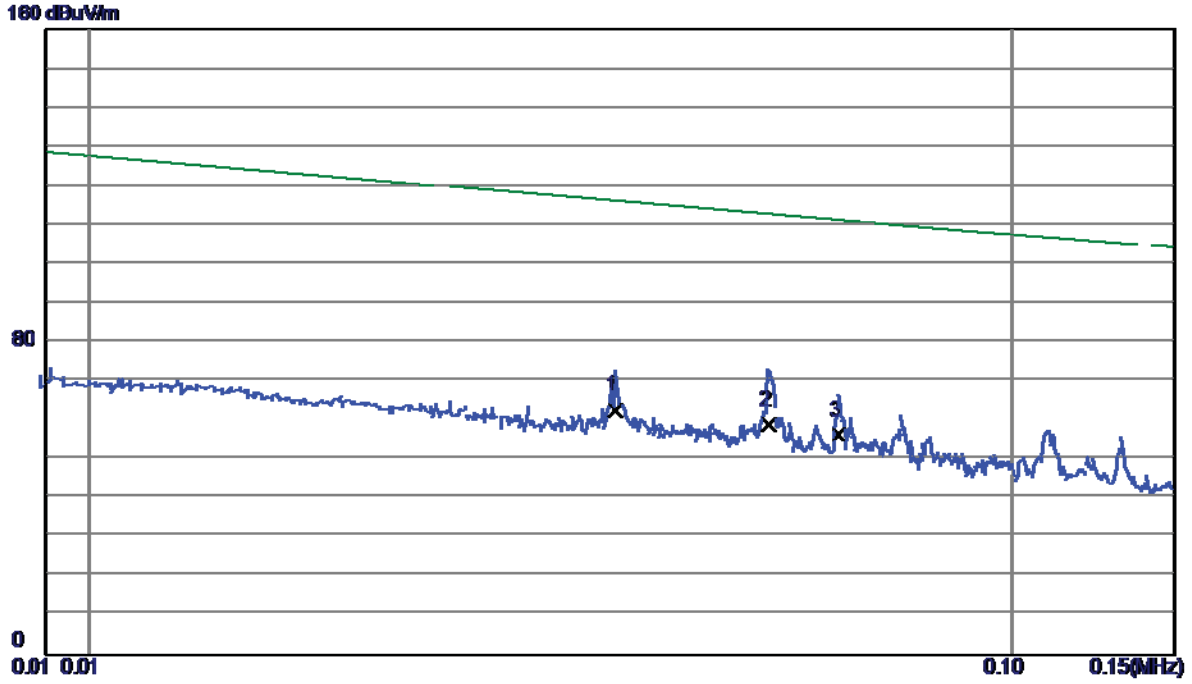

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0372	41.39	21.40	62.79	121.53	-58.74	AVG	
2	0.0544	39.03	19.77	58.80	117.29	-58.49	AVG	
3 *	0.0650	36.78	19.65	56.43	114.67	-58.24	AVG	

Test Mode: TX B MODE CHANNEL 01 (Adapter: S24B72-120A200-C4)


Ant 0°

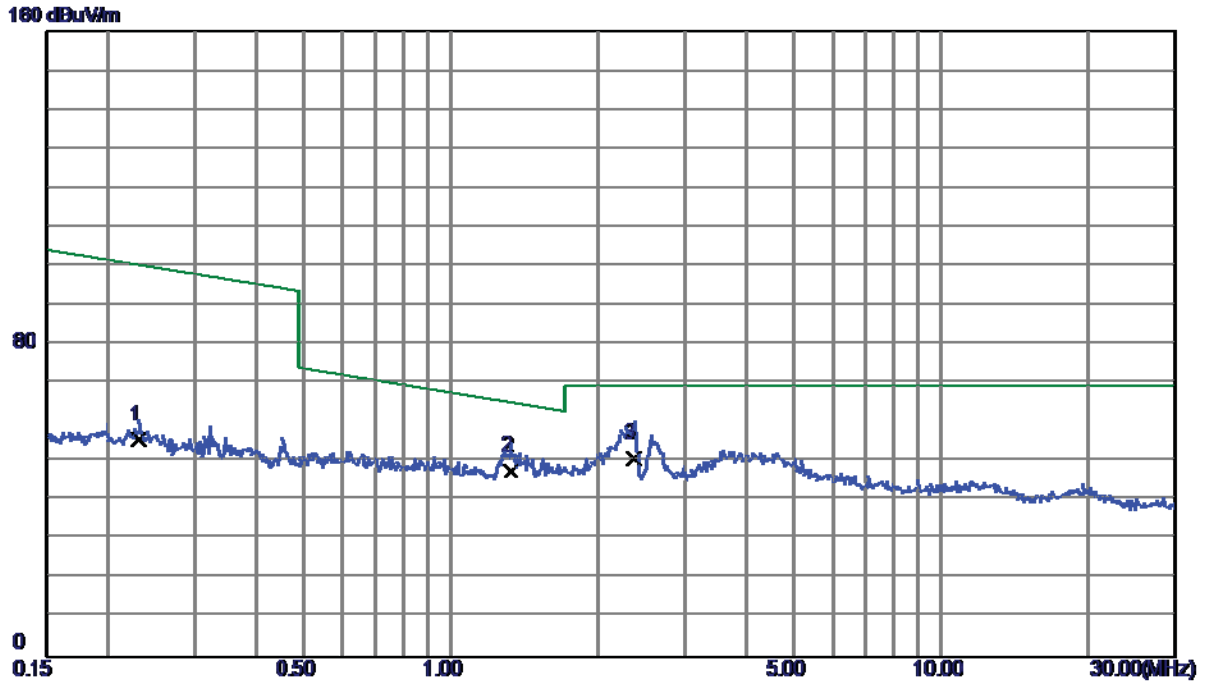

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2303	36.90	18.67	55.57	102.67	-47.10	AVG	
2 *	1.3237	29.98	17.75	47.73	66.37	-18.64	QP	
3	2.3584	33.41	17.45	50.86	69.54	-18.68	QP	

Test Mode: TX B MODE CHANNEL 01 (Adapter: S24B72-120A200-C4)


Ant 90°

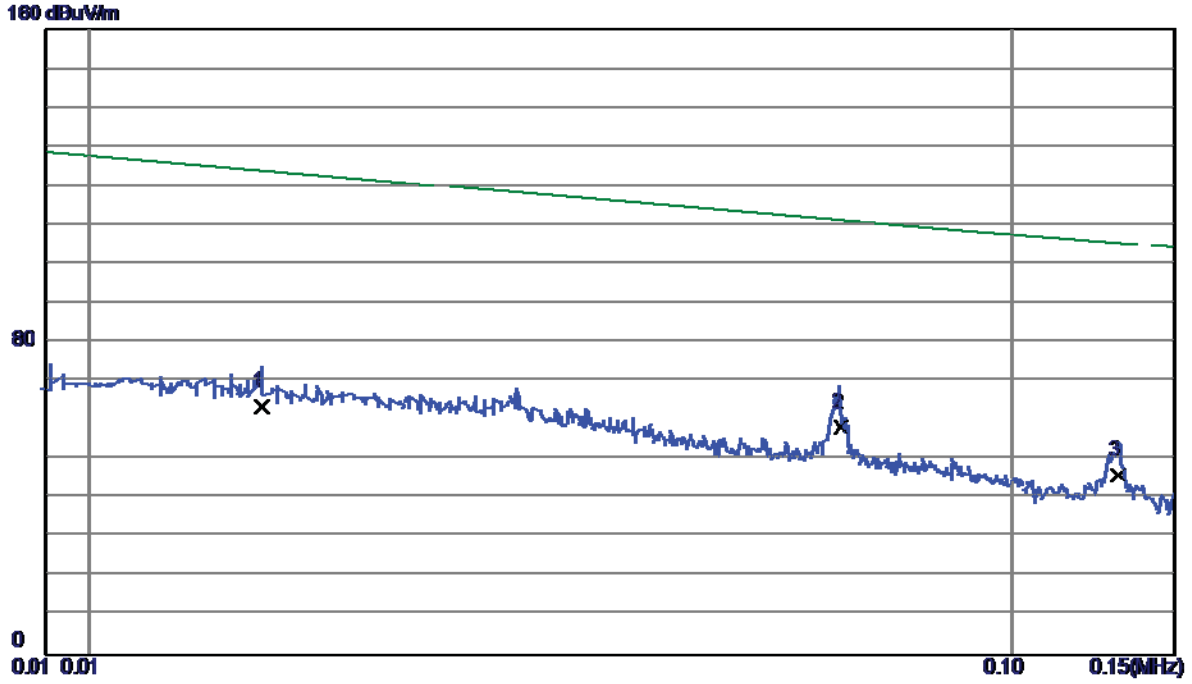

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0154	39.86	23.80	63.66	126.92	-63.26	AVG	
2 *	0.0653	38.73	19.64	58.37	114.59	-56.22	AVG	
3	0.1303	27.39	18.62	46.01	106.09	-60.08	AVG	

Test Mode: TX B MODE CHANNEL 01 (Adapter: S24B72-120A200-C4)

Ant 90°

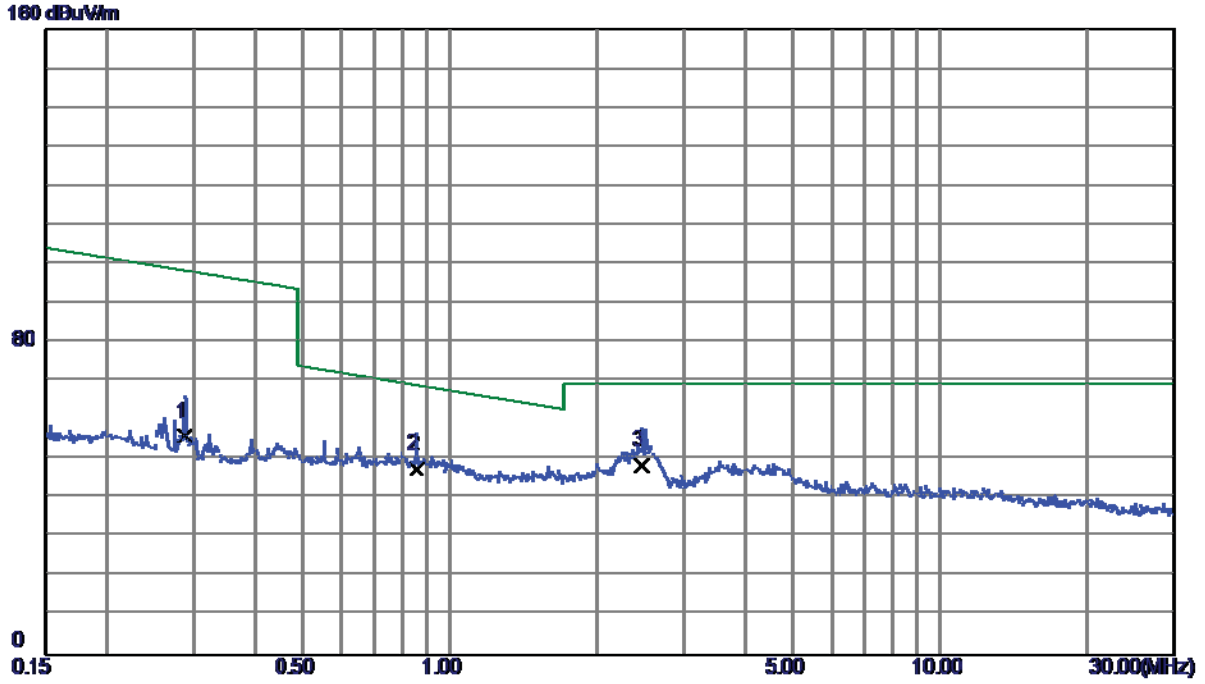


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2878	37.48	18.61	56.09	100.71	-44.62	AVG	
2	0.8572	29.52	18.13	47.65	70.53	-22.88	QP	
3 *	2.4605	31.45	17.32	48.77	69.54	-20.77	QP	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: SOY-1200200US)


Vertical

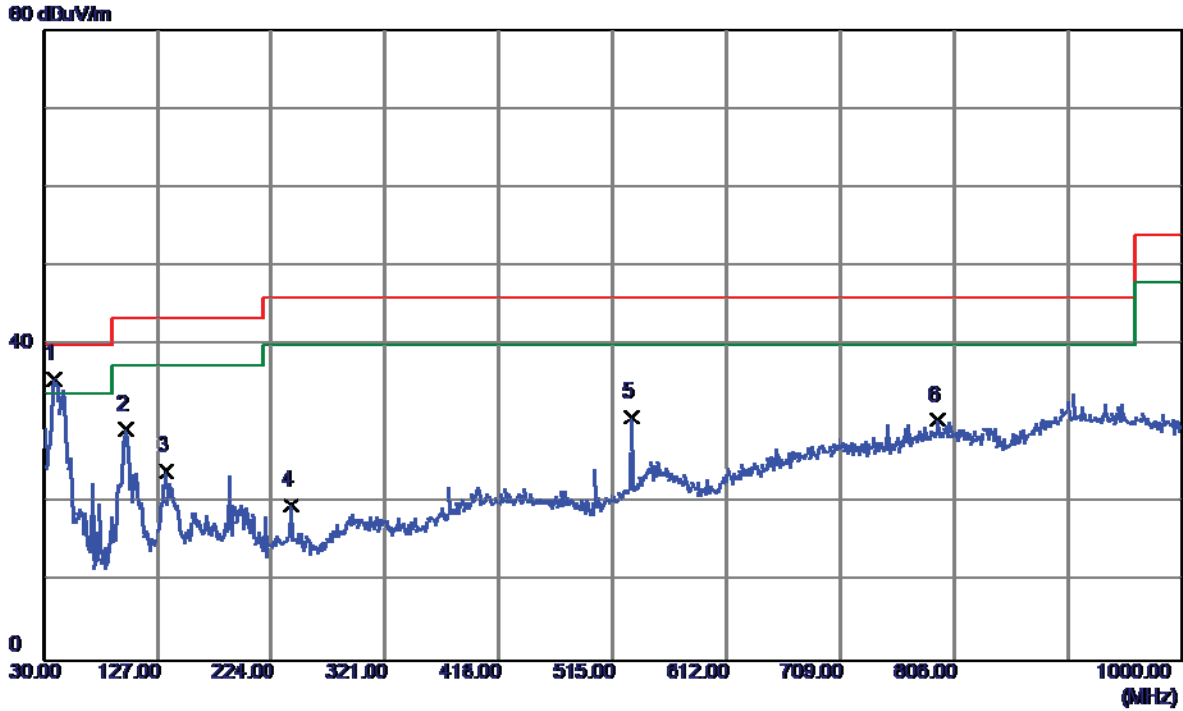

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	38.7300	49.81	-14.06	35.75	40.00	-4.25	Peak	
2	99.8399	44.82	-15.52	29.30	43.50	-14.20	Peak	
3	134.7600	36.98	-13.02	23.96	43.50	-19.54	Peak	
4	241.4600	33.50	-13.84	19.66	46.00	-26.34	Peak	
5	531.4900	37.32	-6.46	30.86	46.00	-15.14	Peak	
6	791.4500	30.60	-0.12	30.48	46.00	-15.52	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: SOY-1200200US)


Horizontal

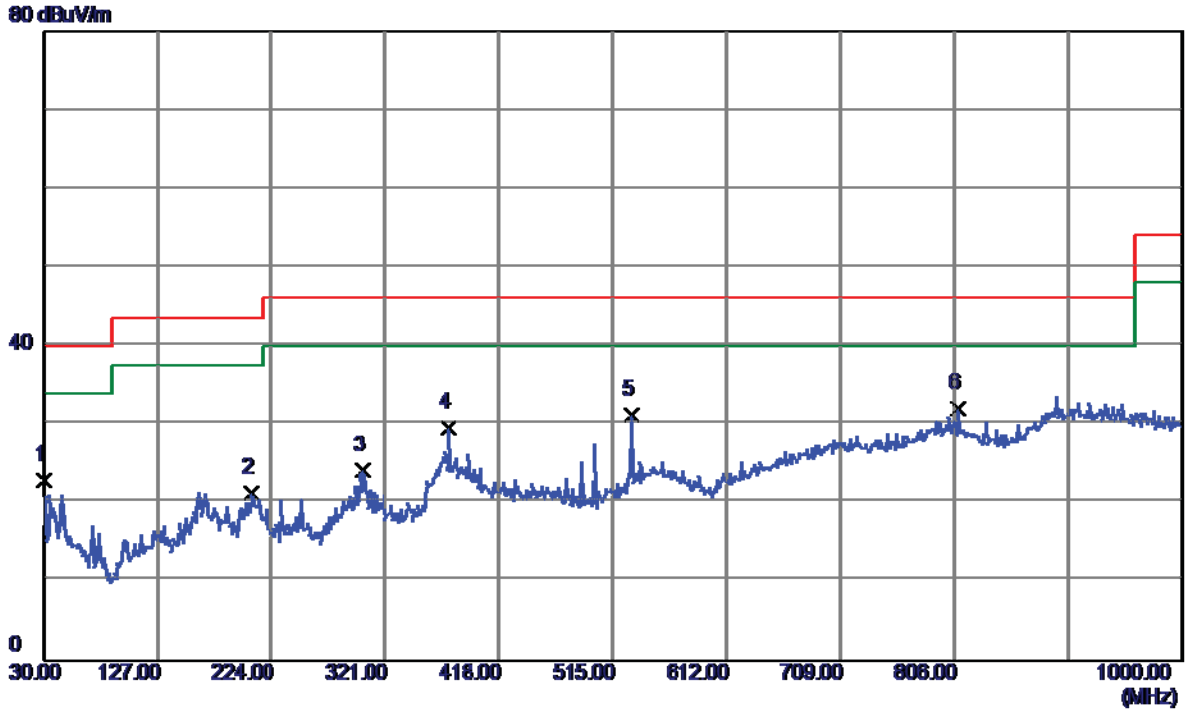

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.0000	36.89	-14.03	22.86	40.00	-17.14	Peak	
2	206.5399	35.89	-14.57	21.32	43.50	-22.18	Peak	
3	301.6000	34.38	-10.19	24.19	46.00	-21.81	Peak	
4	375.3200	39.12	-9.48	29.64	46.00	-16.36	Peak	
5	531.4900	37.65	-6.46	31.19	46.00	-14.81	Peak	
6 *	808.9099	32.00	-0.01	31.99	46.00	-14.01	Peak	

Test Mode: UNII-1/TX A Mode 5200MHz(Adapter: SOY-1200200US)


Vertical

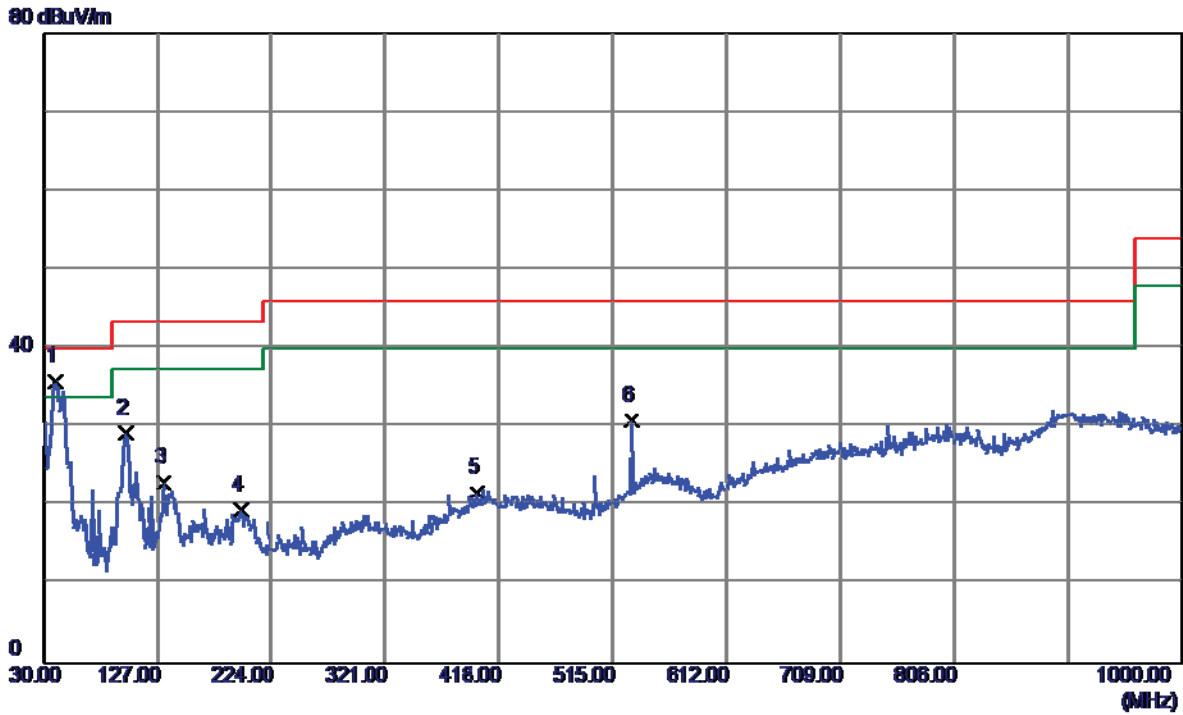

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.7000	49.83	-13.95	35.88	40.00	-4.12	Peak	
2	99.8399	44.82	-15.52	29.30	43.50	-14.20	Peak	
3	132.8200	35.84	-12.75	23.09	43.50	-20.41	Peak	
4	197.8100	33.82	-14.32	19.50	43.50	-24.00	Peak	
5	399.5700	29.54	-7.81	21.73	46.00	-24.27	Peak	
6	531.4900	37.40	-6.46	30.94	46.00	-15.06	Peak	

Test Mode: UNII-1/TX A Mode 5200MHz(Adapter: SOY-1200200US)


Horizontal

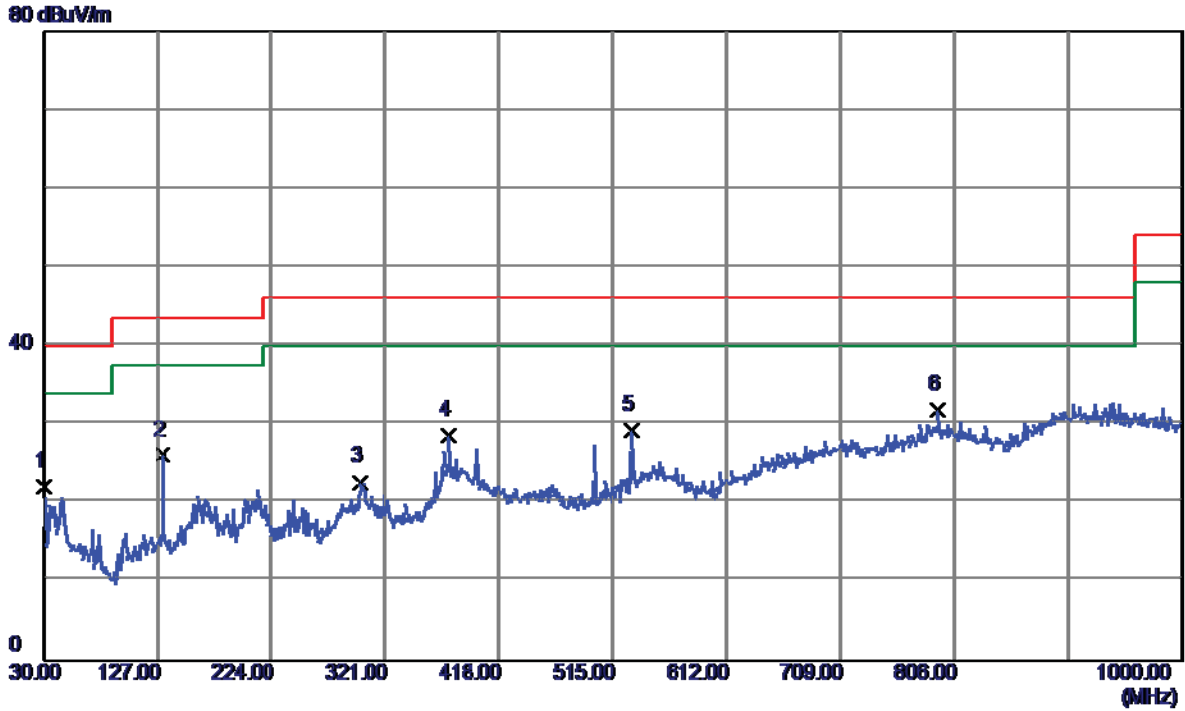

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.0000	36.05	-14.03	22.02	40.00	-17.98	Peak	
2	130.8800	38.62	-12.48	26.14	43.50	-17.36	Peak	
3	299.6600	32.84	-10.20	22.64	46.00	-23.36	Peak	
4	375.3200	38.18	-9.48	28.70	46.00	-17.30	Peak	
5	531.4900	35.79	-6.46	29.33	46.00	-16.67	Peak	
6 *	792.4200	31.86	-0.08	31.78	46.00	-14.22	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: SOY-1200200US)


Vertical

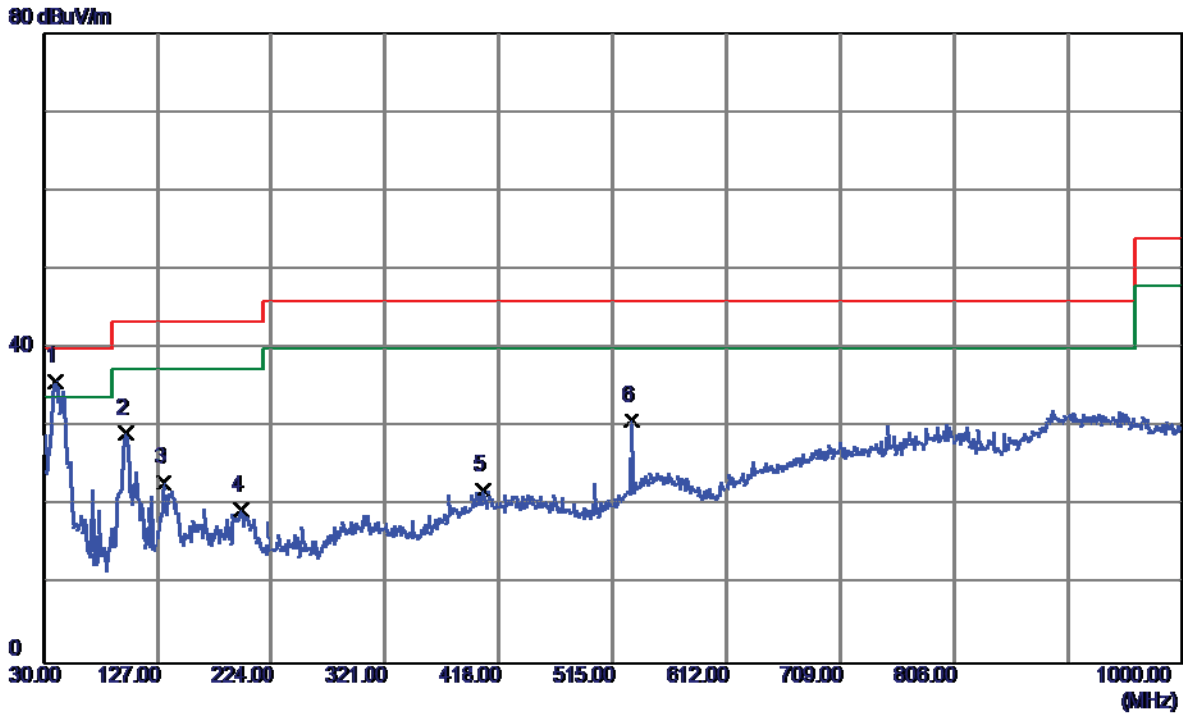

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.7000	49.75	-13.95	35.80	40.00	-4.20	Peak	
2	99.8399	44.82	-15.52	29.30	43.50	-14.20	Peak	
3	132.8200	35.84	-12.75	23.09	43.50	-20.41	Peak	
4	197.8100	33.82	-14.32	19.50	43.50	-24.00	Peak	
5	405.3900	29.95	-7.80	22.15	46.00	-23.85	Peak	
6	531.4900	37.40	-6.46	30.94	46.00	-15.06	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: SOY-1200200US)


Horizontal

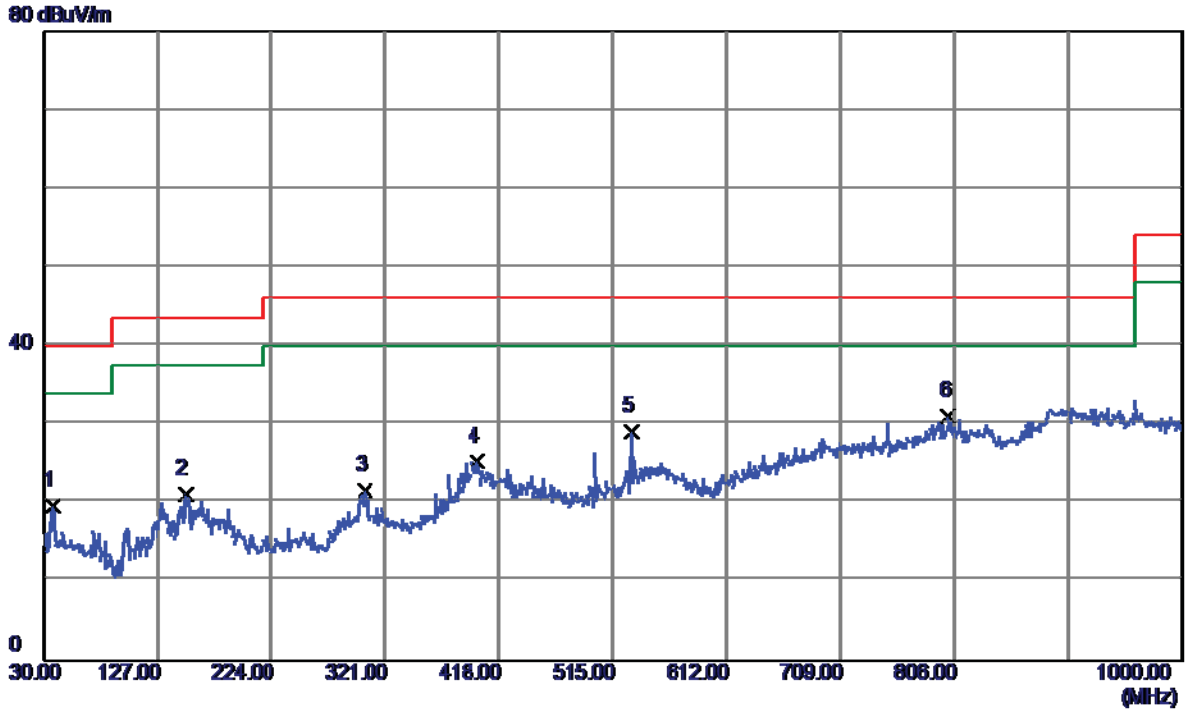

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	37.7599	33.73	-14.09	19.64	40.00	-20.36	Peak	
2	151.2500	33.96	-12.85	21.11	43.50	-22.39	Peak	
3	303.5400	31.85	-10.24	21.61	46.00	-24.39	Peak	
4	399.5700	33.03	-7.81	25.22	46.00	-20.78	Peak	
5	531.4900	35.60	-6.46	29.14	46.00	-16.86	Peak	
6 *	801.1500	30.75	0.23	30.98	46.00	-15.02	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: SOY-1200200US)


Vertical

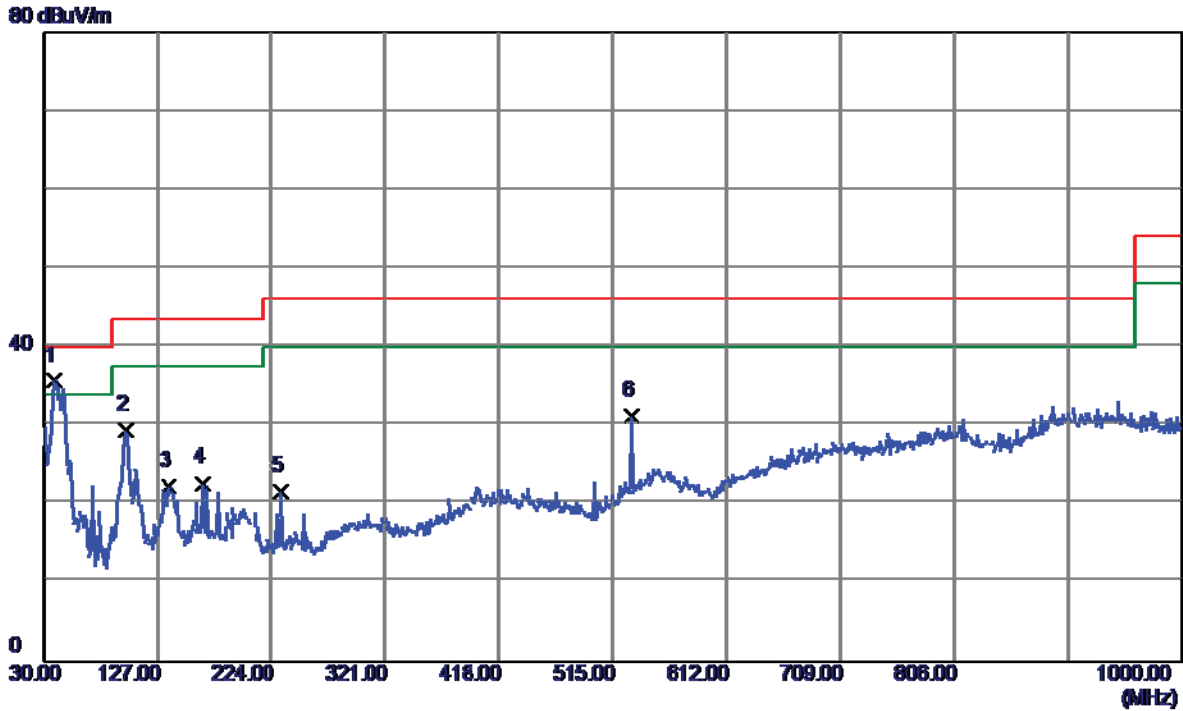

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	38.7300	49.75	-14.06	35.69	40.00	-4.31	Peak	
2	99.8399	45.00	-15.52	29.48	43.50	-14.02	Peak	
3	136.7000	35.53	-13.29	22.24	43.50	-21.26	Peak	
4	165.8000	34.84	-12.20	22.64	43.50	-20.86	Peak	
5	232.7300	35.05	-13.48	21.57	46.00	-24.43	Peak	
6	531.4900	37.59	-6.46	31.13	46.00	-14.87	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: SOY-1200200US)


Horizontal

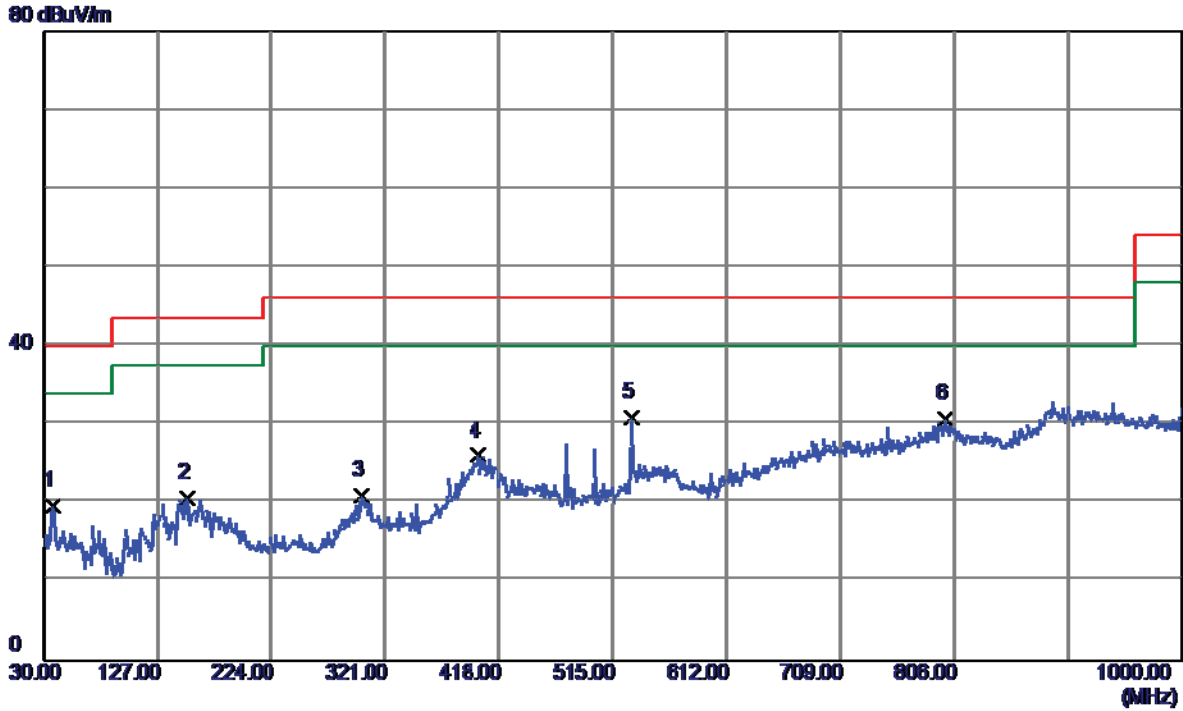

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	37.7599	33.73	-14.09	19.64	40.00	-20.36	Peak	
2	153.1900	33.30	-12.69	20.61	43.50	-22.89	Peak	
3	300.6300	31.09	-10.17	20.92	46.00	-25.08	Peak	
4	400.5400	33.78	-7.78	26.00	46.00	-20.00	Peak	
5 *	531.4900	37.38	-6.46	30.92	46.00	-15.08	Peak	
6	798.2400	30.47	0.18	30.65	46.00	-15.35	Peak	

Test Mode: UNII-3/TX A Mode 5785MHz(Adapter: SOY-1200200US)


Vertical

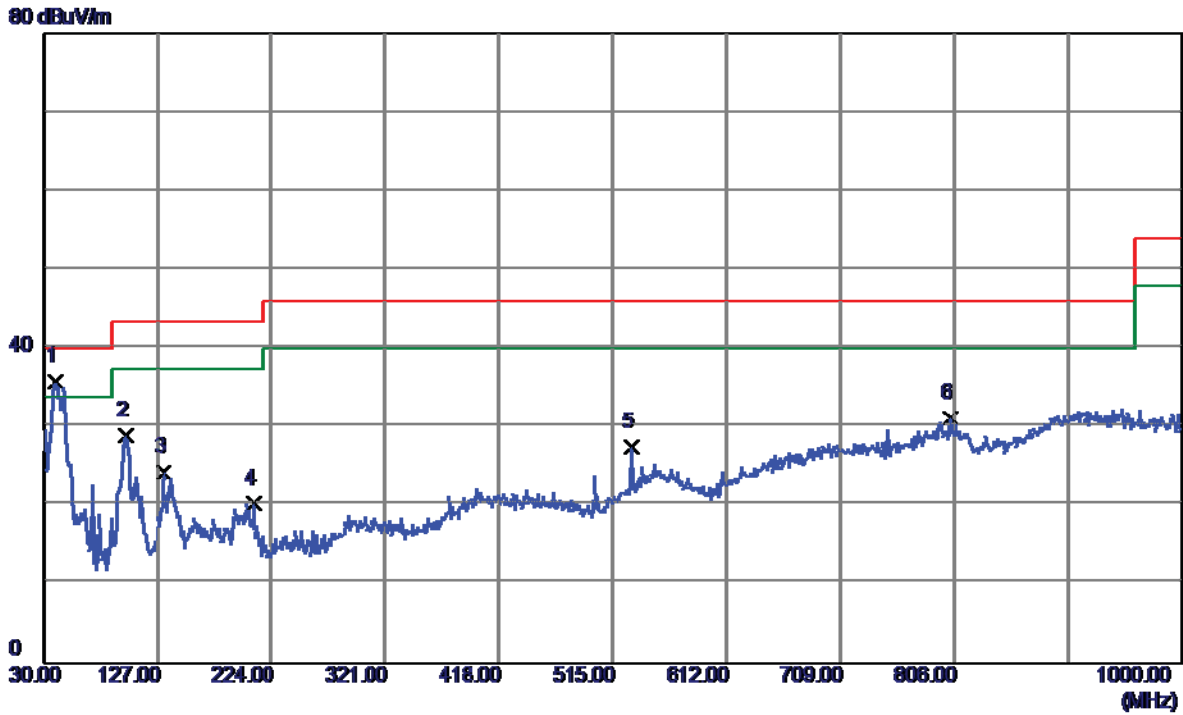

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.7000	49.82	-13.95	35.87	40.00	-4.13	Peak	
2	99.8399	44.50	-15.52	28.98	43.50	-14.52	Peak	
3	132.8200	37.00	-12.75	24.25	43.50	-19.25	Peak	
4	208.4800	34.90	-14.61	20.29	43.50	-23.21	Peak	
5	531.4900	33.97	-6.46	27.51	46.00	-18.49	Peak	
6	803.0900	30.96	0.17	31.13	46.00	-14.87	Peak	

Test Mode: UNII-3/TX A Mode 5785MHz(Adapter: SOY-1200200US)


Horizontal

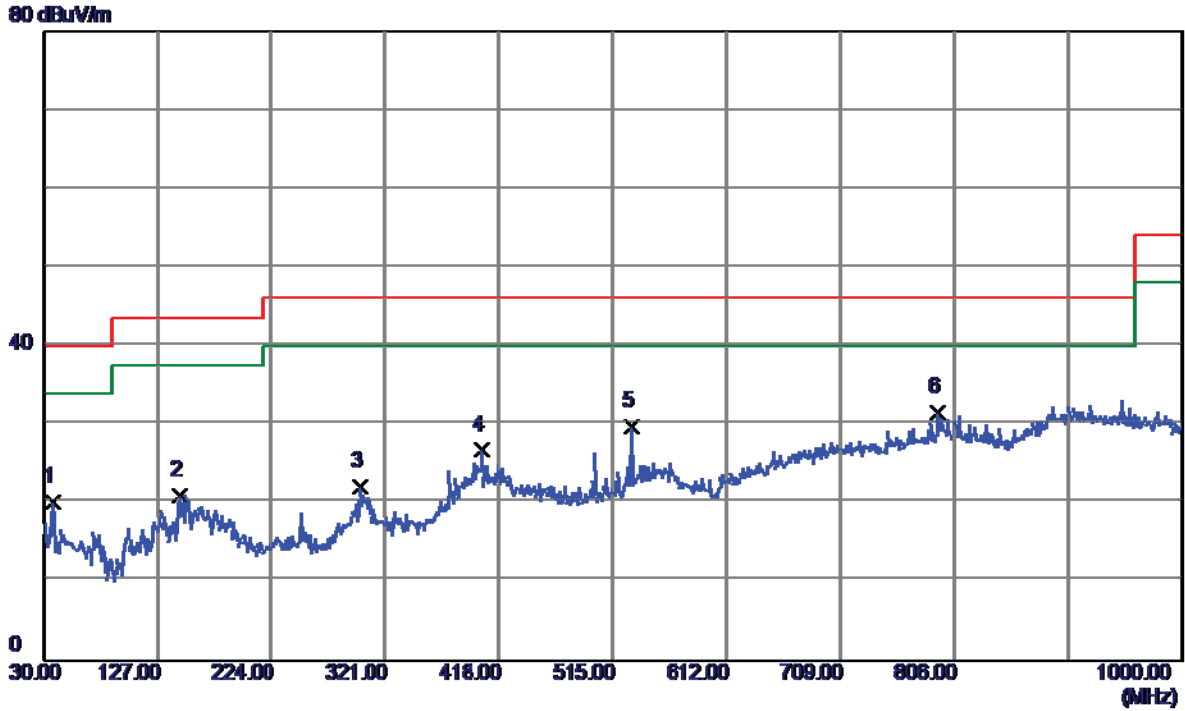

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	37.7599	34.21	-14.09	20.12	40.00	-19.88	Peak	
2	146.4000	34.22	-13.24	20.98	43.50	-22.52	Peak	
3	299.6600	32.32	-10.20	22.12	46.00	-23.88	Peak	
4	404.4200	34.50	-7.80	26.70	46.00	-19.30	Peak	
5	531.4900	36.25	-6.46	29.79	46.00	-16.21	Peak	
6 *	791.4500	31.61	-0.12	31.49	46.00	-14.51	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: SOY-1200200US)


Vertical

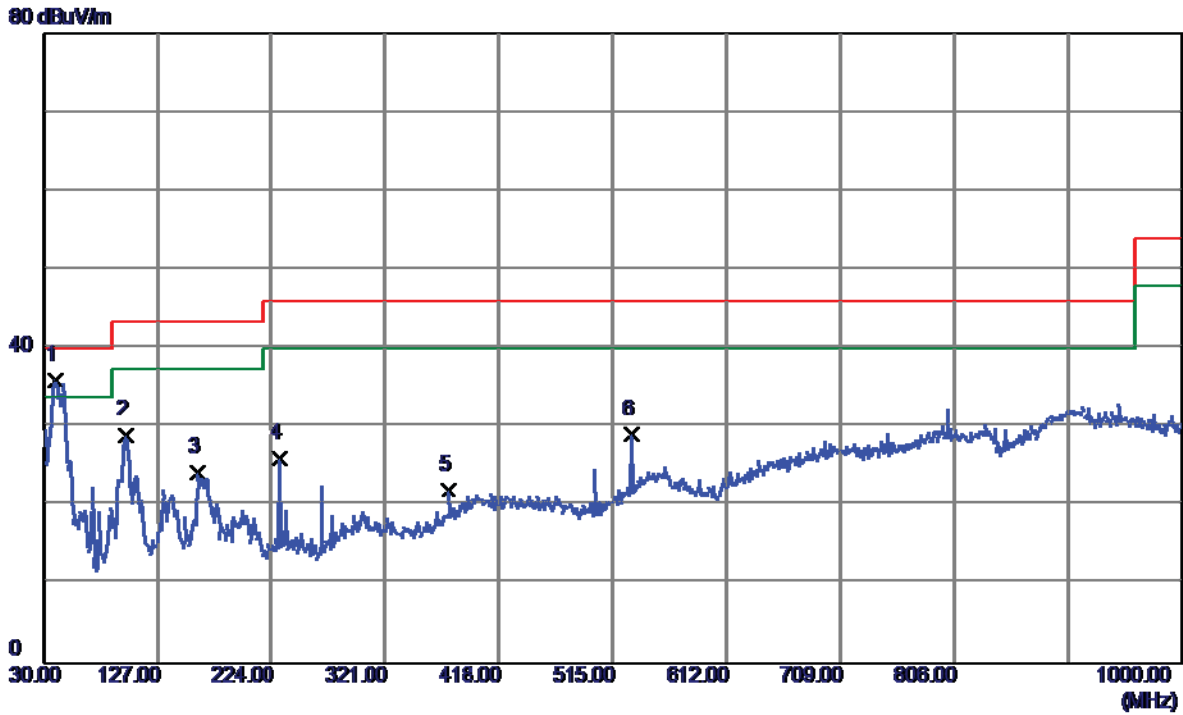

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.7000	50.01	-13.95	36.06	40.00	-3.94	Peak	
2	99.8399	44.56	-15.52	29.04	43.50	-14.46	Peak	
3	161.9200	36.49	-12.16	24.33	43.50	-19.17	Peak	
4	231.7600	39.58	-13.44	26.14	46.00	-19.86	Peak	
5	375.3200	31.57	-9.48	22.09	46.00	-23.91	Peak	
6	531.4900	35.51	-6.46	29.05	46.00	-16.95	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: SOY-1200200US)


Horizontal

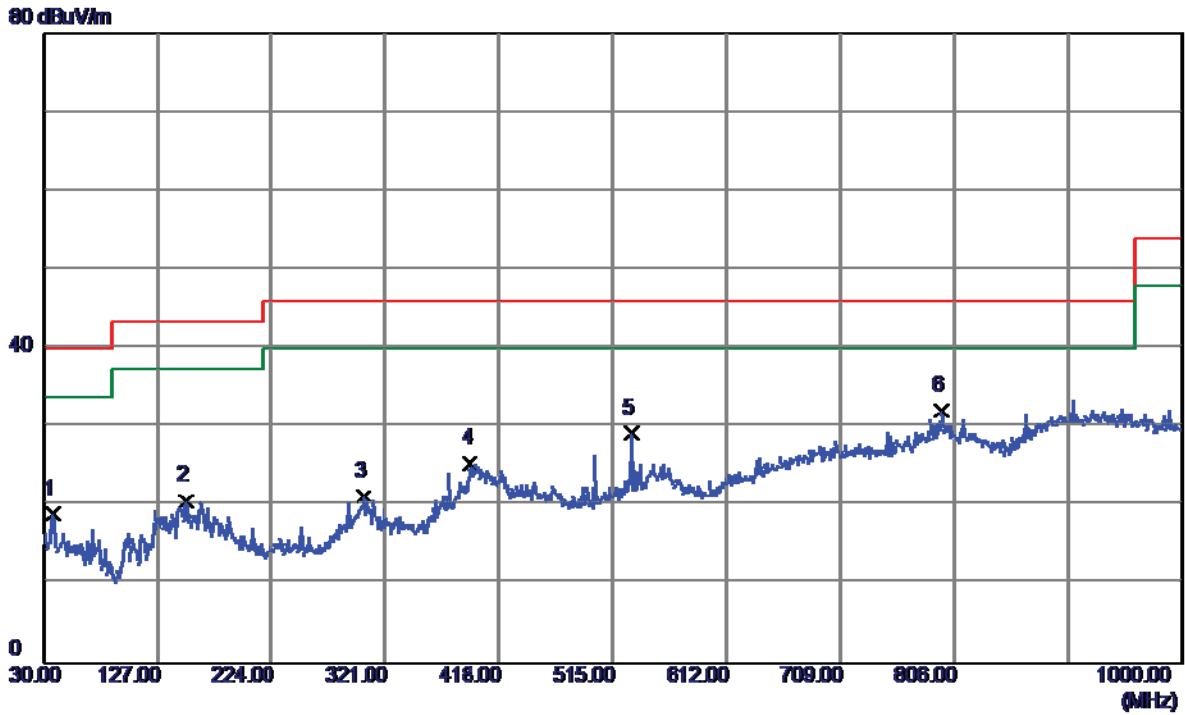

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	37.7599	33.09	-14.09	19.00	40.00	-21.00	Peak	
2	152.2200	33.49	-12.77	20.72	43.50	-22.78	Peak	
3	302.5700	31.50	-10.21	21.29	46.00	-24.71	Peak	
4	393.7500	33.63	-8.21	25.42	46.00	-20.58	Peak	
5	531.4900	35.68	-6.46	29.22	46.00	-16.78	Peak	
6 *	795.3300	32.12	0.05	32.17	46.00	-13.83	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter: S24B72-120A200-C4)


Vertical

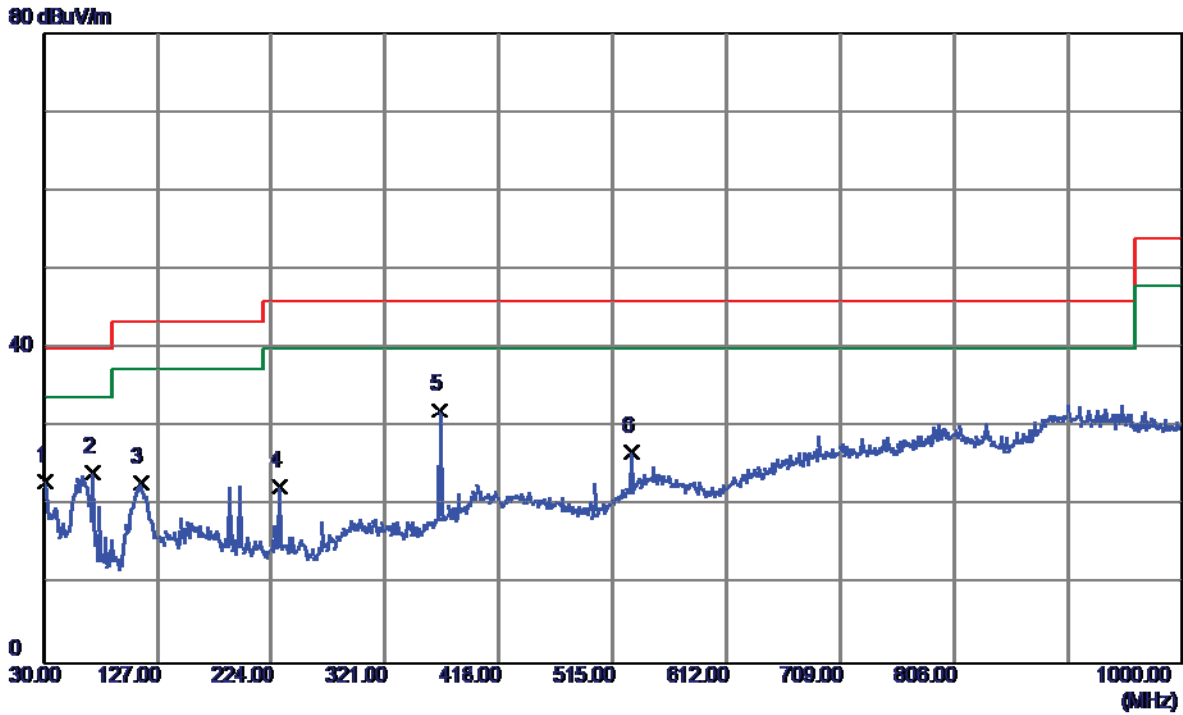

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.9700	37.28	-14.12	23.16	40.00	-16.84	Peak	
2	71.7100	40.84	-16.55	24.29	40.00	-15.71	Peak	
3	112.4500	37.37	-14.36	23.01	43.50	-20.49	Peak	
4	231.7600	35.99	-13.44	22.55	46.00	-23.45	Peak	
5 *	367.5600	42.25	-10.01	32.24	46.00	-13.76	Peak	
6	531.4900	33.37	-6.46	26.91	46.00	-19.09	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter: S24B72-120A200-C4)


Horizontal

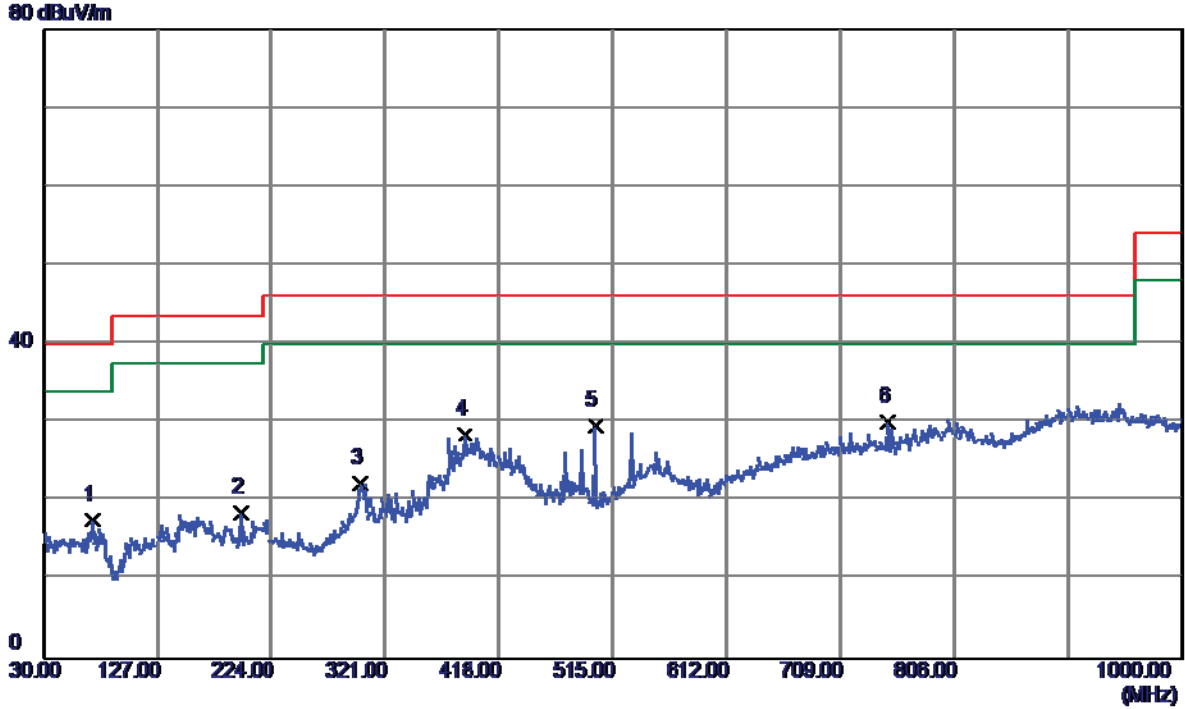

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	71.7100	34.08	-16.55	17.53	40.00	-22.47	Peak	
2	197.8100	32.88	-14.32	18.56	43.50	-24.94	Peak	
3	299.6600	32.40	-10.20	22.20	46.00	-23.80	Peak	
4	388.9000	37.07	-8.54	28.53	46.00	-17.47	Peak	
5	500.4500	39.32	-9.67	29.65	46.00	-16.35	Peak	
6 *	749.7400	32.11	-1.97	30.14	46.00	-15.86	Peak	

Test Mode: UNII-1/TX A Mode 5200MHz (Adapter: S24B72-120A200-C4)


Vertical

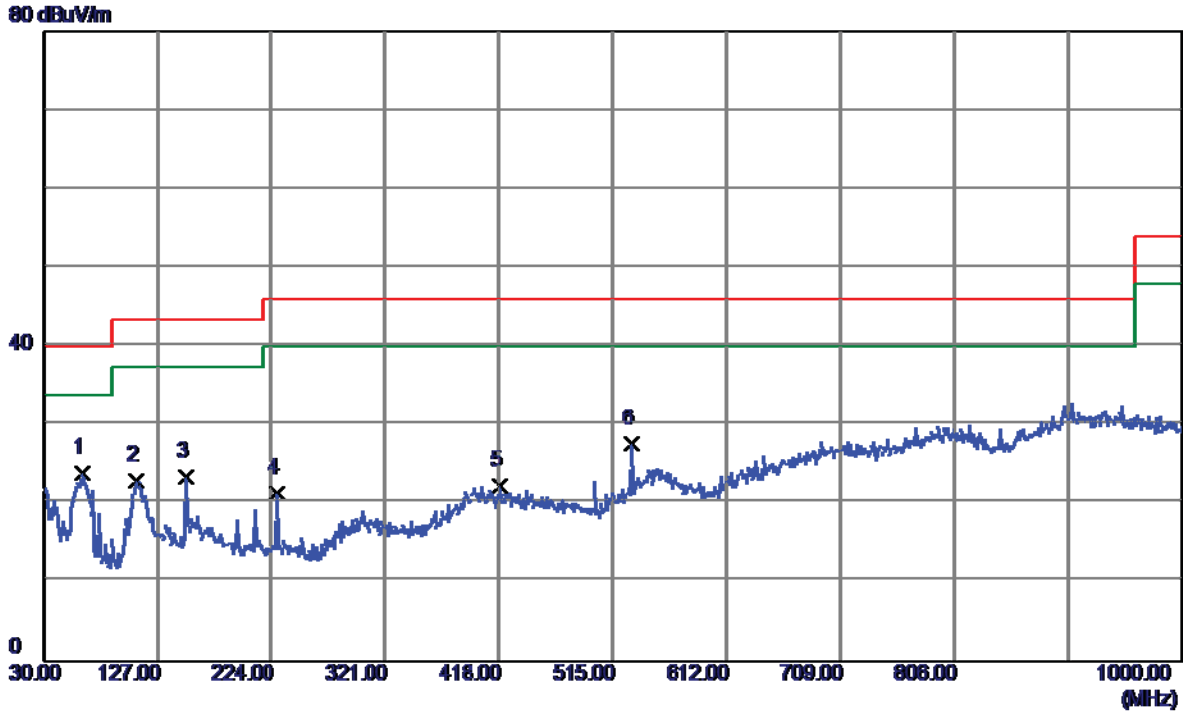

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	62.9800	38.52	-14.58	23.94	40.00	-16.06	Peak	
2	108.5700	37.80	-14.77	23.03	43.50	-20.47	Peak	
3	152.2200	36.26	-12.77	23.49	43.50	-20.01	Peak	
4	229.8200	34.84	-13.38	21.46	46.00	-24.54	Peak	
5	418.9700	30.29	-7.86	22.43	46.00	-23.57	Peak	
6	531.4900	34.17	-6.46	27.71	46.00	-18.29	Peak	

Test Mode: UNII-1/TX A Mode 5200MHz (Adapter: S24B72-120A200-C4)


Horizontal

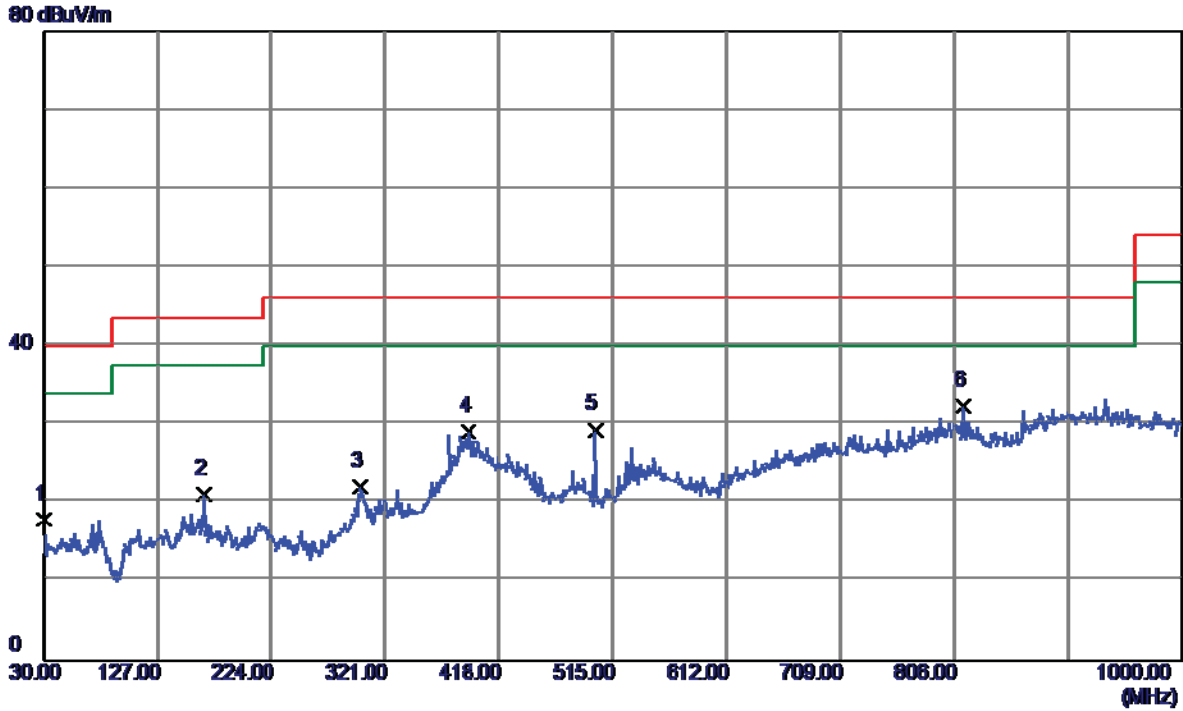

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.0000	32.00	-14.03	17.97	40.00	-22.03	Peak	
2	166.7700	33.34	-12.21	21.13	43.50	-22.37	Peak	
3	299.6600	32.22	-10.20	22.02	46.00	-23.98	Peak	
4	391.8100	37.43	-8.34	29.09	46.00	-16.91	Peak	
5	500.4500	39.03	-9.67	29.36	46.00	-16.64	Peak	
6 *	813.7600	32.53	-0.16	32.37	46.00	-13.63	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter: S24B72-120A200-C4)


Vertical

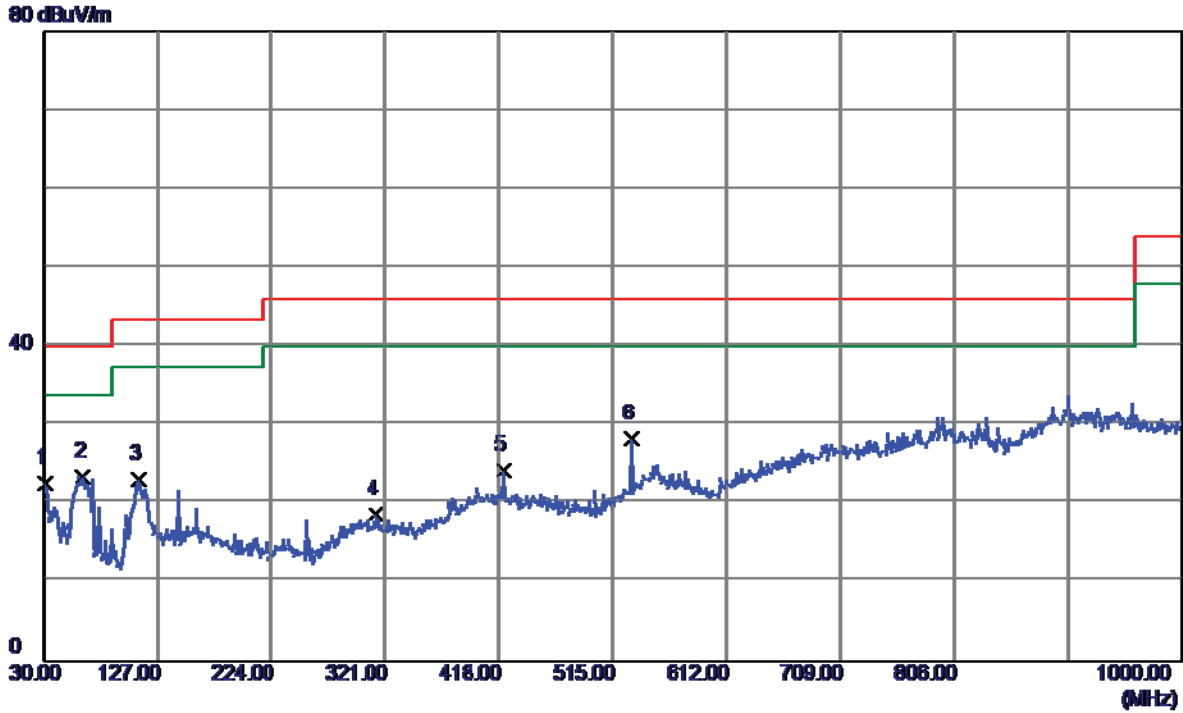

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.9700	36.84	-14.12	22.72	40.00	-17.28	Peak	
2 *	63.9500	38.43	-14.87	23.56	40.00	-16.44	Peak	
3	110.5100	37.73	-14.60	23.13	43.50	-20.37	Peak	
4	313.2400	29.23	-10.44	18.79	46.00	-27.21	Peak	
5	421.8800	32.27	-7.88	24.39	46.00	-21.61	Peak	
6	531.4900	34.73	-6.46	28.27	46.00	-17.73	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter: S24B72-120A200-C4)


Horizontal

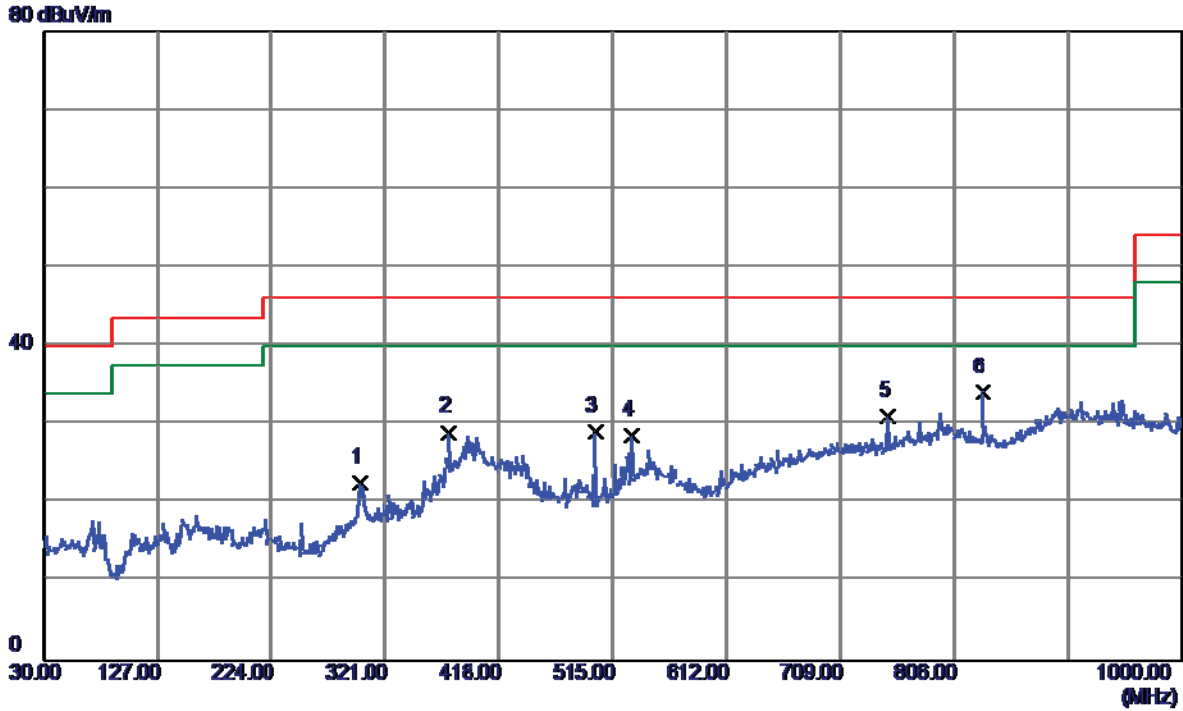

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	299.6600	32.77	-10.20	22.57	46.00	-23.43	Peak	
2	375.3200	38.52	-9.48	29.04	46.00	-16.96	Peak	
3	500.4500	38.85	-9.67	29.18	46.00	-16.82	Peak	
4	531.4900	35.15	-6.46	28.69	46.00	-17.31	Peak	
5	749.7400	32.94	-1.97	30.97	46.00	-15.03	Peak	
6 *	830.2500	34.80	-0.65	34.15	46.00	-11.85	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter: S24B72-120A200-C4)


Vertical

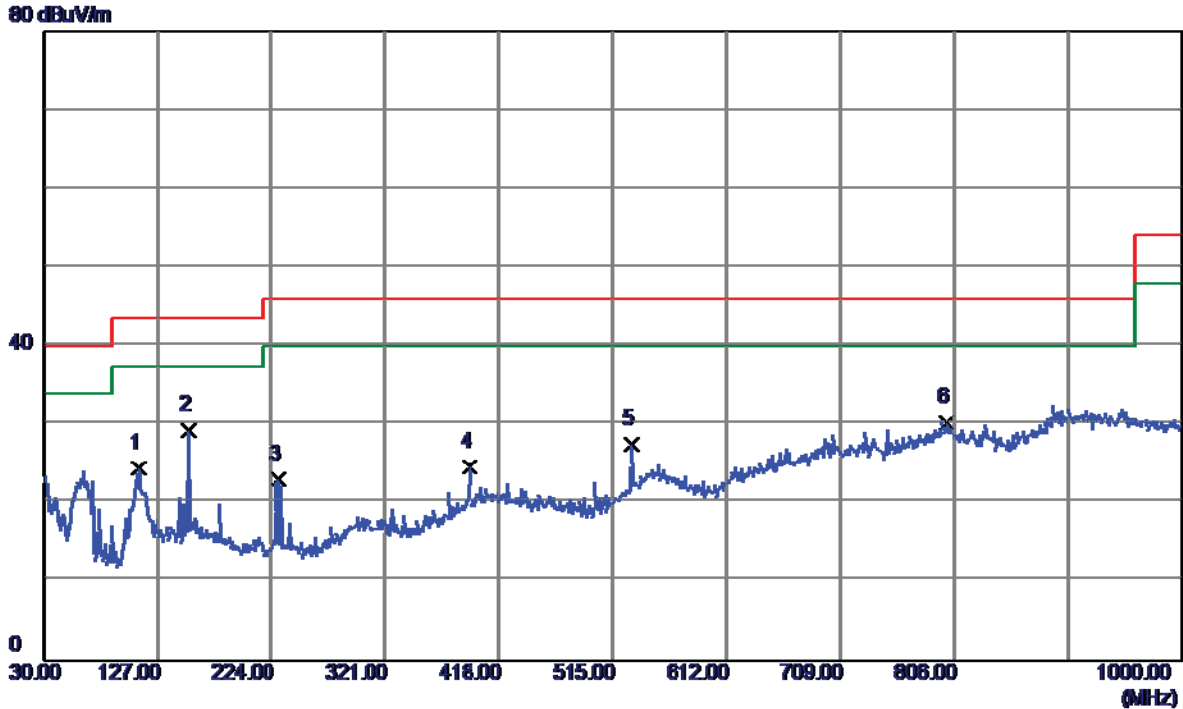

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	110.5100	39.01	-14.60	24.41	43.50	-19.09	Peak	
2 *	154.1600	41.97	-12.62	29.35	43.50	-14.15	Peak	
3	230.7900	36.38	-13.40	22.98	46.00	-23.02	Peak	
4	392.7800	32.88	-8.28	24.60	46.00	-21.40	Peak	
5	531.4900	33.93	-6.46	27.47	46.00	-18.53	Peak	
6	799.2100	30.06	0.22	30.28	46.00	-15.72	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter: S24B72-120A200-C4)


Horizontal

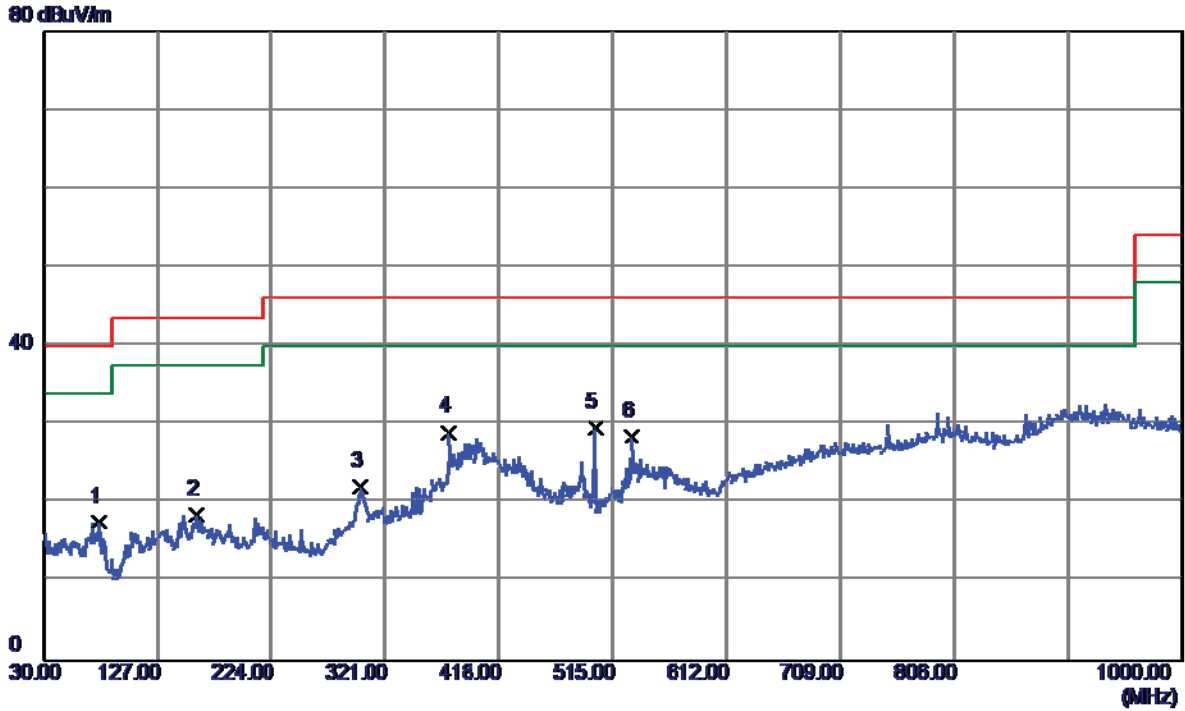

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	77.5300	33.86	-16.31	17.55	40.00	-22.45	Peak	
2	159.9800	30.77	-12.15	18.62	43.50	-24.88	Peak	
3	299.6600	32.34	-10.20	22.14	46.00	-23.86	Peak	
4	375.3200	38.52	-9.48	29.04	46.00	-16.96	Peak	
5 *	500.4500	39.34	-9.67	29.67	46.00	-16.33	Peak	
6	531.4900	35.00	-6.46	28.54	46.00	-17.46	Peak	

Test Mode: UNII-3/TX A Mode 5785MHz (Adapter: S24B72-120A200-C4)


Vertical

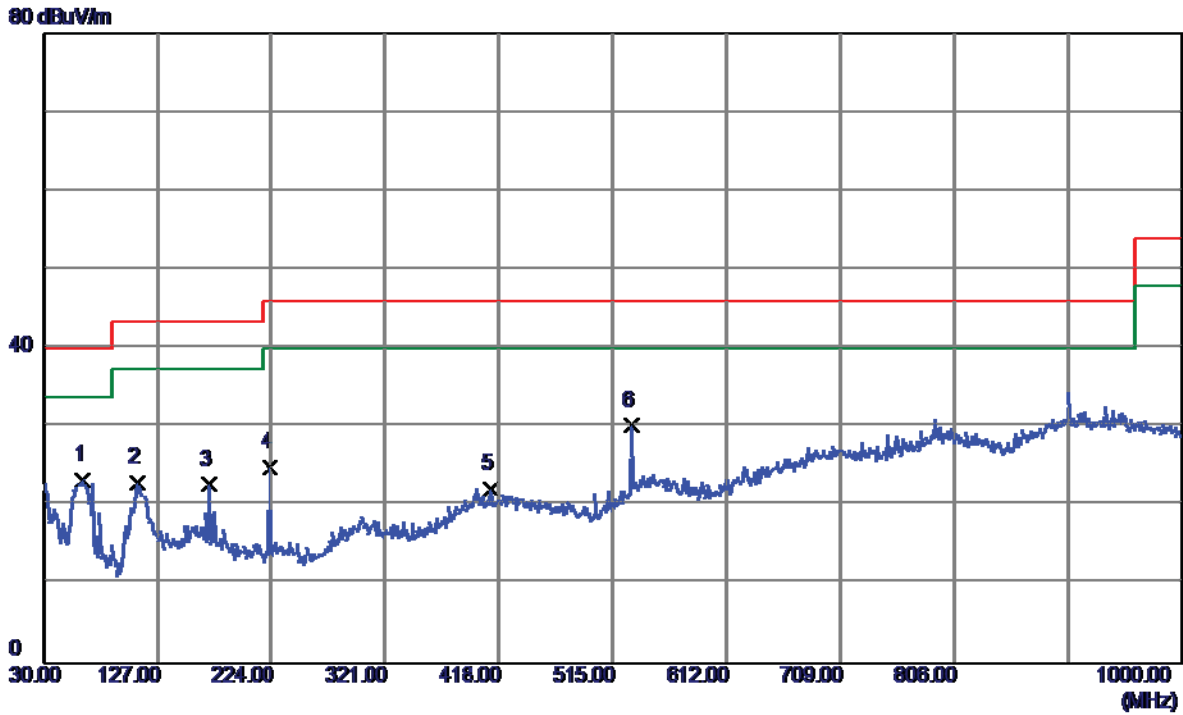

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	63.9500	38.25	-14.87	23.38	40.00	-16.62	Peak	
2	109.5400	37.66	-14.69	22.97	43.50	-20.53	Peak	
3	171.6200	35.14	-12.34	22.80	43.50	-20.70	Peak	
4	223.0300	38.99	-13.99	25.00	46.00	-21.00	Peak	
5	411.2100	30.12	-7.83	22.29	46.00	-23.71	Peak	
6 *	531.4900	36.72	-6.46	30.26	46.00	-15.74	Peak	

Test Mode: UNII-3/TX A Mode 5785MHz (Adapter: S24B72-120A200-C4)


Horizontal

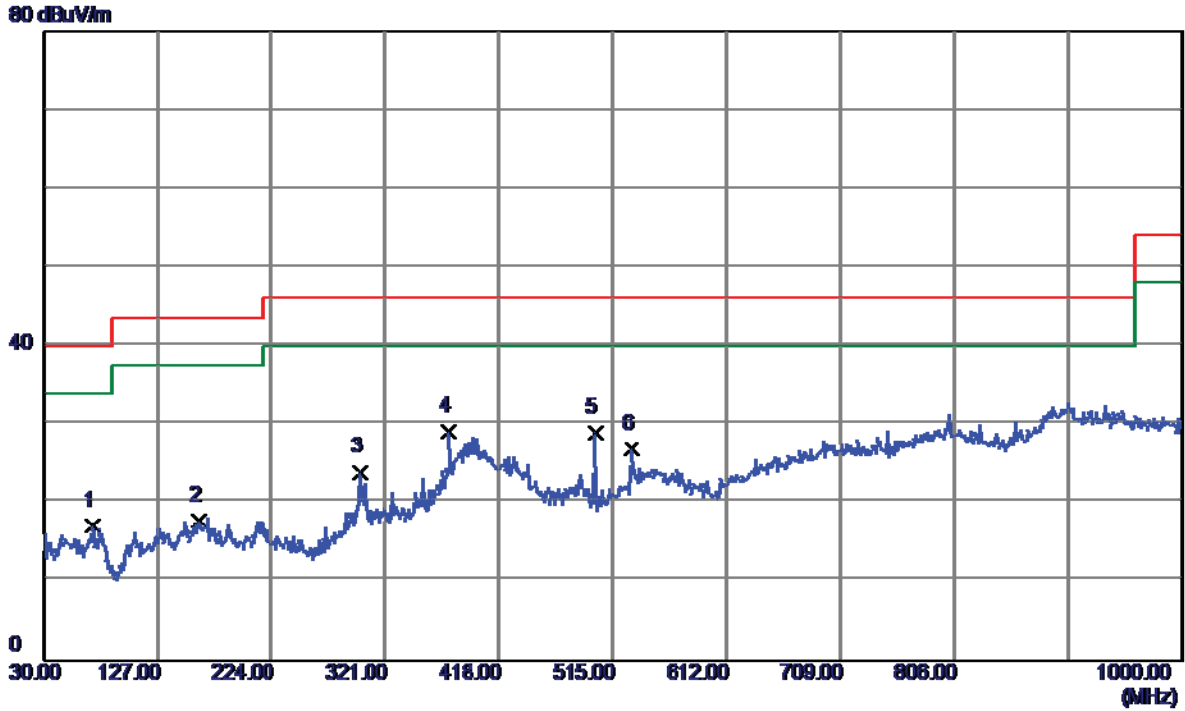

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	71.7100	33.70	-16.55	17.15	40.00	-22.85	Peak	
2	162.8900	29.93	-12.17	17.76	43.50	-25.74	Peak	
3	299.6600	34.12	-10.20	23.92	46.00	-22.08	Peak	
4 *	375.3200	38.61	-9.48	29.13	46.00	-16.87	Peak	
5	500.4500	38.70	-9.67	29.03	46.00	-16.97	Peak	
6	531.4900	33.41	-6.46	26.95	46.00	-19.05	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter: S24B72-120A200-C4)


Vertical

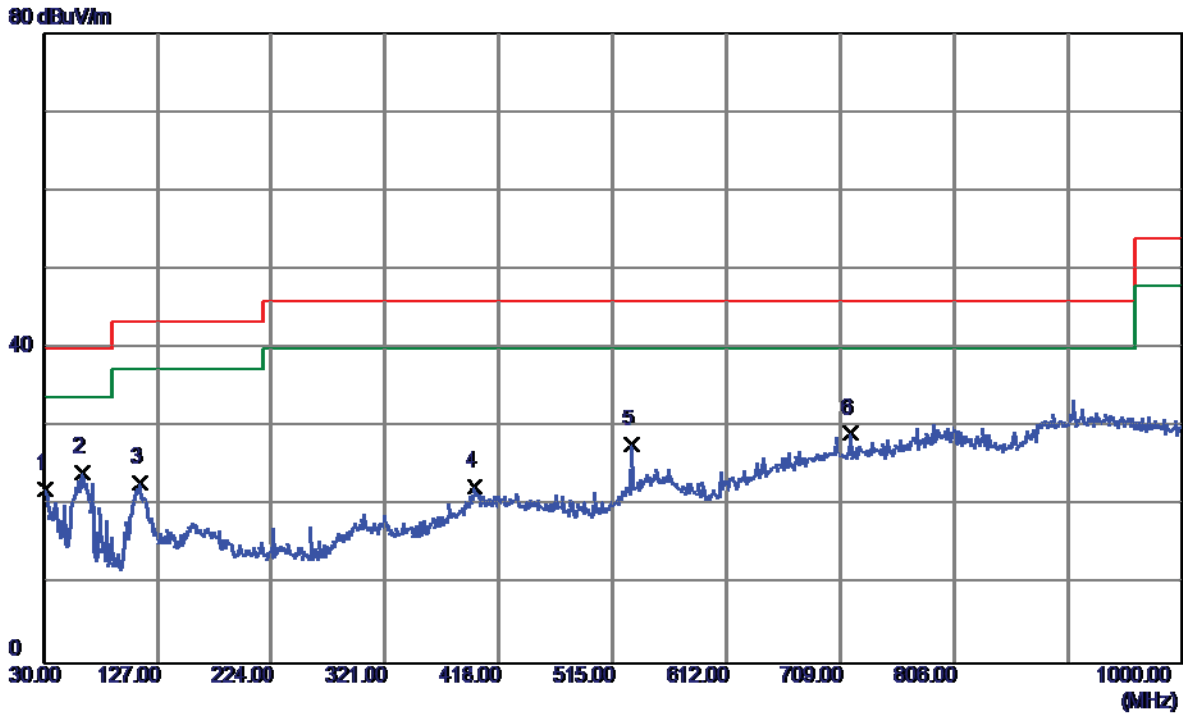

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.9700	36.42	-14.12	22.30	40.00	-17.70	Peak	
2 *	62.9800	38.94	-14.58	24.36	40.00	-15.64	Peak	
3	111.4800	37.59	-14.48	23.11	43.50	-20.39	Peak	
4	397.6300	30.51	-7.94	22.57	46.00	-23.43	Peak	
5	531.4900	34.31	-6.46	27.85	46.00	-18.15	Peak	
6	717.7300	31.37	-2.05	29.32	46.00	-16.68	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter: S24B72-120A200-C4)

Horizontal

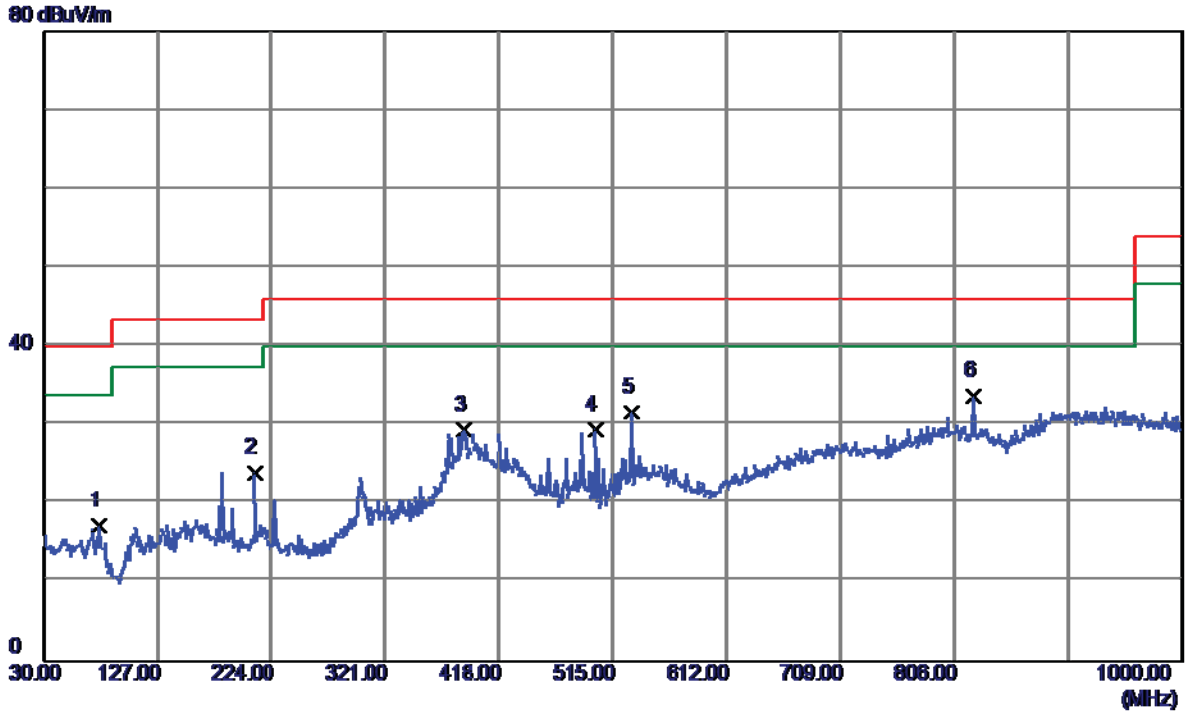


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	77.5300	33.57	-16.31	17.26	40.00	-22.74	Peak	
2	209.4500	38.56	-14.63	23.93	43.50	-19.57	Peak	
3	387.9300	38.06	-8.61	29.45	46.00	-16.55	Peak	
4	500.4500	39.05	-9.67	29.38	46.00	-16.62	Peak	
5	531.4900	38.20	-6.46	31.74	46.00	-14.26	Peak	
6 *	822.4900	34.19	-0.42	33.77	46.00	-12.23	Peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical


115 dBuV/m

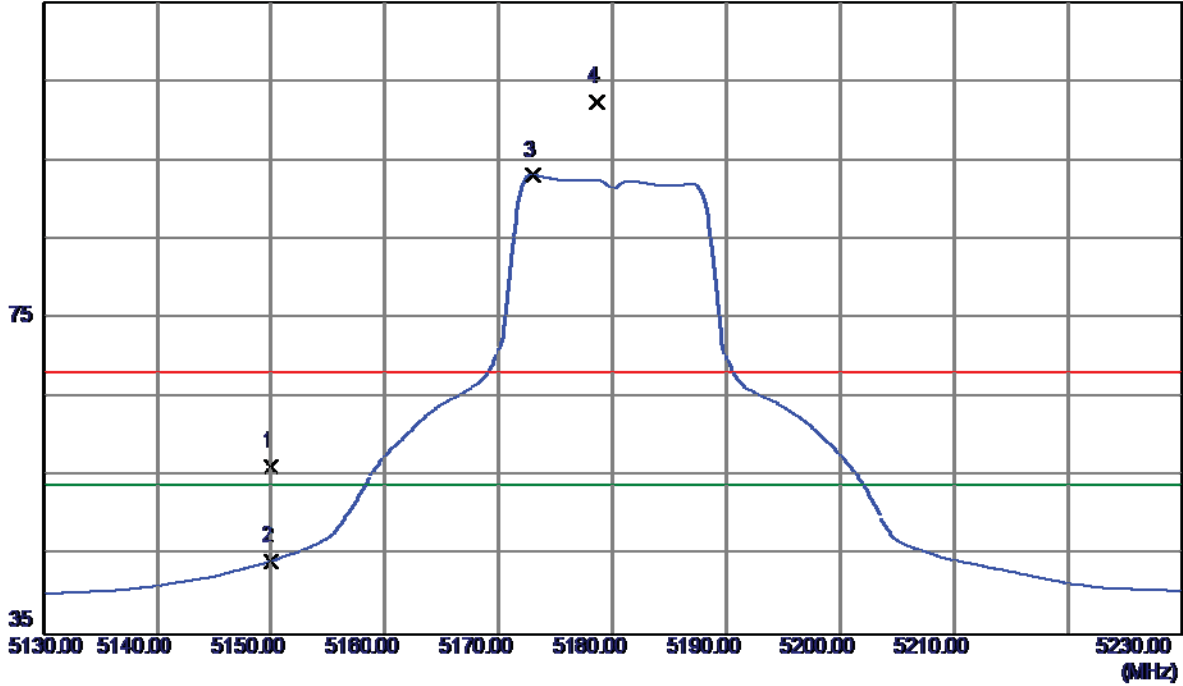

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	15.68	40.62	56.30	68.30	-12.00	Peak	
2	5150.0000	3.68	40.62	44.30	54.00	-9.70	AVG	
3 *	5173.0000	52.39	40.70	93.09	54.00	39.09	AVG	No Limit
4	5178.7000	61.70	40.72	102.42	68.30	34.12	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

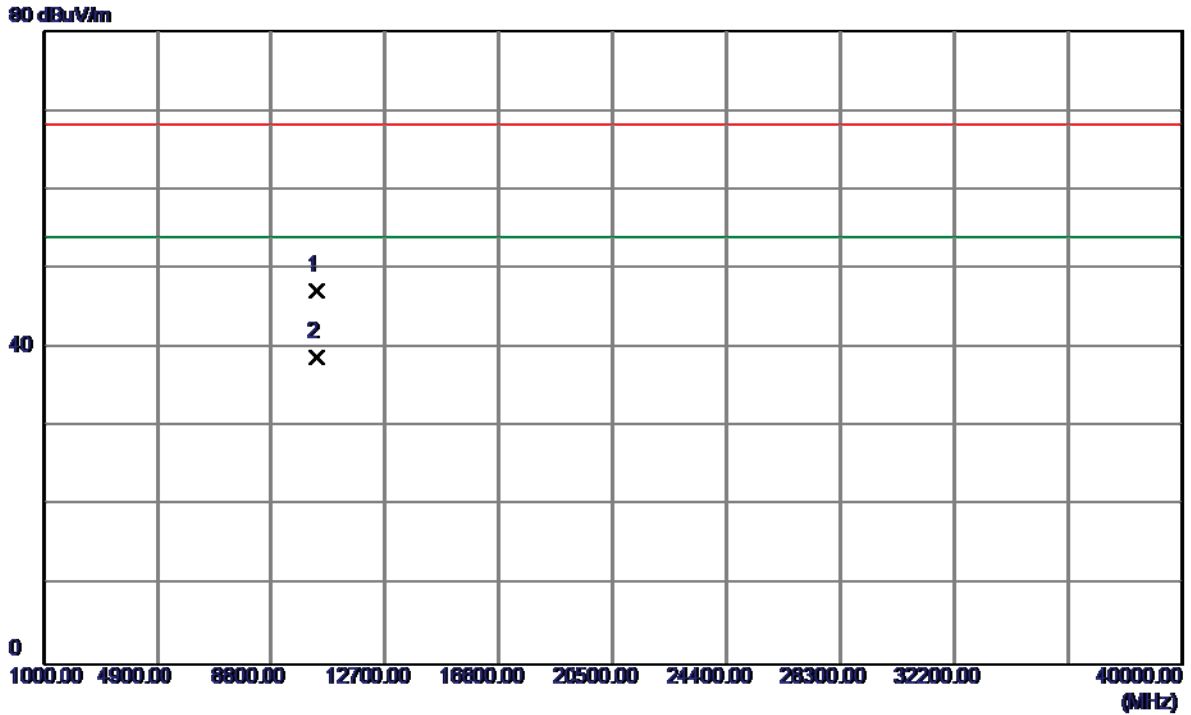


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10359.7699	31.96	15.23	47.19	68.30	-21.11	Peak	
2 *	10360.0350	23.61	15.23	38.84	54.00	-15.16	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal


115 dBuV/m

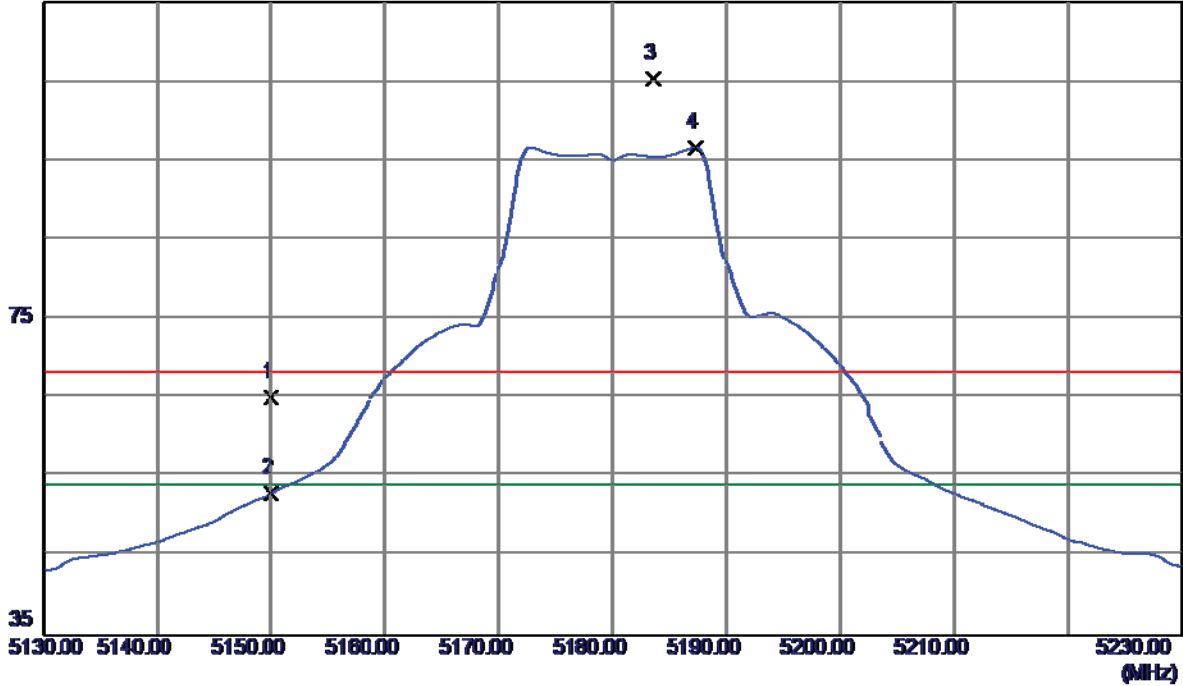

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	24.45	40.62	65.07	68.30	-3.23	Peak	
2	5150.0000	12.24	40.62	52.86	54.00	-1.14	AVG	
3	5183.6000	64.60	40.74	105.34	68.30	37.04	Peak	No Limit
4 *	5187.3000	55.91	40.75	96.66	54.00	42.66	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

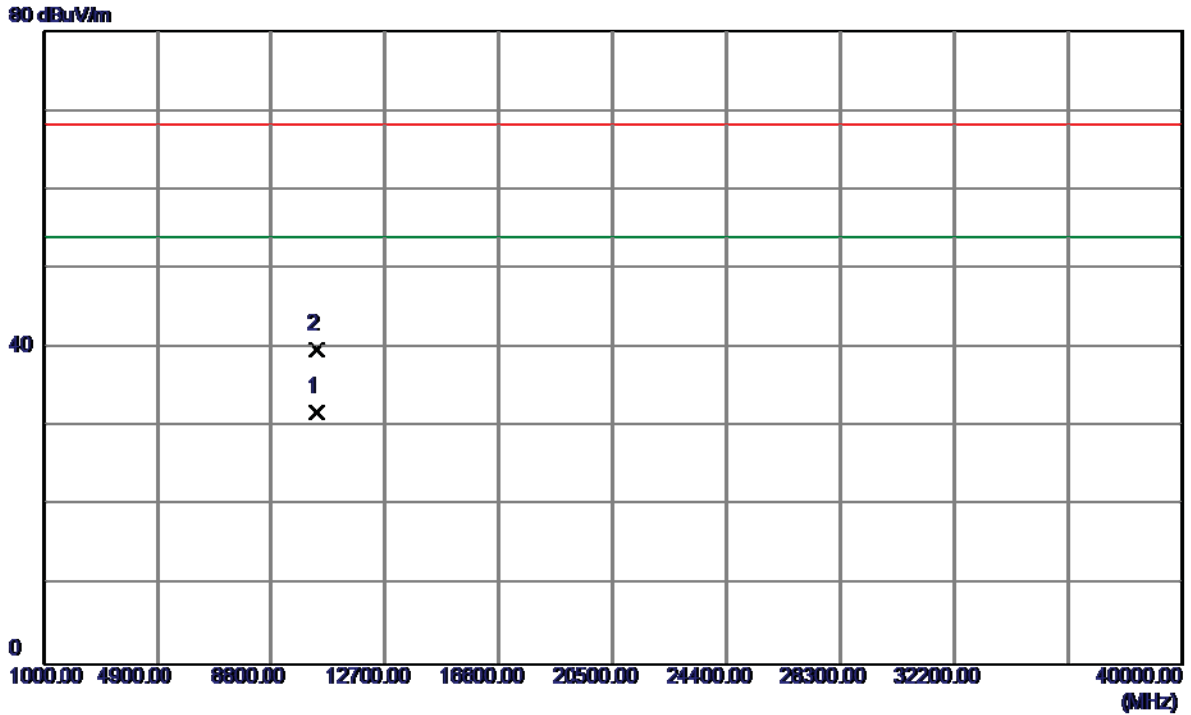


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10358.3000	16.56	15.23	31.79	54.00	-22.21	AVG	
2	10358.7000	24.60	15.23	39.83	68.30	-28.47	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz

Vertical


115 dBuV/m

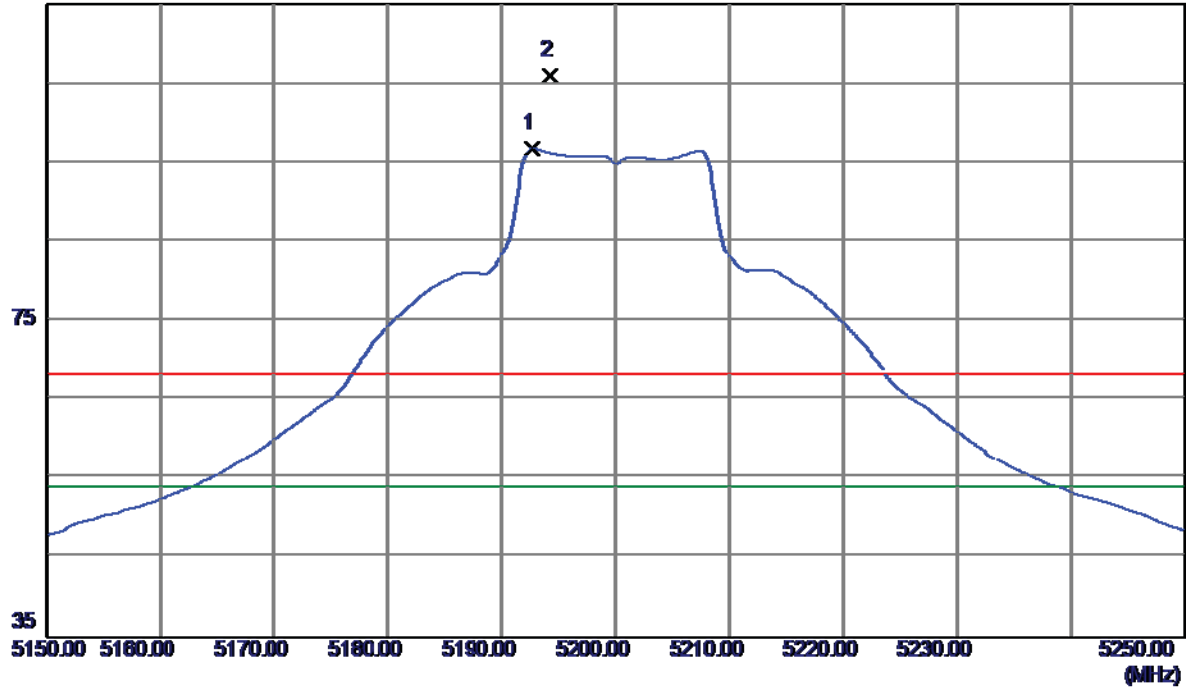

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5192.7000	55.97	40.77	96.74	54.00	42.74	AVG	No Limit
2	5194.2000	65.32	40.77	106.09	68.30	37.79	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz

Vertical

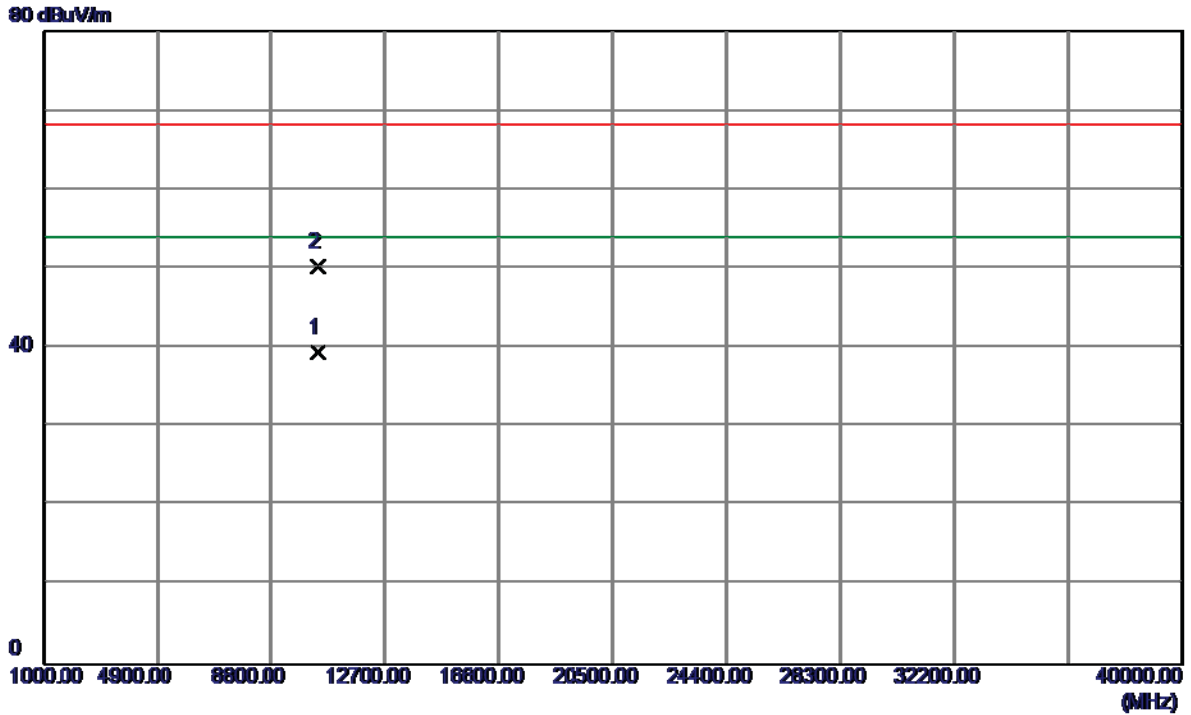


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0550	24.12	15.32	39.44	54.00	-14.56	AVG	
2	10400.2650	34.92	15.32	50.24	68.30	-18.06	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz

Horizontal


115 dBuV/m

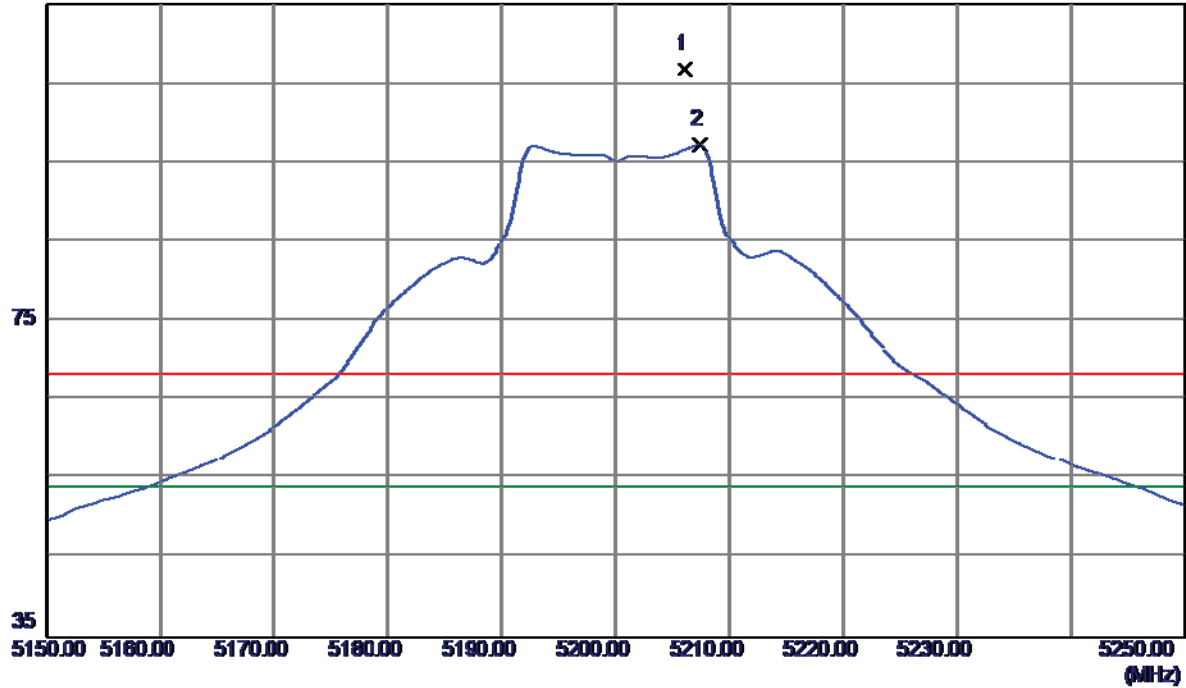

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5206.1000	65.97	40.81	106.78	68.30	38.48	Peak	No Limit
2 *	5207.4000	56.46	40.81	97.27	54.00	43.27	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz

Horizontal

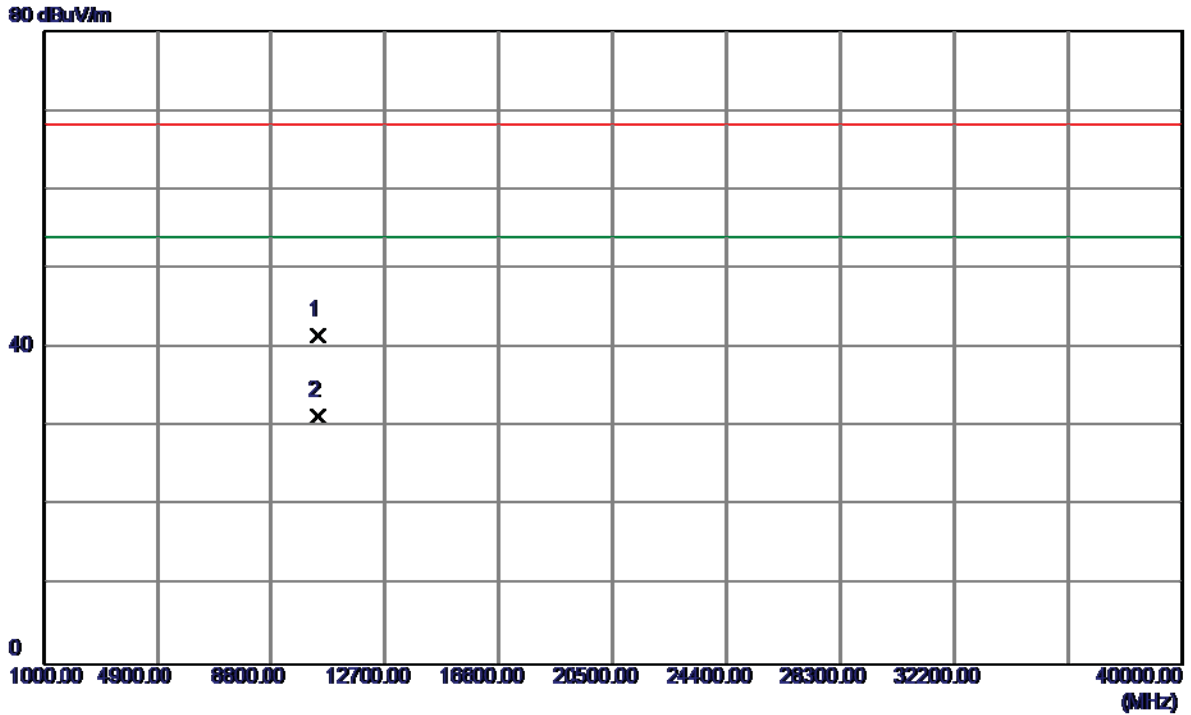


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10399.4000	26.35	15.32	41.67	68.30	-26.63	Peak	
2 *	10400.3000	15.98	15.32	31.30	54.00	-22.70	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical


115 dBuV/m

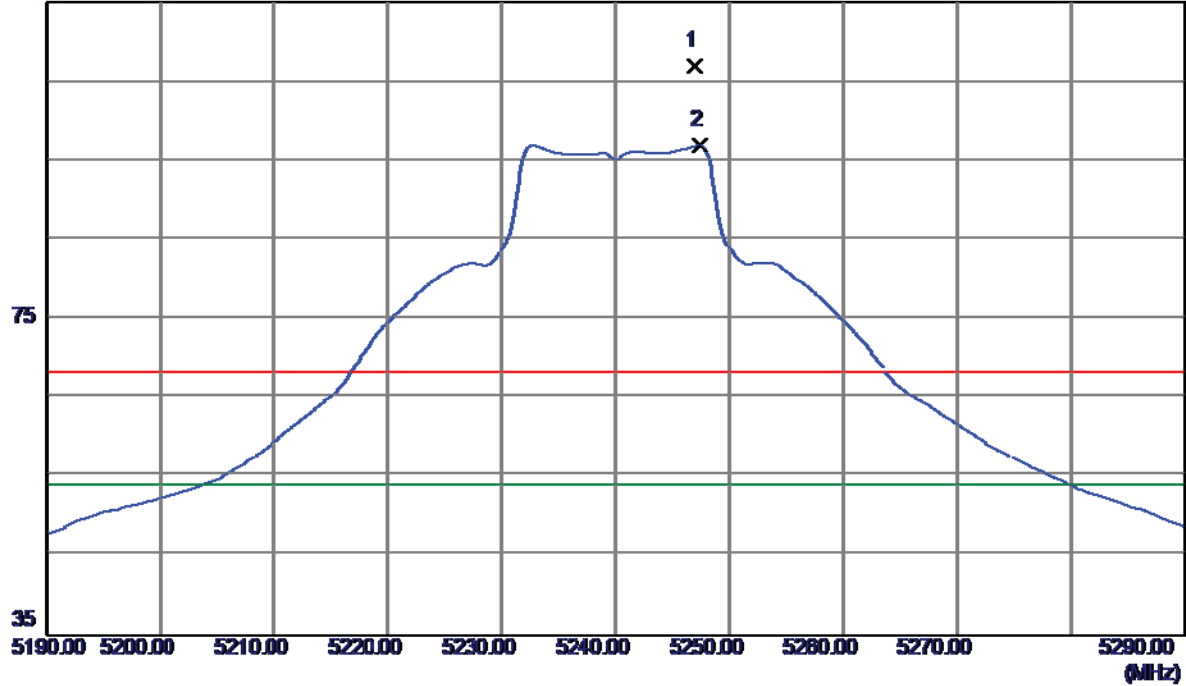

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5247.0000	66.12	40.94	107.06	68.30	38.76	Peak	No Limit
2 *	5247.4000	55.97	40.95	96.92	54.00	42.92	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

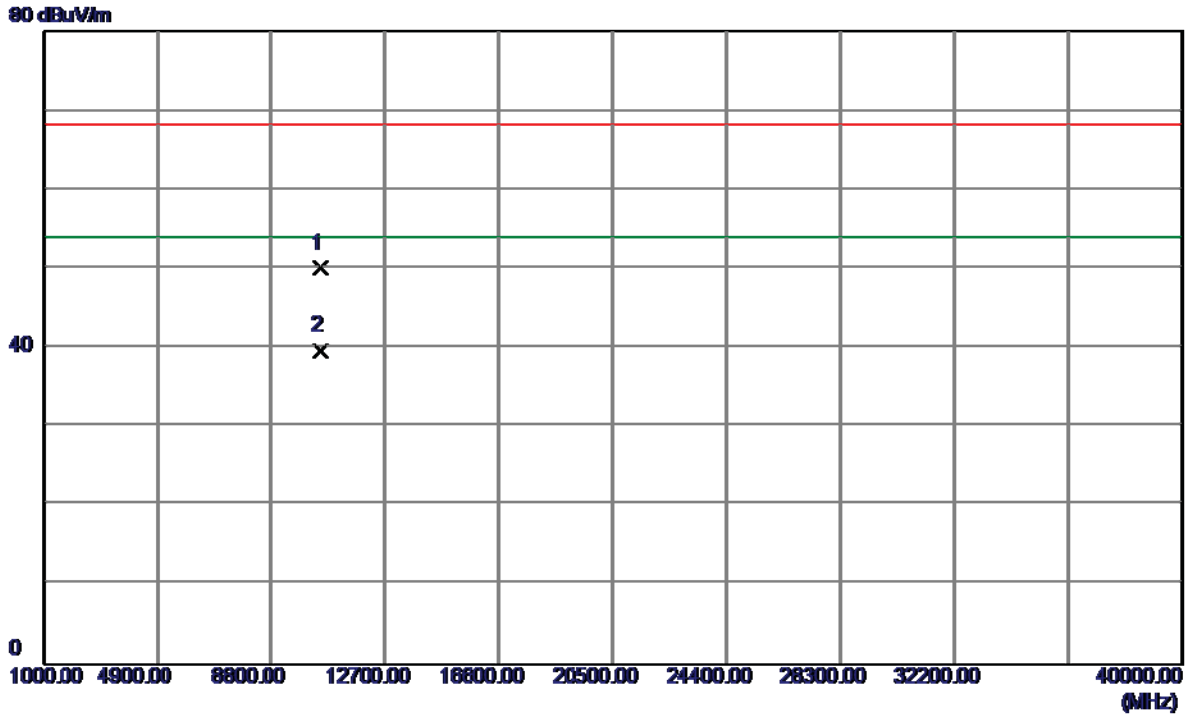


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10479.4050	34.57	15.50	50.07	68.30	-18.23	Peak	
2 *	10479.9750	24.11	15.50	39.61	54.00	-14.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal


115 dBuV/m

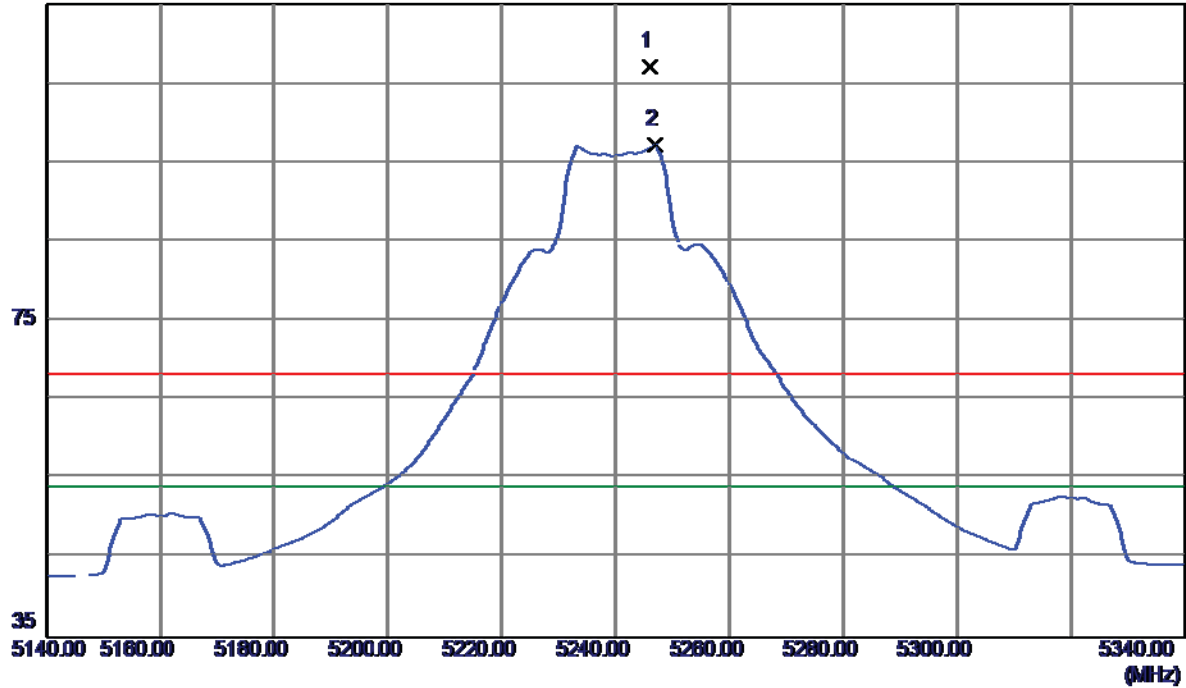

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5246.0000	66.24	40.94	107.18	68.30	38.88	Peak	No Limit
2 *	5246.8000	56.25	40.94	97.19	54.00	43.19	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

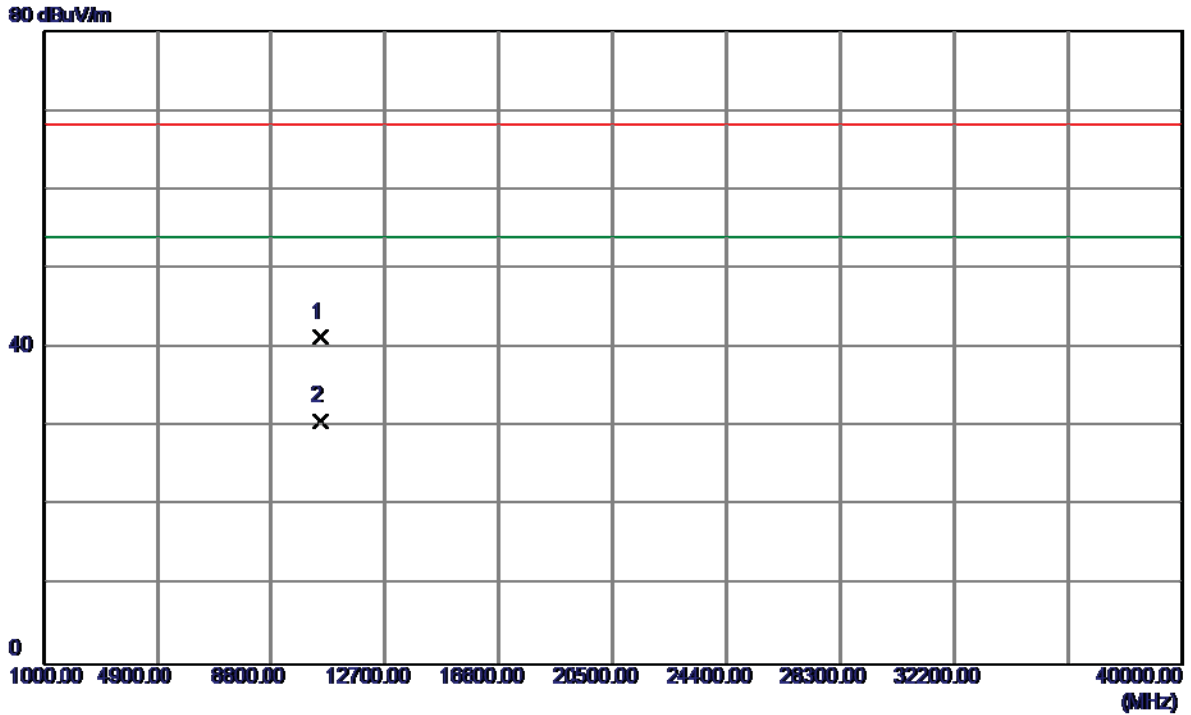


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10475.4000	25.87	15.49	41.36	68.30	-26.94	Peak	
2 *	10481.0000	15.15	15.51	30.66	54.00	-23.34	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical


115 dBuV/m

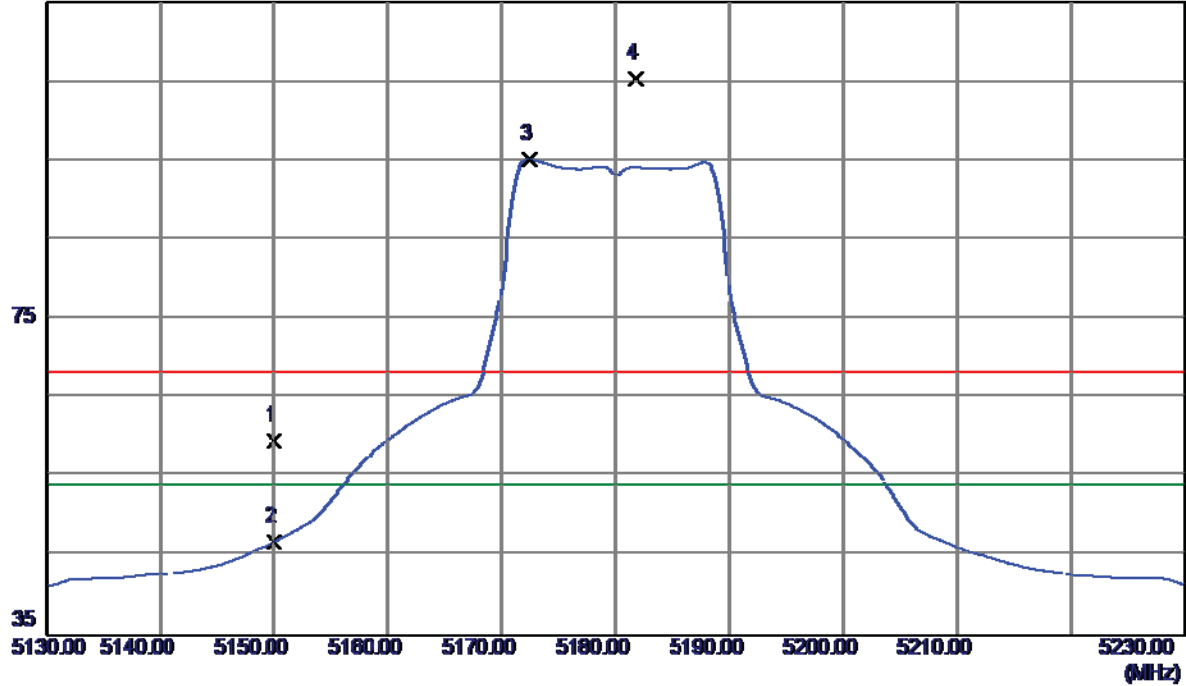

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	19.00	40.62	59.62	68.30	-8.68	Peak	
2	5150.0000	6.24	40.62	46.86	54.00	-7.14	AVG	
3 *	5172.4000	54.45	40.70	95.15	54.00	41.15	AVG	No Limit
4	5181.8000	64.62	40.73	105.35	68.30	37.05	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

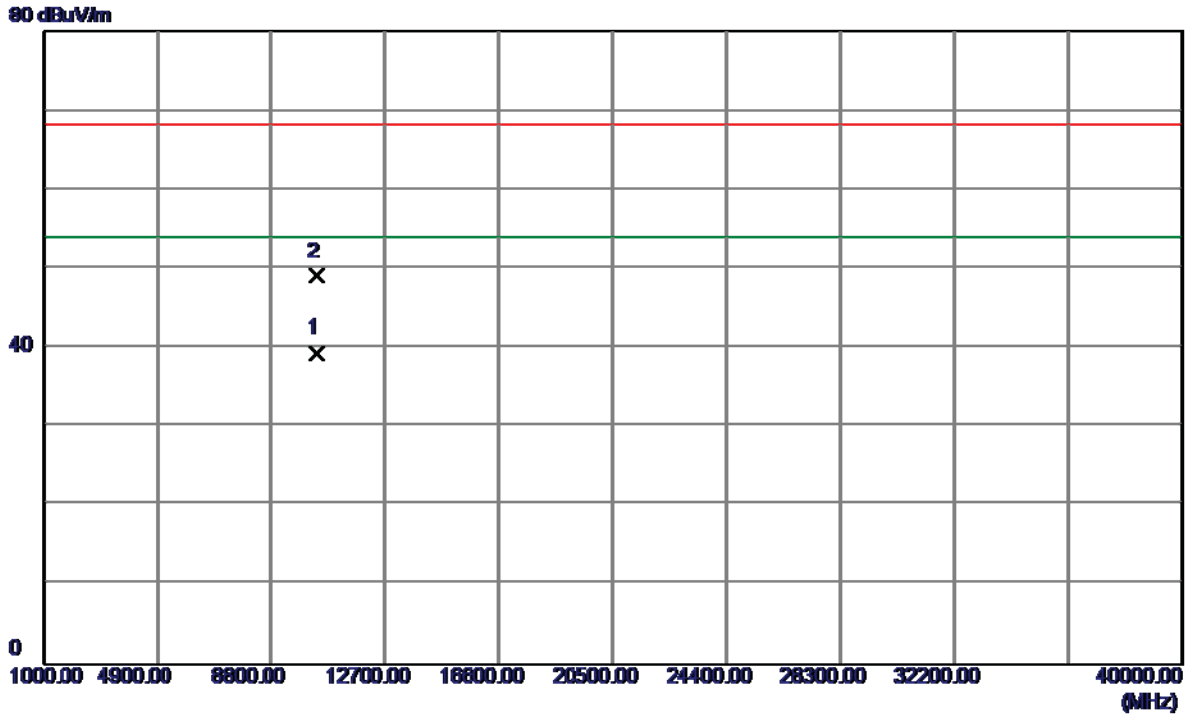


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0050	24.17	15.23	39.40	54.00	-14.60	AVG	
2	10360.2050	33.81	15.23	49.04	68.30	-19.26	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal


115 dBuV/m

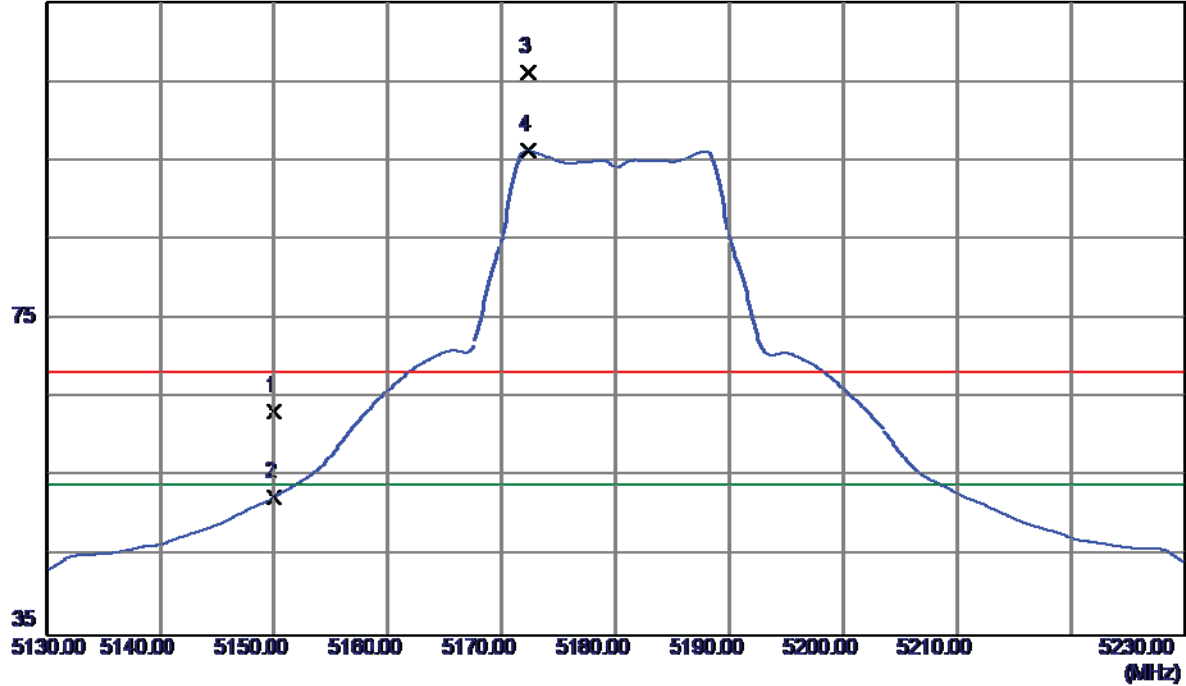

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.70	40.62	63.32	68.30	-4.98	Peak	
2	5150.0000	11.85	40.62	52.47	54.00	-1.53	AVG	
3	5172.3000	65.47	40.70	106.17	68.30	37.87	Peak	No Limit
4 *	5172.3000	55.56	40.70	96.26	54.00	42.26	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

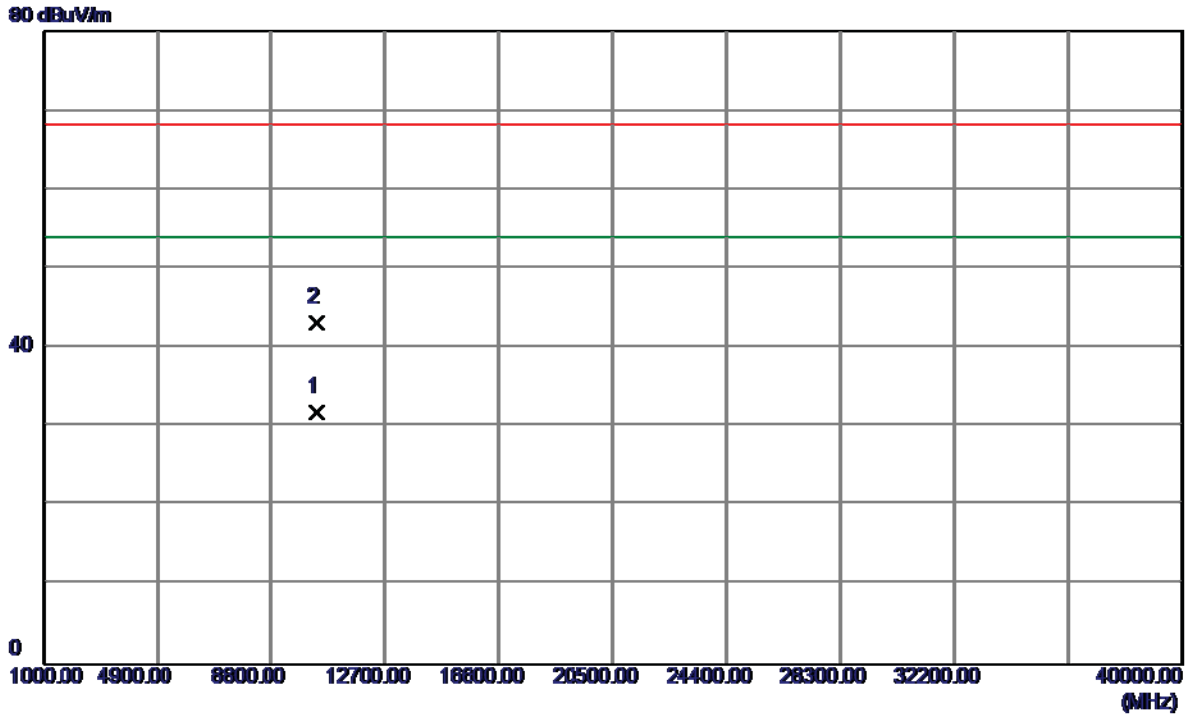

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.8000	16.56	15.23	31.79	54.00	-22.21	AVG	
2	10362.3000	27.93	15.24	43.17	68.30	-25.13	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Vertical

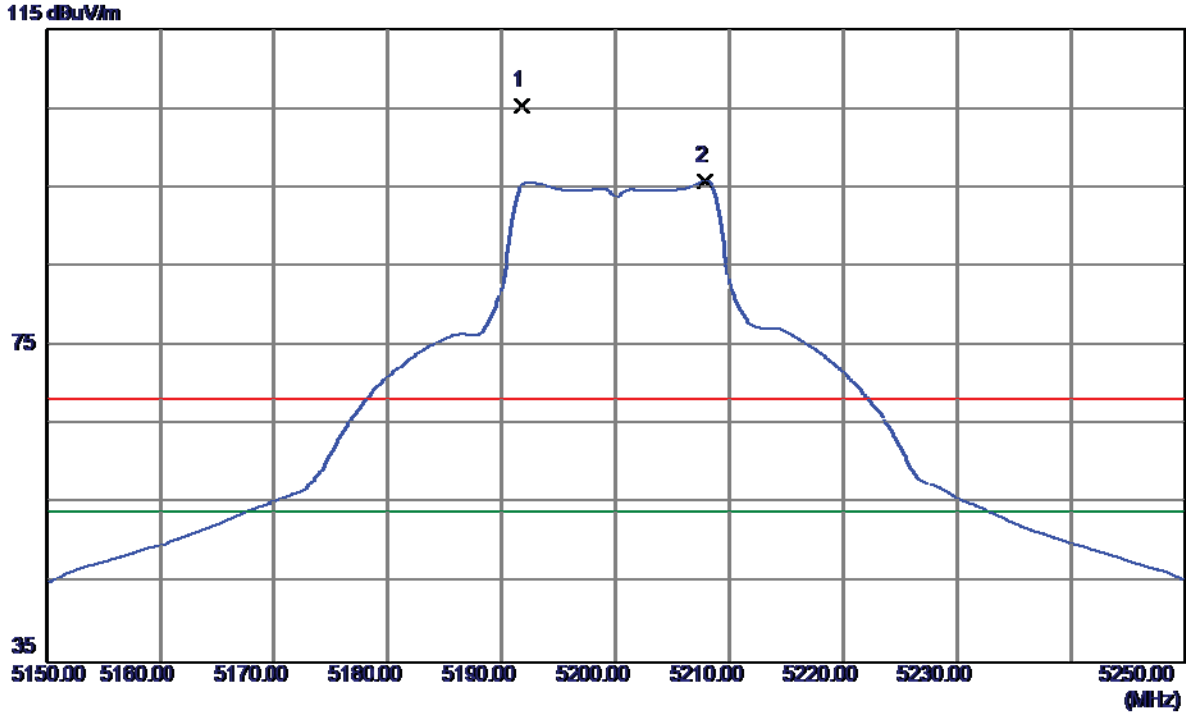

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5191.8000	64.71	40.76	105.47	68.30	37.17	Peak	No Limit
2 *	5207.9000	55.01	40.82	95.83	54.00	41.83	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Vertical

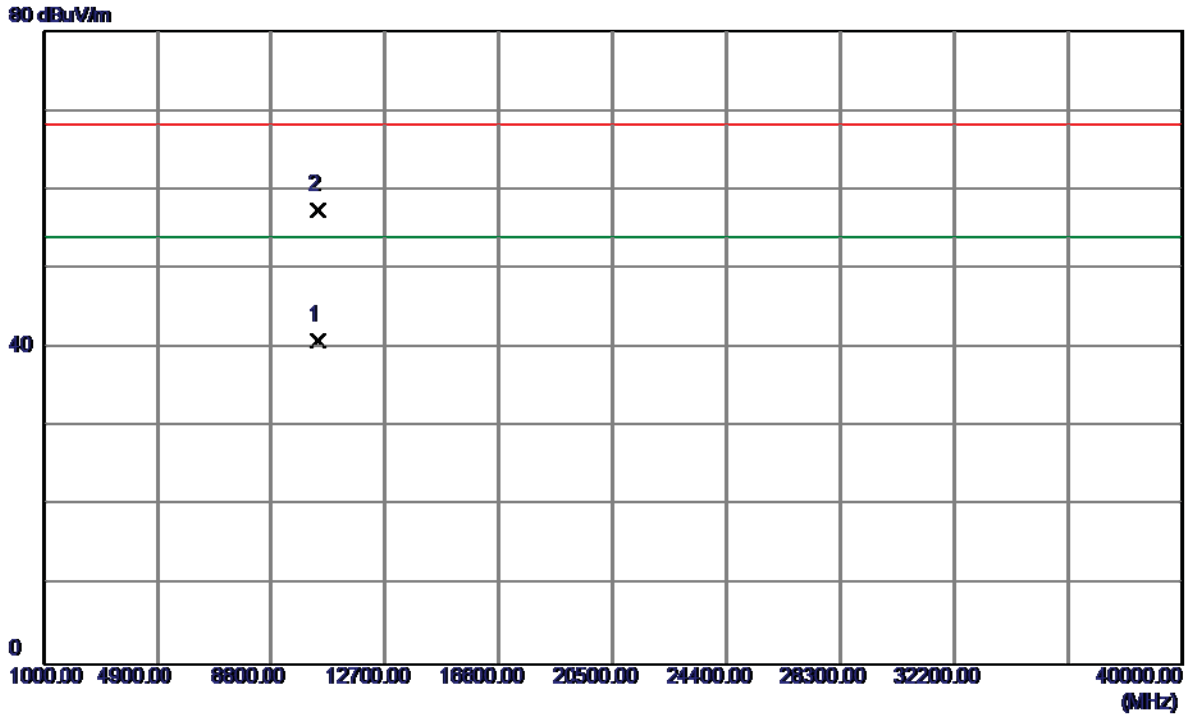

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10398.7500	25.69	15.32	41.01	54.00	-12.99	AVG	
2 *	10398.8000	42.06	15.32	57.38	68.30	-10.92	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Horizontal

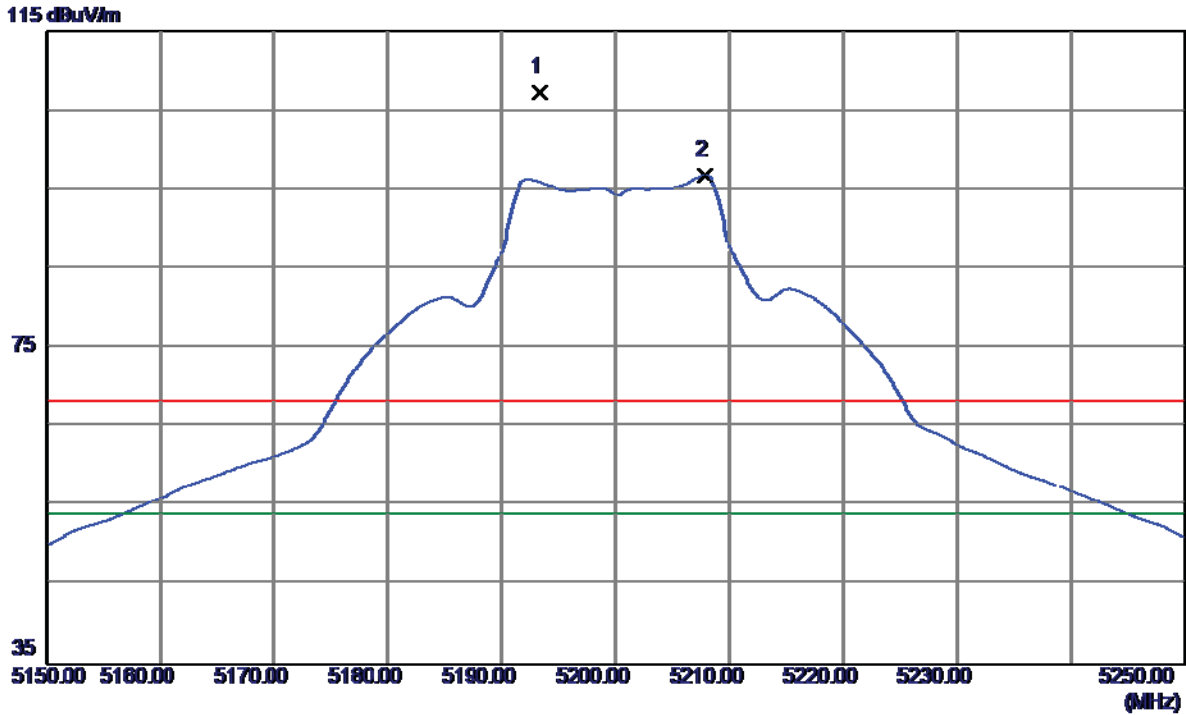

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5193.3000	66.59	40.77	107.36	68.30	39.06	Peak	No Limit
2 *	5207.9000	55.99	40.82	96.81	54.00	42.81	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz

Horizontal

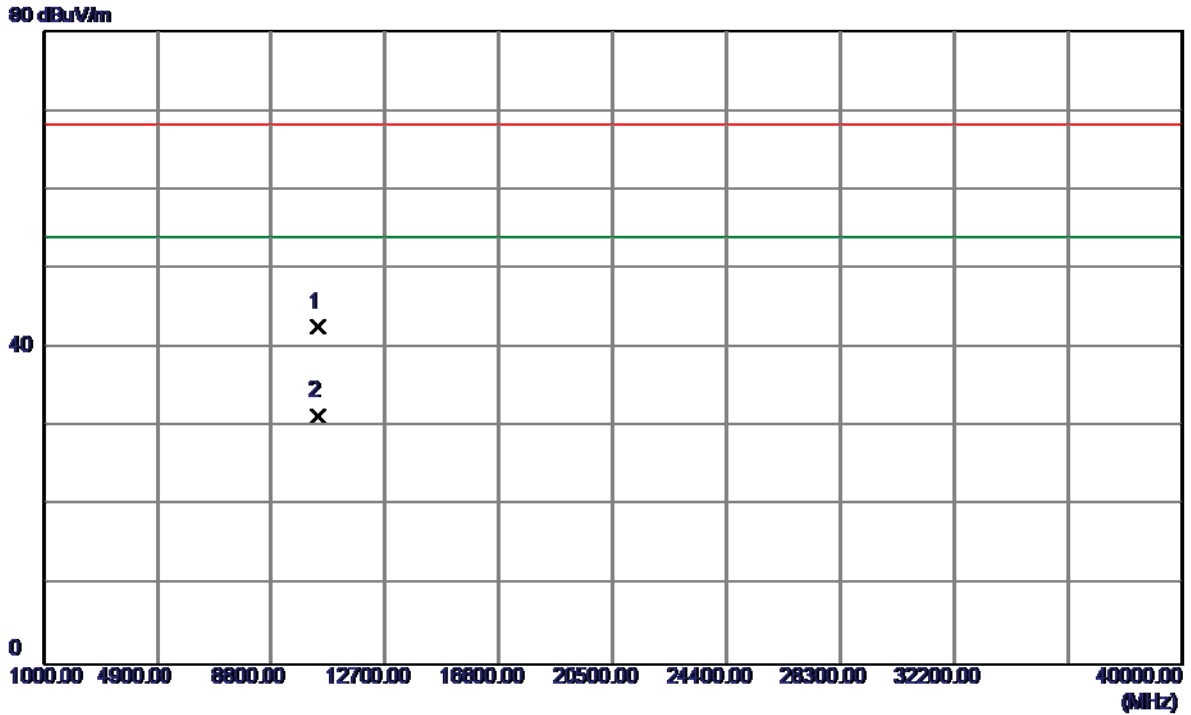


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10398.8000	27.32	15.32	42.64	68.30	-25.66	Peak	
2 *	10398.9000	16.04	15.32	31.36	54.00	-22.64	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical


115 dBuV/m

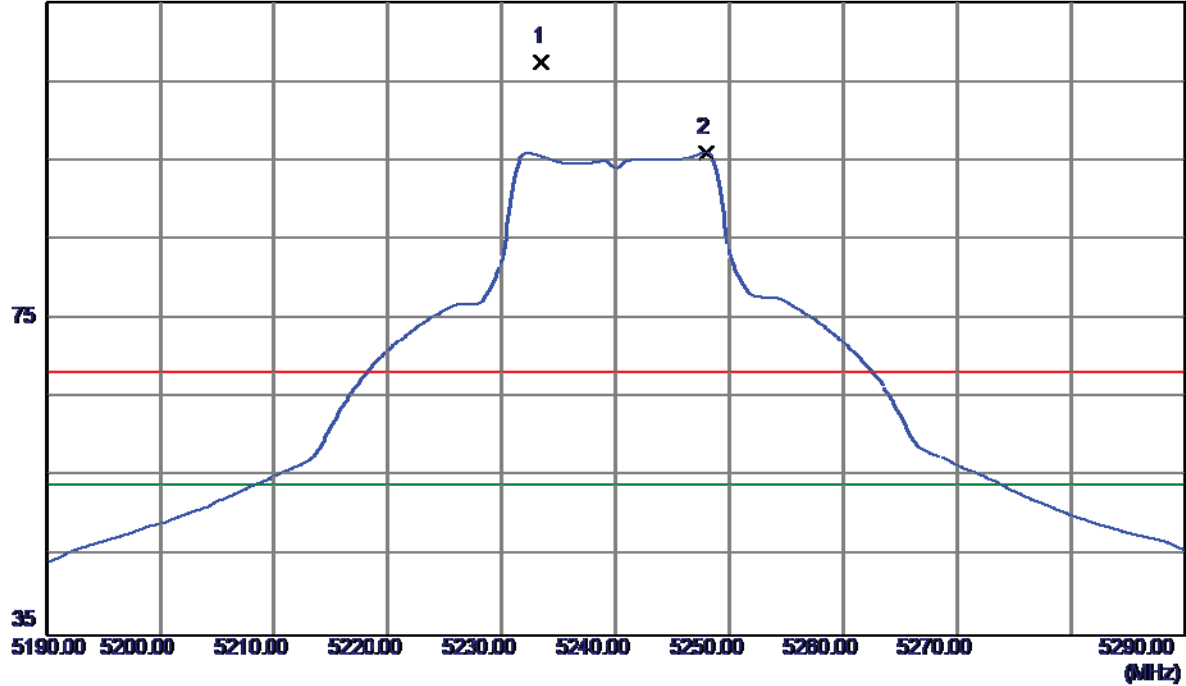

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5233.5000	66.52	40.90	107.42	68.30	39.12	Peak	No Limit
2 *	5248.0000	55.07	40.95	96.02	54.00	42.02	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

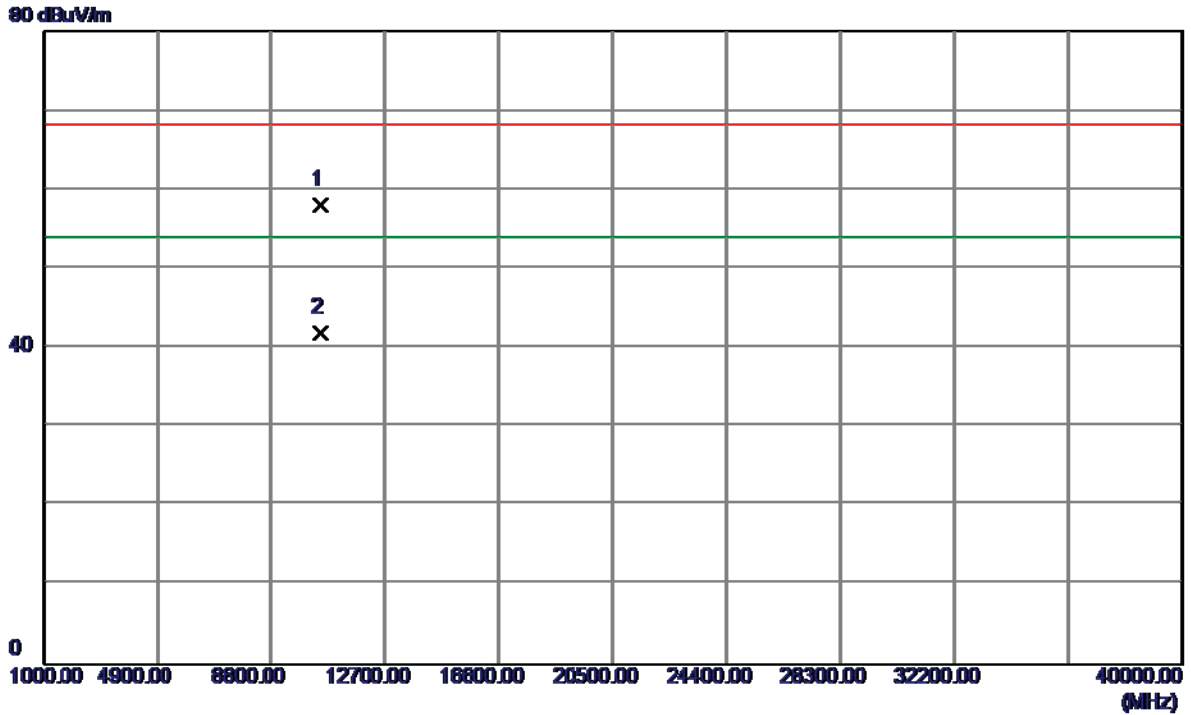


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10478.8500	42.51	15.50	58.01	68.30	-10.29	Peak	
2	10480.0500	26.36	15.50	41.86	54.00	-12.14	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal


115 dBuV/m

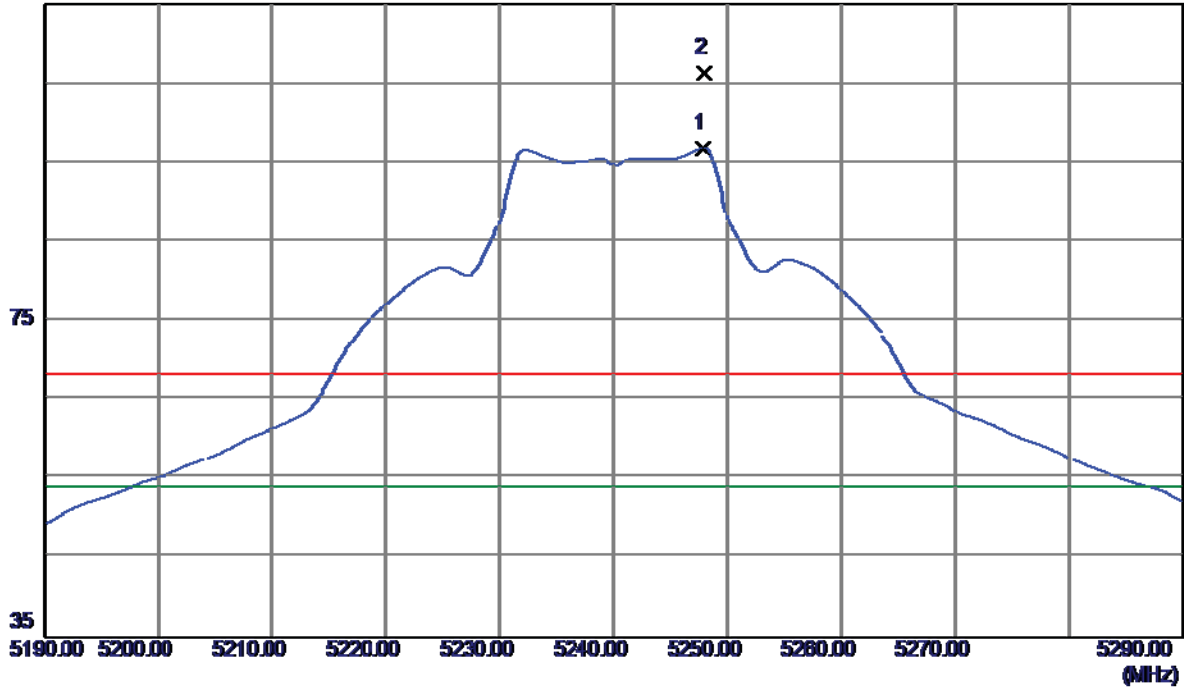

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5247.9000	55.88	40.95	96.83	54.00	42.83	AVG	No Limit
2	5248.0000	65.36	40.95	106.31	68.30	38.01	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

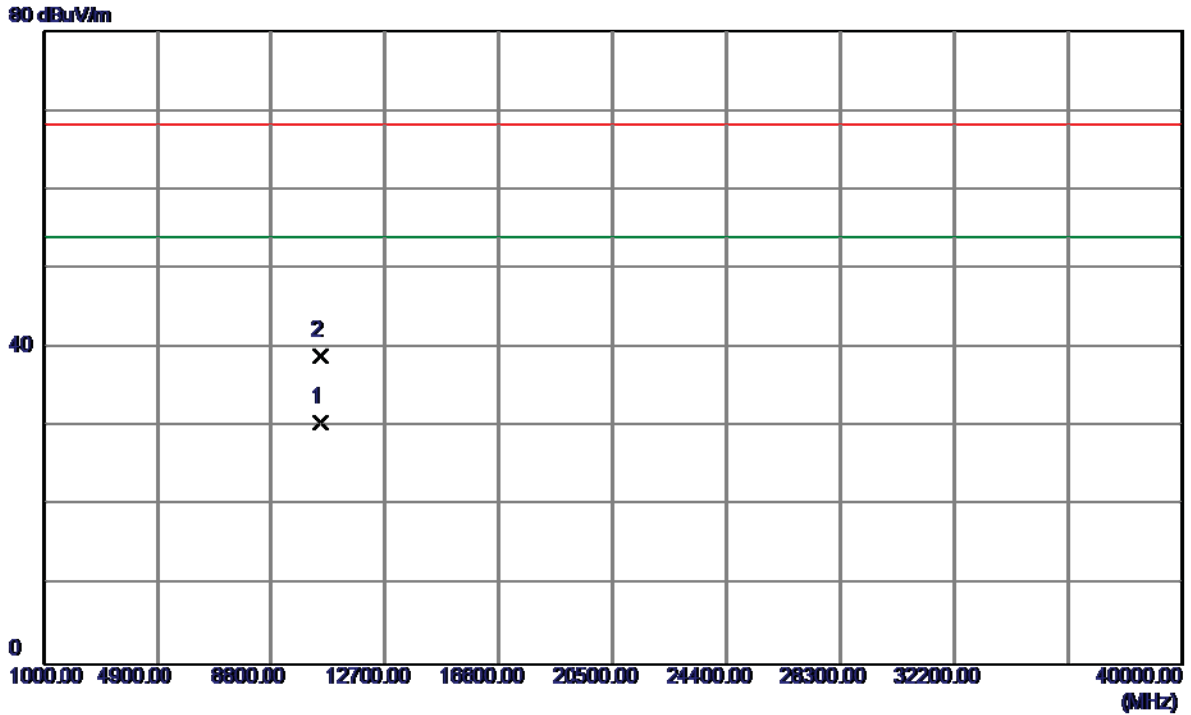


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10479.6000	15.11	15.50	30.61	54.00	-23.39	AVG	
2	10481.1000	23.59	15.51	39.10	68.30	-29.20	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical


115 dBuV/m

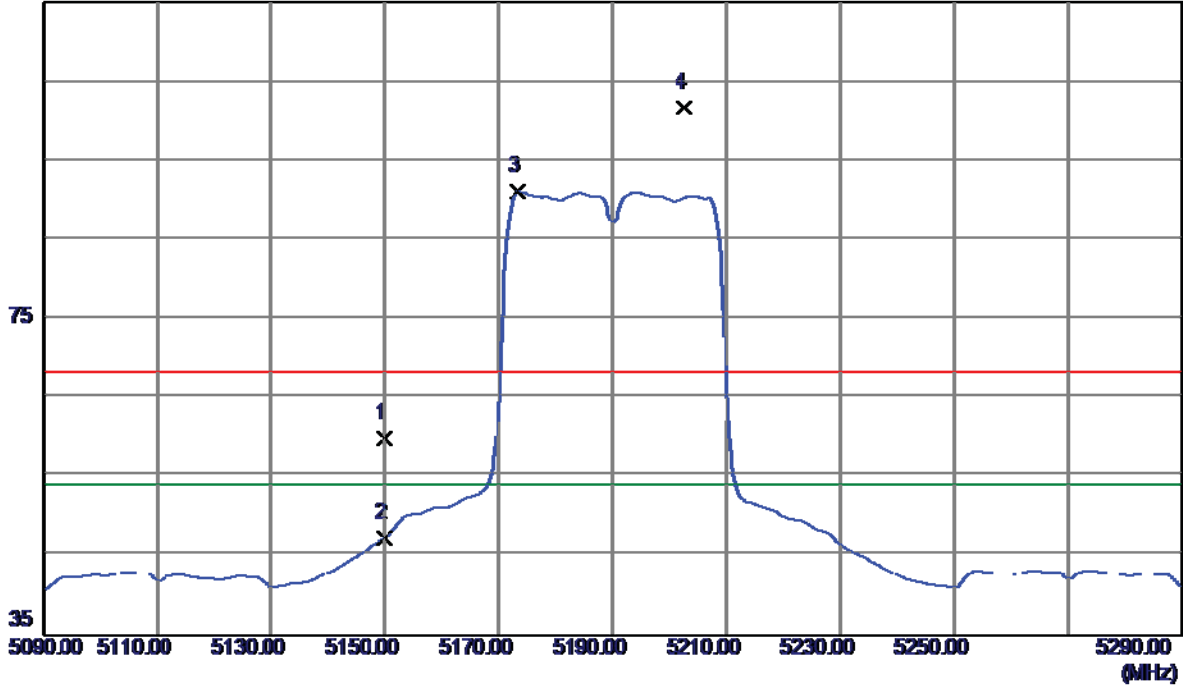

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	19.32	40.62	59.94	68.30	-8.36	Peak	
2	5150.0000	6.77	40.62	47.39	54.00	-6.61	AVG	
3 *	5173.4000	50.40	40.70	91.10	54.00	37.10	AVG	No Limit
4	5202.6000	60.89	40.80	101.69	68.30	33.39	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

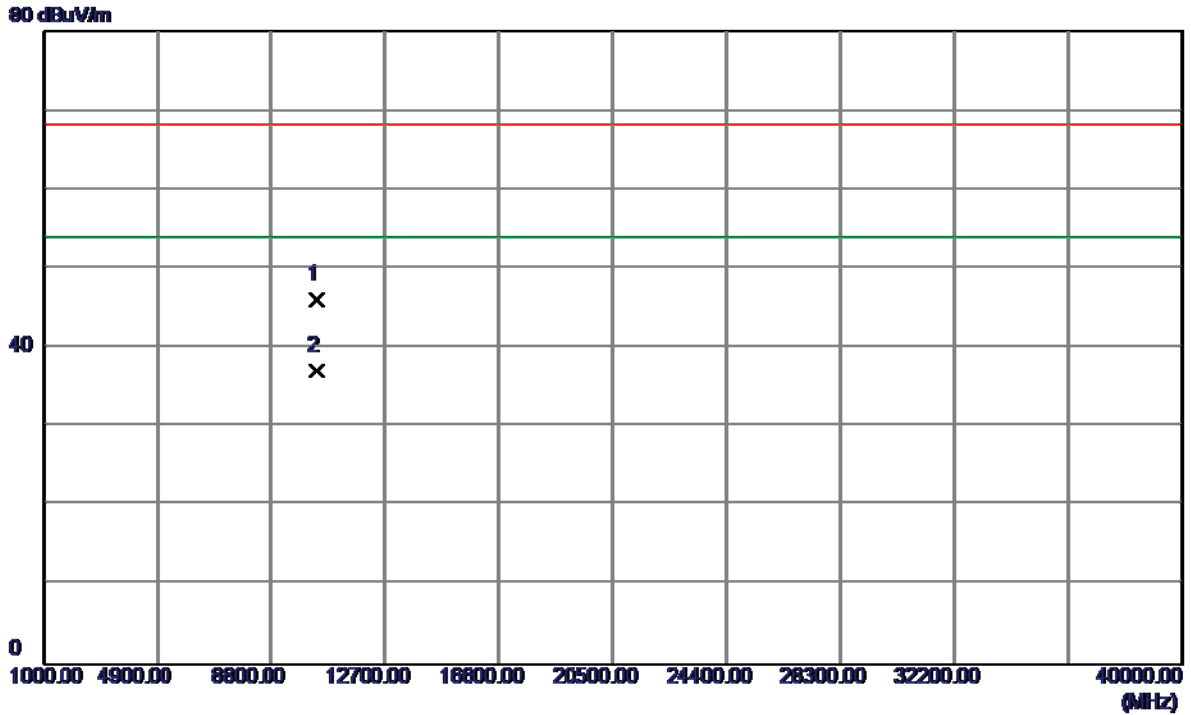


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10378.6000	30.88	15.27	46.15	68.30	-22.15	Peak	
2 *	10379.9500	21.77	15.28	37.05	54.00	-16.95	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal


115 dBuV/m

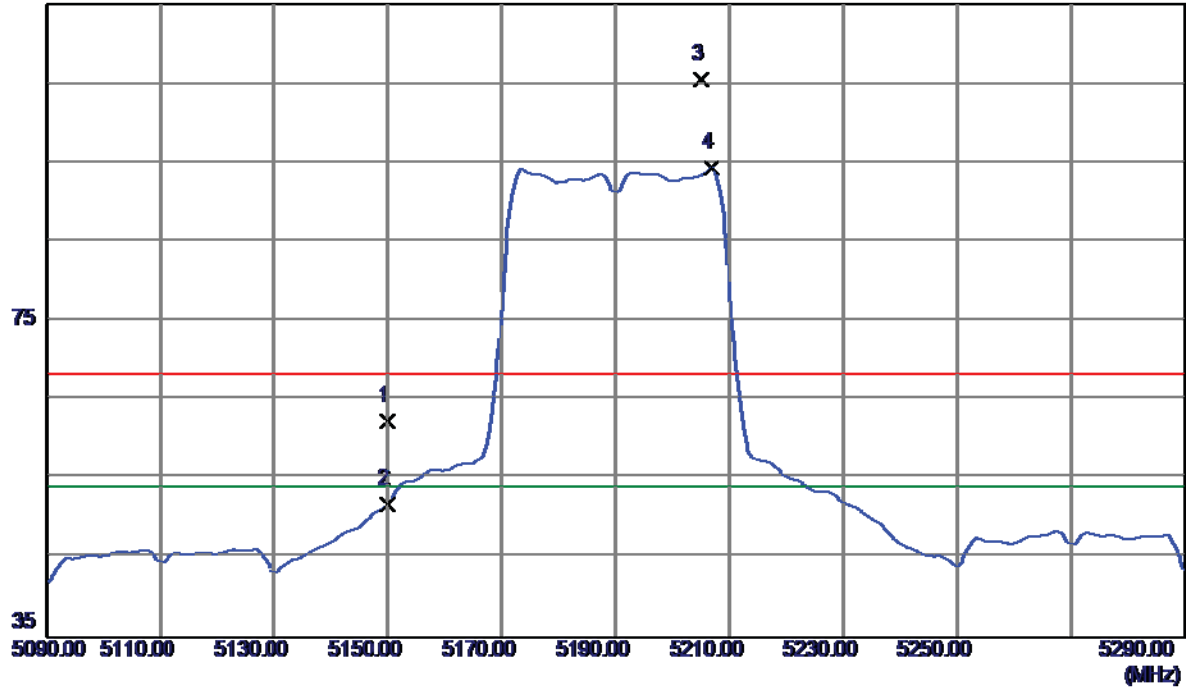

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	21.74	40.62	62.36	68.30	-5.94	Peak	
2	5150.0000	11.20	40.62	51.82	54.00	-2.18	AVG	
3	5205.2000	64.73	40.81	105.54	68.30	37.24	Peak	No Limit
4 *	5206.8000	53.62	40.81	94.43	54.00	40.43	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

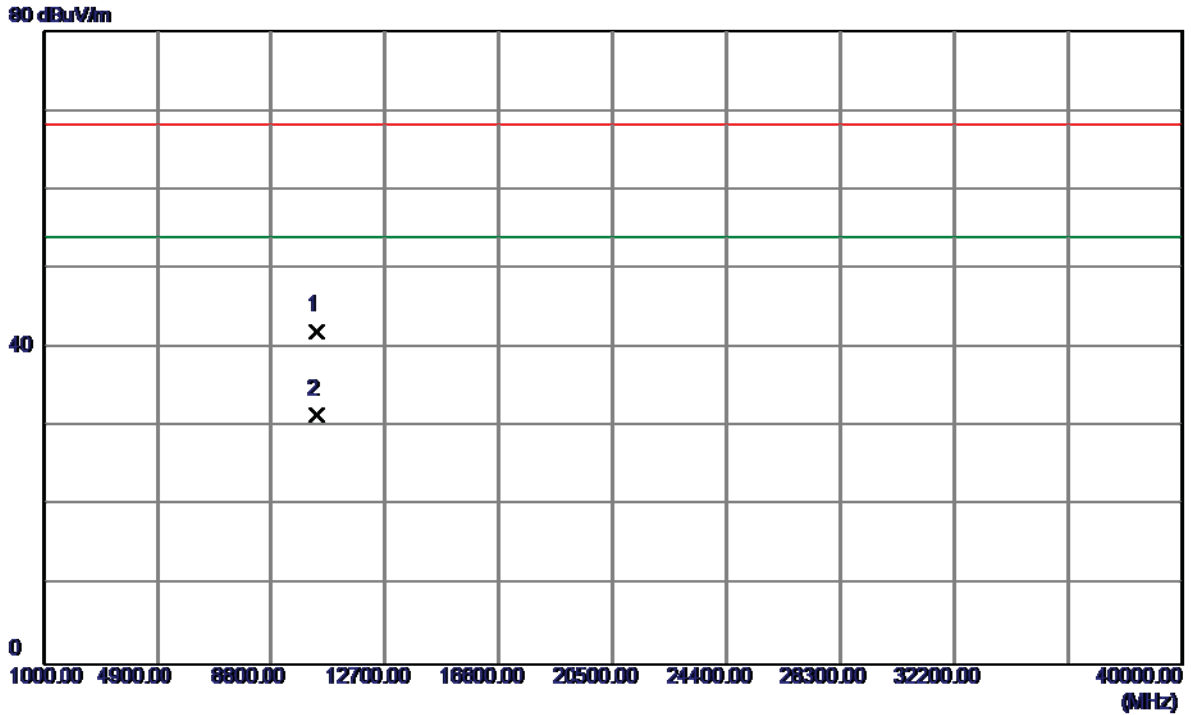


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10377.5000	26.89	15.27	42.16	68.30	-26.14	Peak	
2 *	10378.9000	16.23	15.27	31.50	54.00	-22.50	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical


115 dBuV/m

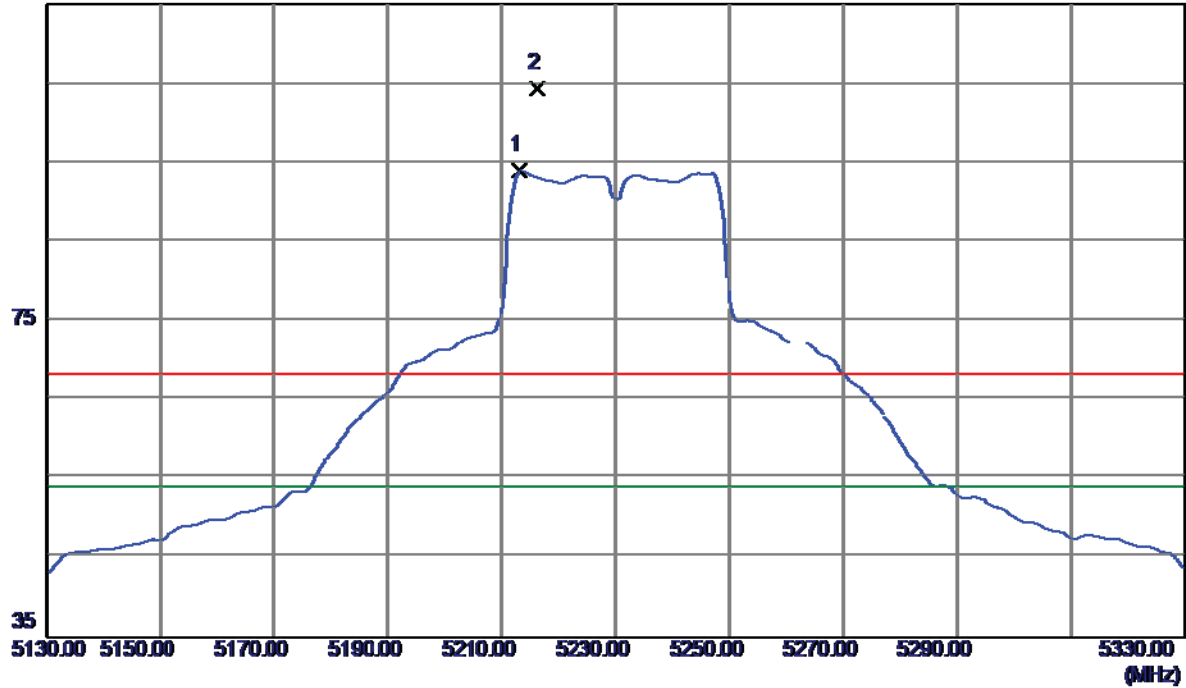

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5213.2000	53.14	40.83	93.97	54.00	39.97	AVG	No Limit
2	5216.2000	63.60	40.84	104.44	68.30	36.14	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

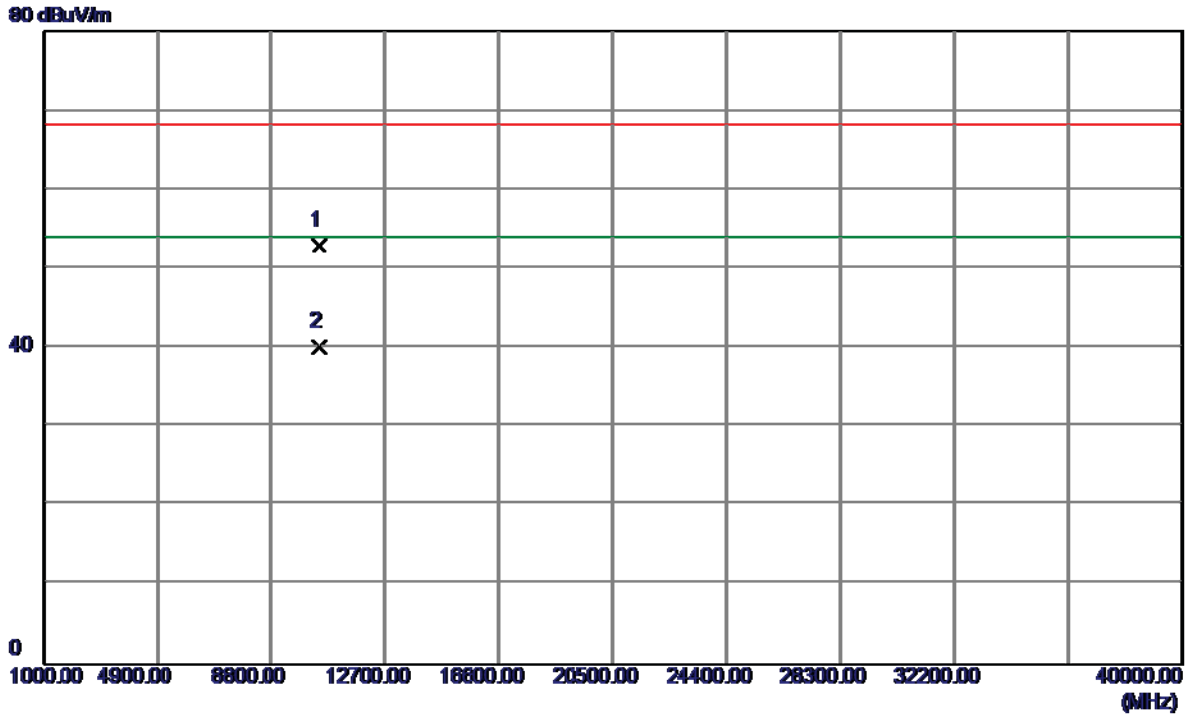


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10458.6500	37.52	15.46	52.98	68.30	-15.32	Peak	
2 *	10458.6500	24.65	15.46	40.11	54.00	-13.89	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal


115 dBuV/m

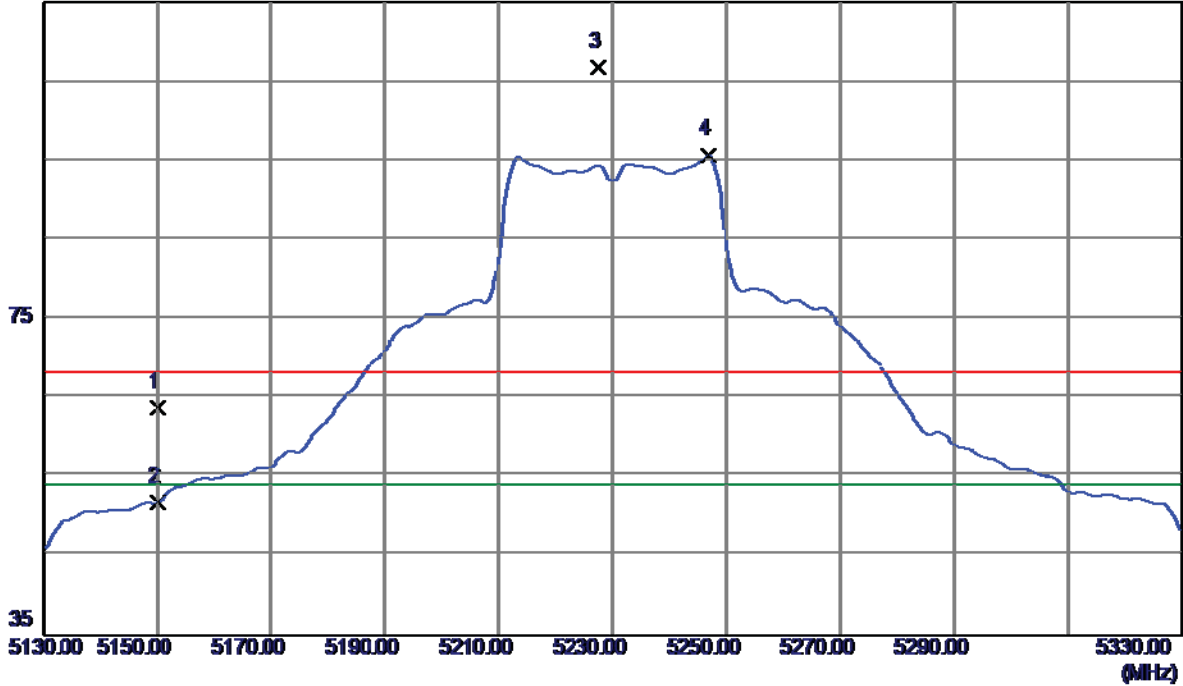

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.18	40.62	63.80	68.30	-4.50	Peak	
2	5150.0000	11.19	40.62	51.81	54.00	-2.19	AVG	
3	5227.6000	66.01	40.88	106.89	68.30	38.59	Peak	No Limit
4 *	5246.8000	54.78	40.94	95.72	54.00	41.72	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

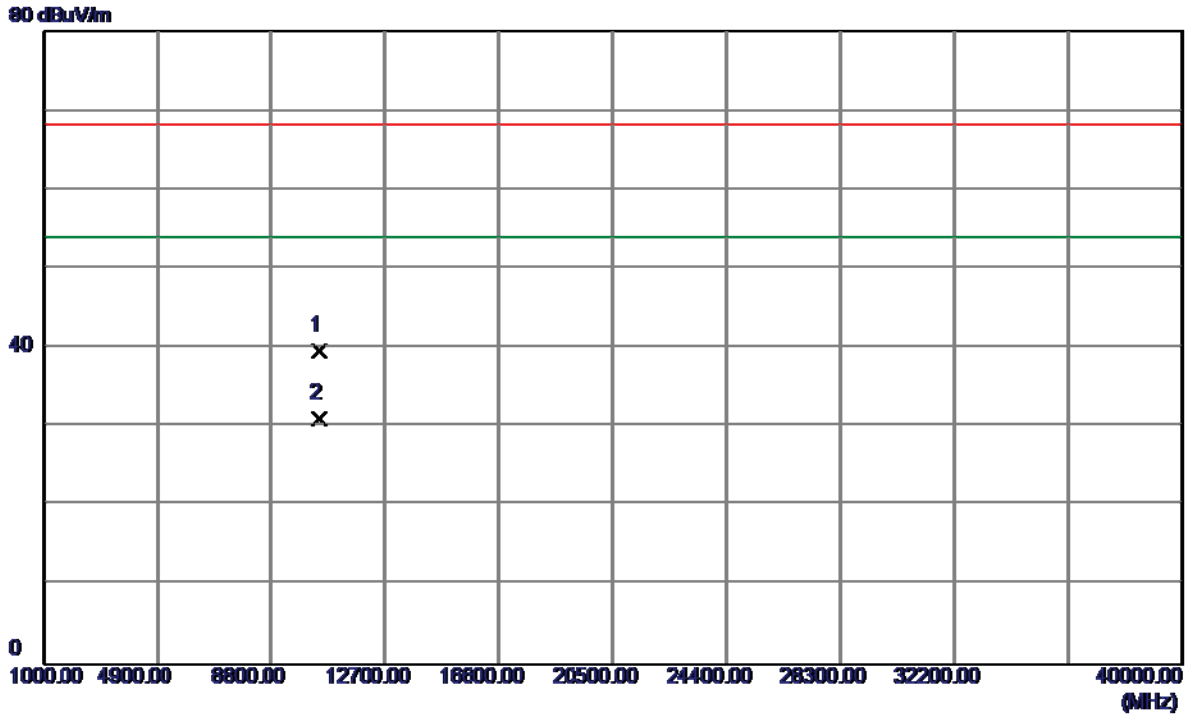

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10458.6000	24.20	15.46	39.66	68.30	-28.64	Peak	
2 *	10460.1000	15.52	15.46	30.98	54.00	-23.02	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

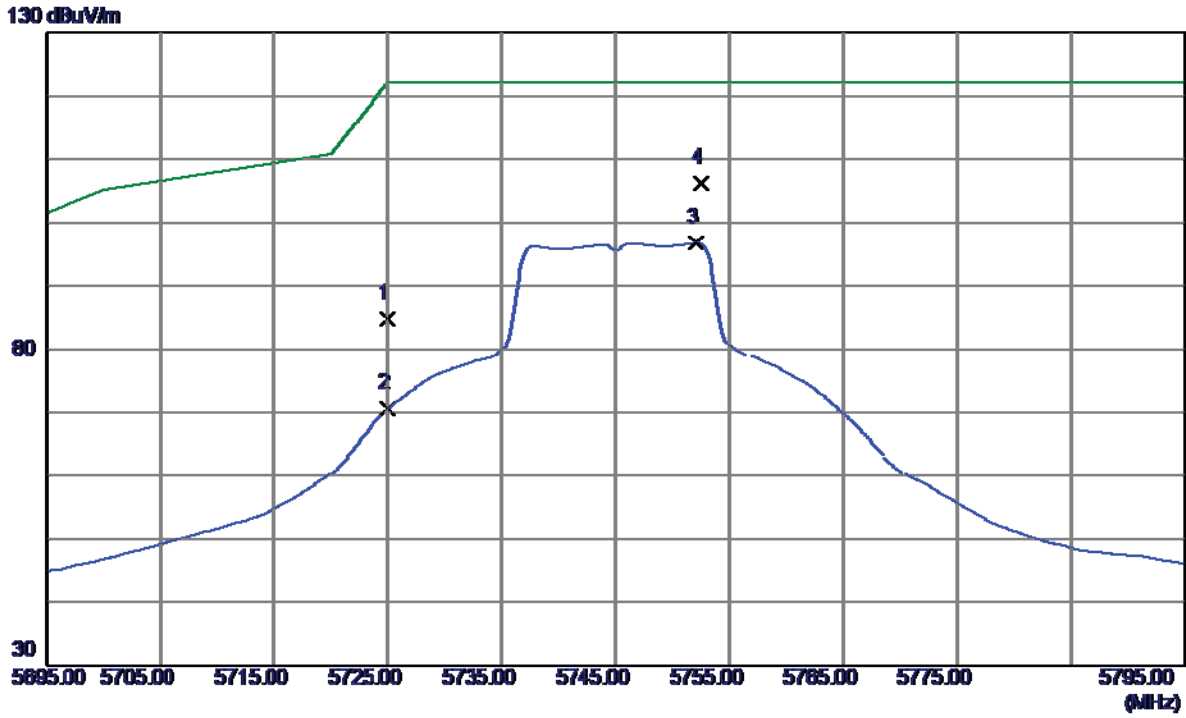

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5725.0000	42.31	42.58	84.89	122.20	-37.31	Peak	
2	5725.0000	27.94	42.58	70.52	122.20	-51.68	AVG	
3	5752.1000	54.05	42.68	96.73	122.20	-25.47	AVG	
4 *	5752.6000	63.44	42.68	106.12	122.20	-16.08	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

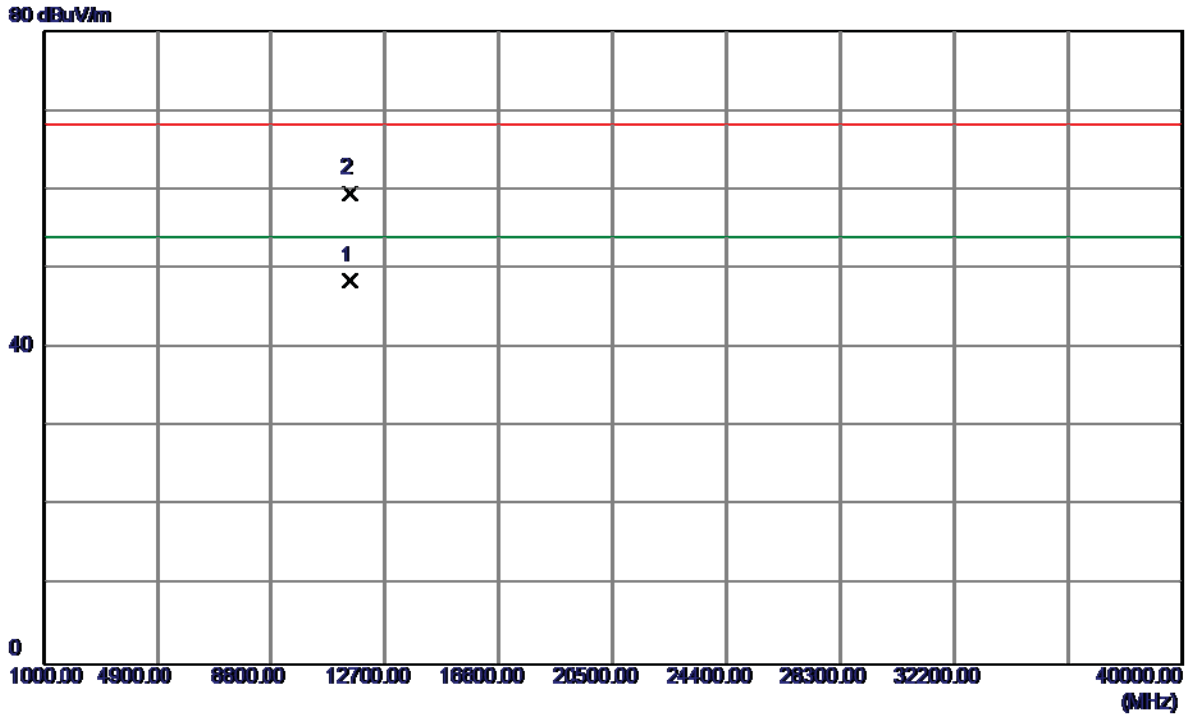

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11486.2500	32.22	16.28	48.50	54.00	-5.50	AVG	
2	11490.5500	43.25	16.28	59.53	68.30	-8.77	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

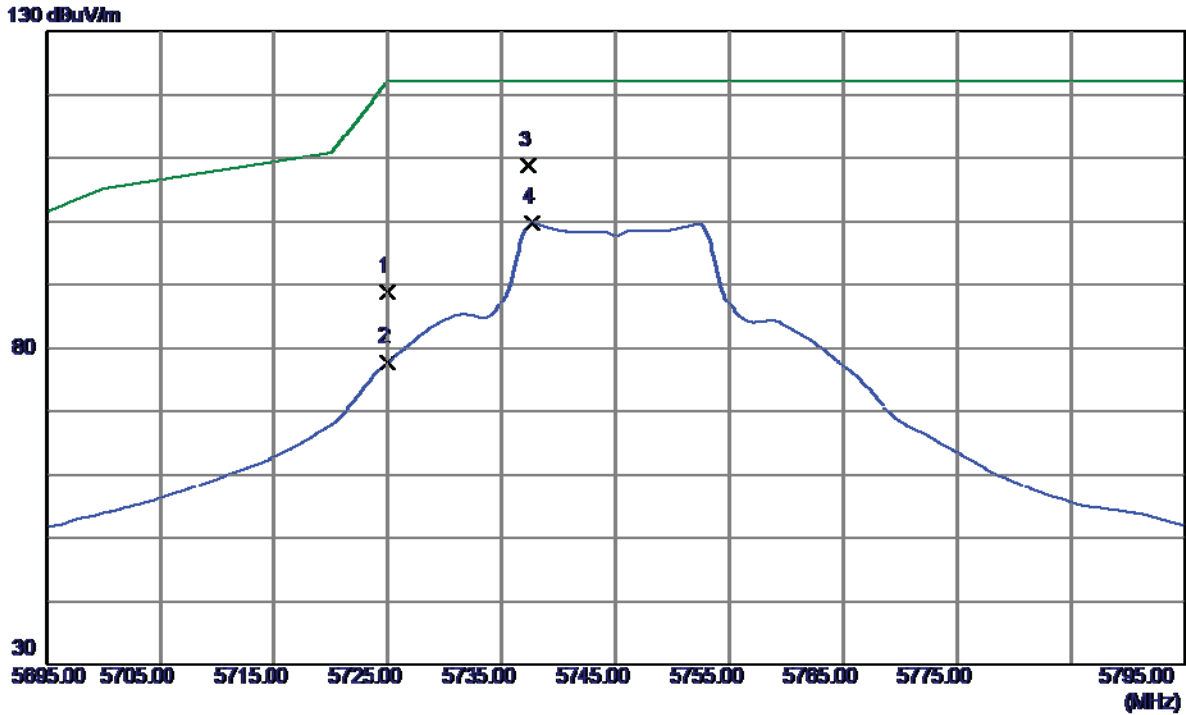

No.	Freq. (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	5725.0000	46.16	42.58	88.74	122.20	-33.46	Peak	
2	5725.0000	35.20	42.58	77.78	122.20	-44.42	Peak	
3 *	5737.3000	66.18	42.62	108.80	122.20	-13.40	Peak	
4	5737.7000	57.10	42.63	99.73	122.20	-22.47	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

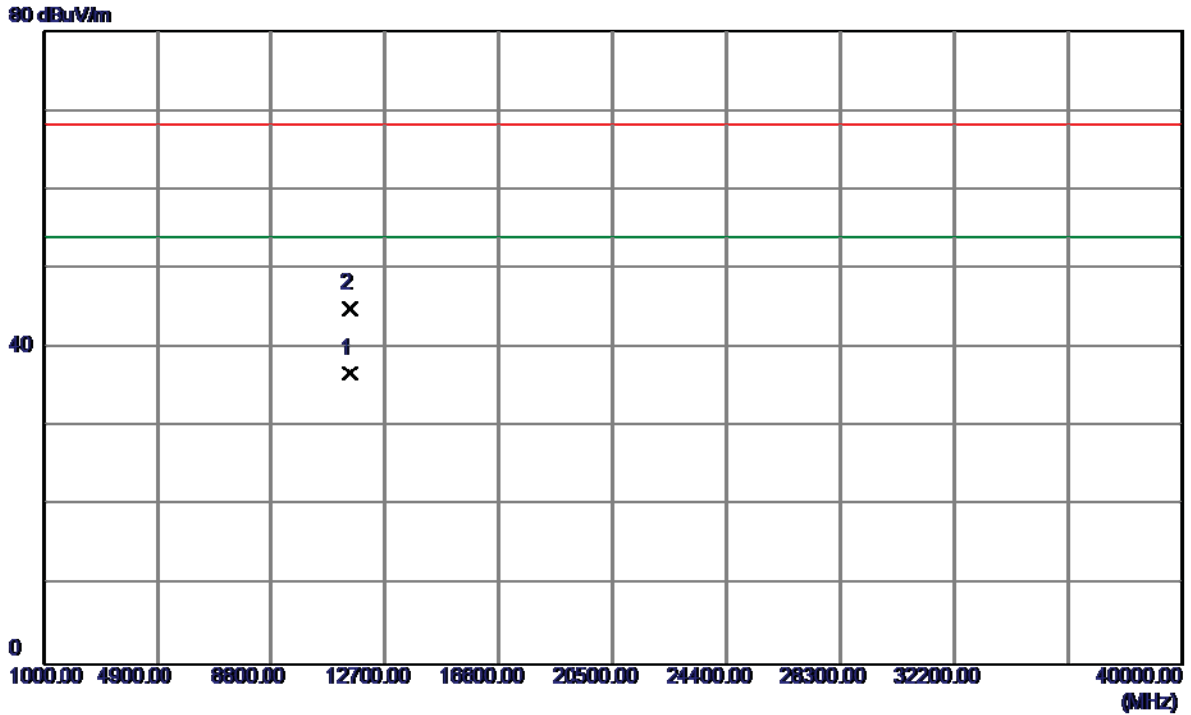

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.8000	20.53	16.28	36.81	54.00	-17.19	AVG	
2	11492.4000	28.64	16.28	44.92	68.30	-23.38	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

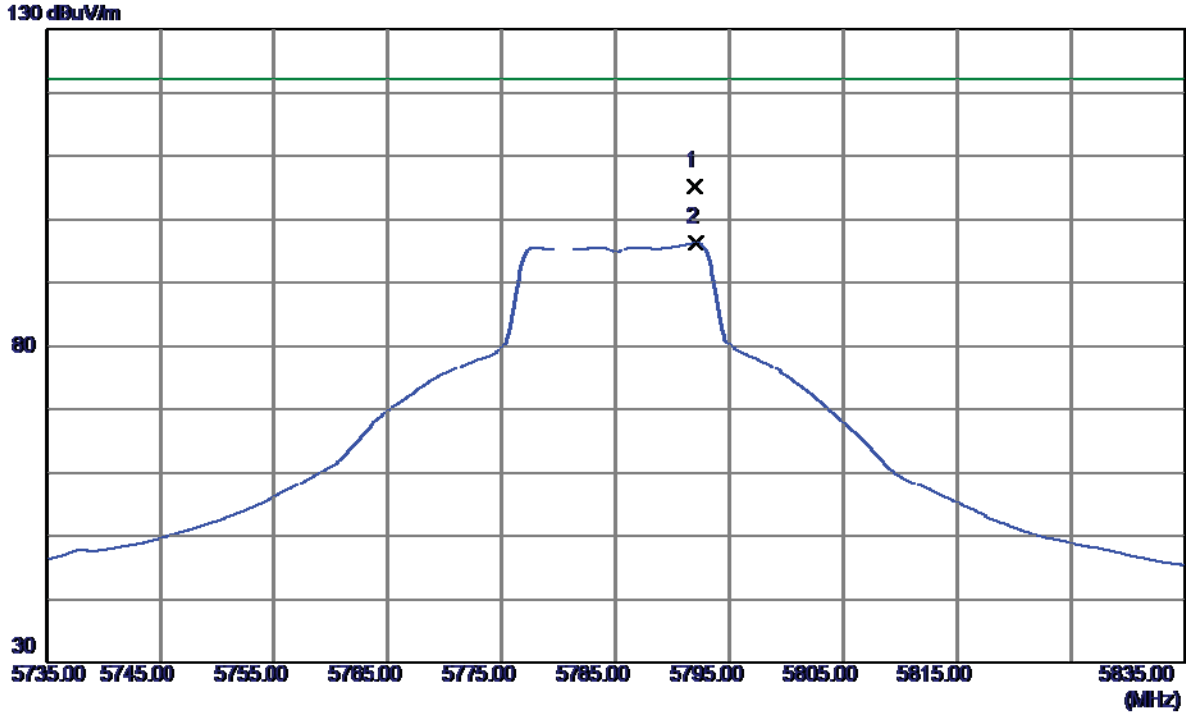

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5792.0000	62.46	42.82	105.28	122.20	-16.92	Peak	
2	5792.1000	53.52	42.82	96.34	122.20	-25.86	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

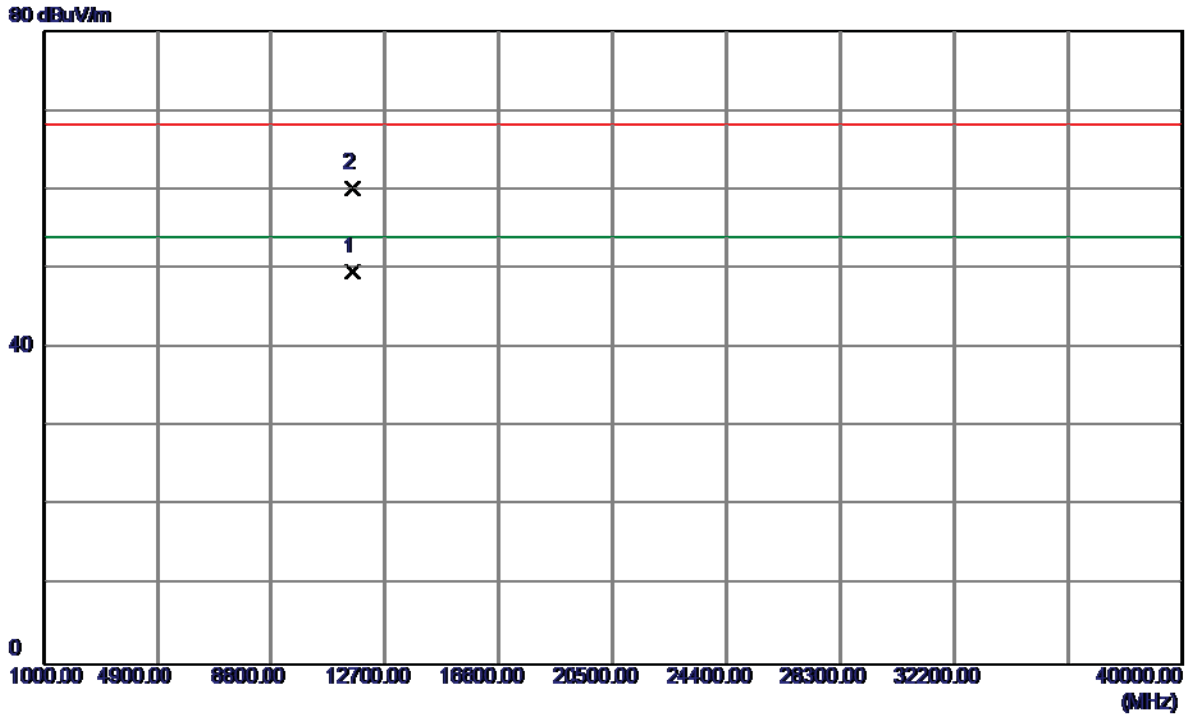

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11566.4000	33.24	16.36	49.60	54.00	-4.40	AVG	
2	11577.3500	43.75	16.37	60.12	68.30	-8.18	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Horizontal

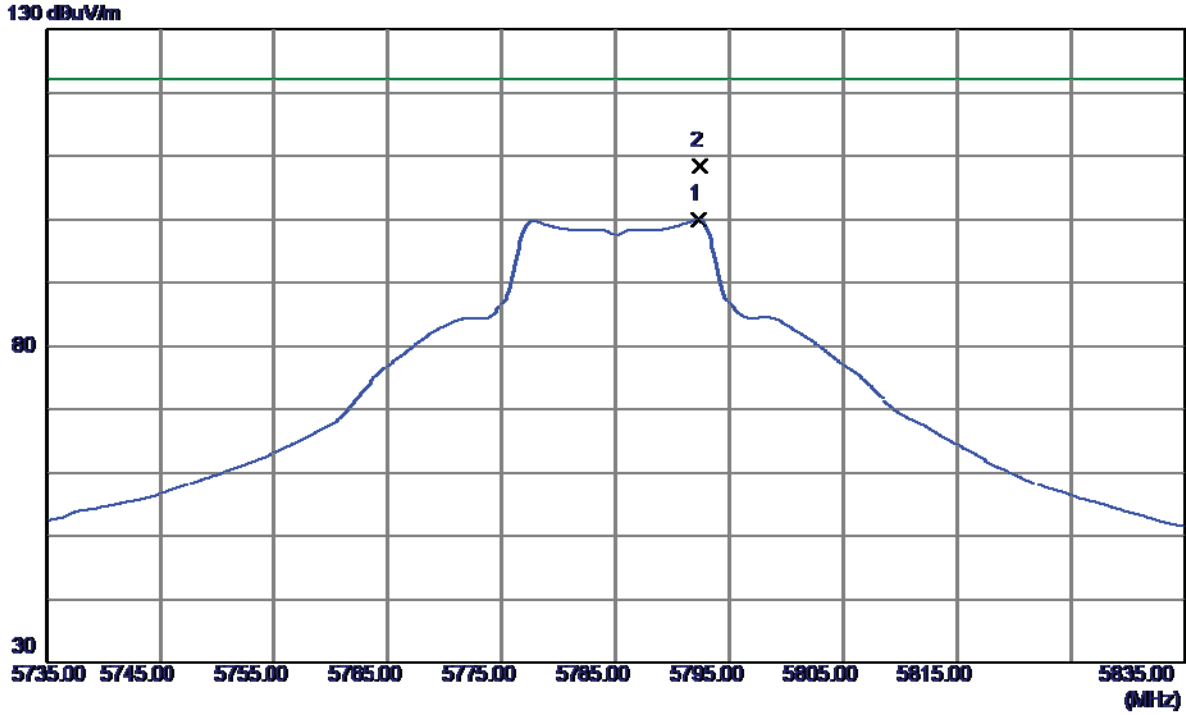

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5792.3000	57.15	42.82	99.97	122.20	-22.23	AVG	
2 *	5792.4000	65.63	42.82	108.45	122.20	-13.75	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Horizontal

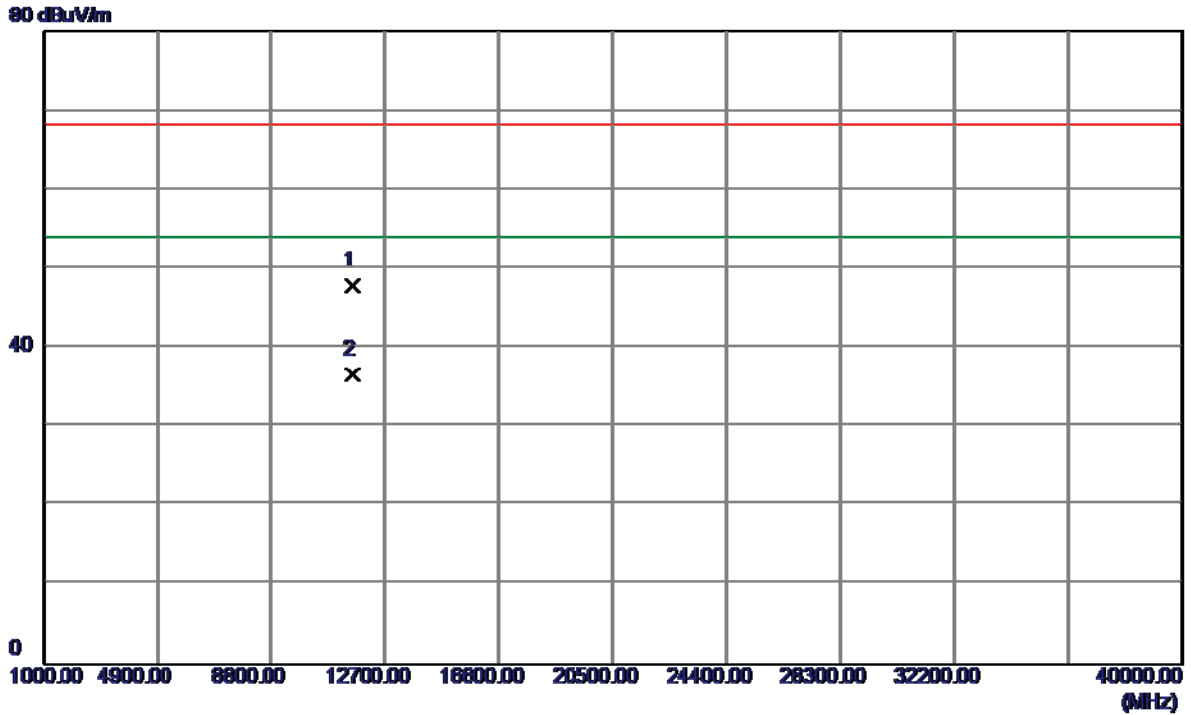

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.9000	31.52	16.36	47.88	68.30	-20.42	Peak	
2 *	11572.1000	20.28	16.36	36.64	54.00	-17.36	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

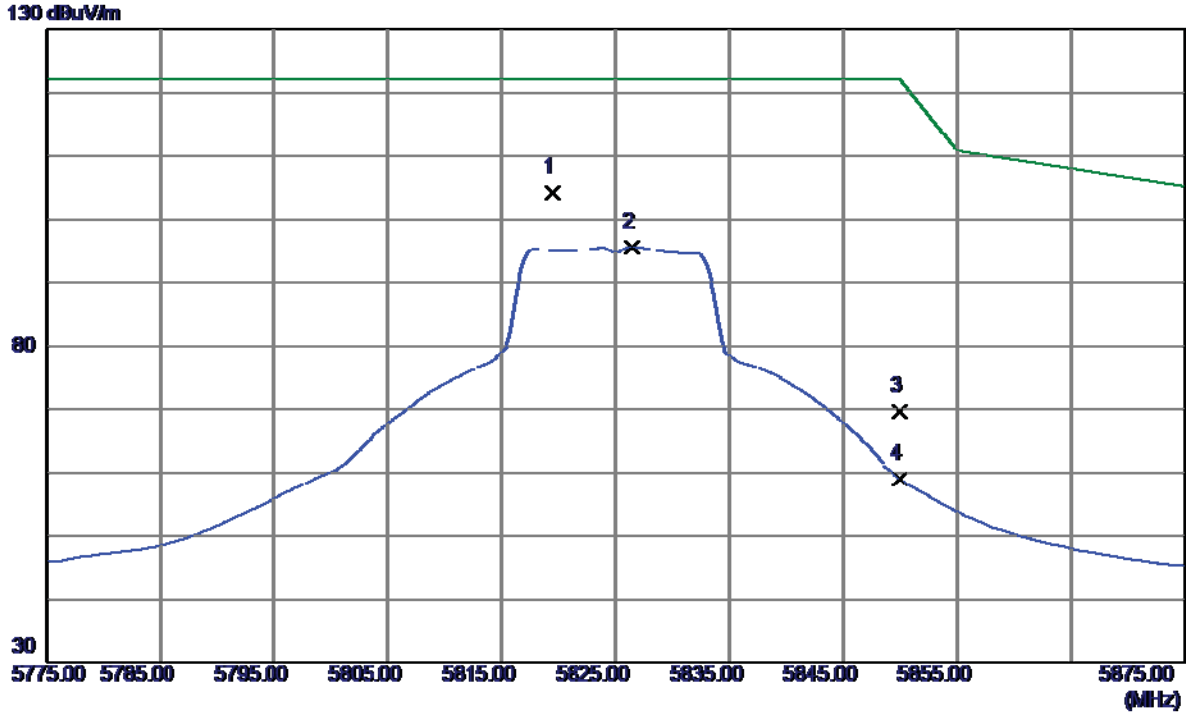

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5819.4000	61.24	42.92	104.16	122.20	-18.04	Peak	
2	5826.4000	52.75	42.94	95.69	122.20	-26.51	AVG	
3	5850.0000	26.66	43.03	69.69	122.20	-52.51	Peak	
4	5850.0000	15.91	43.03	58.94	122.20	-63.26	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

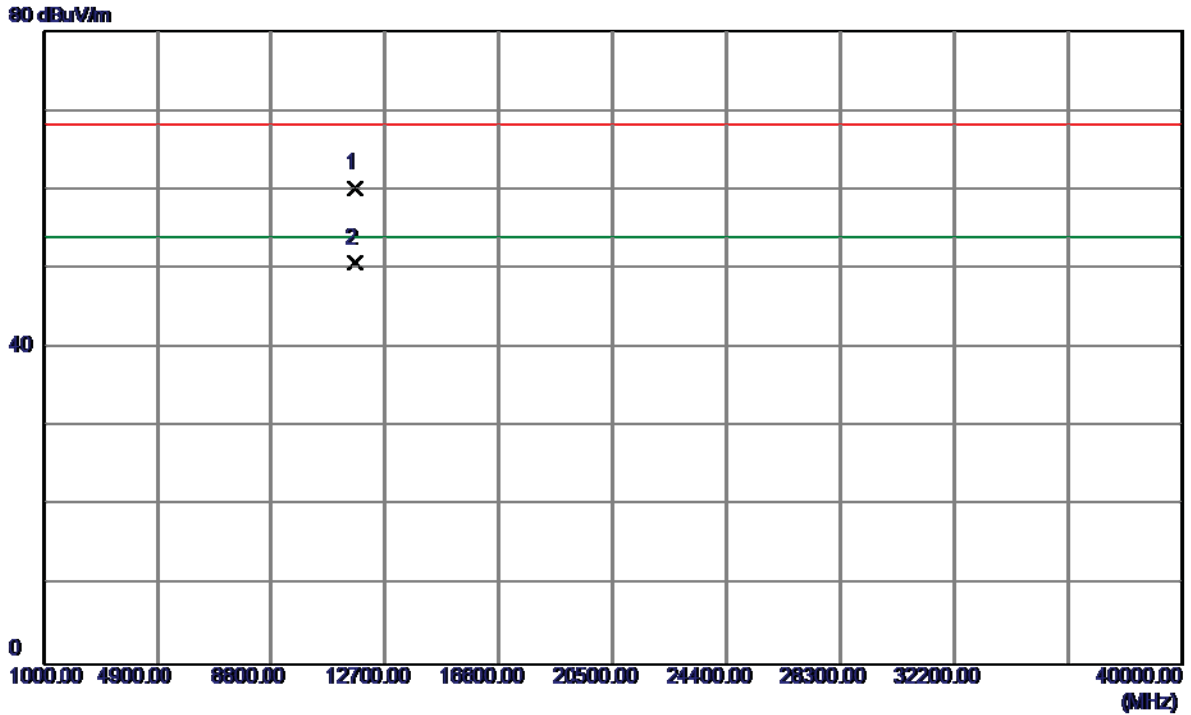

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11646.2000	43.69	16.45	60.14	68.30	-8.16	Peak	
2 *	11649.8500	34.28	16.45	50.73	54.00	-3.27	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

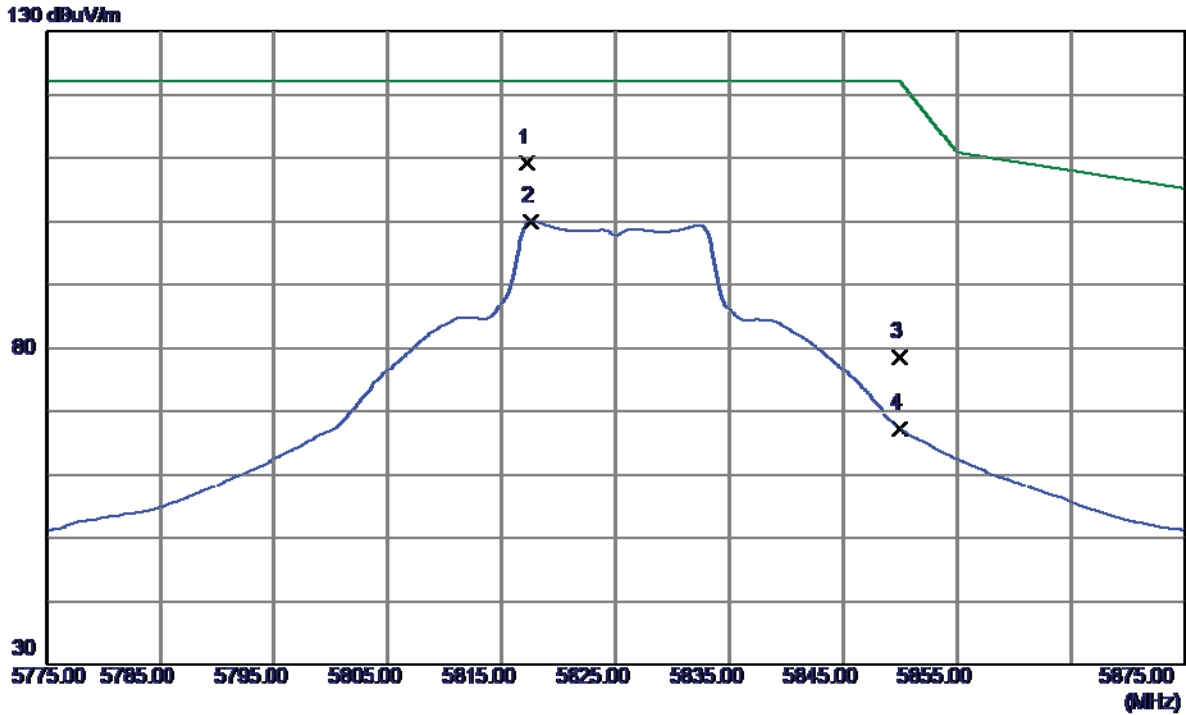

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5817.2000	66.28	42.91	109.19	122.20	-13.01	Peak	
2	5817.6000	57.19	42.91	100.10	122.20	-22.10	AVG	
3	5850.0000	35.65	43.03	78.68	122.20	-43.52	Peak	
4	5850.0000	24.20	43.03	67.23	122.20	-54.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

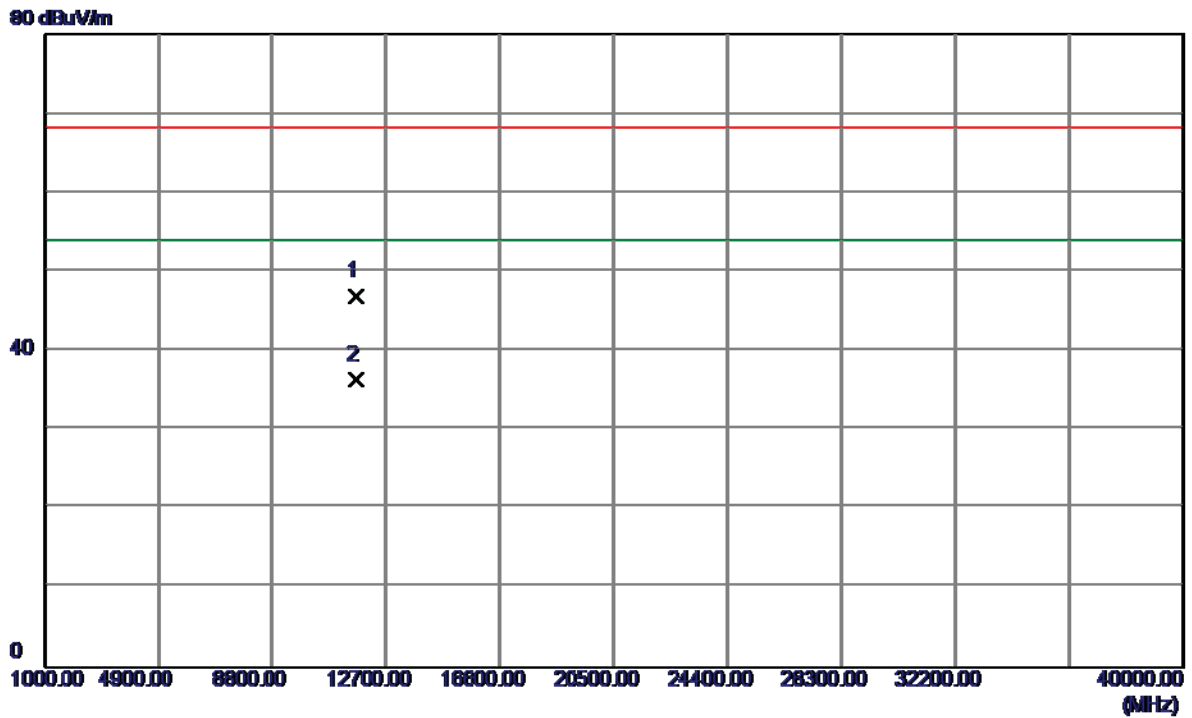

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11652.4000	30.47	16.45	46.92	68.30	-21.38	Peak	
2 *	11655.2000	19.79	16.46	36.25	54.00	-17.75	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

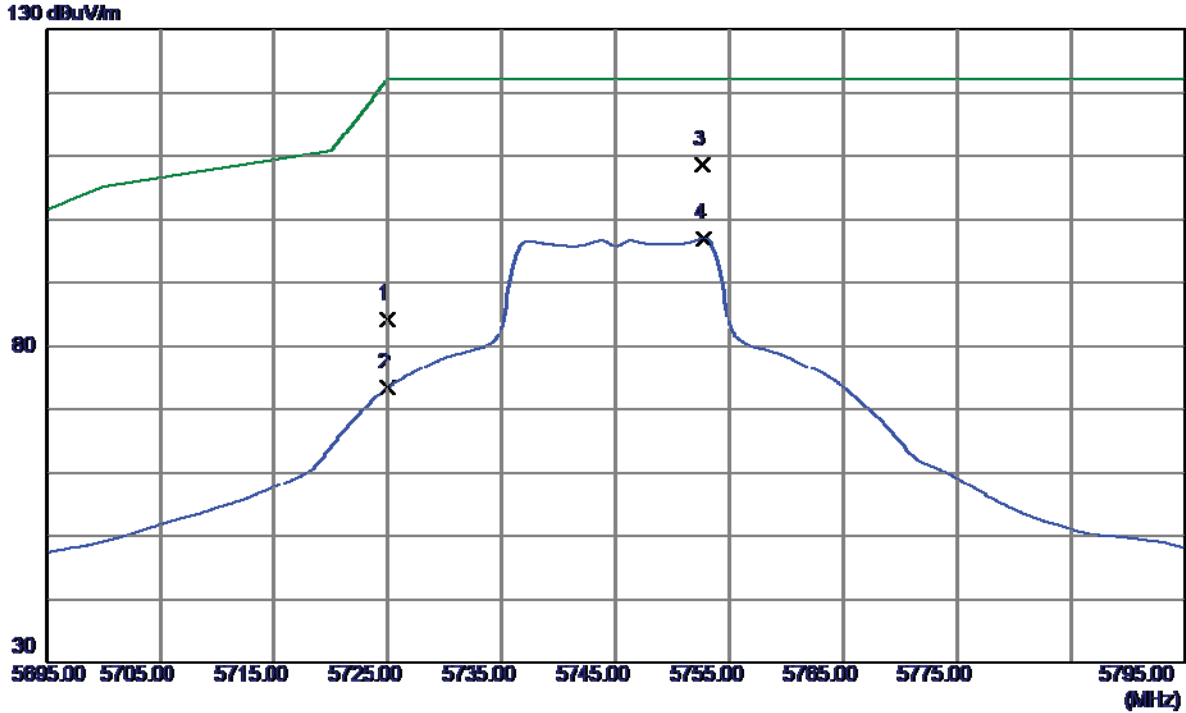

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5725.0000	41.66	42.58	84.24	122.20	-37.96	Peak	
2	5725.0000	30.79	42.58	73.37	122.20	-48.83	AVG	
3 *	5752.7000	65.90	42.68	108.58	122.20	-13.62	Peak	
4	5752.8000	54.41	42.68	97.09	122.20	-25.11	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

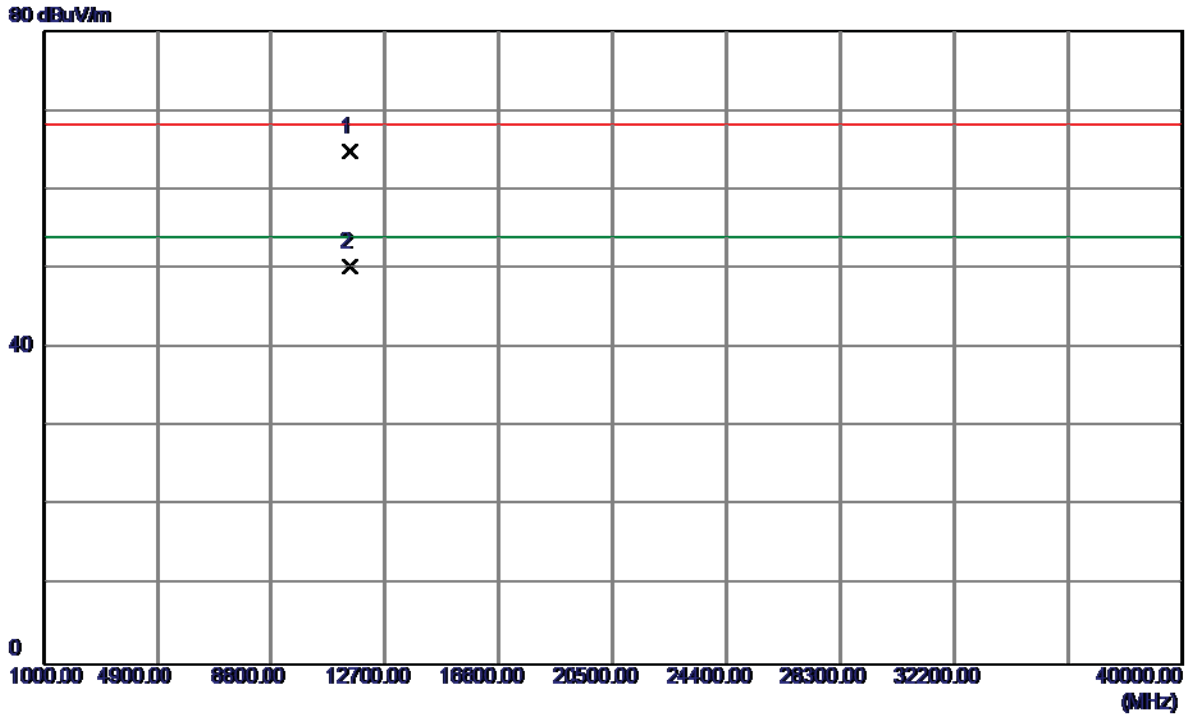

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11488.6970	48.53	16.28	64.81	68.30	-3.49	Peak	
2	11488.9480	34.03	16.28	50.31	54.00	-3.69	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

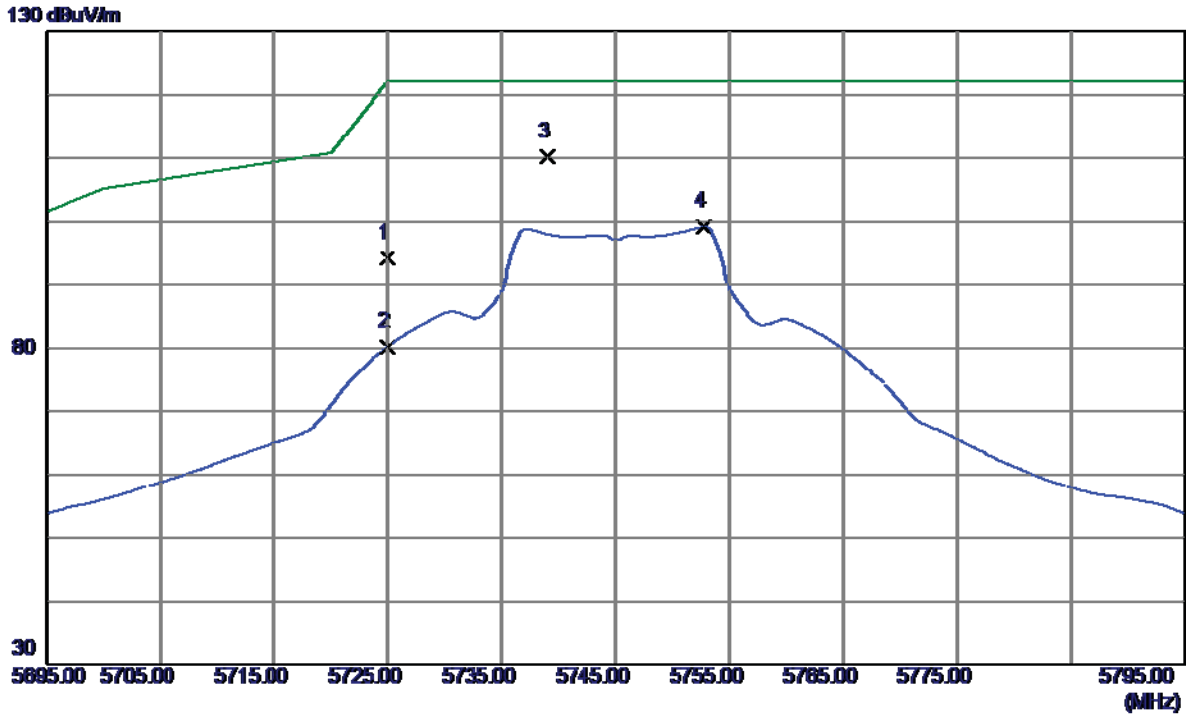

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5725.0000	51.53	42.58	94.11	122.20	-28.09	Peak	
2	5725.0000	37.71	42.58	80.29	122.20	-41.91	AVG	
3 *	5739.0000	67.52	42.63	110.15	122.20	-12.05	Peak	
4	5752.8000	56.49	42.68	99.17	122.20	-23.03	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

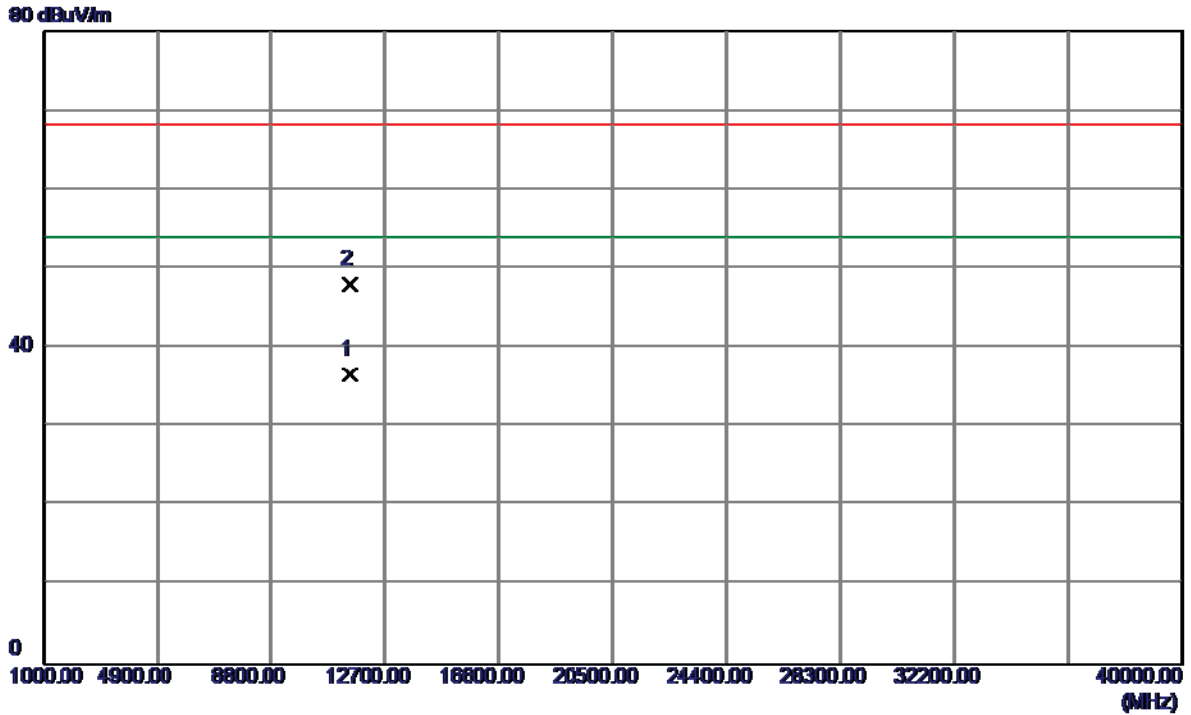

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.4000	20.35	16.28	36.63	54.00	-17.37	AVG	
2	11491.1000	31.77	16.28	48.05	68.30	-20.25	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

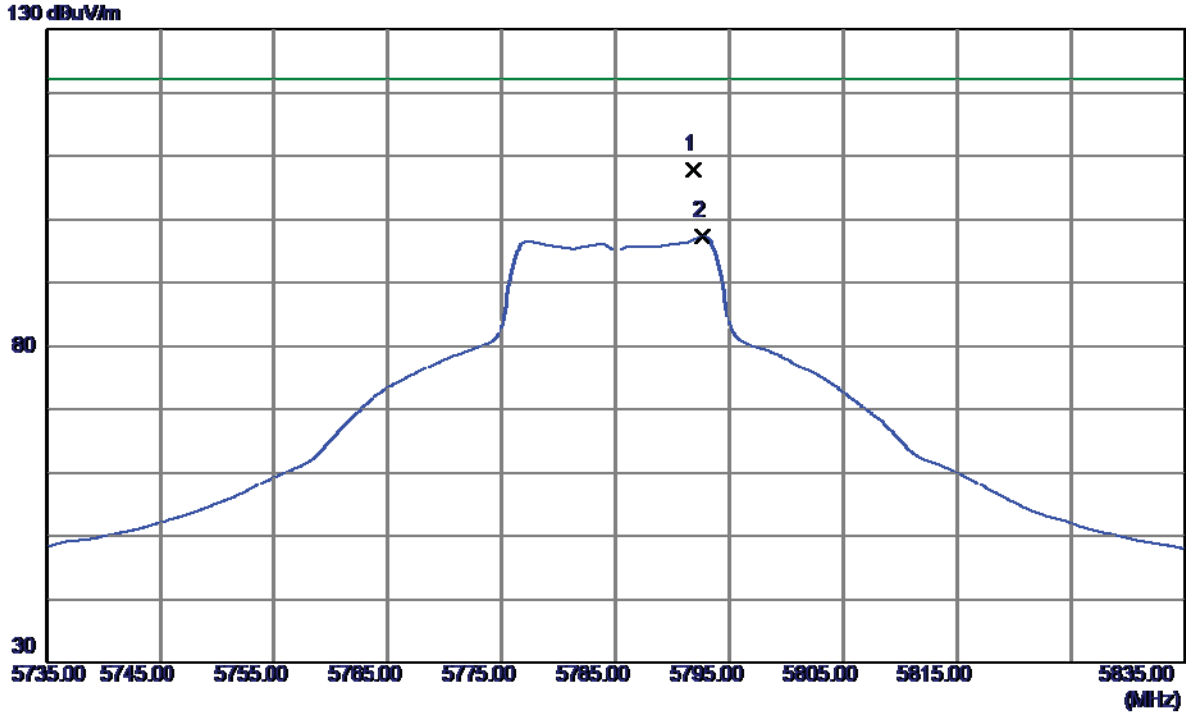

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.9000	64.97	42.82	107.79	122.20	-14.41	Peak	
2	5792.7000	54.54	42.82	97.36	122.20	-24.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

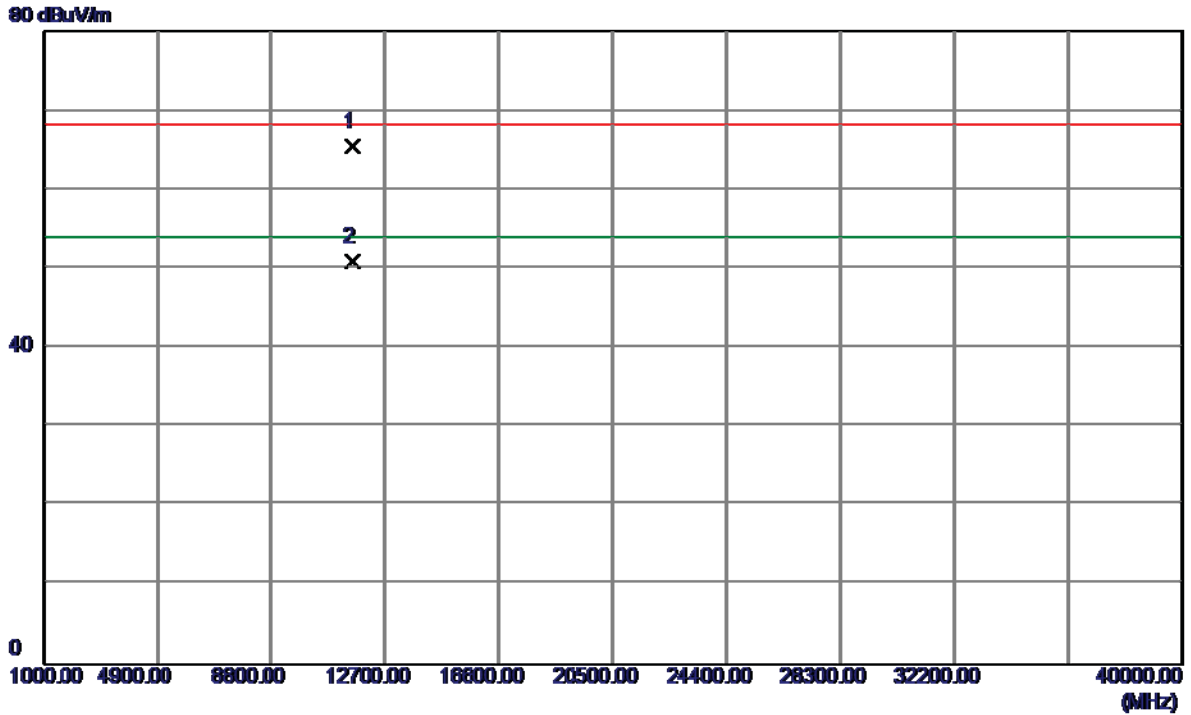

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11568.8480	49.04	16.36	65.40	68.30	-2.90	Peak	
2	11568.9480	34.57	16.36	50.93	54.00	-3.07	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

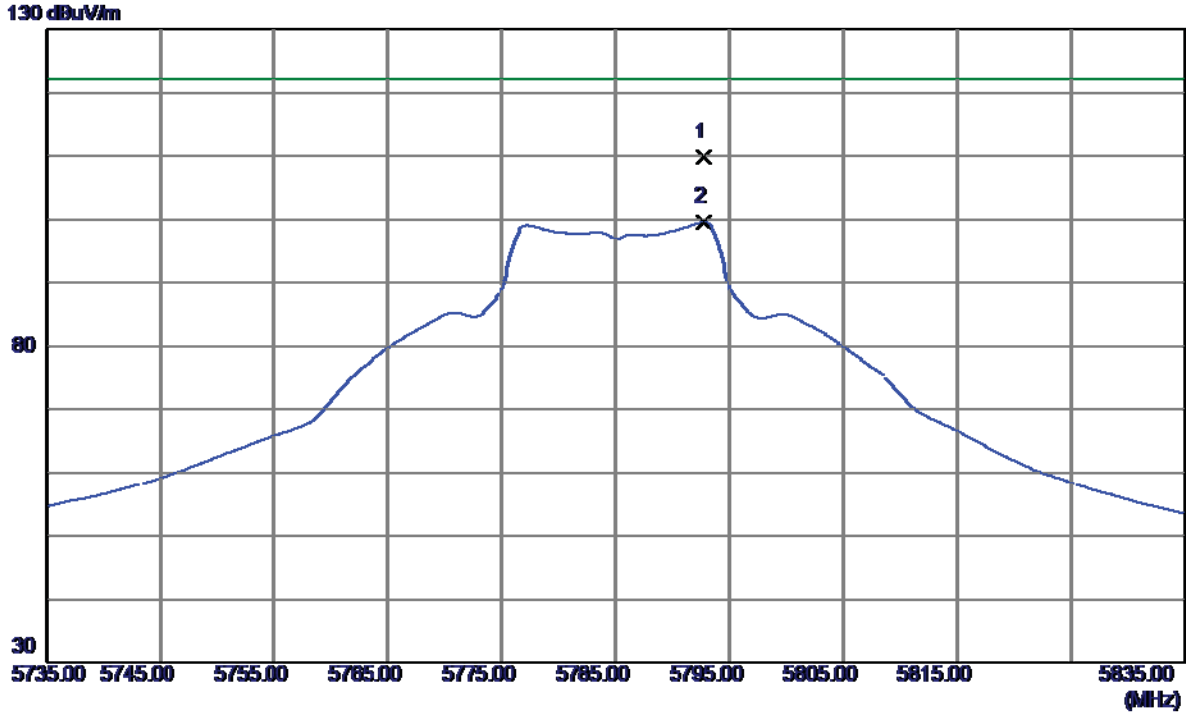

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5792.8000	67.02	42.82	109.84	122.20	-12.36	Peak	
2	5792.8000	56.78	42.82	99.60	122.20	-22.60	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

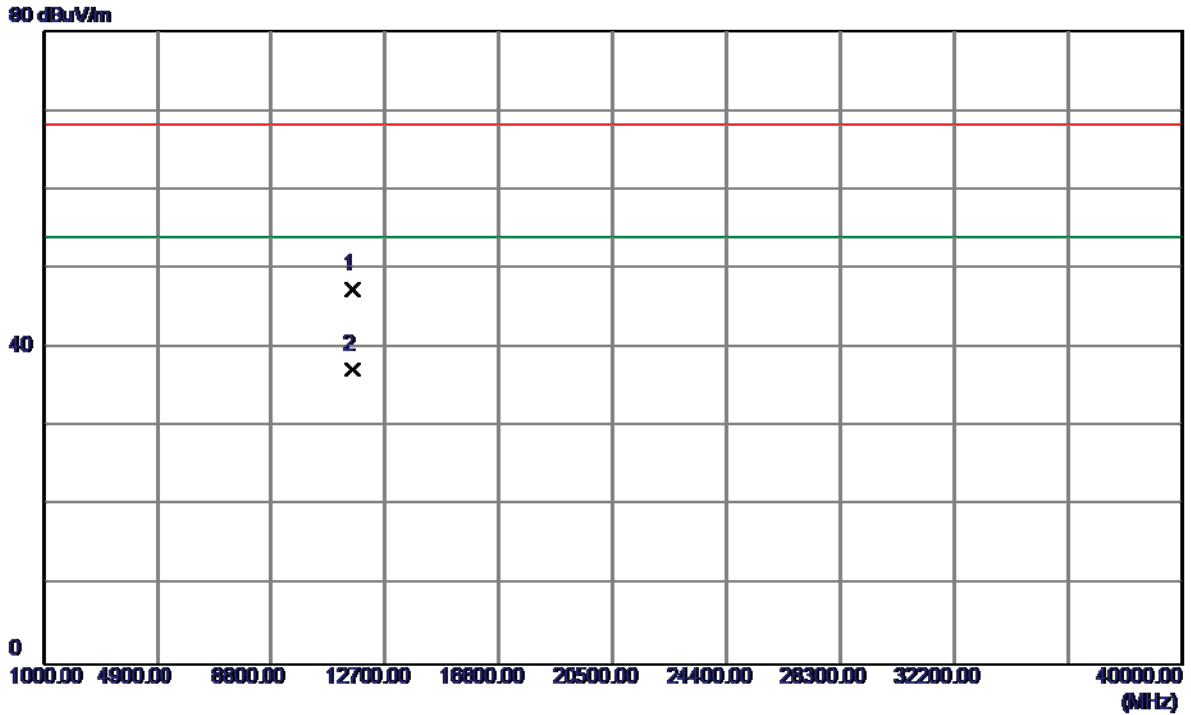

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.5000	31.04	16.36	47.40	68.30	-20.90	Peak	
2 *	11571.5000	20.89	16.36	37.25	54.00	-16.75	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

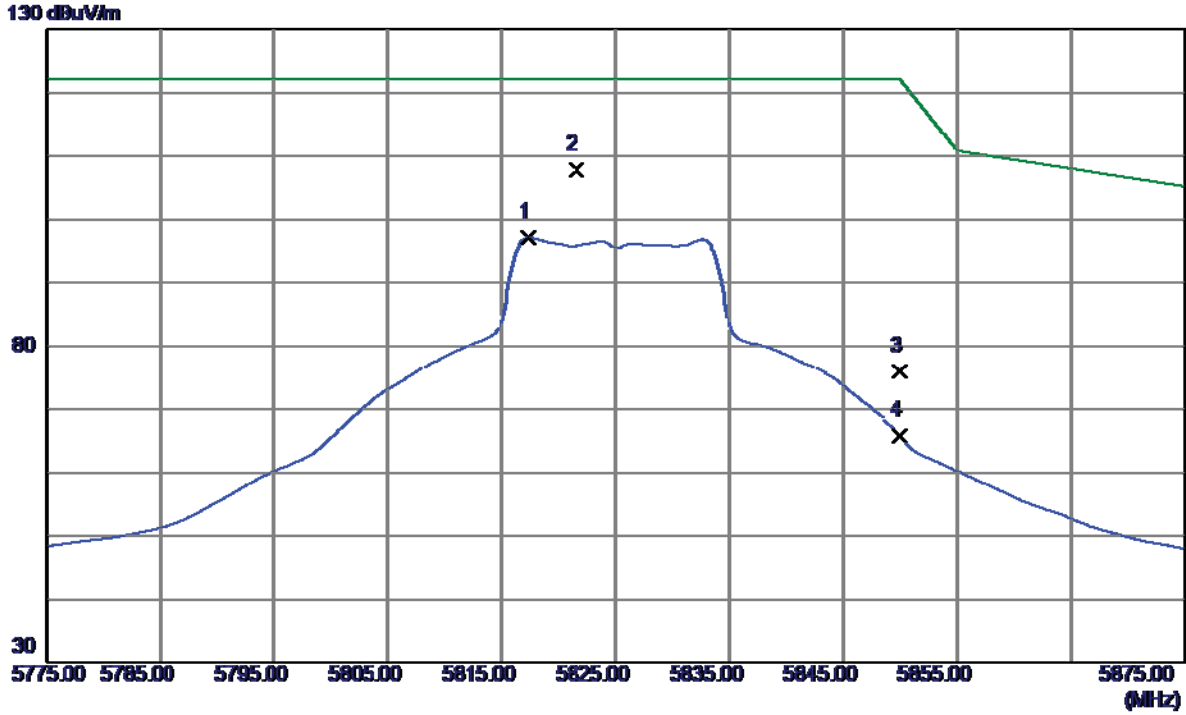

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5817.3000	54.27	42.91	97.18	122.20	-25.02	AVG	
2 *	5821.5000	64.81	42.92	107.73	122.20	-14.47	Peak	
3	5850.0000	33.03	43.03	76.06	122.20	-46.14	Peak	
4	5850.0000	22.71	43.03	65.74	122.20	-56.46	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

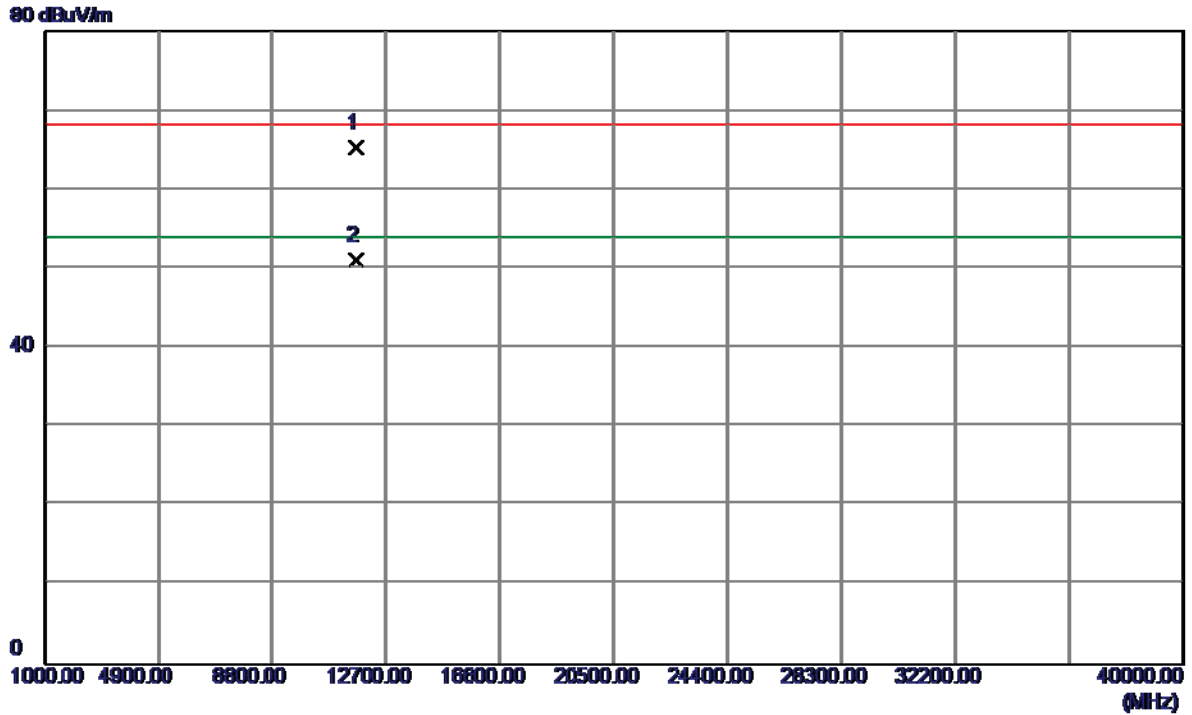

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.8480	48.83	16.45	65.28	68.30	-3.02	Peak	
2 *	11648.8980	34.58	16.45	51.03	54.00	-2.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

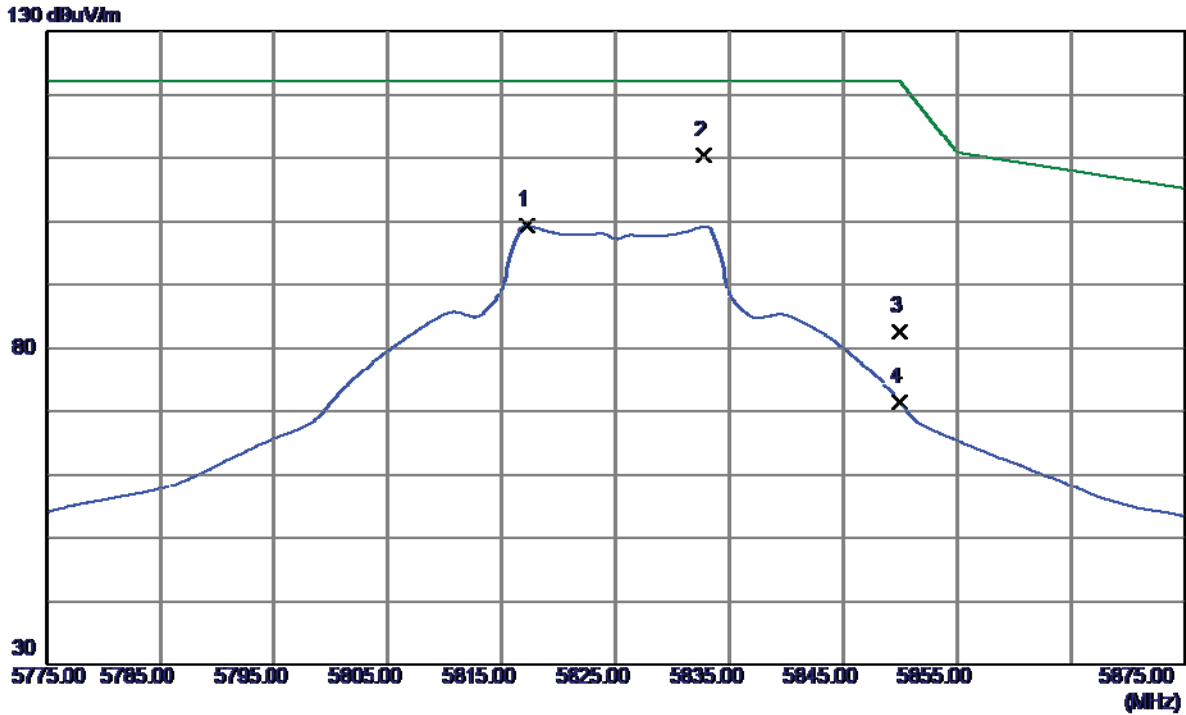

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5817.2000	56.40	42.91	99.31	122.20	-22.89	AVG	
2 *	5832.8000	67.37	42.96	110.33	122.20	-11.87	Peak	
3	5850.0000	39.65	43.03	82.68	122.20	-39.52	Peak	
4	5850.0000	28.34	43.03	71.37	122.20	-50.83	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

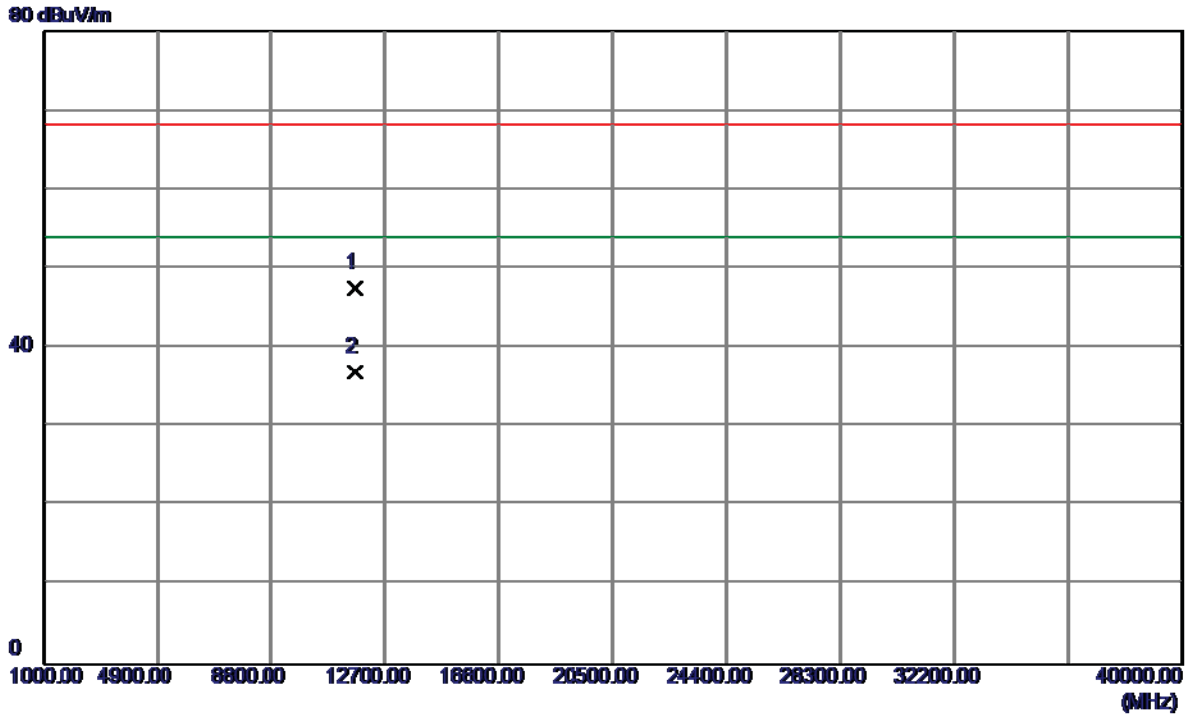

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11647.1000	31.12	16.45	47.57	68.30	-20.73	Peak	
2 *	11656.2000	20.53	16.46	36.99	54.00	-17.01	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

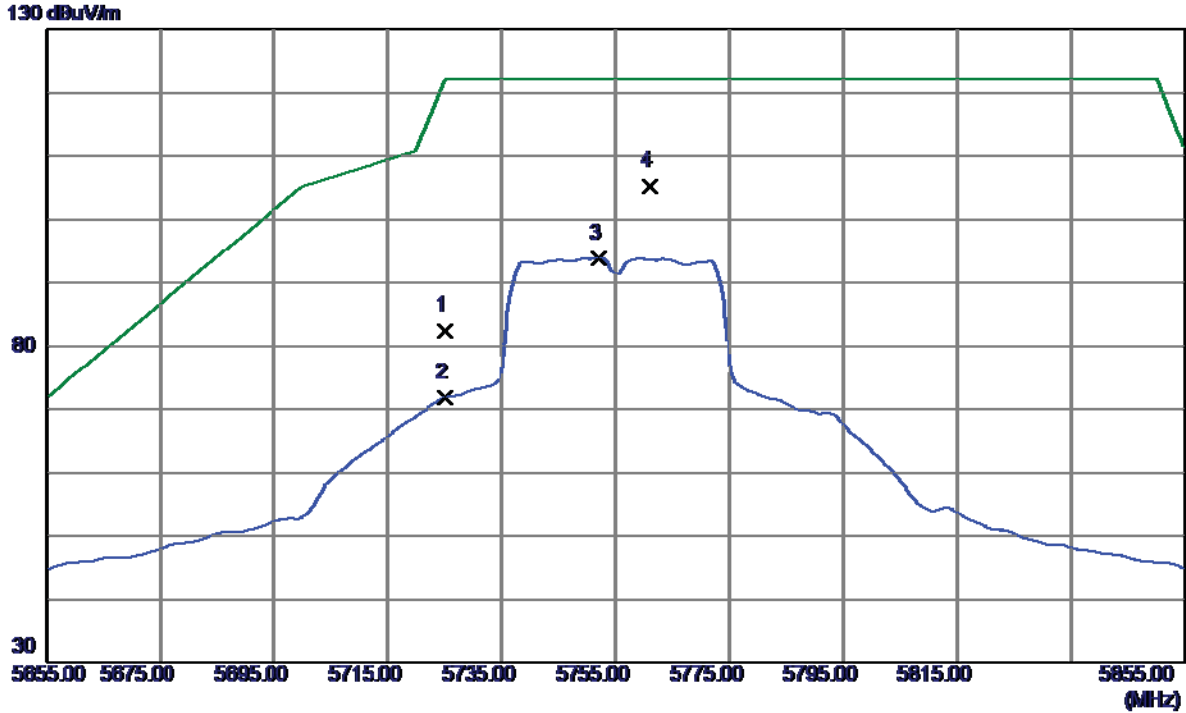

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5725.0000	39.91	42.58	82.49	122.20	-39.71	Peak	
2	5725.0000	29.26	42.58	71.84	122.20	-50.36	AVG	
3	5752.2000	51.12	42.68	93.80	122.20	-28.40	AVG	
4 *	5761.0000	62.58	42.71	105.29	122.20	-16.91	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

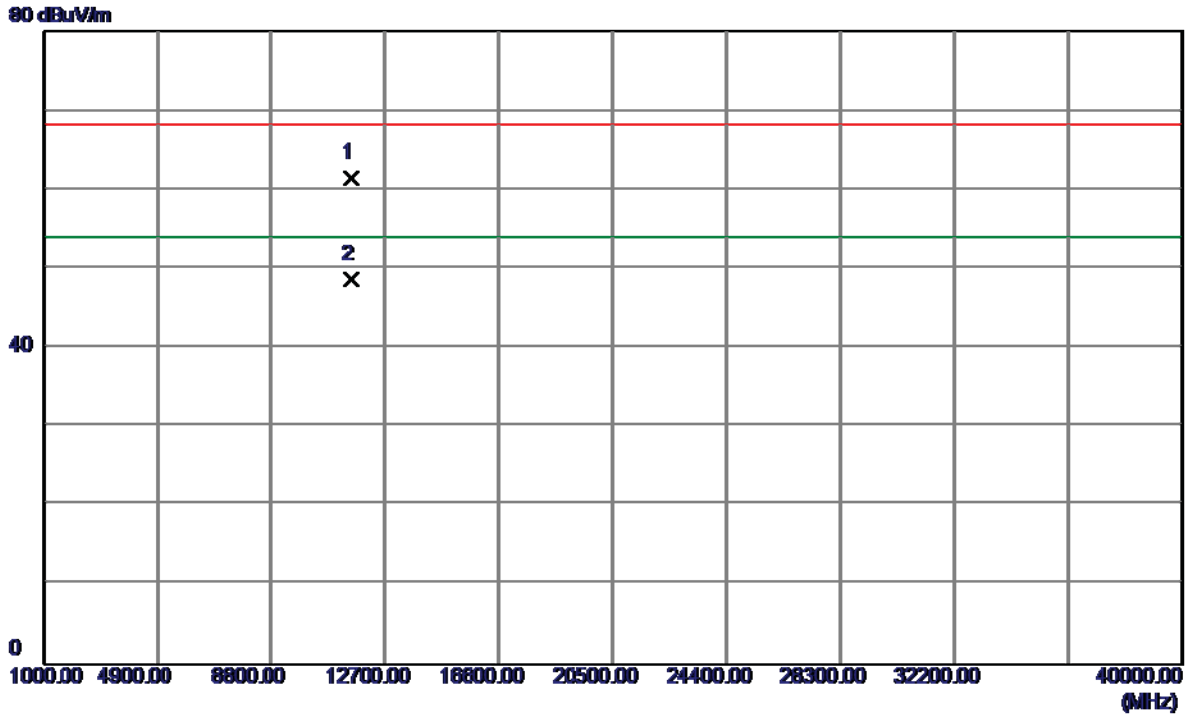

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11508.8000	45.08	16.29	61.37	68.30	-6.93	Peak	
2 *	11508.8000	32.42	16.29	48.71	54.00	-5.29	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

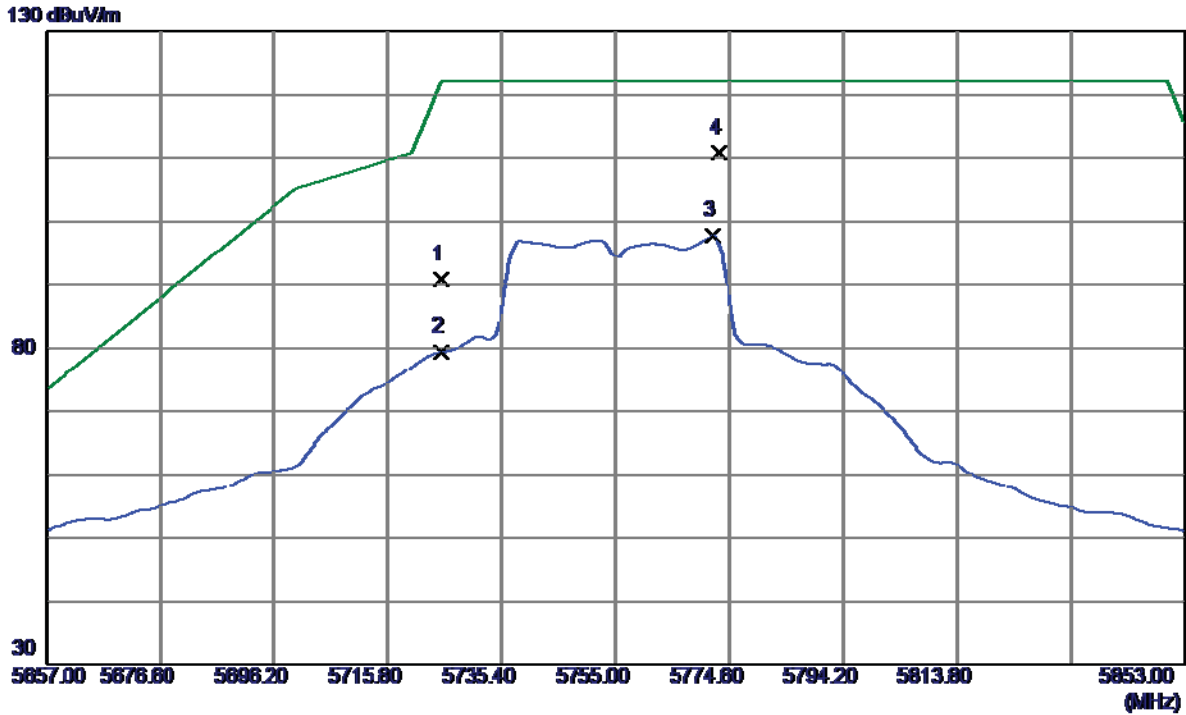

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5725.0000	48.30	42.58	90.88	122.20	-31.32	Peak	
2	5725.0000	36.82	42.58	79.40	122.20	-42.80	AVG	
3	5771.8560	55.01	42.75	97.76	122.20	-24.44	AVG	
4 *	5772.8360	68.14	42.75	110.89	122.20	-11.31	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

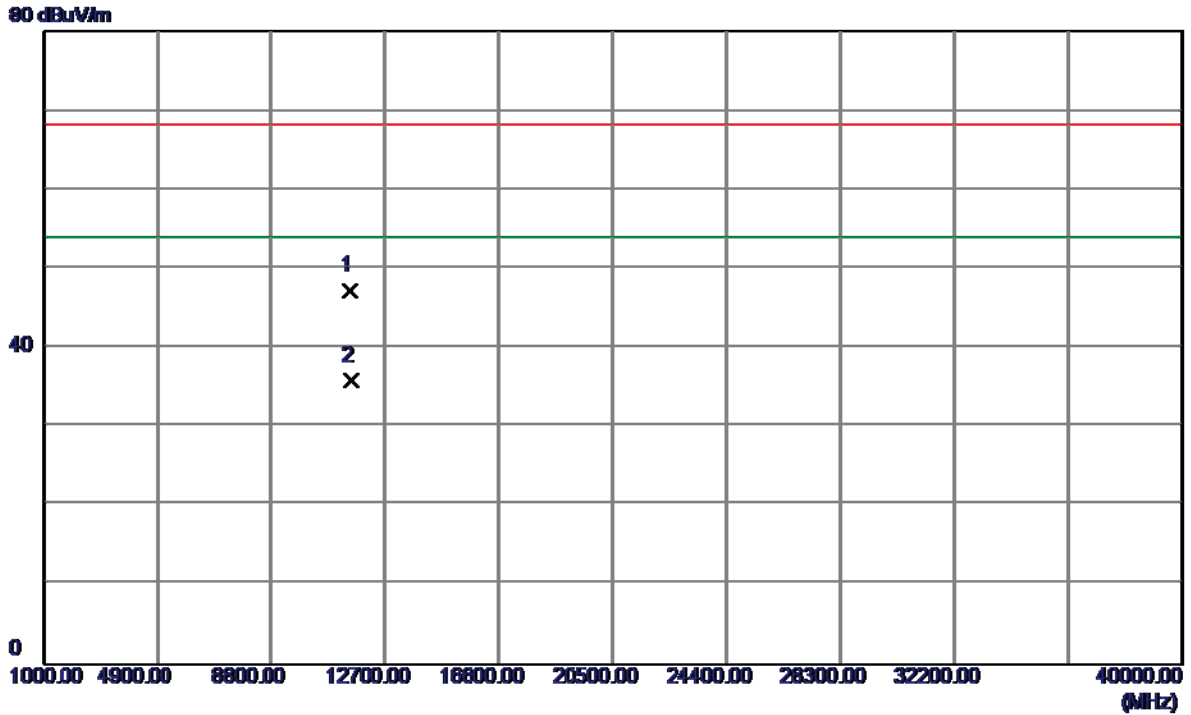

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11506.6000	30.88	16.29	47.17	68.30	-21.13	Peak	
2 *	11517.5000	19.55	16.30	35.85	54.00	-18.15	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

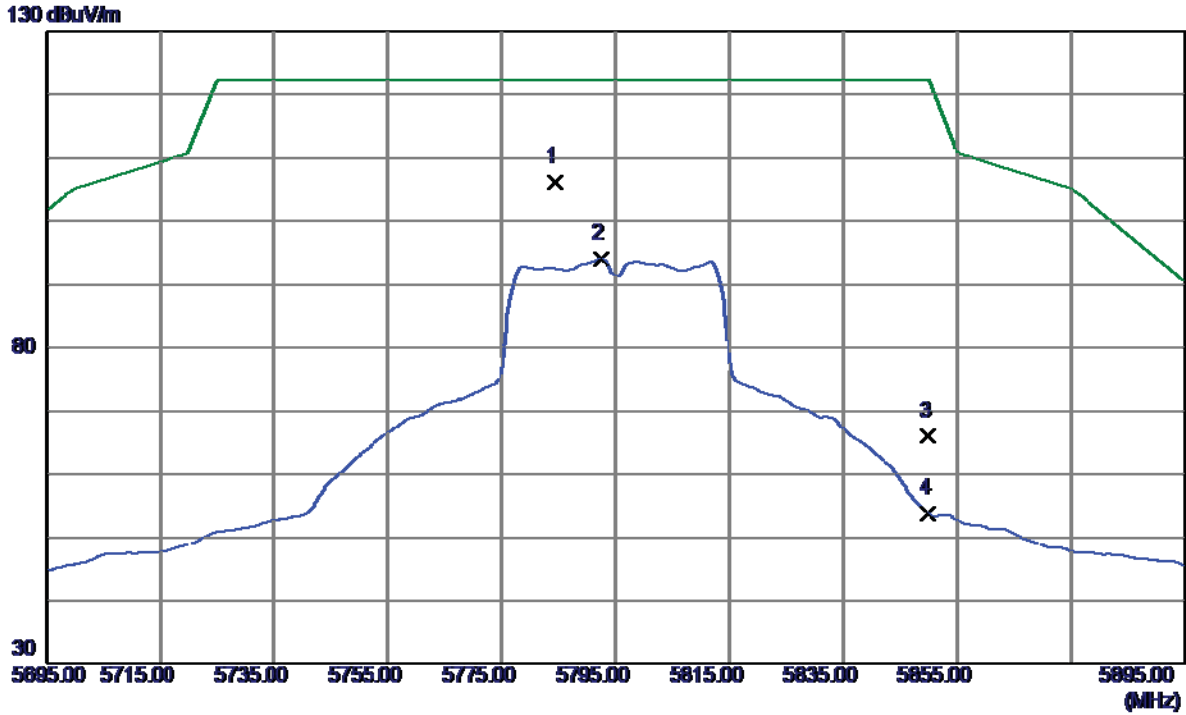

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5784.4000	63.44	42.79	106.23	122.20	-15.97	Peak	
2	5792.6000	51.13	42.82	93.95	122.20	-28.25	AVG	
3	5850.0000	22.93	43.03	65.96	122.20	-56.24	Peak	
4	5850.0000	10.77	43.03	53.80	122.20	-68.40	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

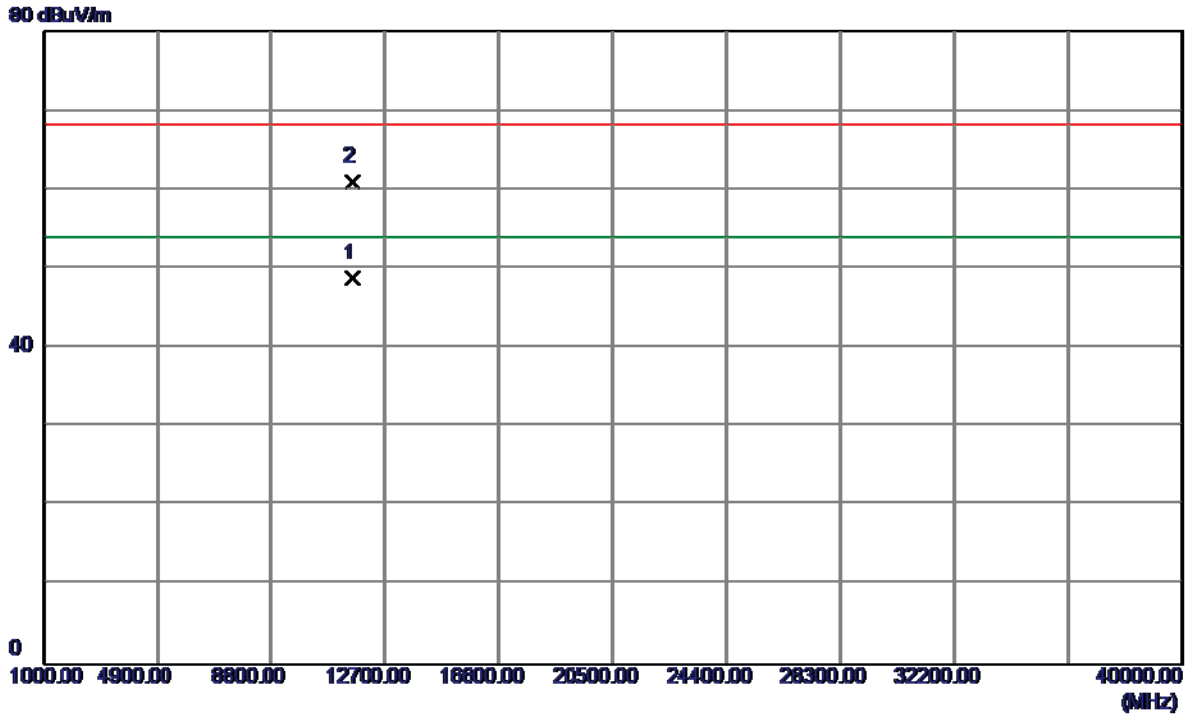

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11588.7000	32.49	16.38	48.87	54.00	-5.13	AVG	
2	11588.9000	44.65	16.38	61.03	68.30	-7.27	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

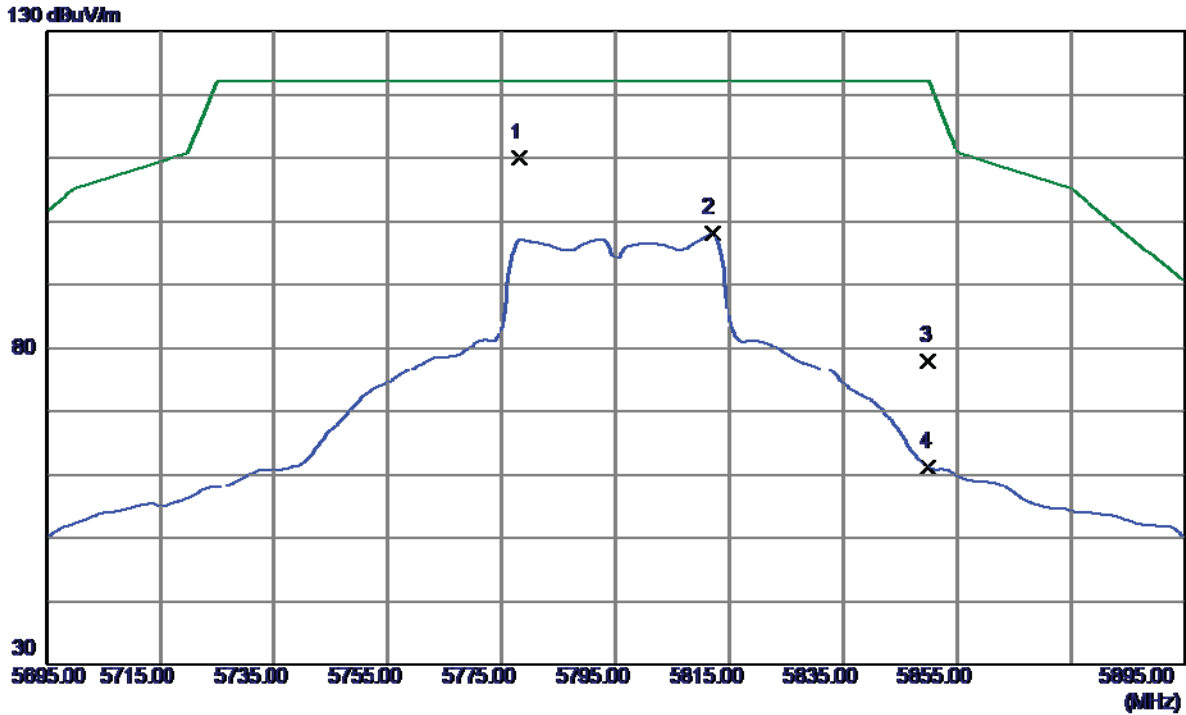

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5778.2000	67.33	42.77	110.10	122.20	-12.10	Peak	
2	5812.0000	55.29	42.89	98.18	122.20	-24.02	AVG	
3	5850.0000	34.91	43.03	77.94	122.20	-44.26	Peak	
4	5850.0000	18.21	43.03	61.24	122.20	-60.96	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal

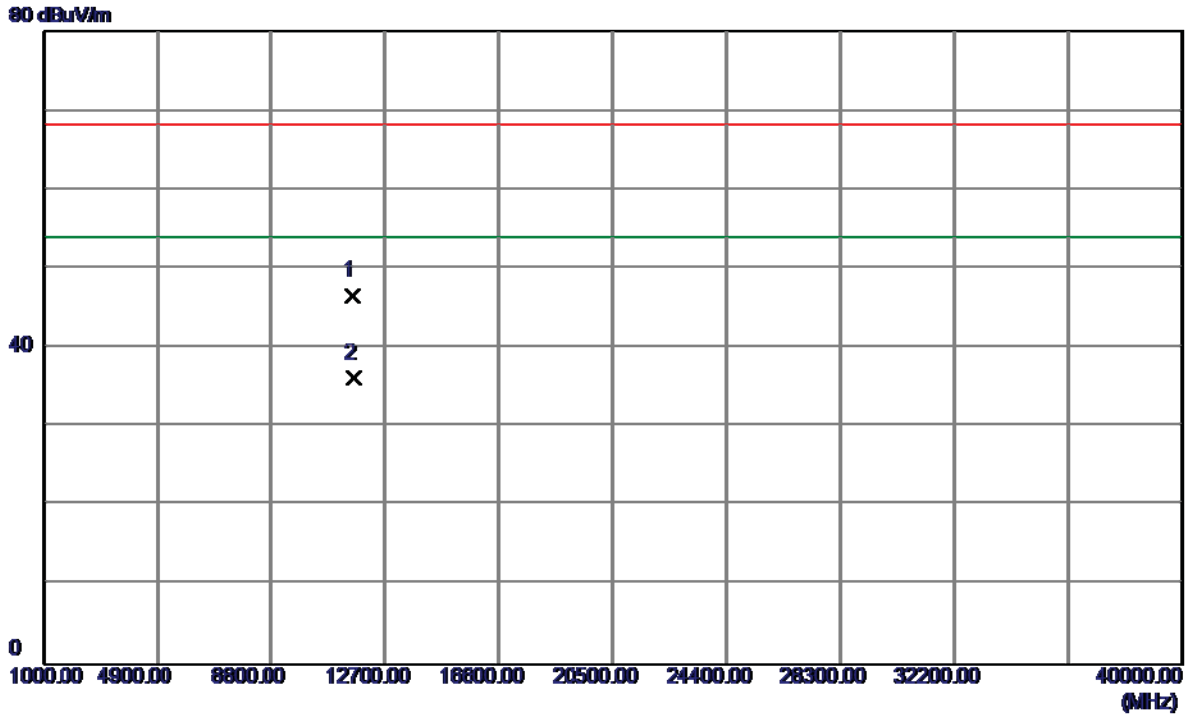


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11586.8000	30.23	16.38	46.61	68.30	-21.69	Peak	
2 *	11601.3000	19.73	16.40	36.13	54.00	-17.87	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical


115 dBuV/m

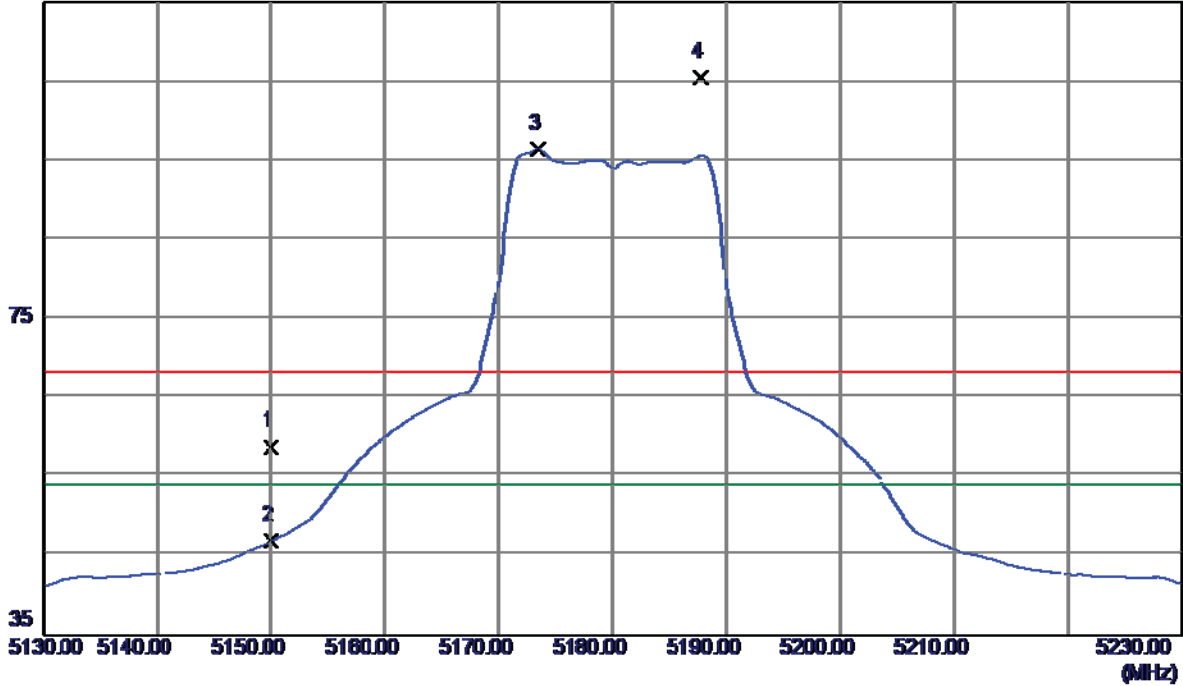

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	18.30	40.62	58.92	68.30	-9.38	Peak	
2	5150.0000	6.32	40.62	46.94	54.00	-7.06	AVG	
3	5173.4000	55.72	40.70	96.42	68.30	28.12	Peak	No Limit
4 *	5187.8000	64.85	40.75	105.60	54.00	51.60	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical

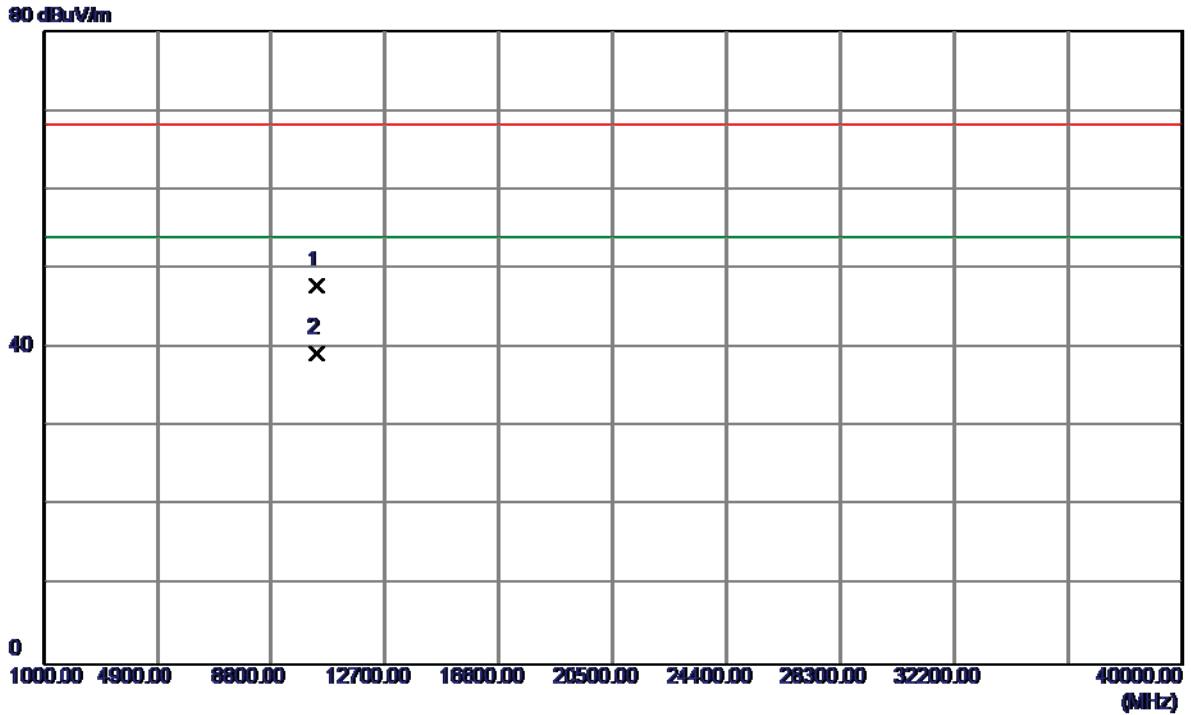


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10359.5500	32.64	15.23	47.87	68.30	-20.43	Peak	
2 *	10360.0500	24.13	15.23	39.36	54.00	-14.64	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Horizontal


115 dBuV/m

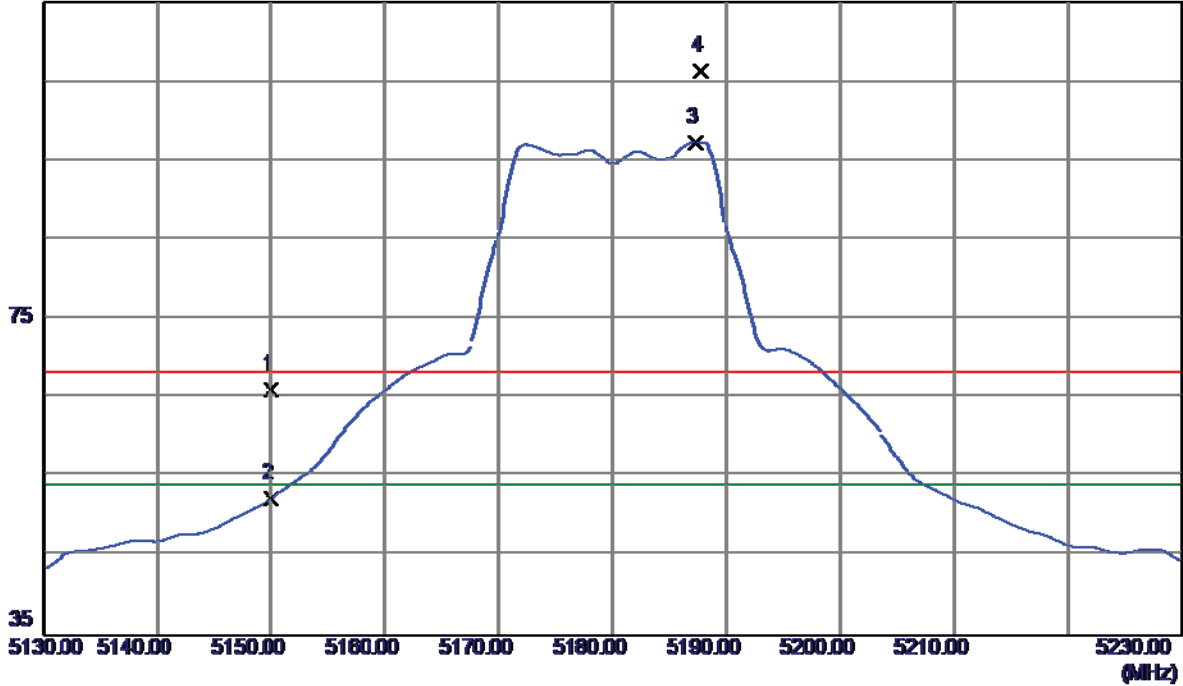

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	25.36	40.62	65.98	68.30	-2.32	Peak	
2	5150.0000	11.67	40.62	52.29	54.00	-1.71	AVG	
3 *	5187.3000	56.57	40.75	97.32	54.00	43.32	AVG	No Limit
4	5187.8000	65.58	40.75	106.33	68.30	38.03	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Horizontal

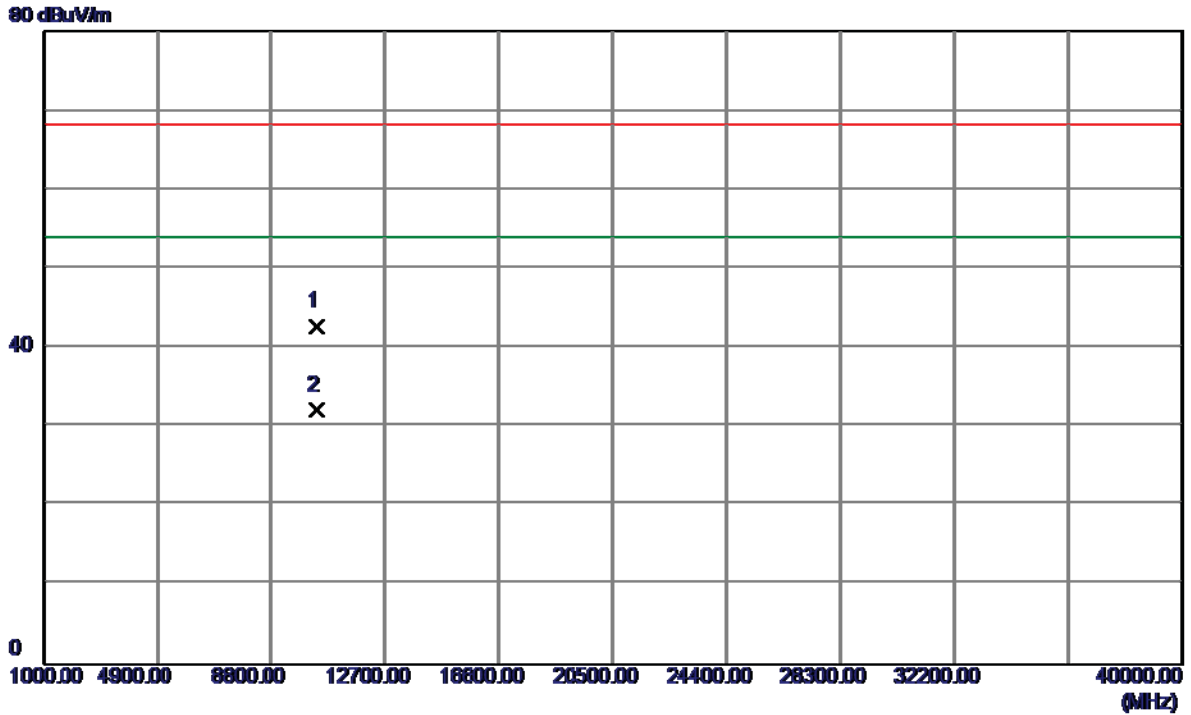


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10352.7000	27.46	15.21	42.67	68.30	-25.63	Peak	
2 *	10359.8000	16.85	15.23	32.08	54.00	-21.92	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Vertical


115 dBuV/m

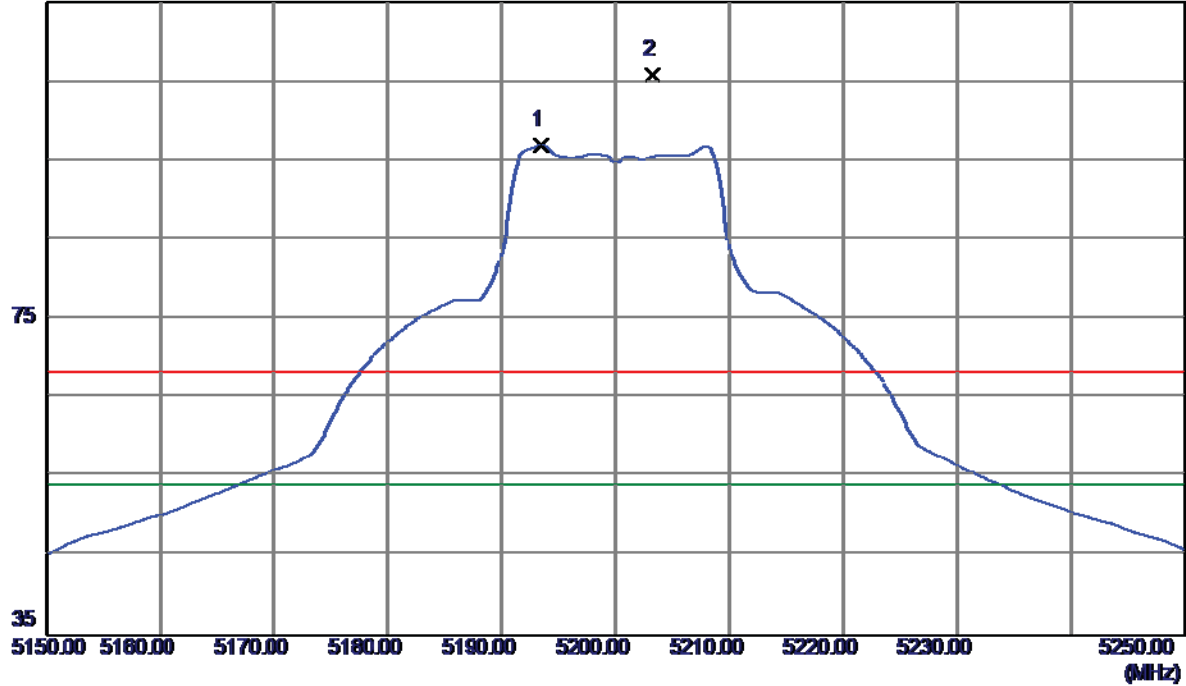

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5193.4000	56.18	40.77	96.95	54.00	42.95	AVG	No Limit
2	5203.2000	65.12	40.80	105.92	68.30	37.62	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Vertical

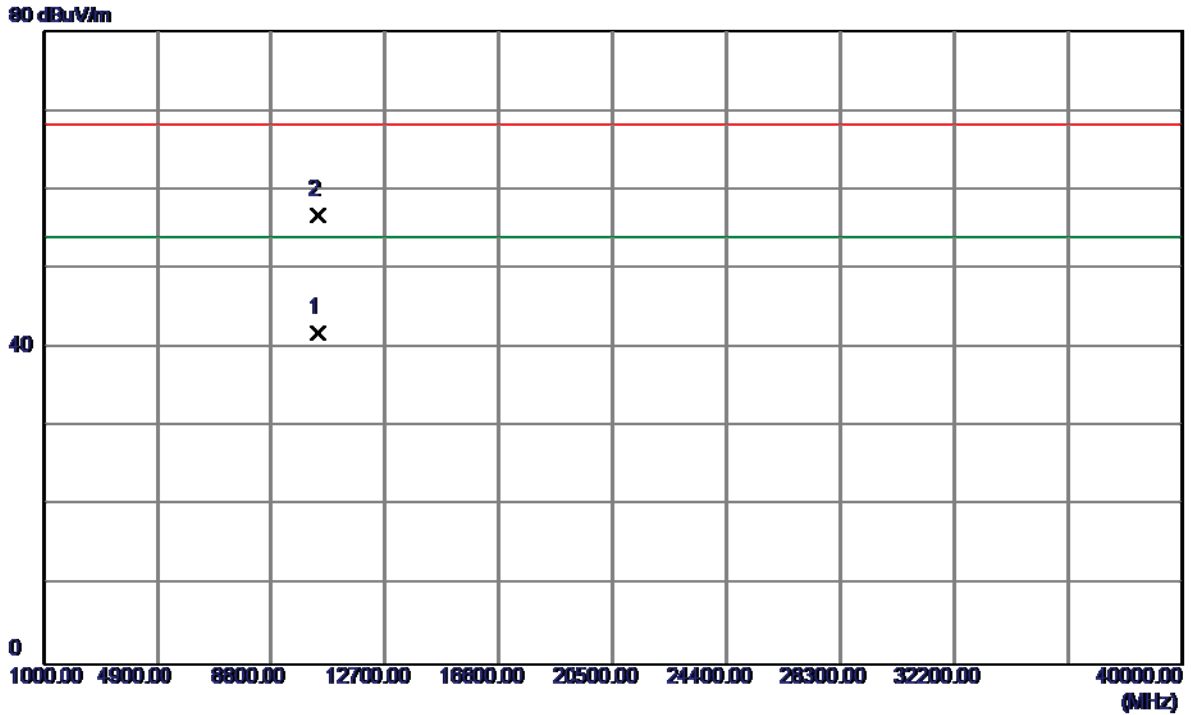

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10398.6000	26.56	15.32	41.88	54.00	-12.12	AVG	
2 *	10398.9000	41.50	15.32	56.82	68.30	-11.48	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Horizontal

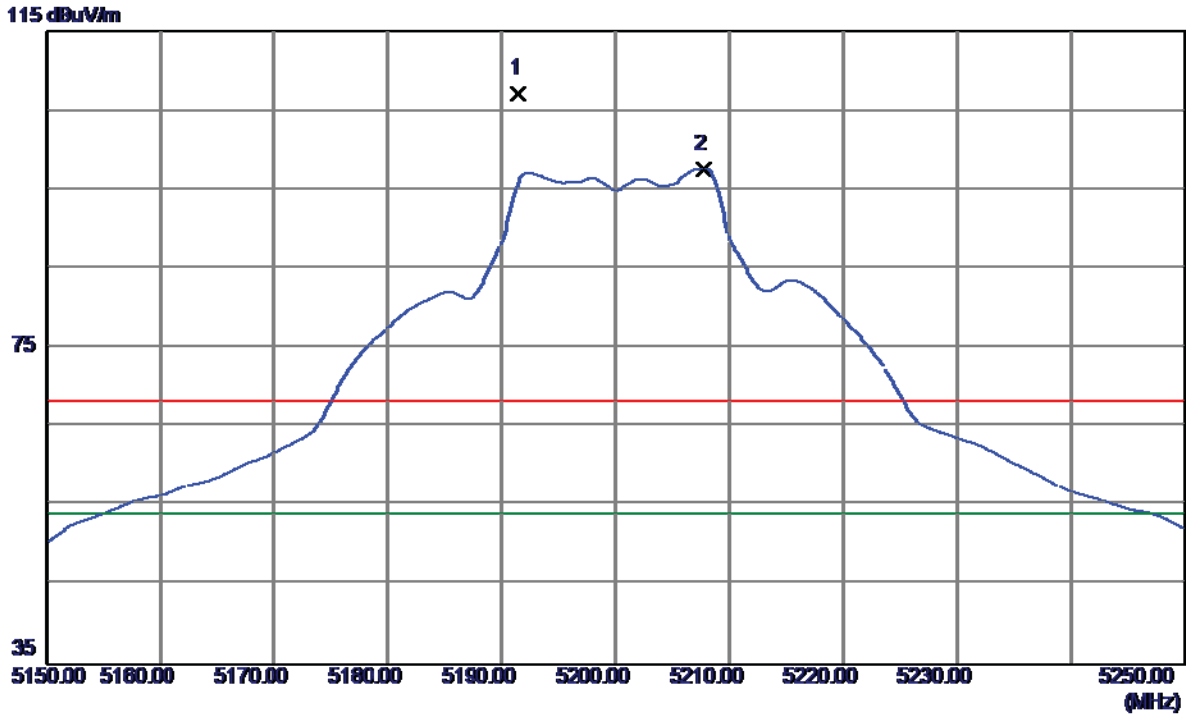

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5191.5000	66.33	40.76	107.09	68.30	38.79	Peak	No Limit
2 *	5207.8000	56.81	40.82	97.63	54.00	43.63	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Horizontal

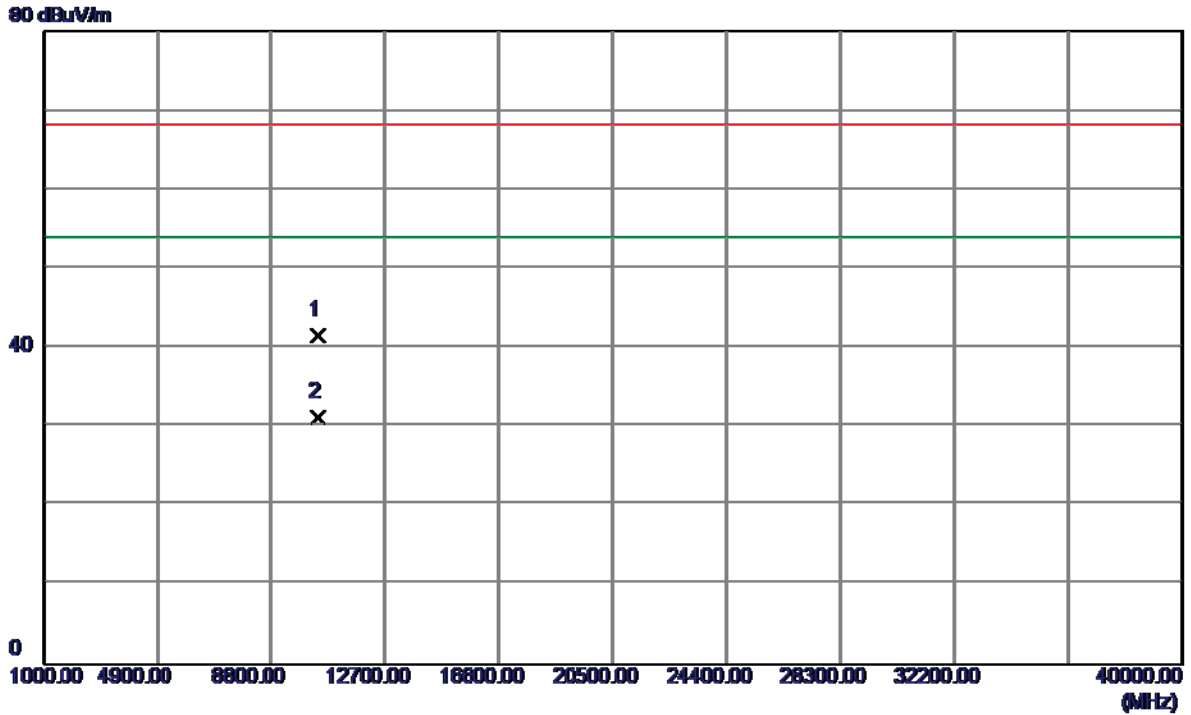


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10396.8000	26.27	15.31	41.58	68.30	-26.72	Peak	
2 *	10399.3000	15.89	15.32	31.21	54.00	-22.79	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical


115 dBuV/m

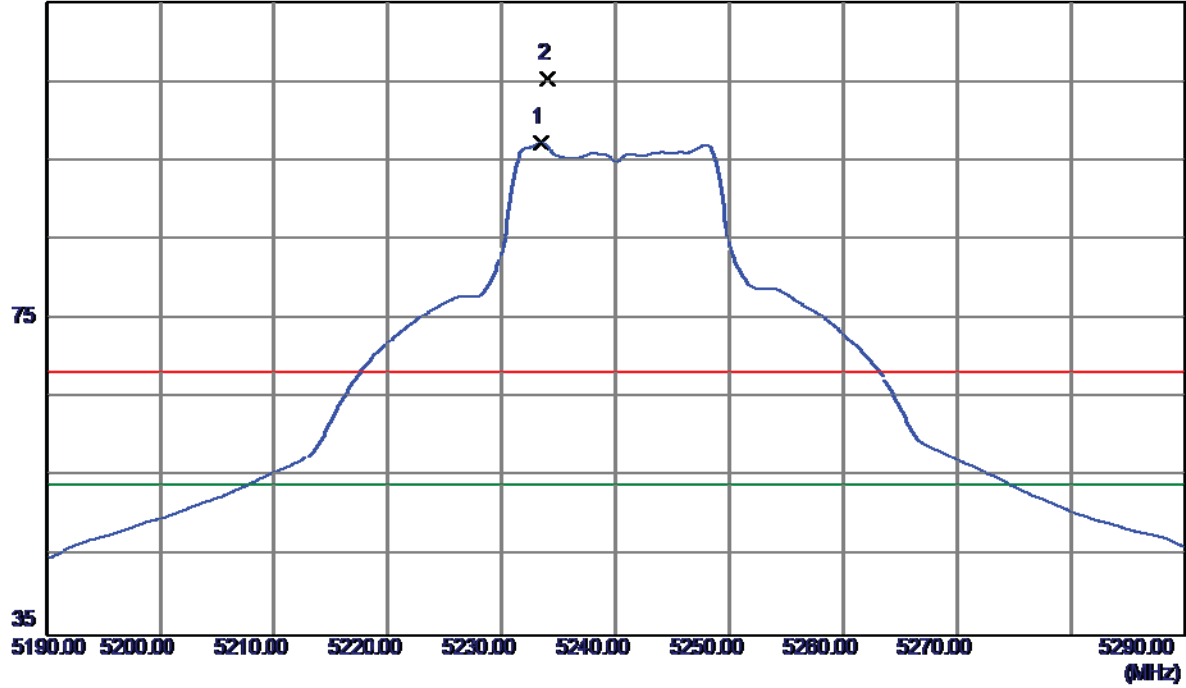

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5233.4000	56.32	40.90	97.22	54.00	43.22	AVG	No Limit
2	5234.0000	64.48	40.90	105.38	68.30	37.08	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical

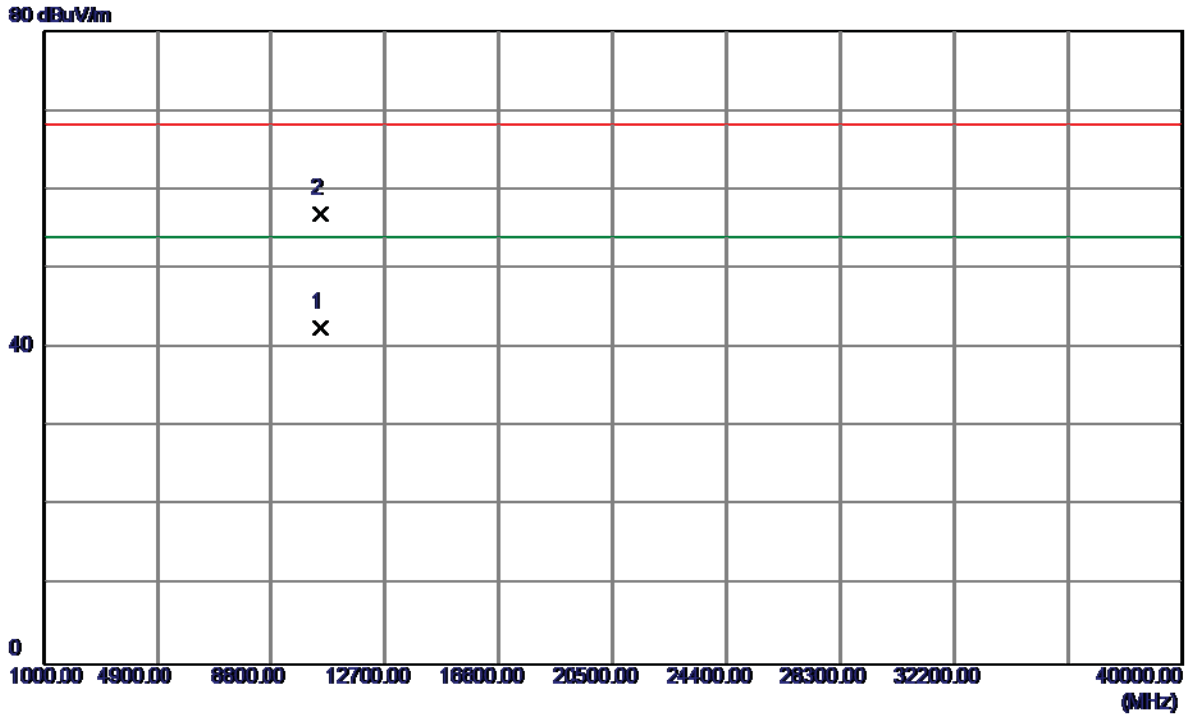


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10478.6500	27.05	15.50	42.55	54.00	-11.45	AVG	
2 *	10478.9000	41.45	15.50	56.95	68.30	-11.35	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal


115 dBuV/m

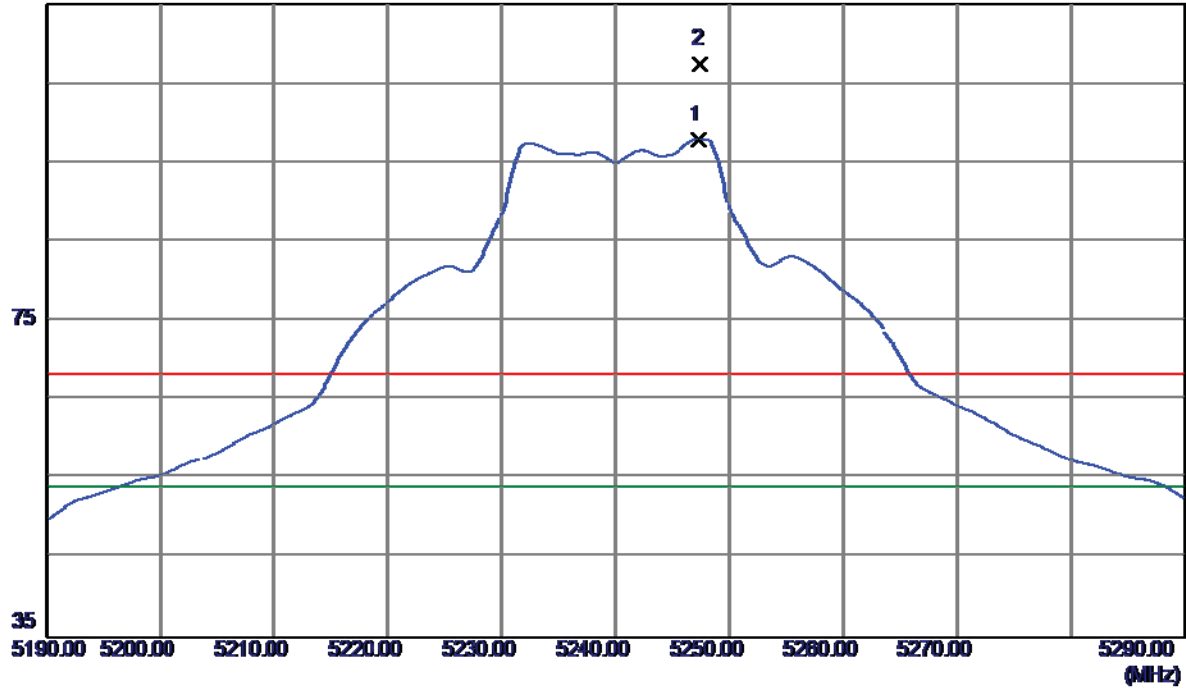

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5247.3000	56.98	40.95	97.93	54.00	43.93	AVG	No Limit
2	5247.5000	66.58	40.95	107.53	68.30	39.23	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal

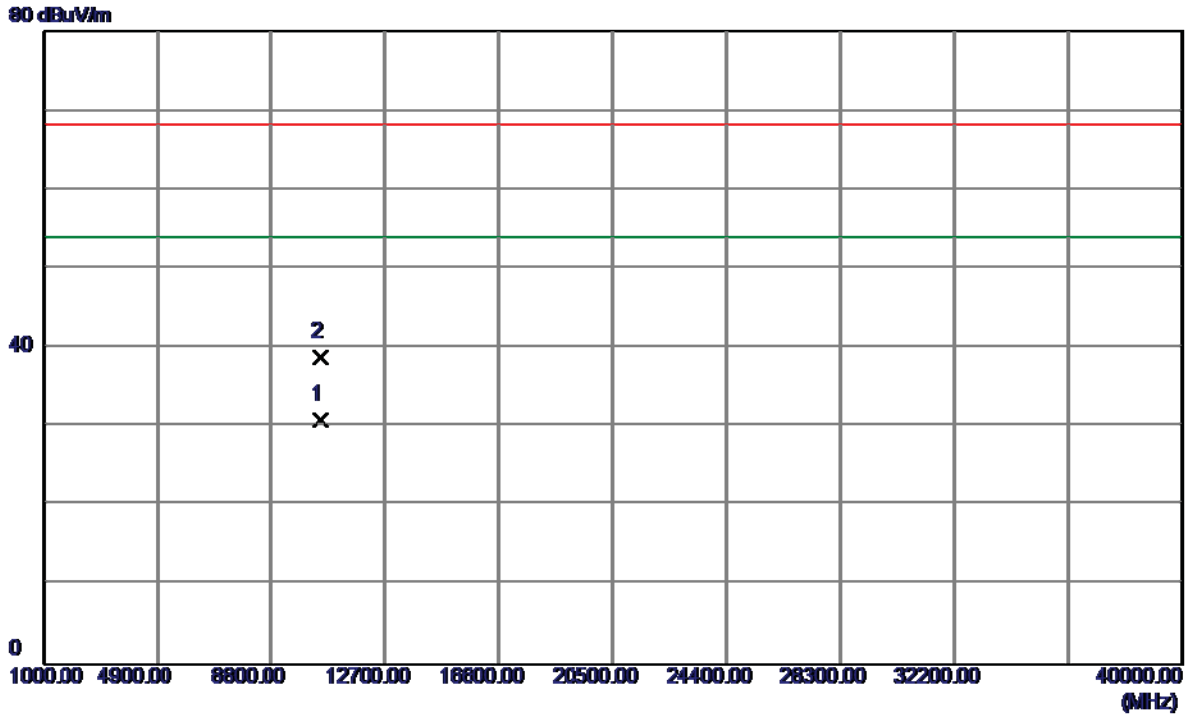


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.8000	15.38	15.51	30.89	68.30	-37.41	Peak	
2 *	10483.1000	23.35	15.51	38.86	68.30	-29.44	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical


115 dBuV/m

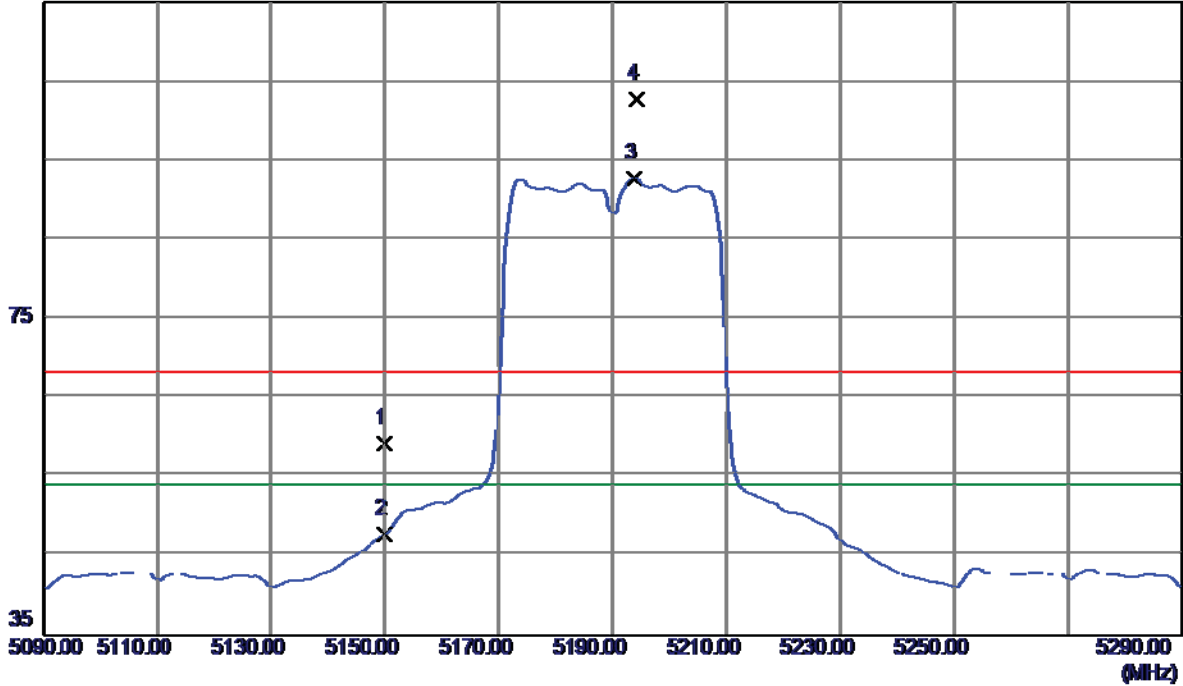

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	18.76	40.62	59.38	68.30	-8.92	Peak	
2	5150.0000	7.16	40.62	47.78	54.00	-6.22	AVG	
3 *	5193.8000	51.94	40.77	92.71	54.00	38.71	AVG	No Limit
4	5194.2000	62.07	40.77	102.84	68.30	34.54	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

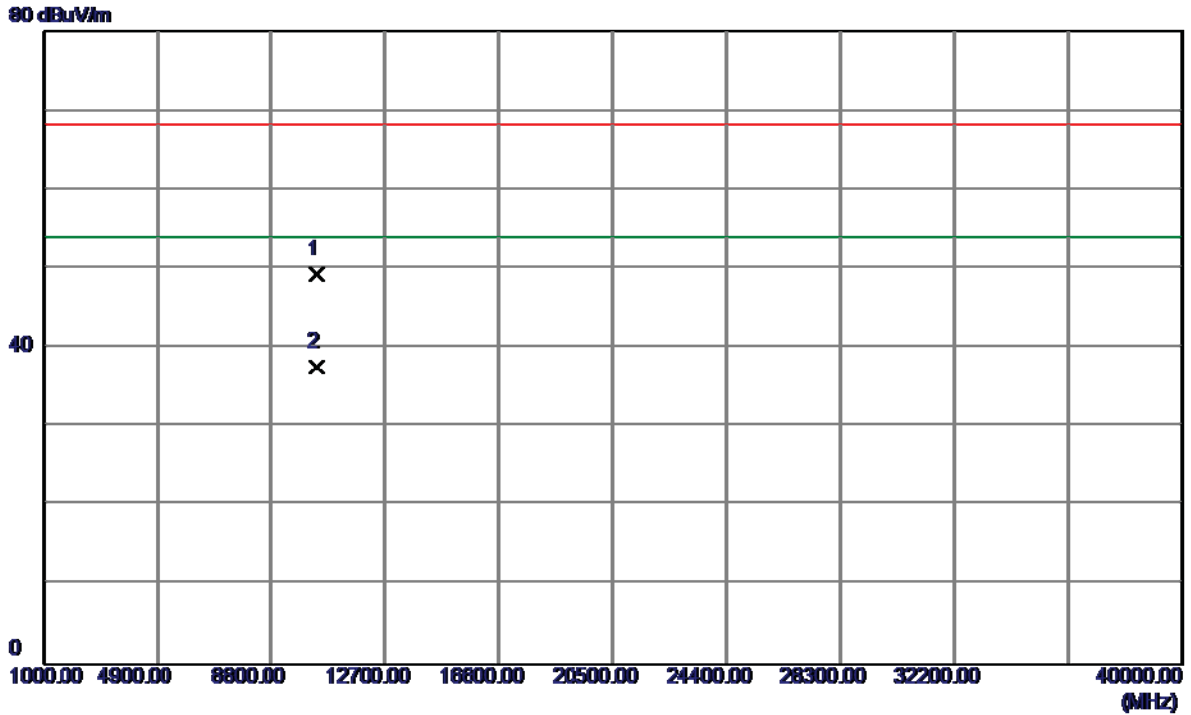


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10379.0500	33.98	15.27	49.25	68.30	-19.05	Peak	
2 *	10379.9500	22.35	15.28	37.63	54.00	-16.37	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


115 dBuV/m

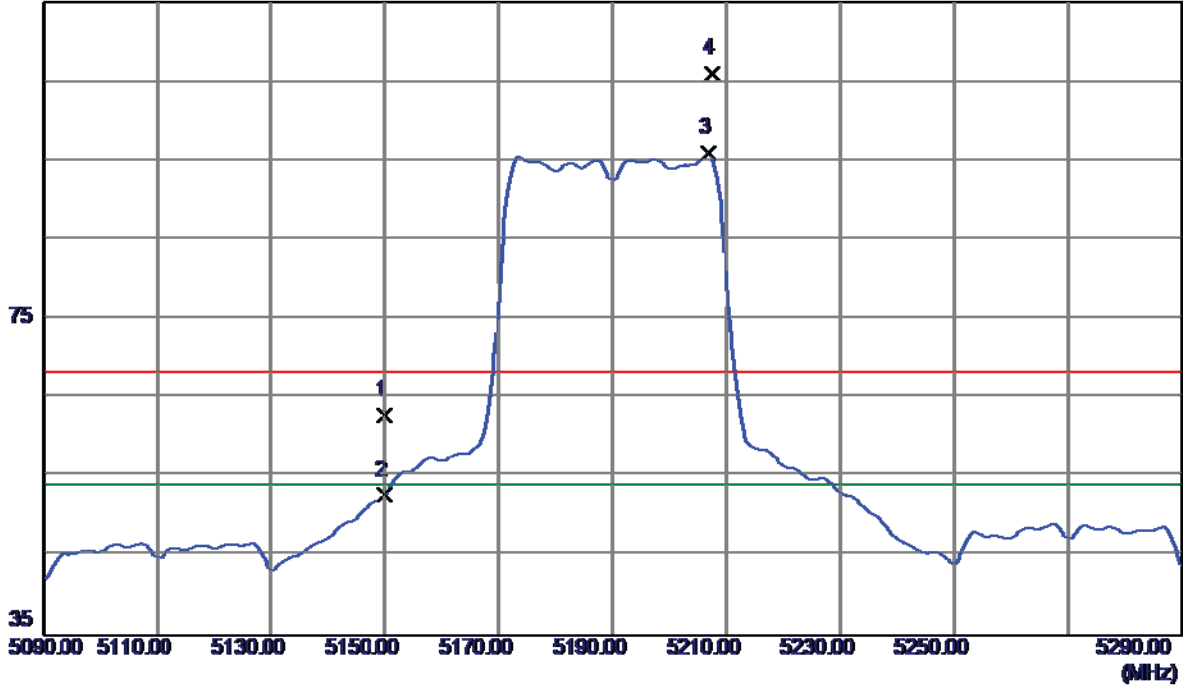

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.20	40.62	62.82	68.30	-5.48	Peak	
2	5150.0000	12.06	40.62	52.68	54.00	-1.32	AVG	
3 *	5206.8000	55.16	40.81	95.97	54.00	41.97	AVG	No Limit
4	5207.6000	65.18	40.81	105.99	68.30	37.69	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

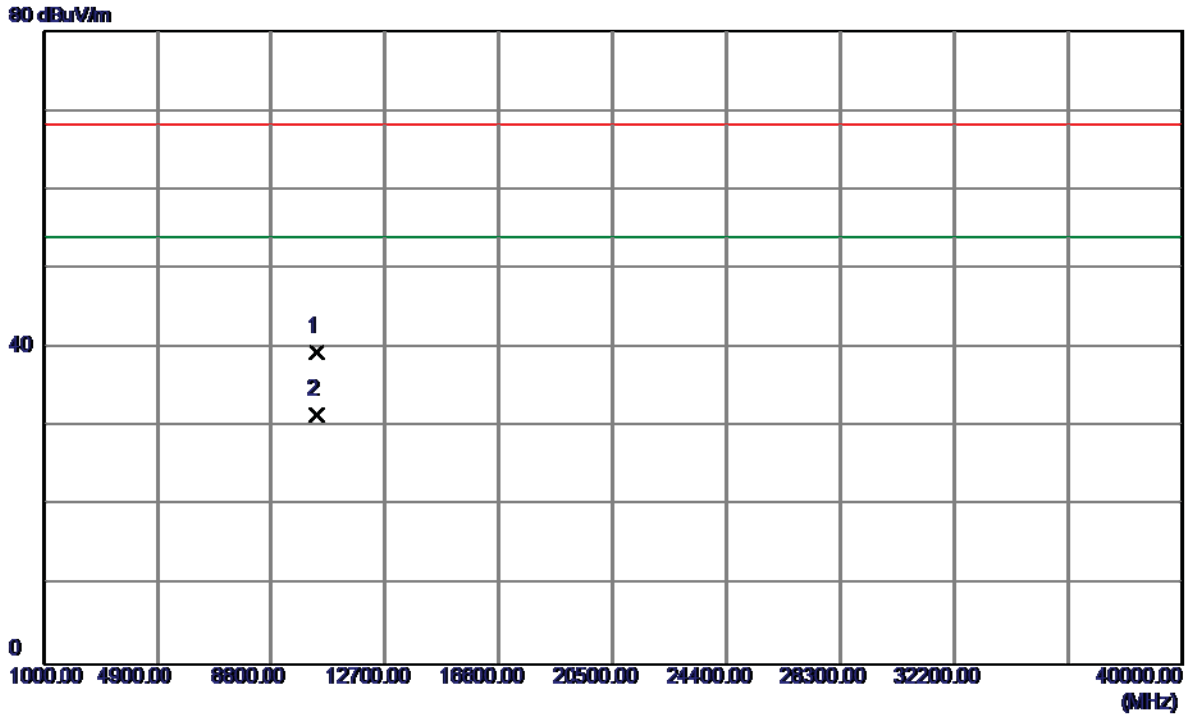


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10379.0000	24.27	15.27	39.54	68.30	-28.76	Peak	
2 *	10379.5000	16.20	15.28	31.48	54.00	-22.52	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical


115 dBuV/m

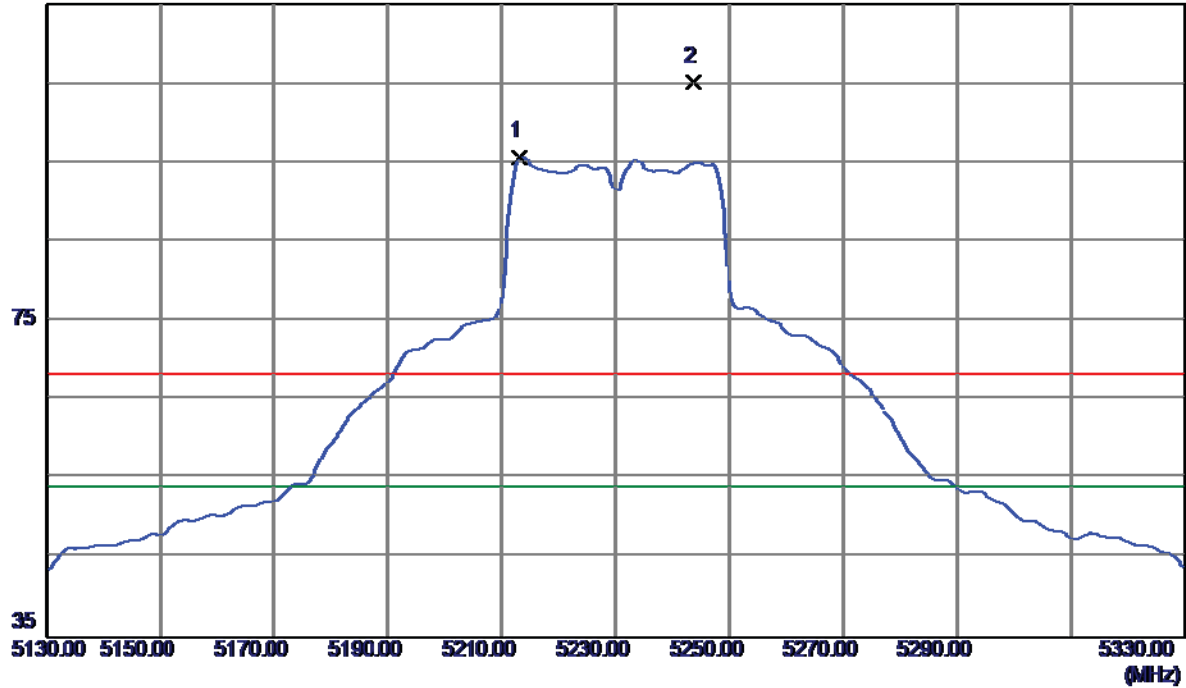

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5213.2000	54.89	40.83	95.72	54.00	41.72	AVG	No Limit
2	5243.8000	64.38	40.93	105.31	68.30	37.01	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

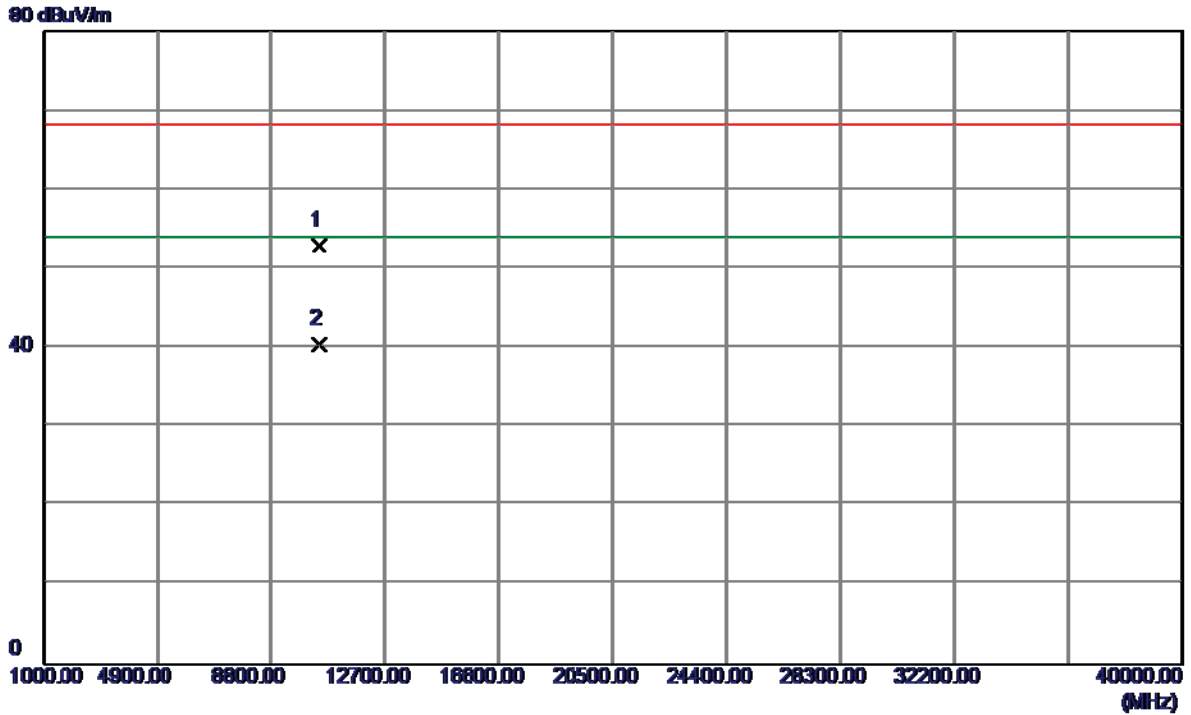

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10458.6500	37.42	15.46	52.88	68.30	-15.42	Peak	
2 *	10458.6500	25.09	15.46	40.55	54.00	-13.45	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Horizontal

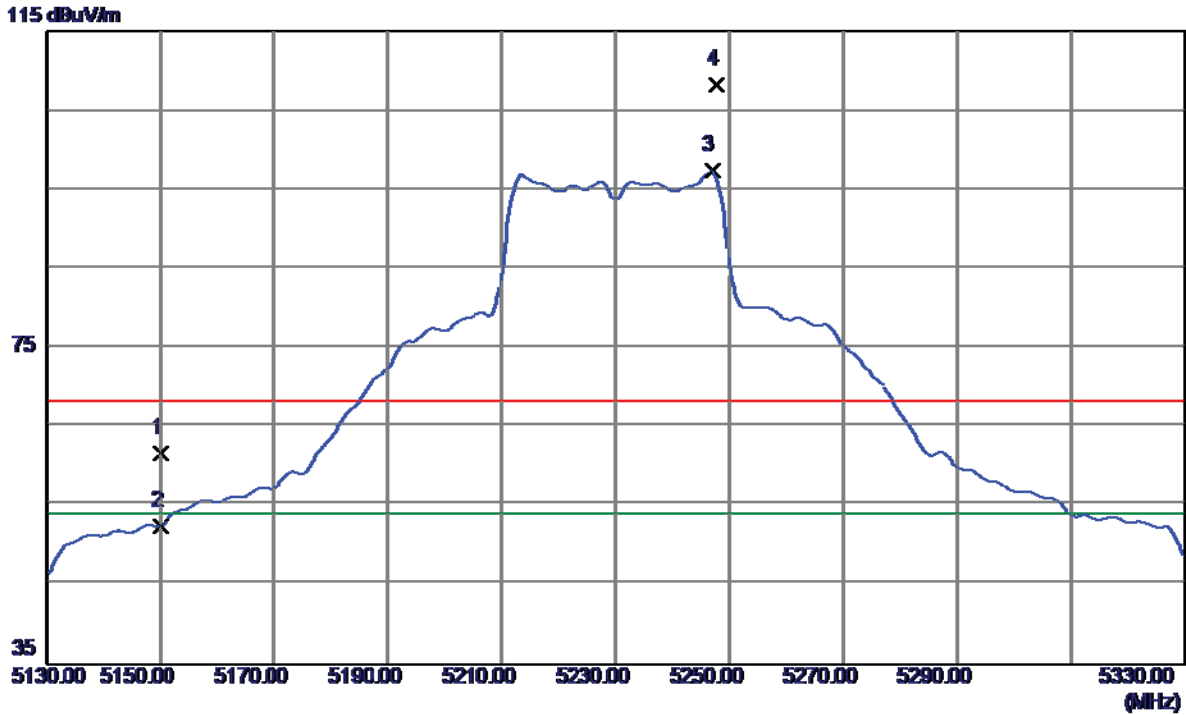

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	21.15	40.62	61.77	68.30	-6.53	Peak	
2	5150.0000	11.89	40.62	52.51	54.00	-1.49	AVG	
3 *	5247.0000	56.40	40.94	97.34	54.00	43.34	AVG	No Limit
4	5247.8000	67.33	40.95	108.28	68.30	39.98	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

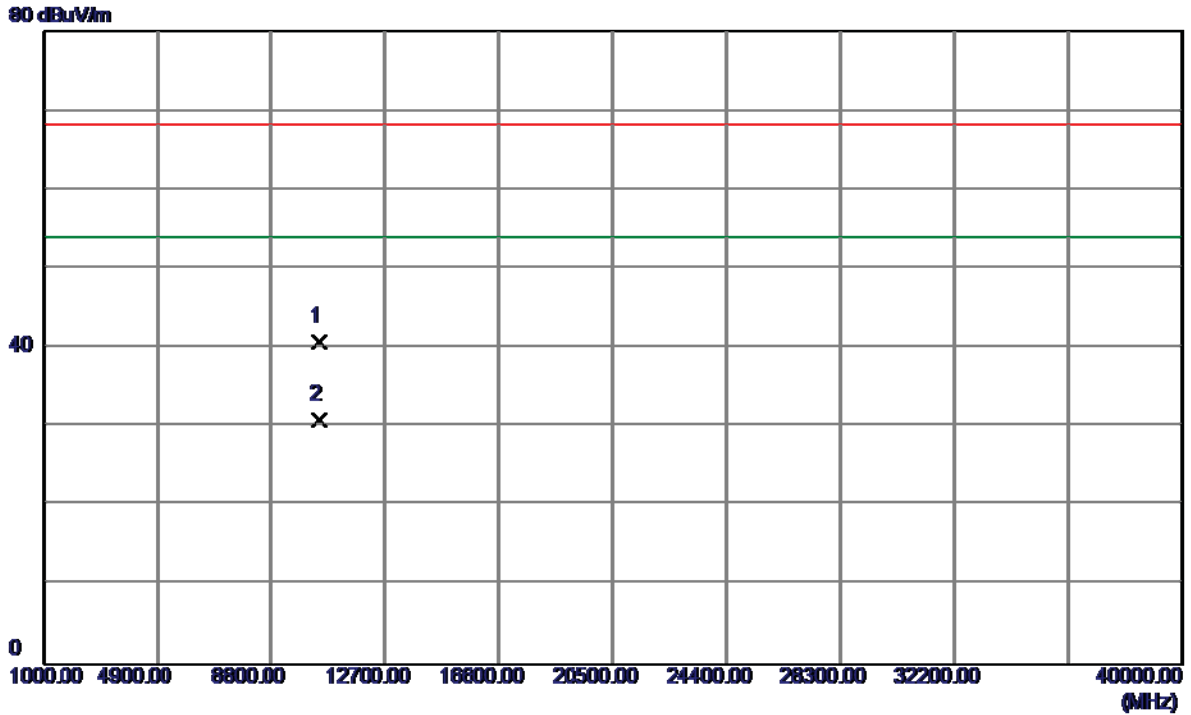


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10459.9000	25.29	15.46	40.75	68.30	-27.55	Peak	
2 *	10460.3000	15.45	15.46	30.91	54.00	-23.09	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical


115 dBuV/m

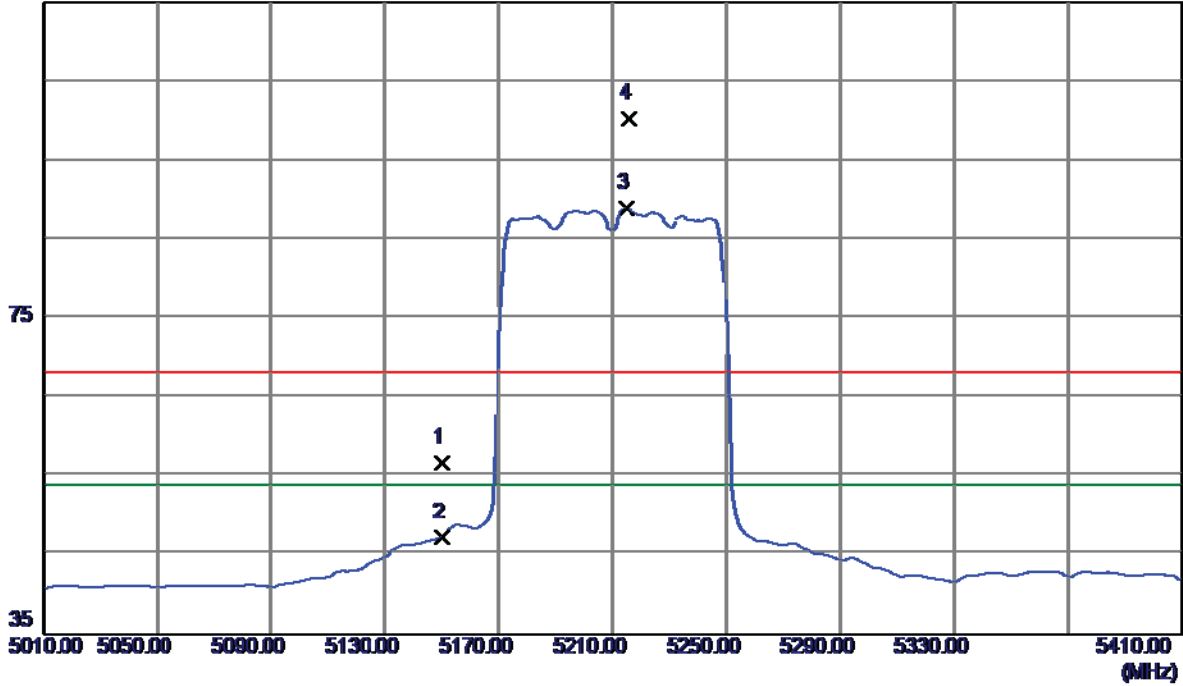

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	16.11	40.62	56.73	68.30	-11.57	Peak	
2	5150.0000	6.75	40.62	47.37	54.00	-6.63	AVG	
3 *	5214.8000	48.03	40.84	88.87	54.00	34.87	AVG	No Limit
4	5215.6000	59.39	40.84	100.23	68.30	31.93	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

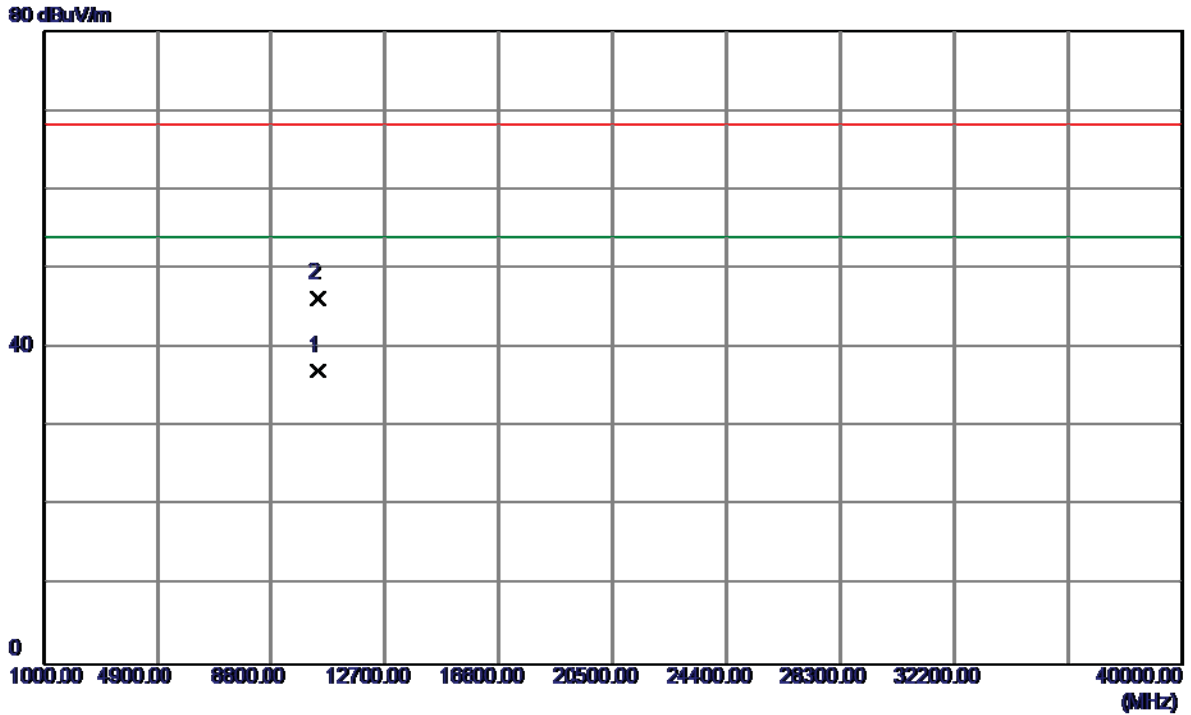


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10419.9450	21.70	15.37	37.07	54.00	-16.93	AVG	
2	10420.2300	30.92	15.37	46.29	68.30	-22.01	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal


115 dBuV/m

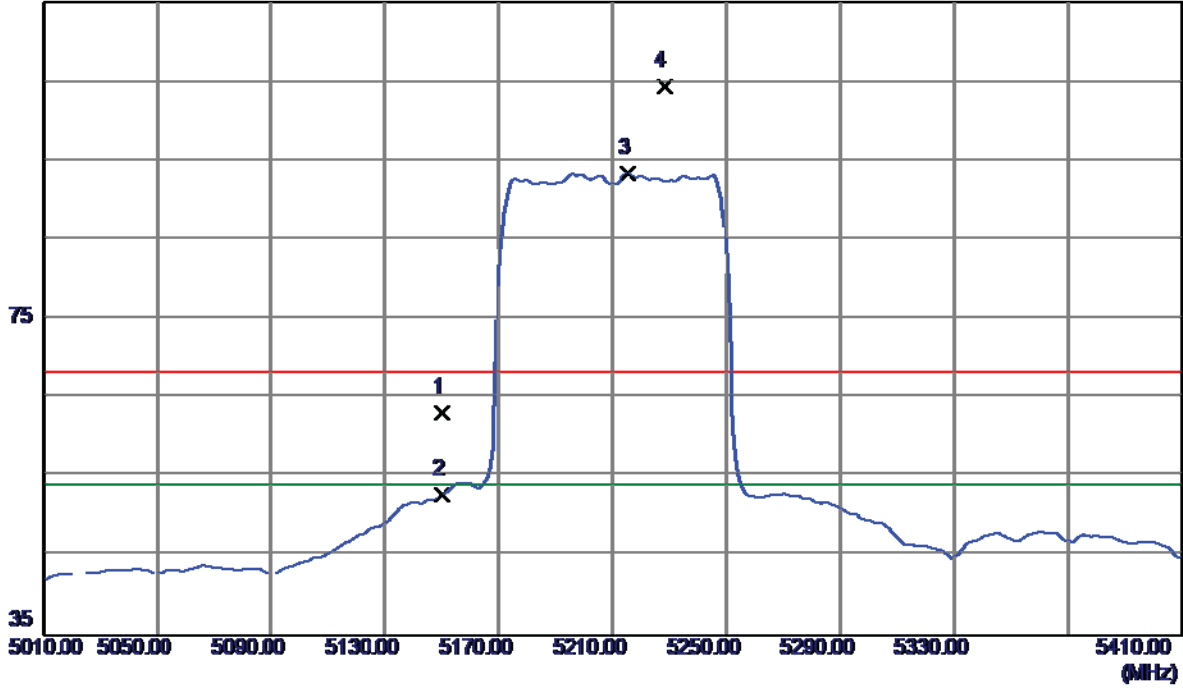

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.61	40.62	63.23	68.30	-5.07	Peak	
2	5150.0000	12.08	40.62	52.70	54.00	-1.30	AVG	
3 *	5215.2000	52.56	40.84	93.40	54.00	39.40	AVG	No Limit
4	5228.0000	63.59	40.88	104.47	68.30	36.17	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal

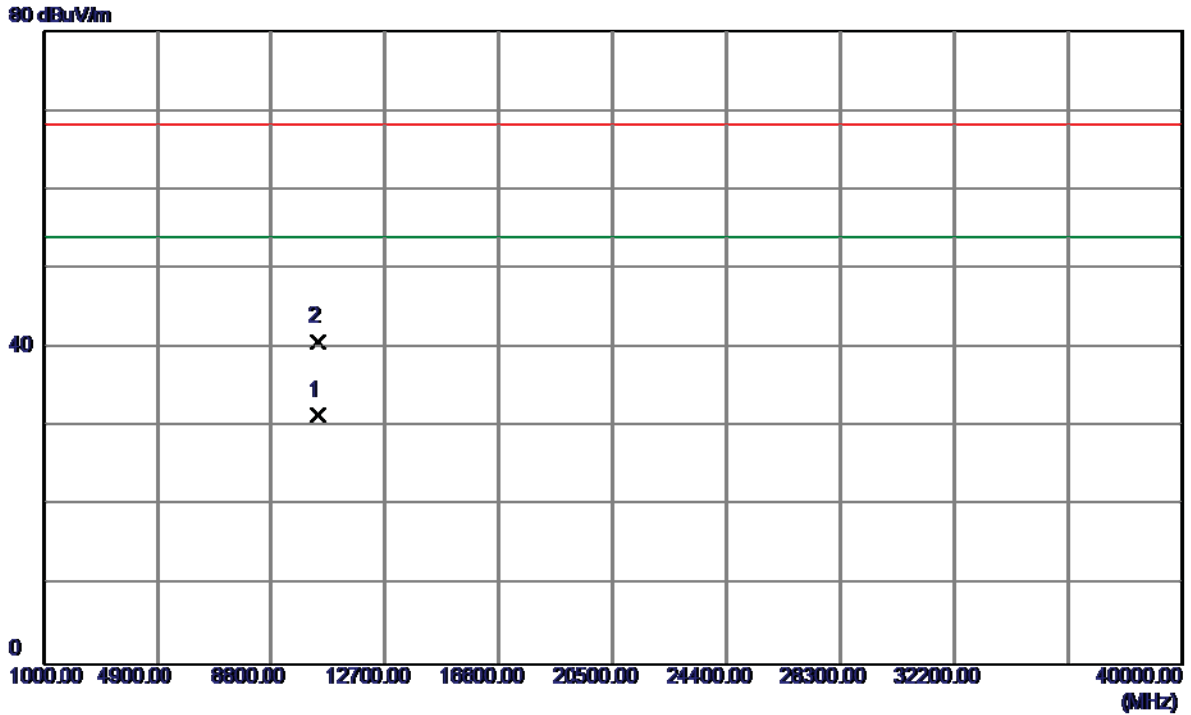


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10418.7000	16.08	15.36	31.44	54.00	-22.56	AVG	
2	10421.3000	25.49	15.37	40.86	68.30	-27.44	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical


130 dBuV/m

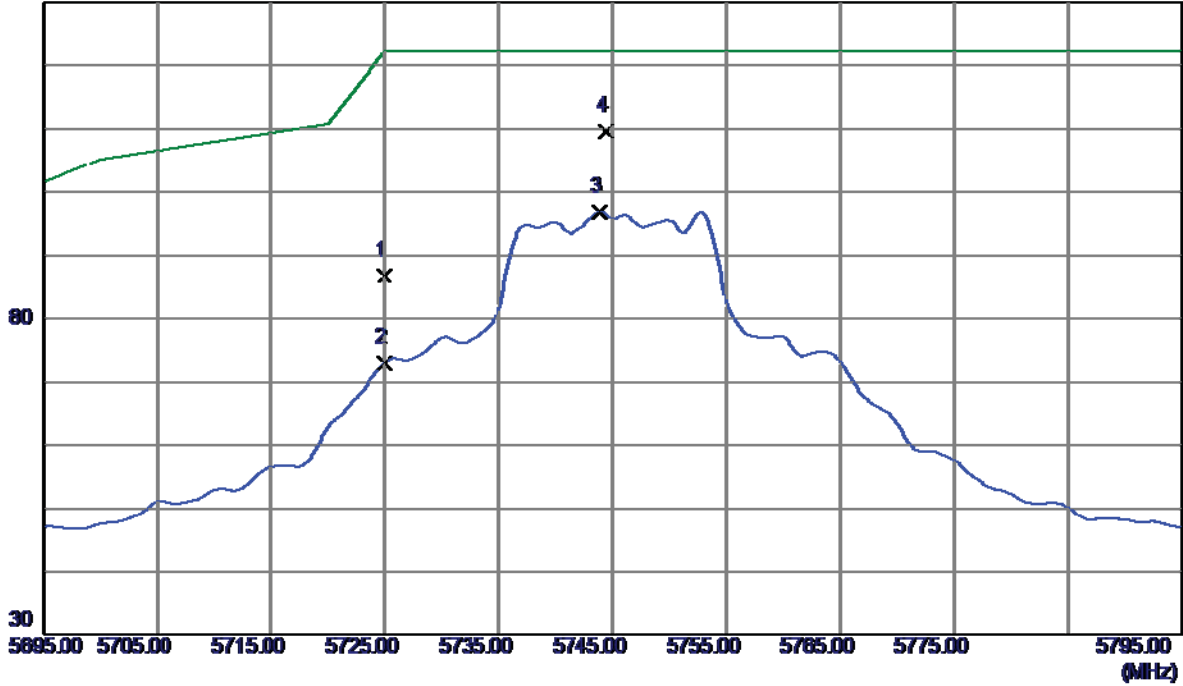

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5725.0000	44.20	42.58	86.78	122.20	-35.42	Peak	
2	5725.0000	30.47	42.58	73.05	122.20	-49.15	AVG	
3	5743.9000	54.21	42.65	96.86	122.20	-25.34	AVG	
4 *	5744.4000	66.96	42.65	109.61	122.20	-12.59	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Vertical

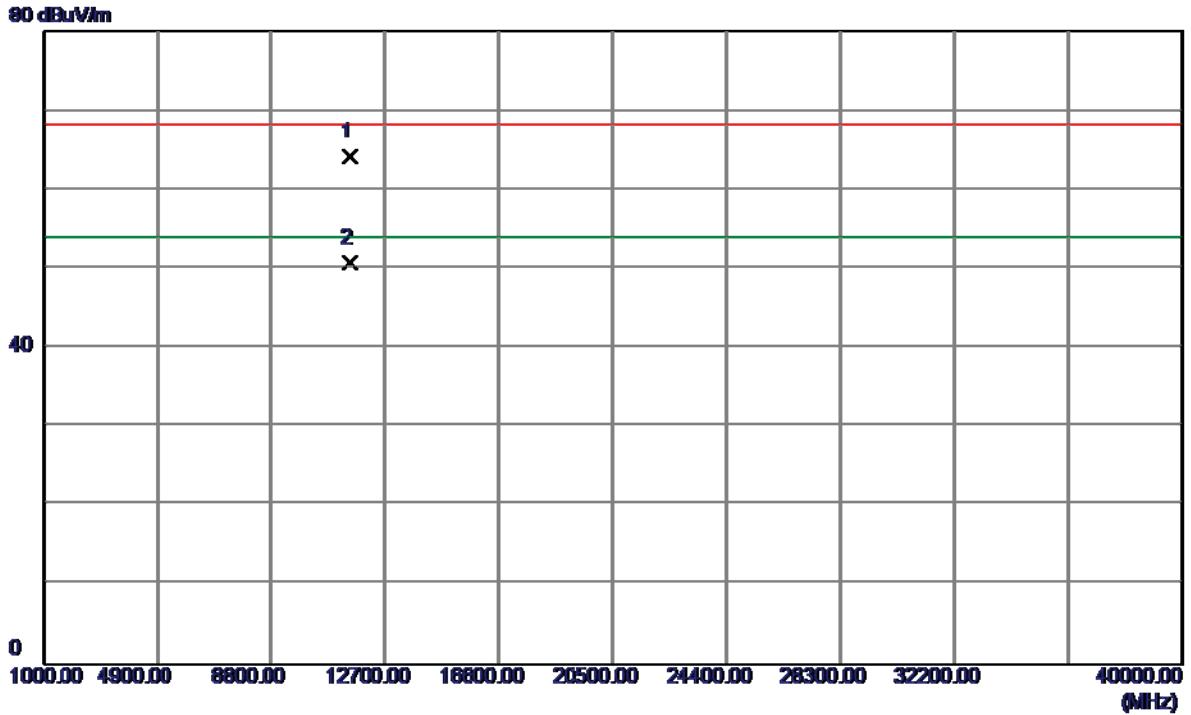

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11488.8480	47.82	16.28	64.10	68.30	-4.20	Peak	
2 *	11488.8980	34.38	16.28	50.66	54.00	-3.34	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

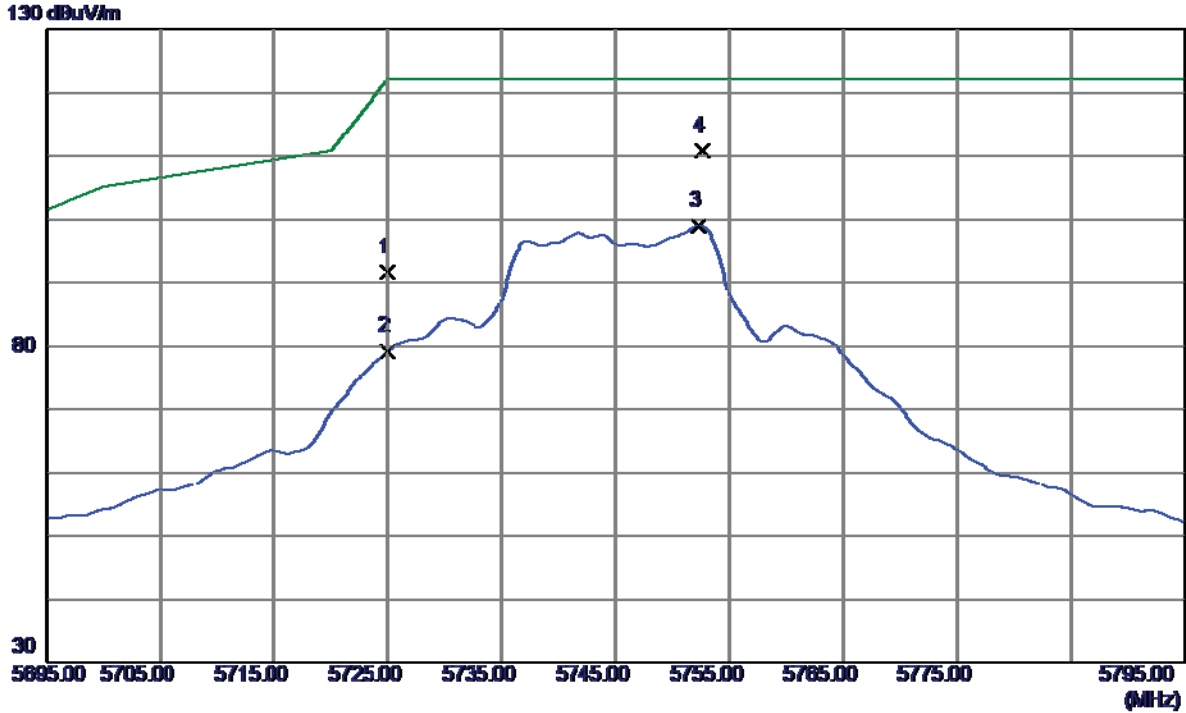

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5725.0000	49.07	42.58	91.65	122.20	-30.55	Peak	
2	5725.0000	36.62	42.58	79.20	122.20	-43.00	AVG	
3	5752.3000	56.32	42.68	99.00	122.20	-23.20	AVG	
4 *	5752.7000	68.14	42.68	110.82	122.20	-11.38	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

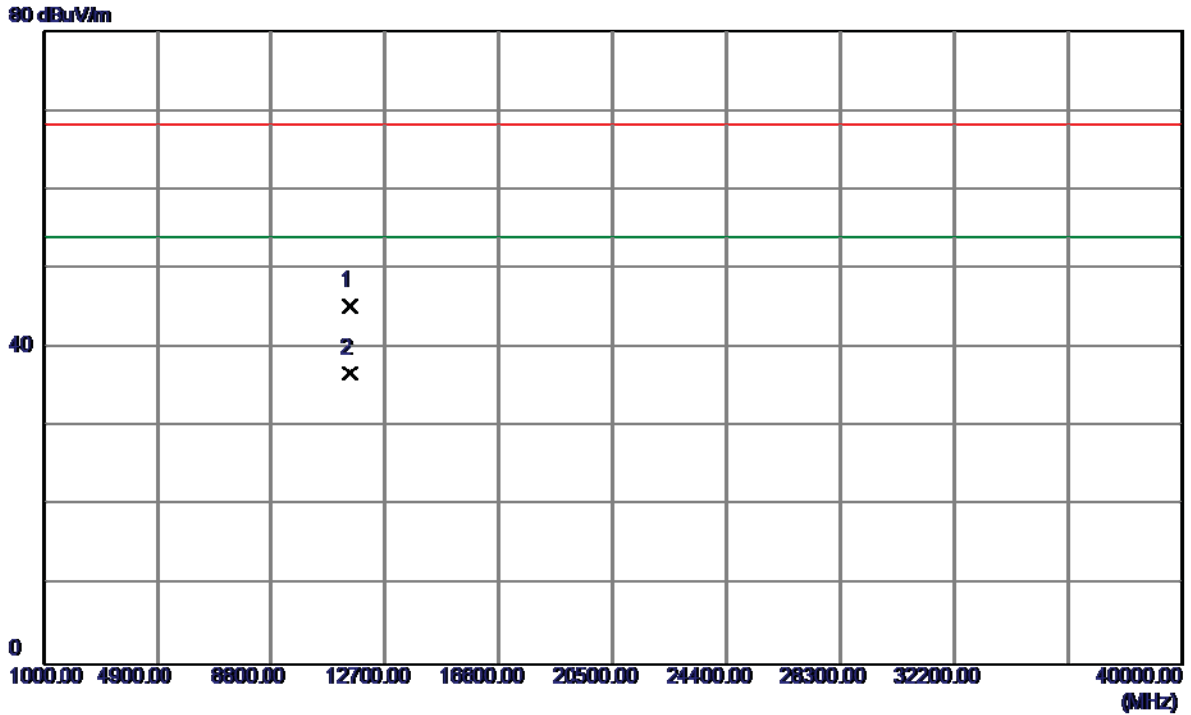

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11488.4000	29.06	16.28	45.34	68.30	-22.96	Peak	
2 *	11491.3000	20.45	16.28	36.73	54.00	-17.27	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

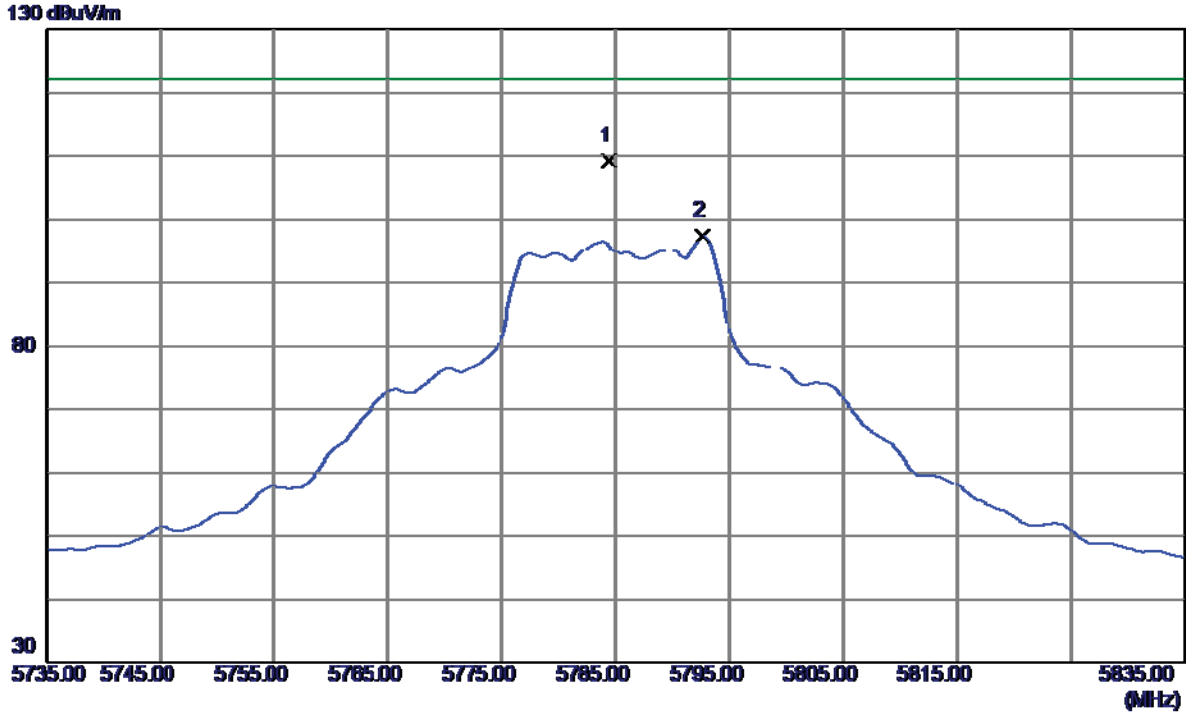

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5784.4000	66.42	42.79	109.21	122.20	-12.99	Peak	
2	5792.7000	54.51	42.82	97.33	122.20	-24.87	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

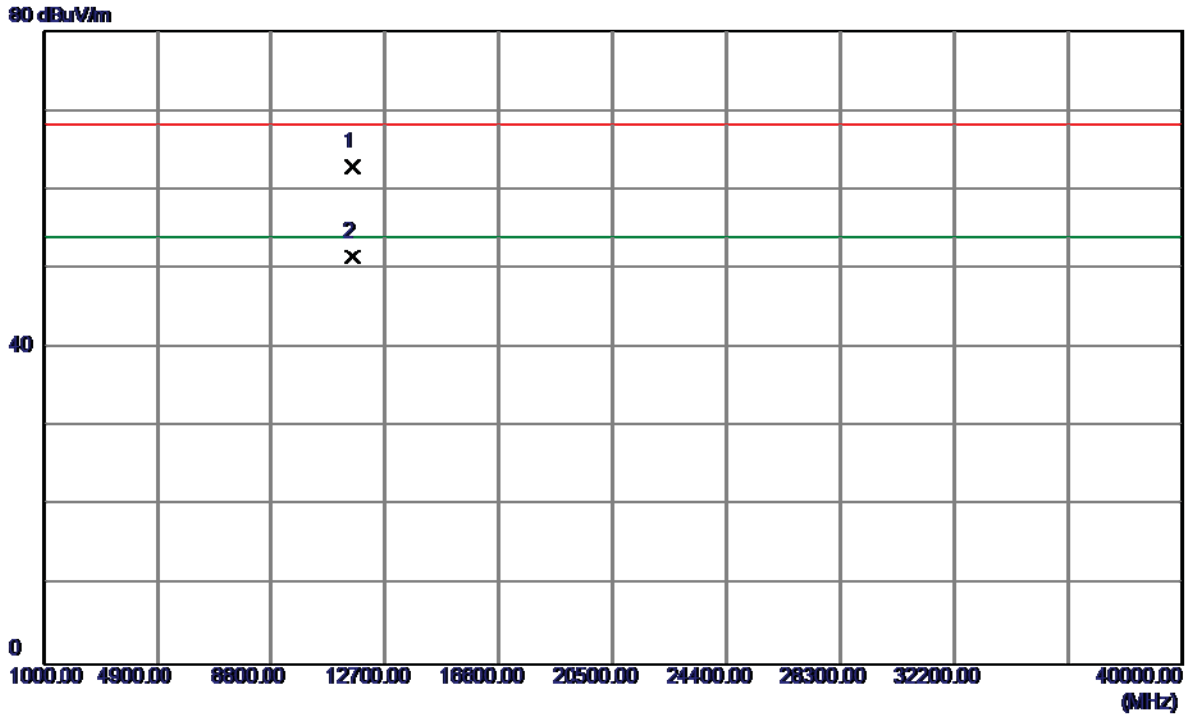

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11568.6470	46.53	16.36	62.89	68.30	-5.41	Peak	
2 *	11568.9480	35.22	16.36	51.58	54.00	-2.42	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Horizontal

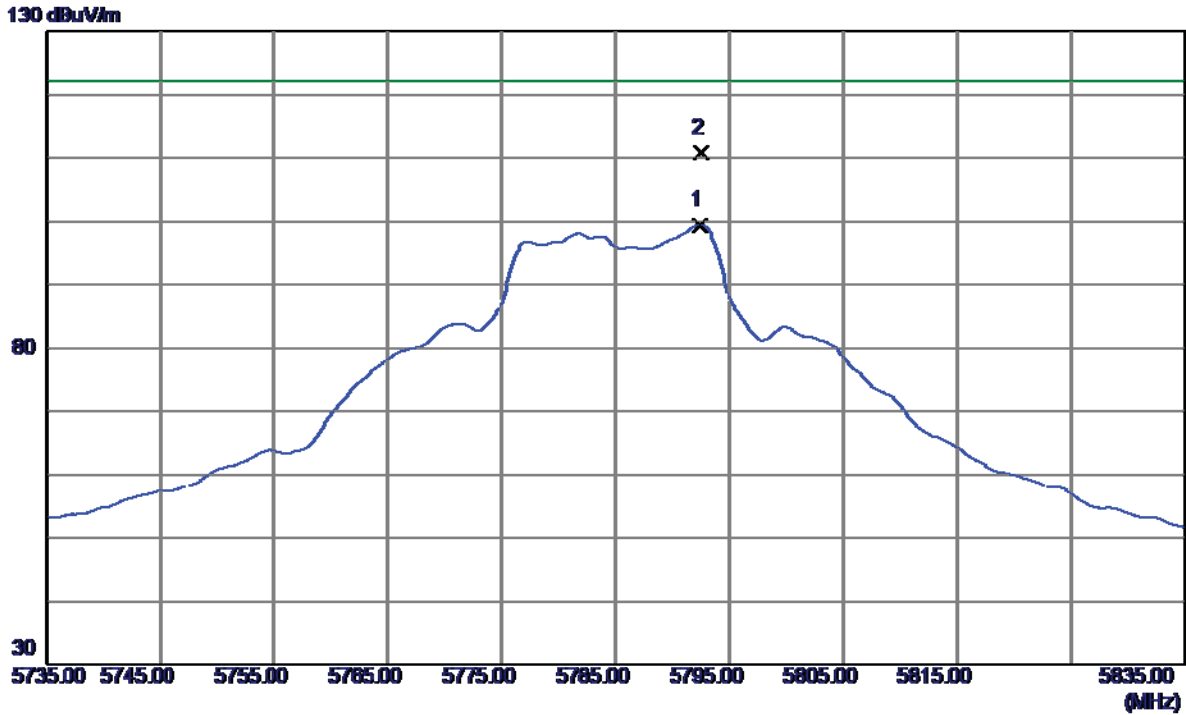

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5792.4000	56.67	42.82	99.49	122.20	-22.71	AVG	
2 *	5792.6000	67.90	42.82	110.72	122.20	-11.48	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Horizontal

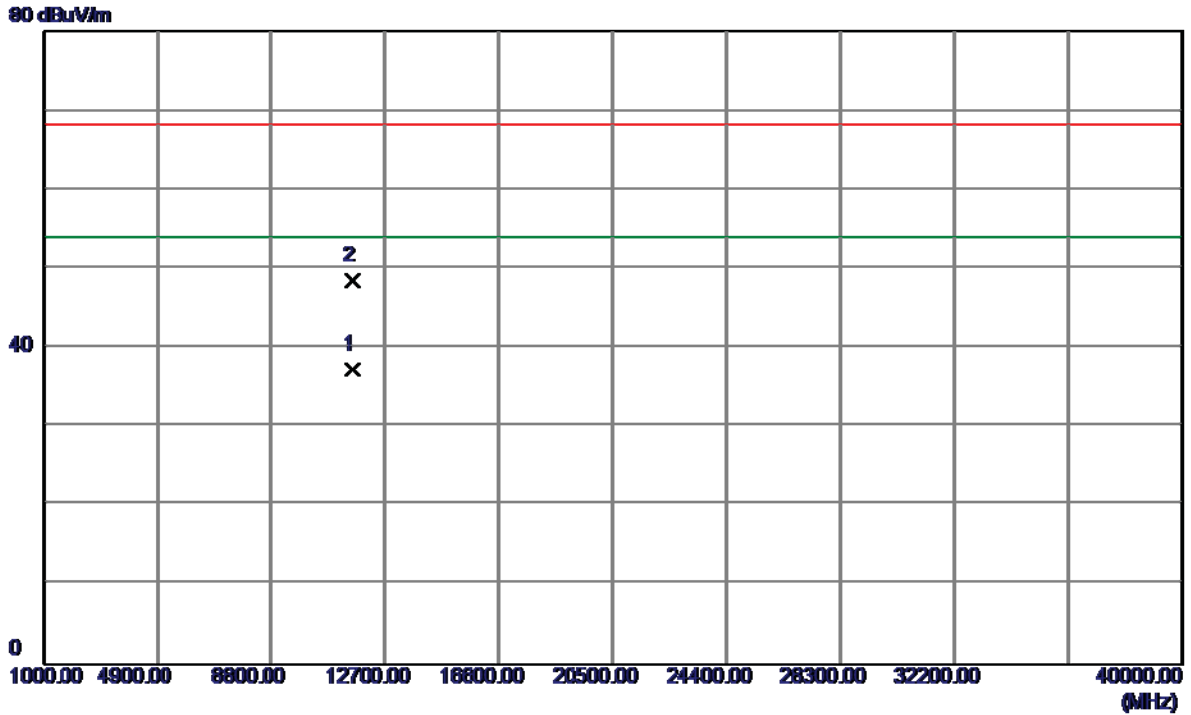

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.5000	20.85	16.36	37.21	54.00	-16.79	AVG	
2	11571.3000	32.06	16.36	48.42	68.30	-19.88	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

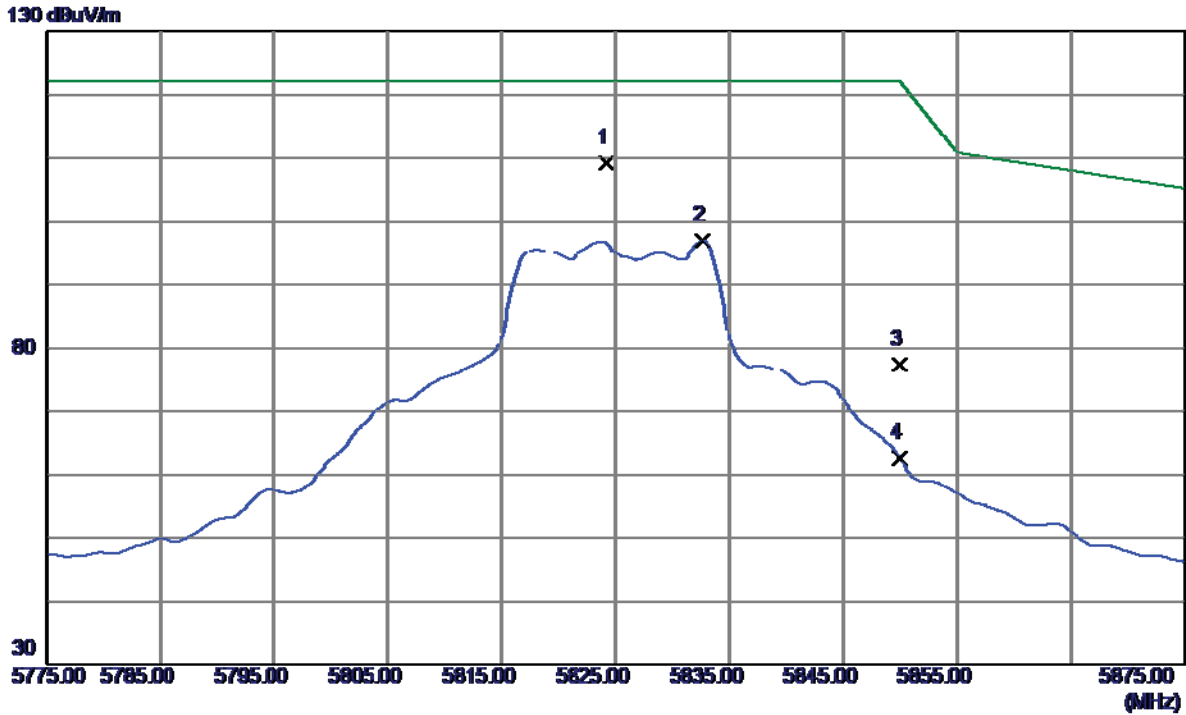

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5824.2000	66.29	42.93	109.22	122.20	-12.98	Peak	
2	5832.7000	54.10	42.96	97.06	122.20	-25.14	AVG	
3	5850.0000	34.36	43.03	77.39	122.20	-44.81	Peak	
4	5850.0000	19.66	43.03	62.69	122.20	-59.51	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

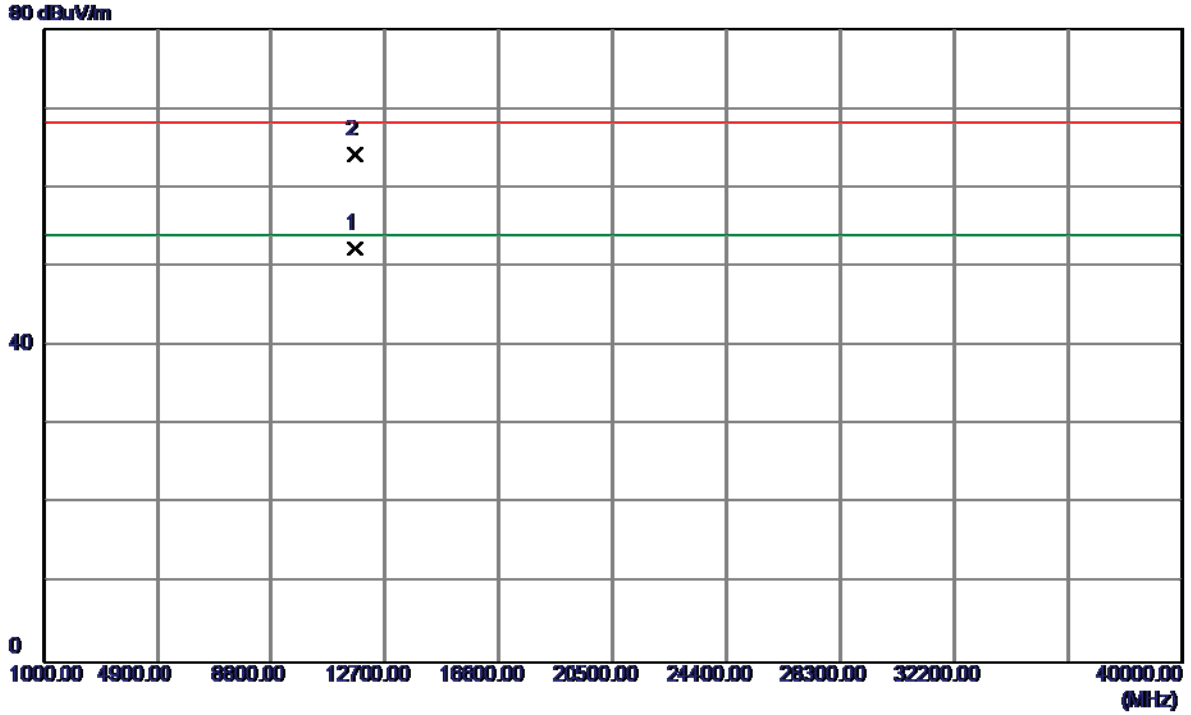

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11648.9480	35.82	16.45	52.27	54.00	-1.73	AVG	
2	11657.4650	47.63	16.46	64.09	68.30	-4.21	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

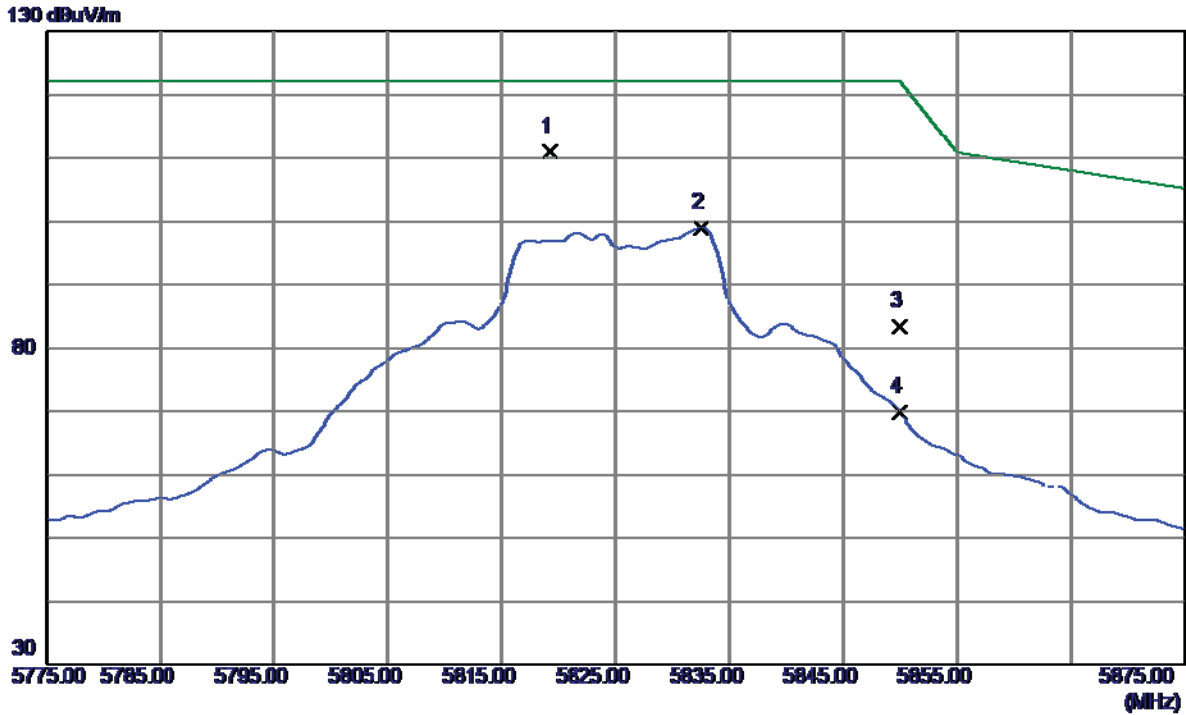

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5819.2000	68.02	42.92	110.94	122.20	-11.26	Peak	
2	5832.6000	56.10	42.96	99.06	122.20	-23.14	AVG	
3	5850.0000	40.28	43.03	83.31	122.20	-38.89	Peak	
4	5850.0000	26.84	43.03	69.87	122.20	-52.33	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

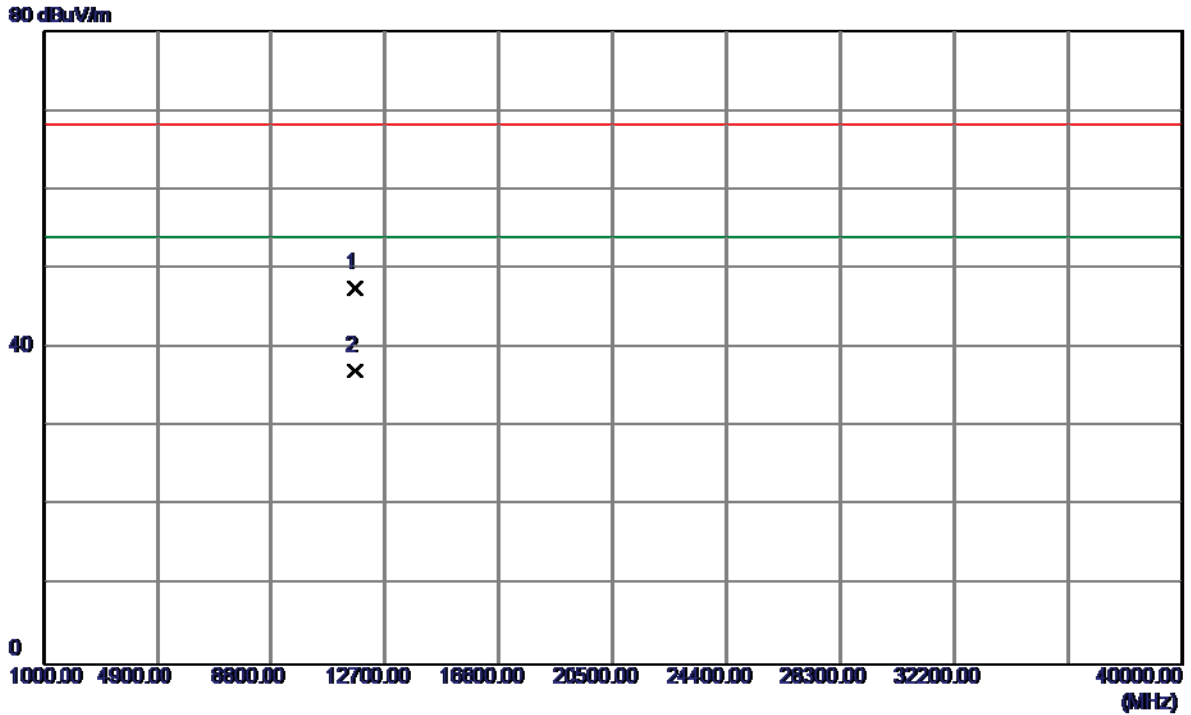

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11646.6000	31.02	16.45	47.47	68.30	-20.83	Peak	
2 *	11656.1000	20.60	16.46	37.06	54.00	-16.94	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

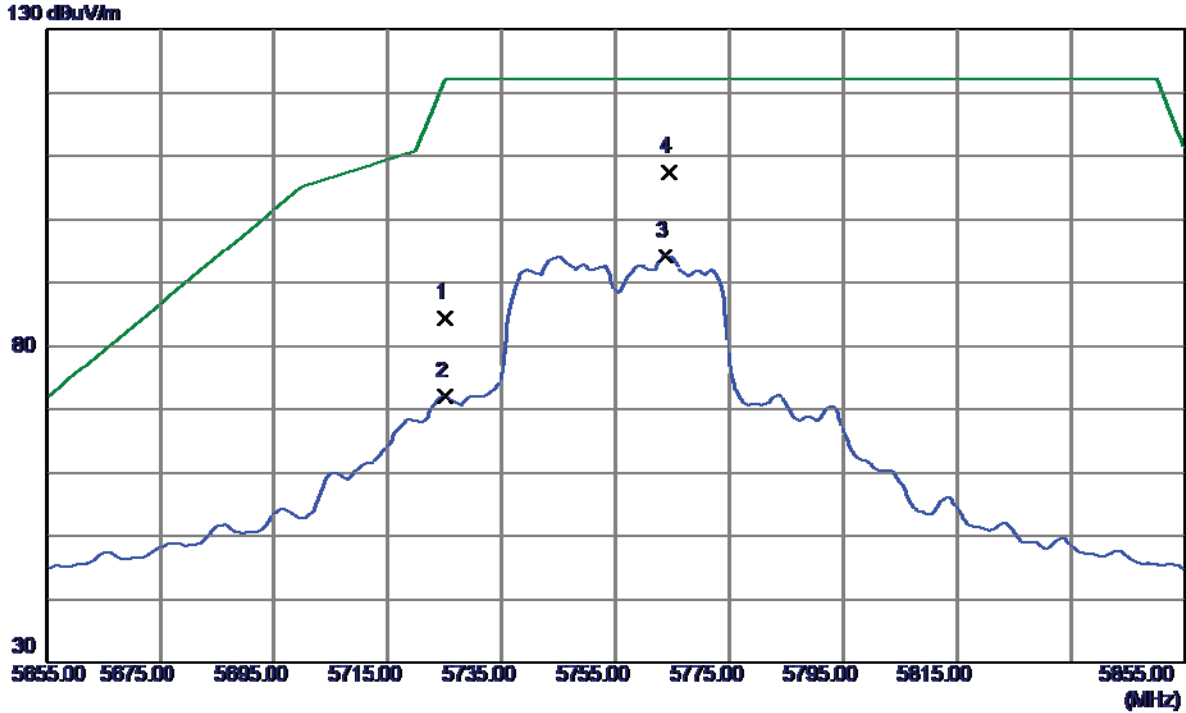

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5725.0000	41.74	42.58	84.32	122.20	-37.88	Peak	
2	5725.0000	29.43	42.58	72.01	122.20	-50.19	AVG	
3	5763.6000	51.47	42.72	94.19	122.20	-28.01	AVG	
4 *	5764.4000	64.74	42.72	107.46	122.20	-14.74	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

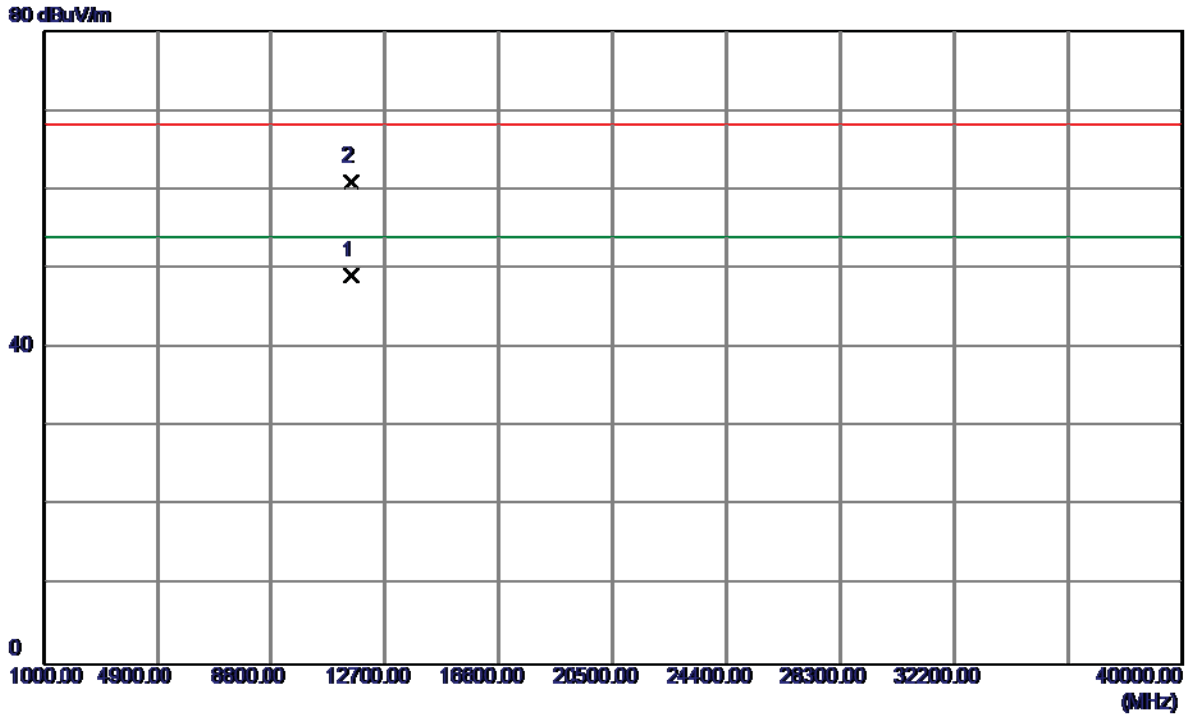

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.8000	32.90	16.29	49.19	54.00	-4.81	AVG	
2	11509.0000	44.73	16.29	61.02	68.30	-7.28	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

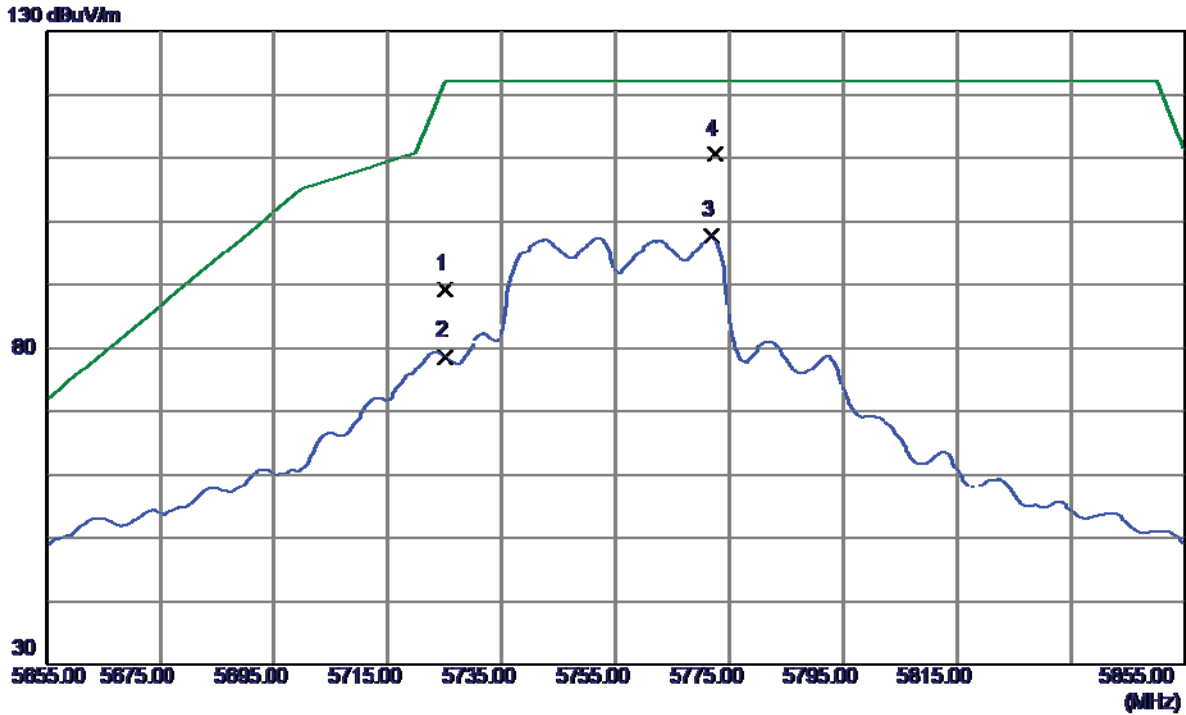

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5725.0000	46.70	42.58	89.28	122.20	-32.92	Peak	
2	5725.0000	36.12	42.58	78.70	122.20	-43.50	AVG	
3	5771.8000	55.05	42.75	97.80	122.20	-24.40	AVG	
4 *	5772.6000	67.90	42.75	110.65	122.20	-11.55	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

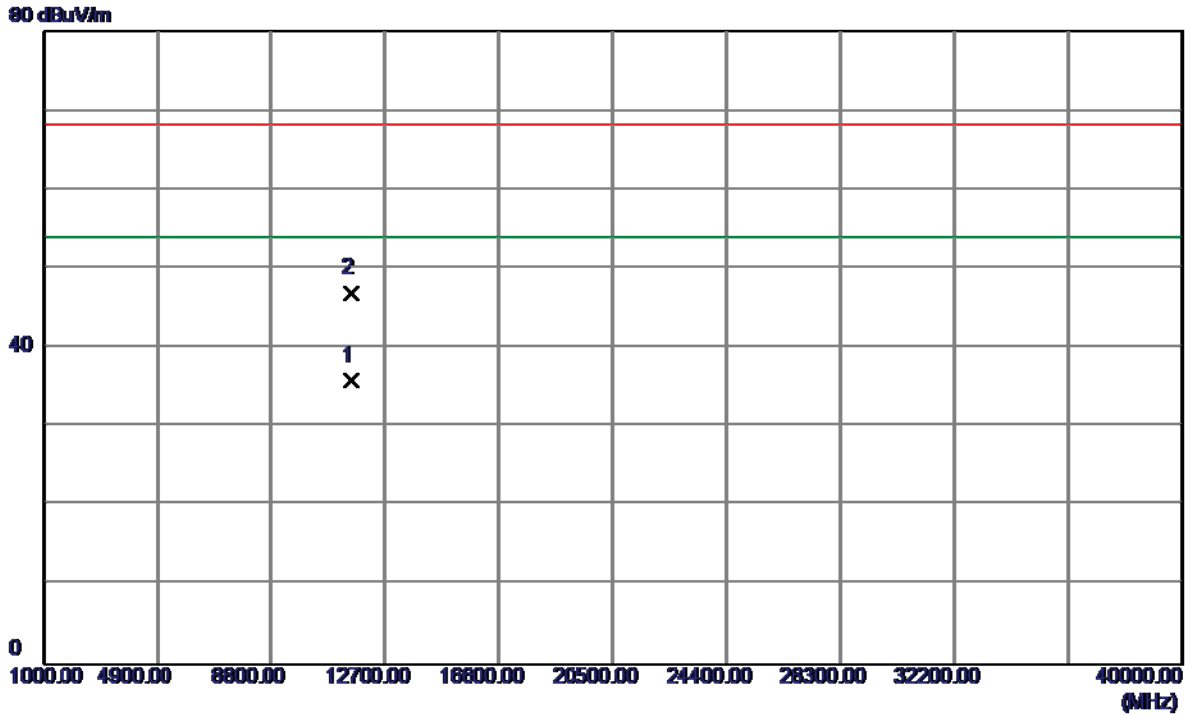

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11511.3000	19.55	16.29	35.84	54.00	-18.16	AVG	
2	11511.4000	30.66	16.29	46.95	68.30	-21.35	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

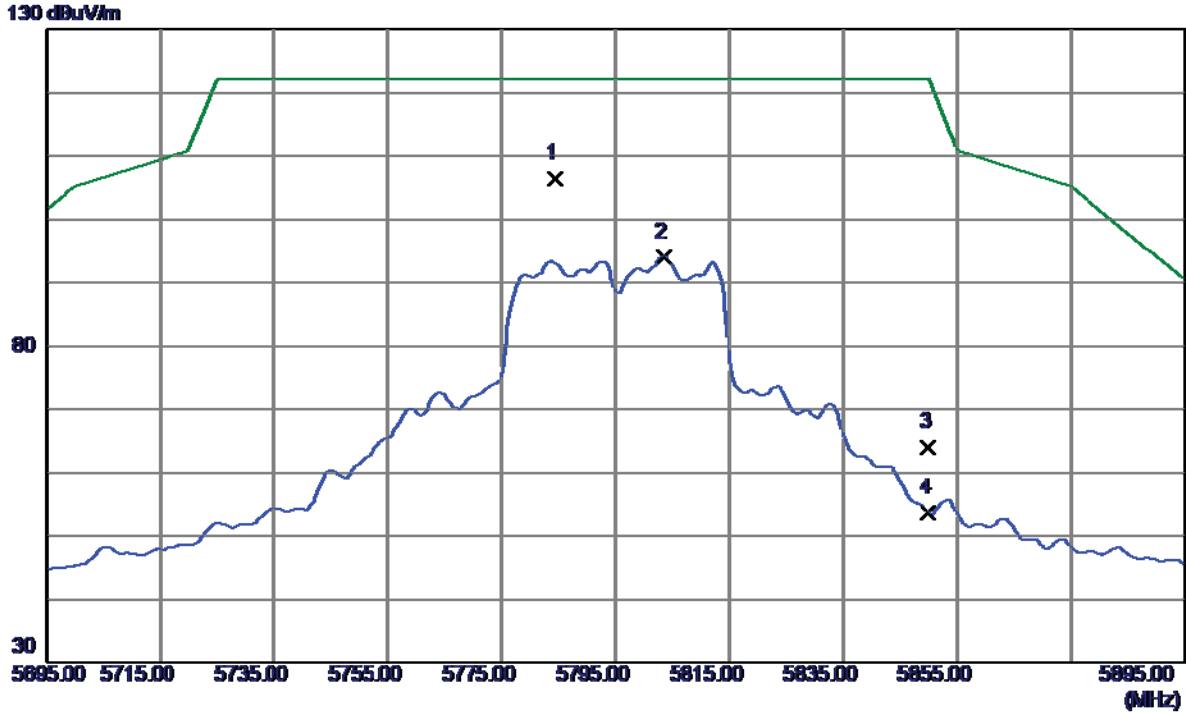

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5784.4000	63.64	42.79	106.43	122.20	-15.77	Peak	
2	5803.4000	51.24	42.86	94.10	122.20	-28.10	AVG	
3	5850.0000	20.94	43.03	63.97	122.20	-58.23	Peak	
4	5850.0000	10.61	43.03	53.64	122.20	-68.56	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

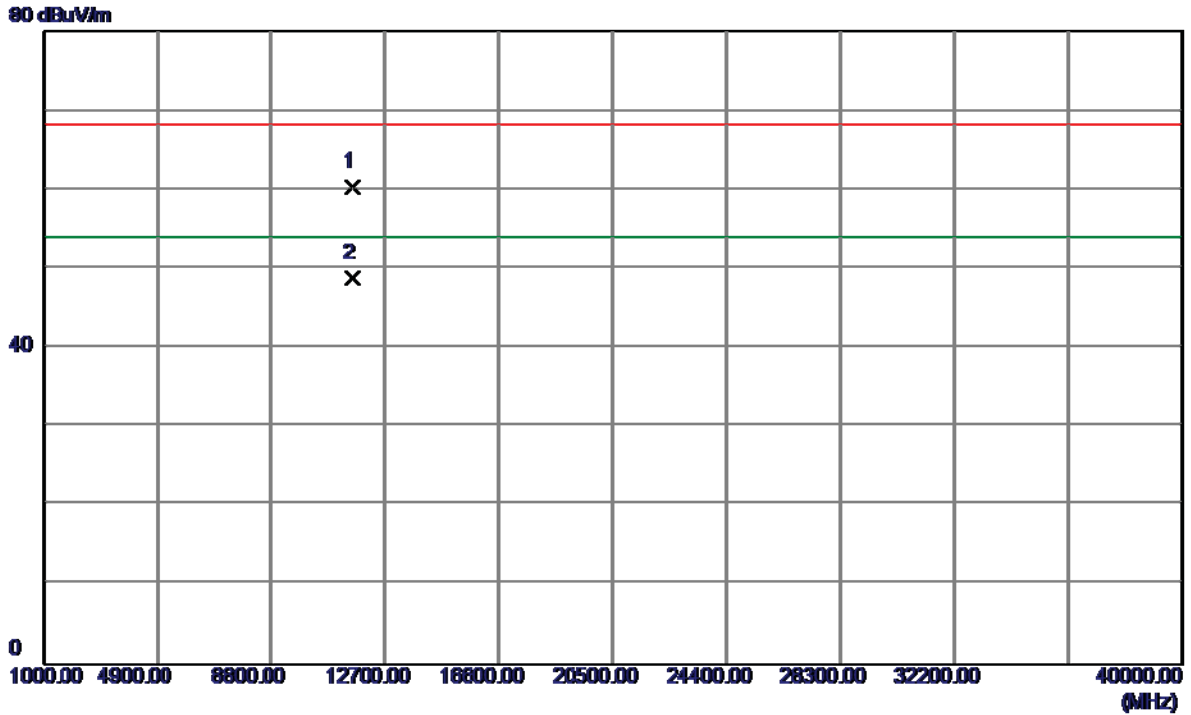

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11588.8000	43.92	16.38	60.30	68.30	-8.00	Peak	
2 *	11588.9000	32.39	16.38	48.77	54.00	-5.23	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

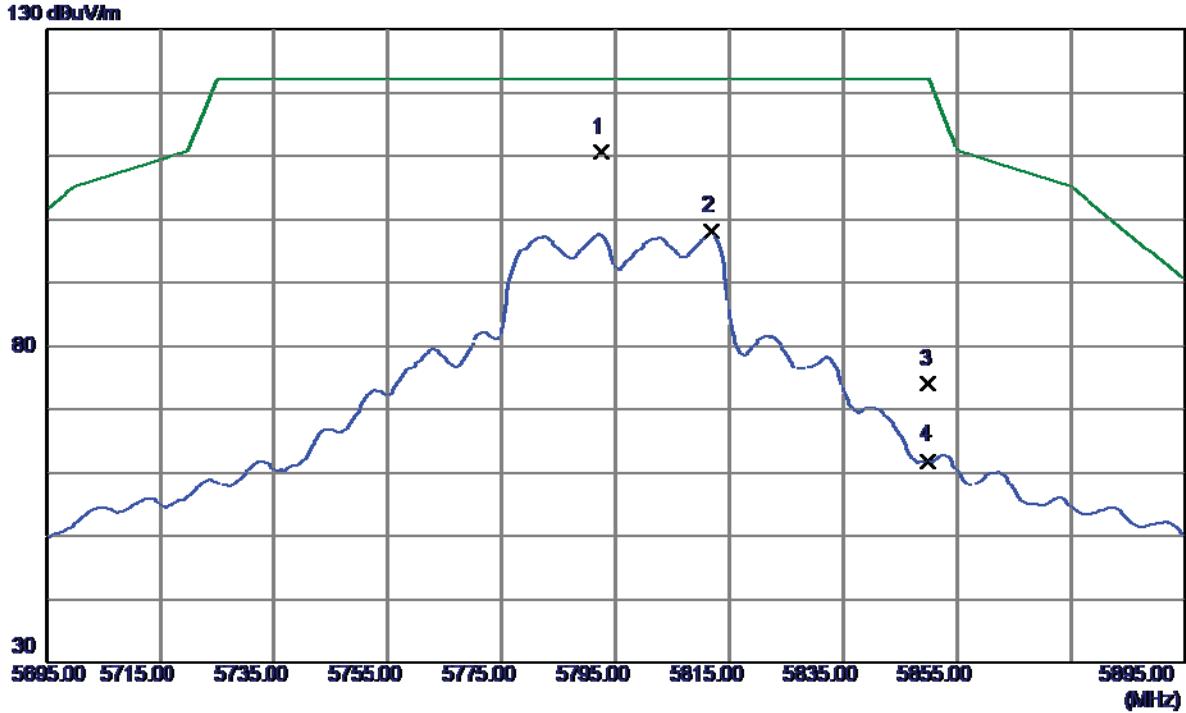

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5792.6000	67.72	42.82	110.54	122.20	-11.66	Peak	
2	5811.8000	55.23	42.89	98.12	122.20	-24.08	AVG	
3	5850.0000	30.91	43.03	73.94	122.20	-48.26	Peak	
4	5850.0000	18.87	43.03	61.90	122.20	-60.30	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

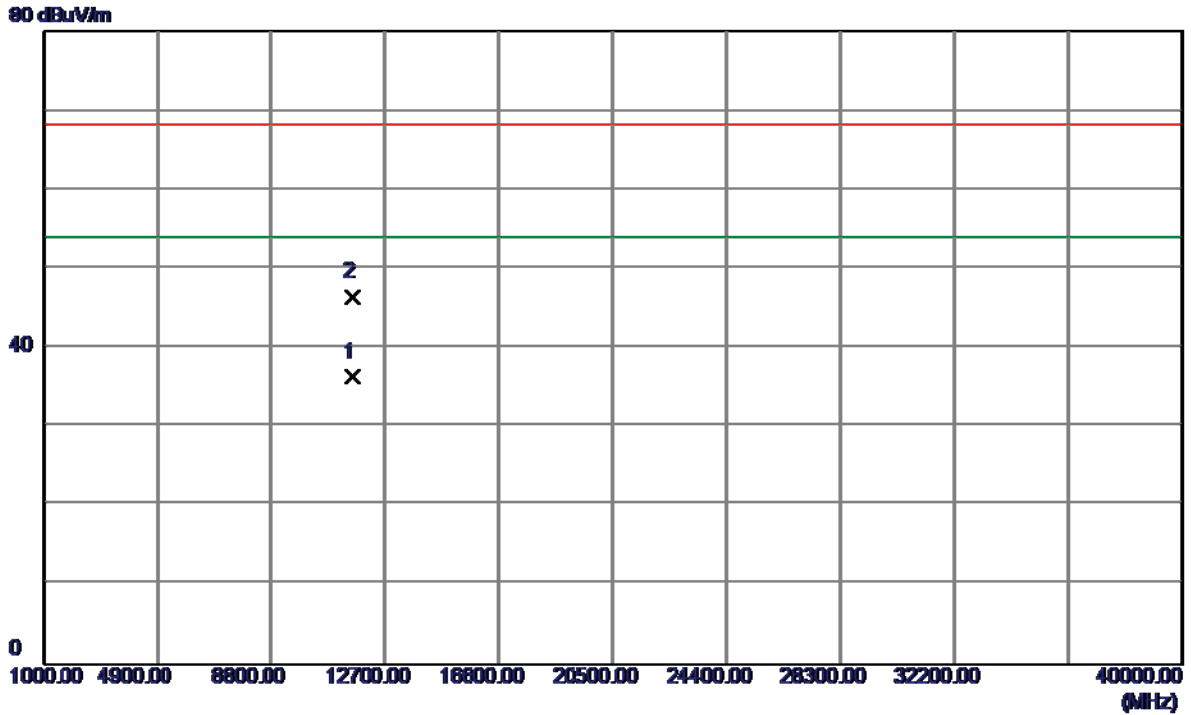

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11591.1000	19.97	16.38	36.35	54.00	-17.65	AVG	
2	11591.5000	30.04	16.38	46.42	68.30	-21.88	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

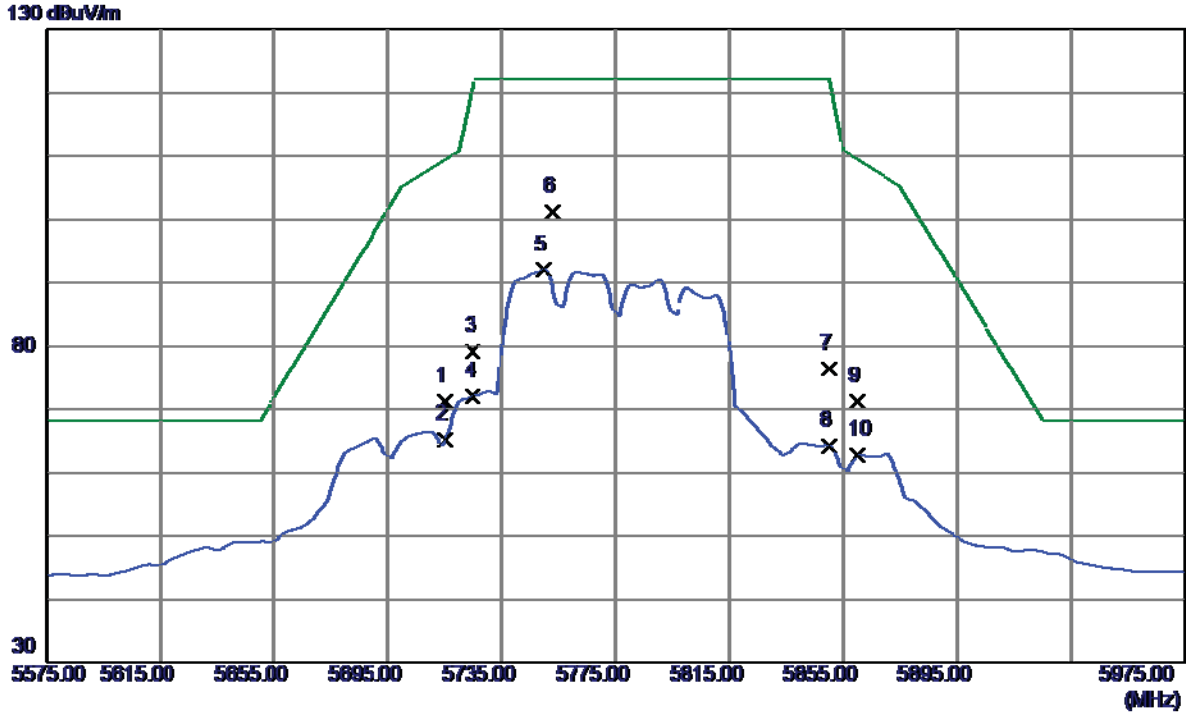

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	28.66	42.55	71.21	109.40	-38.19	Peak	
2	5715.0000	22.70	42.55	65.25	109.40	-44.15	AVG	
3	5725.0000	36.67	42.58	79.25	122.20	-42.95	Peak	
4	5725.0000	29.44	42.58	72.02	122.20	-50.18	AVG	
5	5749.8000	49.23	42.67	91.90	122.20	-30.30	AVG	
6 *	5752.6000	58.54	42.68	101.22	122.20	-20.98	Peak	
7	5850.0000	33.34	43.03	76.37	122.20	-45.83	Peak	
8	5850.0000	21.18	43.03	64.21	122.20	-57.99	AVG	
9	5860.0000	28.18	43.06	71.24	109.40	-38.16	Peak	
10	5860.0000	19.71	43.06	62.77	109.40	-46.63	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

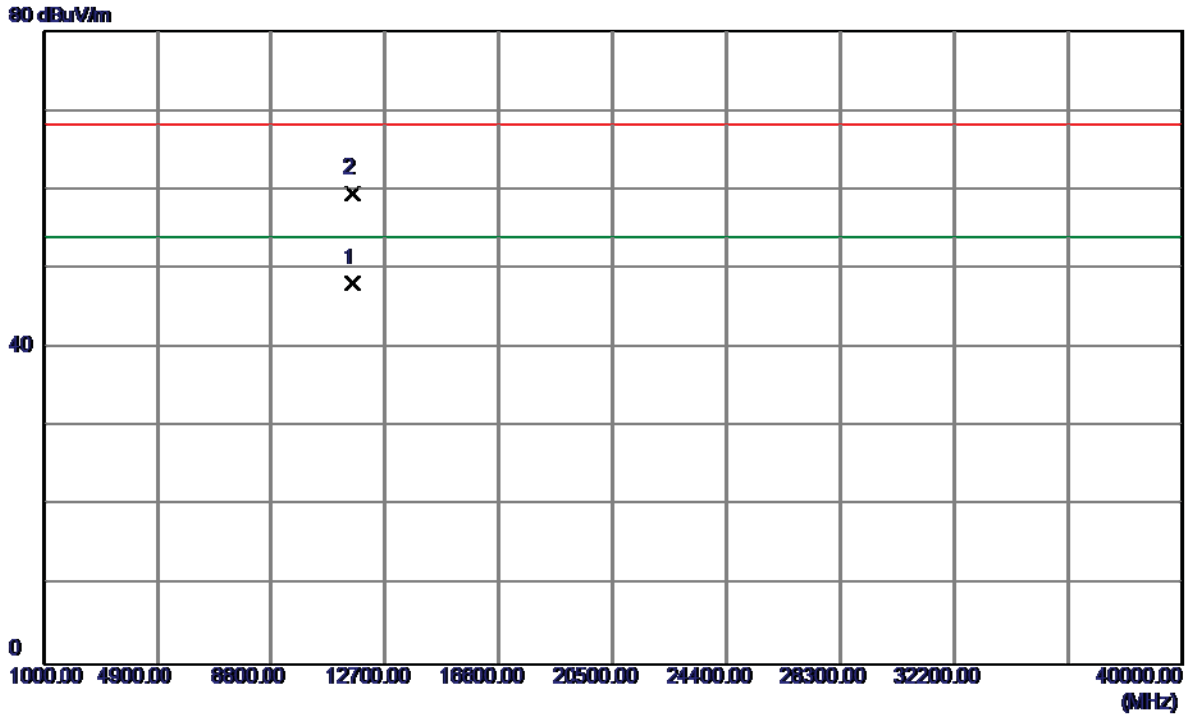

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11558.8000	31.79	16.35	48.14	54.00	-5.86	AVG	
2	11569.0000	43.14	16.36	59.50	68.30	-8.80	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

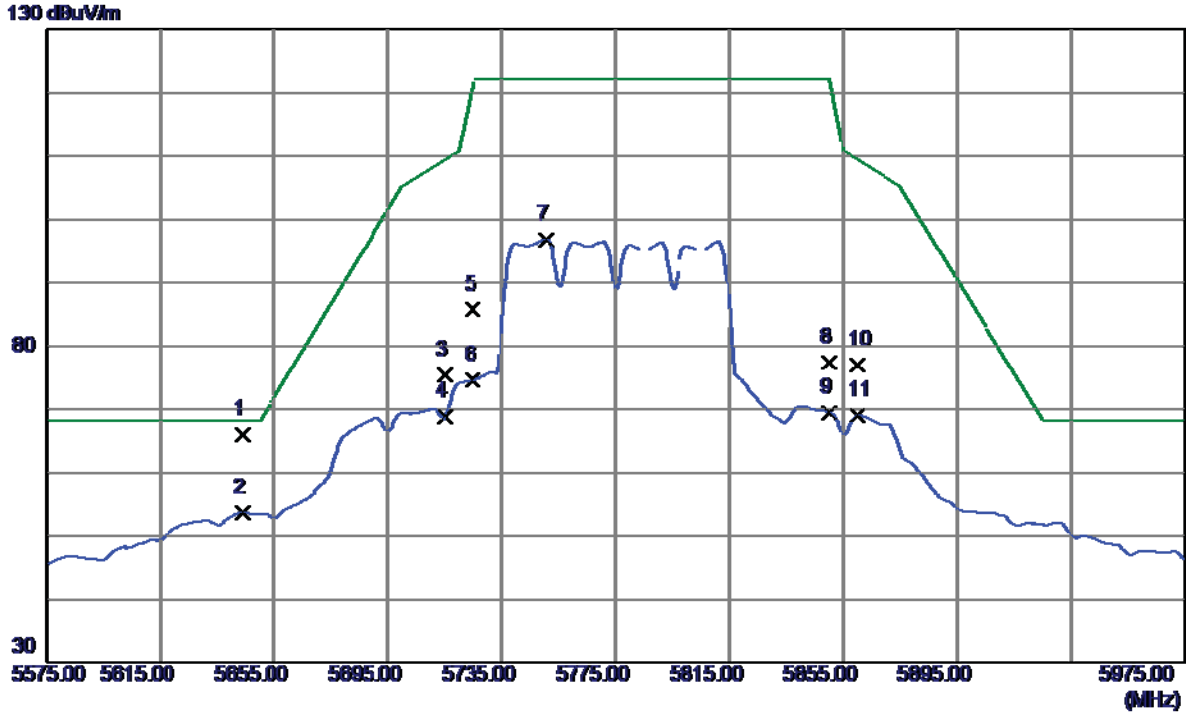

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5643.8000	23.74	42.29	66.03	68.20	-2.17	Peak	
2	5643.8000	11.32	42.29	53.61	68.20	-14.59	AVG	
3	5715.0000	32.92	42.55	75.47	109.40	-33.93	Peak	
4	5715.0000	26.31	42.55	68.86	109.40	-40.54	AVG	
5	5725.0000	43.12	42.58	85.70	122.20	-36.50	Peak	
6	5725.0000	31.98	42.58	74.56	122.20	-47.64	AVG	
7	5750.6000	54.21	42.67	96.88	122.20	-25.32	AVG	
8	5850.0000	34.33	43.03	77.36	122.20	-44.84	Peak	
9	5850.0000	26.41	43.03	69.44	122.20	-52.76	AVG	
10	5860.0000	33.92	43.06	76.98	109.40	-32.42	Peak	
11	5860.0000	25.88	43.06	68.94	109.40	-40.46	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

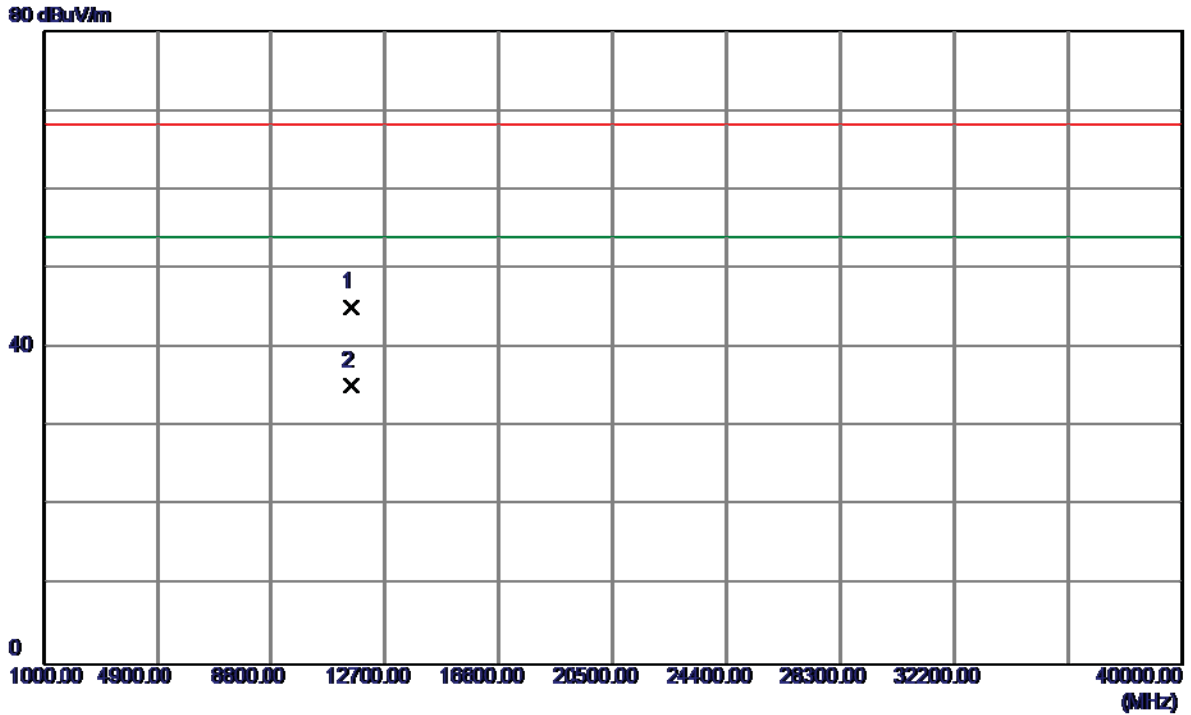

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11516.2000	28.88	16.30	45.18	68.30	-23.12	Peak	
2 *	11550.4000	18.84	16.34	35.18	54.00	-18.82	AVG	

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 2.06 msec

T_{Total} : 2.18 msec

Duty cycle: 94.50%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

$$\text{Duty Factor} = 0.25$$

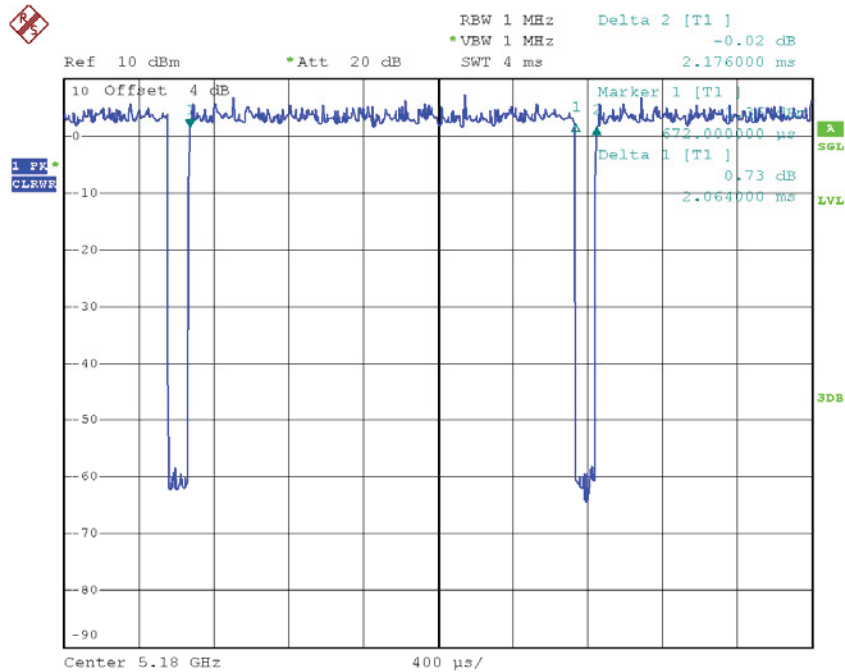

Date: 28.FEB.2017 11:33:23

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.68 msec

T_{Total} : 0.78 msec

Duty cycle: 87.18%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.60

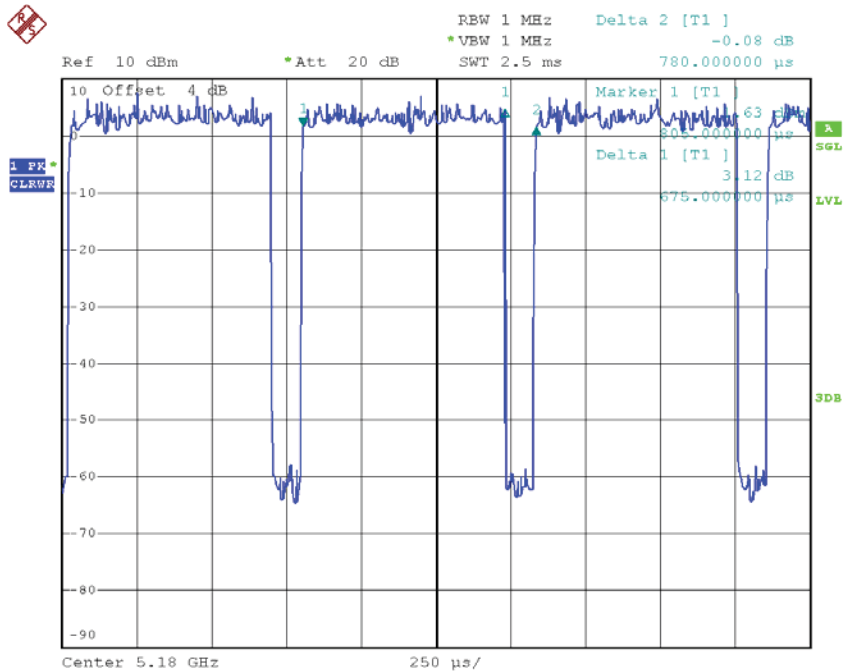

Date: 28.FEB.2017 13:12:25

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.32 msec

T_{Total} : 0.46 msec

Duty cycle: 69.57%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 1.58

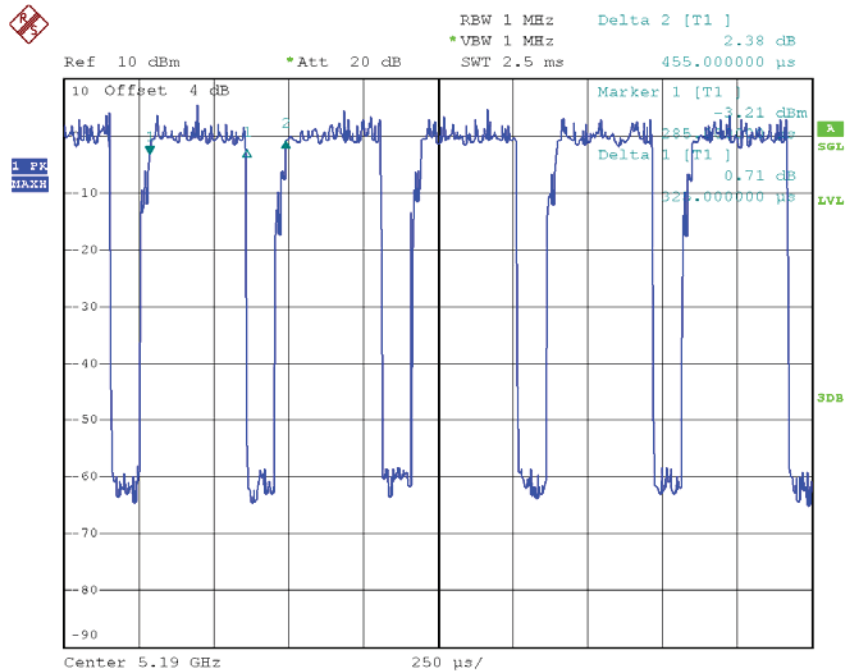

Date: 28.FEB.2017 11:24:03

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.68 msec

T_{Total} : 0.72 msec

Duty cycle: 94.44%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.25

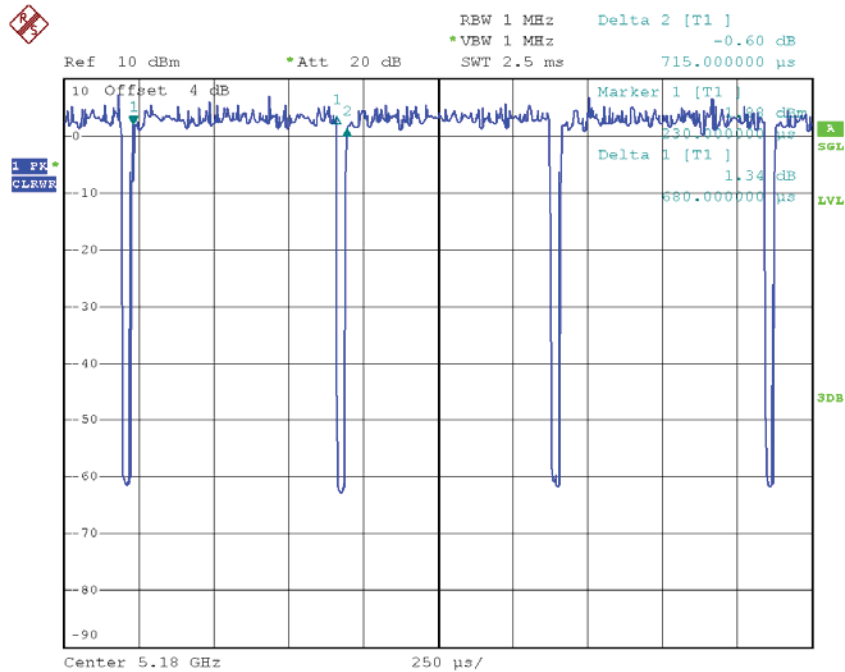

Date: 28.FEB.2017 13:12:45

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.32 msec

T_{Total} : 0.39 msec

Duty cycle: 82.05%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.86

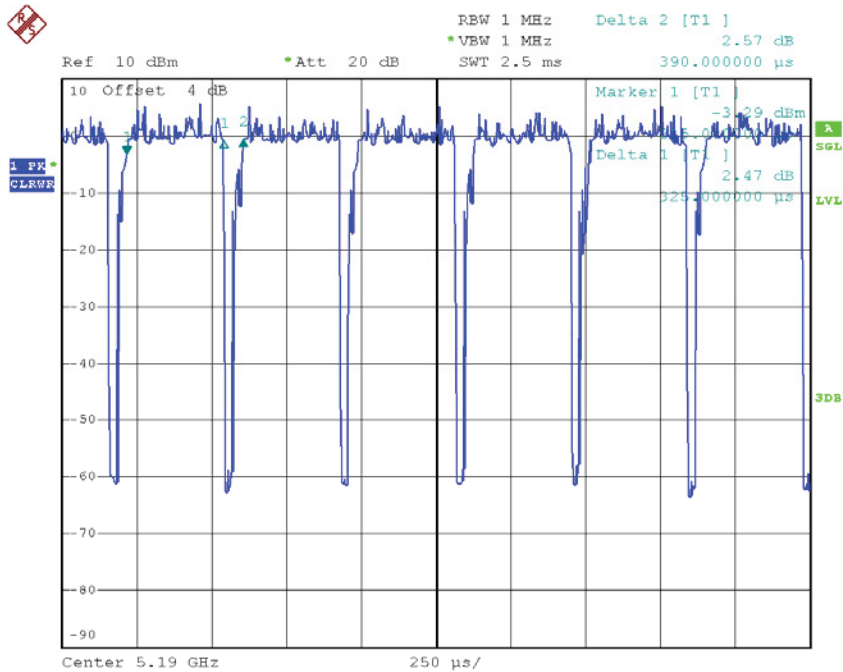

Date: 28.FEB.2017 11:32:01

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.16 msec

T_{Total} : 0.22 msec

Duty cycle: 72.73%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 1.38

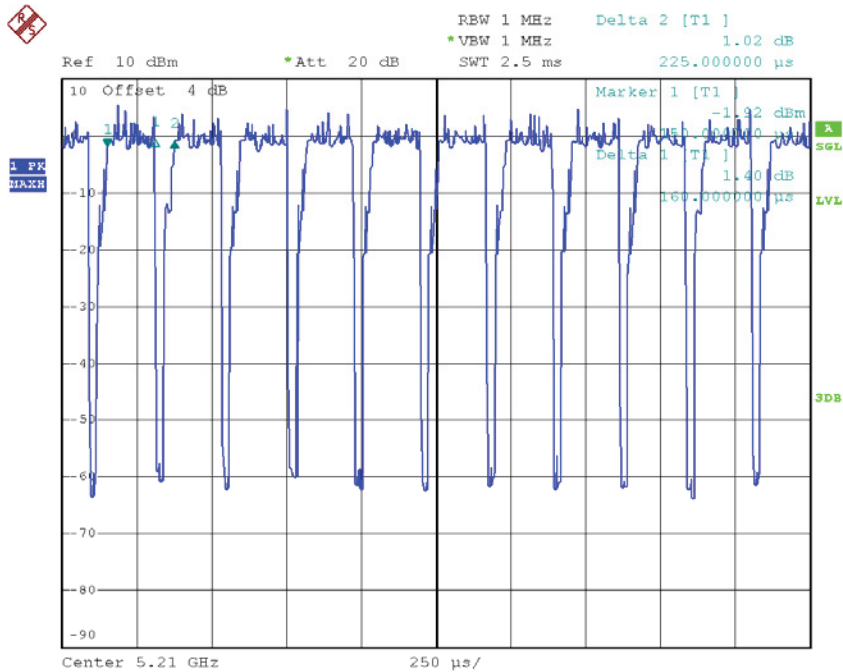


Date: 28.FEB.2017 15:07:30

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

ATTACHMENT E - BANDWIDTH


Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	32.99	18.00
CH40	5200	45.09	29.40
CH48	5240	43.80	29.30

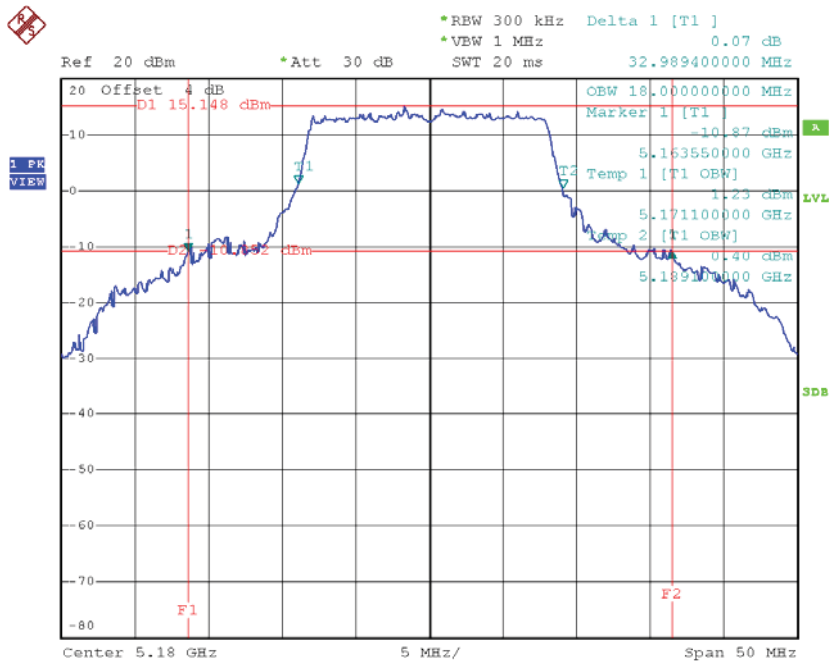TX CH36


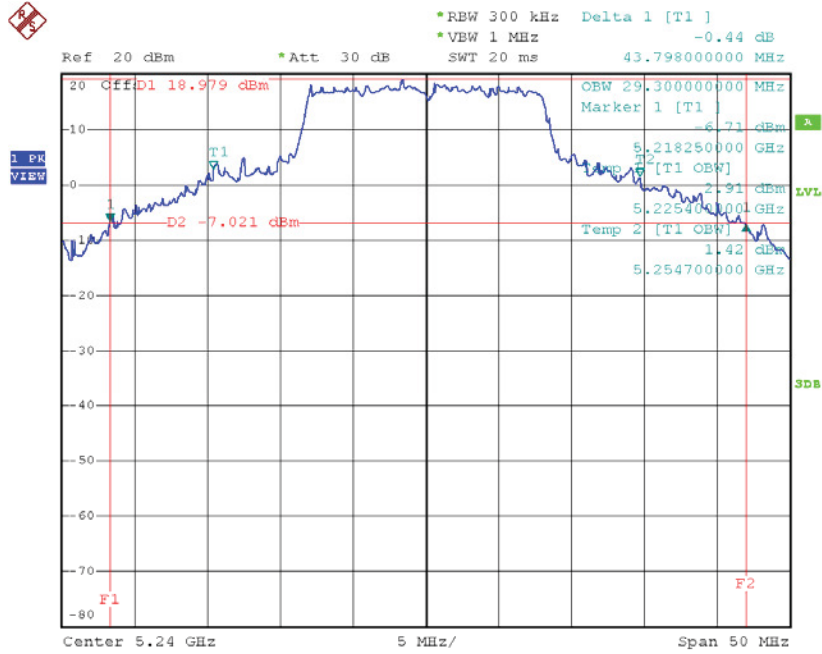
Date: 28.FEB.2017 13:19:57

TX CH40

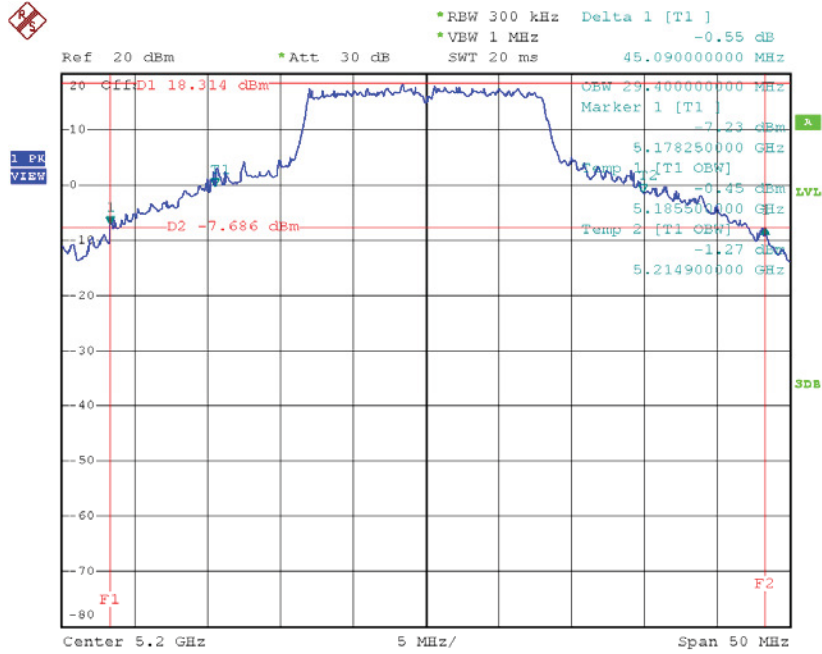

Date: 28.FEB.2017 13:20:36

TX CH48




Date: 28.FEB.2017 13:21:39

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	29.20	18.30
CH40	5200	42.49	22.30
CH48	5240	43.15	21.40

TX CH36

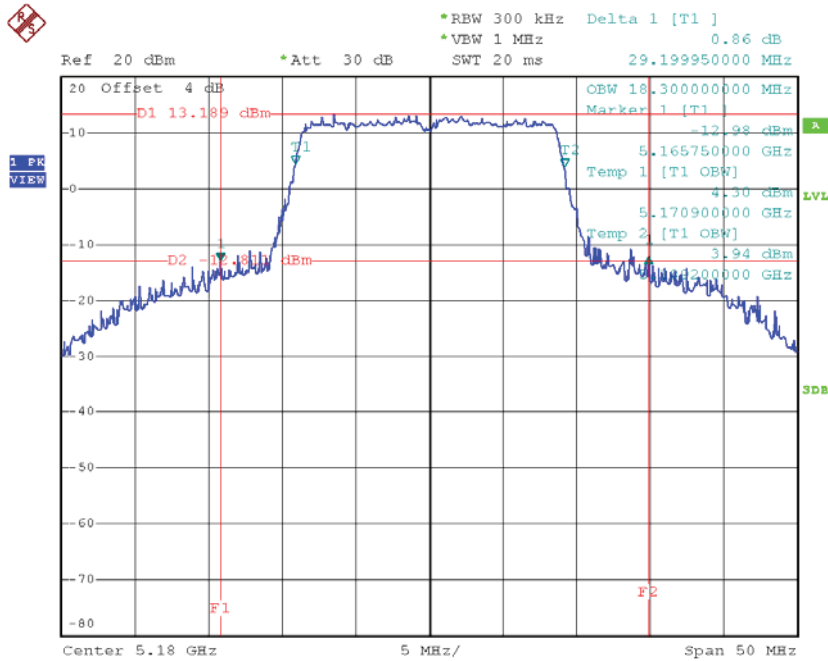

Date: 28.FEB.2017 13:31:46