



Antenna datasheet

LYNwave Technology

Antenna & Thermal solution provider

Antenna Simulation Report

Model Name: H660GX ,HX-H660GX-NA ,
HX-H660GX-EU ,HX-H660GX-UK ,
HX-H660GX-00

Feature: 2.4G+5G

Application: AP

Date	Owner	Revision
2022/03/02	Alon	1. S-Parameter Measurement 2. Antenna Passive Measurement
2022/03/07	Alon	1. Add Cable Length
2022/06/06	Alon	1. Add Device Description
2022/06/07	Xavi/Danny	1. Approval

Table of Contents

- A. Antenna RF Characteristics
 - 1. Antenna Placement
 - 2. Equipment List
 - 3. Test architecture
 - 4. S-Parameters
 - 5. Gain Table
 - 6. 2D/ 3D Radiation Pattern
 - 7. Summary

Antenna Placement

Antenna	Description	Frequency
Ant.1	ALX21P-221AAC-00	2412~2484 MHz ; 5150 ~ 5825 MHz
Ant.2	ALX21P-222AA6-00	2412~2484 MHz ; 5150 ~ 5825 MHz


Equipment List :

Antenna Chamber	MFC-2531(1.4x1.4x2.8m)
Test software	Passive 2D/3D川升
Network analyzer	Agilent E5071B
Controller	MF7802
Calibration time	2022/04/30


Antenna Chamber




Network analyzer and Controller :

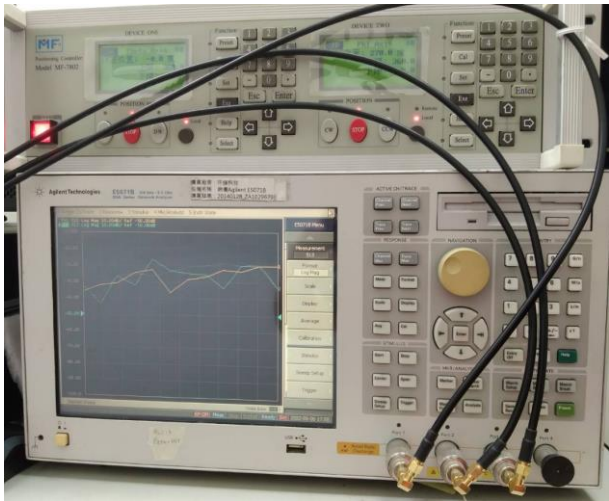

Test architecture :

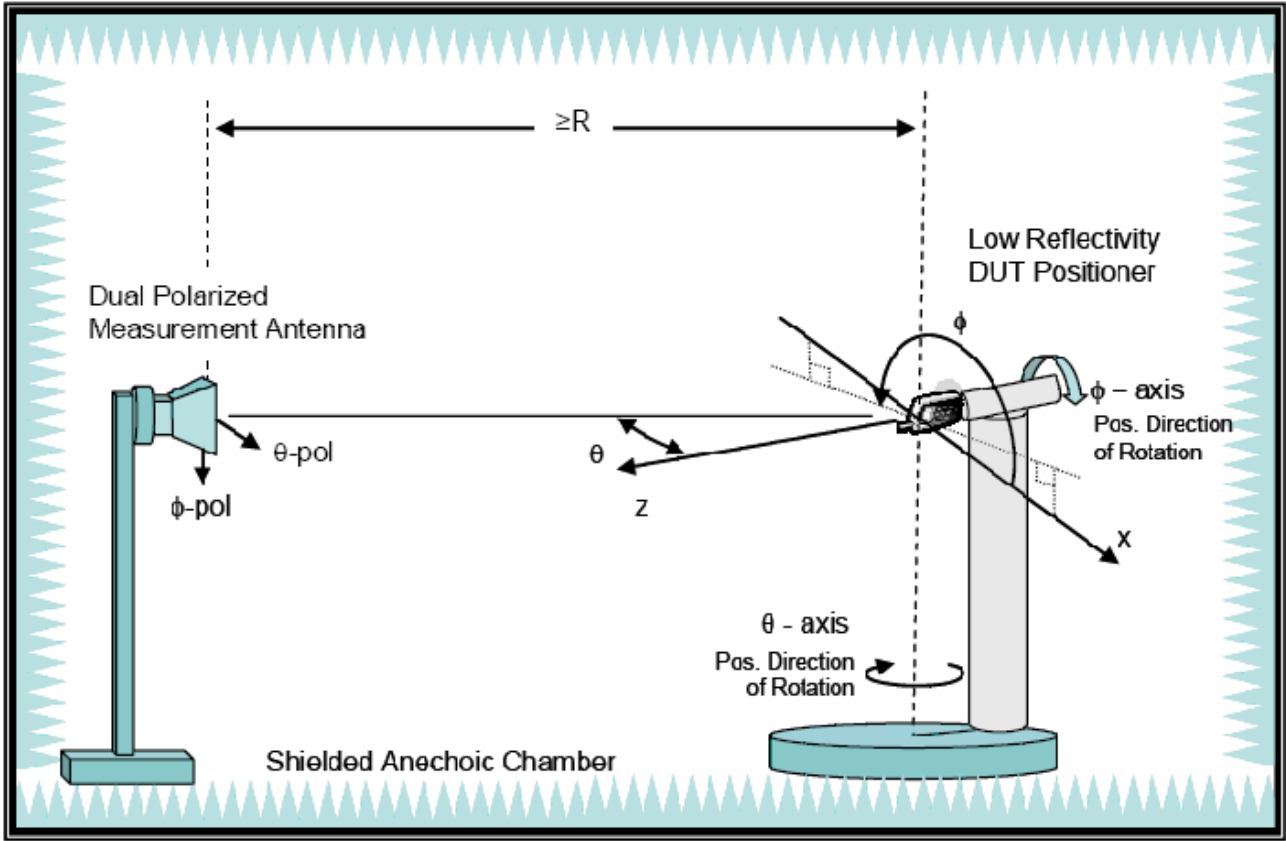

S-Parameters

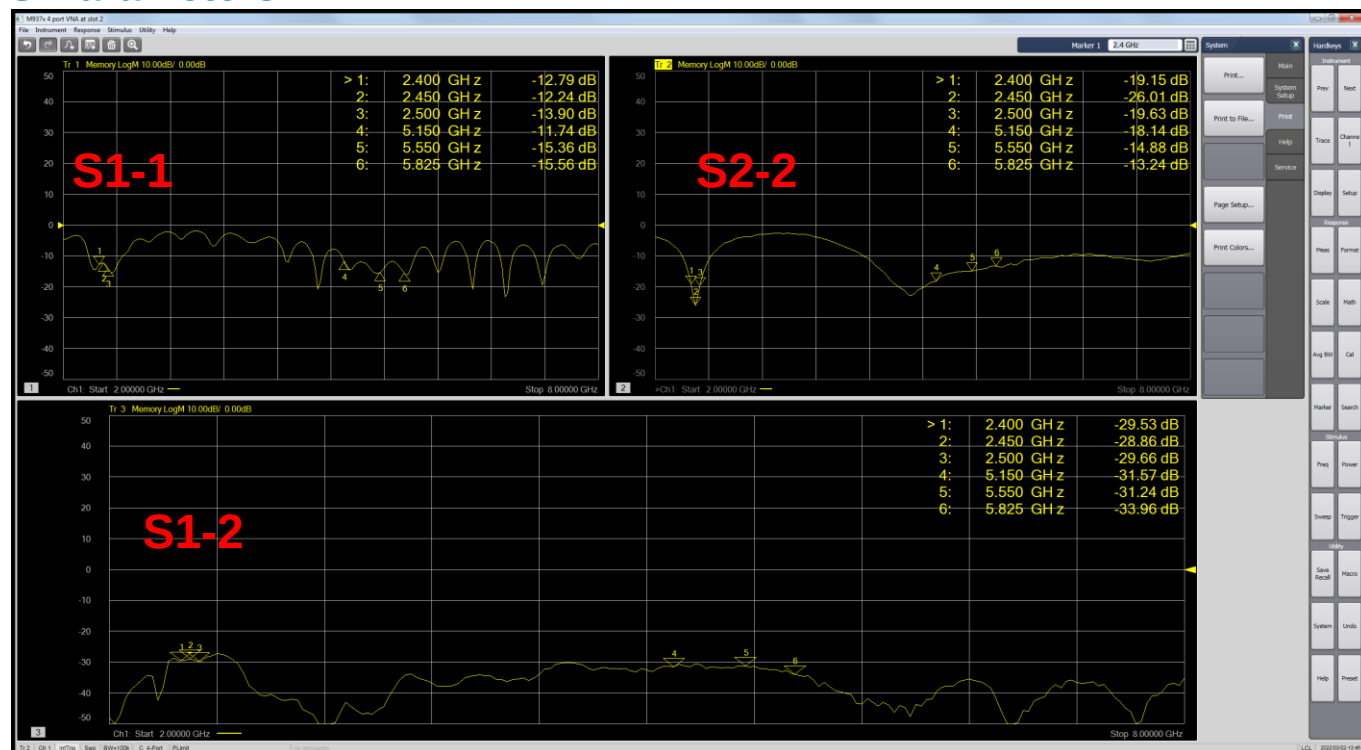

Gain Table_Coppertube

Ant.1						
Frequency (MHz)	2400	2450	2500	5150	5550	5825
Efficiency(%)	60	63	62	61	61	60
Peak Gain(dBi)	2.2	2.4	2.2	3.3	3.1	3.7
Ant.2						
Frequency (MHz)	2400	2450	2500	5150	5550	5825
Efficiency(%)	62	68	64	62	74	65
Peak Gain(dBi)	3.0	3.1	2.5	5.6	5.1	5.2


The antenna characteristics

- Gain
 - Dual band 2.4GHz : 2.2~3.1dBi
 - Dual band 5GHz : 3.1~5.6dBi
- Efficiency
 - 2.4GHz Band > 60%
 - 5GHz Band > 60%
- Isolation
 - 2.4GHz Band > 25dB
 - 5GHz Band > 25dB
- Return loss < -11dB in operating band
- Change Cable Length
 - Ant.1: 250mm
 - Ant.2: 45mm


Ant.1_2.4GHz 2D.3D Radiation Pattern
Frequency(MHz) : 2D. 2400~2500
3D. 2450

Radiation Pattern :





Azimuth Plane

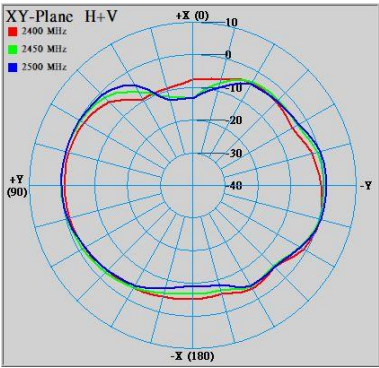


Elevation Plane
 $\phi = 0$

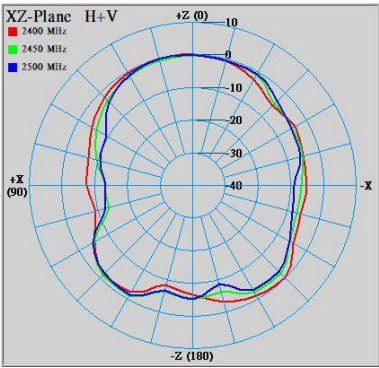

Elevation Plane
 $\phi = 90$

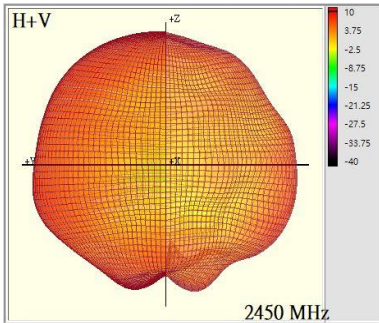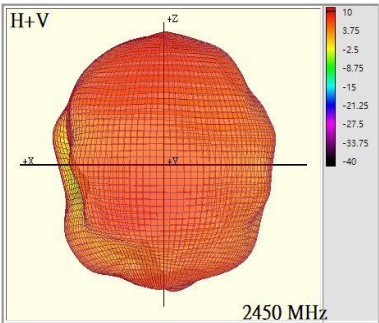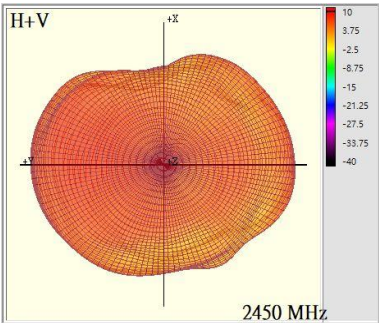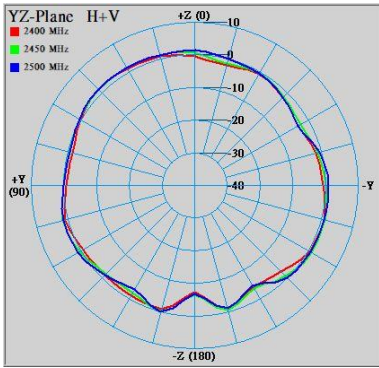

Setup :

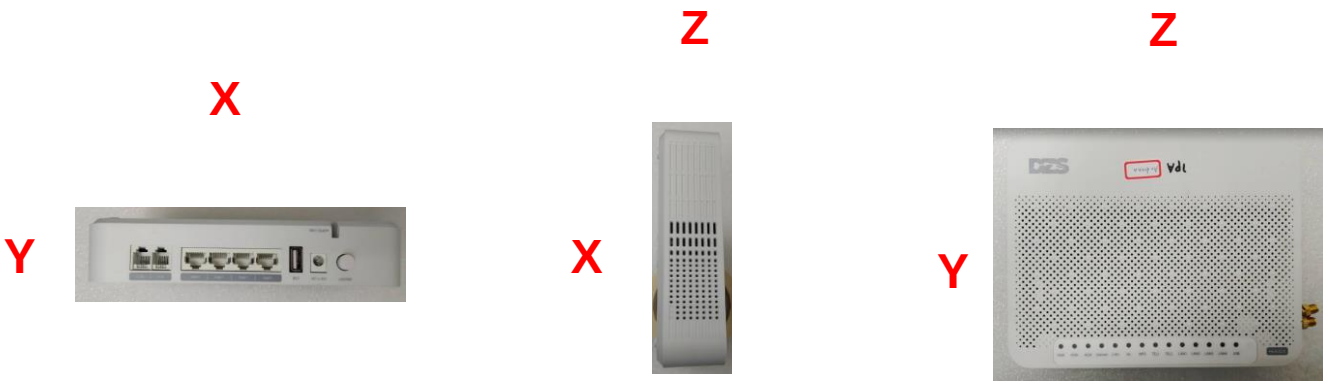


Ant.1_5GHz 2D.3D Radiation Pattern


Frequency(MHz) : 2D. 5150~5825
3D. 5550

Radiation Pattern :





Azimuth Plane

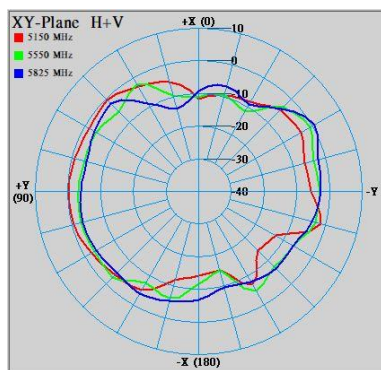

Elevation Plane
phi = 0

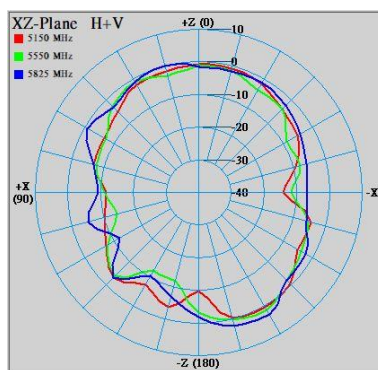

Elevation Plane
phi = 90

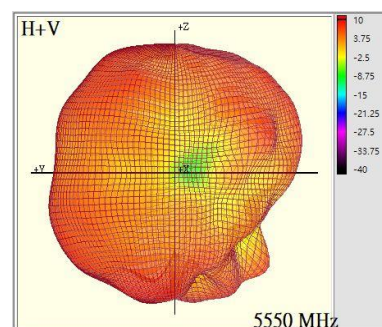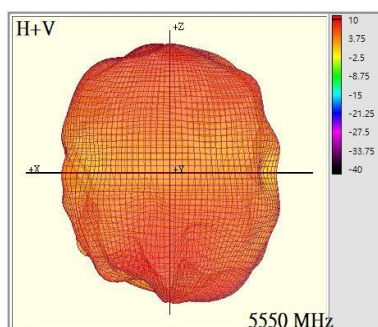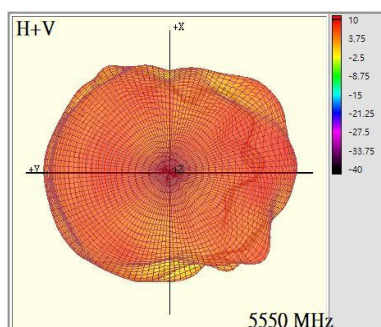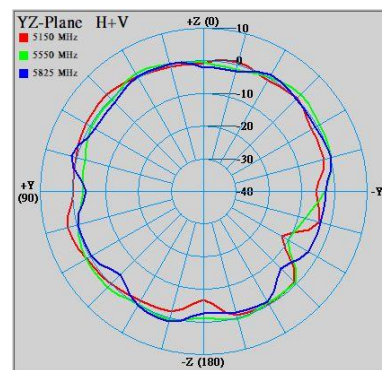

Setup :

X

Z

Z

Y



X




Y




Ant.2_2.4GHz 2D.3D Radiation Pattern
Frequency(MHz) : 2D. 2400~2500
3D. 2450

Radiation Pattern :





Azimuth Plane

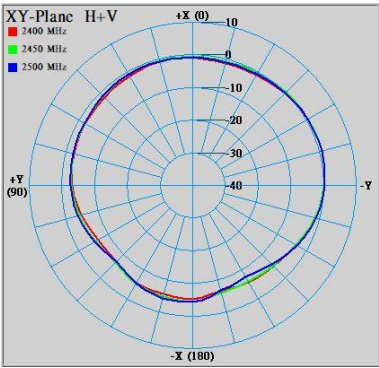


Elevation Plane
 $\phi = 0$

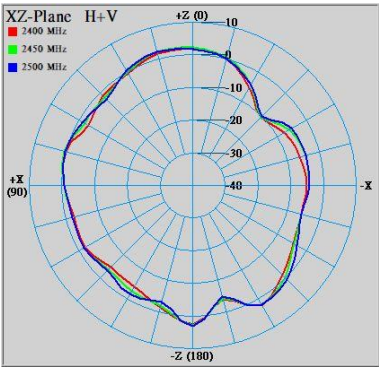

Elevation Plane
 $\phi = 90$

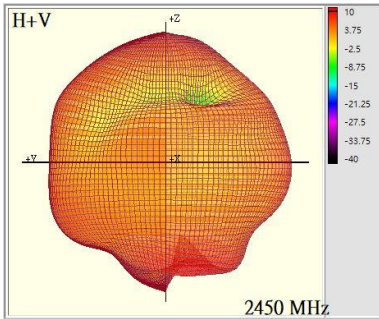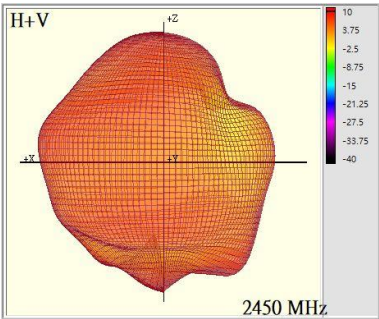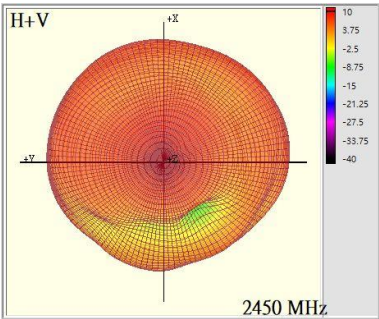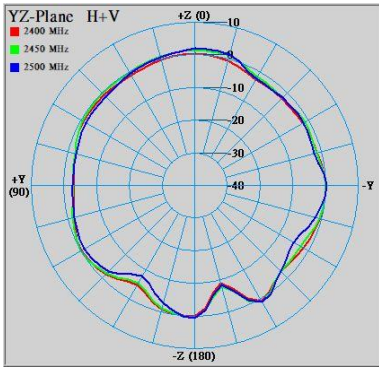

Setup :

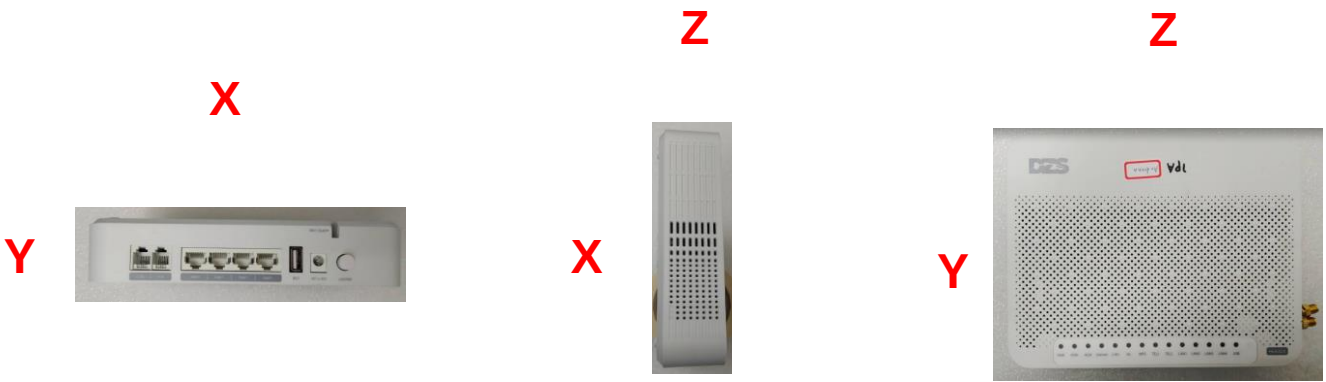


Ant.2_5GHz 2D.3D Radiation Pattern


Frequency(MHz) : 2D. 5150~5825
3D. 5550

Radiation Pattern :





Azimuth Plane

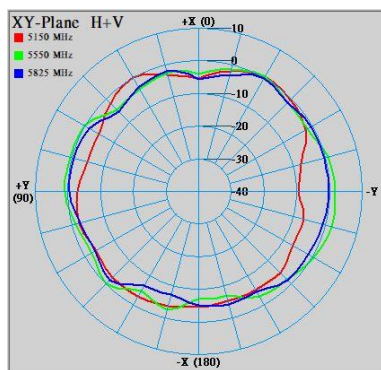

Elevation Plane
phi = 0

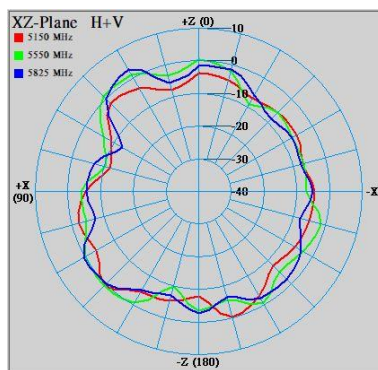

Elevation Plane
phi = 90

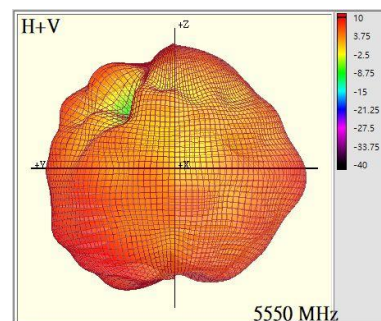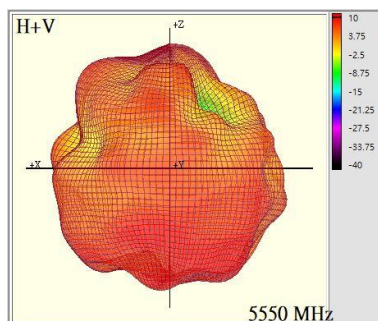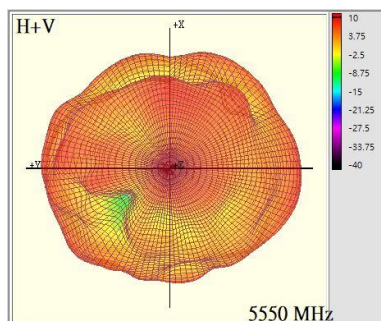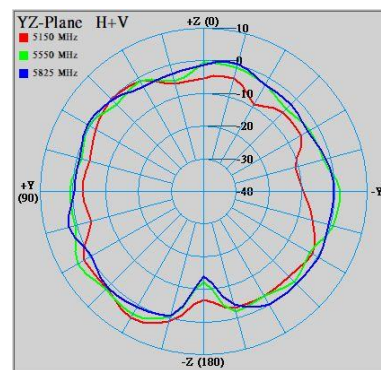

Setup :

X

Z

Z

Y



X



Y









Combine_2D.3D Radiation Pattern
Frequency(MHz) : 2D. 2400~2500
3D. 2450

Radiation Pattern :

Azimuth Plane

Elevation Plane
phi = 0

Elevation Plane
phi = 90

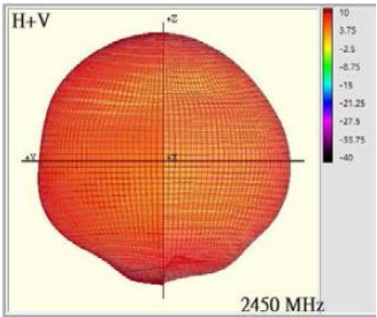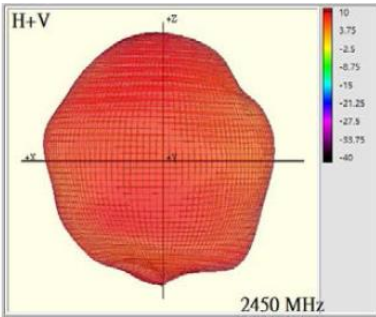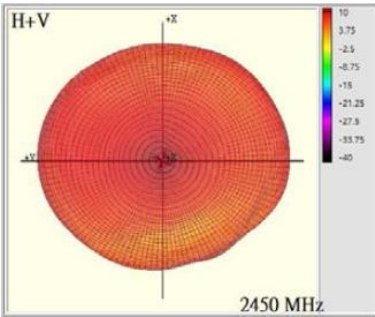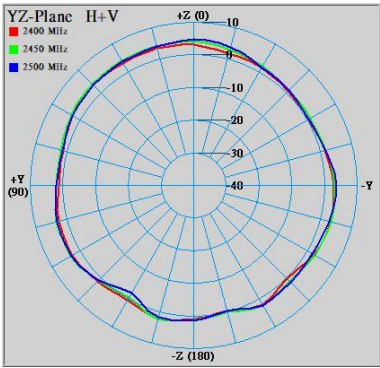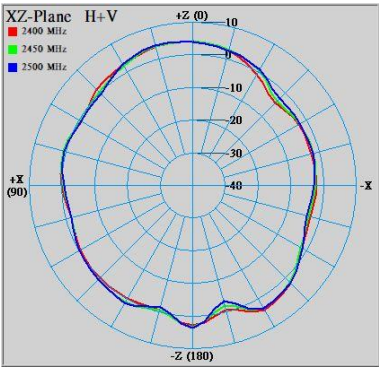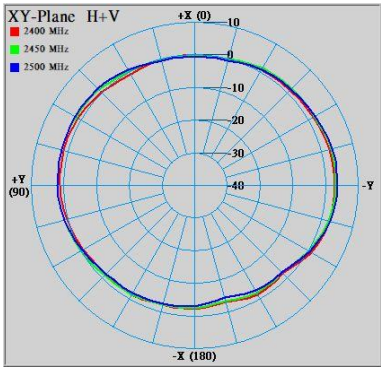

Setup :

X

Z

Z

Y



X



Y




Combine_2D.3D Radiation Pattern
Frequency(MHz) : 2D. 5150~5825
3D. 5550

Radiation Pattern :


Azimuth Plane

Elevation Plane
phi = 0

Elevation Plane
phi = 90

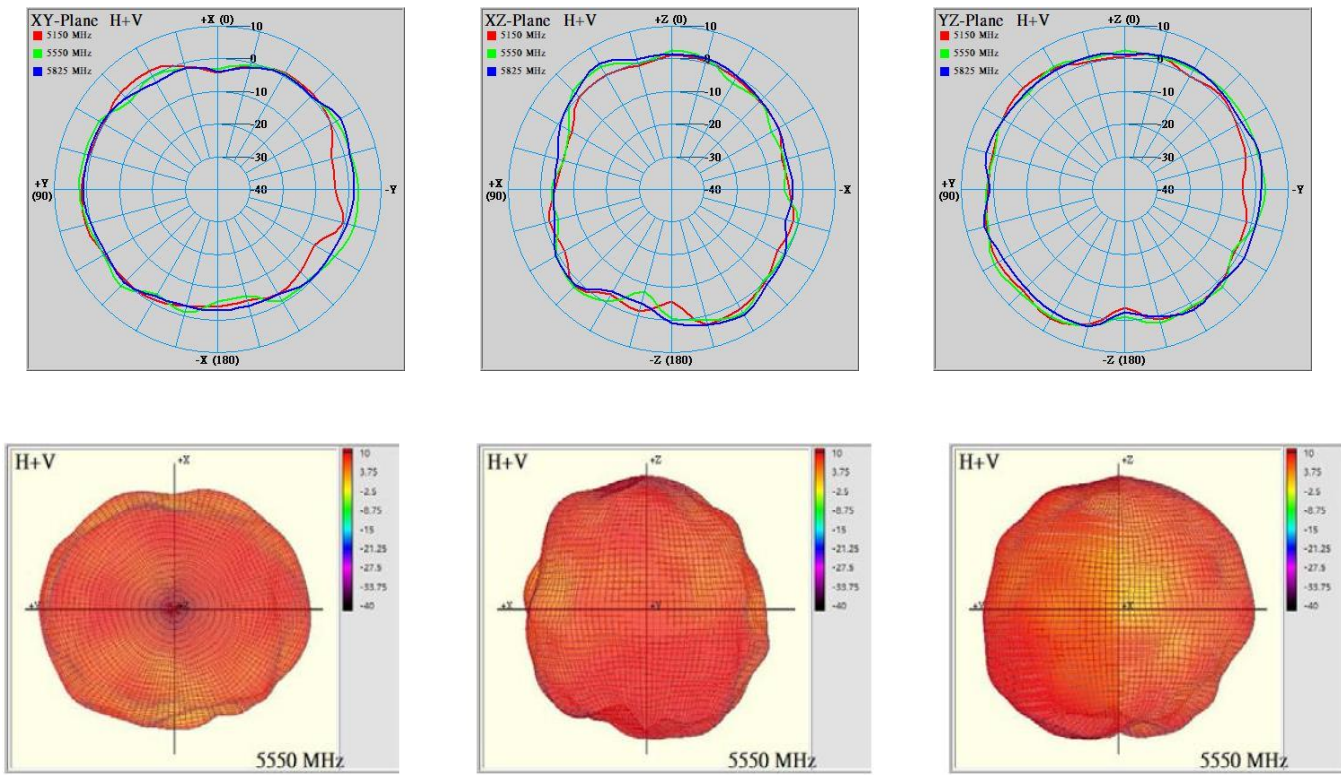

Setup :

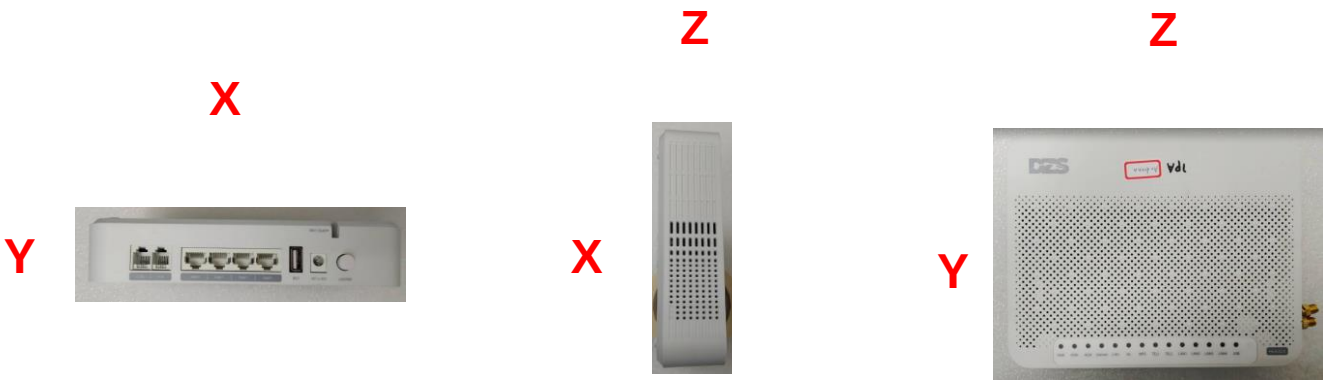

Summary

- Antenna meet the specification .

www.lynwave.com



<https://www.facebook.com/LYNwaveTechnology/>



<https://www.linkedin.com/company/lynwave-technology-ltd./>



<https://lynwave.en.alibaba.com/>