




TEST REPORT No.: (5210)365-0288

TEST REPORT

To:	MAY CHEONG TOY PRODUCTS FTY. LTD.	To:	-
Attn:	Huanghaiyu	Attn:	-
Address:	7/F., East Wing, Tsim Sha Tsui Centre, 66 Mody Road, Tsimshatsui East, Kowloon, Hong Kong	Address:	-
Fax:	0769-87753123	Fax:	-
E-mail:	huanghaiyu.mt@maycheonggroup.com.cn	E-mail:	-
Folder No.:	BVCK10DE104MTHS-B-A1		
Factory name:	--		
Location:	--		
Product:	Hobby R/C MODEL: 10082 (Assortment No.: 81131)		
	Sample No:	(5210)365-0288	
	Test date:	January 5, 2011	
	Test Requested:	FCC Part 15 - 2009	
	Test Method:	ANSI C63.4 - 2003	
	FCC ID:	PKG10082RC27	
The results given in this report are related to the tested specimen of the described electrical apparatus.			
CONCLUSION: The submitted sample was found to <u>COMPLY</u> with requirement of FCC Part 15 Subpart C.			
Authorized Signature:			
			
Reviewed by: Keith Yeung		Approved by: Steven Tsang	
Date: January 11, 2011		Date: January 11, 2011	



TEST REPORT No.: (5210)365-0288

Test Laboratory & Test Instruments List

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2003. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at :

BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre,
26 Hung To Road,
Kwun Tong, Kowloon,
Hong Kong

Test Instrument List

Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	R&S	ESCI	100379	06-SEP-2011
LOOP ANTENNA	ETS-LINDGREN	6502	00102266	17-MAY-2011
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	02-AUG-2011
OPEN AREA TEST SITE	BVCPS	N/A	N/A	05-JULY-2011
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	26-OCT-2011
COAXIAL CABLE	HUBER + SUHNER	RG214	N/A	19-SEP-2011

Remarks:-

N/A : Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

TEST REPORT No.: (5210)365-0288

Equipment Under Test [EUT]

Description of Sample:

Model Name: Hobby R/C
Model Number: 10082 (Assortment No.: 81131)
Additional Model Number: 10073 / 10091 / 81046 / 81047 (Assortment No.: 81132)
Additional model information: Declare the Circuit, PCB layout and Electrical parts of the products are identical to the basic model. Except the shape and colour of shell.
Rating: 9Vd.c ("6F22" size battery x 1)

Description of EUT Operation:

The Equipment Under Test (EUT) is a MAY CHEONG TOY PRODUCTS FTY. LTD. of Radio Control toy. The transmitter is 1 wheel, 1 trigger, 2 knobs and 2 switches and operating at 27.143MHz. It includes 3 channels – A, B & C and they are using the same frequency, the difference is the pattern of pulse train. The worst case was tested and the result is shown in the report. The EUT continues to transmit when trigger is being pressed, Modulation by IC, and type is pulse modulation.


The transmitter has different control:

1. Wheel – control left and right
2. Trigger – control forward and backward
3. ST. TRIM knob – trim left and right control
4. TH. TRIM knob – trim forward and backward control
5. On/Off – control ON / OFF
6. A/B/C Channel – choose A/B/C channel

Antenna Requirement

The EUT is use of a permanently antenna. The antenna consists of 29.5cm long metal antenna. It is soldered on the PCB. The antenna is not replaceable or user serviceable. There are no deviations or exceptions to the specifications.

Photo of Antenna

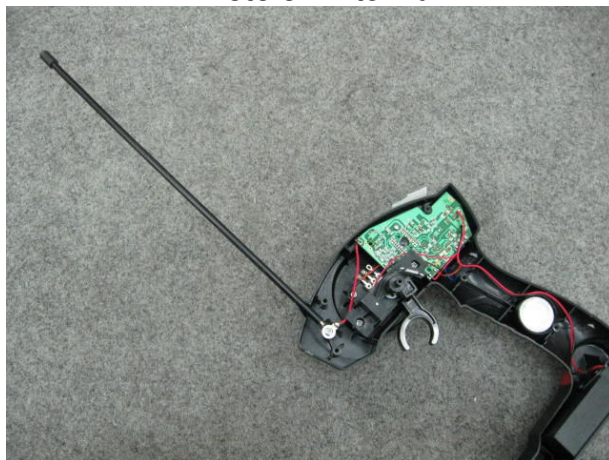

TEST REPORT No.: (5210)365-0288

Test Results

Radiated Emissions (Fundamental)

Test Requirement:	FCC Part 15 Section 15.227
Test Method:	ANSI C63.4
Test Date(s):	2011-01-05
Temperature:	19.0 °C
Humidity:	71.0 %
Atmospheric Pressure:	101.2 kPa
Mode of Operation:	Transmission mode
Tested Voltage:	9Vd.c. ("6F22" size battery x 1)

Test Method:


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2003.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Test Setup: Open Area Test Site

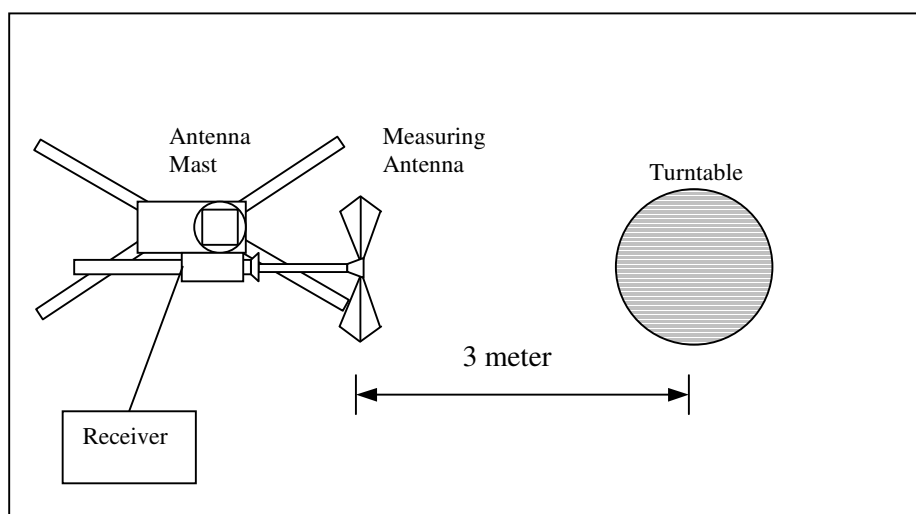



TEST REPORT No.: (5210)365-0288

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [μV/m]	Field Strength of Fundamental Emission [Average] [μV/m]
26.96 – 27.28	100,000 (100 dBμV/m)	10,000 (80 dBμV/m)

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Peak

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
27.147	V/0°	9.5	67.5	100	-32.5

Detection mode: # Average

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
27.147	V/0°	9.5	**47.5	80	-32.5

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

**Duty Cycle Correction = 20Log(0.064) = -23.8dB.

Finally, -20dB is taken as the precedence.

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 100KHz
VBW = 300KHz



TEST REPORT No.: (5210)365-0288

Radiated Emissions (9kHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.209
Test Method: ANSI C63.4
Test Date(s): 2011-01-05
Temperature: 19.0 °C
Humidity: 71.0 %
Atmospheric Pressure: 101.2 kPa
Mode of Operation: Transmission mode
Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
1.705-30	300
30-88	100
88-216	150
216-960	200
Above960	500



TEST REPORT No.: (5210)365-0288
Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
54.294	H	6.9	23.7	40.0	-16.3
81.441	H	7.6	21.8	40.0	-18.2
108.588	H	12.4	22.9	43.5	-20.6
135.735	H	12.2	23.6	43.5	-19.9
162.882	H	10.5	22.5	43.5	-21.0
190.029	H	9.6	23.6	43.5	-19.9
217.176	H	10.0	25.8	46.0	-20.2
244.323	H	13.1	24.7	46.0	-21.3
271.470	H	13.3	26.2	46.0	-19.8
298.617	H	14.4	28.9	46.0	-17.1

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
54.294	V	6.9	23.9	40.0	-16.1
81.441	V	7.6	22.2	40.0	-17.8
108.588	V	12.4	21.7	43.5	-21.8
135.735	V	12.2	23.4	43.5	-20.1
162.882	V	10.5	23.1	43.5	-20.4
190.029	V	9.6	24.1	43.5	-19.4
217.176	V	10.0	24.7	46.0	-21.3
244.323	V	13.1	24.3	46.0	-21.7
271.470	V	13.3	27.8	46.0	-18.2
298.617	V	14.4	25.4	46.0	-20.6

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz
 VBW = 120KHz



TEST REPORT No.: (5210)365-0288

26dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227
 Test Method: ANSI C63.4:2003 (Section 13.1.7)
 Test Date(s): 2011-01-05
 Temperature: 19.0 °C
 Humidity: 71.0 %
 Atmospheric Pressure: 101.2 kPa
 Mode of Operation: Transmission mode
 Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Limits for 26dB Bandwidth of Fundamental Emission:

Frequency [MHz]	26dB Bandwidth [KHz]	Limits [MHz]
27.14752	96.64	within 26.96 – 27.28


TEST REPORT No.: (5210)365-0288

Measurement Data :

Test Result of 26dB Bandwidth of Fundamental Emission: PASS



Ref 82 dB μ V/m *Att 10 dB RBW 10 kHz Marker 1 [T1]
 VBW 30 kHz 57.64 dB μ V/m
 SWT 5 ms 27.147520000 MHz

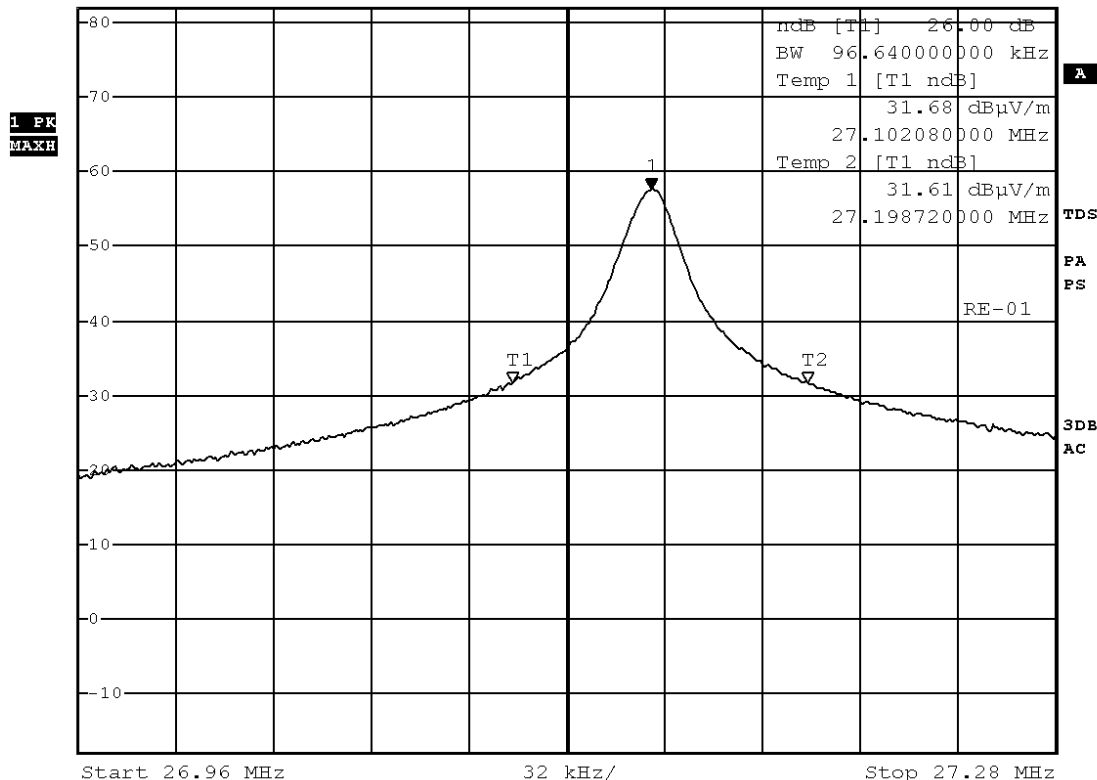

Date: 5.JAN.2011 15:25:03



TEST REPORT No.: (5210)365-0288

Duty Cycle Correction During 100msec:

Each function key sends a different series of characters, but each packet period (70msec) never exceeds a series of 1 long (0.5msec) and 20 short (0.2msec) pulses. Assuming any combination of short or long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered $[(0.5\text{msec}) + (20 \times 0.2\text{msec})]$ per 70msec = 6.4% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.


Remarks:

Duty Cycle Correction = $20\text{Log}(0.064) = -23.8\text{dB}$
Finally, -20dB is taken as the precedence.

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.


TEST REPORT No.: (5210)365-0288

Figure A [Pulse Train]

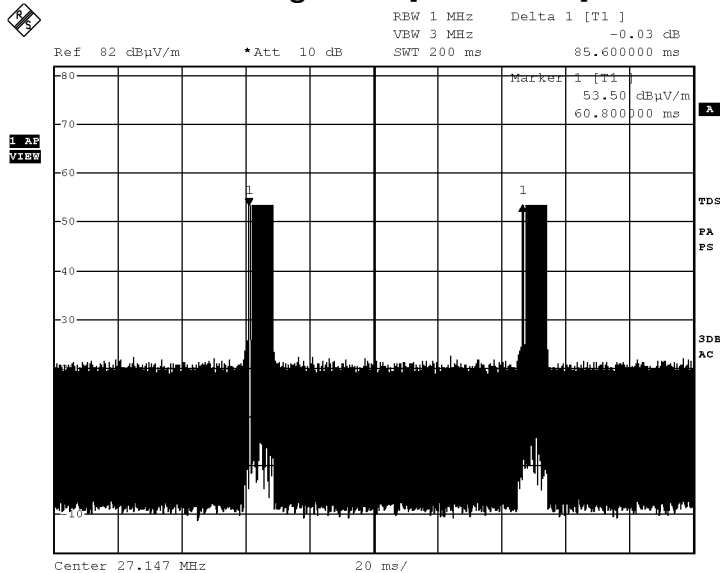

Date: 5.JAN.2011 15:45:39


Figure B [Long Pulse]

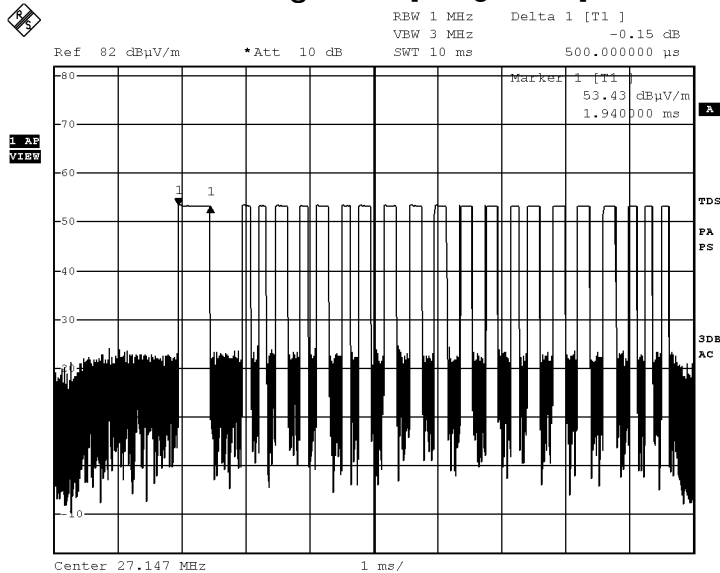

Date: 5.JAN.2011 15:49:32

TEST REPORT No.: (5210)365-0288

Figure C [Short Pulse]

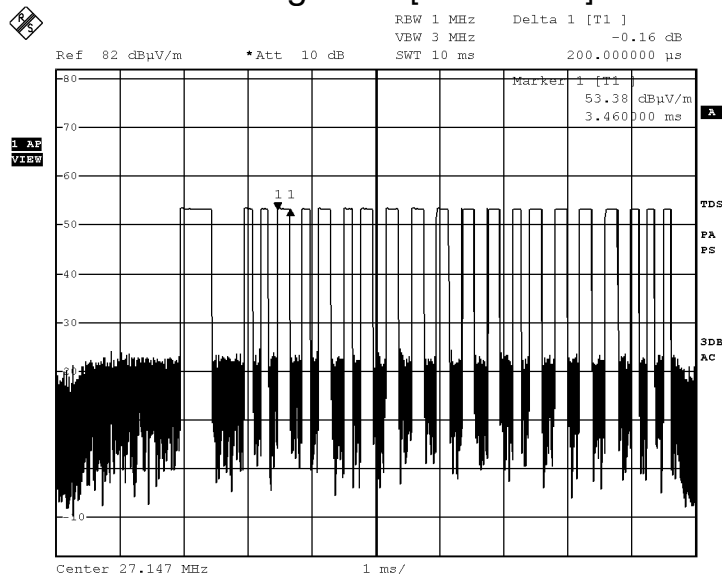

Date: 5.JAN.2011 15:49:57

TEST REPORT No.: (5210)365-0288

Photographs of EUT

Front View of the product




Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View

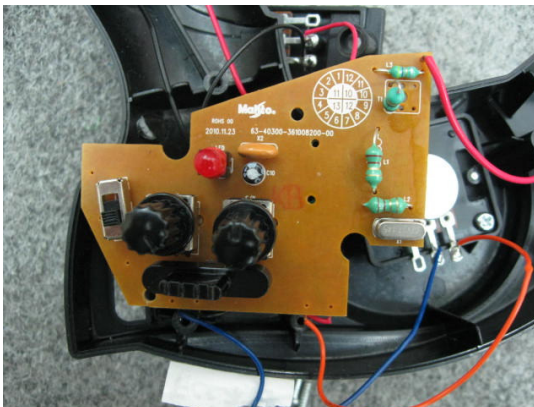

TEST REPORT No.: (5210)365-0288


Battery compartment



Battery Cover



Internal View of the product

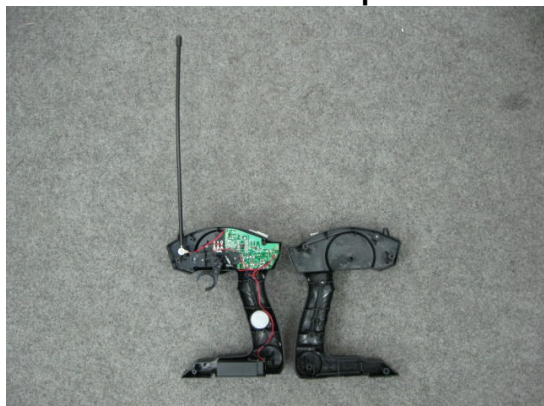

Antenna



TEST REPORT No.: (5210)365-0288

Measurement of Radiated Emission Test Set Up



******* End of Report *******