

FCC PART 15.231

## TEST REPORT

For

### **Kenyazi Investment LTD.**

Flat A-1, 8/F, Yip Fung Ind. BLDG, 28-36 Kwai Fung  
Crescent Kwai Fong, N.T. Hong Kong

**FCC ID: PKH-604XX**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Indoor Remote Control LNS (Transmitter Unit)
<b>Test Engineer:</b> Jimmy Xiao	<i>Jimmy Xiao</i>
<b>Report Number:</b> RSZ130521006-00A	
<b>Report Date:</b> 2013-07-05	
<b>Reviewed By:</b> Alvin Huang RF Leader	<i>Alvin Huang</i>
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY .....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>4</b>
JUSTIFICATION .....	4
SPECIAL ACCESSORIES.....	4
EQUIPMENT MODIFICATIONS .....	4
BLOCK DIAGRAM OF TEST SETUP .....	4
<b>SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>6</b>
APPLICABLE STANDARD .....	6
ANTENNA CONNECTOR CONSTRUCTION .....	6
<b>FCC §15.205, §15.209, §15.231 (B) - RADIATED EMISSIONS .....</b>	<b>7</b>
APPLICABLE STANDARD .....	7
MEASUREMENT UNCERTAINTY.....	7
EUT SETUP.....	8
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE .....	9
TEST EQUIPMENT LIST AND DETAILS.....	9
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	9
TEST RESULTS SUMMARY .....	10
TEST DATA .....	10
<b>FCC §15.231(C) – 20 DB EMISSION BANDWIDTH TESTING .....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST PROCEDURE .....	15
TEST DATA .....	15
<b>FCC §15.231(A)(2) - DEACTIVATION TESTING.....</b>	<b>17</b>
APPLICABLE STANDARD .....	17
TEST PROCEDURE .....	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA .....	17
<b>PRODUCT SIMILARITY DECLARATION LETTER.....</b>	<b>19</b>

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *Kenyasi Investment LTD.* 's product, model number: 60411 (FCC ID: PKH-604XX) (the "EUT") in this report was the transmitter unit of an *Indoor Remote Control LNS*, which was measured approximately: 25.6 cm (L) x 17.0 cm (W) x 10.0 cm (H), rated input voltage: DC 3\*1.5V battery.

*Note: The series product, model 60411, 60412, 60413, 60414, 60415, 60416, 60417, 60418 and 60419, they are electrically identical and the difference between them is only the model number. Model 60411 was selected for testing, which was explained in the attached product similarity declaration letter.*

*\*All measurement and test data in this report was gathered from production sample serial number: 1305112 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-05-21.*

### Objective

This is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4-2009.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15B CYY, the receiver part of the system submission with FCC ID: PKH-604XX-RX.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

---

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).


### Special Accessories

The special accessories were provided by Bay Area Compliance Laboratories Corp. (Shenzhen).

### Equipment Modifications

No modification was made to the EUT tested.

### Block Diagram of Test Setup

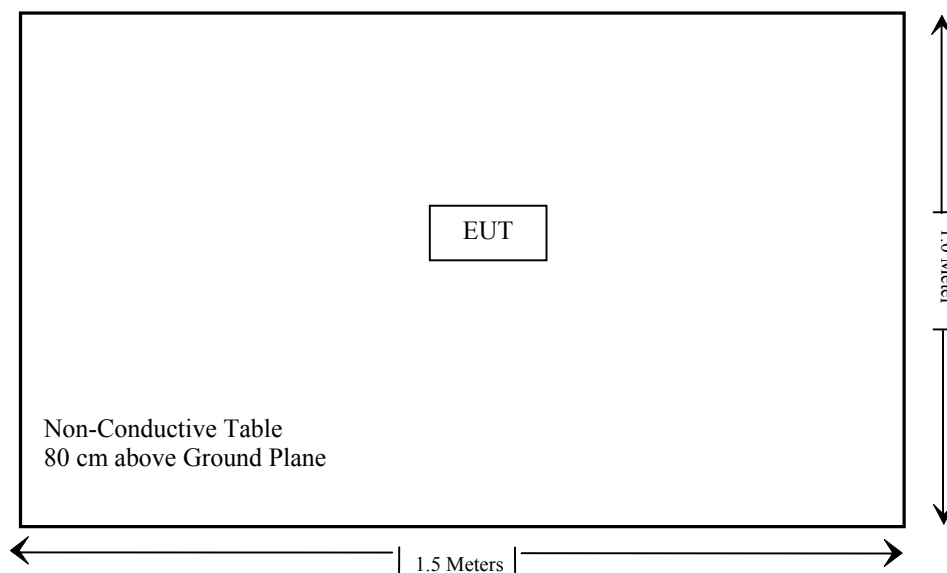

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Not Applicable
§15.205, §15.209, §15.231 (b)	Radiated Emissions	Compliance
§15.231 (c)	20dB Emission Bandwidth	Compliance
§15.231 (a)(2)	Active time, Silent period	Compliance

Not Applicable: The EUT is powered by battery only.

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connector Construction**

The EUT has one integrated PCB antenna arrangement, which was permanently attached and the gain was 0 dBi, fulfill the requirement of this section. Please refer to EUT photos.

**Result:** Compliant.

## **FCC §15.205, §15.209, §15.231 (b) - RADIATED EMISSIONS**

### **Applicable Standard**

FCC §15.205, §15.209, §15.231 (b)

According to FCC §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

<b>Fundamental frequency (MHz)</b>	<b>Field Strength of Fundamental (Microvolts /meter)</b>	<b>Field Strength of spurious emissions ((Microvolts /meter)</b>
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750**	125 to 375**
174-260	3750	375
260-470	3750 to 12500**	375 to 1250**
Above 470	12500	1250

\*Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

### **Measurement Uncertainty**


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report


<b>Frequency</b>	<b>Polarity</b>	<b>Measurement uncertainty</b>
30MHz~200MHz	Horizontal	4.62 dB (k=2, 95% level of confidence)
	Vertical	4.54 dB (k=2, 95% level of confidence)
200MHz~1GHz	Horizontal	4.84 dB (k=2, 95% level of confidence)
	Vertical	5.91 dB (k=2, 95% level of confidence)
1 GHz~6 GHz	Horizontal/Vertical	4.68 dB (k=2, 95% level of confidence)
Above 6 GHz	Horizontal/Vertical	4.92 dB (k=2, 95% level of confidence)

## EUT Setup

### Below 1 GHz:

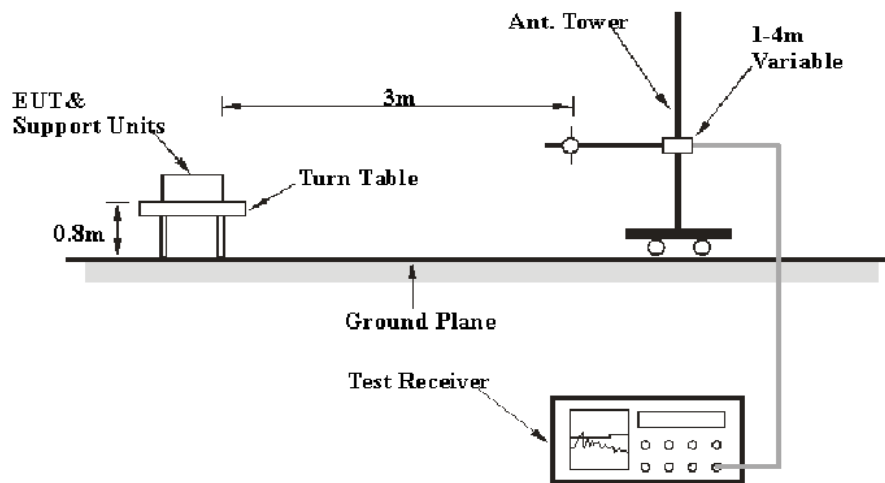

### Above 1 GHz:

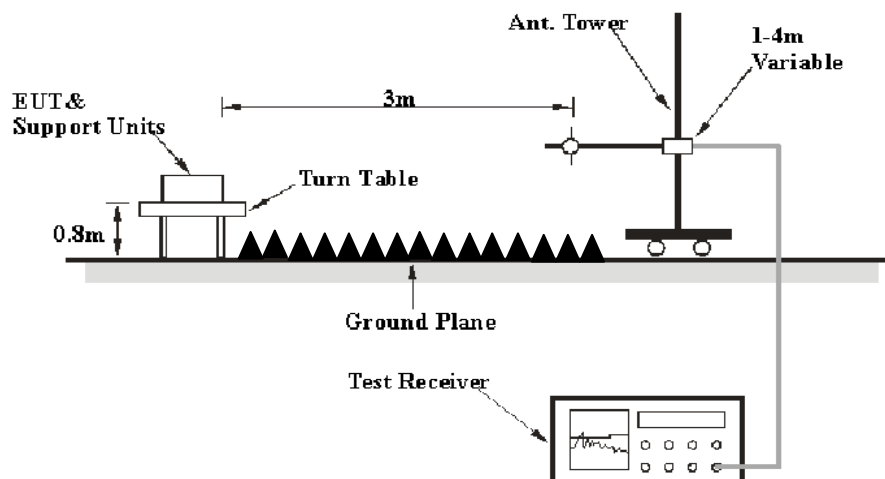

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4 - 2009. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.



## EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1 GHz.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-05-09	2014-05-09
HP	Amplifier	8447E	1937A01046	2012-11-24	2013-11-23
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Mini-Circuits	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 5.8 dB means the emission is 5.8 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.205, §15.209, §15.231 (b), with the worst margin reading of:

**4.24 dB at 2169.5 MHz in the Horizontal polarization**

## Test Data

### Environmental Conditions

Temperature:	26 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Jimmy Xiao on 2013-05-27.

Test mode: Transmitting

30 MHz-5 GHz:


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.231/205/209		
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)	Comment
433.92	93.05	PK	125	1.1	V	-9.73	83.32	100.8	17.48	Fund.
433.92	92.60	PK	251	1.2	H	-9.73	82.87	100.8	17.93	Fund.
2169.5	63.28	PK	95	1.5	H	3.94	67.22	80.80	13.58	Harmonic
1301.7	59.93	PK	57	1.9	V	0.19	60.12	74.00	13.88	Harmonic
2169.5	62.29	PK	5	1.7	V	3.94	66.23	80.80	14.57	Harmonic
2603.4	54.89	PK	38	1.4	V	7.40	62.29	80.80	18.51	Harmonic
1301.7	55.03	PK	127	1.1	H	0.19	55.22	74.00	18.78	Harmonic
2603.4	51.56	PK	145	1.7	H	7.40	58.96	80.80	21.84	Harmonic
1735.6	56.44	PK	122	1.9	H	2.24	58.68	80.80	22.12	Harmonic
1735.6	53.75	PK	273	1.5	V	2.24	55.99	80.80	24.81	Harmonic
867.84	56.98	PK	241	1.2	V	-1.76	55.22	80.80	25.58	Harmonic
867.84	56.6	PK	135	1.2	H	-1.76	54.84	80.80	25.96	Harmonic

Field Strength of Average Emission							
Frequency (MHz)	Peak Measurement @3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.231/209/205		
					Limit (dBμV/m)	Margin (dB)	Comment
433.92	83.32	V	-10.66	72.66	80.80	8.14	Fund.
433.92	82.87	H	-10.66	72.21	80.80	8.59	Fund.
2169.5	67.22	H	-10.66	56.56	60.80	4.24	Harmonic
1301.7	60.12	V	-10.66	49.46	54.00	4.54	Harmonic
2169.5	66.23	V	-10.66	55.57	60.80	5.23	Harmonic
2603.4	62.29	V	-10.66	51.63	60.80	9.17	Harmonic
1301.7	55.22	H	-10.66	44.56	54.00	9.44	Harmonic
2603.4	58.96	H	-10.66	48.30	60.80	12.50	Harmonic
1735.6	58.68	H	-10.66	48.02	60.80	12.78	Harmonic
1735.6	55.99	V	-10.66	45.33	60.80	15.47	Harmonic
867.84	55.22	V	-10.66	44.56	60.80	16.24	Harmonic
867.84	54.84	H	-10.66	44.18	60.80	16.62	Harmonic

Note: Duty cycle= $T_{on}/(T_{on}+T_{off})=(0.156*21+0.4175*4)/16.88=0.293$

Duty Cycle Corrected Factor= $20\lg(\text{Duty cycle})=20\lg(0.194)=-10.66\text{ dB}$


## Duty Cycle 1

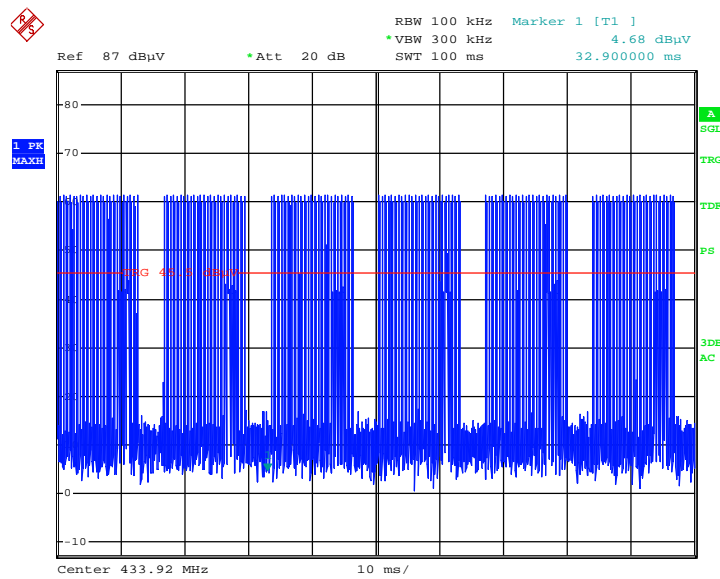

EUT

Date: 27.MAY.2013 10:59:26


## Duty Cycle 2

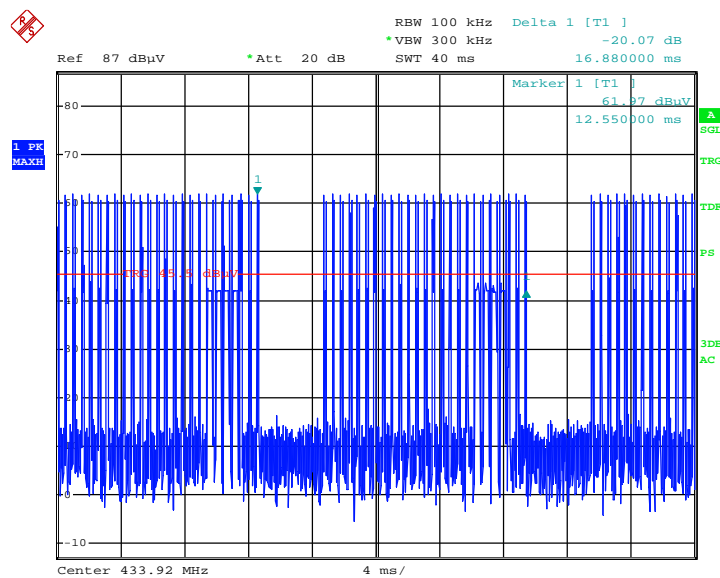

EUT

Date: 27.MAY.2013 11:02:32


## Duty Cycle 3

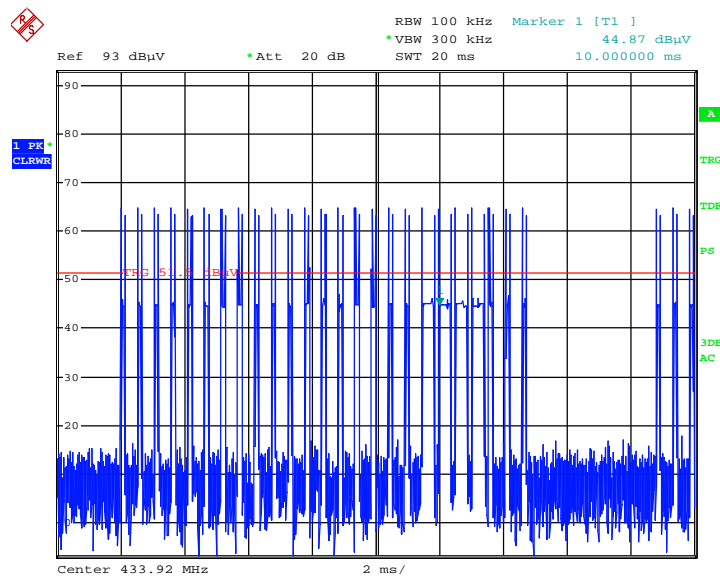

EUT

Date: 27.MAY.2013 11:03:58


## Duty Cycle 4

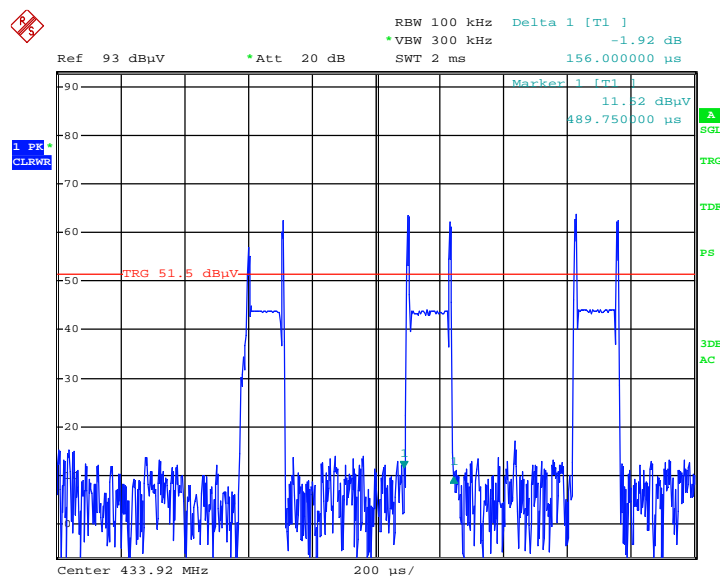

EUT

Date: 27.MAY.2013 11:05:31

Duty Cycle 5

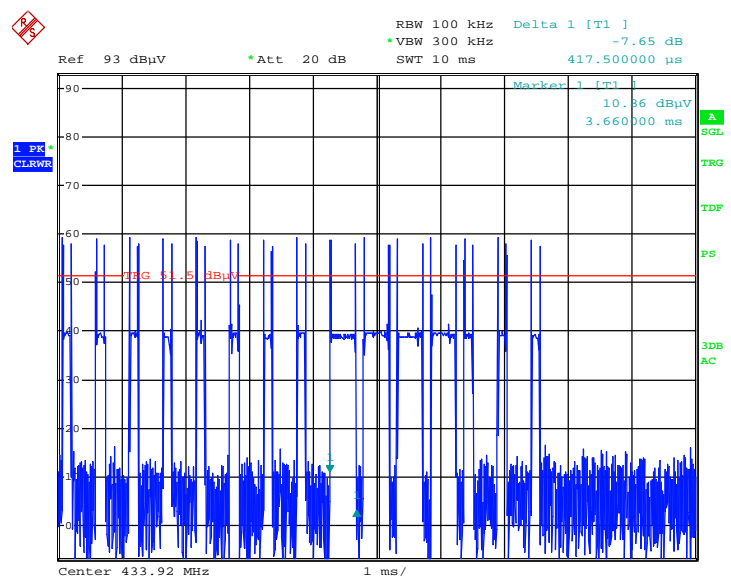

EUT  
Date: 27.MAY.2013 11:09:11

## FCC §15.231(c) – 20 dB EMISSION BANDWIDTH TESTING

### Applicable Standard

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-05-09	2014-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

With the EUT's antenna attached, the waveform was received by the test antenna which was connected to the spectrum analyzer; plot the 20 dB emission bandwidth.

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	100.1 kPa

*The testing was performed by Jimmy Xiao on 2013-05-29.*


*Test Mode: Transmitting*

Please refer to following table and plot.

Channel Frequency (MHz )	20 dB Emission Bandwidth (kHz)	<Limit (kHz)	Result
433.92	51.0	1084.8	Pass

Note: LIMIT = 0.25% \* center frequency = 0.25% \* 433.92 MHz = 1084.8 kHz  
20dB Bandwidth = 51.0 kHz <1084.8 kHz

20 dB Emission Bandwidth

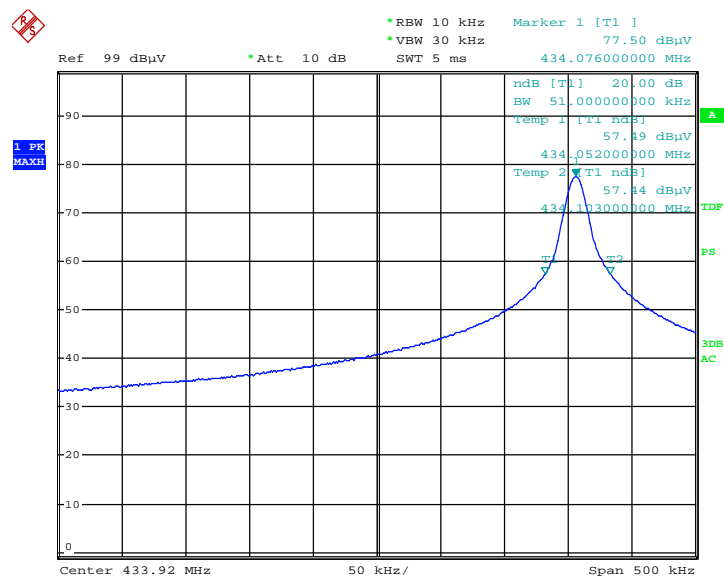

EUT  
Date: 29.MAY.2013 12:31:39



**FCC §15.231(a)(2) - DEACTIVATION TESTING****Applicable Standard**

Per FCC §15.231(a) (2), a transmitter activated automatically shall cease transmission within 5 seconds after activation.

**Test Procedure**

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer=operating frequency.
3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz.
4. Repeat above procedures until all frequency measured was complete.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-05-09	2014-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).


**Test Data****Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

*The testing was performed by Jimmy Xiao on 2013-05-27.*

*Test Mode: Transmitting*

**Test Result:** Compliant, please refer to following plot

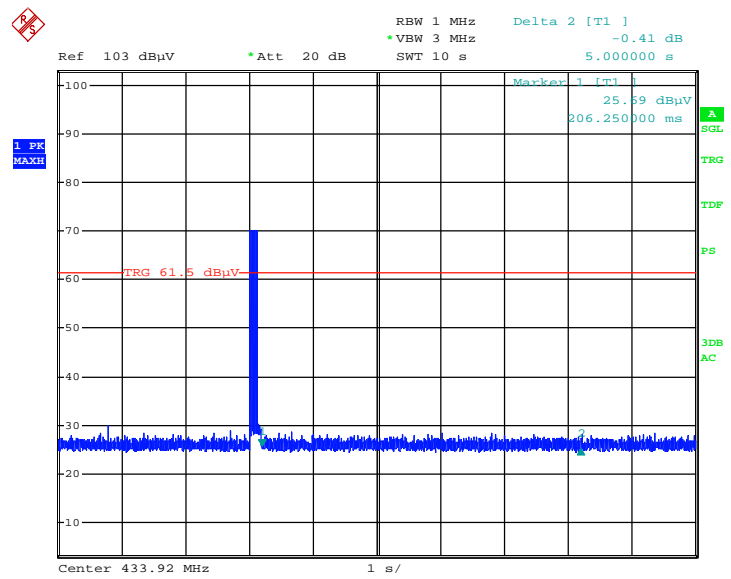

EUT  
Date: 27.MAY.2013 12:51:45

## **PRODUCT SIMILARITY DECLARATION LETTER**

---

### **Kenyazi Investment Limited**

Flat A-1,8/f,Yip Fung Industrial Building,28-36 Kwai Fung Crescent,Kwai Fong,N/A N.T.Hongkong  
N/A

Tel: (852)24850868 Fax: (852)-24850743

---



2013-6-14

### **Product Similarity Declaration**

To Whom It May Concern,

We, Kenyazi Investment LTD hereby declare that our Indoor remote Control LNS(juke box), Model Number: 60412, 60413, 60414,60415,60416,60417,60418,60419 is electrically identical with 60411 that was certified by BACL. They are just different in model numbers due to marketing purposes.  
Please contact me if you have any question.

Signature:



Michael  
General Manager

**\*\*\*\*\*END OF REPORT\*\*\*\*\***